



SAR TEST REPORT

No. 2009SAR00017

For

Shenzhen Sang Fei Consumer Communications Co.,Ltd.

850/900/1800/1900 GSM/GPRS Mobile Phone

Xenium X810

With

Hardware Version: PR1

Software Version: XFLAT2_M6229X_081205_V10

FCCID: VQRCTX810

Issued Date: 2009-03-30



No. DAT-P-114/01-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Information Industry

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0)10-62303288-2084, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

TABLE OF CONTENT

1 TEST LABORATORY	3
1.1 TESTING LOCATION	3
1.2 TESTING ENVIRONMENT.....	3
1.3 PROJECT DATA	3
1.4 SIGNATURE.....	3
2 CLIENT INFORMATION	4
2.1 APPLICANT INFORMATION	4
2.2 MANUFACTURER INFORMATION	4
3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1 ABOUT EUT.....	5
3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
4 CHARACTERISTICS OF THE TEST	6
4.1 APPLICABLE LIMIT REGULATIONS	6
4.2 APPLICABLE MEASUREMENT STANDARDS.....	6
5 OPERATIONAL CONDITIONS DURING TEST	7
5.1 SCHEMATIC TEST CONFIGURATION.....	7
5.2 SAR MEASUREMENT SET-UP.....	7
5.3 DASY4 E-FIELD PROBE SYSTEM.....	8
5.4 E-FIELD PROBE CALIBRATION	9
5.5 OTHER TEST EQUIPMENT	10
5.6 EQUIVALENT TISSUES.....	10
5.7 SYSTEM SPECIFICATIONS.....	11
6 CONDUCTED OUTPUT POWER MEASUREMENT.....	11
6.1 SUMMARY	11
6.2 CONDUCTED POWER	11
7 TEST RESULTS	12
7.1 DIELECTRIC PERFORMANCE	12
7.2 SYSTEM VALIDATION.....	12
7.3 SUMMARY OF MEASUREMENT RESULTS (GSM 850)	13
7.6 SUMMARY OF MEASUREMENT RESULTS (GSM 1900)	14
7.7 SUMMARY OF MEASUREMENT RESULTS (BLUETOOTH FUNCTION)	16
7.8 CONCLUSION.....	17
8 MEASUREMENT UNCERTAINTY	17
9 MAIN TEST INSTRUMENTS	18
ANNEX A MEASUREMENT PROCESS.....	19
ANNEX B TEST LAYOUT	20
ANNEX C GRAPH RESULTS.....	22
ANNEX D SYSTEM VALIDATION RESULTS	78
ANNEX E PROBE CALIBRATION CERTIFICATE.....	80
ANNEX F DIPOLE CALIBRATION CERTIFICATE	89
ANNEX G EUT APPEARANCE AND TEST POSITIONS	101

1 Test Laboratory

1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MII
Address: No 52, Huayuan beilu, Haidian District, Beijing, P.R.China
Postal Code: 100083
Telephone: +86-10-62303288
Fax: +86-10-62304793

1.2 Testing Environment

Temperature: 18°C~25 °C,
Relative humidity: 30%~ 70%
Ground system resistance: < 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.
Reflection of surrounding objects is minimized and in compliance with requirement of standards.

1.3 Project Data

Project Leader: Sun Qian
Test Engineer: Lin Xiaojun
Testing Start Date: March 23, 2009
Testing End Date: March 24, 2009

1.4 Signature



Lin Xiaojun
(Prepared this test report)



Sun Qian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Client Information

2.1 Applicant Information

Company Name: Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address /Post: 11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park,
Nanshan District, Shenzhen 518057
City: Shenzhen
Postal Code: 518057
Country: P. R. China
Telephone: 0755-26633217
Fax: 0755-26635272

2.2 Manufacturer Information

Company Name: Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address /Post: 11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park,
Nanshan District, Shenzhen 518057
City: Shenzhen
Postal Code: 518057
Country: P. R. China
Telephone: 0755-26633217
Fax: 0755-26635272

3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1 About EUT

Description: 850/900/1800/1900 GSM/GPRS Mobile Phone
Model: Xenium X810
Test Frequency Band: GSM 850/GSM 1900
GPRS Class: 12

3.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	359928020004510	PR1	XFLAT2_M6229X_081205_V10

*EUT ID: is used to identify the test sample in the lab internally.

3.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Lithium Battery	AB1050DWM	/	Haerbin Coslight power CO.,LTD
AE2	AC/DC Adapter	DSA-5W-05 FEU 050065	/	DeeVan Enterprise Co.,Ltd
AE3	Headset	ED-D867	/	Shenzhen Sang Fei Consumer Communications Co.,Ltd.

*AE ID: is used to identify the test sample in the lab internally.

4 CHARACTERISTICS OF THE TEST

4.1 Applicable Limit Regulations

EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

4.2 Applicable Measurement Standards

EN 50361–2001: Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

IEC 62209-1: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

IEC 62209-2 (Draft): Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the Body.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

5 OPERATIONAL CONDITIONS DURING TEST

5.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.


In order to determine the highest value of the peak spatial-average SAR of the EUT, it was tested at middle frequency (cheek and tilt, for both left and right sides of the SAM phantom). After found the worst case, perform the tests at the high and low frequencies. In addition, for all other conditions where the peak spatial-average SAR value determined is within 3 dB of the applicable SAR limit, all other test frequencies shall be tested as well.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

5.2 SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 Professional from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E-field and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

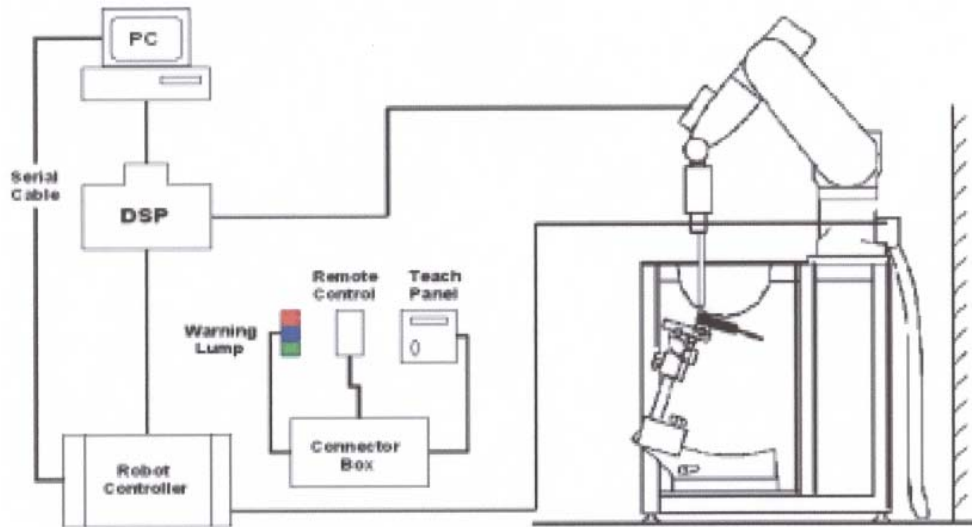

Picture 1: SAR Lab Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

5.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

ES3DV3 Probe Specification

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1810 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2 \text{ dB}$ (30 MHz to 4 GHz)
Directivity	$\pm 0.2 \text{ dB}$ in HSL (rotation around probe axis) $\pm 0.3 \text{ dB}$ in tissue material (rotation normal to probe axis)



Picture 2: ES3DV3 E-field Probe

Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: \pm 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones



Picture3:ES3DV3 E-field probe

5.4 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than \pm 10%. The spherical isotropy was evaluated and found to be better than \pm 0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).



Picture 4: Device Holder

5.5 Other Test Equipment

5.5.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

5.5.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



5.6 Equivalent Tissues

The liquid used for the frequency range of 800-2000

MHz consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 1 and 2 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

Picture 5: Generic Twin Phantom

Table 1. Composition of the Head Tissue Equivalent Matter

MIXTURE %	FREQUENCY 850MHz		
Water	41.45		
Sugar	56.0		
Salt	1.45		
Preventol	0.1		
Cellulose	1.0		
Dielectric Parameters Target Value	f=850MHz	ε=41.5	σ=0.90
MIXTURE %	FREQUENCY 1900MHz		
Water	55.242		
Glycol monobutyl	44.452		
Salt	0.306		
Dielectric Parameters Target Value	f=1900MHz	ε=40.0	σ=1.40

Table 2. Composition of the Body Tissue Equivalent Matter

MIXTURE %	FREQUENCY 850MHz
Water	52.5
Sugar	45.0
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=850MHz $\epsilon=55.2$ $\sigma=0.97$
MIXTURE %	FREQUENCY 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

5.7 System Specifications

5.7.1 Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ± 0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III

Clock Speed: 800 MHz

Operating System: Windows 2000

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 software

Connecting Lines: Optical downlink for data and status info.

Optical uplink for commands and clock

6 CONDUCTED OUTPUT POWER MEASUREMENT

6.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

6.2 Conducted Power

6.2.1 Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured with Agilent Spectrum Analyzer E4440A. These measurements were done at low, middle and high channels for each test bands both before and after SAR test.

6.2.2 Measurement result

Table 3: Conducted Power Measurement Results

850MHZ	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	30.86	30.88	30.88
1900MHZ	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	27.40	27.58	27.56

6.2.3 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 7 to Table 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

7 TEST RESULTS

7.1 Dielectric Performance

Table 4: Dielectric Performance of Head Tissue Simulating Liquid

Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C Measurement Date : 850 MHz <u>Mar 23, 2009</u> 1900 MHz <u>Mar 24, 2009</u>			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	850 MHz	41.5	0.90
	1900 MHz	40.0	1.40
Measurement value (Average of 10 tests)	850 MHz	40.3	0.92
	1900 MHz	39.2	1.42

Table 5: Dielectric Performance of Body Tissue Simulating Liquid

Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C Measurement Date : 850 MHz <u>Mar 23, 2009</u> 1900 MHz <u>Mar 24, 2009</u>			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	850 MHz	55.2	0.97
	1900 MHz	53.3	1.52
Measurement value (Average of 10 tests)	850 MHz	53.7	1.00
	1900 MHz	52.3	1.56

7.2 System Validation

Table 6: System Validation

Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C Measurement Date : 850 MHz <u>Mar 23, 2009</u> 1900 MHz <u>Mar 24, 2009</u>				
Liquid parameters	Dipole calibration	Frequency	Permittivity ϵ	Conductivity σ (S/m)
		835 MHz	39.9	0.88

	Target value	1900 MHz	38.9	1.38			
	Actual Measurement value	835 MHz	40.4	0.90			
		1900 MHz	39.2	1.42			
Verification results	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	1.60	2.48	1.62	2.50	1.25%	0.81%
	1900 MHz	5.09	9.73	5.27	9.91	3.54%	1.9%

Note: Target values are the data of the dipole validation results, please check Annex F for the Dipole Calibration Certificate.

7.3 Summary of Measurement Results (GSM 850)

Table 7: SAR Values (Head, GSM 850 MHz Band) – Slide down

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Mid frequency(See Fig.1)	0.076	0.101	0.192
Left hand, Tilt 15 Degree, Mid frequency(See Fig.2)	0.041	0.053	-0.168
Right hand, Touch cheek, Mid frequency(See Fig.3)	0.084	0.114	0.009
Right hand, Tilt 15 Degree, Mid frequency(See Fig.4)	0.044	0.059	0.000
Right hand, Touch cheek, Top frequency(See Fig.5)	0.096	0.130	0.107
Right hand, Touch cheek, Bottom frequency(See Fig.7)	0.073	0.099	0.140

Table 8: SAR Values (Head, GSM 850 MHz Band) – Slide up

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Mid frequency(See Fig.8)	0.065	0.088	0.105
Left hand, Tilt 15 Degree, Mid frequency(See Fig.9)	0.040	0.052	-0.132
Right hand, Touch cheek, Mid frequency(See Fig.10)	0.063	0.083	0.147
Right hand, Tilt 15 Degree, Mid frequency(See Fig.11)	0.038	0.049	0.026
Left hand, Touch cheek, Top frequency(See Fig.12)	0.072	0.098	0.098
Left hand, Touch cheek, Bottom frequency(See Fig.13)	0.059	0.079	0.058

Table 9: SAR Values (Body, GSM 850 MHz Band) – Slide down

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency (See Fig.14)	0.599	0.858	-0.153
Body, Towards Ground, Mid frequency (See Fig.16)	0.532	0.753	0.145
Body, Towards Ground, Bottom frequency (See Fig.17)	0.509	0.727	-0.046
Body, Towards Phantom, Top frequency (See Fig.18)	0.304	0.408	0.128
Body, Towards Phantom, Mid frequency (See Fig.19)	0.278	0.373	-0.049
Body, Towards Phantom, Bottom frequency (See Fig.20)	0.237	0.318	0.048
Body, Towards Ground, Top frequency with EGPRS(See Fig.21)	0.216	0.309	0.036
Body, Towards Ground, Top frequency with Headset(See Fig.22)	0.166	0.232	0.156

Table 10: SAR Values (Body, GSM 850 MHz Band) – Slide up

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency (See Fig.23)	0.527	0.718	-0.129
Body, Towards Ground, Mid frequency (See Fig.24)	0.494	0.673	-0.017
Body, Towards Ground, Bottom frequency (See Fig.25)	0.464	0.629	-0.42
Body, Towards Phantom, Top frequency (See Fig.26)	0.399	0.536	-0.029
Body, Towards Phantom, Mid frequency (See Fig.27)	0.390	0.521	-0.119
Body, Towards Phantom, Bottom frequency (See Fig.28)	0.347	0.462	-0.041

7.6 Summary of Measurement Results (GSM 1900)

Table 11: SAR Values (Head, GSM 1900 MHz Band) – Slide down

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Mid frequency(See Fig.29)	0.131	0.212	0.111
Left hand, Tilt 15 Degree, Mid frequency(See Fig.30)	0.093	0.161	-0.006
Right hand, Touch cheek, Mid frequency(See Fig.31)	0.186	0.309	0.062

Right hand, Tilt 15 Degree, Mid frequency(See Fig.33)	0.089	0.151	-0.037
Right hand, Touch cheek, Top frequency(See Fig.34)	0.175	0.290	0.050
Right hand, Touch cheek, Bottom frequency(See Fig.35)	0.170	0.279	-0.031

Table 12: SAR Values (Head, GSM 1900 MHz Band) – Slide up

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Mid frequency(See Fig.36)	0.062	0.101	0.064
Left hand, Tilt 15 Degree, Mid frequency(See Fig.37)	0.056	0.097	0.027
Right hand, Touch cheek, Mid frequency(See Fig.38)	0.082	0.131	-0.078
Right hand, Tilt 15 Degree, Mid frequency(See Fig.39)	0.058	0.097	0.047
Right hand, Touch cheek, Top frequency(See Fig.40)	0.087	0.143	-0.021
Right hand, Touch cheek, Bottom frequency(See Fig.41)	0.063	0.101	0.087

Table 13: SAR Values (Body, GSM 1900 MHz Band) – Slide down

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency (See Fig.42)	0.300	0.555	-0.167
Body, Towards Ground, Mid frequency (See Fig.43)	0.332	0.617	-0.090
Body, Towards Ground, Bottom frequency (See Fig.44)	0.349	0.651	-0.043
Body, Towards Phantom, Top frequency (See Fig.46)	0.172	0.281	0.069
Body, Towards Phantom, Mid frequency (See Fig.47)	0.180	0.293	0.073
Body, Towards Phantom, Bottom frequency (See Fig.48)	0.177	0.276	0.017
Body, Towards Ground, Bottom frequency with EGPRS(See Fig.49)	0.215	0.394	0.076
Body, Towards Ground, Bottom frequency with Headset(See Fig.50)	0.087	0.157	0.192


Table 14: SAR Values (Body, GSM 1900 MHz Band) – Slide up

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency (See Fig.51)	0.366	0.637	-0.096
Body, Towards Ground, Mid frequency (See Fig.52)	0.368	0.642	-0.012

Body, Towards Ground, Bottom frequency (See Fig.53)	0.340	0.591	-0.028
Body, Towards Phantom, Top frequency (See Fig.54)	0.153	0.245	0.089
Body, Towards Phantom, Mid frequency (See Fig.55)	0.148	0.234	-0.060
Body, Towards Phantom, Bottom frequency (See Fig.56)	0.139	0.216	0.133

7.7 Summary of Measurement Results (Bluetooth function)

The distance between BT antenna and GSM antenna is <2.5cm. The location of the antennas inside mobile phone is shown below:

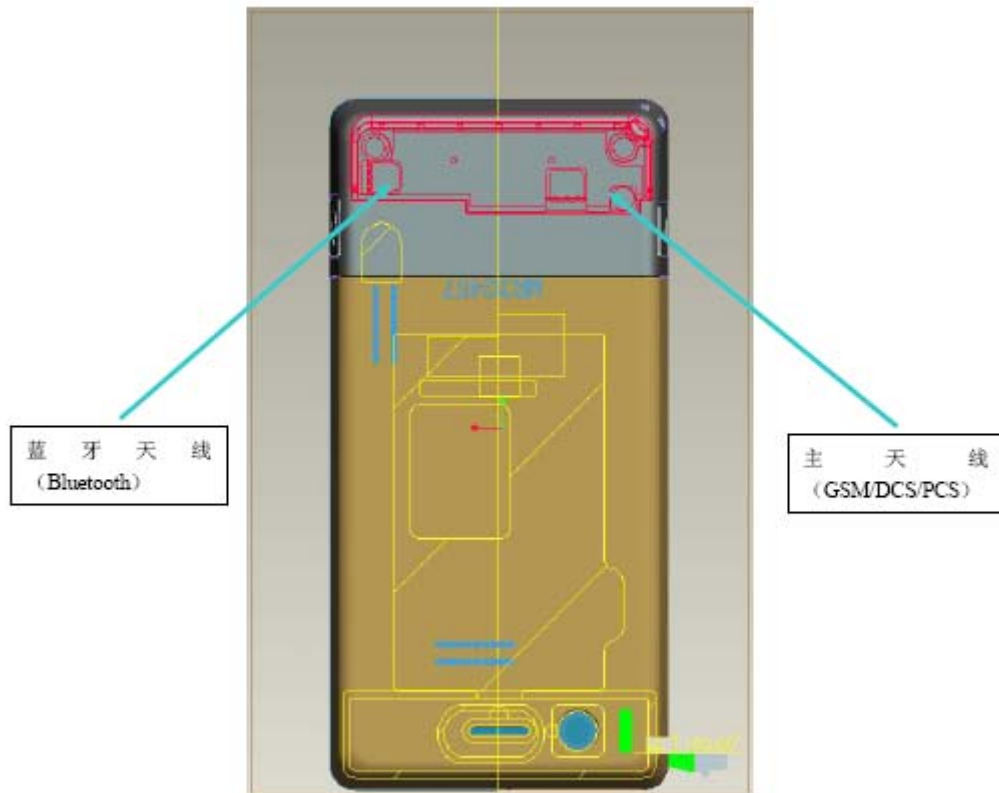

The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 Mhz	Ch 78 2480 MHz
Peak Conducted Output Power(dBm)	-4.12	-3.75	-1.61

According to the output power measurement result and the distance between the two antennas, we can draw the conclusion that: stand-alone SAR and simultaneous transmission SAR are not required for BT transmitter, because the output power of BT transmitter is $\leq P_{Ref}$ and The maximum SAR value <1.2W/kg.

7.8 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

The maximum SAR values are obtained at the case of **GSM 850 Body, Towards Ground, Slide down, Top frequency with GPRS (Table 9)**, and the value are: **0.599(10g), 0.858(1g)**

8 Measurement Uncertainty

SN	a	Type	c	d	$e = f(d,k)$	f	$h = c \times f / e$	k
	Uncertainty Component		Tol. (\pm %)	Prob. Dist.	Div.	c_i (1 g)	$1 g u_i$ (\pm %)	v_i
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement System								
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial Isotropy	B	4.7	R	$\sqrt{3}$	$\frac{(1-cp)^{1/2}}{2}$	4.3	∞
4	Hemispherical Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{c_p}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test sample Related								
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1
15	Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
16	Phantom Uncertainty (shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞

17	Liquid Conductivity - deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity - measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity - deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity - measurement uncertainty	B	5.0	N	1	0.6	1.7	M
Combined Standard Uncertainty				RSS			11.25	
Expanded Uncertainty (95% CONFIDENCE INTERVAL)				K=2			22.5	

9 MAIN TEST INSTRUMENTS

Table 15: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	HP 8753E	US38433212	August 30, 2008	One year
02	Power meter	NRVD	101253	June 20, 2008	One year
03	Power sensor	NRV-Z5	100333		
04	Power sensor	NRV-Z6	100011	September 2, 2008	One year
05	Signal Generator	E4433B	US37230472	September 4, 2008	One Year
06	Amplifier	VTL5400	0505	No Calibration Requested	
07	BTS	CMU 200	105948	August 15, 2008	One year
08	E-field Probe	SPEAG ES3DV3	3149	October 1, 2008	One year
09	DAE	SPEAG DAE4	771	November 20, 2008	One year
10	Dipole Validation Kit	SPEAG D835V2	443	February 18, 2009	Two years
11	Dipole Validation Kit	SPEAG D1900V2	541	February 19, 2009	Two years

END OF REPORT BODY

ANNEX A MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the reference point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the phantom was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the flat phantom and the horizontal grid spacing was 10 mm x 10 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.


Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.


c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

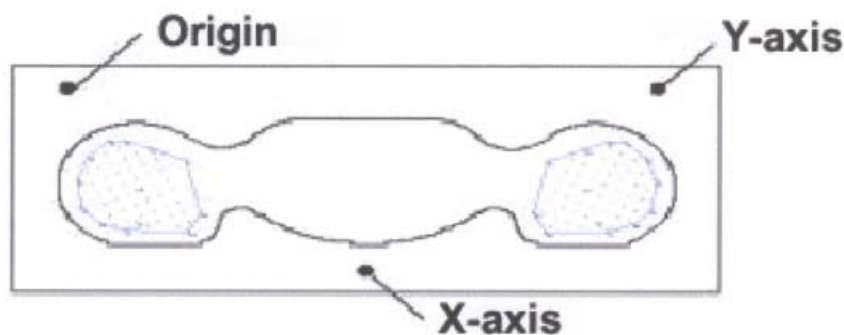


Picture A: SAR Measurement Points in Area Scan

ANNEX B TEST LAYOUT

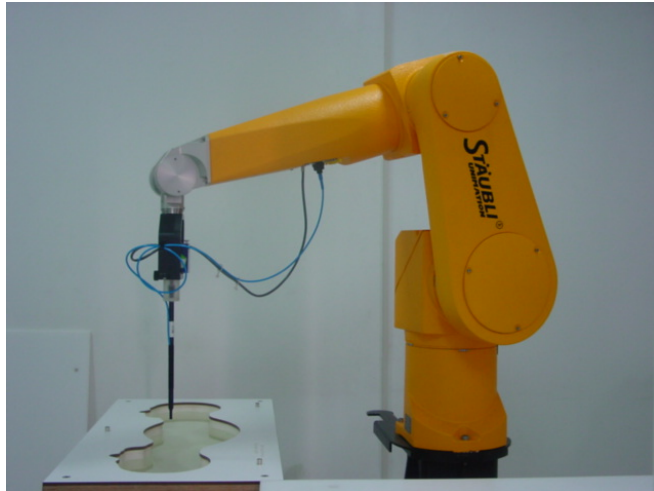

Picture B1: Specific Absorption Rate Test Layout

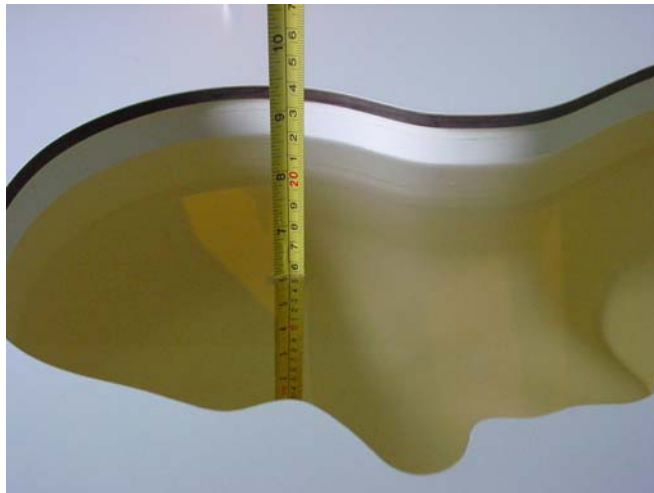

Picture B2: Liquid depth in the Flat Phantom (850 MHz Head)



Picture B3: Liquid depth in the Flat Phantom (1900MHz Head)



Picture B4: Liquid depth in the Flat Phantom (850 MHz Body)



Picture B5: Liquid depth in the Flat Phantom (1900MHz Body)

ANNEX C GRAPH RESULTS

850 Left Cheek Middle – Slide down

Date/Time: 2009-3-23 7:54:41

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.111 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.70 V/m; Power Drift = 0.192 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.105 mW/g

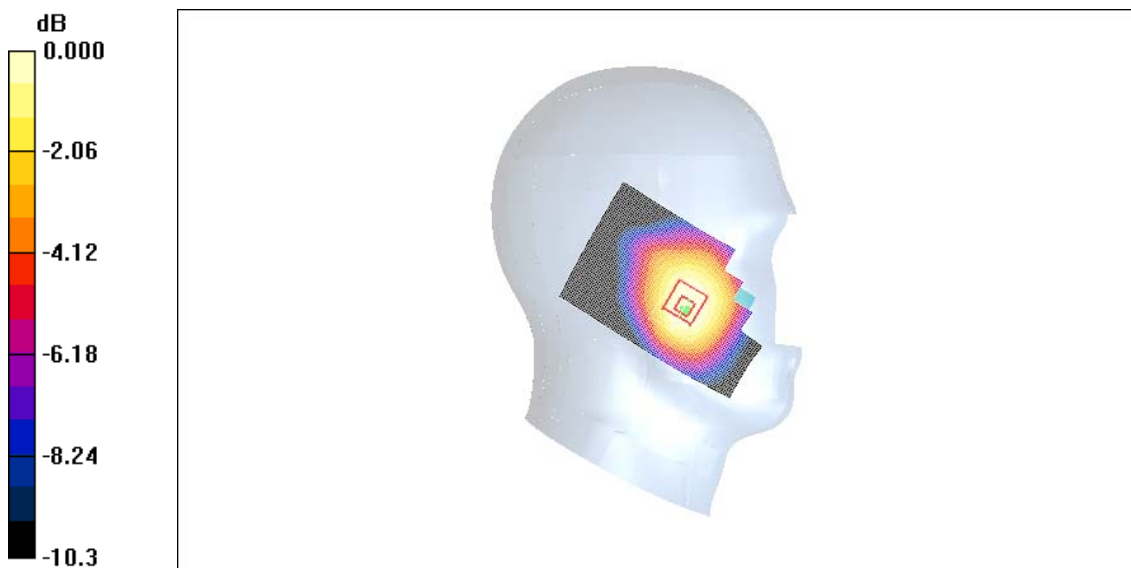

0 dB = 0.105mW/g

Fig. 1 850 MHz CH190 – Slide down

850 Left Tilt Middle – Slide down

Date/Time: 2009-3-23 8:08:35

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.055 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.88 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.064 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

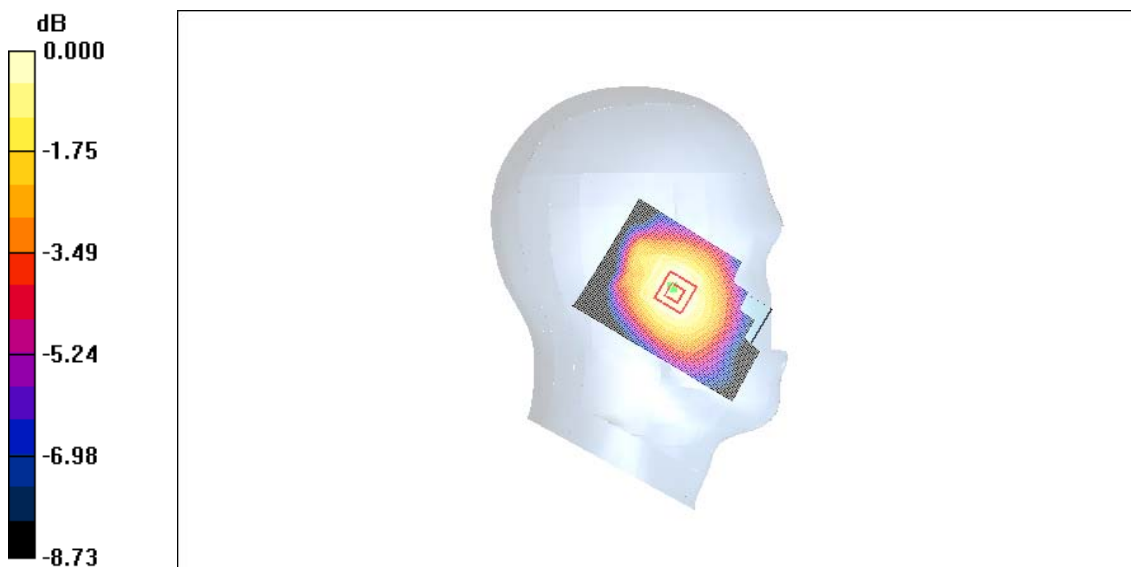

0 dB = 0.055mW/g

Fig. 2 850 MHz CH190 – Slide down

850 Right Cheek Middle – Slide down

Date/Time: 2009-3-23 8:22:28

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.124 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.08 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.120 mW/g

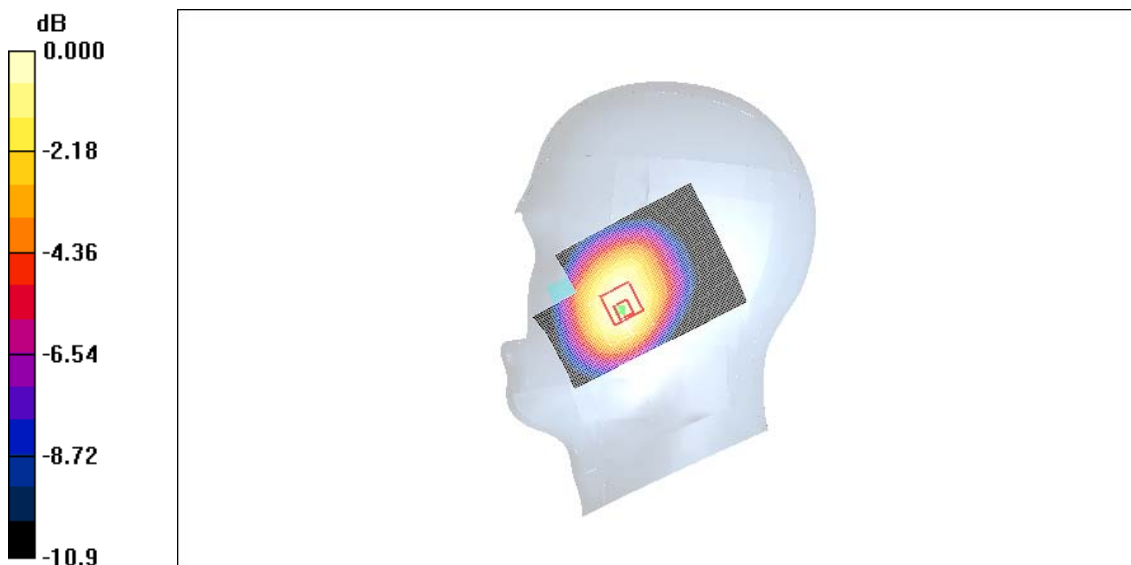

0 dB = 0.120mW/g

Fig. 3 850 MHz CH190 – Slide down

850 Right Tilt Middle – Slide down

Date/Time: 2009-3-23 8:36:06

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.067 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.061 mW/g

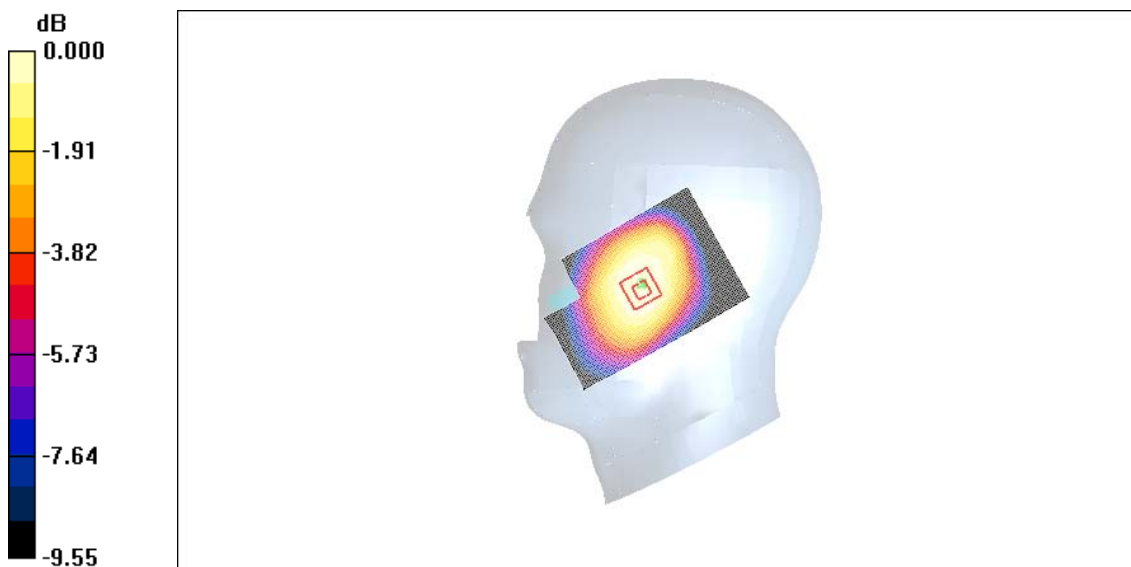

0 dB = 0.061mW/g

Fig. 4 850 MHz CH190 – Slide down

850 Right Cheek High – Slide down

Date/Time: 2009-3-23 8:50:17

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.141 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.26 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.137 mW/g

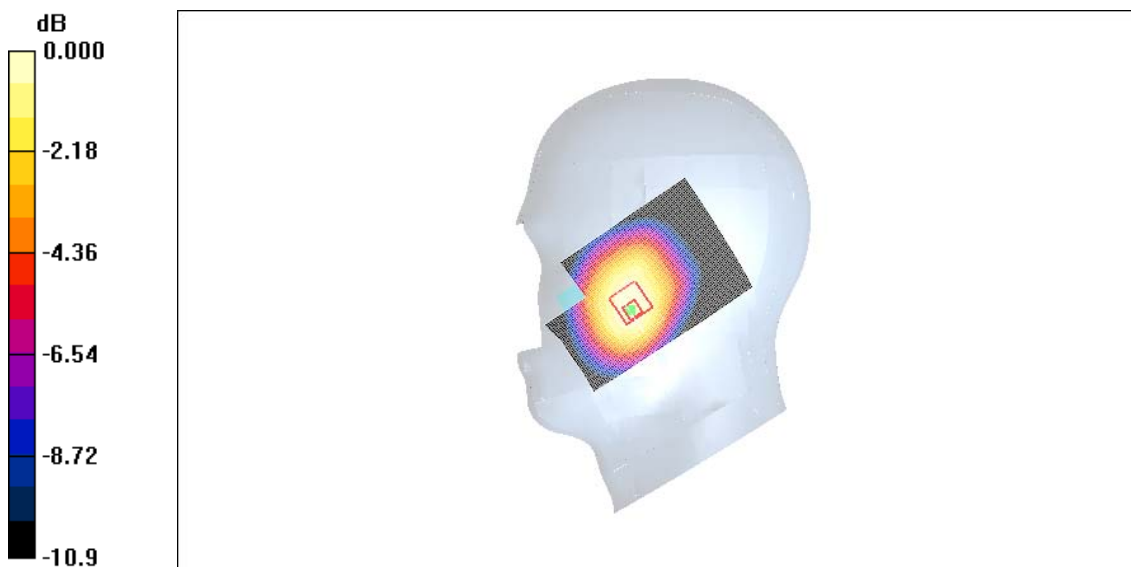

0 dB = 0.137mW/g

Fig. 5 850MHz CH251 – Slide down

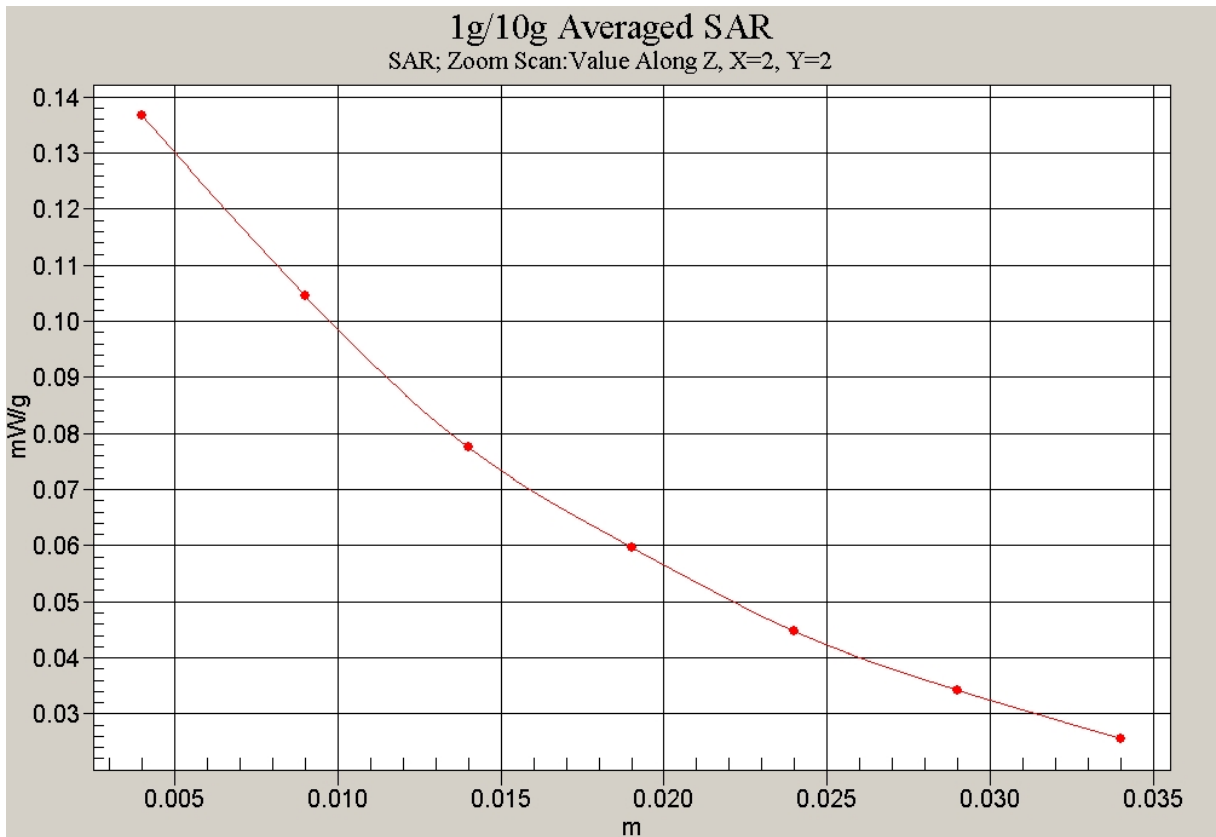


Fig. 6 Z-Scan at power reference point (850 MHz CH251) – Slide down

850 Right Cheek Low – Slide down

Date/Time: 2009-3-23 9:04:29

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.108 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.77 V/m ; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.099 mW/g ; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.105 mW/g

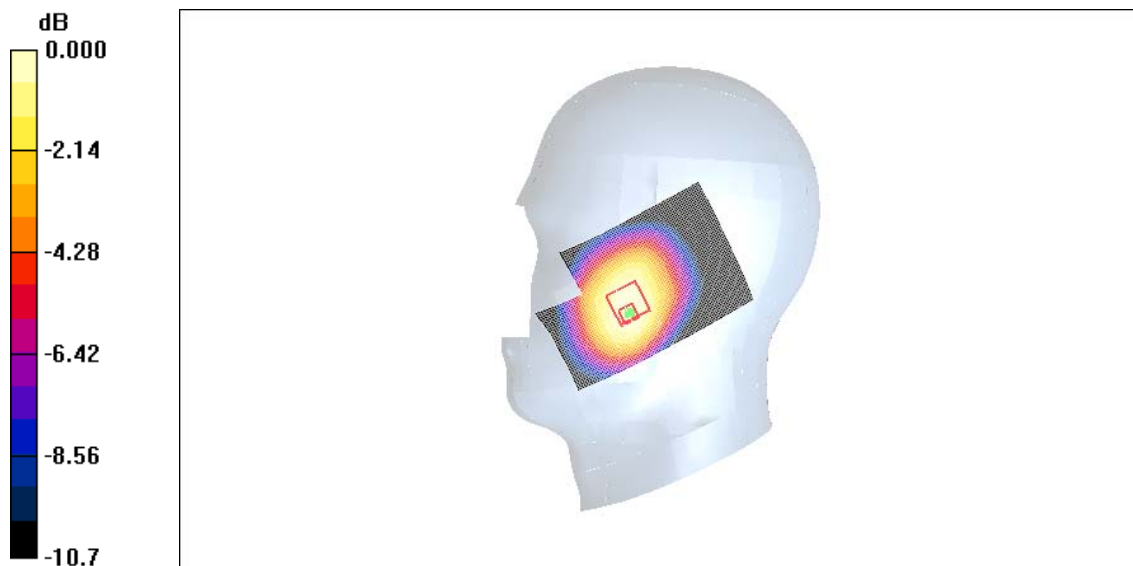

0 dB = 0.105mW/g

Fig. 7 850 MHz CH128 – Slide down

850 Left Cheek Middle – Slide up

Date/Time: 2009-3-23 9:18:20

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.096 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.36 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.065 mW/g

Maximum value of SAR (measured) = 0.091 mW/g

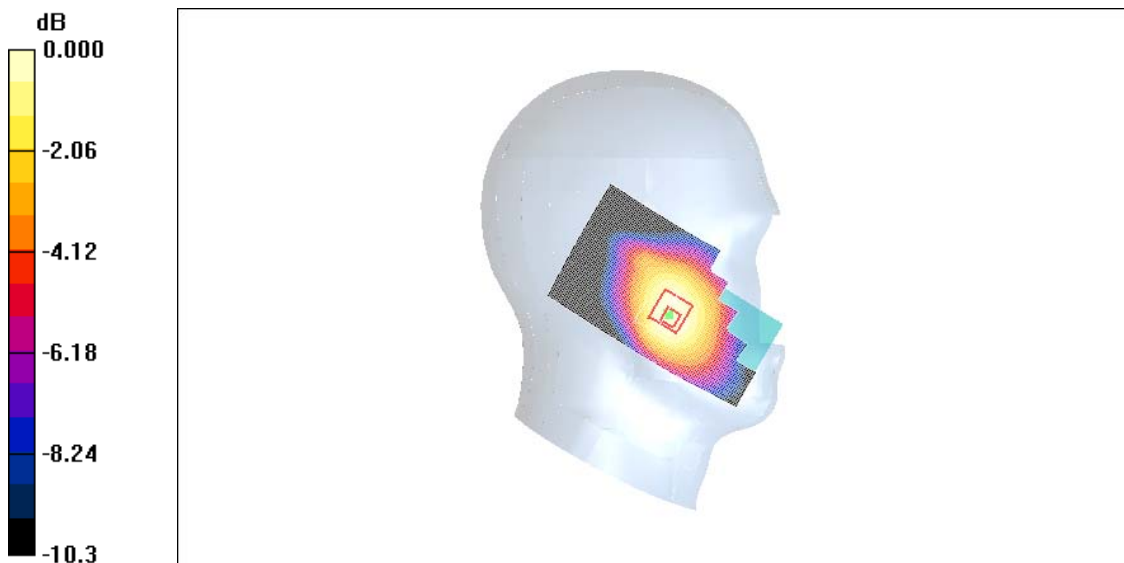

0 dB = 0.091mW/g

Fig. 8 850 MHz CH190 – Slide up

850 Left Tilt Middle – Slide up

Date/Time: 2009-3-23 9:32:55

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.054 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.66 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 0.062 W/kg

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

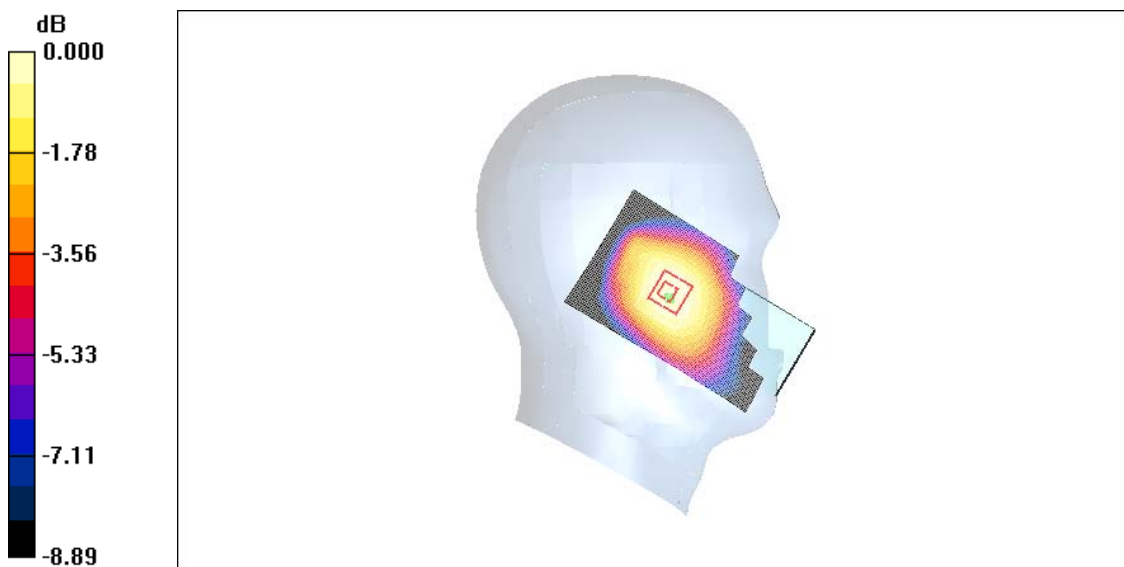

0 dB = 0.054mW/g

Fig. 9 850 MHz CH190 – Slide up

850 Right Cheek Middle – Slide up

Date/Time: 2009-3-23 9:46:47

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.090 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.72 V/m; Power Drift = 0.147 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.086 mW/g

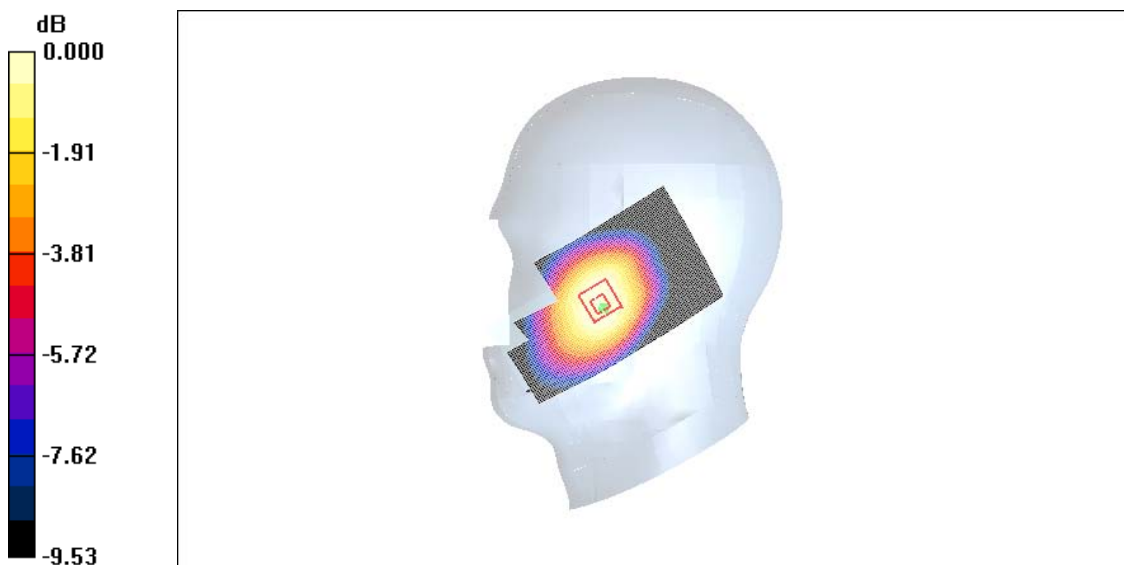

0 dB = 0.086mW/g

Fig. 10 850 MHz CH190 – Slide up

850 Right Tilt Middle – Slide up

Date/Time: 2009-3-23 10:00:31

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.053 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.02 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.059 W/kg

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

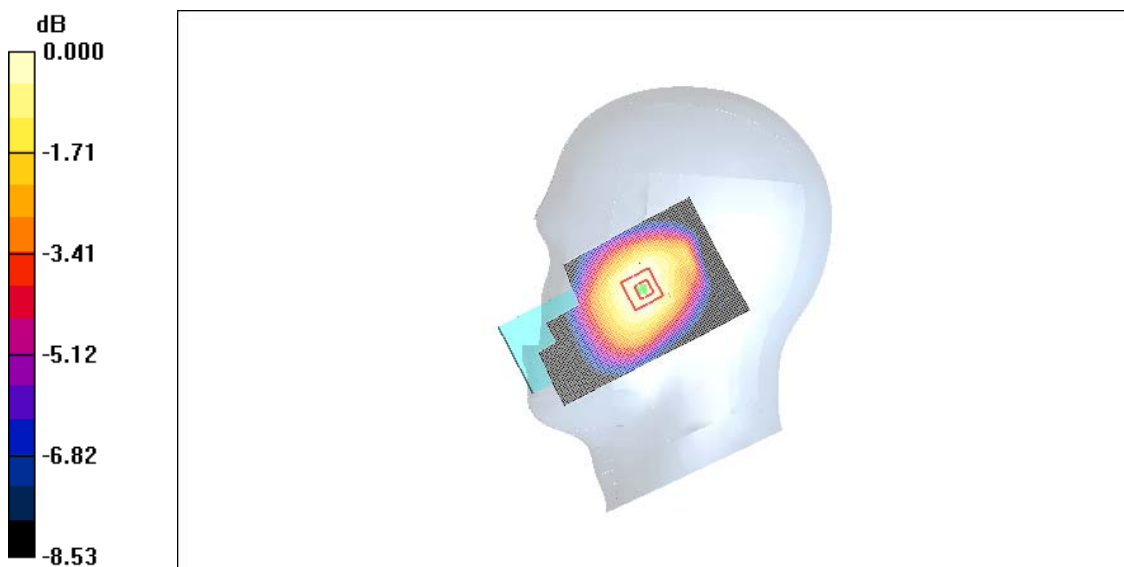

0 dB = 0.051mW/g

Fig. 11 850 MHz CH190 – Slide up

850 Left Cheek High – Slide up

Date/Time: 2009-3-23 10:14:45

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.107 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.69 V/m; Power Drift = 0.098 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.103 mW/g

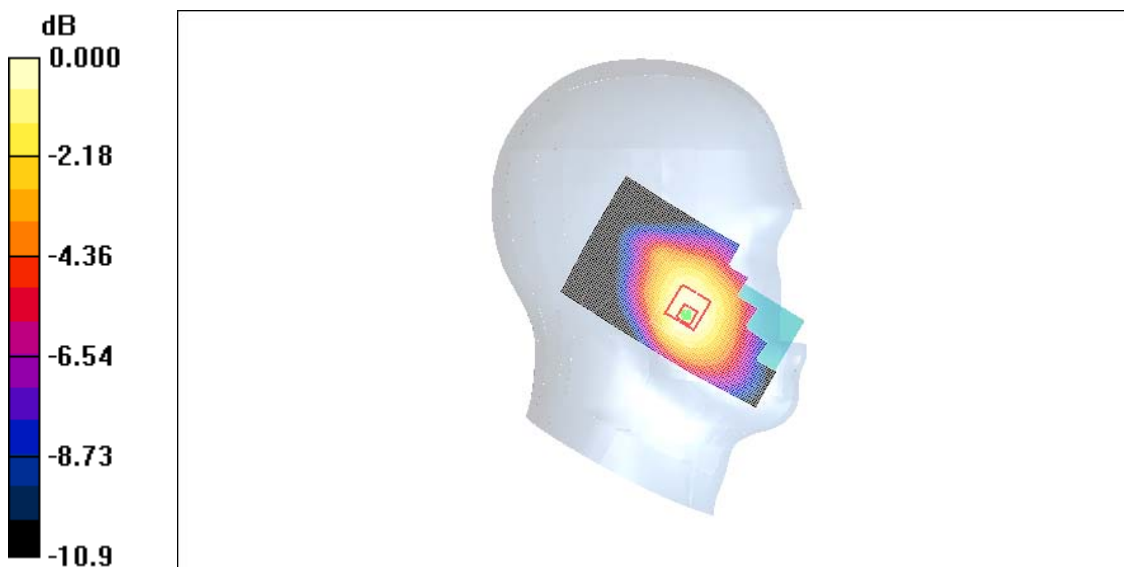

0 dB = 0.103mW/g

Fig. 12 850MHz CH251 – Slide up

850 Left Cheek Low – Slide up

Date/Time: 2009-3-23 10:28:38

Electronics: DAE4 Sn771

Medium: 850 HEAD

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Low/Area Scan (61x111x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.085 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.54 V/m ; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.079 mW/g ; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.084 mW/g

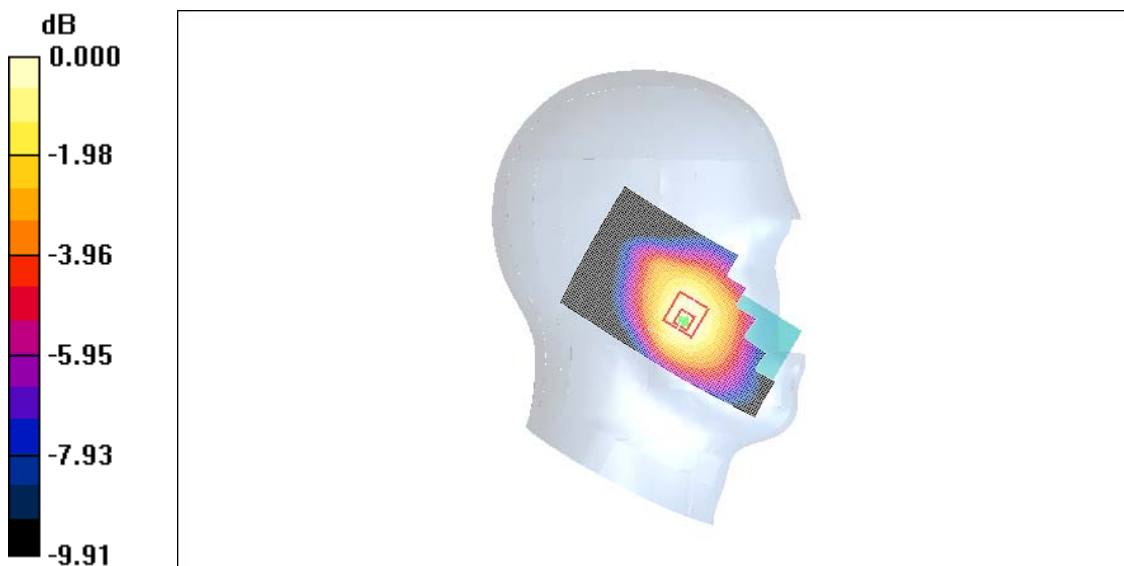

0 dB = 0.084mW/g

Fig. 13 850 MHz CH128 – Slide up

850 Body Towards Ground High with GPRS – Slide down

Date/Time: 2009-3-23 10:45:16

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.915 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.858 mW/g; SAR(10 g) = 0.599 mW/g

Maximum value of SAR (measured) = 0.886 mW/g

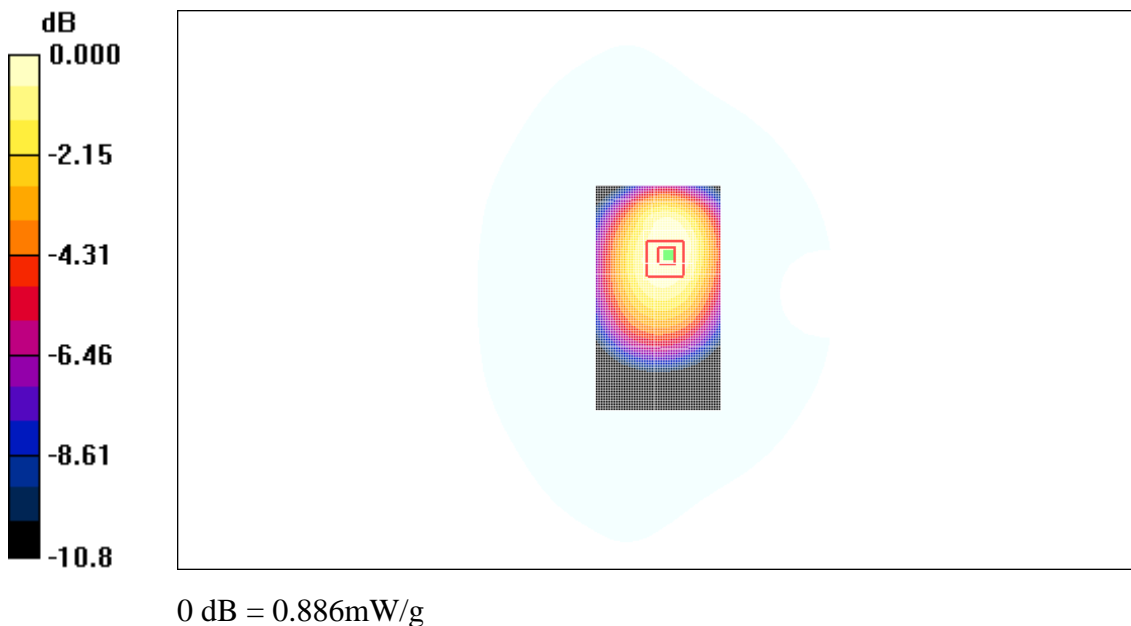


Fig. 14 850 MHz CH251 – Slide down

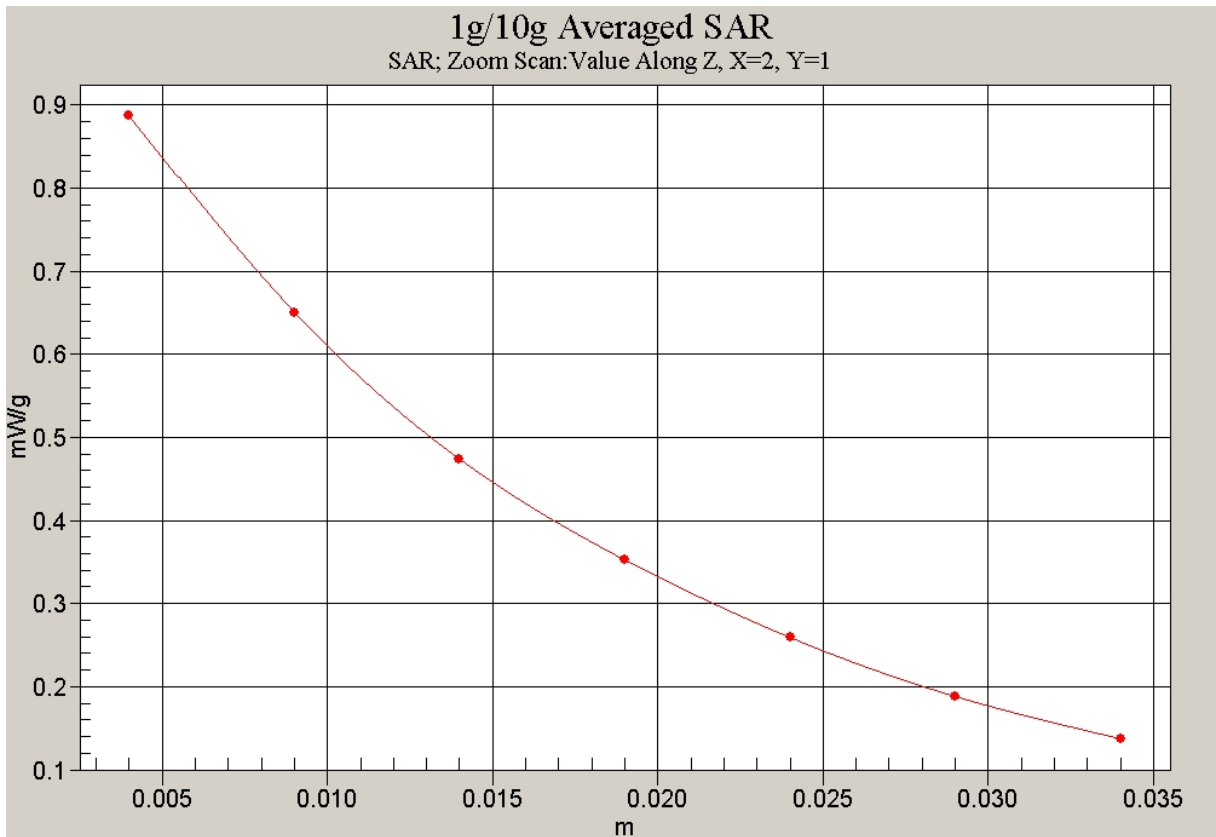


Fig. 15 Z-Scan at power reference point (850 MHz CH128) – Slide down

850 Body Towards Ground Middle with GPRS – Slide down

Date/Time: 2009-3-23 10:59:25

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.797 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = 0.145 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.532 mW/g

Maximum value of SAR (measured) = 0.786 mW/g

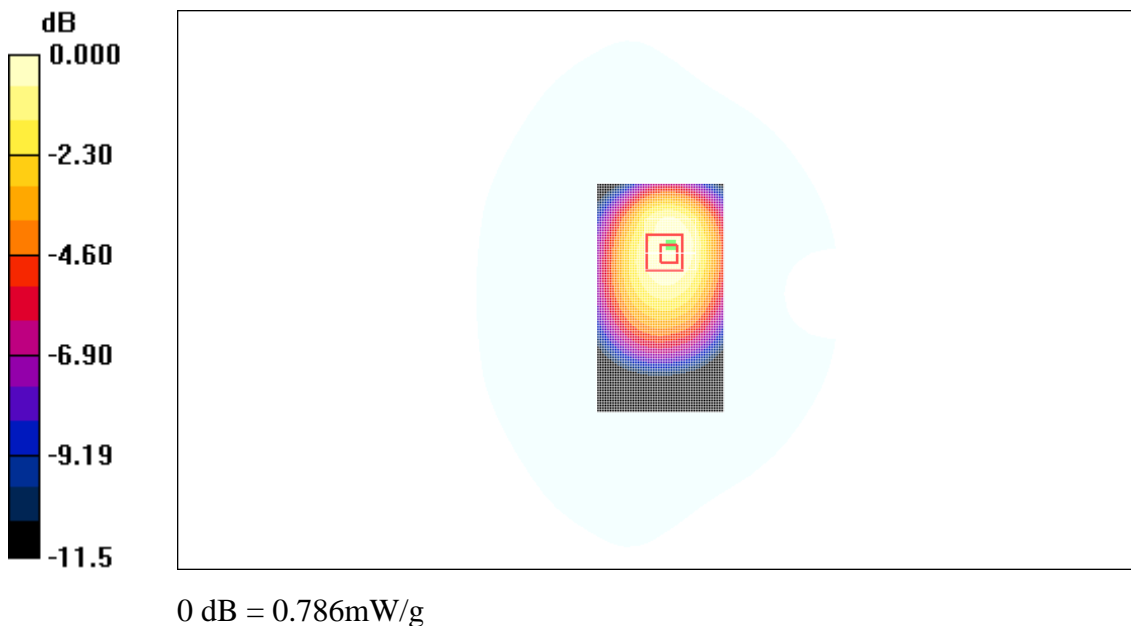


Fig. 16 850 MHz CH190 – Slide down

850 Body Towards Ground Low with GPRS – Slide down

Date/Time: 2009-3-23 11:13:27

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 825$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.778 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.727 mW/g; SAR(10 g) = 0.509 mW/g

Maximum value of SAR (measured) = 0.755 mW/g

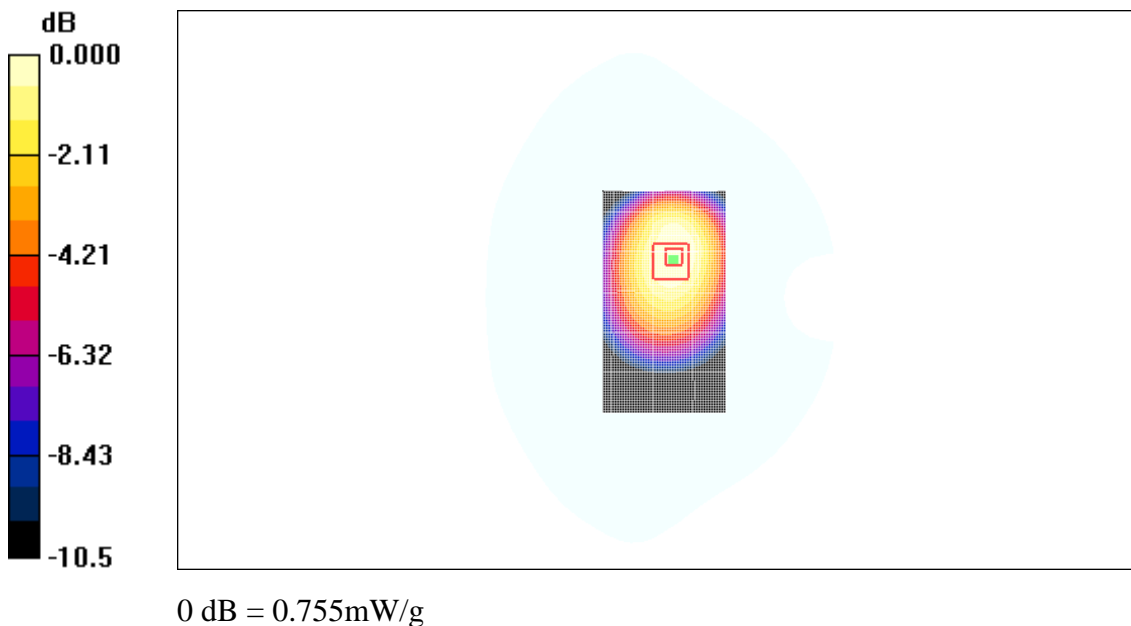


Fig. 17 850 MHz CH128 – Slide down

850 Body Towards Phantom High with GPRS – Slide down

Date/Time: 2009-3-23 11:27:38

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.436 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.425 mW/g

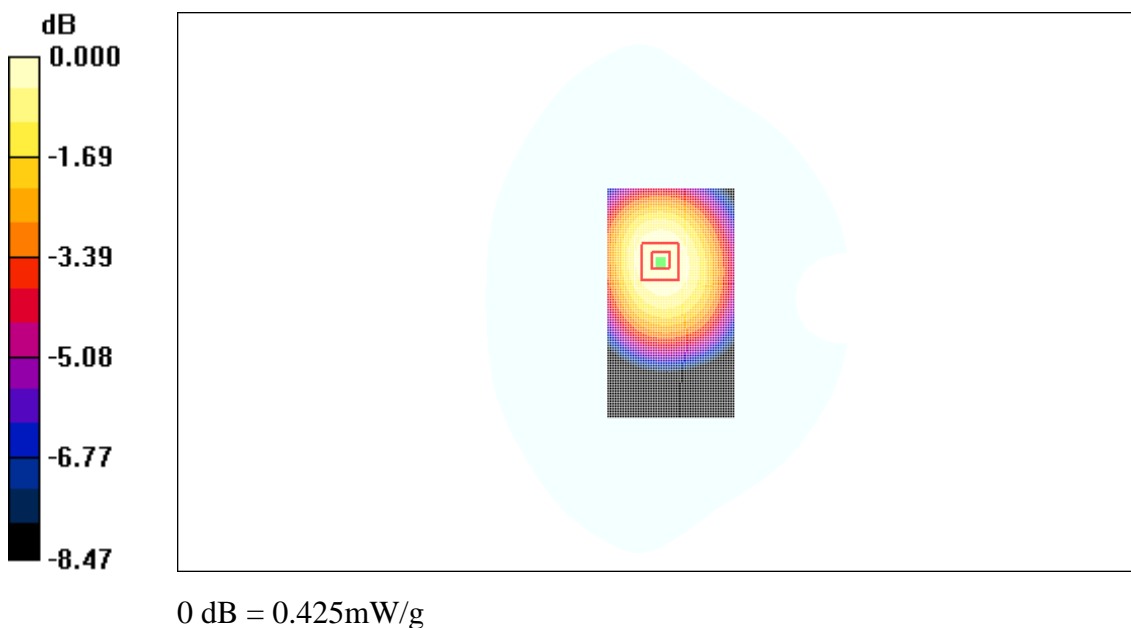


Fig. 18 850 MHz CH251 – Slide down

850 Body Towards Phantom Middle with GPRS – Slide down

Date/Time: 2009-3-23 11:41:12

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.390 mW/g

Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.5 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.389 mW/g

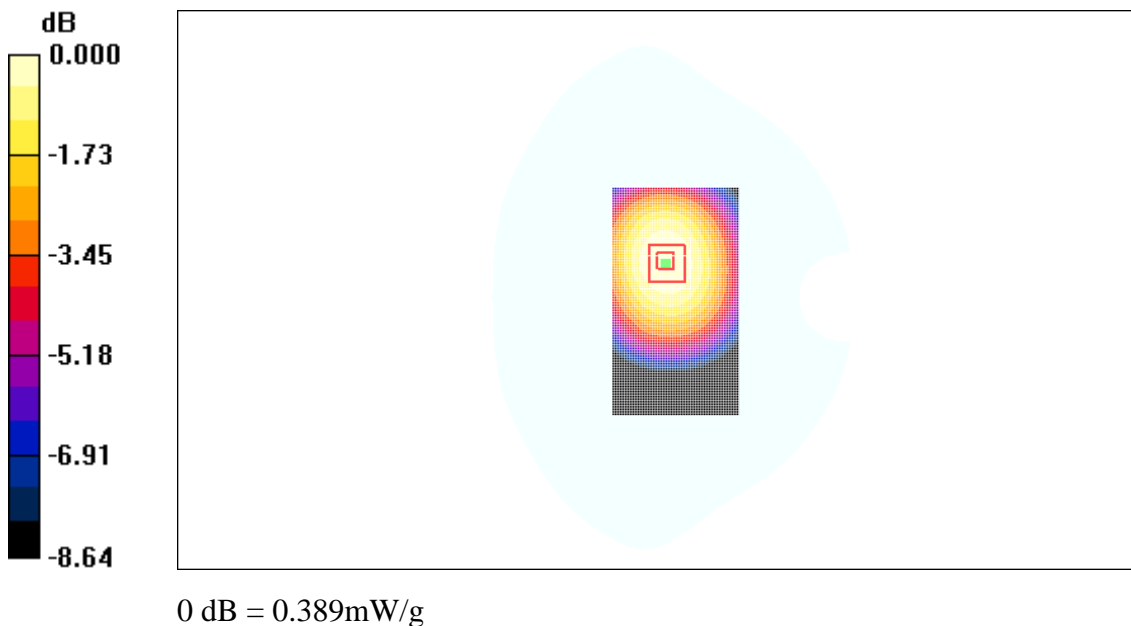


Fig. 19 850 MHz CH190 – Slide down

850 Body Towards Phantom Low with GPRS – Slide down

Date/Time: 2009-3-23 11:55:24

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.973 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom Low/Area Scan (51x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.337 mW/g


Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.0 V/m ; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.318 mW/g ; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

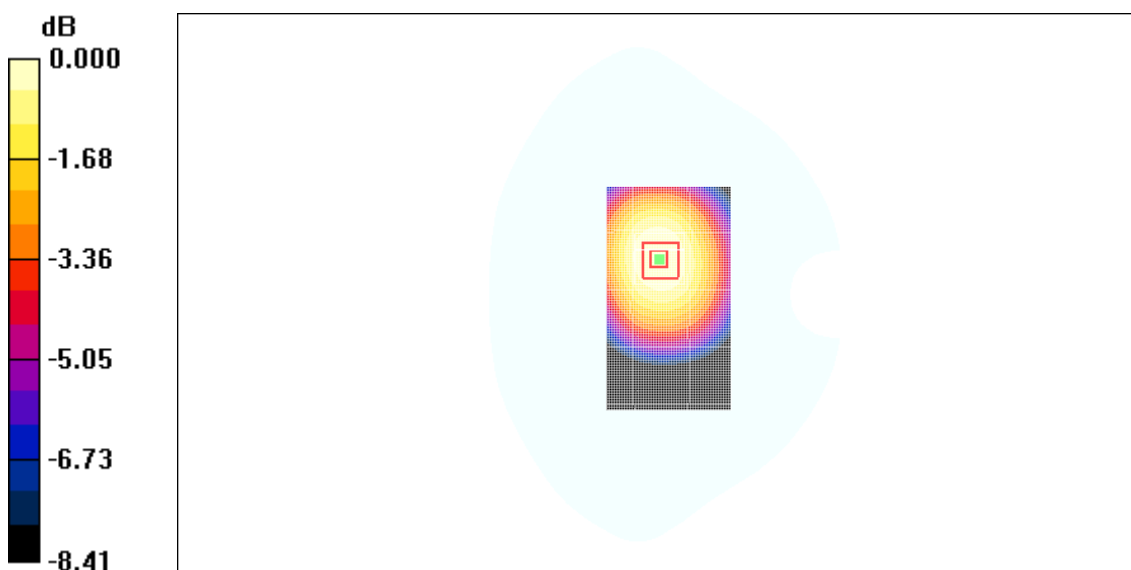

0 dB = 0.330mW/g

Fig. 20 850 MHz CH128 – Slide down

850 Body Towards Ground High with EGPRS – Slide down

Date/Time: 2009-3-23 12:11:20

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.327 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.216 mW/g

Maximum value of SAR (measured) = 0.320 mW/g

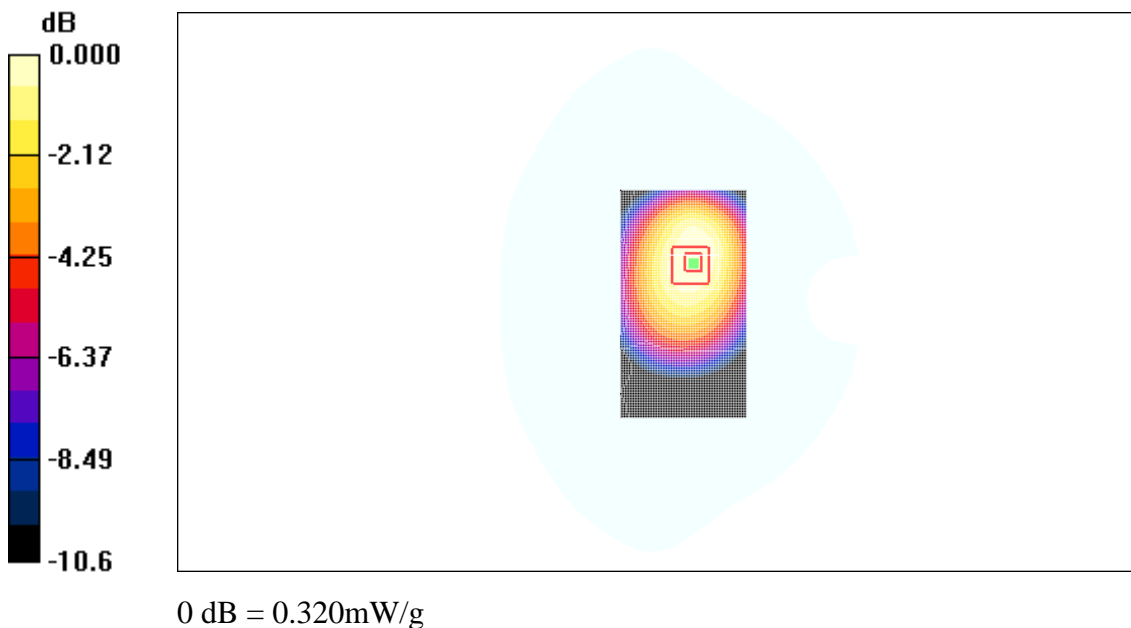


Fig. 21 850 MHz CH251 – Slide down

850 Body Towards Ground High with Headset – Slide down

Date/Time: 2009-3-23 12:26:57

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.246 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.243 mW/g

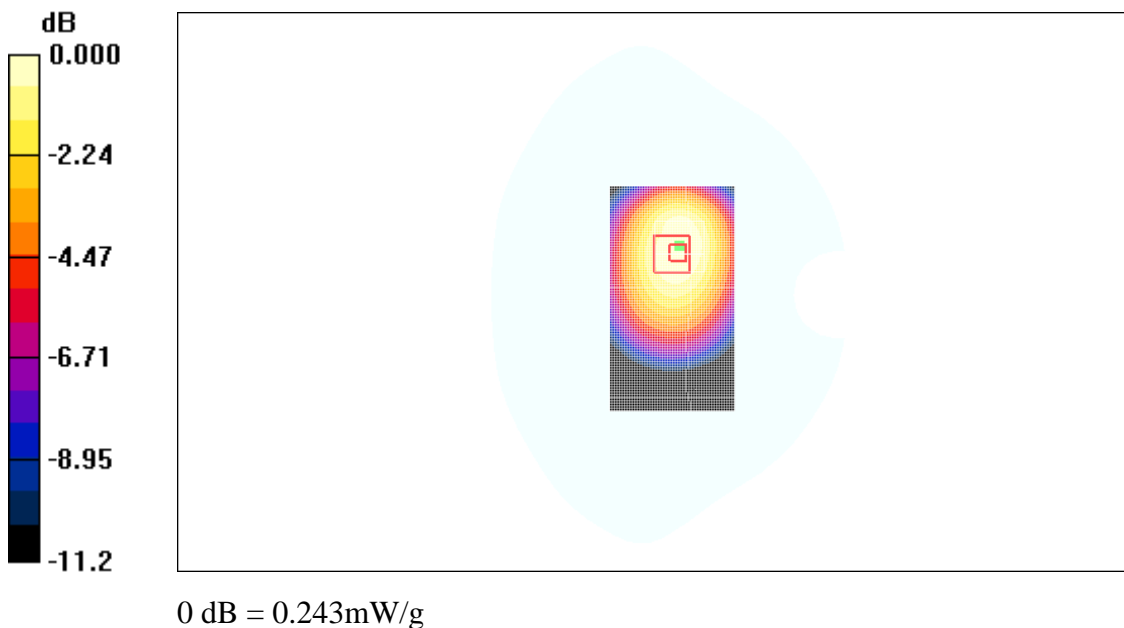


Fig. 22 850 MHz CH251 – Slide down

850 Body Towards Ground High with GPRS – Slide up

Date/Time: 2009-3-23 12:40:43

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground High/Area Scan (51x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.757 mW/g


Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.8 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.527 mW/g

Maximum value of SAR (measured) = 0.741 mW/g

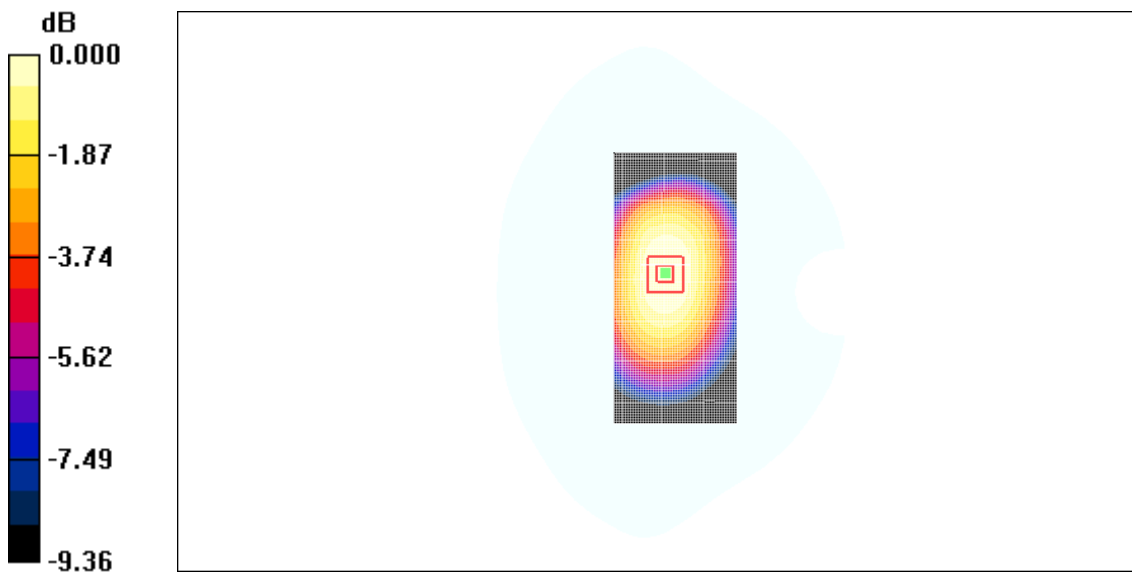

0 dB = 0.741mW/g

Fig. 23 850 MHz CH251 – Slide up

850 Body Towards Ground Middle with GPRS – Slide up

Date/Time: 2009-3-23 12:54:36

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Middle/Area Scan (51x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.703 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.2 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.673 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 0.695 mW/g

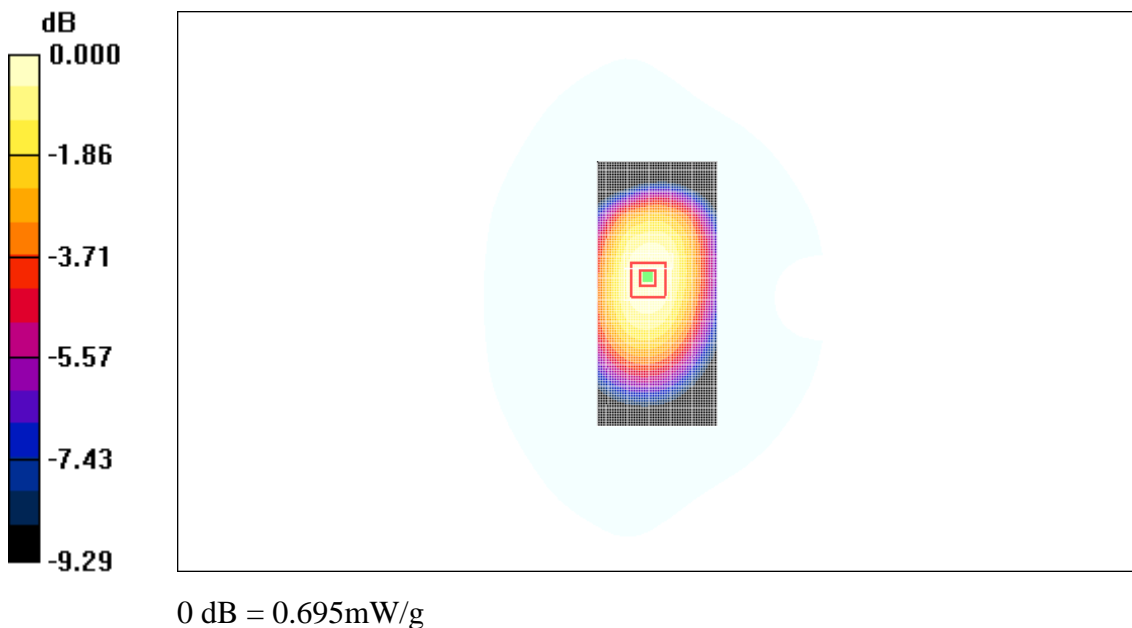


Fig. 24 850 MHz CH190 – Slide up

850 Body Towards Ground Low with GPRS – Slide up

Date/Time: 2009-3-23 13:08:25

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 825 \text{ MHz}$; $\sigma = 0.973 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (51x111x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.663 mW/g


Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.6 V/m ; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.808 W/kg

SAR(1 g) = 0.629 mW/g ; SAR(10 g) = 0.464 mW/g

Maximum value of SAR (measured) = 0.658 mW/g

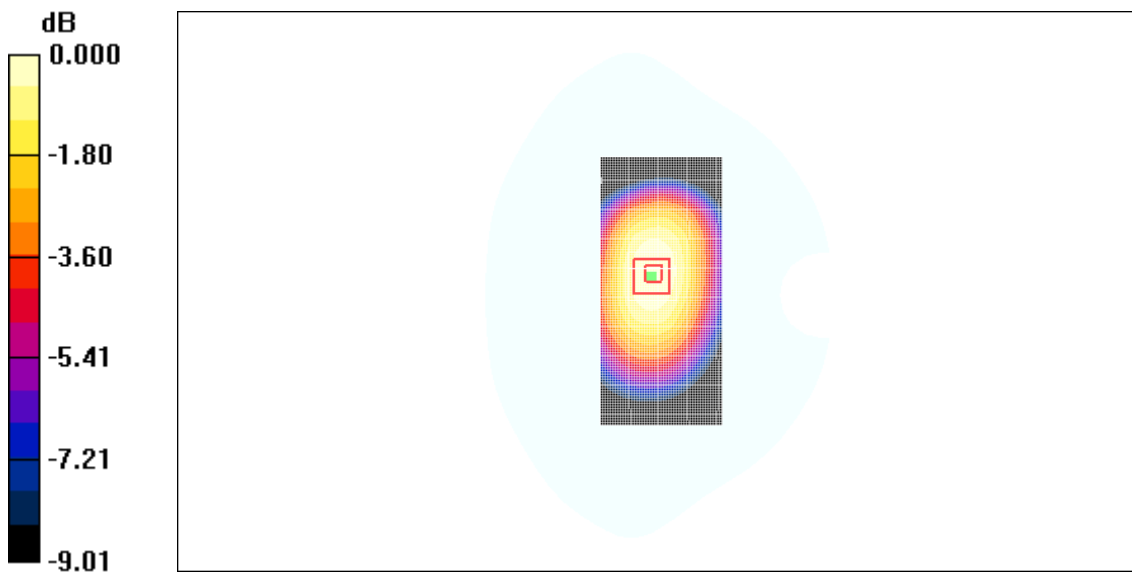

0 dB = 0.658mW/g

Fig. 25 850 MHz CH128 – Slide up

850 Body Towards Phantom High with GPRS – Slide up

Date/Time: 2009-3-23 13:22:42

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom High/Area Scan (51x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.572 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.399 mW/g

Maximum value of SAR (measured) = 0.556 mW/g

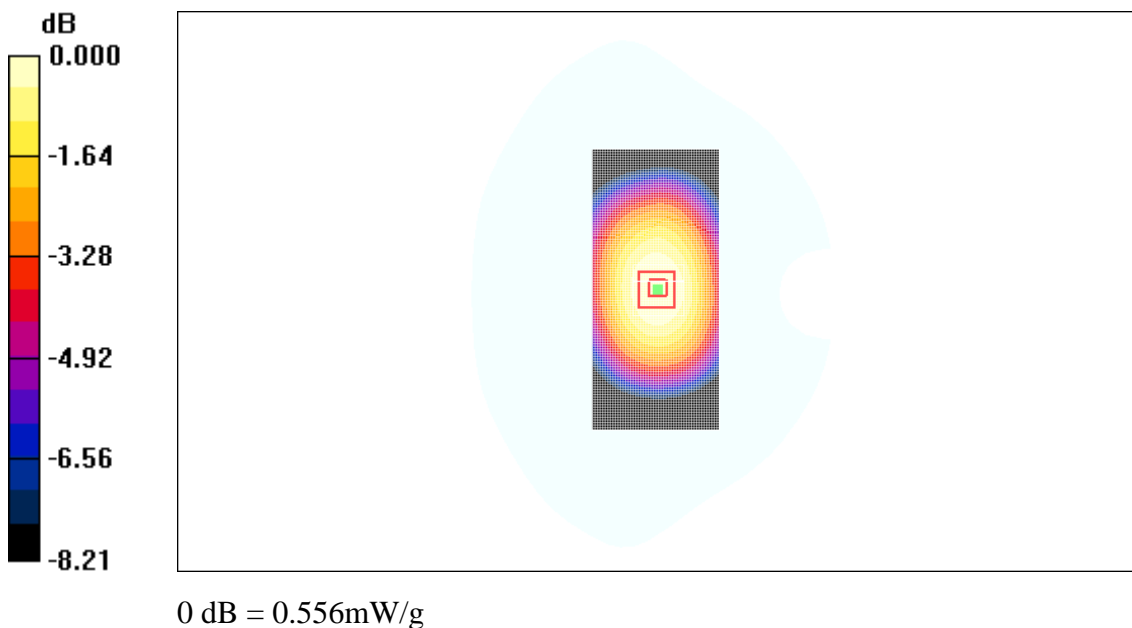


Fig. 26 850 MHz CH251 – Slide up

850 Body Towards Phantom Middle with GPRS – Slide up

Date/Time: 2009-3-23 13:36:10

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom Middle/Area Scan (51x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.561 mW/g

Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.521 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.543 mW/g

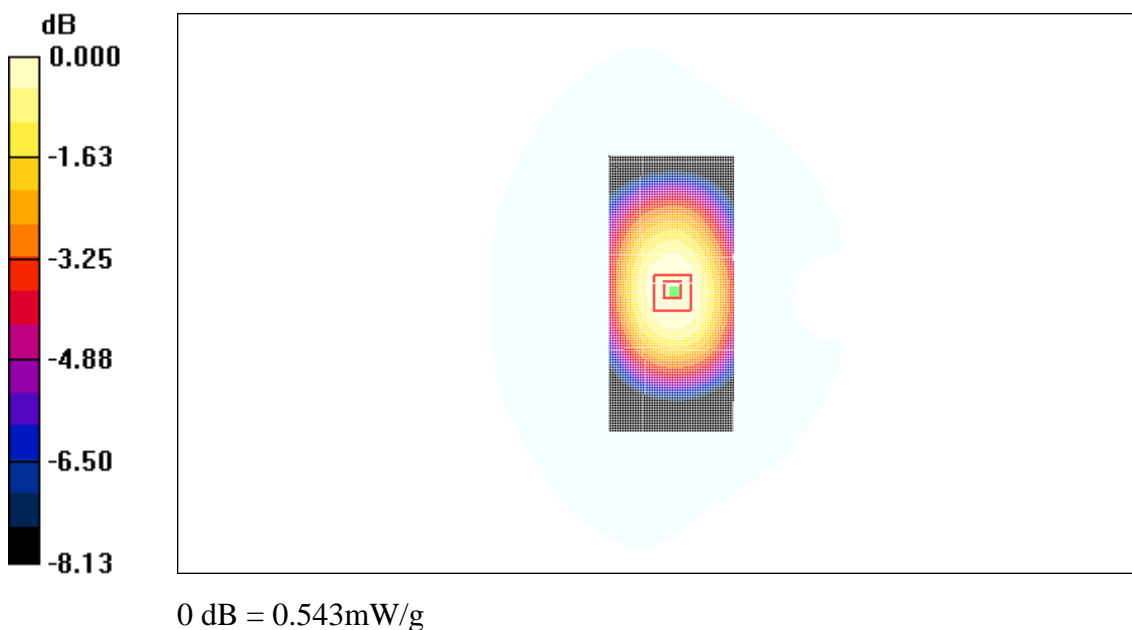


Fig. 27 850 MHz CH190 – Slide up

850 Body Towards Phantom Low with GPRS – Slide up

Date/Time: 2009-3-23 13:50:39

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom Low/Area Scan (51x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.489 mW/g


Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.4 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.479 mW/g

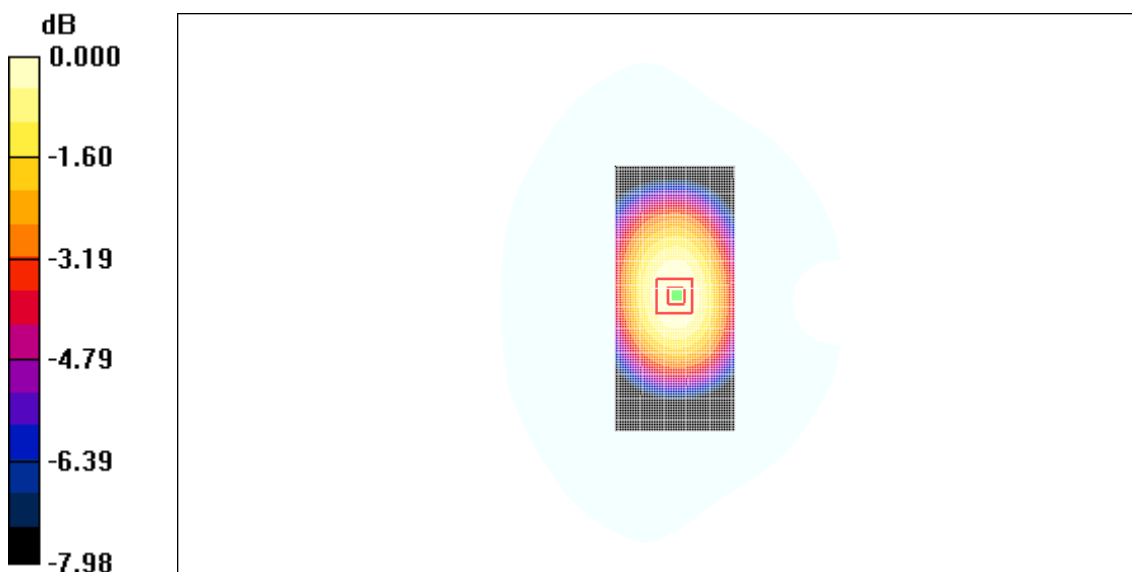

0 dB = 0.479mW/g

Fig. 28 850 MHz CH128 – Slide up

1900 Left Cheek Middle – Slide down

Date/Time: 2009-3-24 8:01:18

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.237 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.19 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.231 mW/g

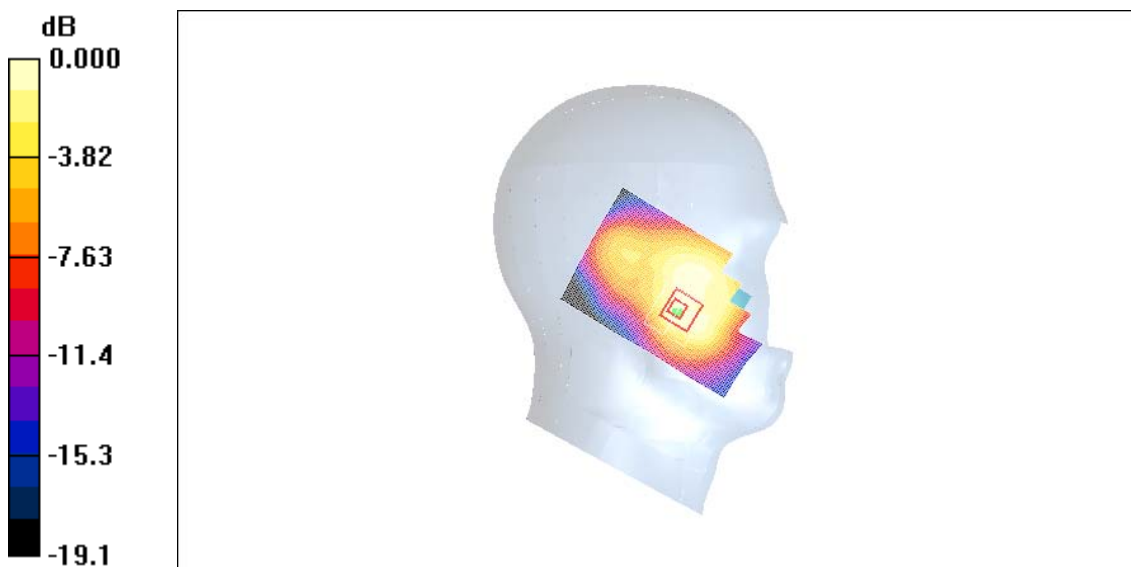

0 dB = 0.231mW/g

Fig. 29 1900 MHz CH661 – Slide down

1900 Left Tilt Middle – Slide down

Date/Time: 2009-3-24 8:15:09

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.189 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.178 mW/g

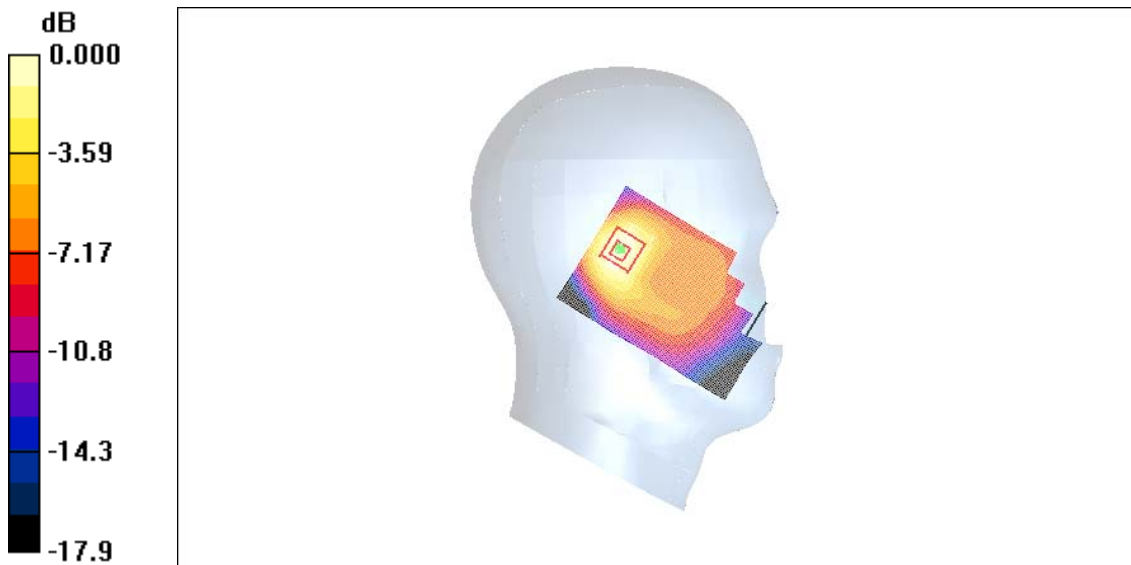

0 dB = 0.178mW/g

Fig. 30 1900 MHz CH661 – Slide down

1900 Right Cheek Middle – Slide down

Date/Time: 2009-3-24 8:29:38

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.350 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.80 V/m; Power Drift = 0.062 dB

Peak SAR (extrapolated) = 0.501 W/kg

SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.337 mW/g

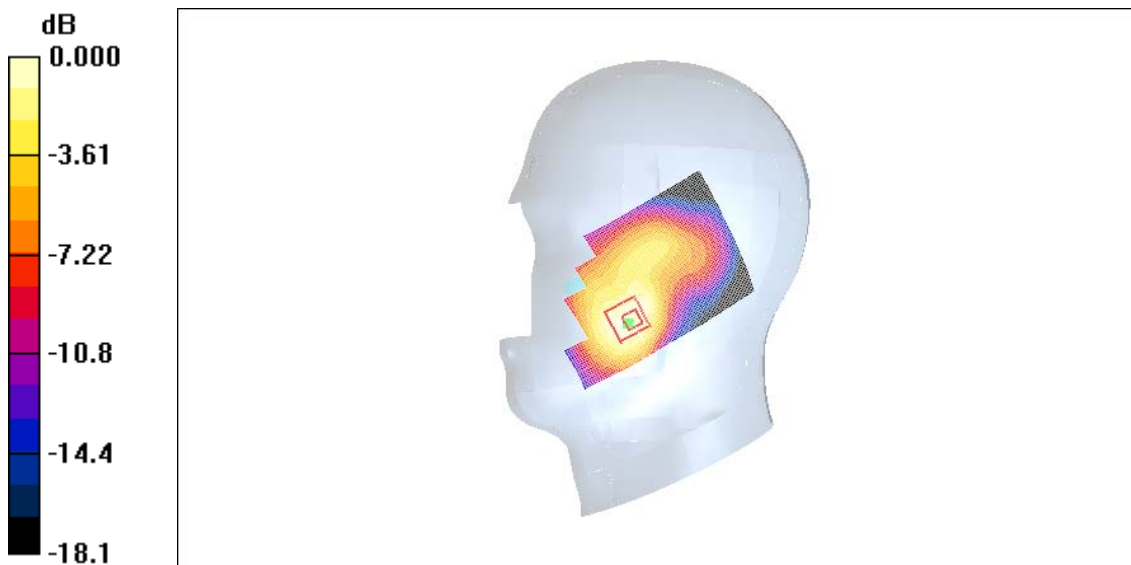

0 dB = 0.337mW/g

Fig. 31 1900 MHz CH661 – Slide down

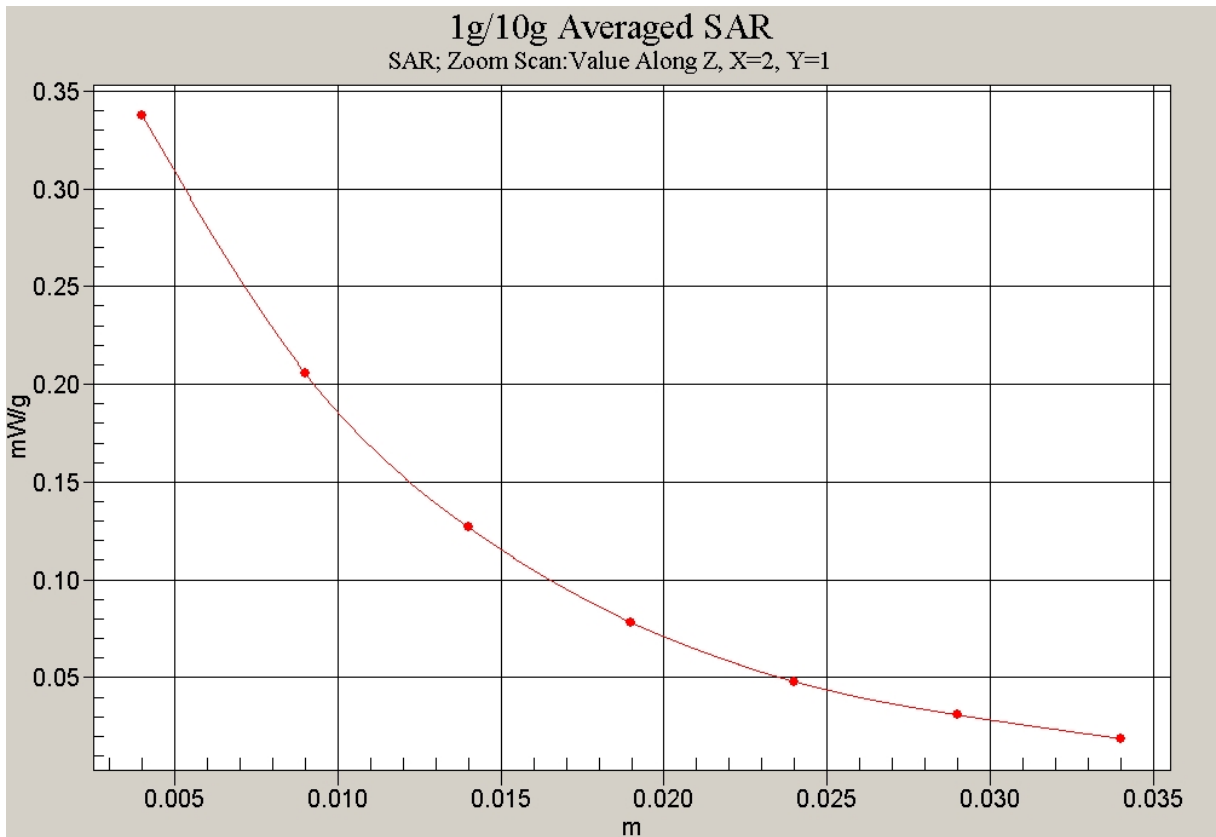


Fig. 32 Z-Scan at power reference point (1900 MHz CH661) – Slide down

1900 Right Tilt Middle – Slide down

Date/Time: 2009-3-24 8:43:17

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.167 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

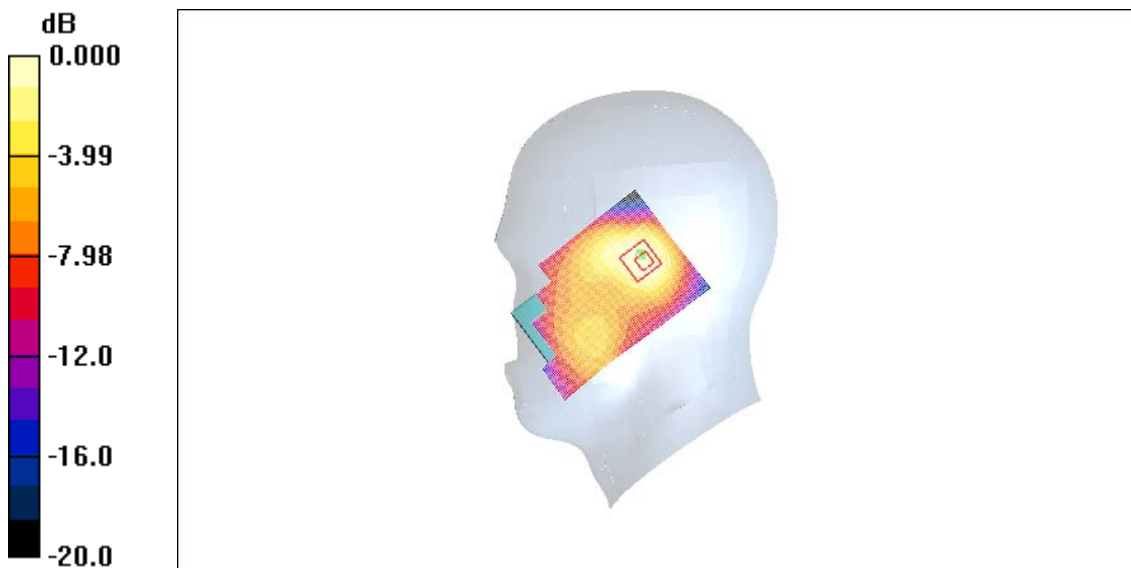

0 dB = 0.162mW/g

Fig.33 1900 MHz CH661 – Slide down

1900 Right Cheek High – Slide down

Date/Time: 2009-3-24 8:57:21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.333 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.93 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

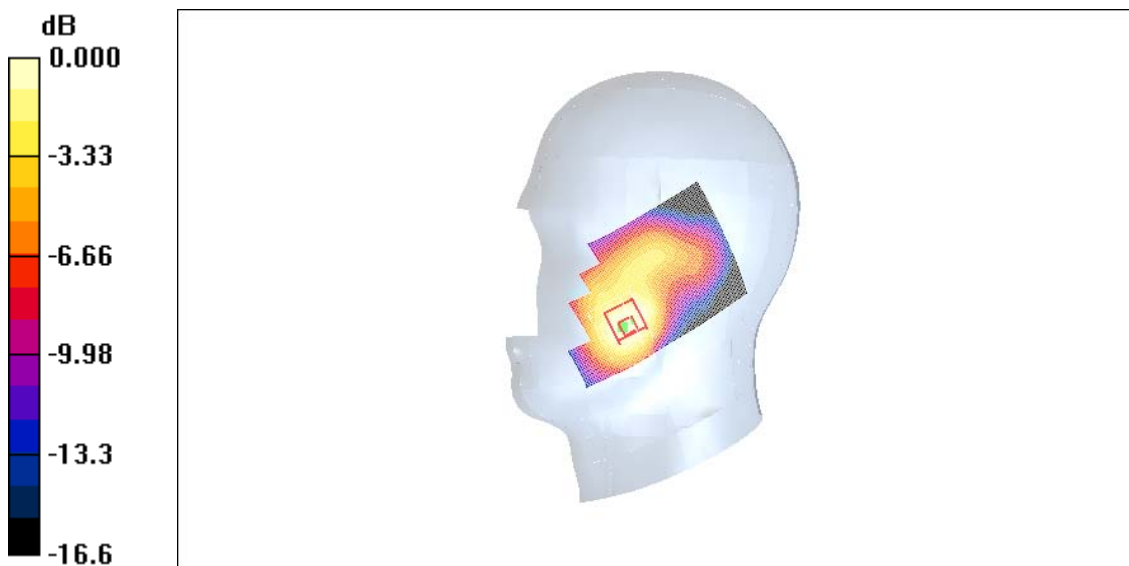


Fig. 34 1900 MHz CH810 – Slide down

1900 Right Cheek Low – Silde down

Date/Time: 2009-3-24 9:11:42

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.324 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.55 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.302 mW/g

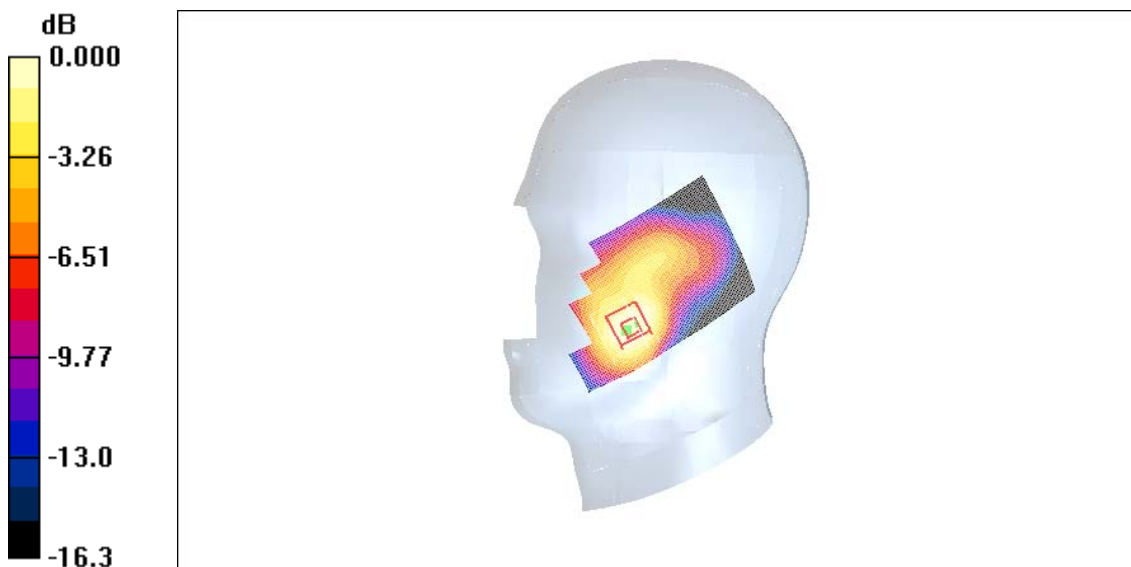

0 dB = 0.302mW/g

Fig. 35 1900 MHz CH512 – Slide down

1900 Left Cheek Middle – Slide up

Date/Time: 2009-3-24 9:26:37

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.109 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.67 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.109 mW/g

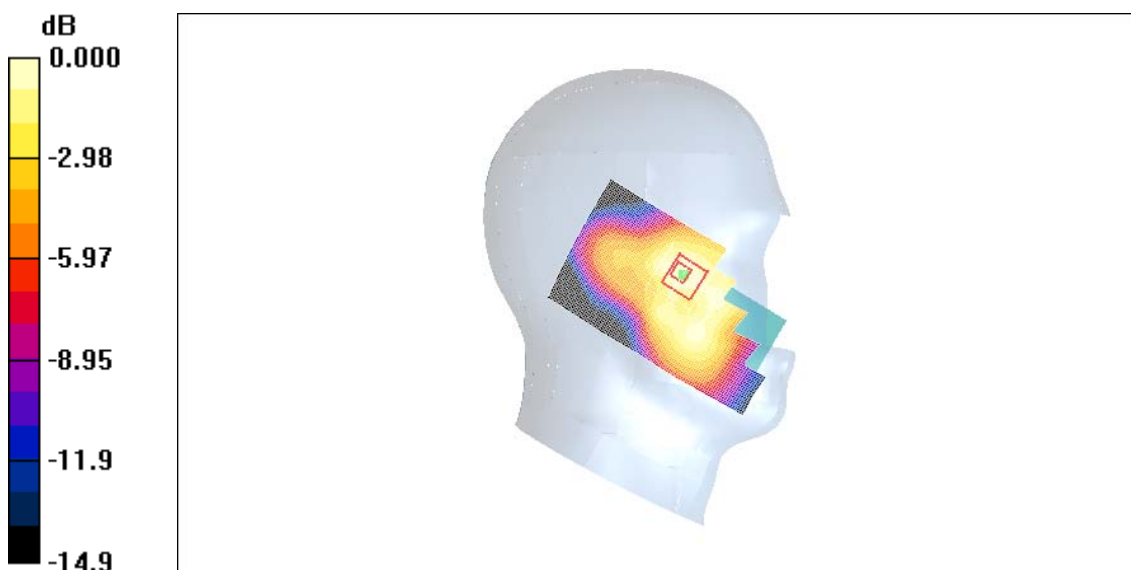

0 dB = 0.109mW/g

Fig. 36 1900 MHz CH661 – Slide up

1900 Left Tilt Middle – Slide up

Date/Time: 2009-3-24 9:40:32

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.115 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.35 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

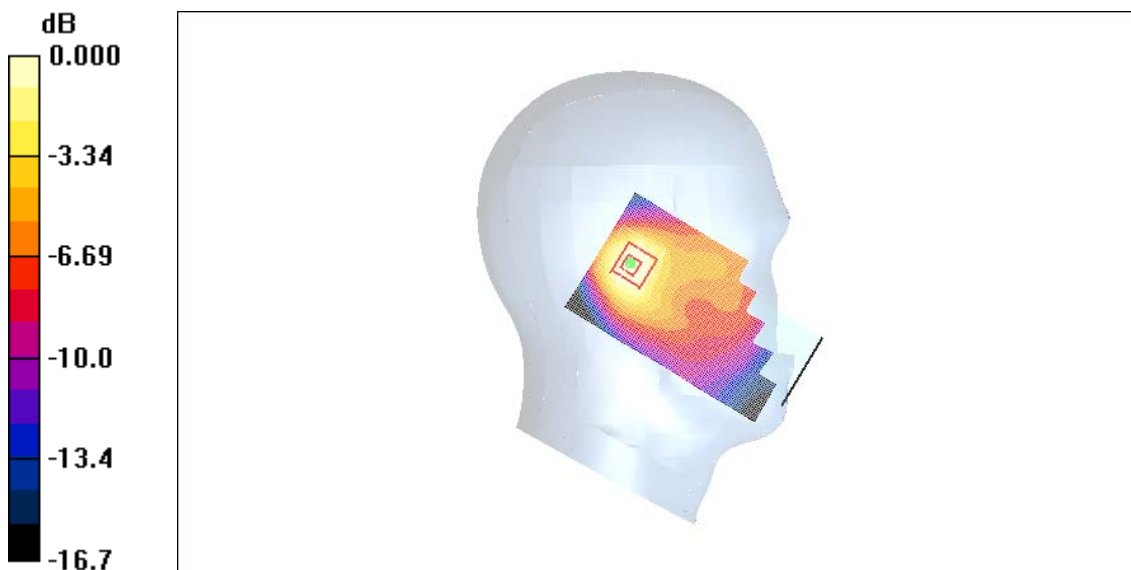

0 dB = 0.106mW/g

Fig. 37 1900 MHz CH661 – Slide up

1900 Right Cheek Middle – Slide up

Date/Time: 2009-3-24 9:54:29

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.144 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m; Power Drift = -0.078 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.142 mW/g

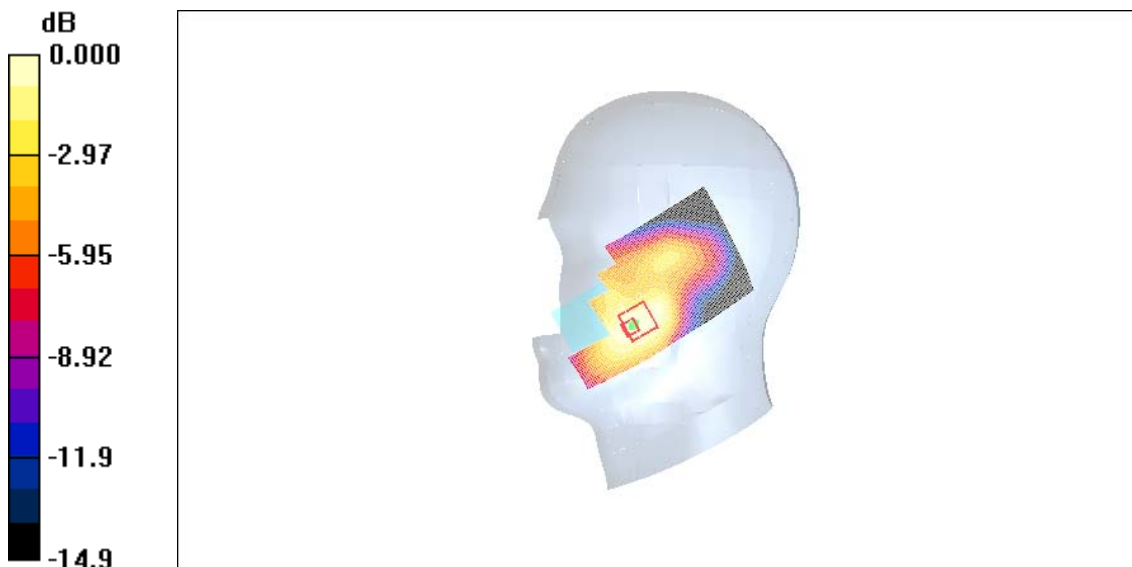

0 dB = 0.142mW/g

Fig. 38 1900 MHz CH661 – Slide up

1900 Right Tilt Middle – Slide up

Date/Time: 2009-3-24 10:08:11

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.109 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.26 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.103 mW/g

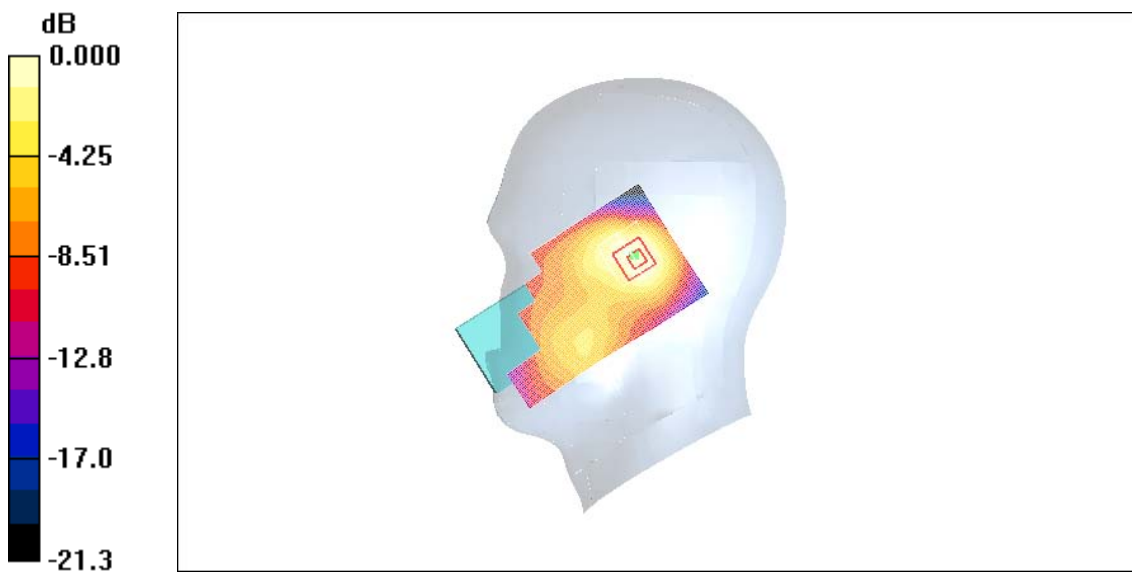

0 dB = 0.103mW/g

Fig.39 1900 MHz CH661 – Slide up

1900 Right Cheek High – Slide up

Date/Time: 2009-3-24 10:22:37

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.157 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.20 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.157 mW/g

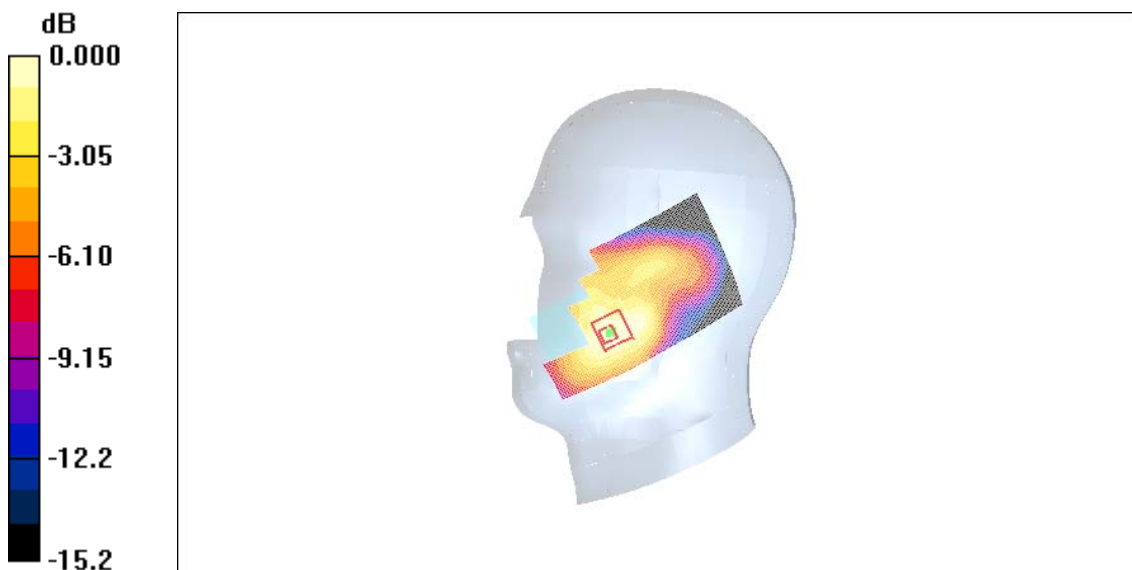

0 dB = 0.157mW/g

Fig. 40 1900 MHz CH810 – Slide up

1900 Right Cheek Low – Silde up

Date/Time: 2009-3-24 10:36:51

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz new Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Low/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.110 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.91 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.110 mW/g

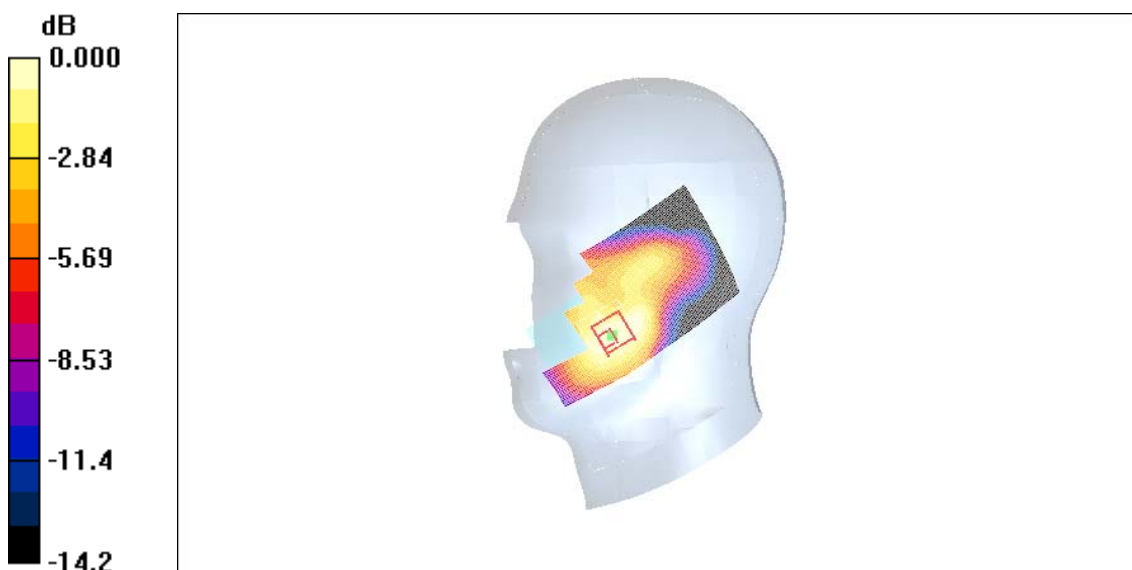

0 dB = 0.110mW/g

Fig. 41 1900 MHz CH512 – Slide up

1900 Body Towards Ground High with GPRS – Slide down

Date/Time: 2009-3-24 10:52:30

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.666 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.39 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

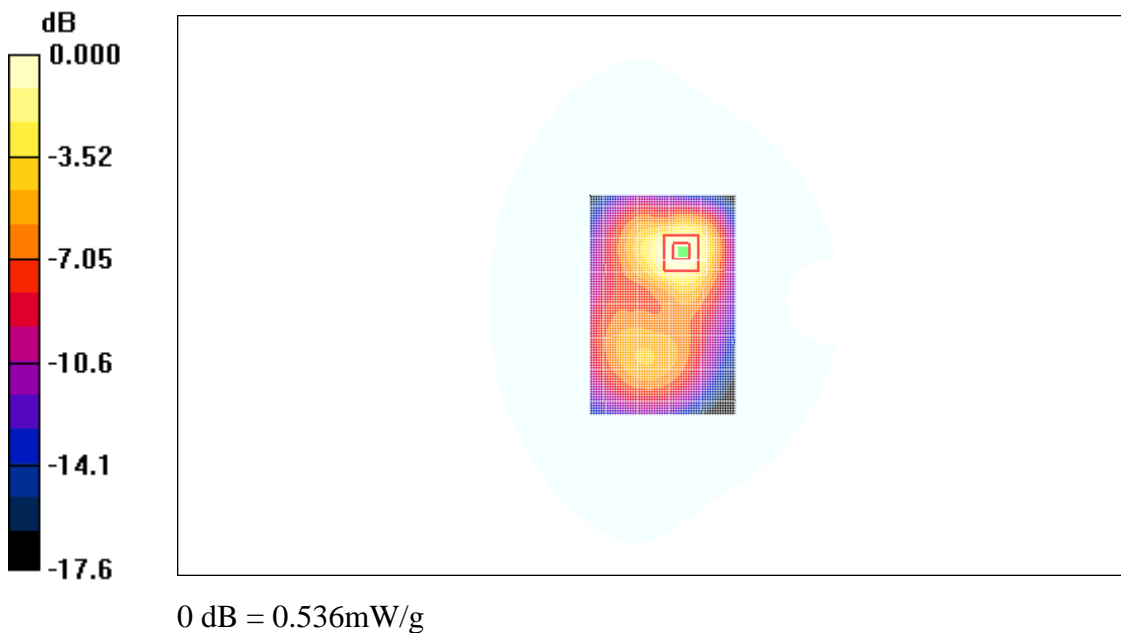


Fig. 42 1900 MHz CH810 – Slide down

1900 Body Towards Ground Middle with GPRS – Slide down

Date/Time: 2009-3-24 11:06:45

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.740 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.79 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.332 mW/g

Maximum value of SAR (measured) = 0.607 mW/g

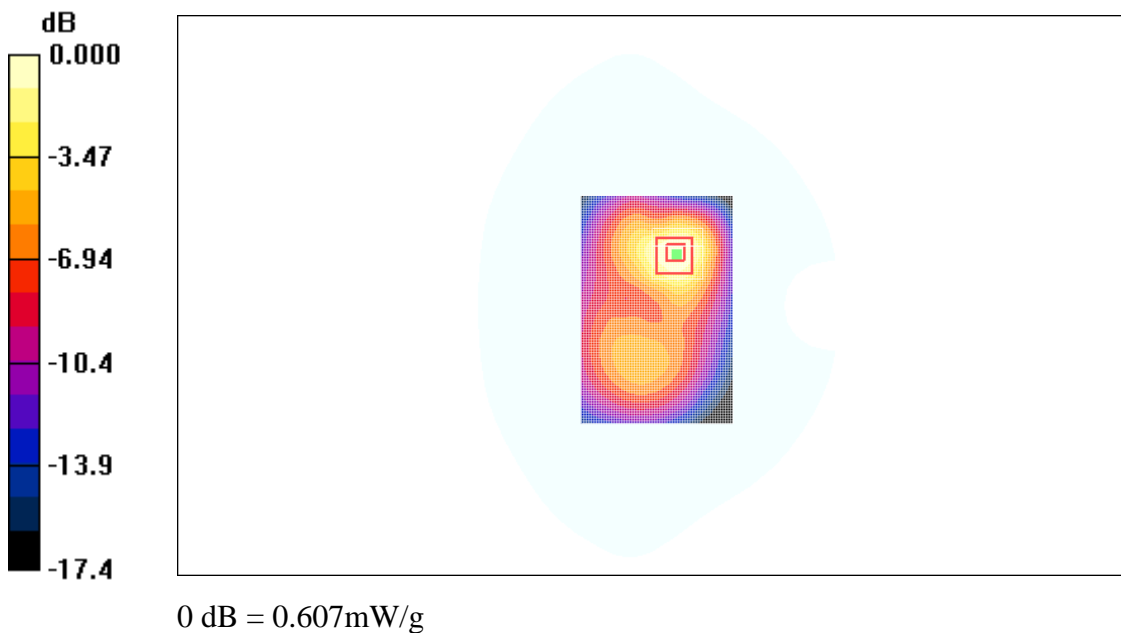


Fig. 43 1900 MHz CH661 – Slide down

1900 Body Towards Ground Low with GPRS – Slide down

Date/Time: 2009-3-24 11:20:33

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.767 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.23 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.651 mW/g; SAR(10 g) = 0.349 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

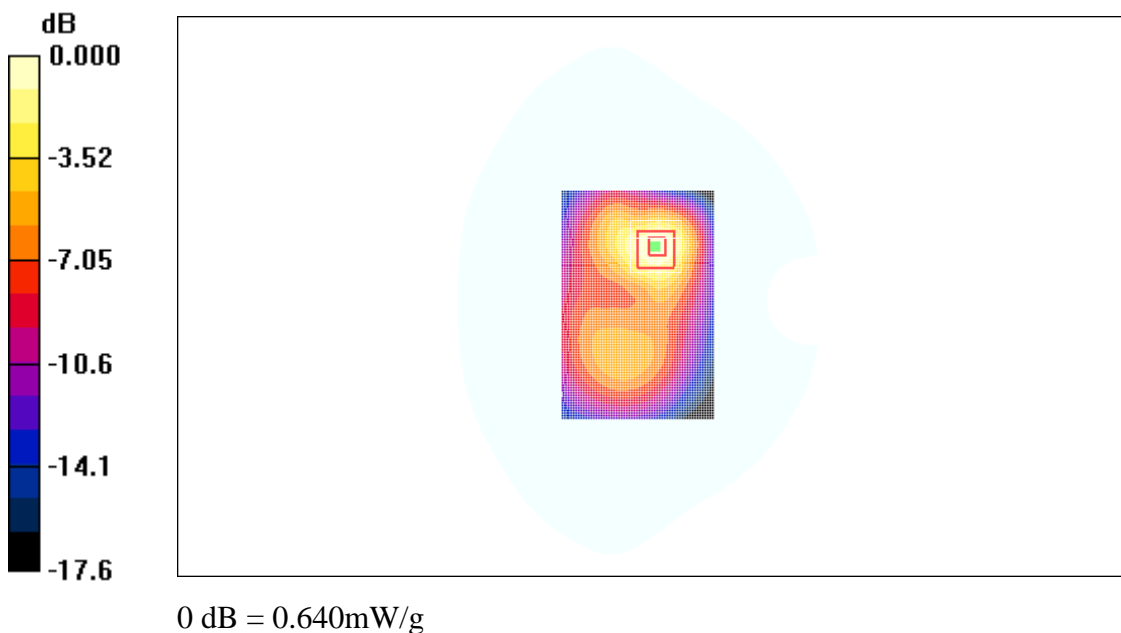


Fig. 44 1900 MHz CH512 – Slide down

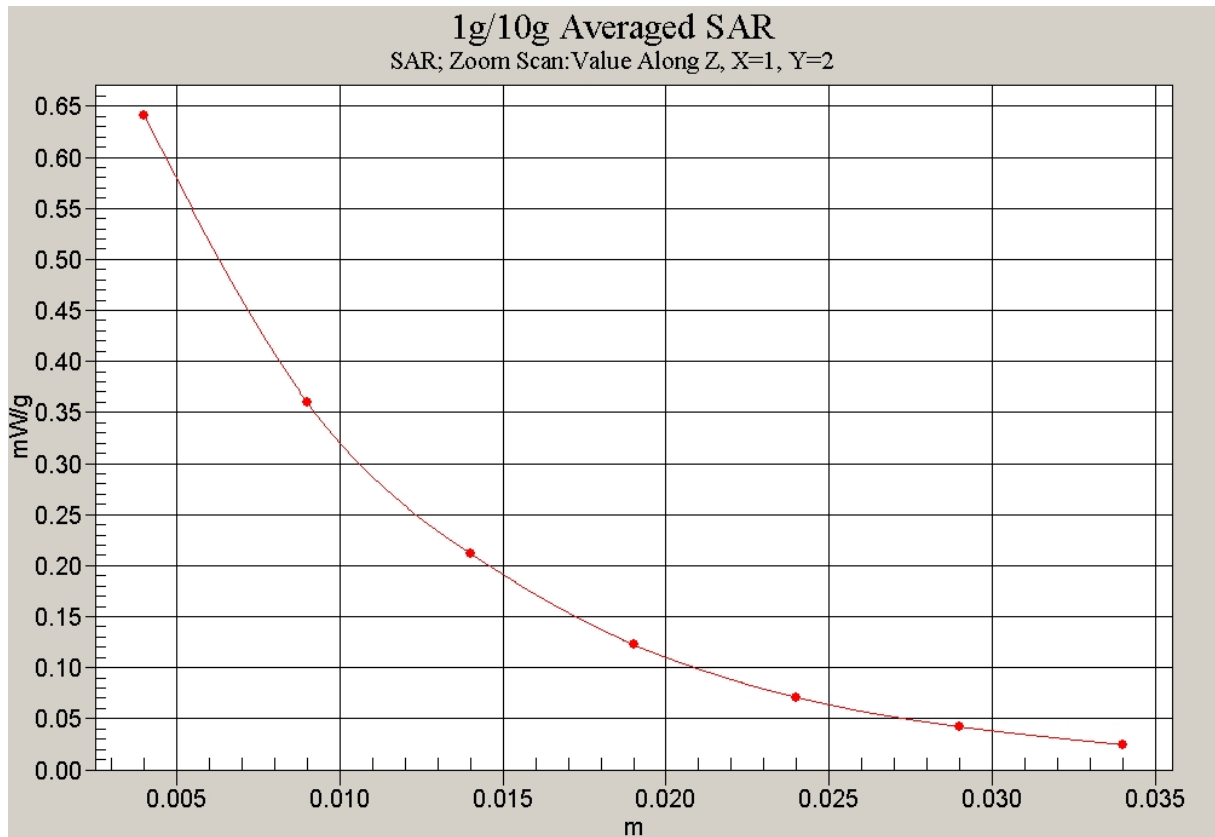


Fig. 45 Z-Scan at power reference point (1900 MHz CH512) – Slide down

1900 Body Towards Phantom High with GPRS – Slide down

Date/Time: 2009-3-24 11:34:07

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.299 mW/g


Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.11 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.288 mW/g

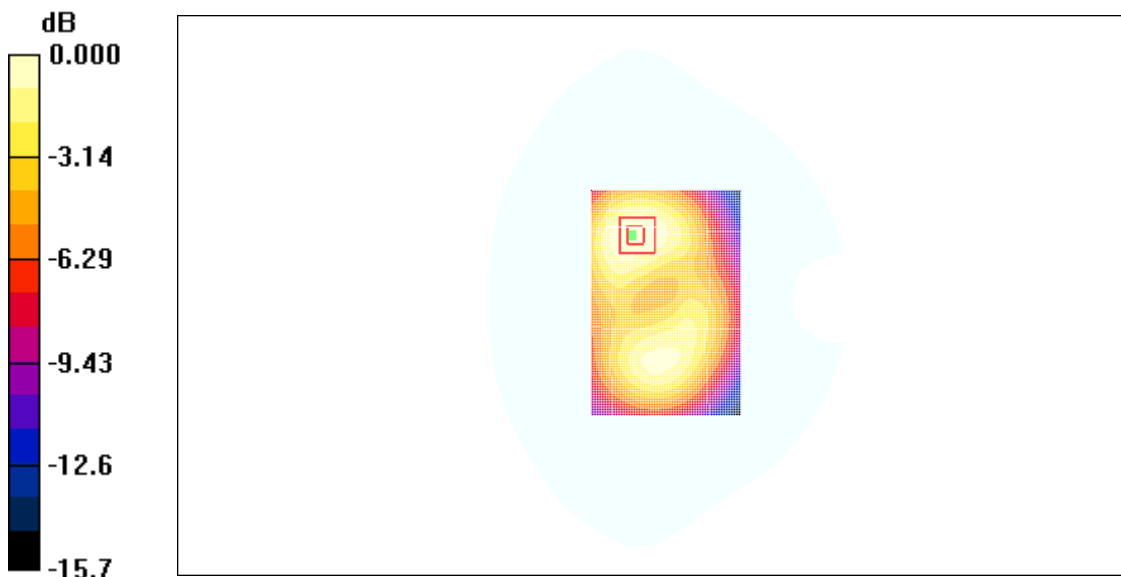

0 dB = 0.288mW/g

Fig. 46 1900 MHz CH810 – Slide down

1900 Body Towards Phantom Middle with GPRS – Slide down

Date/Time: 2009-3-24 11:48:00

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.315 mW/g


Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.05 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

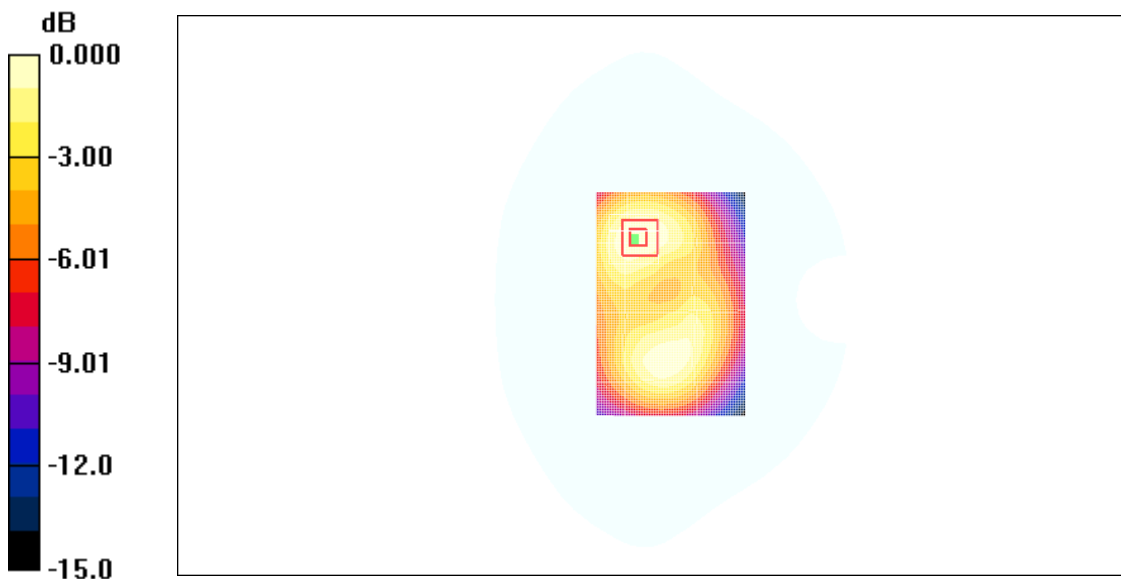

0 dB = 0.308mW/g

Fig.47 1900 MHz CH661 – Slide down

1900 Body Towards Phantom Low with GPRS – Slide down

Date/Time: 2009-3-24 12:02:56

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.303 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.80 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.276 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.284 mW/g

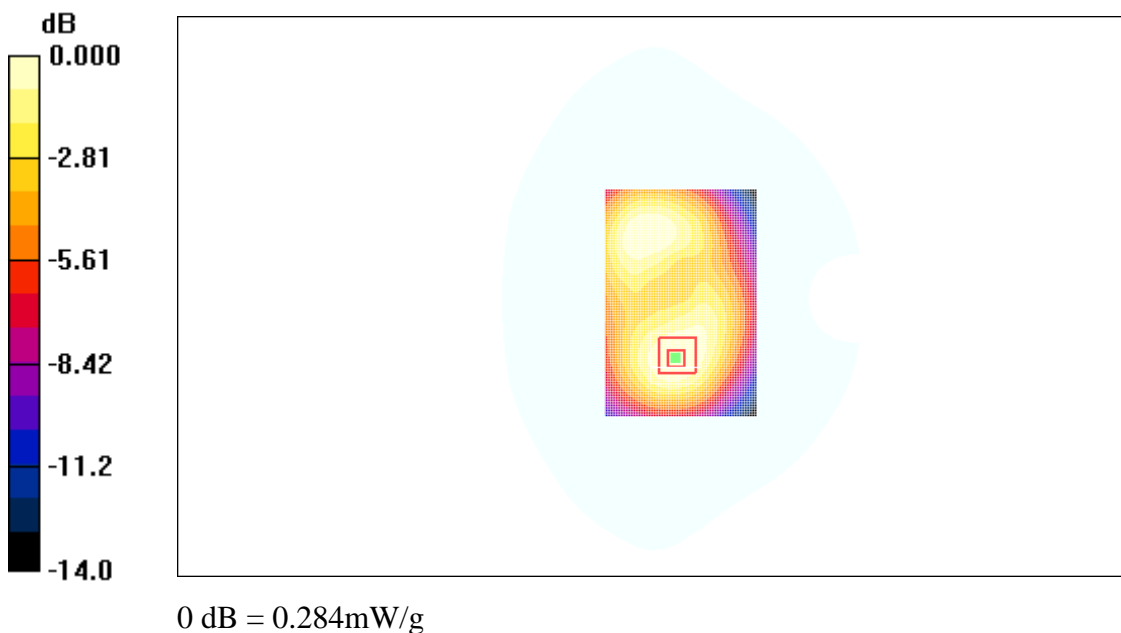


Fig.48 1900 MHz CH512 – Slide down

1900 Body Towards Ground Low with EGPRS – Slide down

Date/Time: 2009-3-24 12:16:48

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.439 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.01 V/m; Power Drift = 0.076 dB

Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 0.392 mW/g

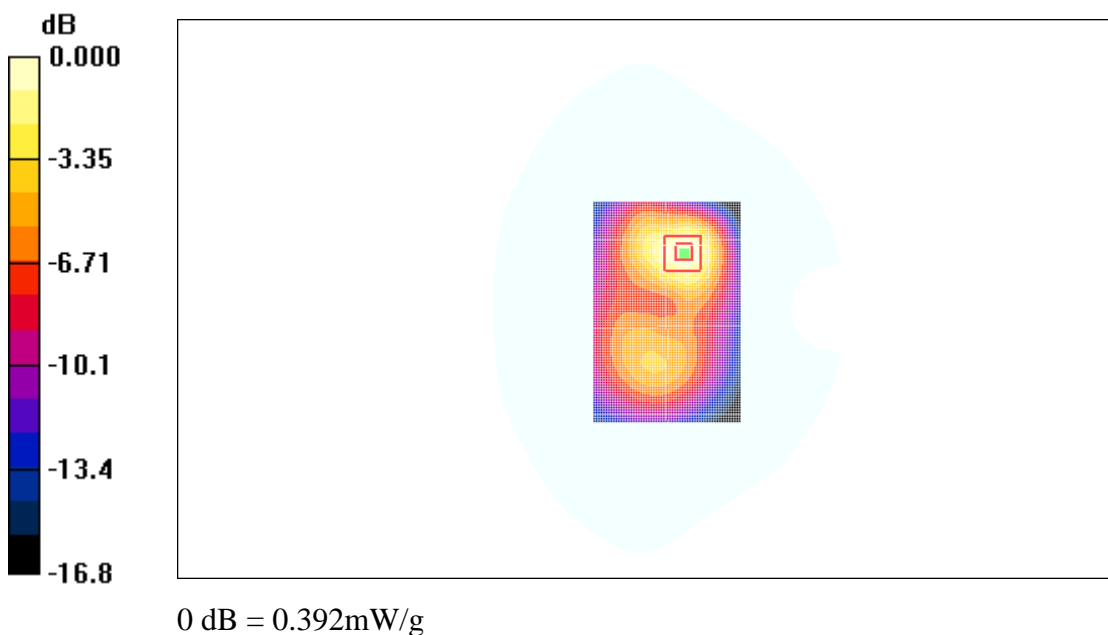


Fig.49 1900 MHz CH661 – Slide down

1900 Body Towards Ground Low with Headset – Slide down

Date/Time: 2009-3-24 12:31:16

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.178 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.74 V/m; Power Drift = 0.192 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

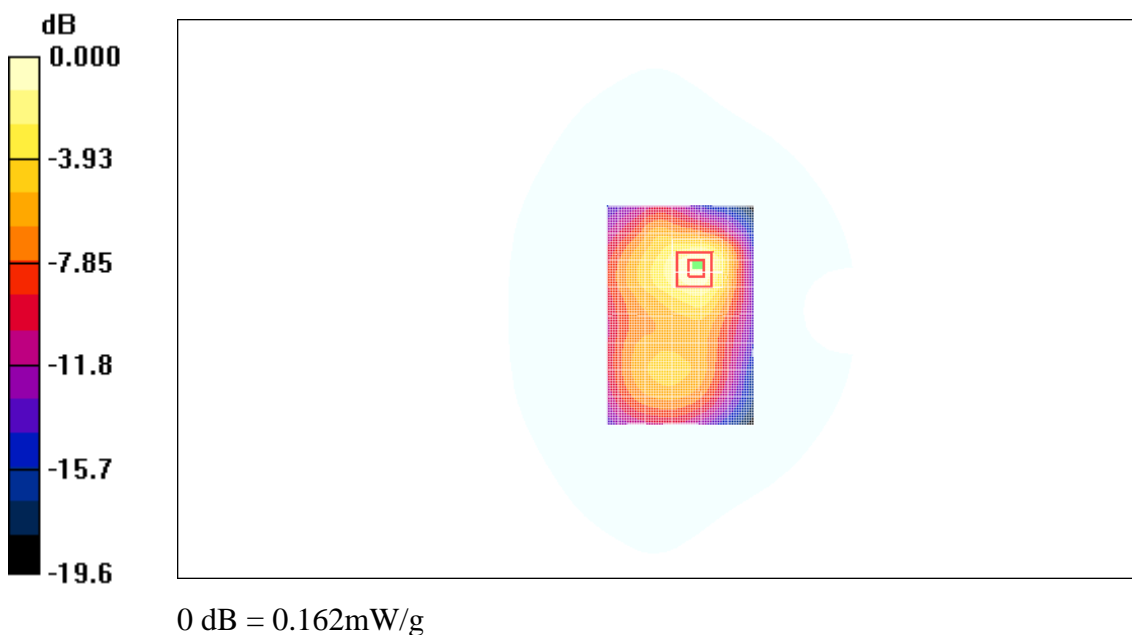


Fig. 50 1900 MHz CH661 – Slide down

1900 Body Towards Ground High with GPRS – Slide up

Date/Time: 2009-3-24 12:46:21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.746 mW/g


Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.366 mW/g

Maximum value of SAR (measured) = 0.640 mW/g

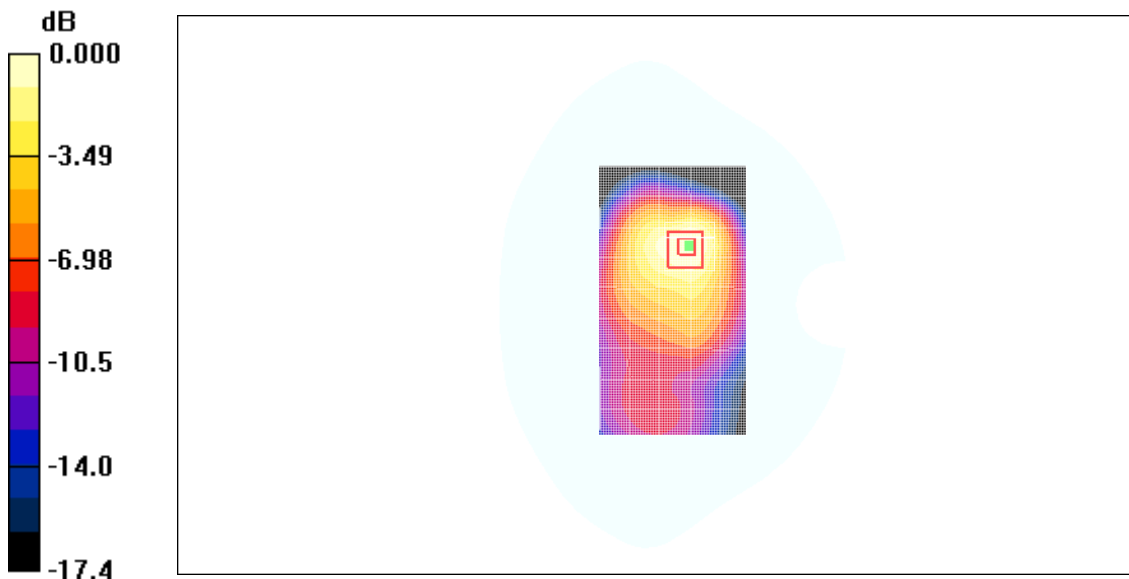

0 dB = 0.640mW/g

Fig. 51 1900 MHz CH810 – Slide up

1900 Body Towards Ground Middle with GPRS – Slide up

Date/Time: 2009-3-24 13:00:43

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.753 mW/g


Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.649 mW/g

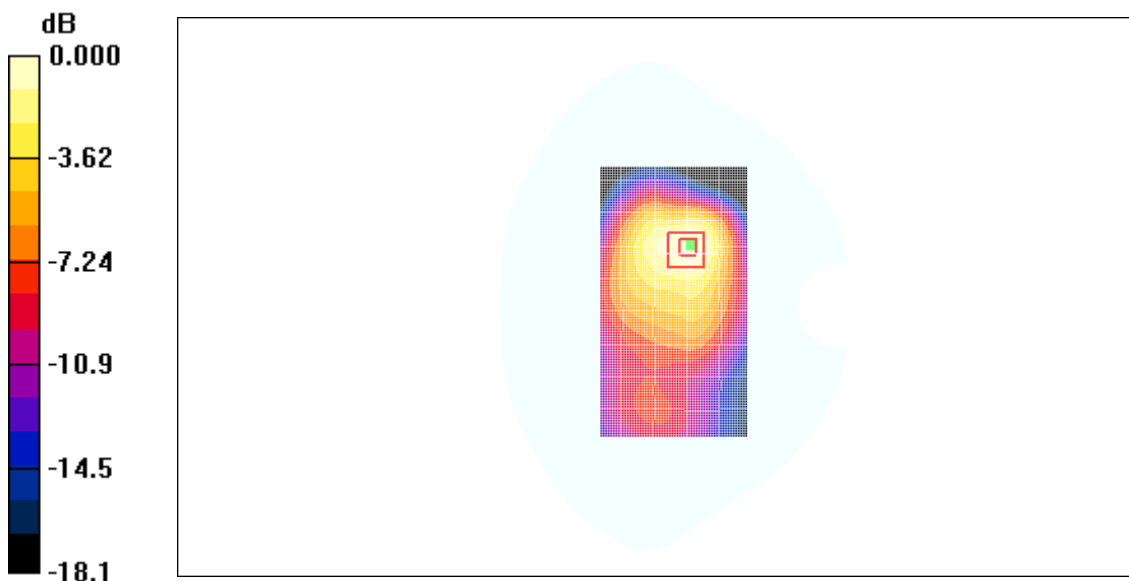

0 dB = 0.649mW/g

Fig. 52 1900 MHz CH661 – Slide up

1900 Body Towards Ground Low with GPRS – Slide up

Date/Time: 2009-3-24 13:14:50

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Low/Area Scan (51x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.680 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.591 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.616 mW/g

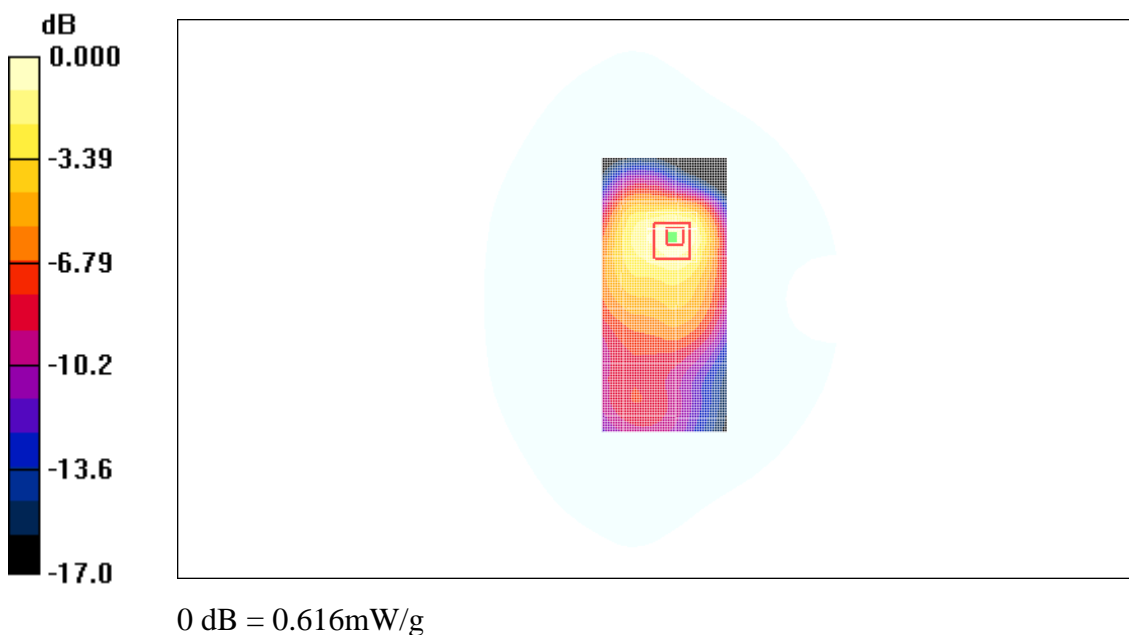


Fig. 53 1900 MHz CH512 – Slide up

1900 Body Towards Phantom High with GPRS – Slide up

Date/Time: 2009-3-24 13:28:14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.263 mW/g


Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.68 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.245 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.258 mW/g

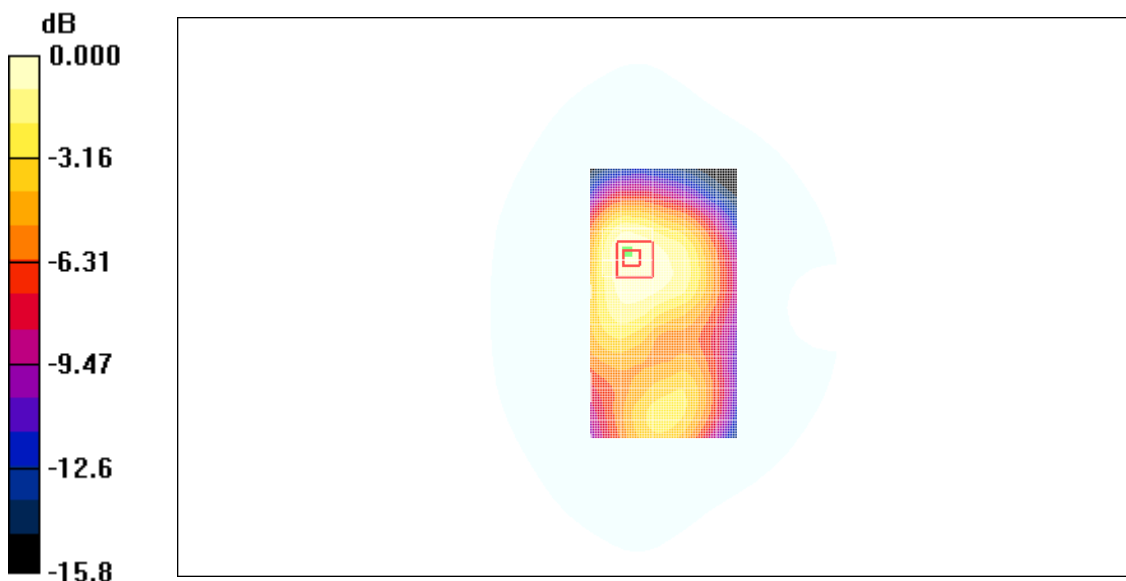

0 dB = 0.258mW/g

Fig. 54 1900 MHz CH810 – Slide up

1900 Body Towards Phantom Middle with GPRS – Slide up

Date/Time: 2009-3-24 13:42:05

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.247 mW/g


Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.91 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.247 mW/g

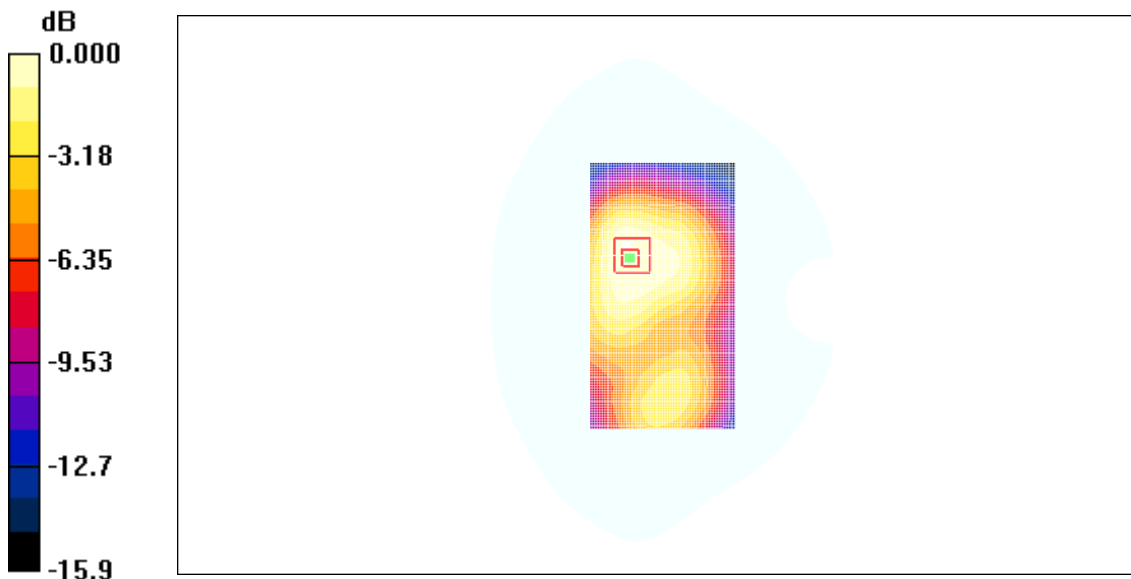

0 dB = 0.247mW/g

Fig.55 1900 MHz CH661 – Slide up

1900 Body Towards Phantom Low with GPRS – Slide up

Date/Time: 2009-3-24 13:56:34

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom Low/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.225 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.57 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.230 mW/g

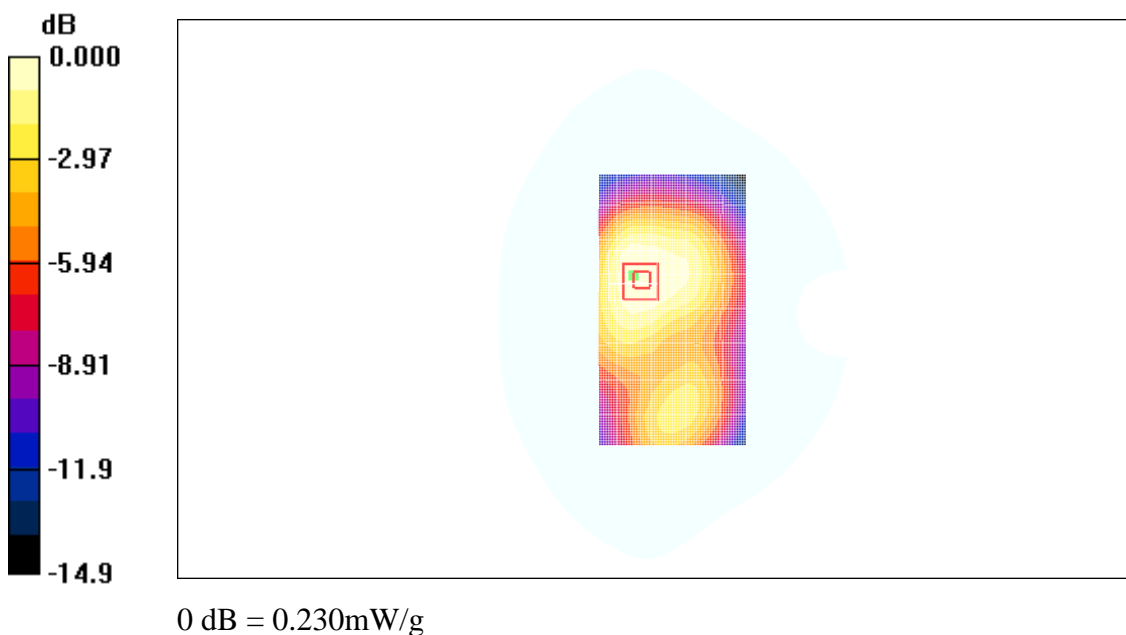


Fig.56 1900 MHz CH512 – Slide up

ANNEX D SYSTEM VALIDATION RESULTS

835MHz

Date/Time: 2009-3-23 7:13:45

Electronics: DAE4 Sn771

Medium: Head 835

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3149 ConvF(6.56, 6.56, 6.56)

835MHz/Area Scan (101x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 2.68 mW/g


835MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.8 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.50 mW/g; SAR(10 g) = 1.62 mW/g

Maximum value of SAR (measured) = 2.69 mW/g

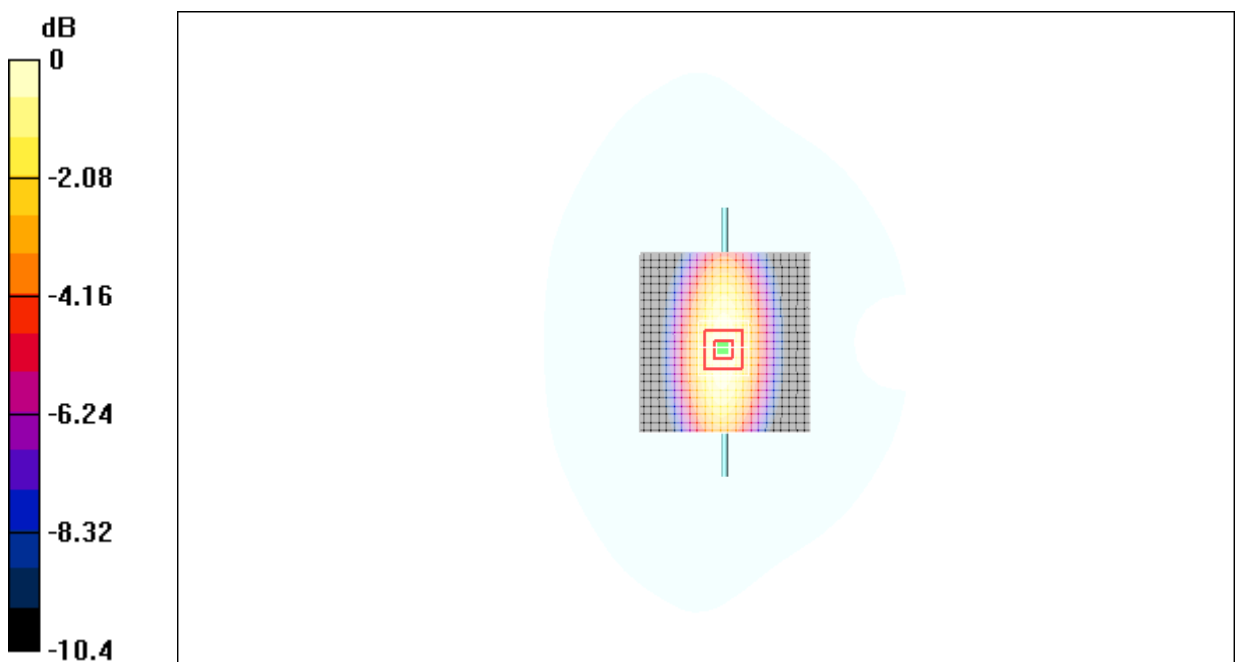

0 dB = 2.69mW/g

Fig.57 validation 835MHz 250mW

1900MHz

Date/Time: 2009-3-24 7:20:08

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

-

System Validation/Area Scan (101x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 11.2 mW/g


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.1 V/m ; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.91 mW/g ; SAR(10 g) = 5.27 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

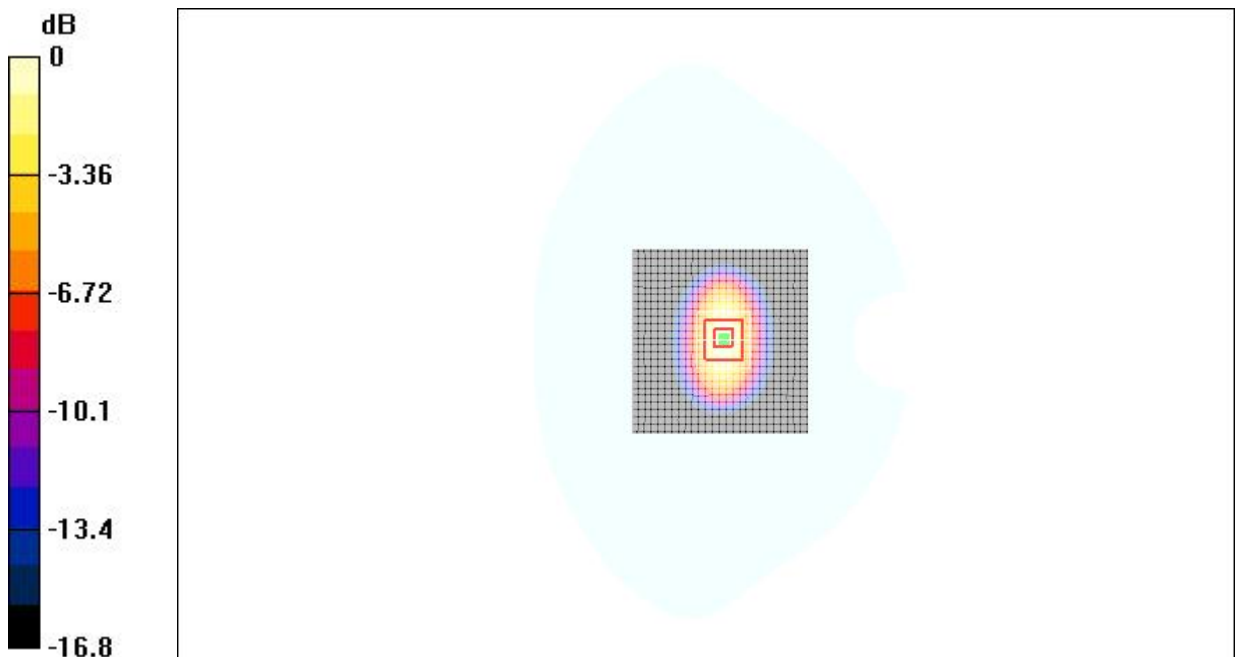

0 dB = 11.3mW/g

Fig.58 validation 1900MHz 250mW

ANNEX E PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC China**

Certificate No: **ES3DV3-3149_Oct08**

CALIBRATION CERTIFICATE

Object	ES3DV3-SN: 3149
Calibration procedure(s)	QA CAL-01.v6 Calibration procedure for dosimetric E-field probes
Calibration date:	October 1, 2008
Condition of the calibrated item	In Tolerance

This calibration certify documents the traceability to national standards, which realize the physical units of measurements(SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted at an environment temperature (22±3)°C and humidity<70%

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Data (Calibrated by, Certification NO.)	Scheduled Calibration
Power meter E4419B	GB41293874	6-May-08 (METAS, NO. 251-00388)	May-09
Power sensor E4412A	MY41495277	6-May-08 (METAS, NO. 251-00388)	May-09
Reference 3 dB Attenuator	SN:S5054 (3c)	11-Aug-08 (METAS, NO. 251-00403)	Aug-09
Reference 20 dB Attenuator	SN:S5086 (20b)	4-May-08 (METAS, NO. 251-00389)	May-09
Reference 30 dB Attenuator	SN:S5129 (30b)	11-Aug-08 (METAS, NO. 251-00404)	Aug-09
DAE4	SN:617	11-Jun-08 (SPEAG, NO.DAE4-907_Jun08)	Jun-09
Reference Probe ES3DV2	SN: 3013	13-Jan-08 (SPEAG, NO. ES3-3013_Jan08)	Jan-09

Secondary Standards	ID#	Check Data (in house)	Scheduled Calibration
RF generator HP8648C	US3642U01700	4-Aug-99(SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01(SPEAG, in house check Nov-07)	In house check: Nov-09

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: October 1, 2008

This calibration certificate shall not be reported except in full without written approval of the laboratory.

Certificate No: **ES3DV3-3149_Oct08**

Page 1 of 9

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(*f*)_{x,y,z} = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN: 3149

October 1, 2008

Probe ES3DV3

SN: 3149

Manufactured: June 12, 2007

Calibrated: October 1, 2008

Calibrated for DASY4 System

ES3DV3 SN: 3149

October 1, 2008

DASY – Parameters of Probe: ES3DV3 SN:3149

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.14±10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	94mV
NormY	1.23±10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	95mV
NormZ	1.29±10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	91mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)
Please see Page 8

Boundary Effect

TSL 900MHz Typical SAR gradient: 5% per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SARbe[%]	Without Correction Algorithm	3.8	1.6
SARbe[%]	With Correction Algorithm	0.8	0.7

TSL 1810MHz Typical SAR gradient: 10% per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SARbe[%]	Without Correction Algorithm	6.8	3.6
SARbe[%]	With Correction Algorithm	0.4	0.2

Sensor Offset

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.


^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN: 3149

October 1, 2008

Frequency Response of E-Field


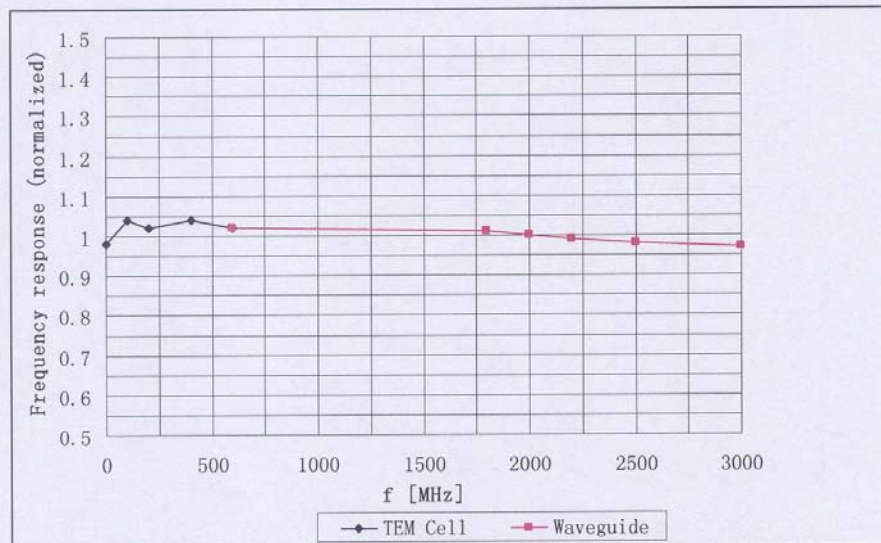


Uncertainty of Frequency Response of E-field: $\pm 5.0\%$ (k=2)

ES3DV3 SN: 3149

October 1, 2008

Receiving Pattern (ϕ), $\theta = 0^\circ$

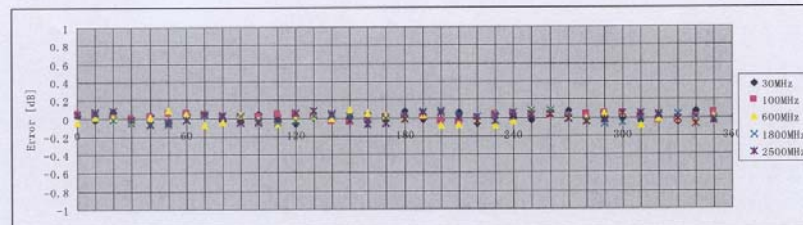
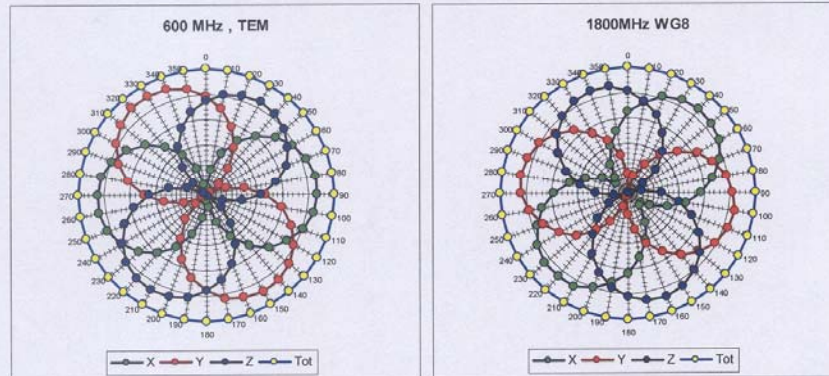


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3 SN: 3149

October 1, 2008

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide: WG8, $f = 1800$ MHz)

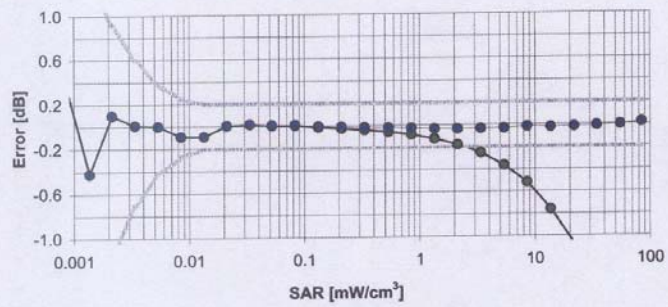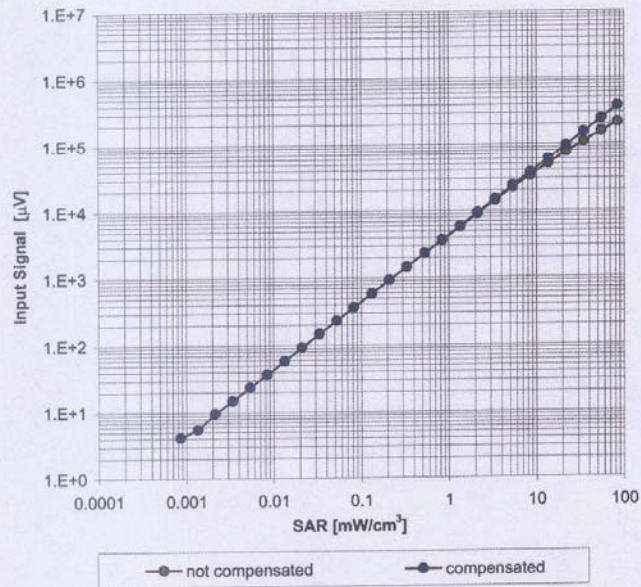


Uncertainty of Linearity Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3 SN: 3149

October 1, 2008

Conversion Factor Assessment

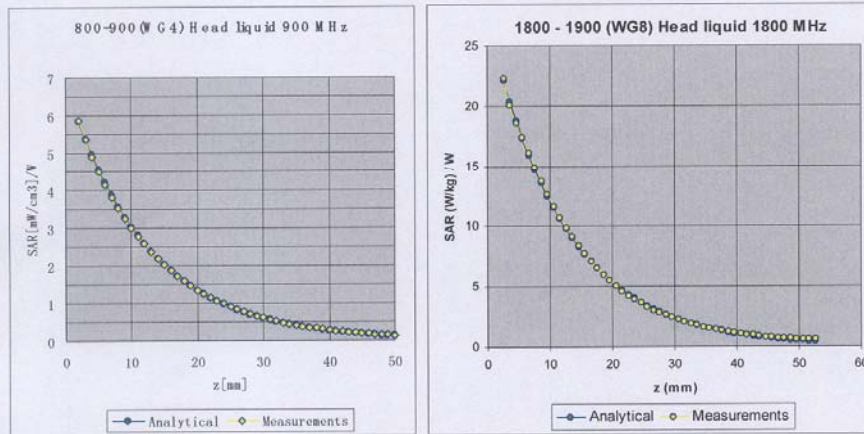

f[MHz]	Validity[MHz] ^C	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
850	±50 /±100	Head	41.5±5%	0.90±5%	0.91	1.13	6.56	±11.0% (k=2)
900	±50 /±100	Head	41.5±5%	0.97±5%	0.83	1.26	6.34	±11.0% (k=2)
1800	±50 /±100	Head	40.0±5%	1.40±5%	0.69	1.47	5.18	±11.0% (k=2)
1900	±50 /±100	Head	40.0±5%	1.40±5%	0.72	1.38	5.03	±11.0% (k=2)
850	±50 /±100	Body	55.2±5%	0.97±5%	0.76	1.26	6.22	±11.0% (k=2)
900	±50 /±100	Body	55.0±5%	1.05±5%	0.99	1.06	6.02	±11.0% (k=2)
1800	±50 /±100	Body	53.3±5%	1.52±5%	0.75	1.34	4.97	±11.0% (k=2)
1900	±50 /±100	Body	53.3±5%	1.52±5%	0.62	1.33	4.68	±11.0% (k=2)


^C The validity of ±100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN: 3149

October 1, 2008

Deviation from Isotropy

Error (ϕ, θ), $f = 900$ MHz

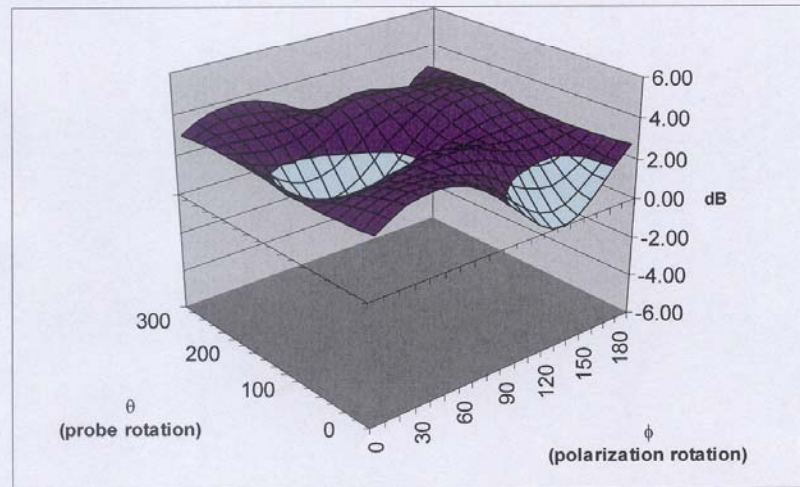

Uncertainty of Spherical Isotropy Assessment: $\pm 2.5\%$ ($k=2$)

ANNEX F DIPOLE CALIBRATION CERTIFICATE

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client TMC China

Certificate No: D835V2-443_Feb09

CALIBRATION CERTIFICATE



Object	D835V2-SN: 443
Calibration procedure(s)	QA CAL-05.v6 Calibration procedure for dipole validation kits
Calibration date:	February 18, 2009
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements(SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted at an environment temperature $(22\pm 3)^{\circ}\text{C}$ and humidity < 70%

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Data (Calibrated by, Certification NO.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Oct-08 (METAS, NO. 217-00608)	Oct-09
Power sensor 8481A	US37292783	01-Oct-08 (METAS, NO. 217-00608)	Oct-09
Reference 20 dB Attenuator	SN:5086 (20g)	08-Aug-08 (METAS, NO. 217-00591)	Aug-09
Reference 10 dB Attenuator	SN:5047_2 (10r)	08-Aug-08 (METAS, NO. 217-00591)	Aug-09
DAE4	SN:601	28-Jan-09 (SPEAG, NO.DAE4-601_Jan09)	Jan-10
Reference Probe ET3DV6 (HF)	SN: 1507	17-Oct-08 (SPEAG, NO. ET3-1507_Oct08)	Oct-09
Secondary Standards	ID#	Check Data (in house)	Scheduled Calibration
Power sensor HP 8481A	MY41092317	18-Oct-02(SPEAG, in house check Oct-07)	In house check: Oct-09
RF generator Aglient E4421B	MY41000676	11-May-05(SPEAG, in house check Nov-07)	In house check: Nov -09
Network Analyzer HP 8753E	US37390585S4206	18-Oct-01(SPEAG, in house check Oct-08)	In house check: Oct -09

	Name	Function	Signature
Calibrated by:	Marcel Fehr	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Director	

Issued: February 19, 2009

This calibration certificate shall not be reported except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zaughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.9 \pm 6 %	0.88 mho/m \pm 6 %
Head TSL temperature during test	(21.2 \pm 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.48 mW / g
SAR normalized	normalized to 1W	9.90 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.70 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.60 mW / g
SAR normalized	normalized to 1W	6.40 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.31 mW / g \pm 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.5Ω - 6.8 jΩ
Return Loss	- 25.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.402 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 3, 2001

DASY4 Validation Report for Head TSL

Date/Time: 18.02.2009 10:13:45

Test laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; serial: D835V2-SN: 443

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz;

Medium parameters used: $f=835$ MHz; $\sigma=0.88$ mho/m; $\epsilon_r=39.9$; $\rho= 1000\text{kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6-SN1507(HF); ConvF(6.01,6.01,6.01); Calibrated: 17.10.2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.1_2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA;
- Measurement SW: DASY, V4.7 Build 53; Post processing SW: SEMCAD, V1.8 Build 172


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.6 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 3.72 W/kg


SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.60 mW/g

Maximum value of SAR (measured) = 2.70 mW/g

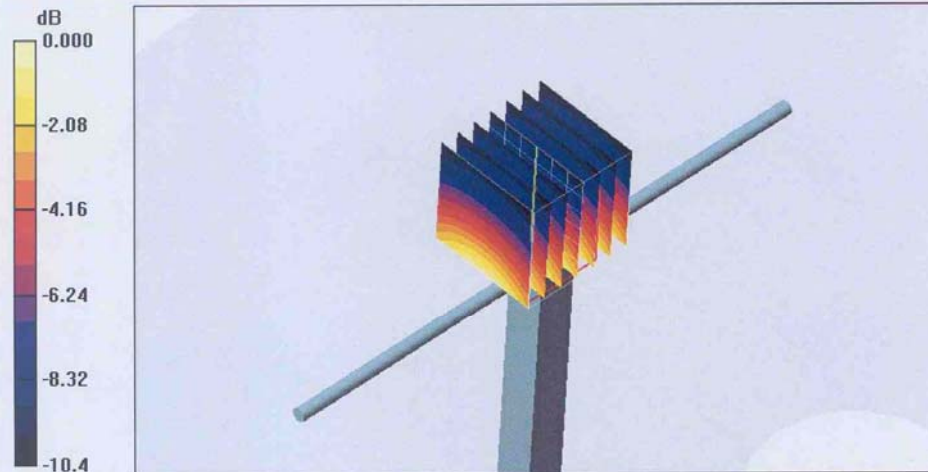

0 dB = 2.70mW/g

Impedance measurement Plot for Head TSL

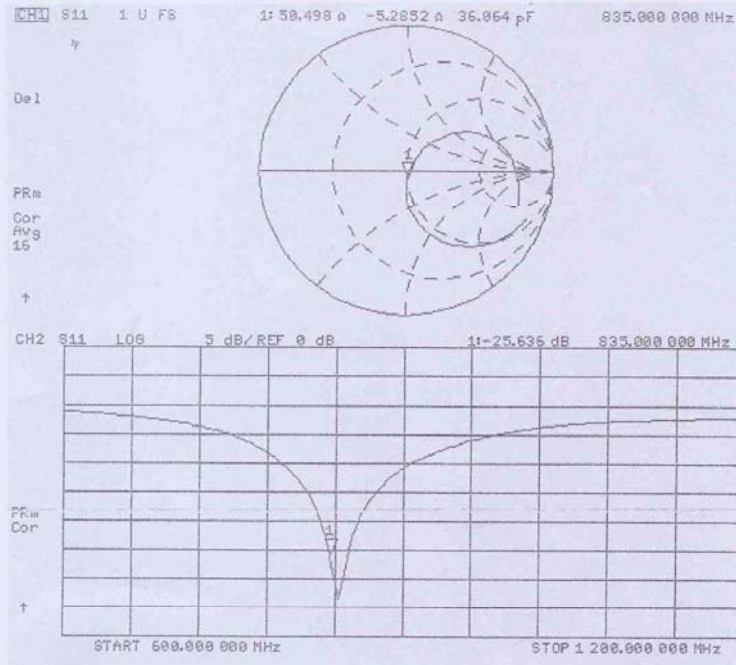

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates
Client TMC China

Accreditation No.: SCS 108

Certificate No: D1900V2-541_Feb09

CALIBRATION CERTIFICATE



Object	D1900V2-SN: 541
Calibration procedure(s)	QA CAL-05.v6 Calibration procedure for dipole validation kits
Calibration date:	February 19, 2009
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements(SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted at an environment temperature (22±3)°C and humidity<70%

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Data (Calibrated by, Certification NO.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Oct-08 (METAS, NO. 217-00608)	Oct-09
Power sensor 8481A	US37292783	01-Oct-08 (METAS, NO. 217-00608)	Oct-09
Reference 20 dB Attenuator	SN:5086 (20g)	08-Aug-08 (METAS, NO. 217-00591)	Aug-09
Reference 10 dB Attenuator	SN:5047_2 (10r)	08-Aug-08 (METAS, NO. 217-00591)	Aug-09
DAE4	SN:601	28-Jan-09 (SPEAG, NO.DAE4-601_Jan09)	Jan-10
Reference Probe ET3DV6 (HF)	SN: 1507	17-Oct-08 (SPEAG, NO. ET3-1507_Oct08)	Oct-09
Secondary Standards	ID#	Check Data (in house)	Scheduled Calibration
Power sensor HP 8481A	MY41092317	18-Oct-02(SPEAG, in house check Oct-07)	In house check: Oct-09
RF generator Agilent E4421B	MY41000676	11-May-05(SPEAG, in house check Nov-07)	In house check: Nov -09
Network Analyzer HP 8753E	US37390585S4206	18-Oct-01(SPEAG, in house check Oct-08)	In house check: Oct -10

	Name	Function	Signature
Calibrated by:	Marcel Fehr	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Director	

Issued: February 20, 2009

This calibration certificate shall not be reported except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.9 \pm 6 %	1.38 mho/m \pm 6 %
Head TSL temperature during test	(22.1 \pm 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	9.73 mW /g
SAR normalized	normalized to 1W	38.9 mW /g
SAR for nominal Head TSL parameters ¹	normalized to 1W	38.6 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.09 mW /g
SAR normalized	normalized to 1W	20.4 mW /g
SAR for nominal Head TSL parameters ¹	normalized to 1W	20.2 mW / g \pm 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.4 Ω - 8.9 j Ω
Return Loss	- 26.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.214 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 4 , 2001

DASY4 Validation Report for Head TSL

Date/Time: 19.02.2009 09:37:10

Test laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; serial: D1900V2-SN: 541

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f=1900$ MHz; $\sigma=1.38$ mho/m; $\epsilon_r=38.9$; $\rho=1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6-SN1507(HF); ConvF(5.03, 5.03, 5.03); Calibrated: 17.10.2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.1_2009
- Phantom: Flat Phantom 4.9L; Type: QD00P49AA;
- Measurement SW: DASY, V4.7 Build 53; Post processing SW: SEMCAD, V1.8 Build 172


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.1 V/m; Power Drift = 0.059 dB


Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.73 mW/g; SAR(10 g) = 5.09 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

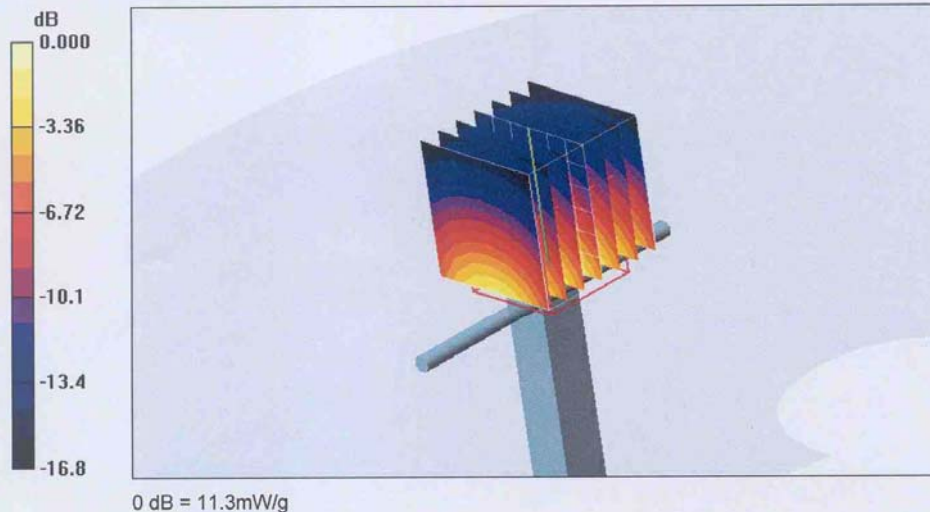


Impedance measurement Plot for Head TSL

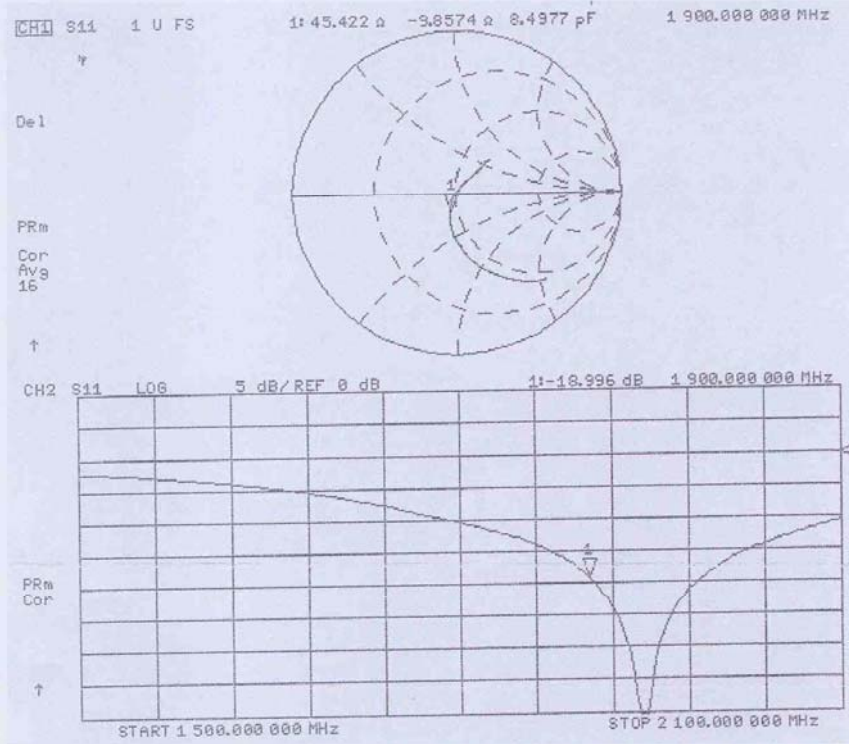

ANNEX G EUT APPEARANCE AND TEST POSITIONS



Picture G1: Constituents of the sample (Lithium Battery is in the Handset)

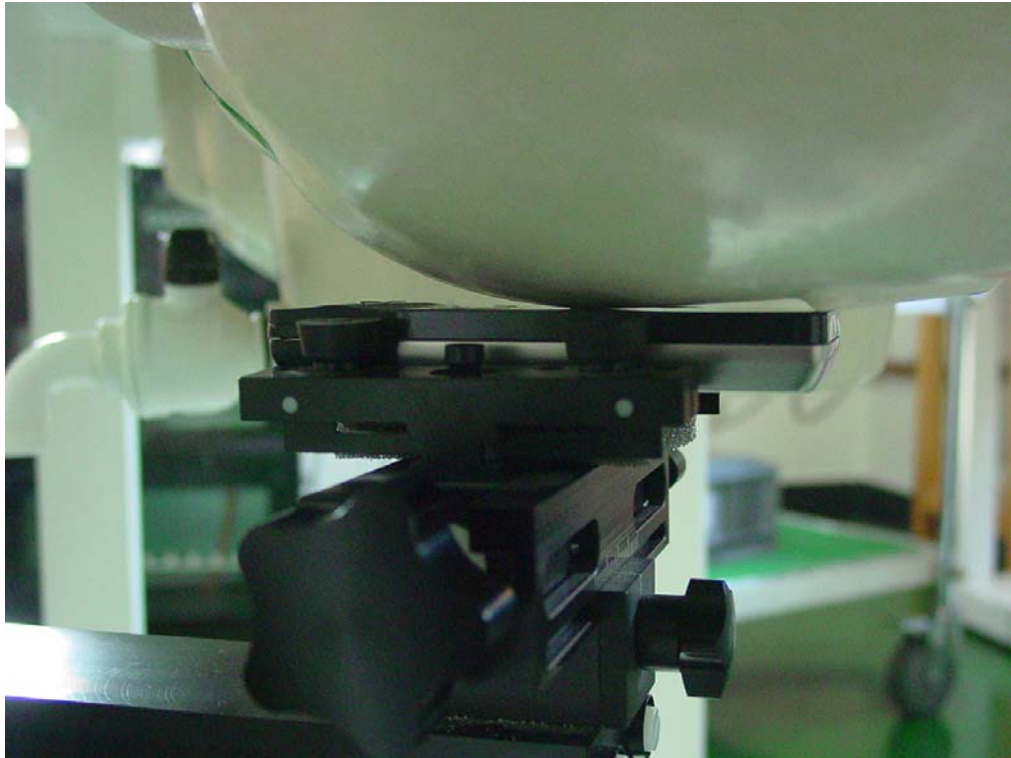

Picture G2: Left Hand Touch Cheek Position – Slide down




Picture G3: Left Hand Tilt 15° Position – Slide down




Picture G4: Right Hand Touch Cheek Position – Slide down



Picture G5: Right Hand Tilt 15° Position – Slide down

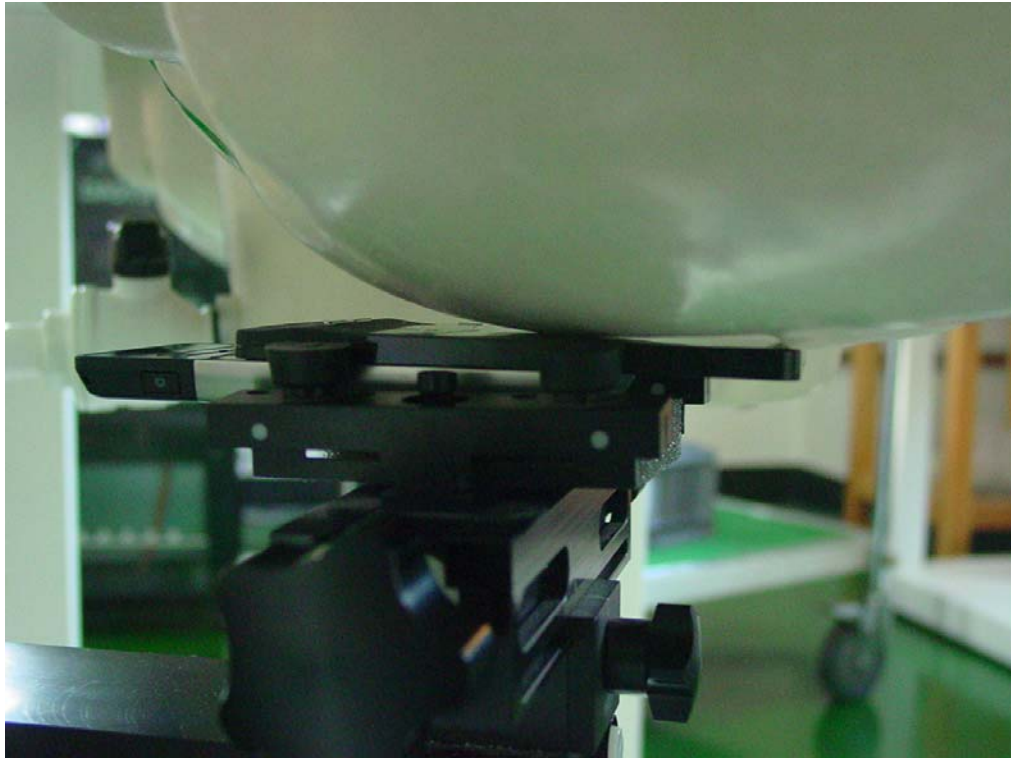


Picture G6: Left Hand Touch Cheek Position – Slide up

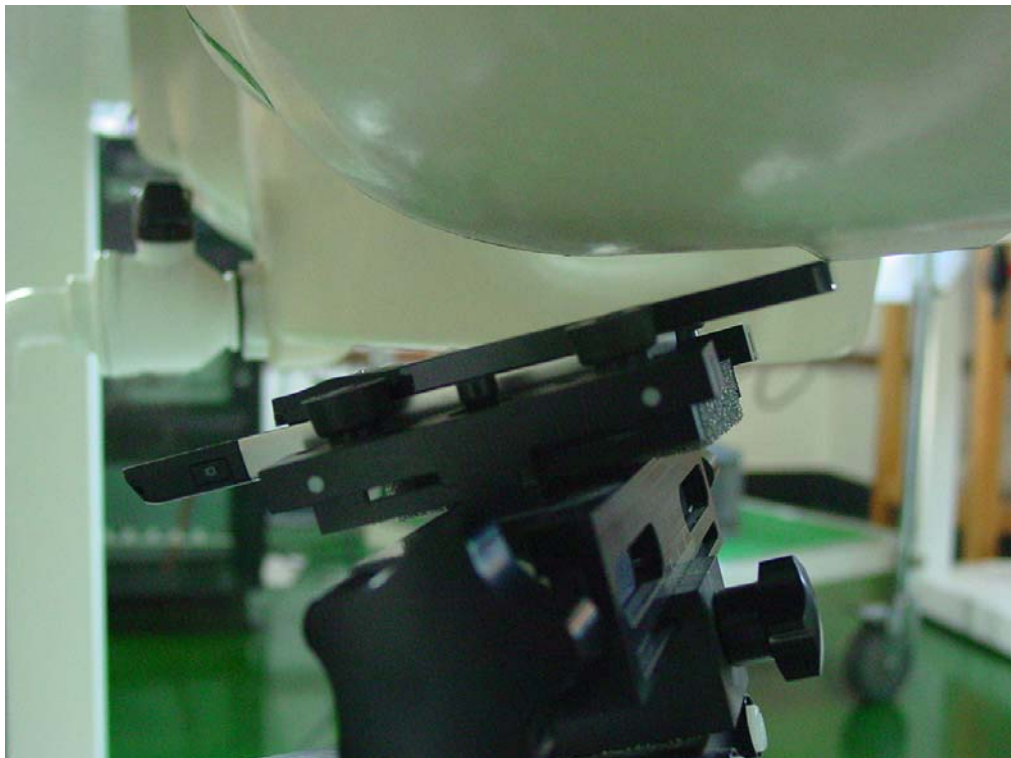


Picture G7: Left Hand Tilt 15° Position – Slide up




Picture G8: Right Hand Touch Cheek Position – Slide up

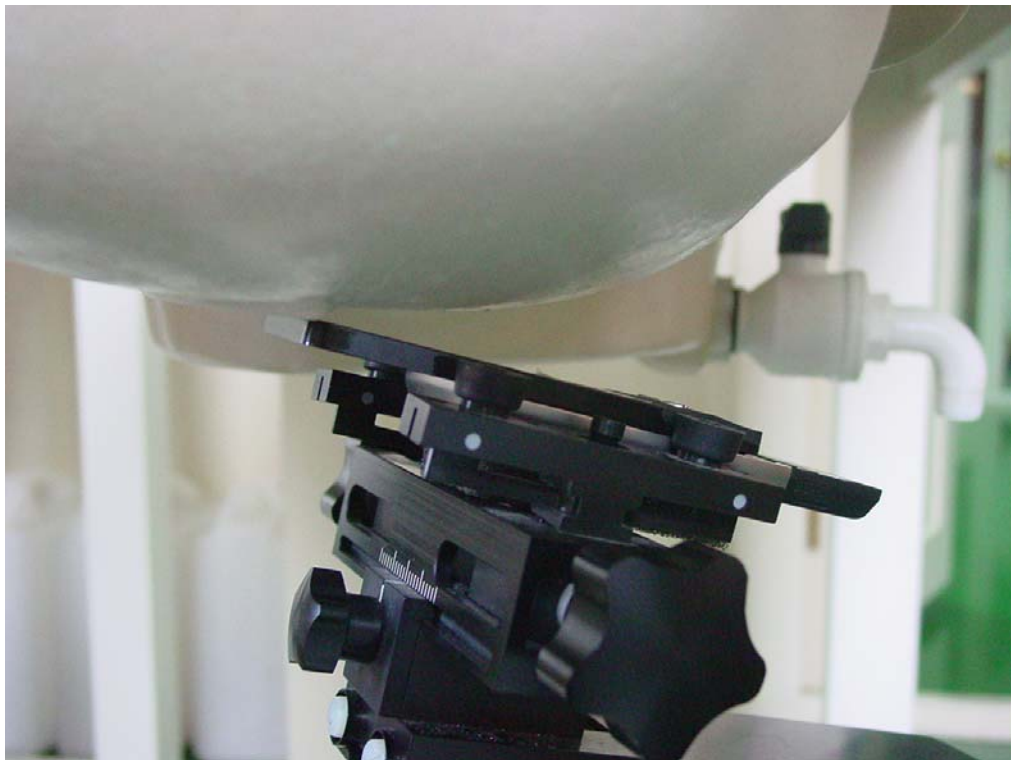


Picture G9: Right Hand Tilt 15° Position – Slide up

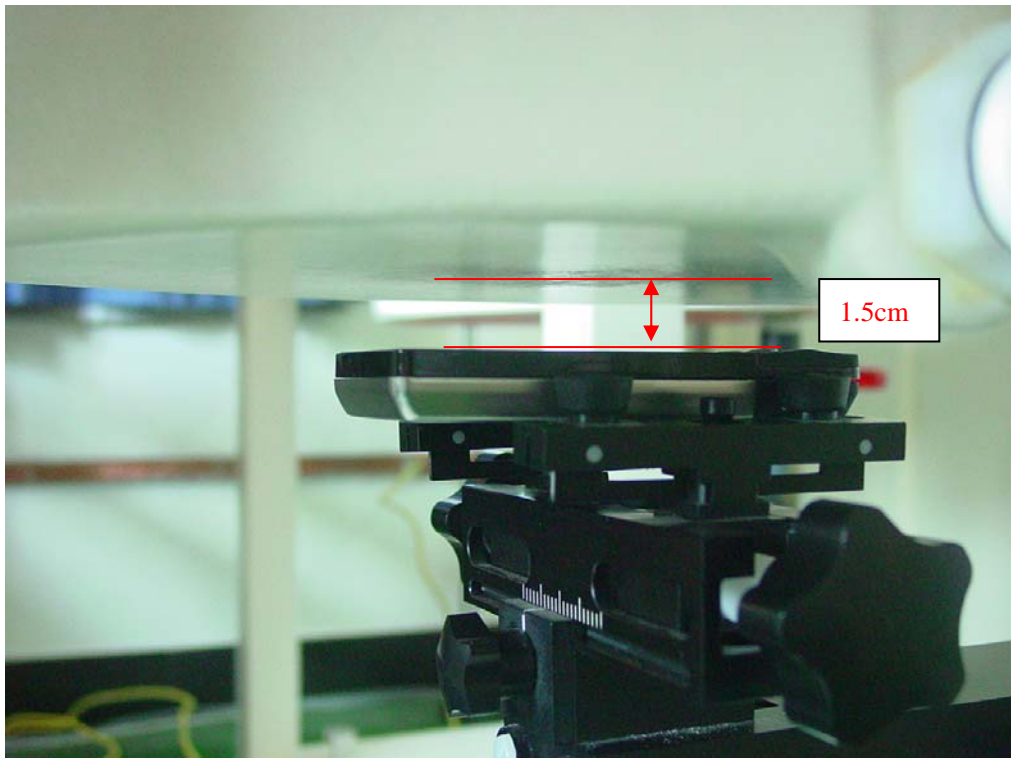


Picture G10: Body-worn Position (towards phantom, the distance from handset to the bottom of the Phantom is 1.5cm) – Slide down

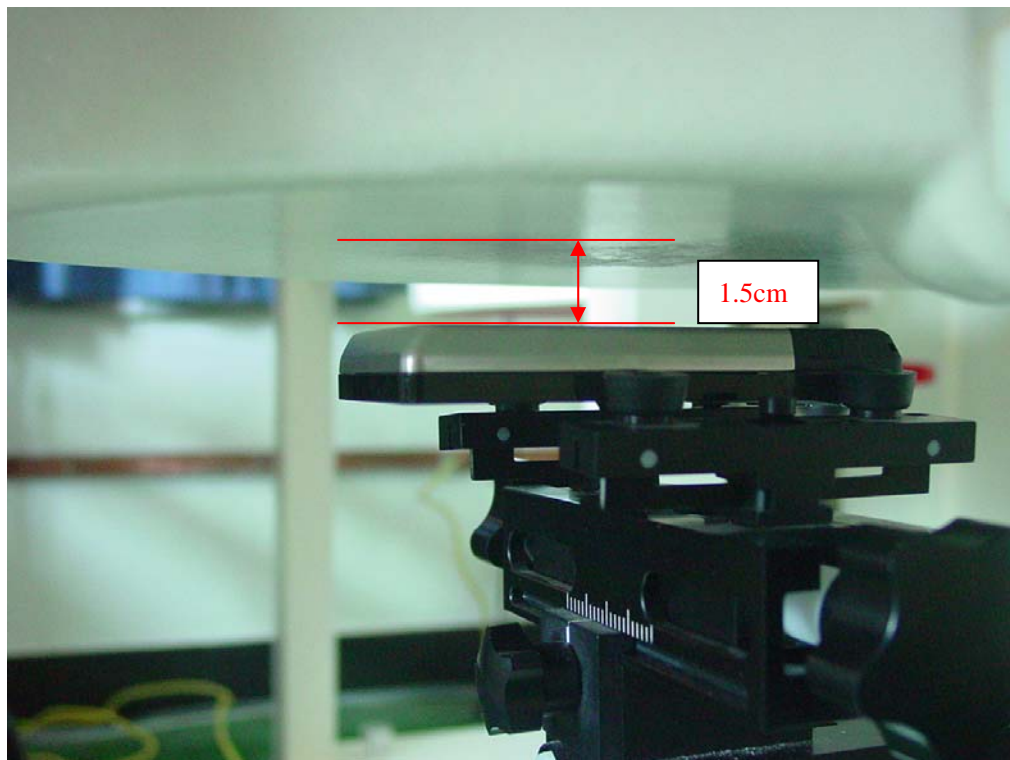


Picture G11: Body-worn Position (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm) – Slide down

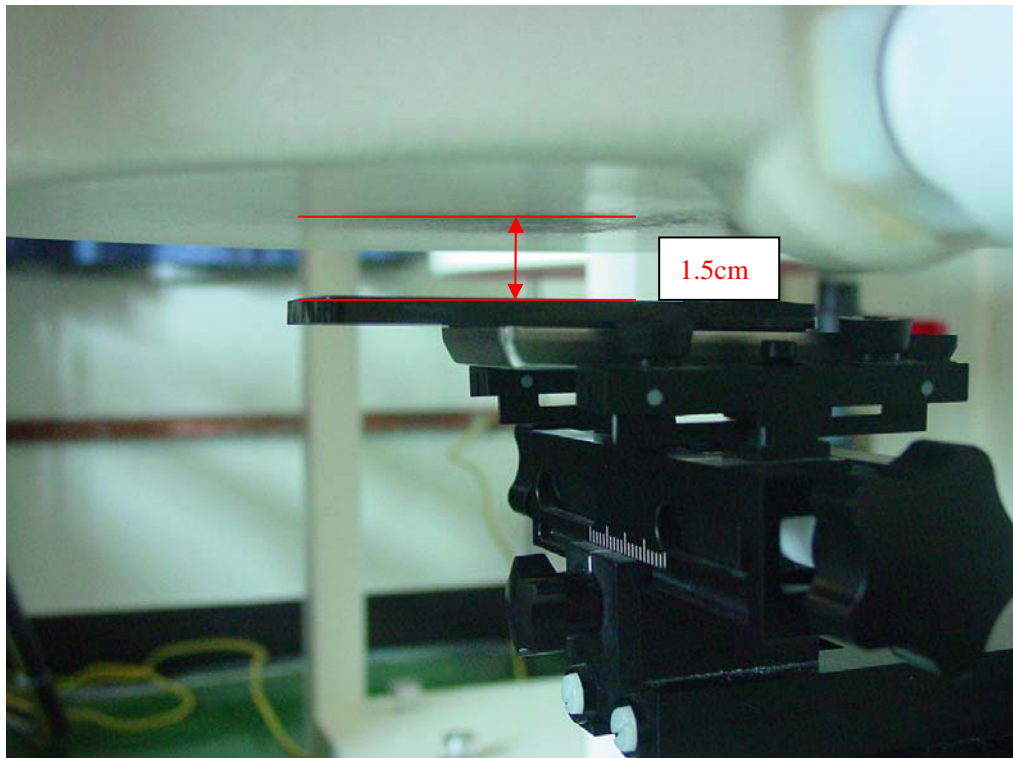


Picture G12: Body-worn Position (towards phantom, the distance from handset to the bottom of the Phantom is 1.5cm) – Slide up

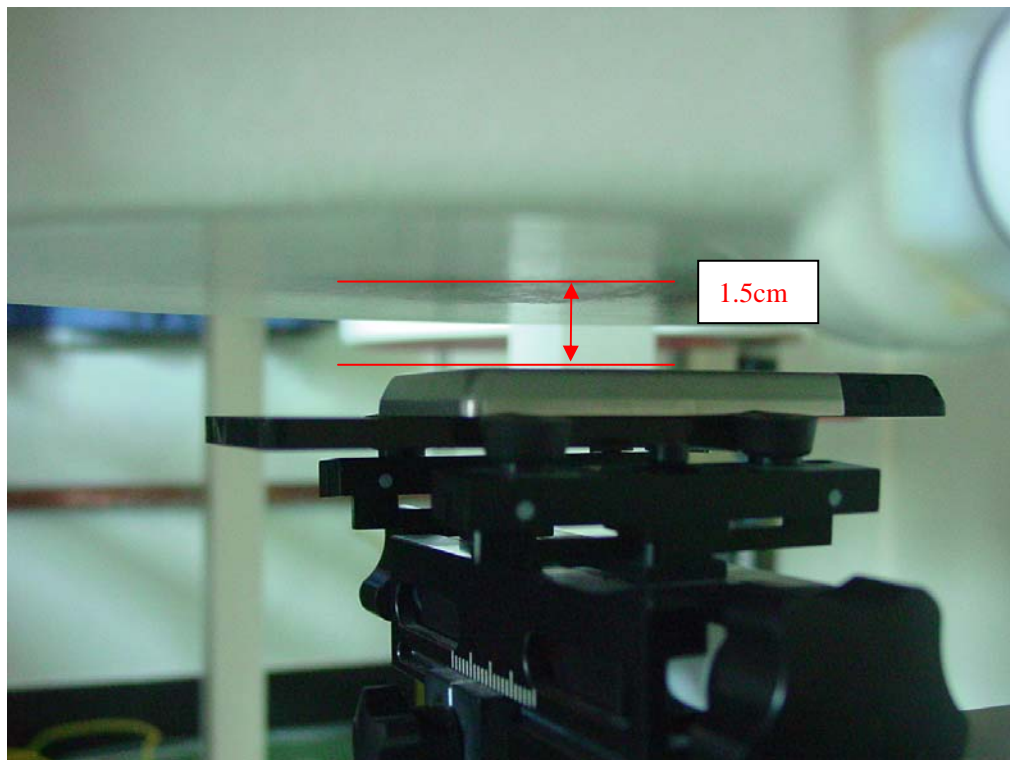

Picture G13: Body-worn Position (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm) – Slide up

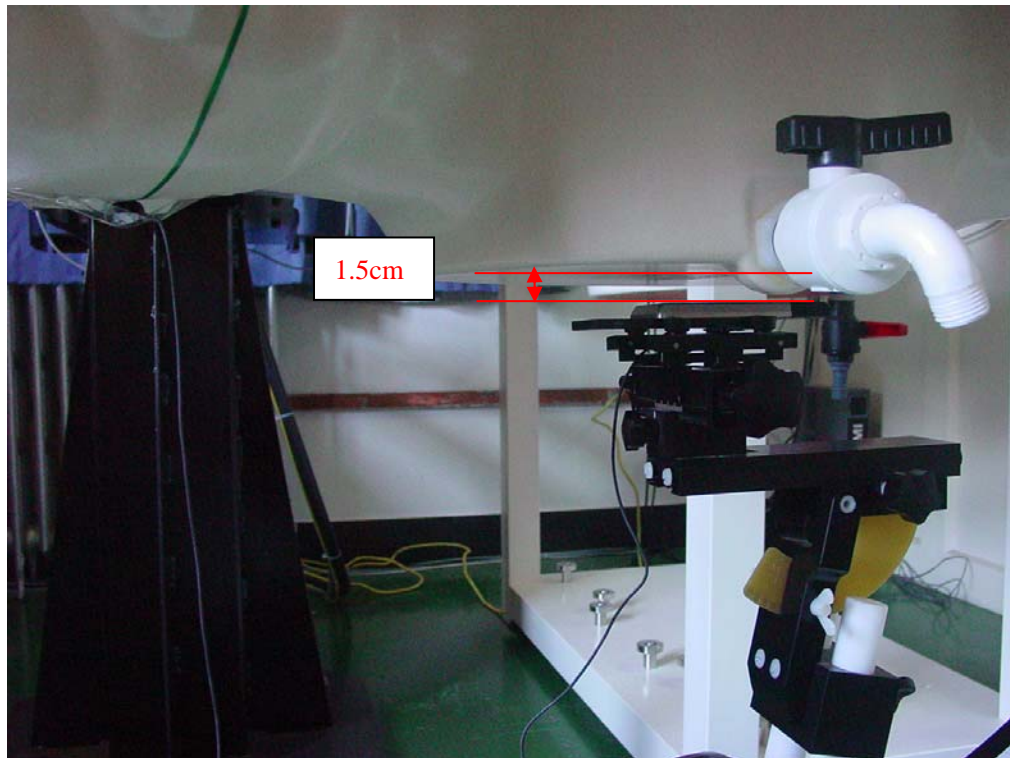

Picture G14: Body-worn Position with headset (EUT towards ground, the distance from handset to the bottom of the Phantom is 1.5cm) – Slide up

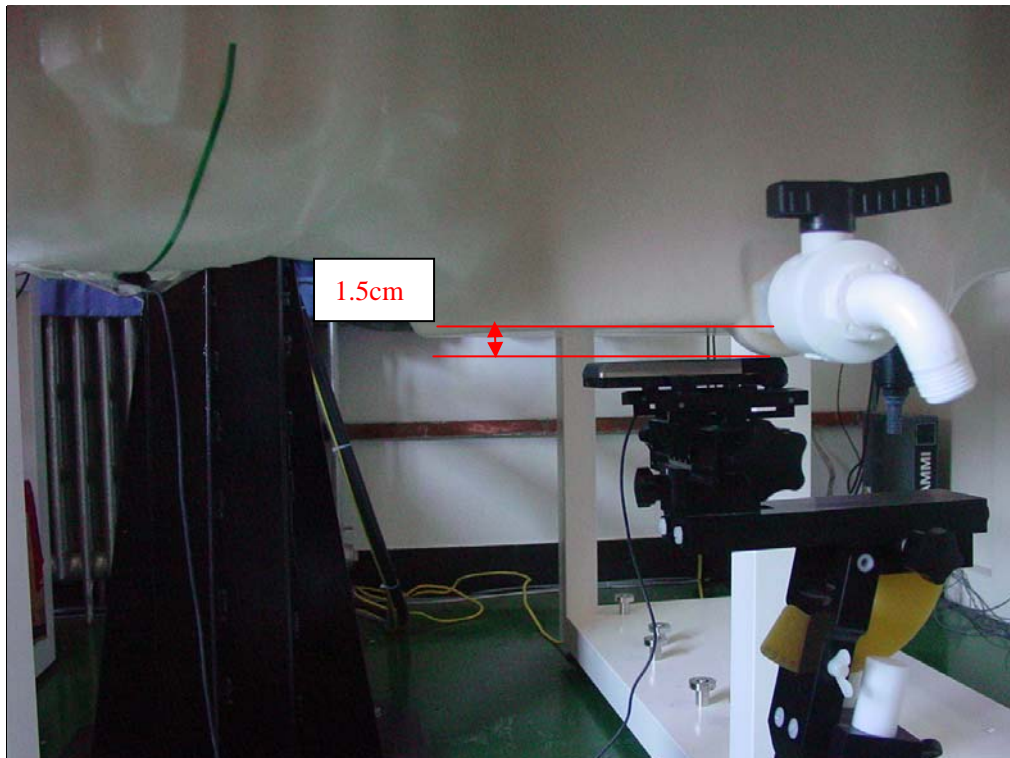

Picture G15: Body-worn Position with headset (EUT towards ground, the distance from handset to the bottom of the Phantom is 1.5cm) – Slide down