



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

October 13, 2015

Amimon  
2 Maskit St. Building D, 2nd Floor  
Herzlia, Israel 46733

Dear Tal Keren-Zvi,

Enclosed is the EMC Wireless test report for compliance testing of the Amimon, Kite Tx as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15, Subpart B for Unintentional Radiators and Part 15.407 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\Amimon\EMC39997B-FCC407 Rev. 4)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

### **Electromagnetic Compatibility Criteria Test Report**

for the

**Amimon  
Kite Tx**

**Tested under  
the Certification Rules  
contained in  
Title 47 of the CFR, Part 15, Subpart B  
for Unintentional Radiators  
and  
Title 47 of the CFR, Part 15.407  
for Intentional Radiators**

**MET Report: EMC39997B-FCC407 Rev. 4**

October 13, 2015

**Prepared For:**

**Amimon  
2 Maskit St. Building D, 2<sup>nd</sup> Floor  
Herzlia, Israel 46733**


**Prepared By:  
MET Laboratories, Inc.**  
914 W. Patapsco Ave  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

**Amimon  
Kite Tx**

the Certification Rules  
contained in  
Title 47 of the CFR, Part 15, Subpart B  
for Unintentional Radiators  
and  
Title 47 of the CFR, Part 15.407  
for Intentional Radiators



Djed Mouada, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa, Director  
Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	January 30, 2014	Initial Issue.
1	March 11, 2014	Revised to reflect engineer corrections.
2	April 15, 2014	Revised to reflect engineer corrections.
3	September 29, 2015	Revised to update to new FCC rules.
4	October 13, 2015	Editorial correction.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample .....	5
	E. Equipment Configuration.....	6
	F. Support Equipment .....	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation .....	8
	J. Modifications .....	8
	a) Modifications to EUT .....	8
	b) Modifications to Test Standard.....	8
	K. Disposition of EUT .....	8
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>9</b>
	§ 15.107(a) Conducted Emissions Limits.....	10
	§ 15.109(a) Radiated Emissions Limits .....	14
<b>IV.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>17</b>
	§ 15.203 Antenna Requirement .....	18
	§ 15.207 Conducted Emissions Limits .....	19
	§ 15.403(c) 26dB Bandwidth.....	23
	§ 15.407(a)(2) RF Power Output .....	46
	§ 15.407(a)(2) Peak Power Spectral Density .....	58
	§ 15.407(b) Undesirable Emissions .....	70
	§ 15.407(f) RF Exposure .....	100
	§ 15.407(g) Frequency Stability .....	101
<b>V.</b>	<b>DFS Requirements and Radar Waveform Description &amp; Calibration .....</b>	<b>108</b>
	A. DFS Requirements .....	109
	B. Radar Test Waveforms .....	111
	C. Radar Waveform Calibration .....	114
<b>VI.</b>	<b>DFS Test Procedure and Test Results .....</b>	<b>116</b>
	A. DFS Test Setup .....	117
	B. EUT Information.....	119
	C. In-Service Monitoring for Channel Move Time, Channel Closing Time, and Non-Occupancy.....	120
<b>VII.</b>	<b>Test Equipment .....</b>	<b>124</b>
<b>VIII.</b>	<b>Certification &amp; User's Manual Information .....</b>	<b>126</b>
	A. Certification Information .....	127
	B. Label and User's Manual Information .....	131

## List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing .....	2
Table 2. EUT Summary.....	4
Table 3. References .....	5
Table 4. Equipment Configuration, Parts Description.....	6
Table 5. Support Equipment.....	7
Table 6. Ports and Cabling Information .....	7
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a) .....	10
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz).....	11
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz) .....	12
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	14
Table 11. Radiated Emissions Limits, Test Results .....	15
Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	19
Table 13. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz).....	20
Table 14. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz) .....	21
Table 15. RF Power Output, Test Results .....	46
Table 16. Power Spectral Density, Test Results.....	58
Table 18. Frequency Stability, Test Results .....	101
Table 19. Applicability of DFS Requirements Prior to Use of a Channel .....	109
Table 20. Applicability of DFS Requirements During Normal Operation .....	109
Table 21. DFS Detection Thresholds for Master or Client Devices Incorporating DFS .....	109
Table 22. DFS Response Requirement Values.....	110
Table 23. Test Equipment List .....	125

## List of Figures

Figure 1. Block Diagram of Equipment .....	8
Figure 2. Occupied Bandwidth, Test Setup .....	23
Figure 3. Power Output Test Setup .....	46
Figure 4. Power Spectral Density Test Setup .....	58
Figure 6. Long Pulse Radar Test Signal Waveform .....	113
Figure 7. Calibration Test setup .....	114
Figure 8. Test Setup Diagram.....	117

## List of Photographs

Photograph 1. Amimon Kite Tx .....	6
Photograph 2. Conducted Emissions, Test Setup .....	13
Photograph 3. Radiated Emission, Test Setup.....	16
Photograph 4. Conducted Emissions, Test Setup .....	22
Photograph 5. Radiated Spurious Emissions, Test Setup, Above 1 GHz .....	94
Photograph 6. DFS Radar Test Signal Generator .....	114
Photograph 7. Client, Test Setup.....	118

## List of Plots

Plot 1. Conducted Emission, Phase Line Plot .....	11
Plot 2. Conducted Emission, Neutral Line Plot .....	12
Plot 3. Radiated Emissions, Pre-Scan .....	15
Plot 4. Conducted Emissions, 15.207, Pre-Scan, Phase Line .....	20
Plot 5. Conducted Emissions, 15.207, Pre-Scan, Neutral Line .....	21
Plot 6. 26 dB Occupied Bandwidth, 5260 MHz, 20 MHz, Channel 0 .....	24
Plot 7. 26 dB Occupied Bandwidth, 5260 MHz, 20 MHz, Channel 1 .....	24
Plot 8. 26 dB Occupied Bandwidth, 5280 MHz, 20 MHz, Channel 0 .....	25
Plot 9. 26 dB Occupied Bandwidth, 5280 MHz, 20 MHz, Channel 1 .....	25
Plot 10. 26 dB Occupied Bandwidth, 5320 MHz, 20 MHz, Channel 0 .....	26
Plot 11. 26 dB Occupied Bandwidth, 5320 MHz, 20 MHz, Channel 1 .....	26
Plot 12. 26 dB Occupied Bandwidth, 5500 MHz, 20 MHz, Channel 0 .....	27
Plot 13. 26 dB Occupied Bandwidth, 5500 MHz, 20 MHz, Channel 1 .....	27
Plot 14. 26 dB Occupied Bandwidth, 5580 MHz, 20 MHz, Channel 0 .....	28
Plot 15. 26 dB Occupied Bandwidth, 5580 MHz, 20 MHz, Channel 1 .....	28
Plot 16. 26 dB Occupied Bandwidth, 5700 MHz, 20 MHz, Channel 0 .....	29
Plot 17. 26 dB Occupied Bandwidth, 5700 MHz, 20 MHz, Channel 1 .....	29
Plot 18. 26 dB Occupied Bandwidth, 5270 MHz, 40 MHz, Channel 0 .....	30
Plot 19. 26 dB Occupied Bandwidth, 5270 MHz, 40 MHz, Channel 1 .....	30
Plot 20. 26 dB Occupied Bandwidth, 5310 MHz, 40 MHz, Channel 0 .....	31
Plot 21. 26 dB Occupied Bandwidth, 5310 MHz, 40 MHz, Channel 1 .....	31
Plot 22. 26 dB Occupied Bandwidth, 5510 MHz, 40 MHz, Channel 0 .....	32
Plot 23. 26 dB Occupied Bandwidth, 5510 MHz, 40 MHz, Channel 1 .....	32
Plot 24. 26 dB Occupied Bandwidth, 5550 MHz, 40 MHz, Channel 0 .....	33
Plot 25. 26 dB Occupied Bandwidth, 5550 MHz, 40 MHz, Channel 1 .....	33
Plot 26. 26 dB Occupied Bandwidth, 5670 MHz, 40 MHz, Channel 0 .....	34
Plot 27. 26 dB Occupied Bandwidth, 5670 MHz, 40 MHz, Channel 1 .....	34
Plot 28. 99% Bandwidth, 5260 MHz, 20 MHz, Channel 0 .....	35
Plot 29. 99% Bandwidth, 5260 MHz, 20 MHz, Channel 1 .....	35
Plot 30. 99% Bandwidth, 5280 MHz, 20 MHz, Channel 0 .....	36
Plot 31. 99% Bandwidth, 5280 MHz, 20 MHz, Channel 1 .....	36
Plot 32. 99% Bandwidth, 5320 MHz, 20 MHz, Channel 0 .....	37
Plot 33. 99% Bandwidth, 5320 MHz, 20 MHz, Channel 1 .....	37
Plot 34. 99% Bandwidth, 5500 MHz, 20 MHz, Channel 0 .....	38
Plot 35. 99% Bandwidth, 5500 MHz, 20 MHz, Channel 1 .....	38
Plot 36. 99% Bandwidth, 5580 MHz, 20 MHz, Channel 0 .....	39
Plot 37. 99% Bandwidth, 5580 MHz, 20 MHz, Channel 1 .....	39
Plot 38. 99% Bandwidth, 5700 MHz, 20 MHz, Channel 0 .....	40
Plot 39. 99% Bandwidth, 5700 MHz, 20 MHz, Channel 1 .....	40
Plot 40. 99% Bandwidth, 5270 MHz, 40 MHz, Channel 0 .....	41
Plot 41. 99% Bandwidth, 5270 MHz, 40 MHz, Channel 1 .....	41
Plot 42. 99% Bandwidth, 5310 MHz, 40 MHz, Channel 0 .....	42
Plot 43. 99% Bandwidth, 5310 MHz, 40 MHz, Channel 1 .....	42
Plot 44. 99% Bandwidth, 5510 MHz, 40 MHz, Channel 0 .....	43
Plot 45. 99% Bandwidth, 5510 MHz, 40 MHz, Channel 1 .....	43
Plot 46. 99% Bandwidth, 5550 MHz, 40 MHz, Channel 0 .....	44
Plot 47. 99% Bandwidth, 5550 MHz, 40 MHz, Channel 1 .....	44
Plot 48. 99% Bandwidth, 5670 MHz, 40 MHz, Channel 0 .....	45
Plot 49. 99% Bandwidth, 5670 MHz, 40 MHz, Channel 1 .....	45
Plot 50. RF Power Output, 5260 MHz, 20 MHz, Channel 0 .....	47
Plot 51. RF Power Output, 5260 MHz, 20 MHz, Channel 1 .....	47
Plot 52. RF Power Output, 5300 MHz, 20 MHz, Channel 0 .....	48
Plot 53. RF Power Output, 5300 MHz, 20 MHz, Channel 1 .....	48
Plot 54. RF Power Output, 5320 MHz, 20 MHz, Channel 0 .....	49
Plot 55. RF Power Output, 5320 MHz, 20 MHz, Channel 1 .....	49

Plot 56. RF Power Output, 5500 MHz, 20 MHz, Channel 0 .....	.50
Plot 57. RF Power Output, 5500 MHz, 20 MHz, Channel 1 .....	.50
Plot 58. RF Power Output, 5580 MHz, 20 MHz, Channel 0 .....	.51
Plot 59. RF Power Output, 5580 MHz, 20 MHz, Channel 1 .....	.51
Plot 60. RF Power Output, 5700 MHz, 20 MHz, Channel 0 .....	.52
Plot 61. RF Power Output, 5700 MHz, 20 MHz, Channel 1 .....	.52
Plot 62. RF Power Output, 5270 MHz, 40 MHz, Channel 0 .....	.53
Plot 63. RF Power Output, 5270 MHz, 40 MHz, Channel 1 .....	.53
Plot 64. RF Power Output, 5310 MHz, 40 MHz, Channel 0 .....	.54
Plot 65. RF Power Output, 40 MHz, Channel 1 .....	.54
Plot 66. RF Power Output, 5510 MHz, 40 MHz, Channel 0 .....	.55
Plot 67. RF Power Output, 5510 MHz, 40 MHz, Channel 1 .....	.55
Plot 68. RF Power Output, 5550 MHz, 40 MHz, Channel 0 .....	.56
Plot 69. RF Power Output, 5550 MHz, 40 MHz, Channel 1 .....	.56
Plot 70. RF Power Output, 5670 MHz, 40 MHz, Channel 0 .....	.57
Plot 71. RF Power Output, 5670 MHz, 40 MHz, Channel 1 .....	.57
Plot 72. Power Spectral Density, 5260 MHz, 20 MHz, Channel 0 .....	.59
Plot 73. Power Spectral Density, 5260 MHz, 20 MHz, Channel 1 .....	.59
Plot 74. Power Spectral Density, 5300 MHz, 20 MHz, Channel 0 .....	.60
Plot 75. Power Spectral Density, 5300 MHz, 20 MHz, Channel 1 .....	.60
Plot 76. Power Spectral Density, 5320 MHz, 20 MHz, Channel 0 .....	.61
Plot 77. Power Spectral Density, 5320 MHz, 20 MHz, Channel 1 .....	.61
Plot 78. Power Spectral Density, 5500 MHz, 20 MHz, Channel 0 .....	.62
Plot 79. Power Spectral Density, 5500 MHz, 20 MHz, Channel 1 .....	.62
Plot 80. Power Spectral Density, 5580 MHz, 20 MHz, Channel 0 .....	.63
Plot 81. Power Spectral Density, 5580 MHz, 20 MHz, Channel 0 .....	.63
Plot 82. Power Spectral Density, 5700 MHz, 20 MHz, Channel 0 .....	.64
Plot 83. Power Spectral Density, 5700 MHz, 20 MHz, Channel 1 .....	.64
Plot 84. Power Spectral Density, 5270 MHz, 40 MHz, Channel 0 .....	.65
Plot 85. Power Spectral Density, 5270 MHz, 40 MHz, Channel 1 .....	.65
Plot 86. Power Spectral Density, 5310 MHz, 40 MHz, Channel 0 .....	.66
Plot 87. Power Spectral Density, 5310 MHz, 40 MHz, Channel 1 .....	.66
Plot 88. Power Spectral Density, 5510 MHz, 40 MHz, Channel 0 .....	.67
Plot 89. Power Spectral Density, 5510 MHz, 40 MHz, Channel 1 .....	.67
Plot 90. Power Spectral Density, 5550 MHz, 40 MHz, Channel 0 .....	.68
Plot 91. Power Spectral Density, 5550 MHz, 40 MHz, Channel 1 .....	.68
Plot 92. Power Spectral Density, 5670 MHz, 40 MHz, Channel 0 .....	.69
Plot 93. Power Spectral Density, 5670 MHz, 40 MHz, Channel 1 .....	.69
Plot 96. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 30 MHz – 1 GHz .....	.71
Plot 97. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 30 MHz – 1 GHz .....	.71
Plot 98. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 1 GHz – 7 GHz, Peak .....	.72
Plot 99. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 1 GHz – 7 GHz, Average .....	.72
Plot 100. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 7 GHz – 18 GHz, Peak .....	.73
Plot 101. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 7 GHz – 18 GHz, Average .....	.73
Plot 102. Radiated Spurious Emissions, 5320 MHz, 20 MHz, Tx Power 30, 30 MHz – 1 GHz .....	.74
Plot 103. Radiated Spurious Emissions, 5320 MHz, 20 MHz, 1 GHz – 7 GHz, Peak .....	.74
Plot 104. Radiated Spurious Emissions, 5320 MHz, 20 MHz, 1 GHz – 7 GHz, Average .....	.75
Plot 105. Radiated Spurious Emissions, 5320 MHz, 20 MHz, 7 GHz – 18 GHz, Peak .....	.75
Plot 106. Radiated Spurious Emissions, 5320 MHz, 20 MHz, 7 GHz – 18 GHz, Average .....	.76
Plot 107. Radiated Spurious Emissions, 5500 MHz, 20 MHz, Tx Power 30, 30 MHz – 1 GHz .....	.76
Plot 108. Radiated Spurious Emissions, 5500 MHz, 20 MHz, 1 GHz – 7 GHz, Peak .....	.77
Plot 109. Radiated Spurious Emissions, 5500 MHz, 20 MHz, 1 GHz – 7 GHz, Average .....	.77
Plot 110. Radiated Spurious Emissions, 5500 MHz, 20 MHz, 7 GHz – 18 GHz, Peak .....	.78
Plot 111. Radiated Spurious Emissions, 5500 MHz, 20 MHz, 7 GHz – 18 GHz, Average .....	.78
Plot 112. Radiated Spurious Emissions, 5560 MHz, 20 MHz, Tx Power 30, 30 MHz – 1 GHz .....	.79
Plot 113. Radiated Spurious Emissions, 5560 MHz, 20 MHz, 1 GHz – 7 GHz, Peak .....	.79
Plot 114. Radiated Spurious Emissions, 5560 MHz, 20 MHz, 1 GHz – 7 GHz, Average .....	.80

Plot 115. Radiated Spurious Emissions, 5560 MHz, 20 MHz, 7 GHz – 18 GHz, Peak .....	80
Plot 116. Radiated Spurious Emissions, 5560 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average .....	81
Plot 117. Radiated Spurious Emissions, 5700 MHz, 20 MHz, Tx Power 30, 30 MHz – 1 GHz.....	81
Plot 118. Radiated Spurious Emissions, 5700 MHz, 20 MHz, 1 GHz – 7 GHz, Peak .....	82
Plot 119. Radiated Spurious Emissions, 5700 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Average .....	82
Plot 120. Radiated Spurious Emissions, 5700 MHz, 20 MHz, 7 GHz – 18 GHz, Peak .....	83
Plot 121. Radiated Spurious Emissions, 5700 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average .....	83
Plot 122. Radiated Spurious Emissions, 5270 MHz, 40 MHz, Tx Power 30, 30 MHz – 1 GHz.....	84
Plot 123. Radiated Spurious Emissions, 5270 MHz, 40 MHz, 1 GHz – 7 GHz, Peak .....	84
Plot 124. Radiated Spurious Emissions, 5270 MHz, 40 MHz, 1 GHz – 7 GHz, Average .....	85
Plot 125. Radiated Spurious Emissions, 5270 MHz, 40 MHz, 7 GHz – 18 GHz, Peak .....	85
Plot 126. Radiated Spurious Emissions, 5270 MHz, 40 MHz, 7 GHz – 18 GHz, Average .....	86
Plot 127. Radiated Spurious Emissions, 5310 MHz, 40 MHz, Tx Power 30, 30 MHz – 1 GHz.....	86
Plot 128. Radiated Spurious Emissions, 5310 MHz, 40 MHz, 1 GHz – 7 GHz, Peak .....	87
Plot 129. Radiated Spurious Emissions, 5310 MHz, 40 MHz, 1 GHz – 7 GHz, Average .....	87
Plot 130. Radiated Spurious Emissions, 5310 MHz, 40 MHz, 7 GHz – 18 GHz, Peak .....	88
Plot 131. Radiated Spurious Emissions, 5310 MHz, 40 MHz, 7 GHz – 18 GHz, Average .....	88
Plot 132. Radiated Spurious Emissions, 5510 MHz, 40 MHz, Tx Power 30, 30 MHz – 1 GHz.....	89
Plot 133. Radiated Spurious Emissions, 5510 MHz, 40 MHz, 1 GHz – 7 GHz, Peak .....	89
Plot 134. Radiated Spurious Emissions, 5510 MHz, 40 MHz, 1 GHz – 7 GHz, Average .....	90
Plot 135. Radiated Spurious Emissions, 5510 MHz, 40 MHz, 7 GHz – 18 GHz, Peak .....	90
Plot 136. Radiated Spurious Emissions, 5510 MHz, 40 MHz, 7 GHz – 18 GHz, Average .....	91
Plot 137. Radiated Spurious Emissions, 5550 MHz, 40 MHz, Tx Power 30, 30 MHz – 1 GHz.....	91
Plot 138. Radiated Spurious Emissions, 5550 MHz, 40 MHz, 1 GHz – 7 GHz, Peak .....	92
Plot 139. Radiated Spurious Emissions, 5550 MHz, 40 MHz, 1 GHz – 7 GHz, Average .....	92
Plot 140. Radiated Spurious Emissions, 5550 MHz, 40 MHz, 7 GHz – 18 GHz, Peak .....	93
Plot 141. Radiated Spurious Emissions, 5550 MHz, 40 MHz, 7 GHz – 18 GHz, Average .....	93
Plot 142. Restricted Band Emissions, 5310 MHz, 40 MHz .....	95
Plot 143. Restricted Band Emissions, 5320 MHz, 20 MHz .....	95
Plot 144. Restricted Band Emissions, 5500 MHz, 20 MHz .....	96
Plot 145. Restricted Band Emissions, 5510 MHz, 40 MHz .....	96
Plot 146. 5580 MHz, 20 MHz channel .....	97
Plot 147. 5550 MHz, 40 MHz channel .....	97
Plot 148. 5660 MHz, 20 MHz channel .....	98
Plot 149. 5670 MHz, 40 MHz channel .....	98
Plot 150. Band edge Leakage to UNII-1 band 5260MHz (20MHz BW) .....	99
Plot 151. Band edge Leakage to UNII-1 band 5270MHz (40MHz BW) .....	99
Plot 152. Calibration, 5310 MHz .....	115
Plot 153. Calibration, 5320 MHz .....	115
Plot 154. Channel Close, 5310 MHz .....	121
Plot 155. Closing Time, 5310 MHz .....	121
Plot 156. Channel Close, 5320 MHz .....	122
Plot 157. Closing Time, 5320 MHz .....	122
Plot 158. Non-Occupancy Period, 5310 MHz .....	123
Plot 159. Non-Occupancy Period, 5320 MHz .....	123

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<math>\mu</math>A</b>	Decibels above one <b>microamp</b>
<b>dB<math>\mu</math>V</b>	Decibels above one <b>microvolt</b>
<b>dB<math>\mu</math>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b><math>\mu</math>H</b>	microhenry
<b><math>\mu</math></b>	microfarad
<b><math>\mu</math>s</b>	microseconds
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts per meter
<b>VCP</b>	Vertical Coupling Plane

## I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Amimon Kite Tx, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Kite Tx. Amimon should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Kite Tx, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with Amimon, purchase order number 130238. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	Description	Results
15.107	Conducted Emissions	Compliant
15.109	Radiated Emissions	Compliant
15.203	Antenna Requirements	Compliant
15.207	AC Conducted Emissions 150KHz – 30MHz	Compliant
15.403 (i)	26dB Occupied Bandwidth	Compliant
15.407 (a)(2)	Conducted Transmitter Output Power	Compliant
15.407 (a)(2)	Power Spectral Density	Compliant
15.407 (b)(2), (3), (5), (6)	Undesirable Emissions (15.205/15.209 - General Field Strength Limits (Restricted Bands and Radiated Emission Limits))	Compliant
15.407(f)	RF Exposure	Compliant
15.407(g)	Frequency Stability	Compliant
15.407(h)(1)	Transmit Power Control (TPC)	N/A – EIRP is less than 500 mW
15.407 (i)(B)	Channel Move Time and Channel Closing Time	Compliant
15.407 (i)(B)	Non-Occupancy Period	Compliant

**Table 1. Executive Summary of EMC Part 15.407 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by Amimon to perform testing on the Kite Tx, under Amimon's purchase order number 130238.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Amimon Kite Tx.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	Kite Tx	
<b>Model(s) Covered:</b>	Kite Tx	
<b>EUT Specifications:</b>	Primary Power: 120 VAC, 60 Hz	
	FCC ID: VSQAMNKHIN1	
	Type of Modulations:	OFDM
	Emission Designators:	D7F
	Equipment Code:	NII
	Peak RF Output Power:	22.45 dBm 22.38 dBm
	EUT Frequency Ranges:	5260 – 5320 MHz 5500-5570 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Djed Mouada	
<b>Report Date(s):</b>	October 13, 2015	

**Table 2. EUT Summary**

## B. References

<b>CFR 47, Part 15, Subpart B</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>CFR 47, Part 15, Subpart E</b>	Unlicensed National Information Infrastructure Devices (UNII)
<b>RSS-210, Issue 8, Dec. 2010</b>	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
<b>RSS-GEN, Issue 3, Dec. 2010</b>	General Requirements and Information for the Certification of Radio Apparatus
<b>ICES-003, Issue 5 August 2012</b>	Information Technology Equipment (ITE) — Limits and methods of measurement
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2009</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**

## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Description of Test Sample

The AMN35223\_PB AMIMON Source is designed to modulate and transmit downstream video and audio content over the wireless medium and receive a control channel over the wireless upstream. The modulation uses a 40 or 20 MHz bandwidth and is carried over the 5GHz unlicensed band. The EUT uses space time block codes for which different digital data is carried by each transmit channel during any symbol period and therefore signals are completely uncorrelated.



Photograph 1. Amimon Kite Tx

## E. Equipment Configuration

All cards, racks, etc., incorporated as part of the EUT is included in the following list.

01- Ext antenna RP-SMA connector CH#1	14- LED #3 - Low battery LED
02- Ext antenna RP-SMA connector CH#0	15-HDMI female connector
03- Internal antenna CH#0	16-Reset Button
04- External antenna UFL connector CH#0	17-Registration & Boot button
05- 5v Input Voltage connector(DC JACK)	18- 7-17v Input Voltage connector(Lemo connector)
06- APP debug Port	19- PTT connector
07- Jack 2.5mm connector	20- USB connector
08- External host connector	21- Slide switch #2 – Operation mode selector
09- Internal antenna CH#1	22- Slide switch #1 – Operation mode selector
10- External antenna UFL connector CH#1	23- DIP Switch 1- Audio path selection, 2- ADC master/slave
11- LED #1 - NETWORK status	24- DIP Switch- 1 – BOOT1, 2- DIP0
12- Jack 3.5mm connector	25- MAC DEBUG Port
13- LED #2 - VIDEO status	

Table 4. Equipment Configuration, Parts Description

## F. Support Equipment

Amimon supplied support equipment necessary for the operation and testing of the Kite Tx. All support equipment supplied is listed in the following Support Equipment List.


Ref. ID	Name / Description	Manufacturer	Model Number
1	PC Laptop	N/A	N/A
2	Debug Board (MAC)	Amimon	AMN043PCB
3	Debug Board (APP)	Amimon	AMN043PCB
4	USB-to-Serial Converter (MAC)	ATEN	UC-232A
5	USB-to-Serial Converter (APP)	ATEN	UC-232A
6	12V Power Supply	Switching Power Supply	S075AQ12000600
7	Lemo plug adaptor	Amimon	-
8	HDMI Cable	standard	standard
9	HDMI Pattern Generator	CYPRESS	CPHD-1

**Table 5. Support Equipment**

## G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
J16	J16 power supply	Lemo plug adaptor	1	--	N	--
J29	J29 - HDMI in	HDMI cable	1	--	Y	--
J24	J24 - APP	Standard USB cable with USB to serial converter	1	--	Y	--
J13	J13 - MAC	Standard USB cable with USB to serial converter	1	--	Y	--

**Table 6. Ports and Cabling Information**

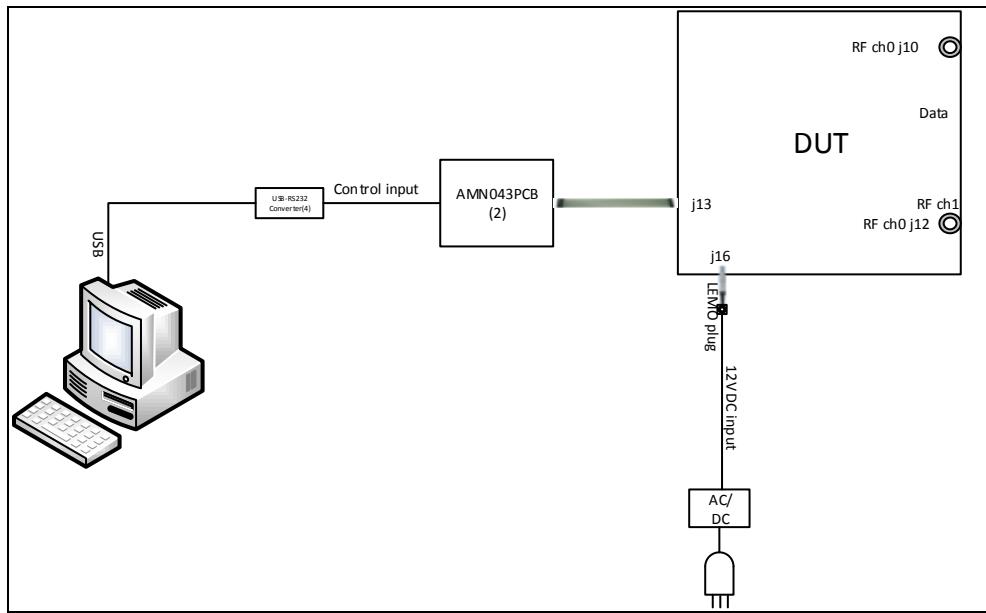

**Figure 1. Block Diagram of Equipment**

## H. Mode of Operation

The AMN35223\_PB is programmed to transmit a 100% duty cycle of streaming auto generated video test pattern. The frequency and power of operation may be programmed by the LAB using a PC tool and a serial communication connector.

## I. Method of Monitoring EUT Operation

Slow blinking (on-off once during 1sec) blue LED indicates that board is functioning.

Fast blinking (on-off 3-4 times during 1sec) same LED, means that the board is out of calibration.

When this LED is not blinking this means that board has a certain problem.

Using the SW tool to configure the board, when configuration ended successfully a clear green indication appears, while a red bad indication appears when the desired configuration fails.

## J. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Amimon upon completion of testing.

---

### III. Electromagnetic Compatibility Criteria for Unintentional Radiators

## Electromagnetic Compatibility Criteria

### § 15.107 Conducted Emissions Limits

**Test Requirement(s):** **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

**15.107 (b)** For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

Frequency range (MHz)	Class A Conducted Limits (dB $\mu$ V)		*Class B Conducted Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.

\* -- Limits per Subsection 15.207(a).

**Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)**

**Test Results:** The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/10/13

### Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) Avg.	Limit (dBuV) Avg.	Margin (dB) Avg.
0.1539	24.47	0	24.47	65.79	-41.32	9.64	0	9.64	55.79	-46.15
0.4765	13.61	0	13.61	56.4	-42.79	5.32	0	5.32	46.4	-41.08
0.838	17.19	0	17.19	56	-38.81	7.482	0	7.482	46	-38.518
9.659	25.73	0	25.73	60	-34.27	17.8	0	17.8	50	-32.2
12.03	28.98	0	28.98	60	-31.02	20.95	0	20.95	50	-29.05
24.7	13.94	0	13.94	60	-46.06	4.09	0	4.09	50	-45.91

Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

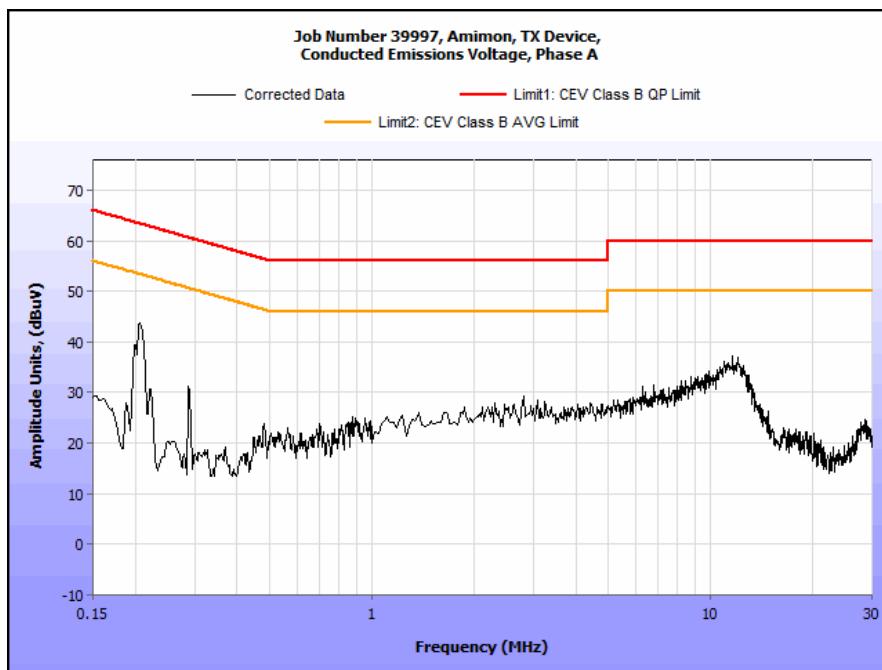


Plot 1. Conducted Emission, Phase Line Plot

### Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) Avg.	Limit (dBuV) Avg.	Margin (dB) Avg.
0.294	9.615	0	9.615	60.41	-50.795	3.708	0	3.708	50.41	-46.702
0.3346	9.26	0	9.26	59.34	-50.08	3.21	0	3.21	49.34	-46.13
0.658	12.15	0	12.15	56	-43.85	4.5	0	4.5	46	-41.5
6.021	21.74	0	21.74	60	-38.26	12.82	0	12.82	50	-37.18
12.5	32.52	0	32.52	60	-27.48	25.52	0	25.52	50	-24.48
20.82	23.01	0	23.01	60	-36.99	16.4	0	16.4	50	-33.6

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

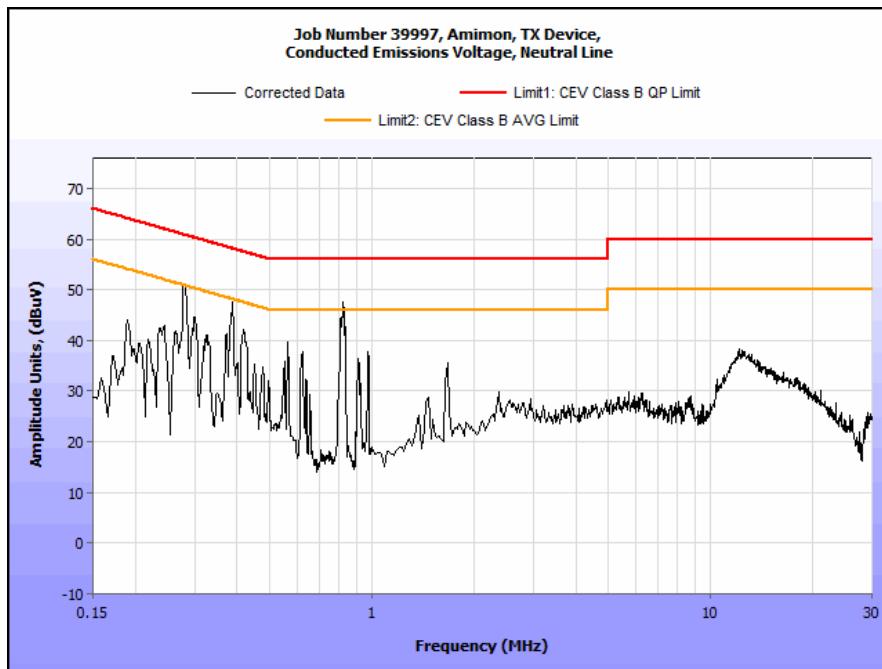

Plot 2. Conducted Emission, Neutral Line Plot

## Conducted Emission Limits Test Setup



**Photograph 2. Conducted Emissions, Test Setup**

## Radiated Emission Limits

### § 15.109

### Radiated Emissions Limits

**Test Requirement(s):**

**15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:**

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:**

The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):**

Dusmantha Tennakoon


**Test Date(s):**

12/11/13

## Radiated Emissions Limits Test Results, Class B


Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dB $\mu$ V)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
41.663327	348	H	1.12	9.47	13.00	0.43	0.00	22.90	40.00	-17.10
41.663327	350	V	1.10	10.16	13.00	0.43	0.00	23.59	40.00	-16.41
116.36874	31	H	1.31	14.95	13.40	0.85	0.00	29.20	43.50	-14.30
116.36874	50	V	1.17	16.48	13.40	0.85	0.00	30.73	43.50	-12.77
229.3365	361	H	1.44	14.54	11.76	1.06	0.00	27.36	46.00	-18.64
229.3365	196	V	1.28	6.98	11.76	1.06	0.00	19.80	46.00	-26.20
247.79559	-3	H	1.15	6.98	12.14	1.23	0.00	13.37	46.00	-32.63
247.79559	27	V	1.28	8.78	12.14	1.23	0.00	22.15	46.00	-23.85
625.00013	20	H	1.19	5.26	19.90	2.09	0.00	27.25	46.00	-18.75
625.00013	55	V	1.19	5.18	19.90	2.09	0.00	27.17	46.00	-18.83
952.8	26	H	1.19	5.65	23.30	2.84	0.00	31.79	46.00	-14.21
952.8	356	V	1.11	5.72	23.30	2.84	0.00	31.86	46.00	-14.14

Table 11. Radiated Emissions Limits, Test Results

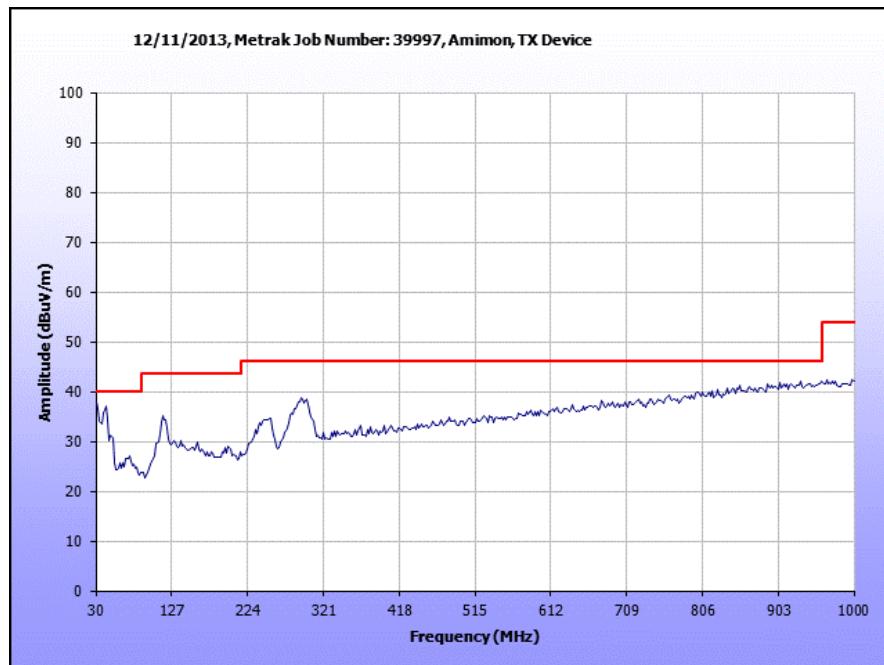

Plot 3. Radiated Emissions, Pre-Scan

## Radiated Emission Limits Test Setup

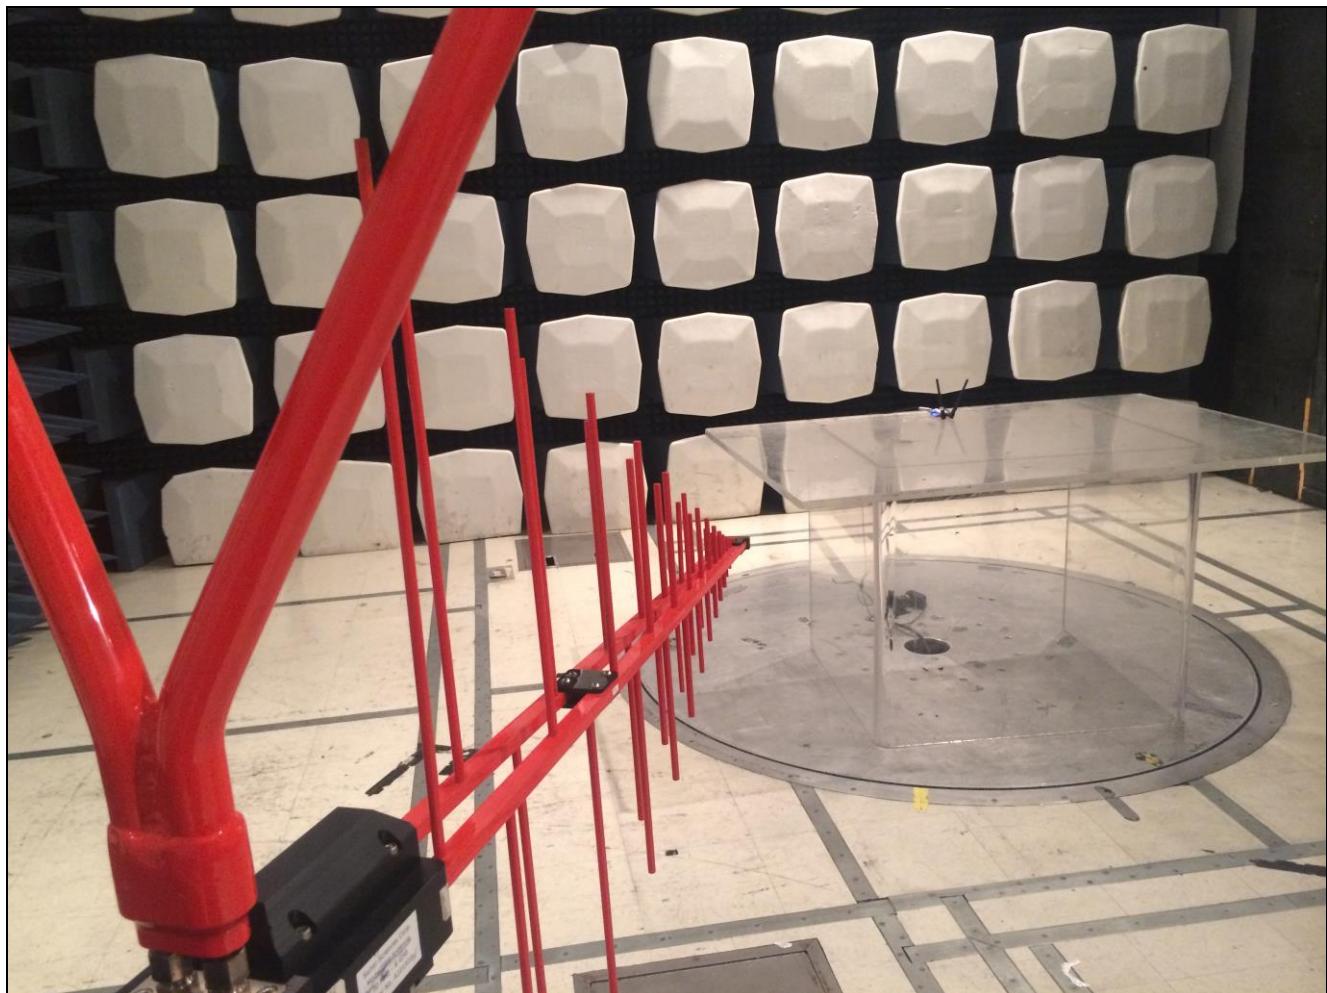

Photograph 3. Radiated Emission, Test Setup

---

## IV. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**

The EUT has a unique antenna connector. Therefore, the EUT as tested is compliant with the criteria of § 15.203.

Gain (dBi)	Type
5	Omni

**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/13/13

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207 Conducted Emissions Limits

**Test Requirement(s):** **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15 - 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter.

**Test Results:**

The EUT was compliant with the requirement(s) of this section.

**Test Engineer(s):**

Djed Mouada


**Test Date(s):**

12/10/13

### Conducted Emissions - Voltage, AC Power, (120 VAC, 60 Hz)


Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) Avg.	Limit (dBuV) Avg.	Margin (dB) Avg.
0.1539	24.47	0	24.47	65.79	-41.32	9.64	0	9.64	55.79	-46.15
0.4765	13.61	0	13.61	56.4	-42.79	5.32	0	5.32	46.4	-41.08
0.838	17.19	0	17.19	56	-38.81	7.482	0	7.482	46	-38.518
9.659	25.73	0	25.73	60	-34.27	17.8	0	17.8	50	-32.2
12.03	28.98	0	28.98	60	-31.02	20.95	0	20.95	50	-29.05
24.7	13.94	0	13.94	60	-46.06	4.09	0	4.09	50	-45.91

Table 13. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

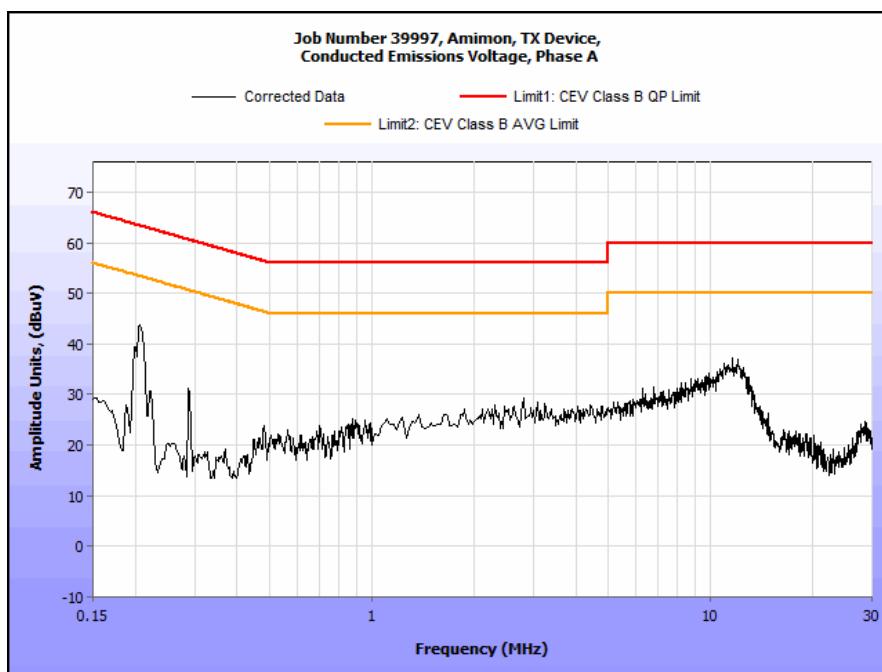

Plot 4. Conducted Emissions, 15.207, Pre-Scan, Phase Line

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) Avg.	Limit (dBuV) Avg.	Margin (dB) Avg.
0.294	9.615	0	9.615	60.41	-50.795	3.708	0	3.708	50.41	-46.702
0.3346	9.26	0	9.26	59.34	-50.08	3.21	0	3.21	49.34	-46.13
0.658	12.15	0	12.15	56	-43.85	4.5	0	4.5	46	-41.5
6.021	21.74	0	21.74	60	-38.26	12.82	0	12.82	50	-37.18
12.5	32.52	0	32.52	60	-27.48	25.52	0	25.52	50	-24.48
20.82	23.01	0	23.01	60	-36.99	16.4	0	16.4	50	-33.6

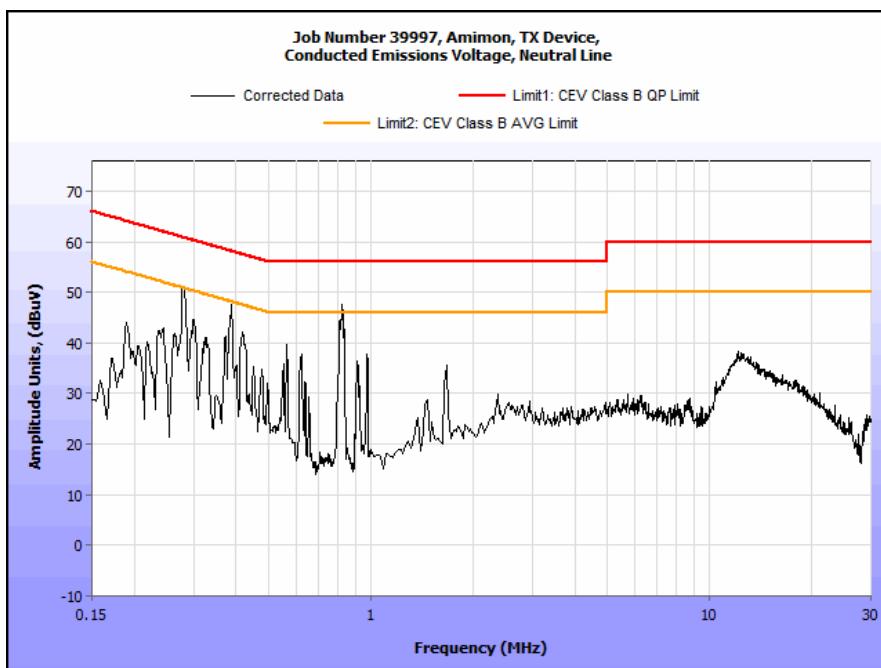**Table 14. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)**

**Plot 5. Conducted Emissions, 15.207, Pre-Scan, Neutral Line**

## Conducted Emission Limits Test Setup



Photograph 4. Conducted Emissions, Test Setup

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 403(i) 26dB Bandwidth

**Test Requirements:** **§ 15.403 (i):** For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

**Test Procedure:** The transmitter was set to both operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW > RBW$ . The 26 dB Bandwidth was measured and recorded.

**Test Results** The 26 dB Bandwidth was compliant with the requirements of this section and was determined from the plots on the following pages.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/13/13




**Figure 2. Occupied Bandwidth, Test Setup**


## 26 dB Occupied Bandwidth

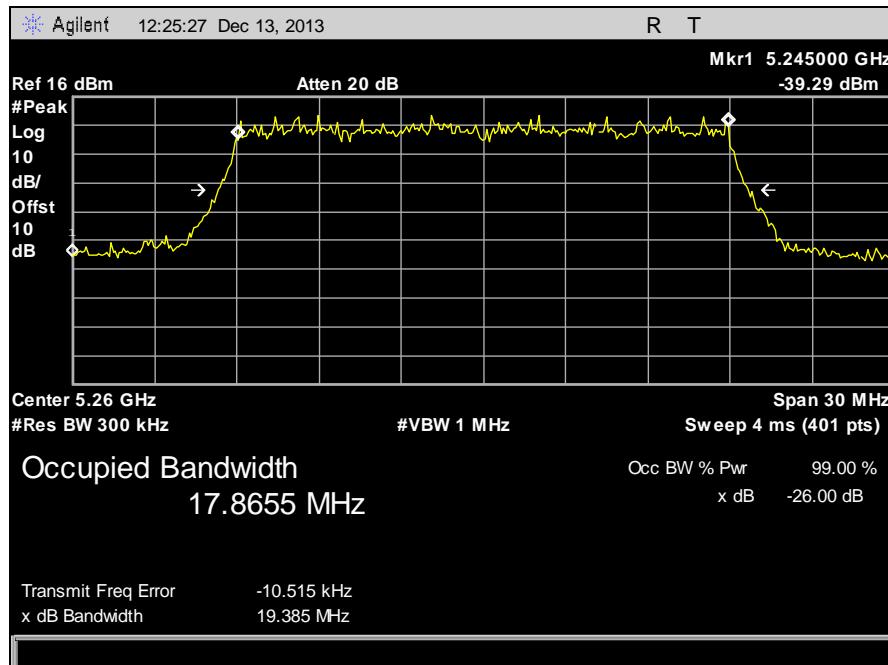


**Plot 6. 26 dB Occupied Bandwidth, 5260 MHz, 20 MHz, Channel 0**

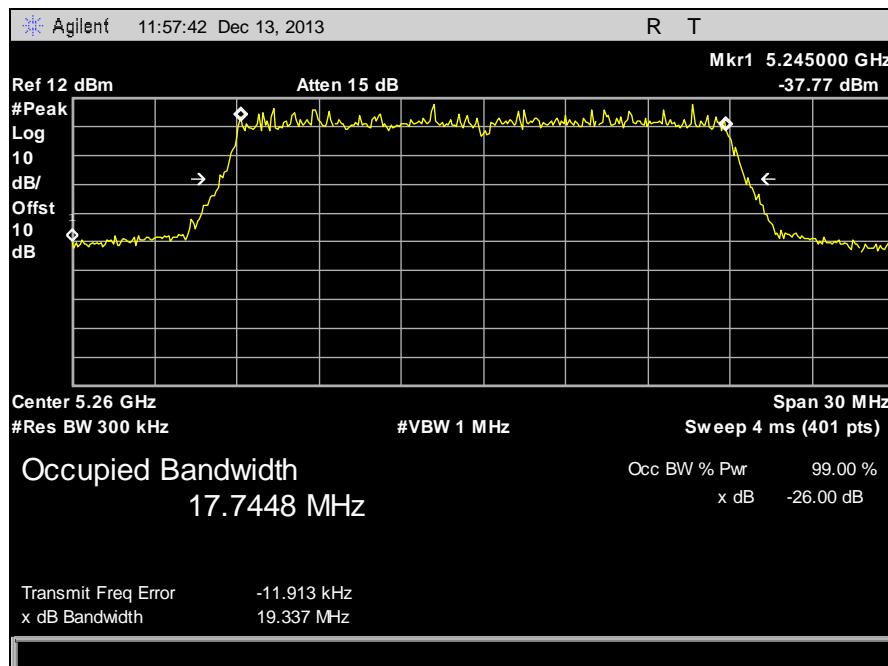


**Plot 7. 26 dB Occupied Bandwidth, 5260 MHz, 20 MHz, Channel 1**

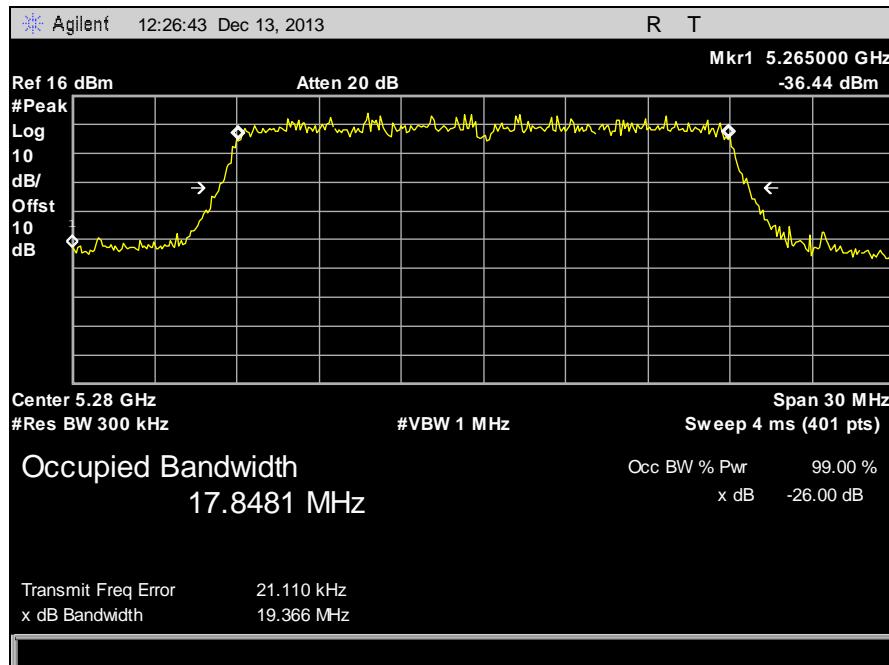


**Plot 8. 26 dB Occupied Bandwidth, 5280 MHz, 20 MHz, Channel 0**

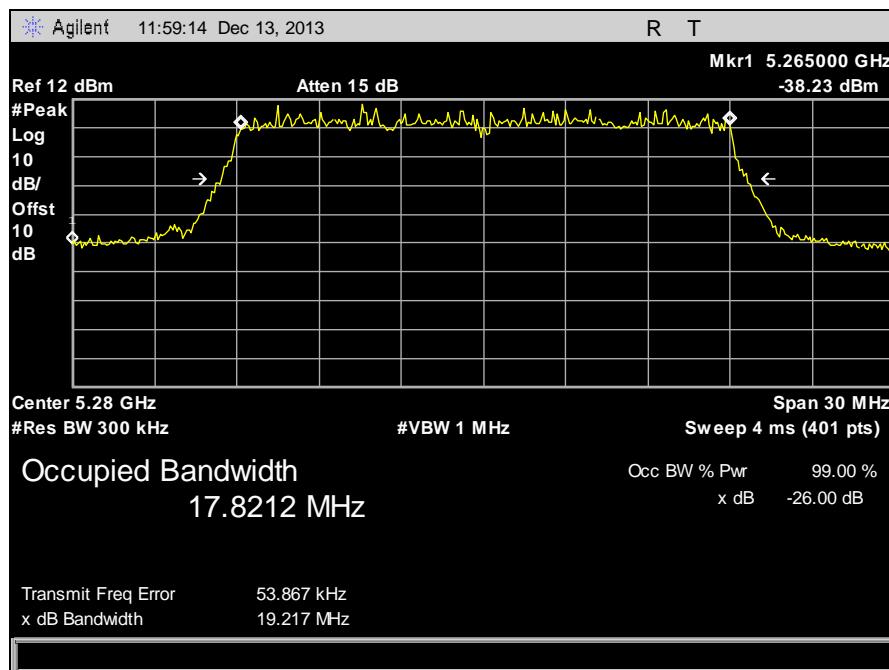


**Plot 9. 26 dB Occupied Bandwidth, 5280 MHz, 20 MHz, Channel 1**

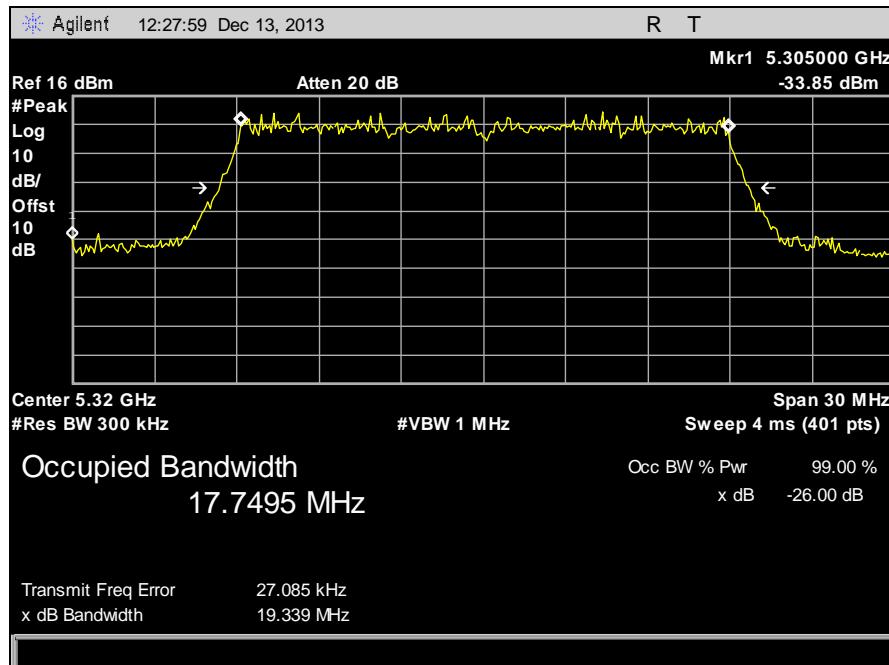


Plot 10. 26 dB Occupied Bandwidth, 5320 MHz, 20 MHz, Channel 0

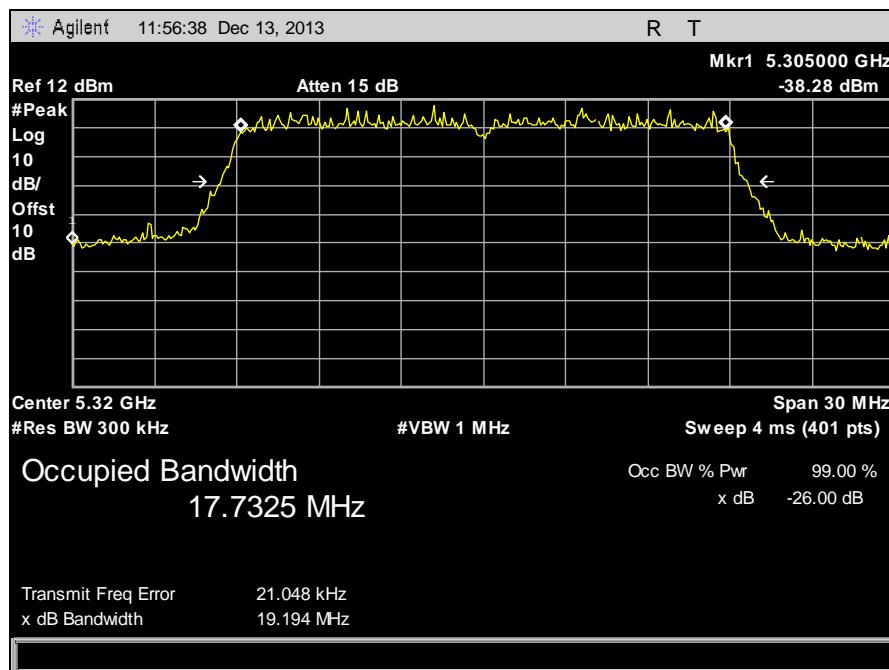


Plot 11. 26 dB Occupied Bandwidth, 5320 MHz, 20 MHz, Channel 1

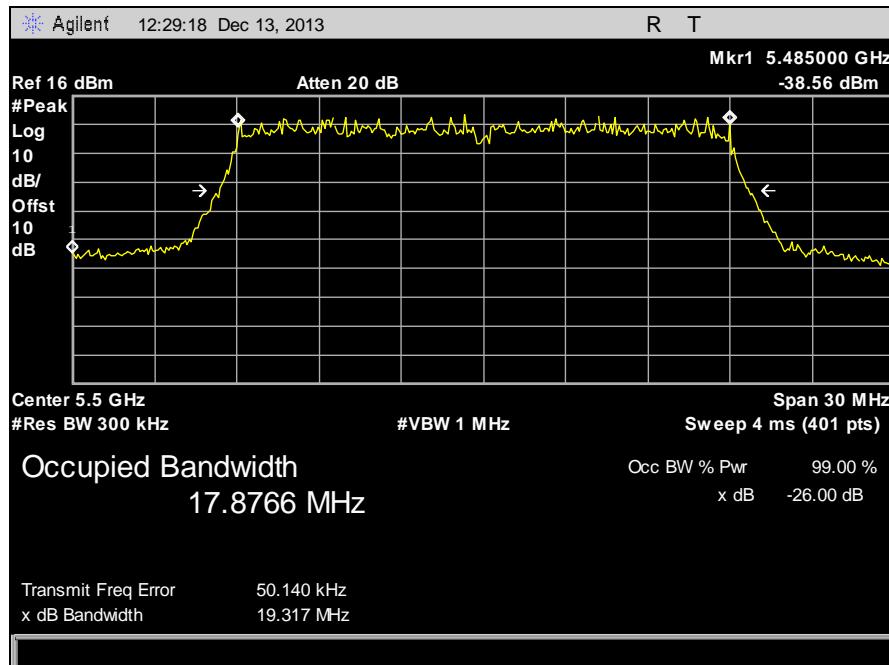


Plot 12. 26 dB Occupied Bandwidth, 5500 MHz, 20 MHz, Channel 0

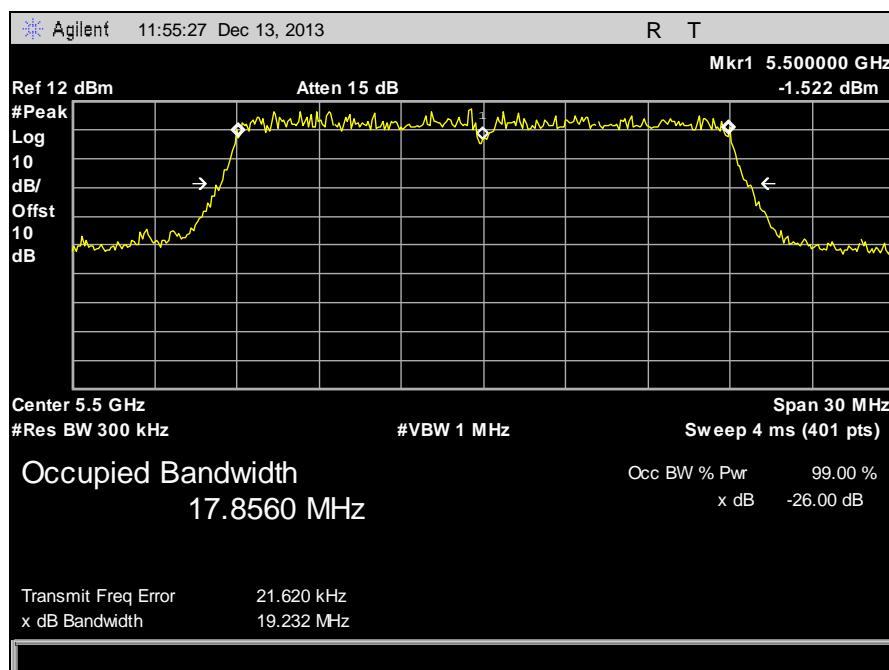


Plot 13. 26 dB Occupied Bandwidth, 5500 MHz, 20 MHz, Channel 1

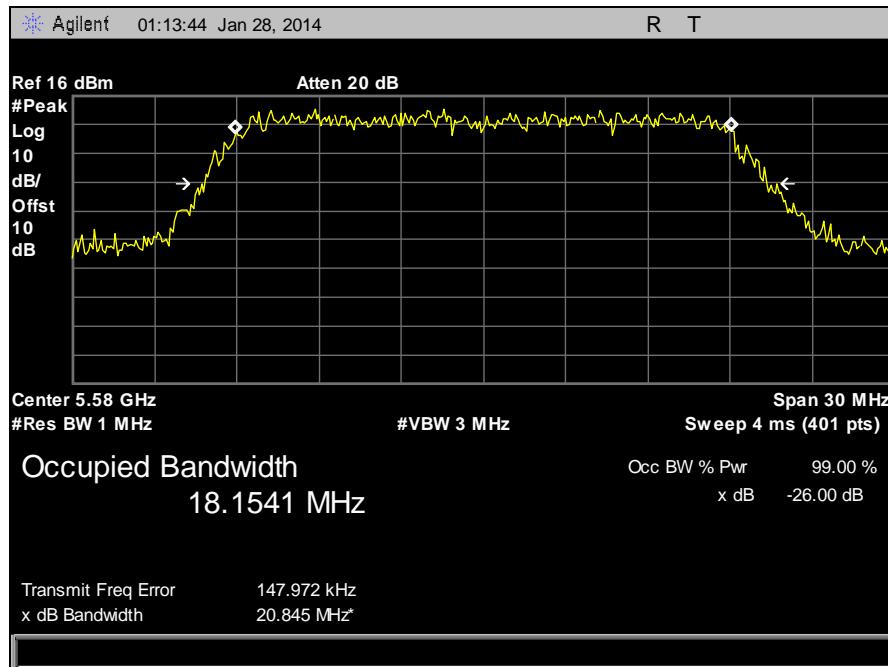


**Plot 14. 26 dB Occupied Bandwidth, 5580 MHz, 20 MHz, Channel 0**

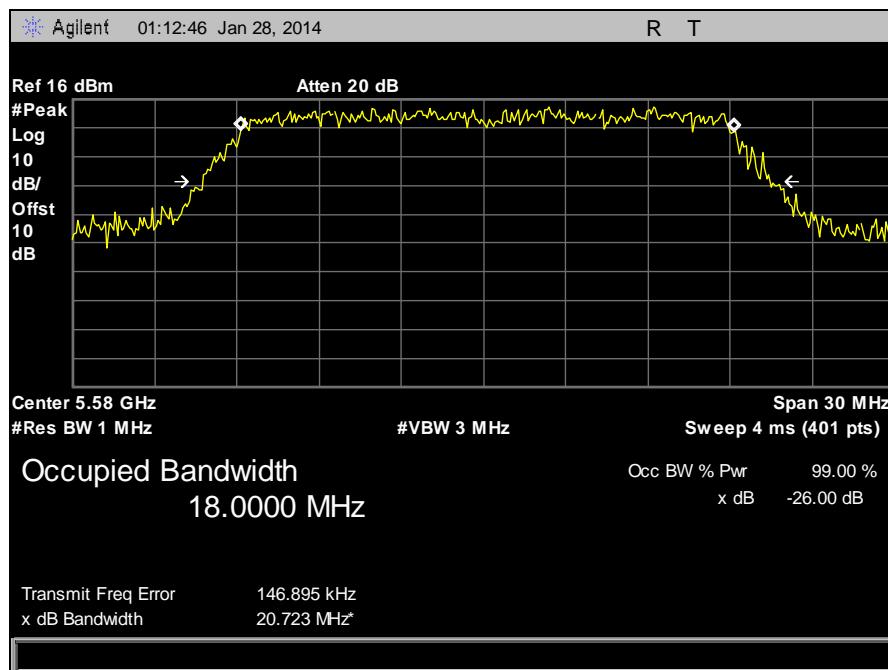


**Plot 15. 26 dB Occupied Bandwidth, 5580 MHz, 20 MHz, Channel 1**

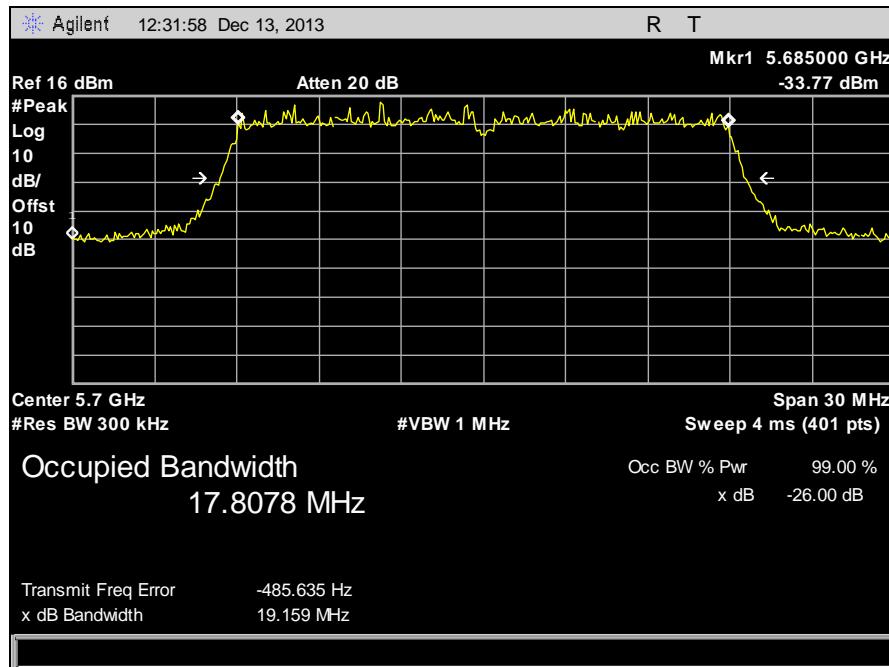


Plot 16. 26 dB Occupied Bandwidth, 5700 MHz, 20 MHz, Channel 0

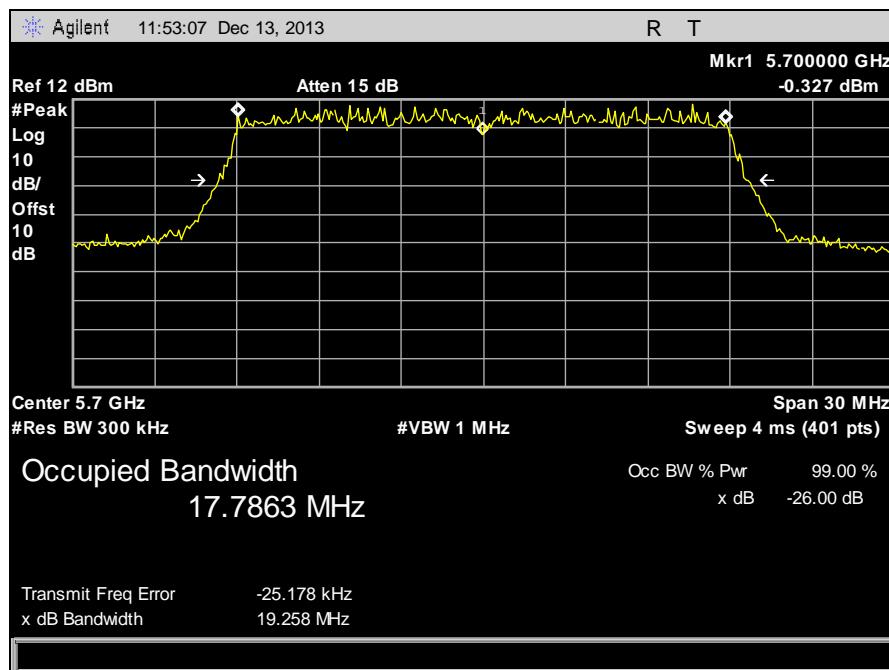


Plot 17. 26 dB Occupied Bandwidth, 5700 MHz, 20 MHz, Channel 1

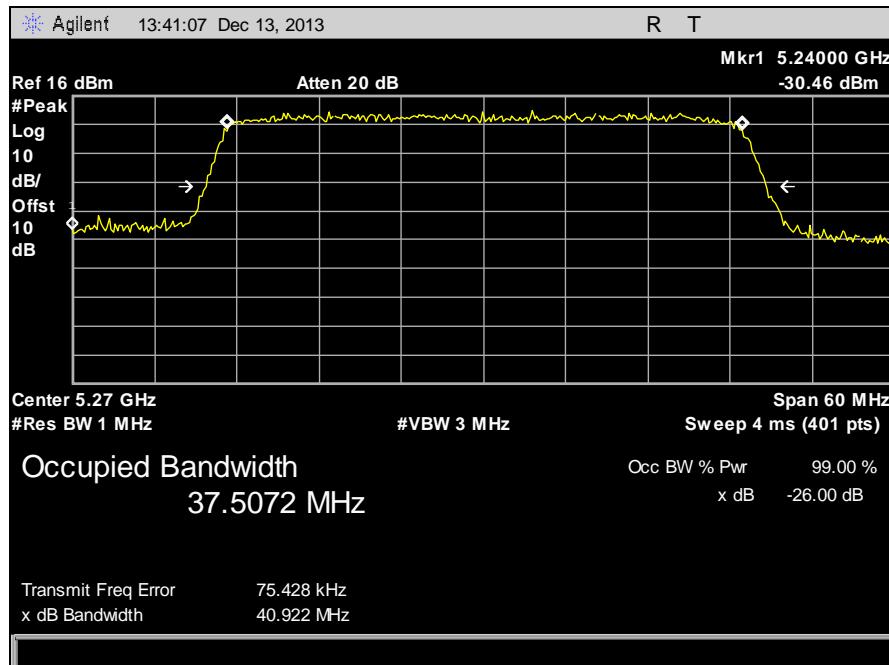


Plot 18. 26 dB Occupied Bandwidth, 5270 MHz, 40 MHz, Channel 0

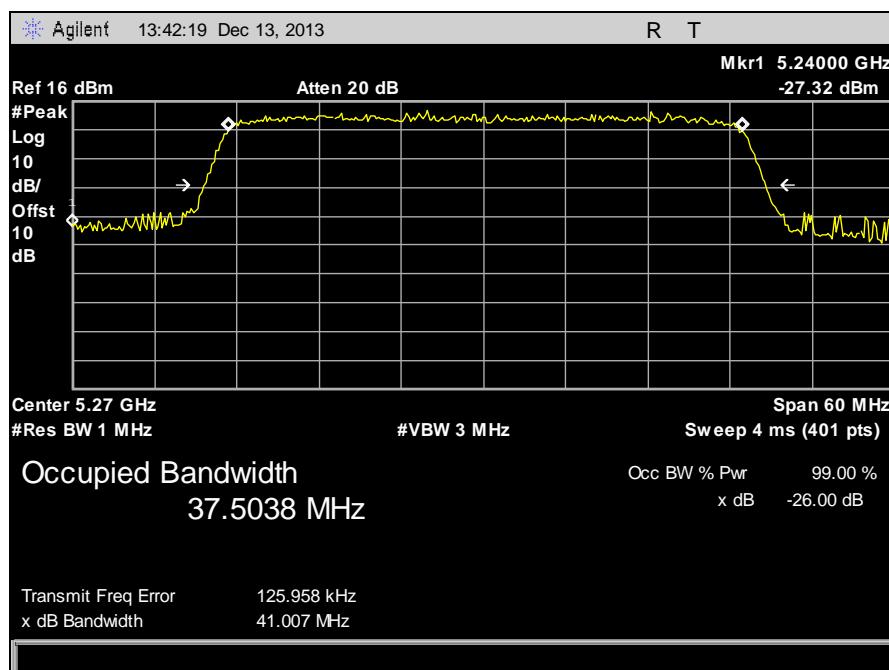


Plot 19. 26 dB Occupied Bandwidth, 5270 MHz, 40 MHz, Channel 1

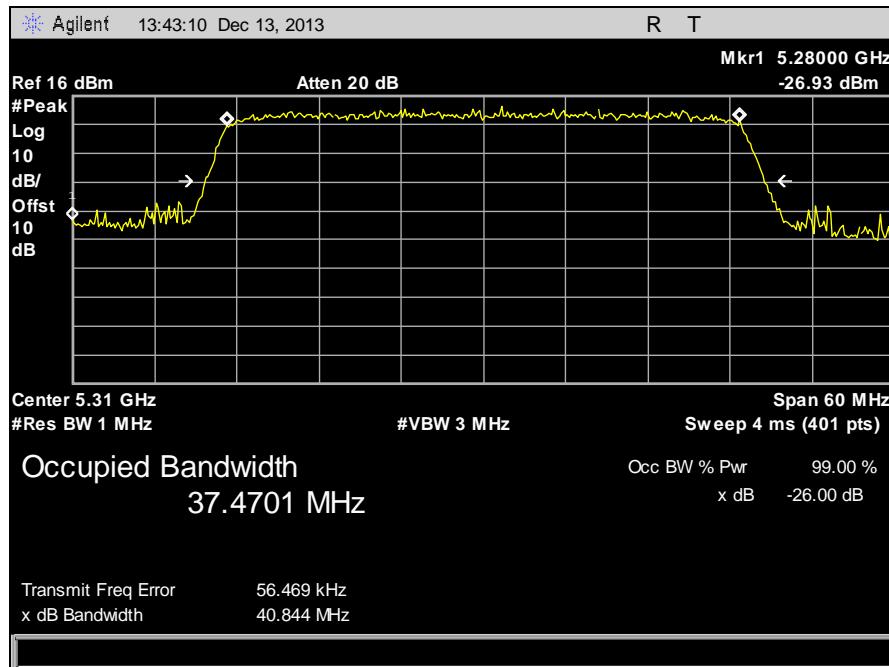


Plot 20. 26 dB Occupied Bandwidth, 5310 MHz, 40 MHz, Channel 0

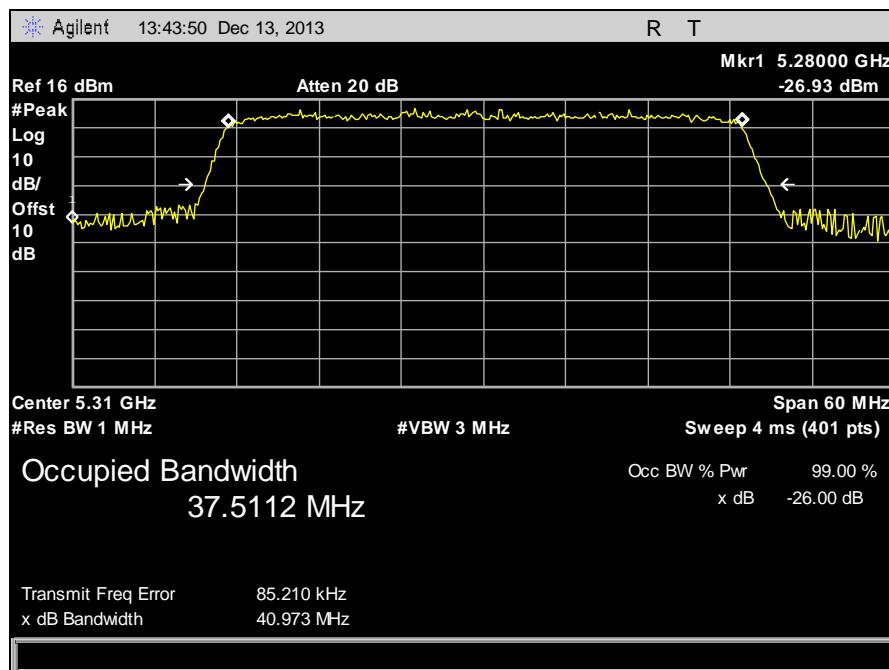


Plot 21. 26 dB Occupied Bandwidth, 5310 MHz, 40 MHz, Channel 1

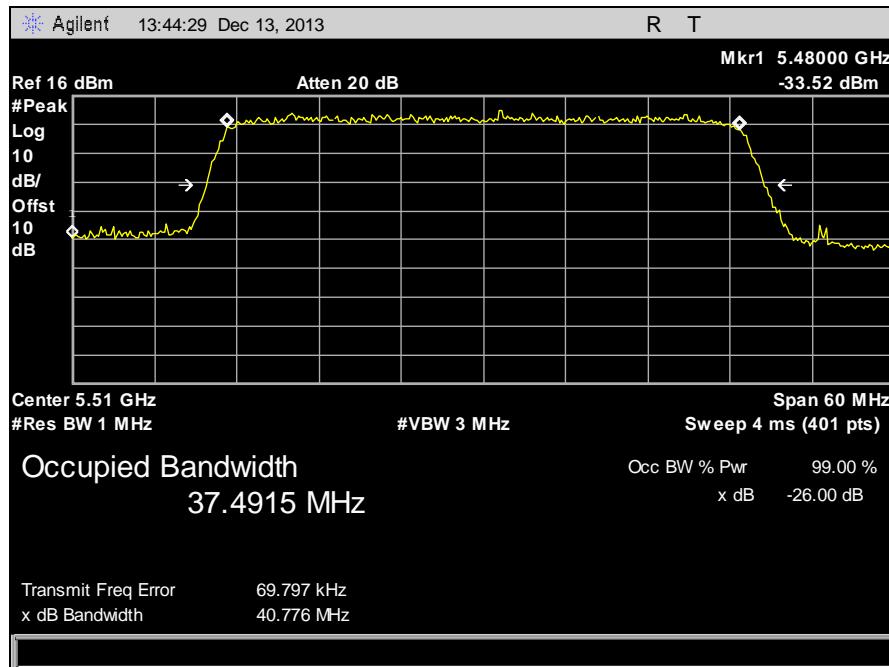


Plot 22. 26 dB Occupied Bandwidth, 5510 MHz, 40 MHz, Channel 0

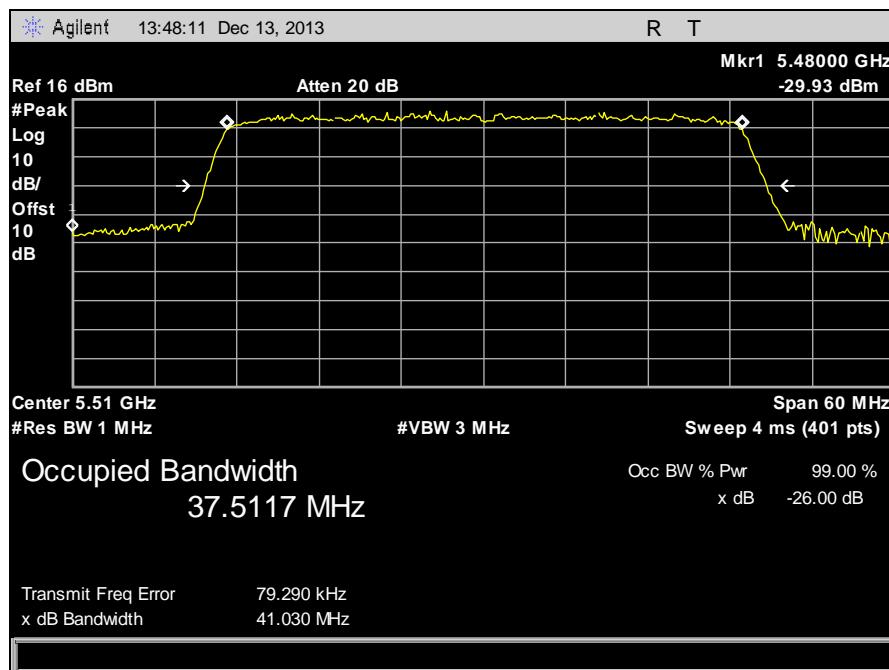


Plot 23. 26 dB Occupied Bandwidth, 5510 MHz, 40 MHz, Channel 1

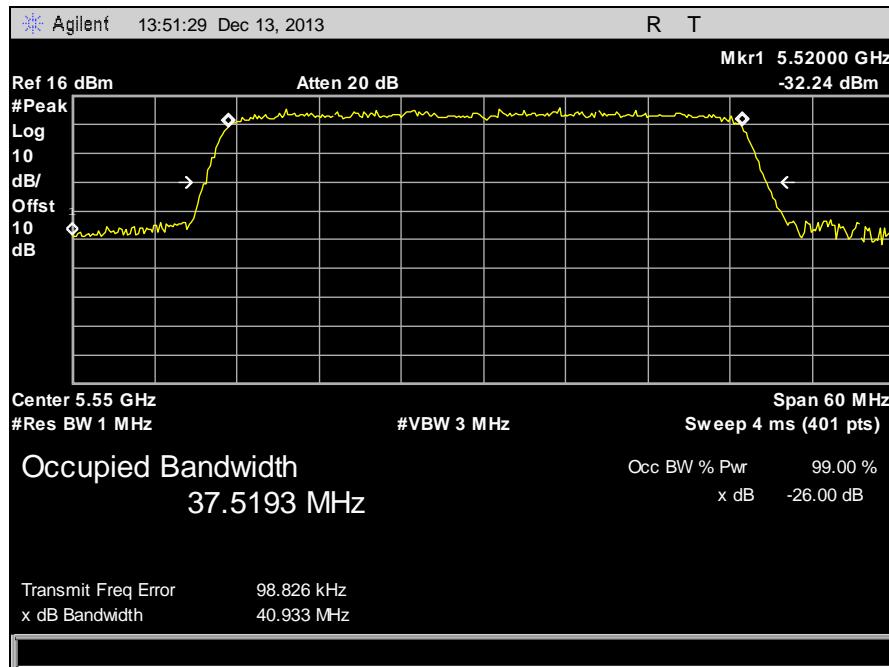


Plot 24. 26 dB Occupied Bandwidth, 5550 MHz, 40 MHz, Channel 0

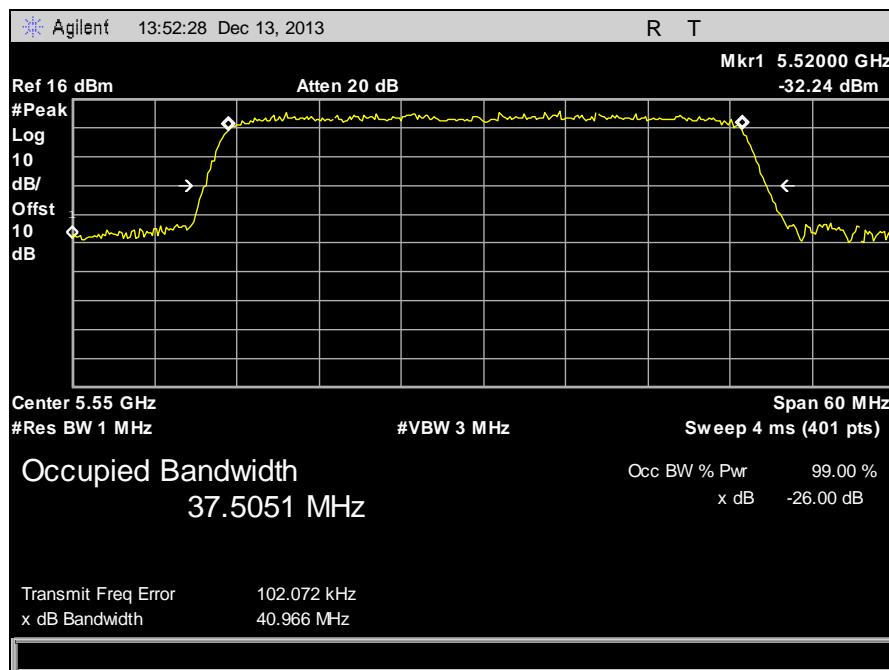

Plot 25. 26 dB Occupied Bandwidth, 5550 MHz, 40 MHz, Channel 1

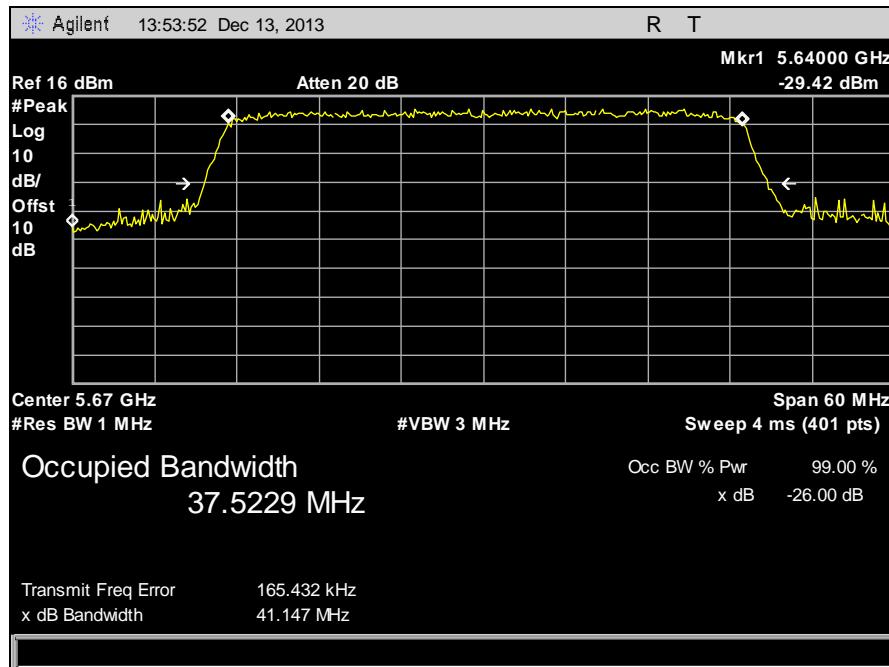


Plot 26. 26 dB Occupied Bandwidth, 5670 MHz, 40 MHz, Channel 0

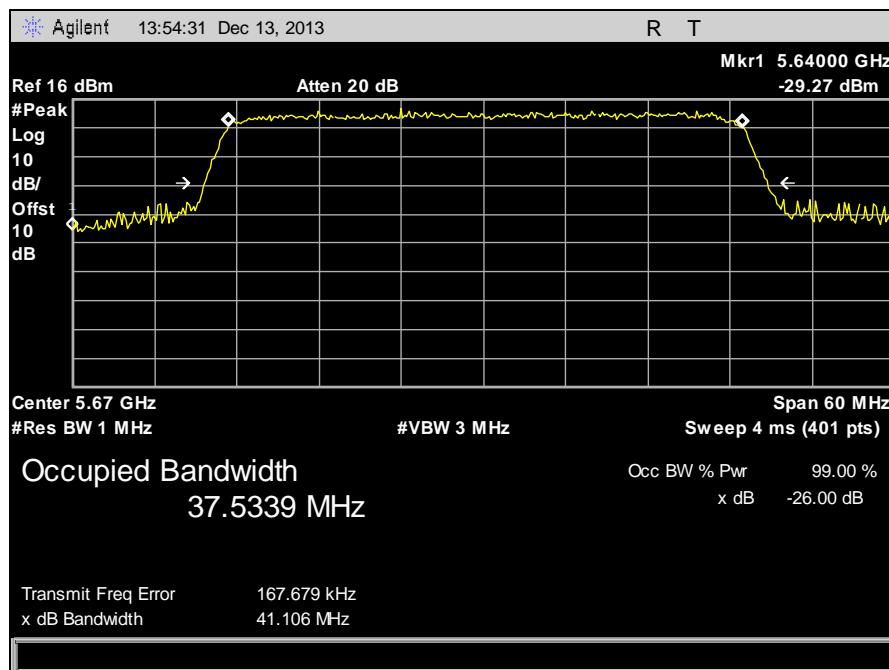


Plot 27. 26 dB Occupied Bandwidth, 5670 MHz, 40 MHz, Channel 1


## 99% Bandwidth

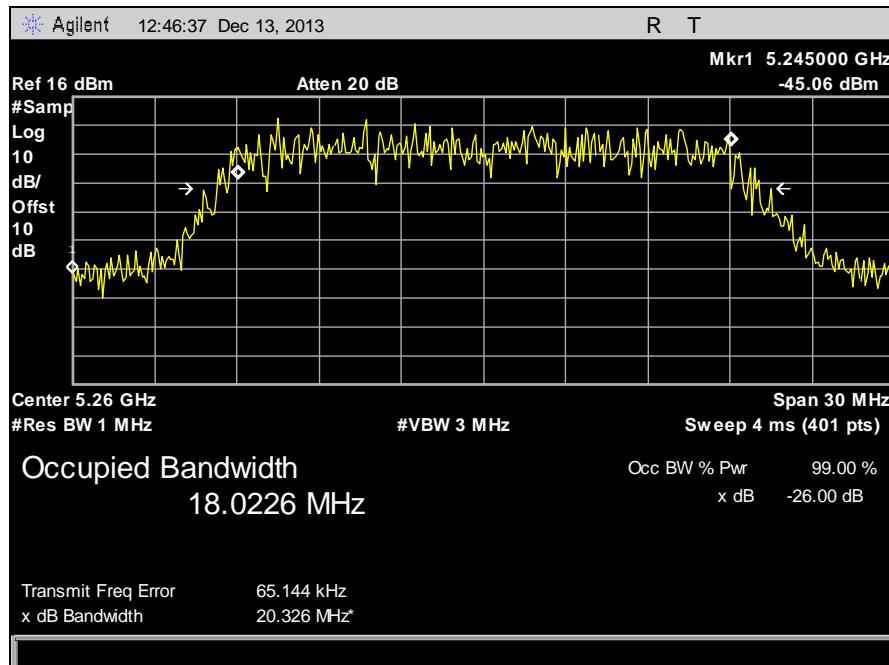


Plot 28. 99% Bandwidth, 5260 MHz, 20 MHz, Channel 0

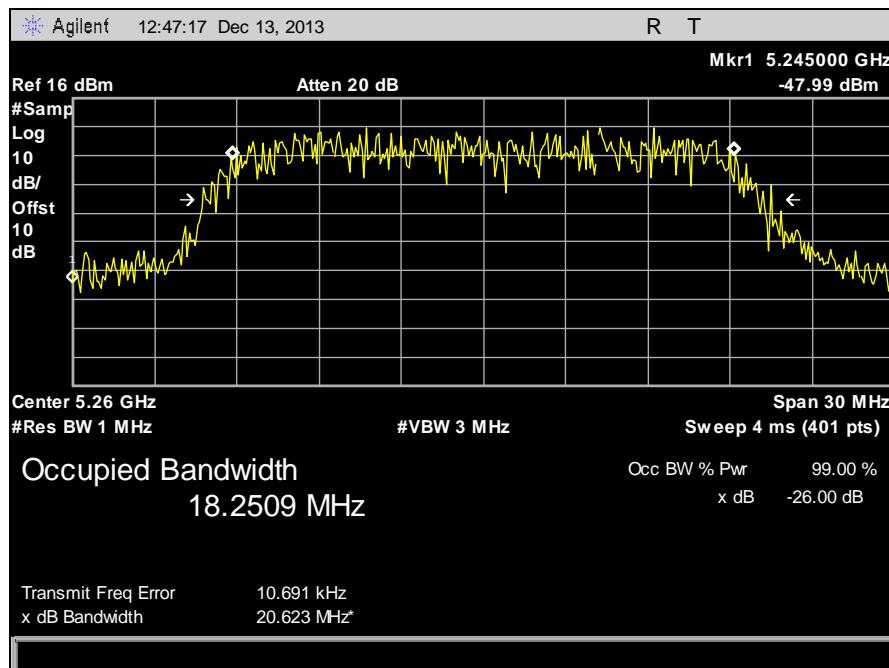


Plot 29. 99% Bandwidth, 5260 MHz, 20 MHz, Channel 1

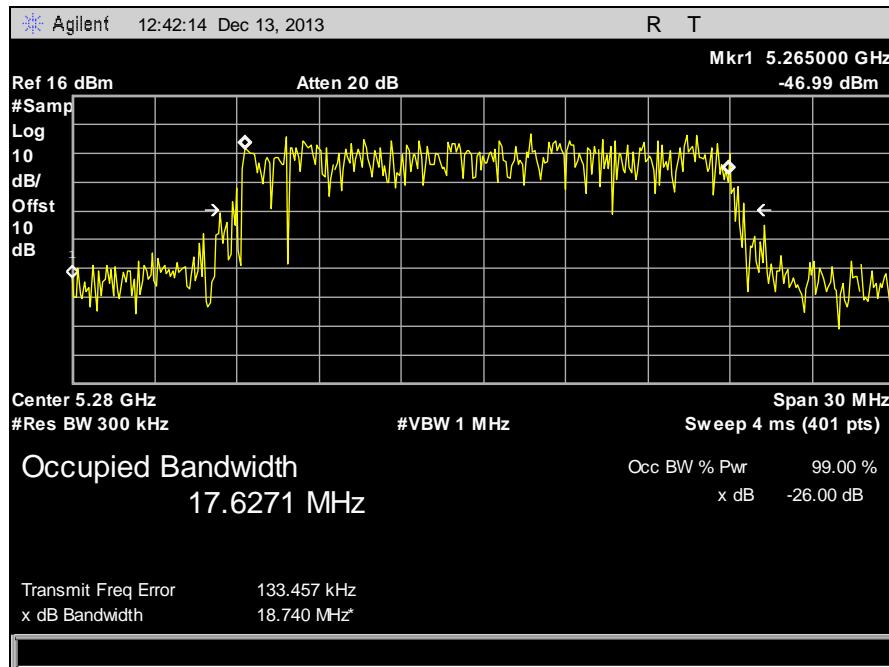


Plot 30. 99% Bandwidth, 5280 MHz, 20 MHz, Channel 0

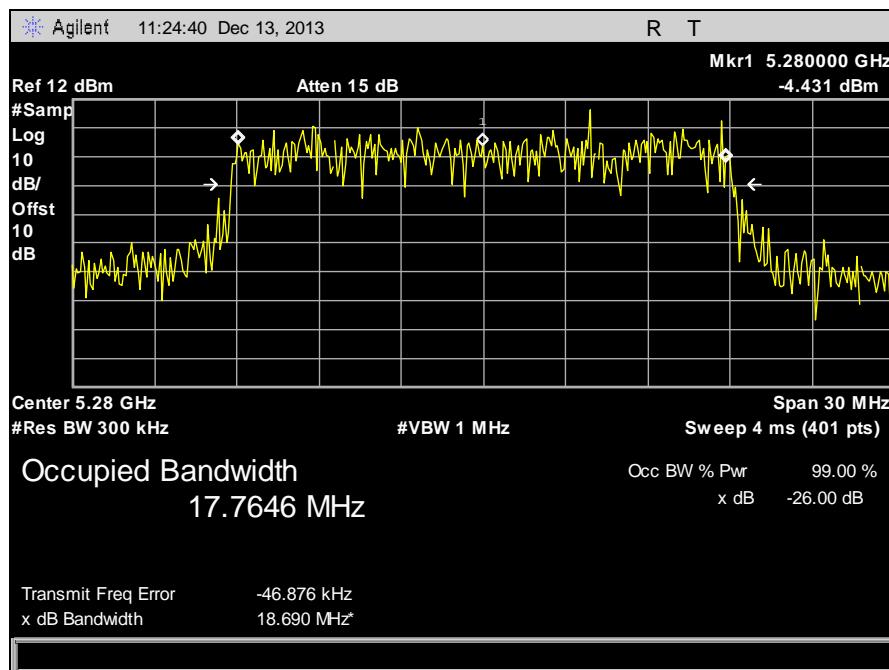


Plot 31. 99% Bandwidth, 5280 MHz, 20 MHz, Channel 1

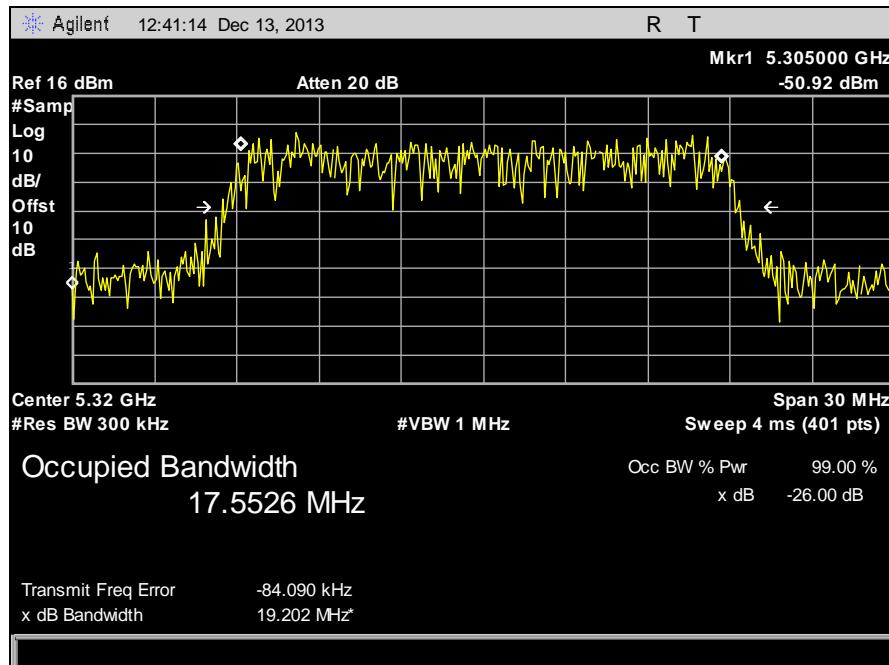


Plot 32. 99% Bandwidth, 5320 MHz, 20 MHz, Channel 0

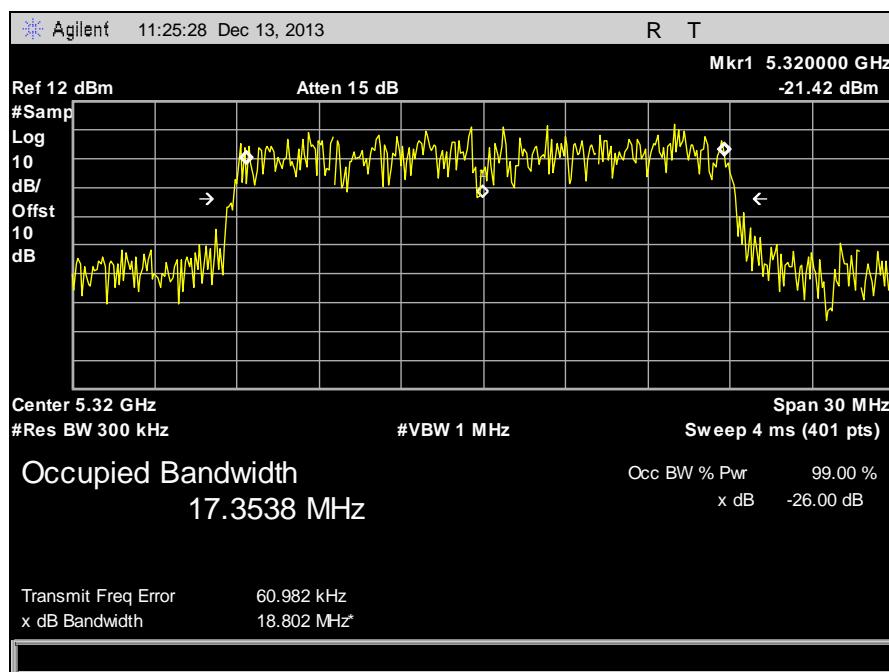


Plot 33. 99% Bandwidth, 5320 MHz, 20 MHz, Channel 1

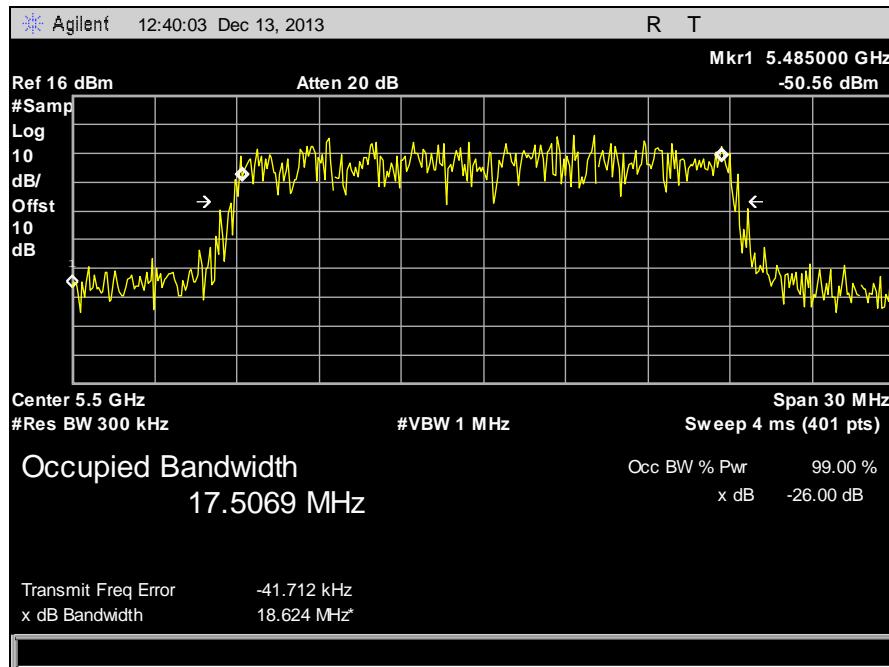


Plot 34. 99% Bandwidth, 5500 MHz, 20 MHz, Channel 0

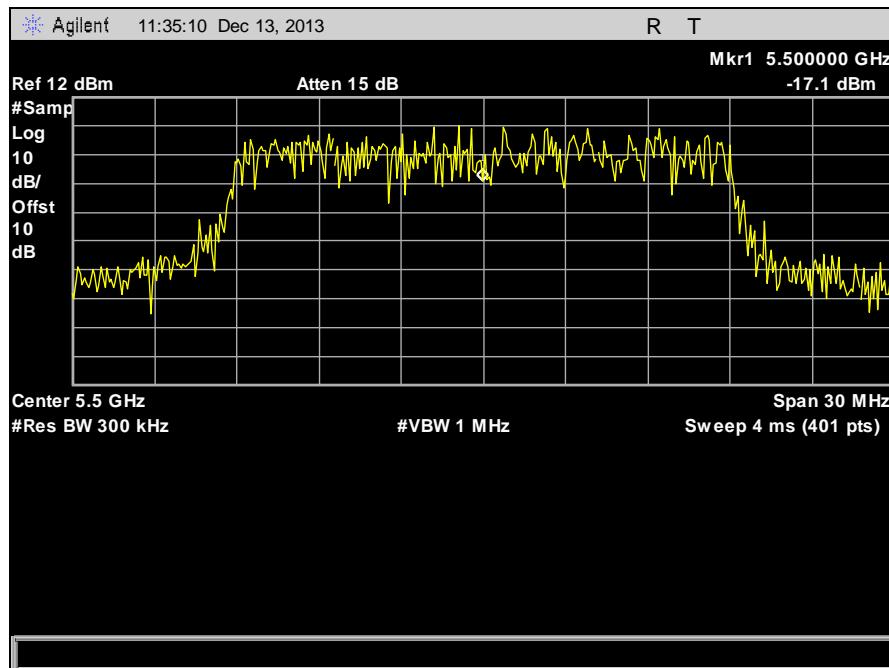


Plot 35. 99% Bandwidth, 5500 MHz, 20 MHz, Channel 1

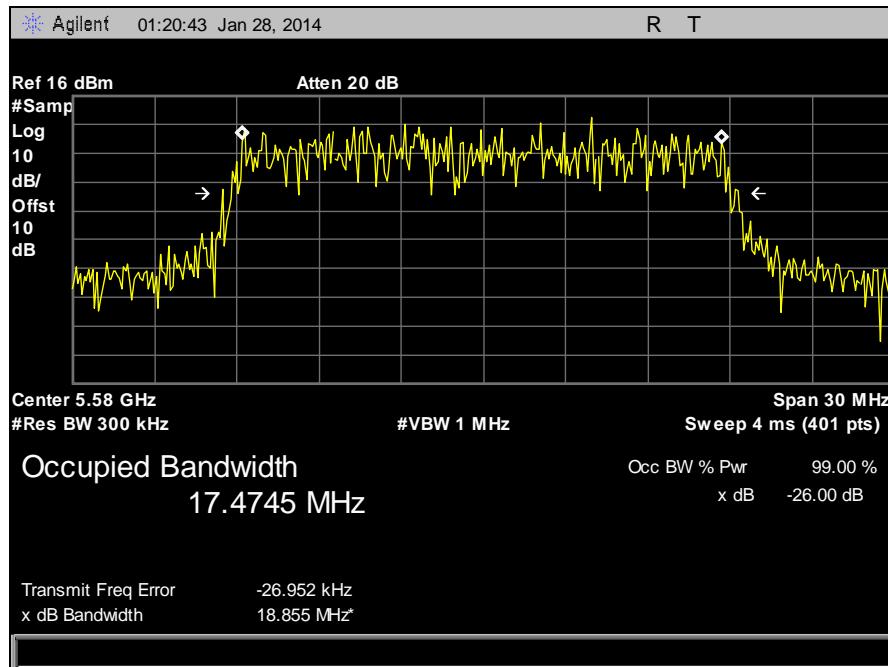


**Plot 36. 99% Bandwidth, 5580 MHz, 20 MHz, Channel 0**

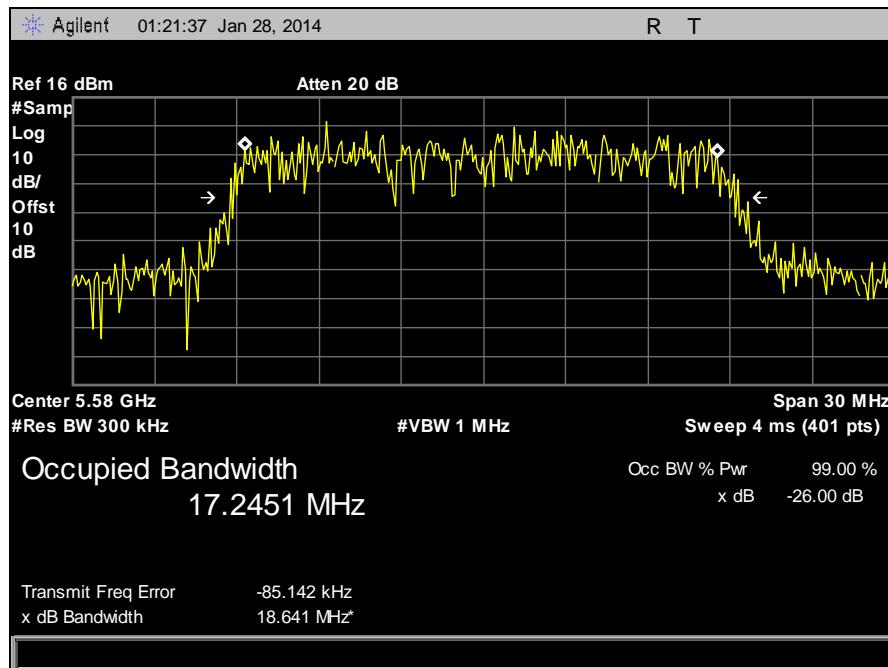


**Plot 37. 99% Bandwidth, 5580 MHz, 20 MHz, Channel 1**

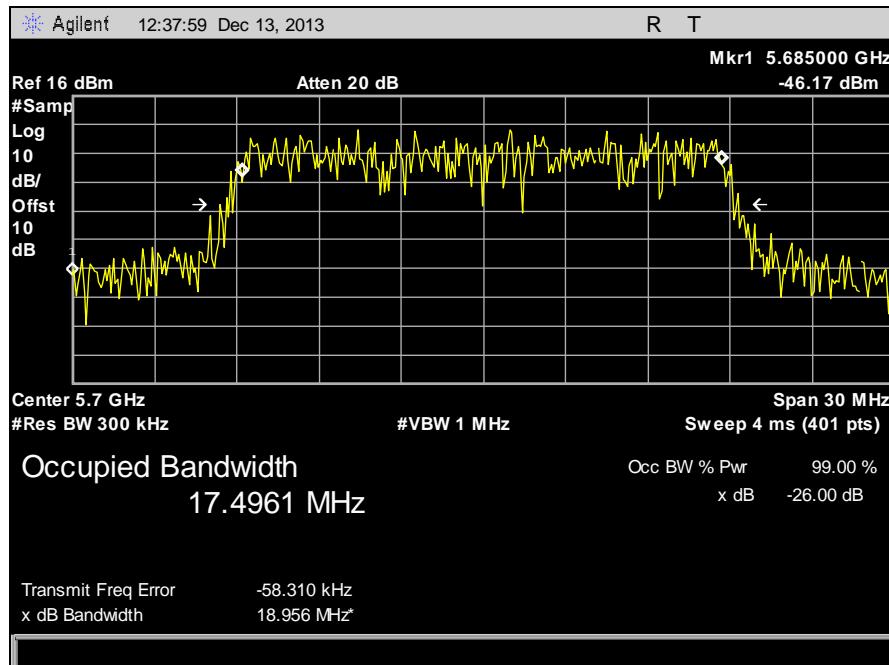


Plot 38. 99% Bandwidth, 5700 MHz, 20 MHz, Channel 0

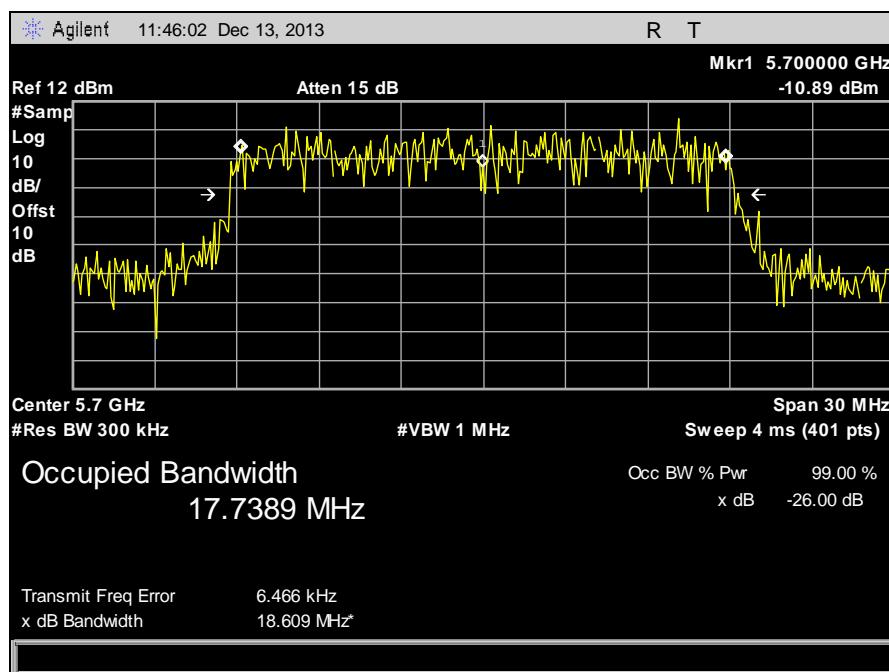


Plot 39. 99% Bandwidth, 5700 MHz, 20 MHz, Channel 1

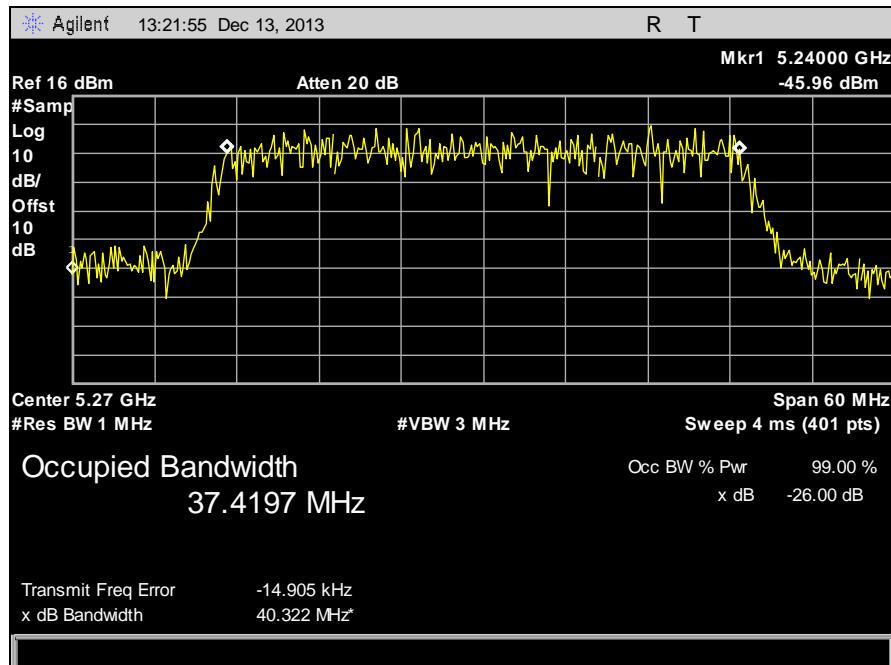


**Plot 40. 99% Bandwidth, 5270 MHz, 40 MHz, Channel 0**

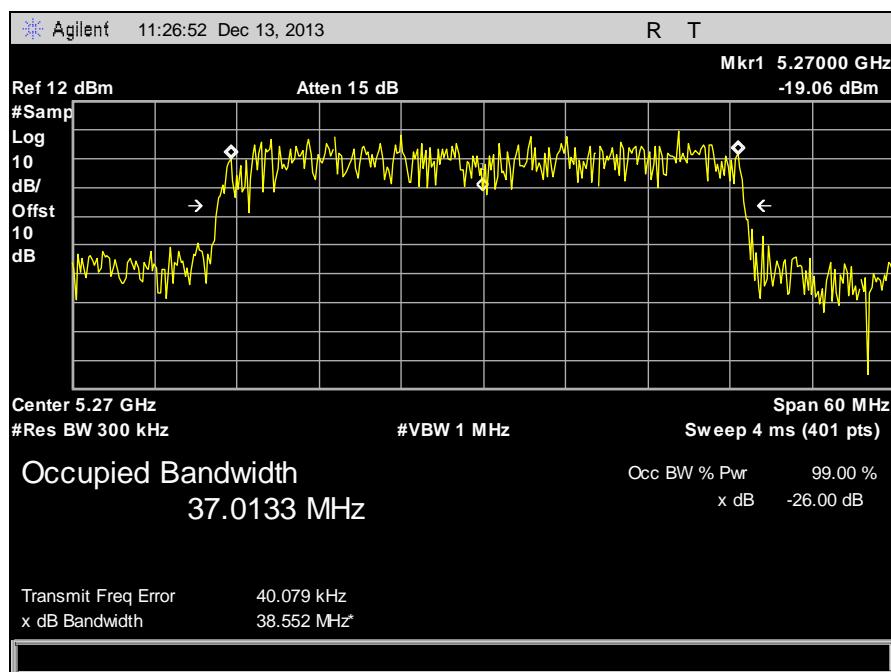


**Plot 41. 99% Bandwidth, 5270 MHz, 40 MHz, Channel 1**

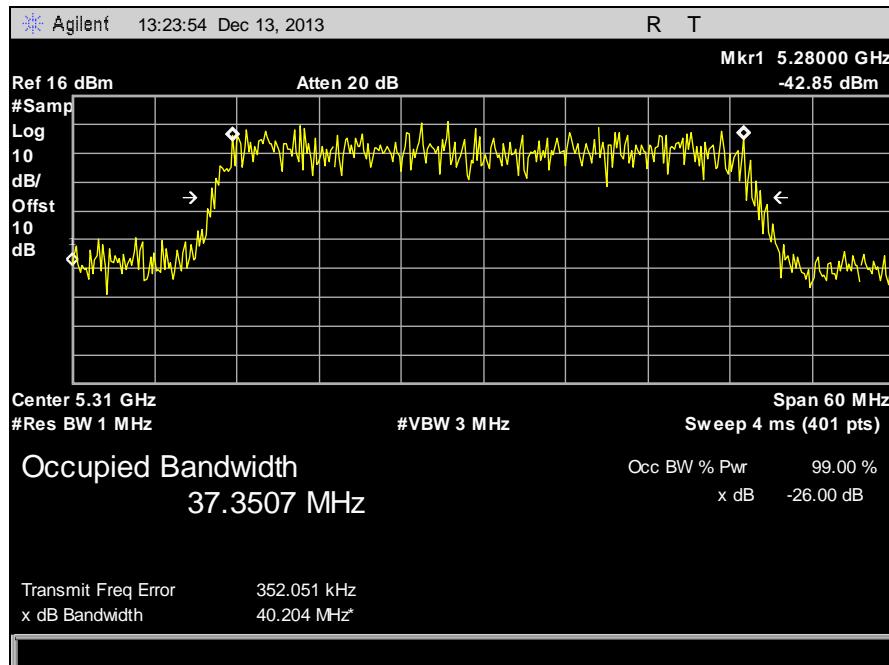


Plot 42. 99% Bandwidth, 5310 MHz, 40 MHz, Channel 0

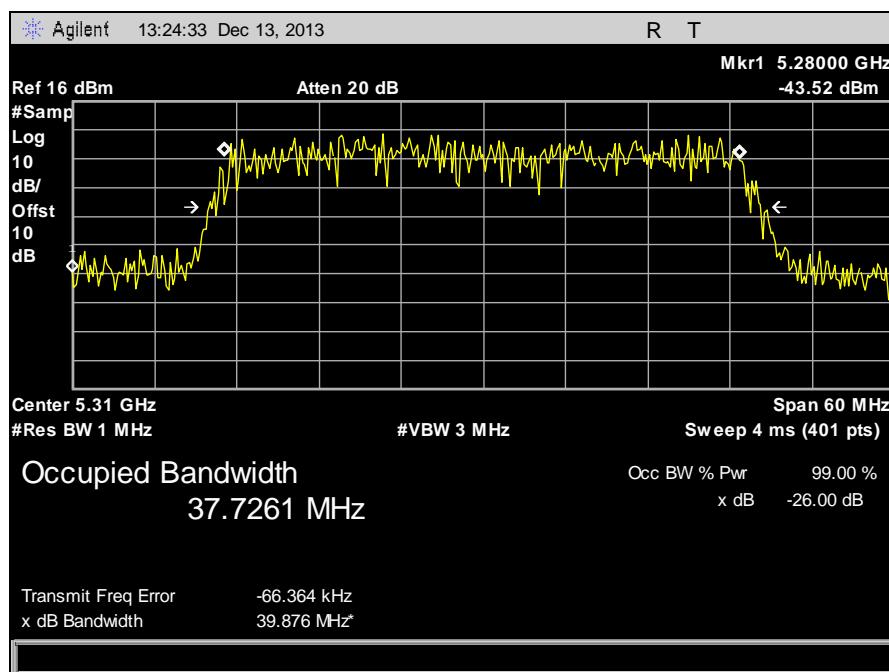


Plot 43. 99% Bandwidth, 5310 MHz, 40 MHz, Channel 1

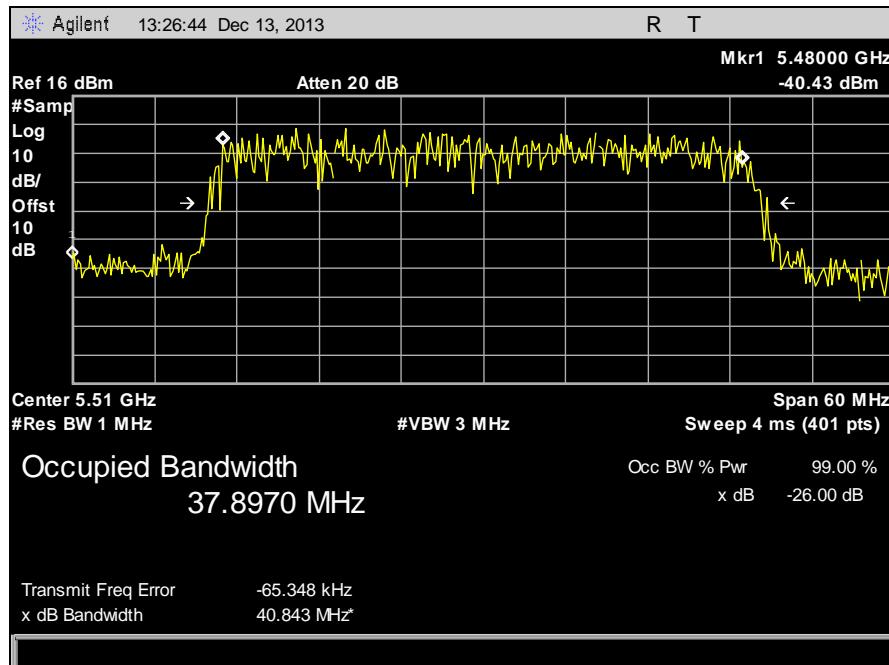


Plot 44. 99% Bandwidth, 5510 MHz, 40 MHz, Channel 0

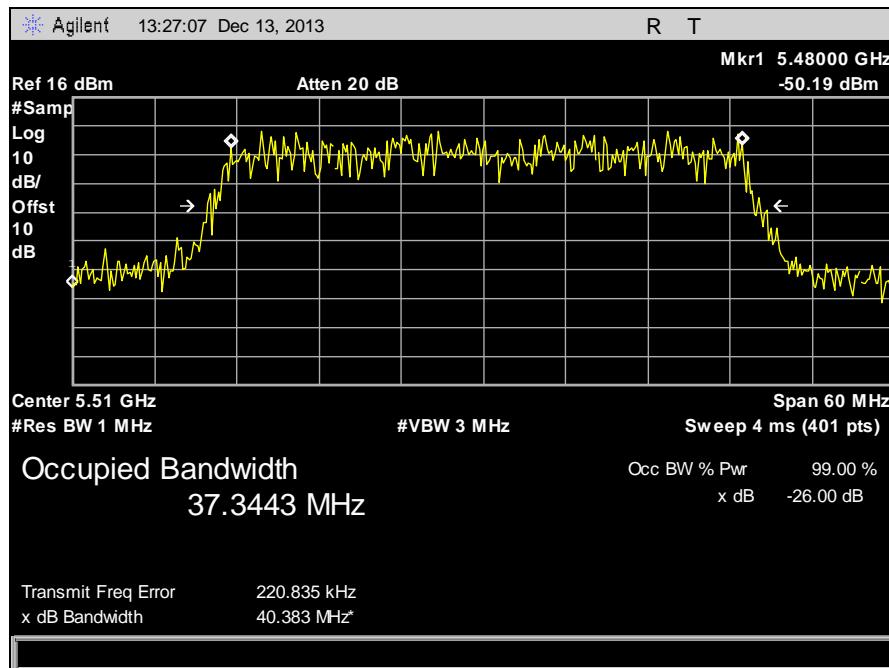


Plot 45. 99% Bandwidth, 5510 MHz, 40 MHz, Channel 1

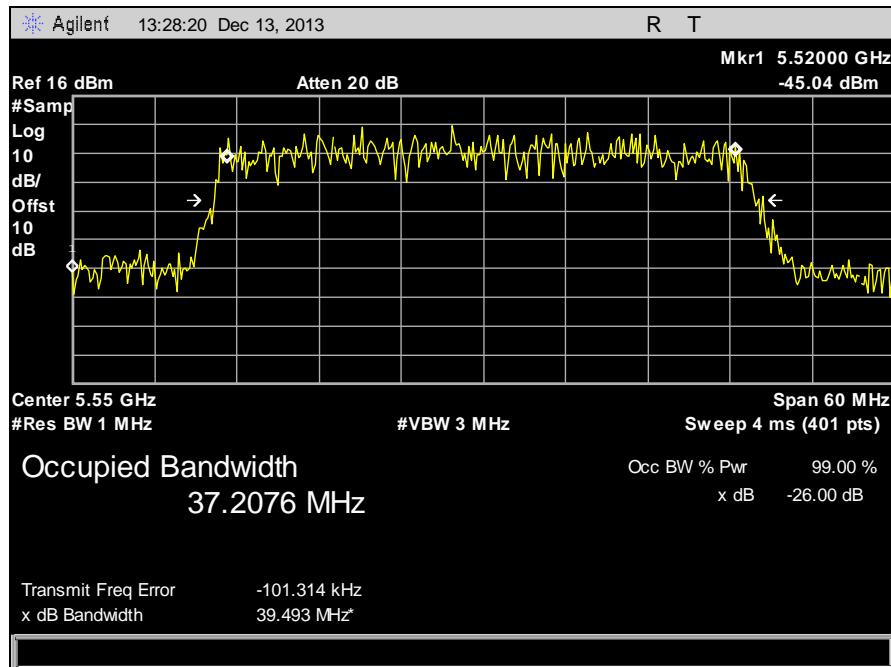


Plot 46. 99% Bandwidth, 5550 MHz, 40 MHz, Channel 0

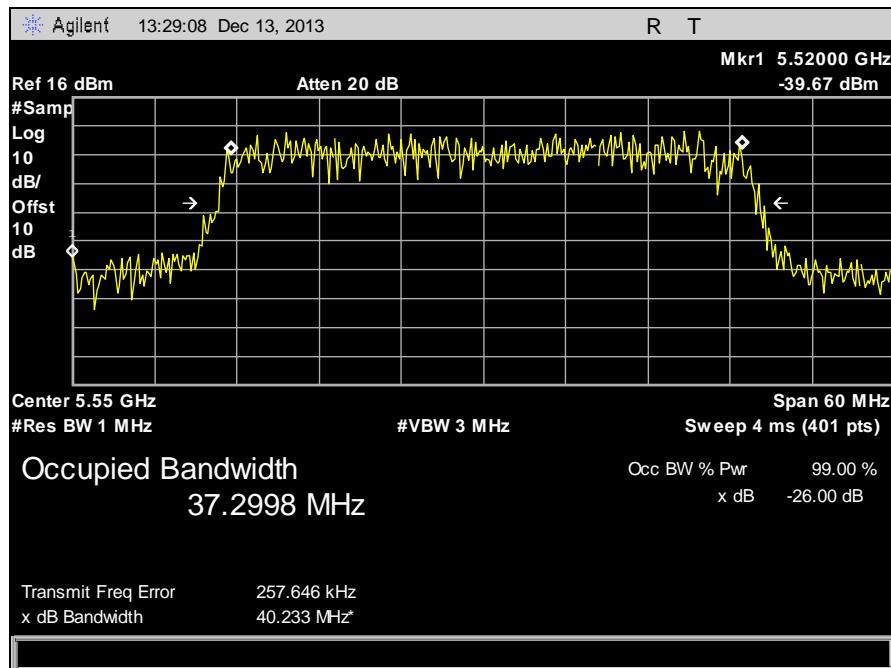

Plot 47. 99% Bandwidth, 5550 MHz, 40 MHz, Channel 1

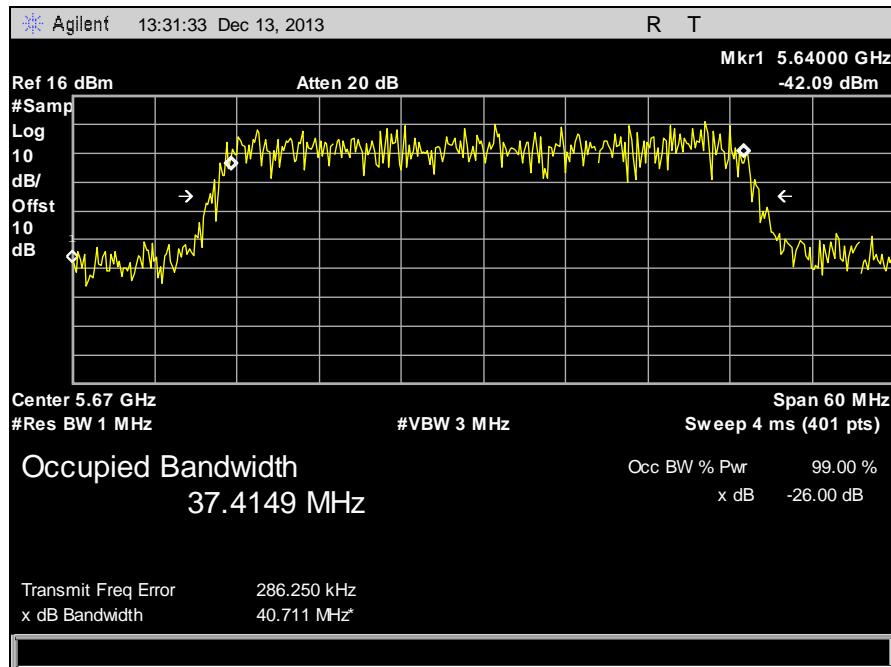

Plot 48. 99% Bandwidth, 5670 MHz, 40 MHz, Channel 0

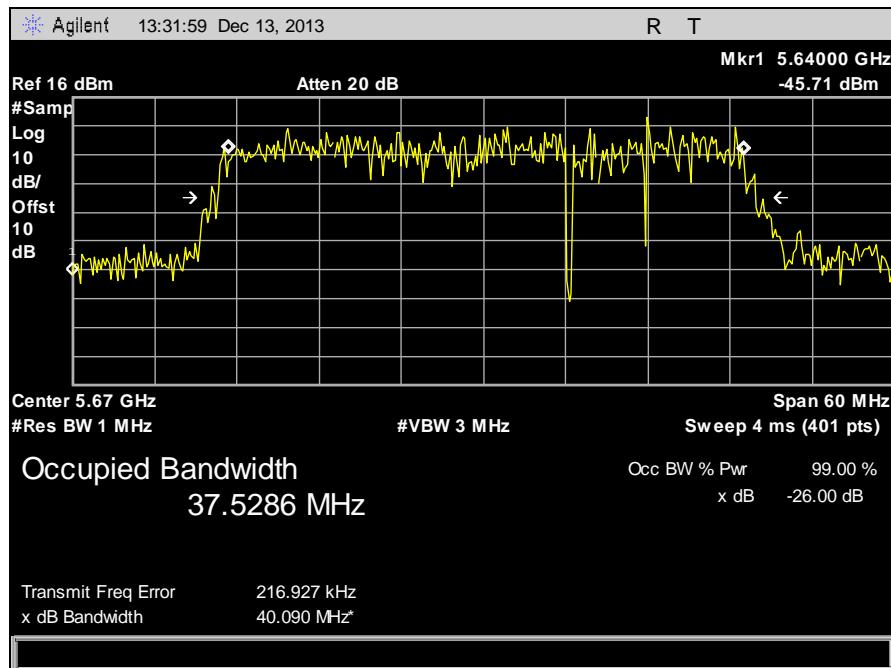

Plot 49. 99% Bandwidth, 5670 MHz, 40 MHz, Channel 1

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 407(a)(2) RF Power Output

**Test Requirements:** **§15.407(a)(2):** The maximum output power of the intentional radiator shall not exceed the following:

**§15.407(a) (2):** For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26 dB emission bandwidth in megahertz.

**Test Procedure:** The EUT was connected to a Spectrum Analyzer. The power was measured on low, mid (where applicable), and high channels.


**Test Results:** Equipment was compliant with the Peak Power Output limits of **§ 15.401(a)(2)**.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** 12/12/13

Frequency (MHz)	Bandwidth	Channel 0 Power (dBm)	Channel 1 Power (dBm)	Summed Power (dBm)	Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
5260	20 MHz	17.31	17.55	20.44	5.00	23.98	-3.54
5300	20 MHz	18.48	18.88	21.69	5.00	23.98	-2.28
5320	20 MHz	18.26	20.31	22.42	5.00	23.98	-1.56
5500	20 MHz	17.5	18.72	21.16	5.00	23.98	-2.82
5580	20 MHz	18.02	18.4	21.22	5.00	23.98	-2.75
5700	20 MHz	18.78	19.88	22.38	5.00	23.98	-1.60
5270	40 MHz	18.63	18.77	21.71	5.00	23.98	-2.27
5310	40 MHz	18.72	19.08	21.91	5.00	23.98	-2.07
5510	40 MHz	18.6	19.74	22.22	5.00	23.98	-1.76
5550	40MHz	19.63	18.86	22.27	5.00	23.98	-1.71
5670	40 MHz	19.23	19.32	22.29	5.00	23.98	-1.69


**Table 15. RF Power Output, Test Results**

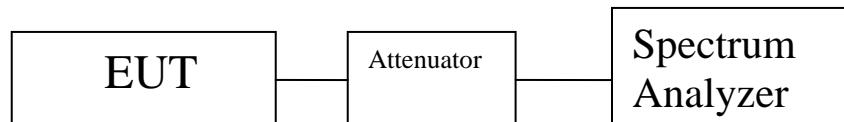


**Figure 3. Power Output Test Setup**

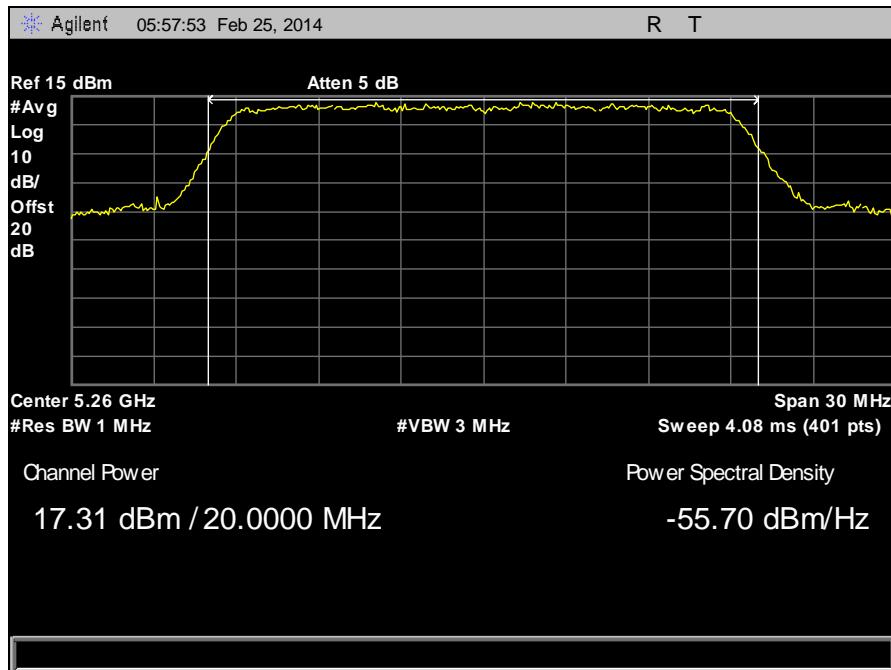


Plot 50. RF Power Output, 5260 MHz, 20 MHz, Channel 0

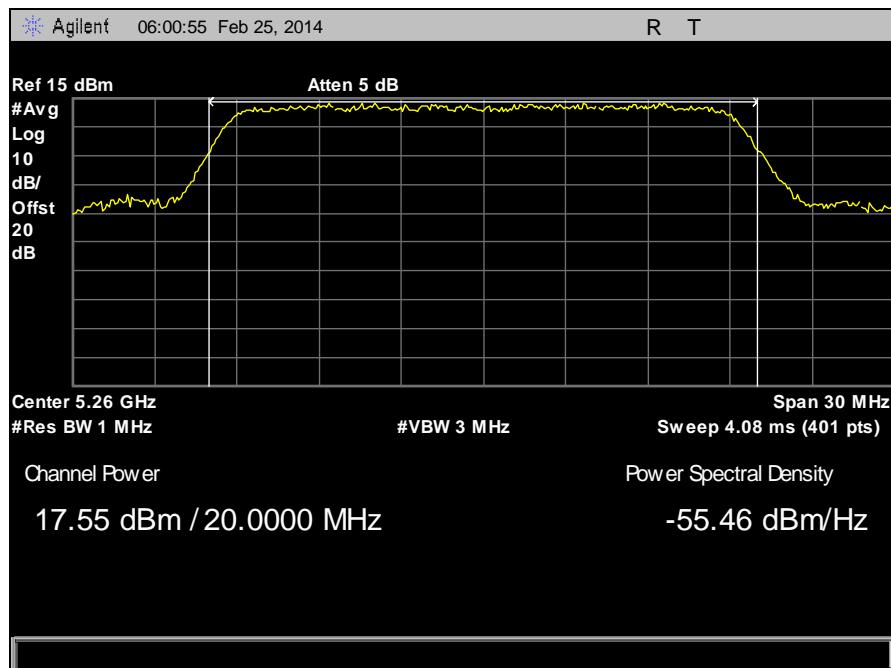


Plot 51. RF Power Output, 5260 MHz, 20 MHz, Channel 1

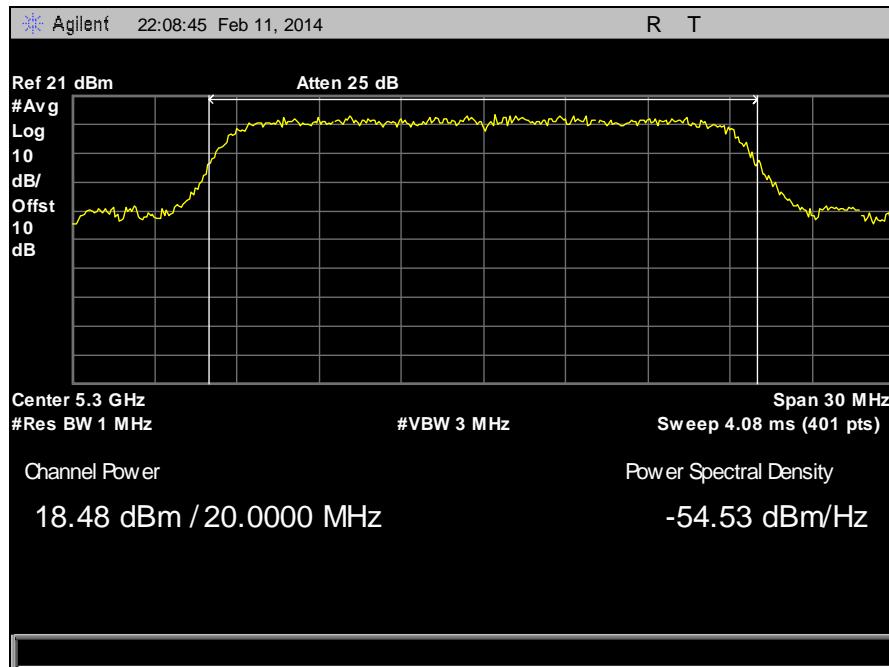


Plot 52. RF Power Output, 5300 MHz, 20 MHz, Channel 0

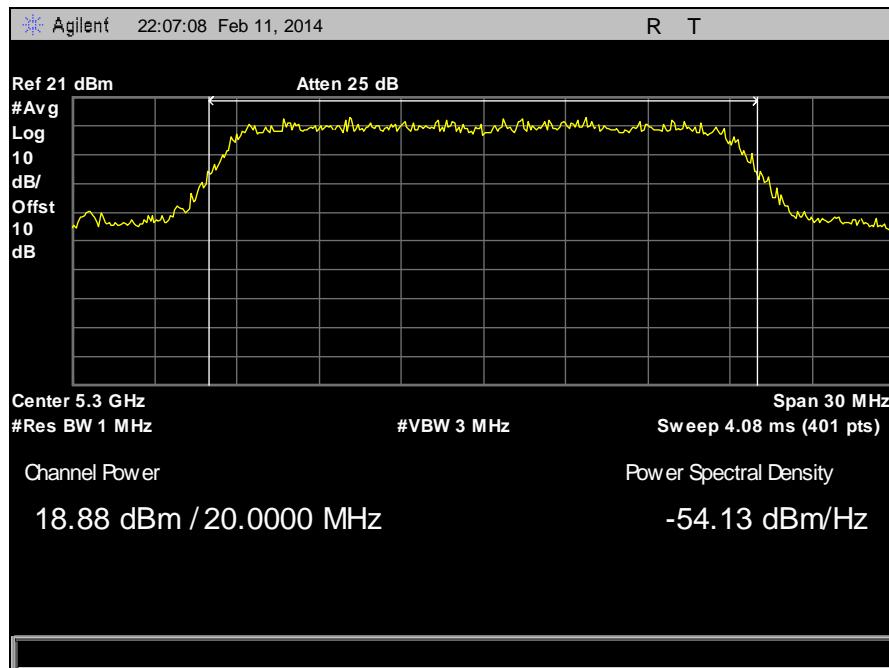


Plot 53. RF Power Output, 5300 MHz, 20 MHz, Channel 1

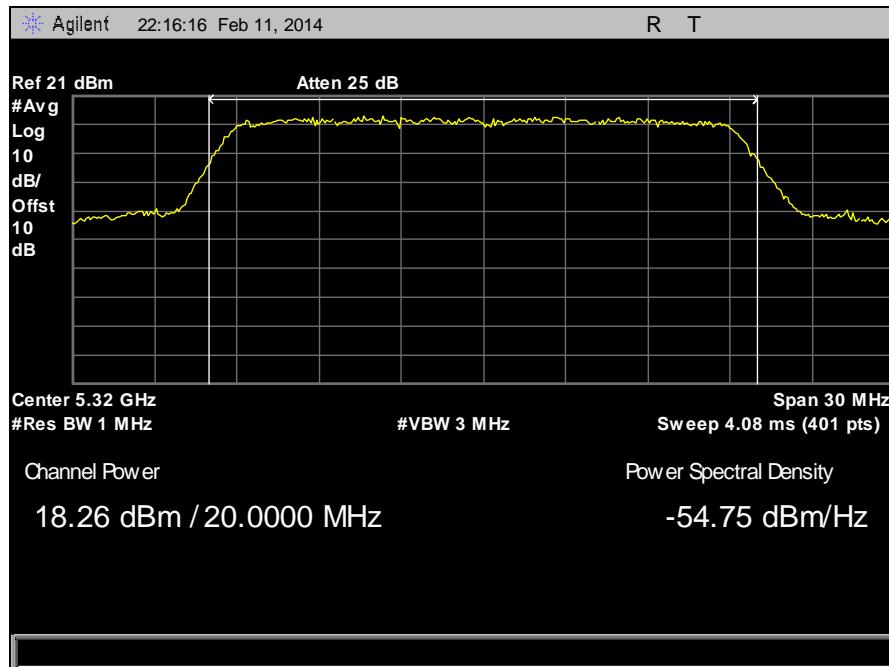


Plot 54. RF Power Output, 5320 MHz, 20 MHz, Channel 0

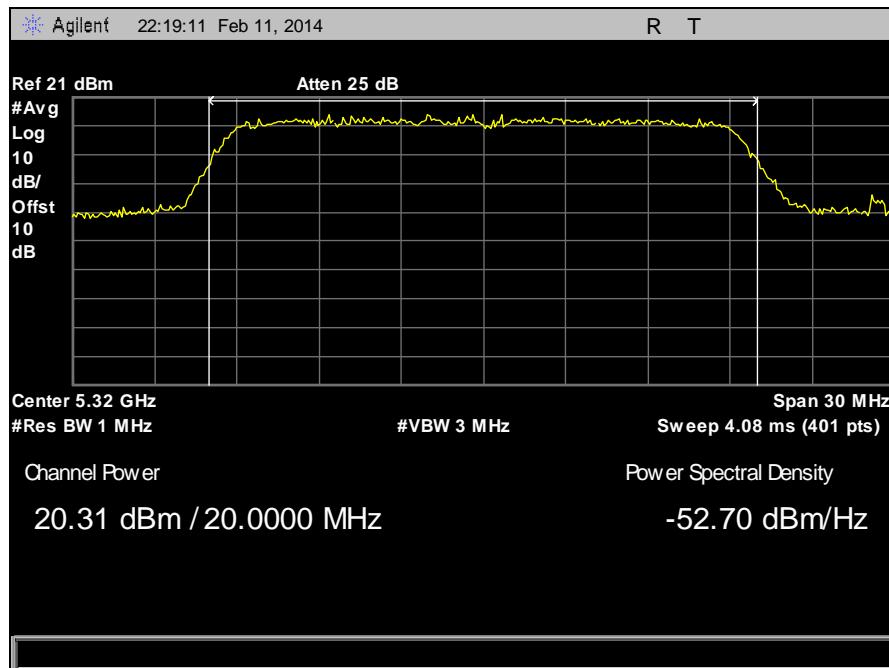


Plot 55. RF Power Output, 5320 MHz, 20 MHz, Channel 1

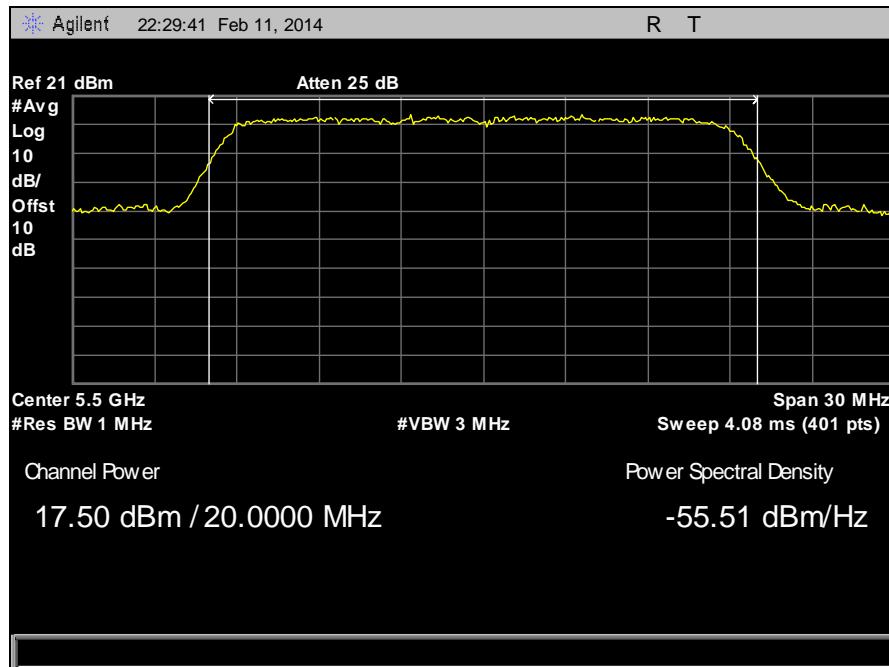


Plot 56. RF Power Output, 5500 MHz, 20 MHz, Channel 0

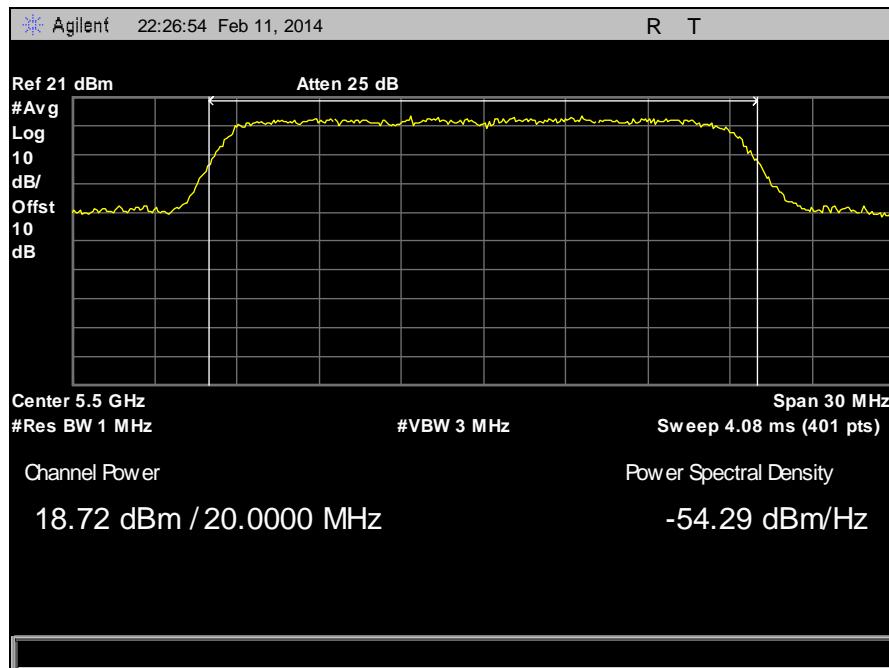


Plot 57. RF Power Output, 5500 MHz, 20 MHz, Channel 1

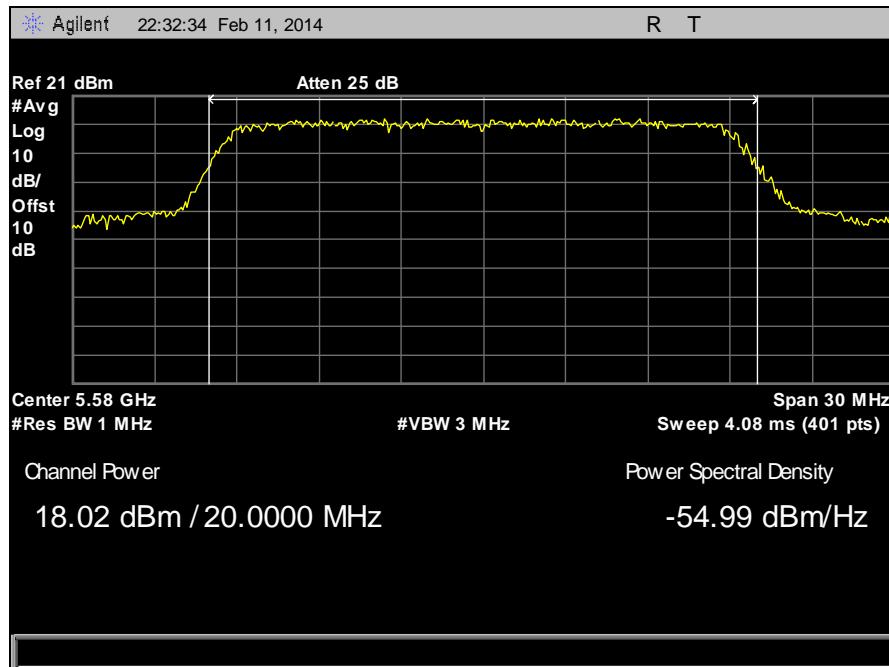


Plot 58. RF Power Output, 5580 MHz, 20 MHz, Channel 0

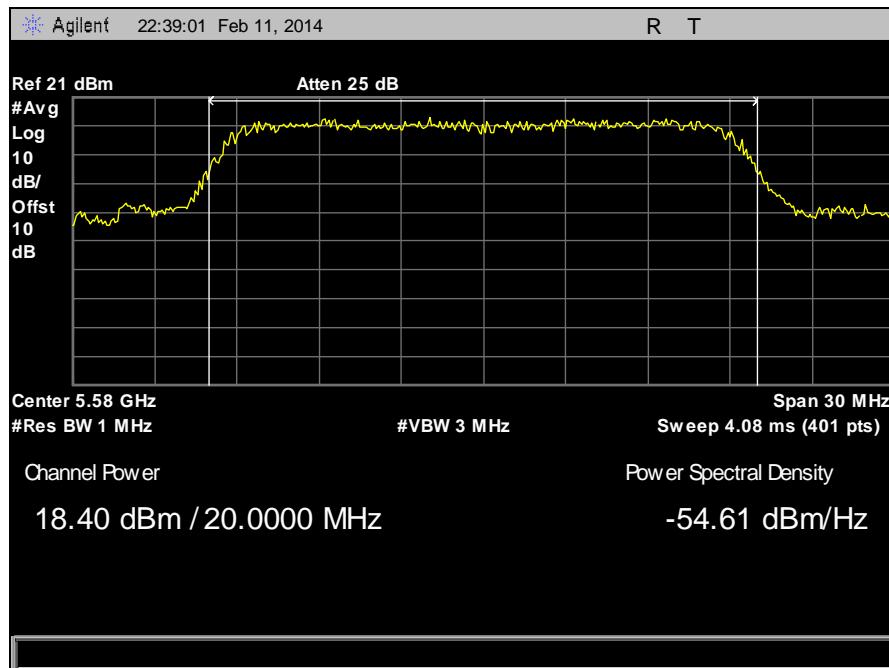


Plot 59. RF Power Output, 5580 MHz, 20 MHz, Channel 1

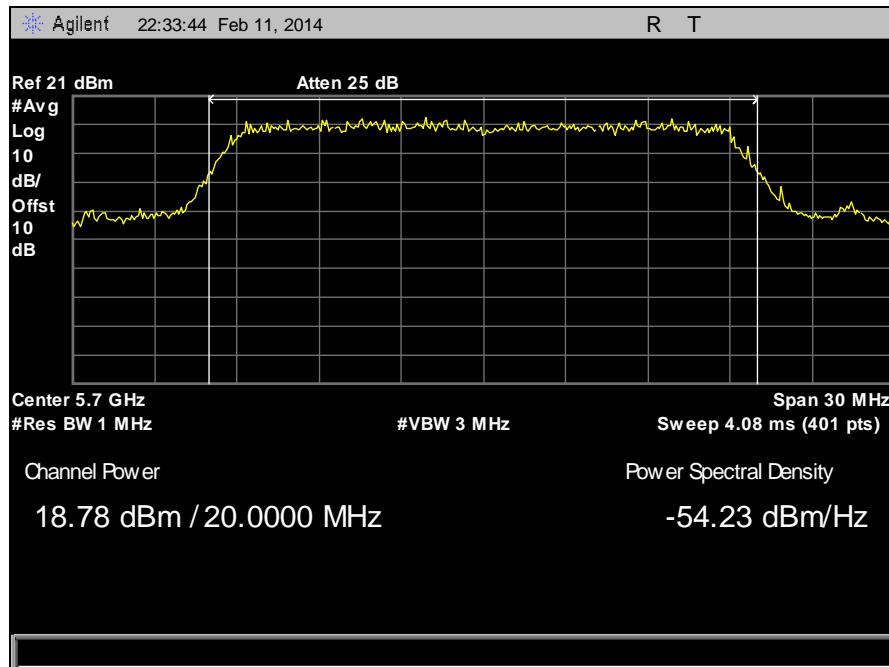


Plot 60. RF Power Output, 5700 MHz, 20 MHz, Channel 0

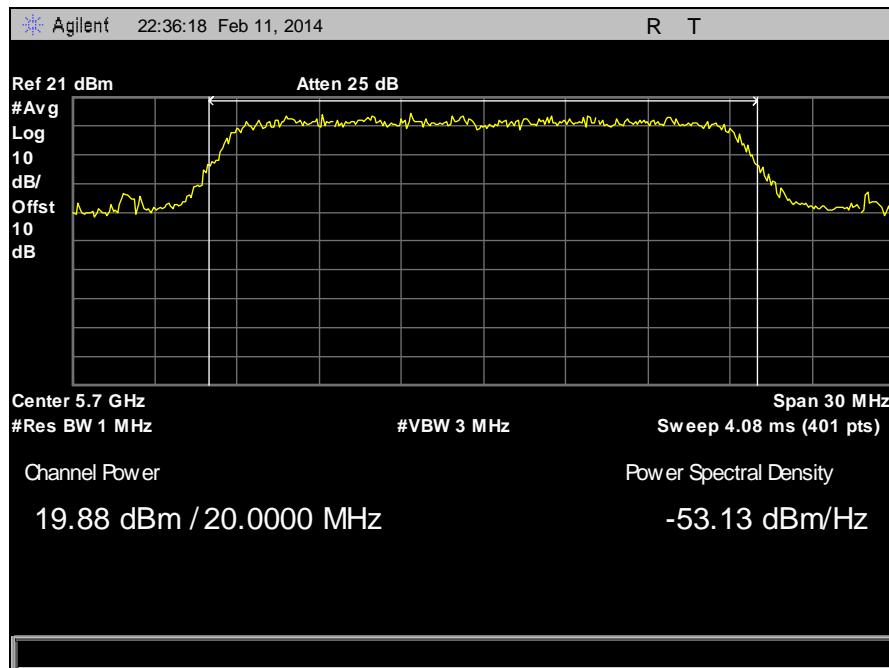


Plot 61. RF Power Output, 5700 MHz, 20 MHz, Channel 1

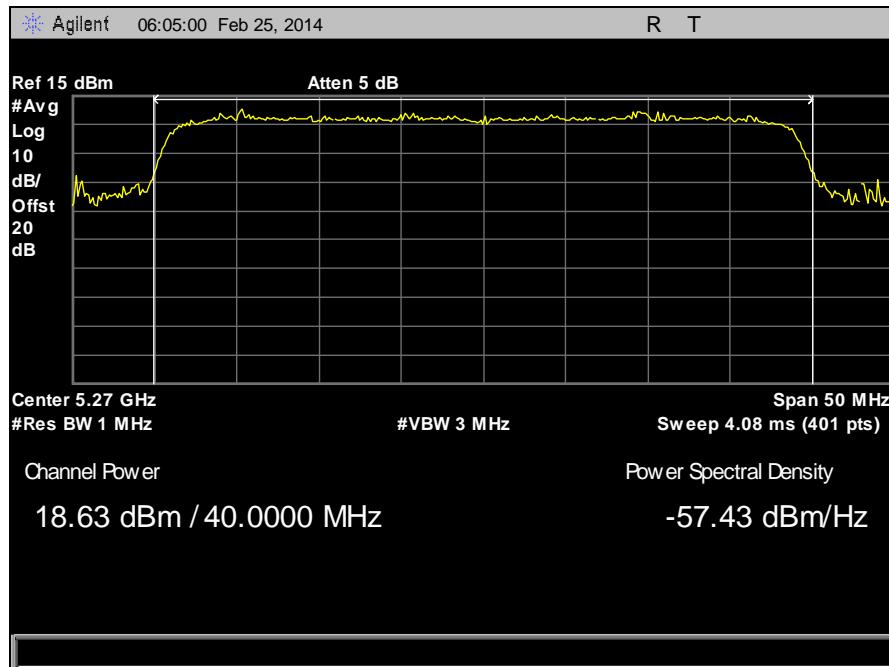


Plot 62. RF Power Output, 5270 MHz, 40 MHz, Channel 0

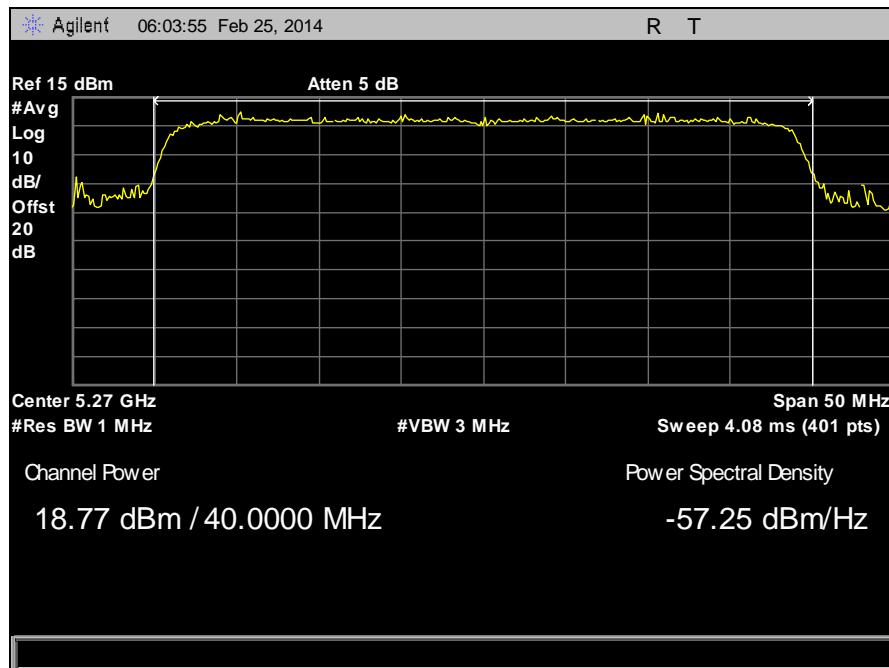


Plot 63. RF Power Output, 5270 MHz, 40 MHz, Channel 1

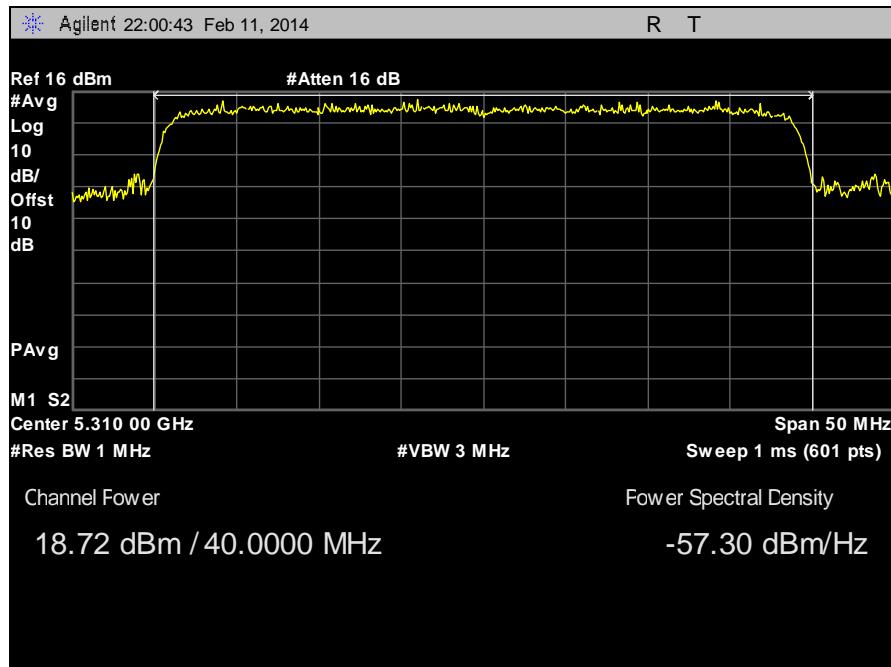


**Plot 64. RF Power Output, 5310 MHz, 40 MHz, Channel 0**

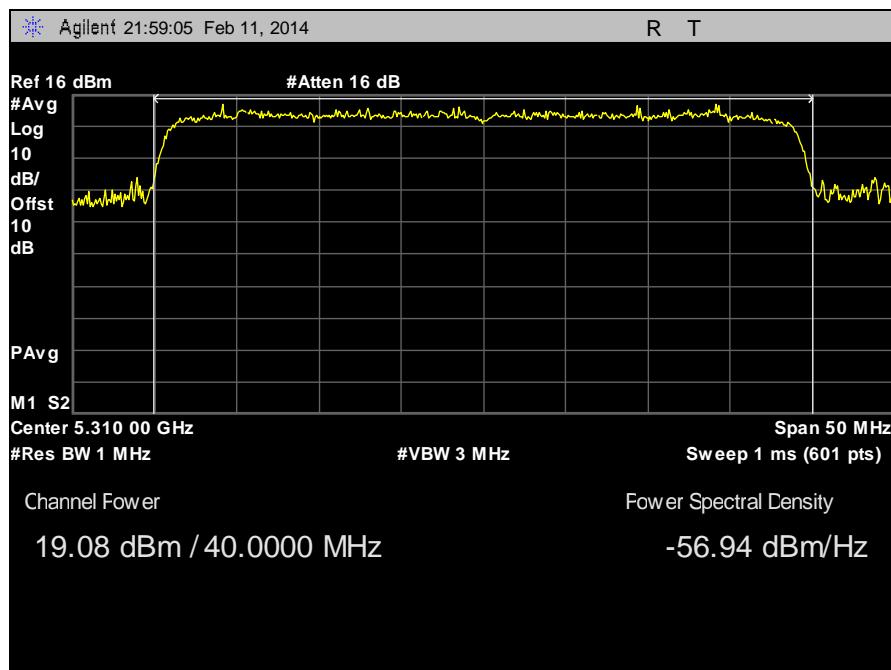


**Plot 65. RF Power Output, 40 MHz, Channel 1**

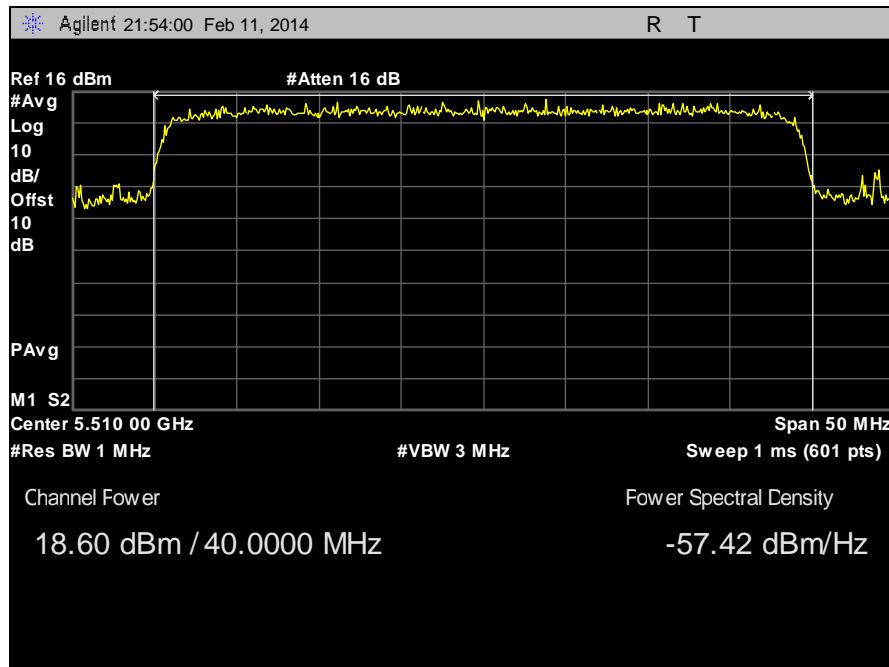


**Plot 66. RF Power Output, 5510 MHz, 40 MHz, Channel 0**

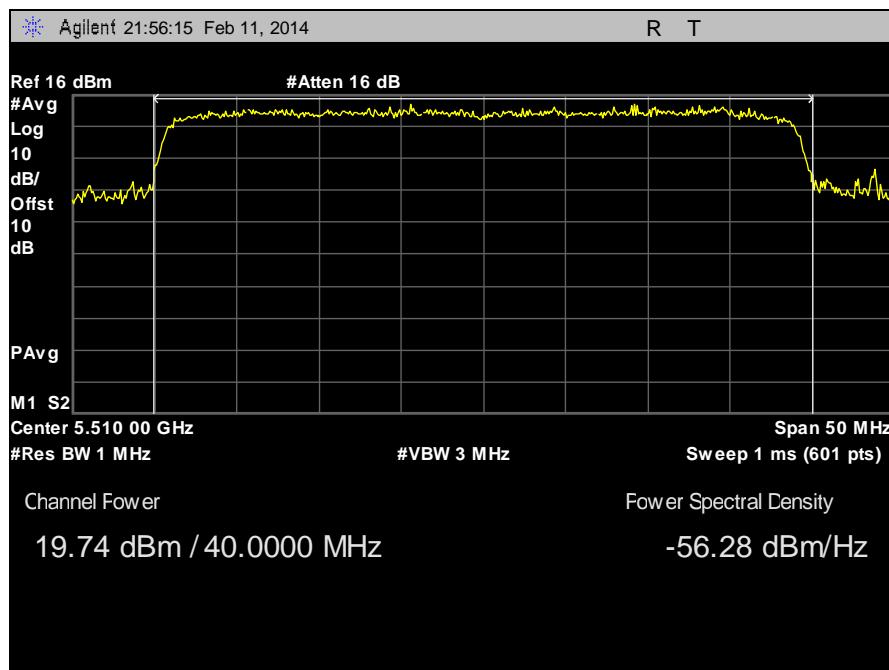


**Plot 67. RF Power Output, 5510 MHz, 40 MHz, Channel 1**

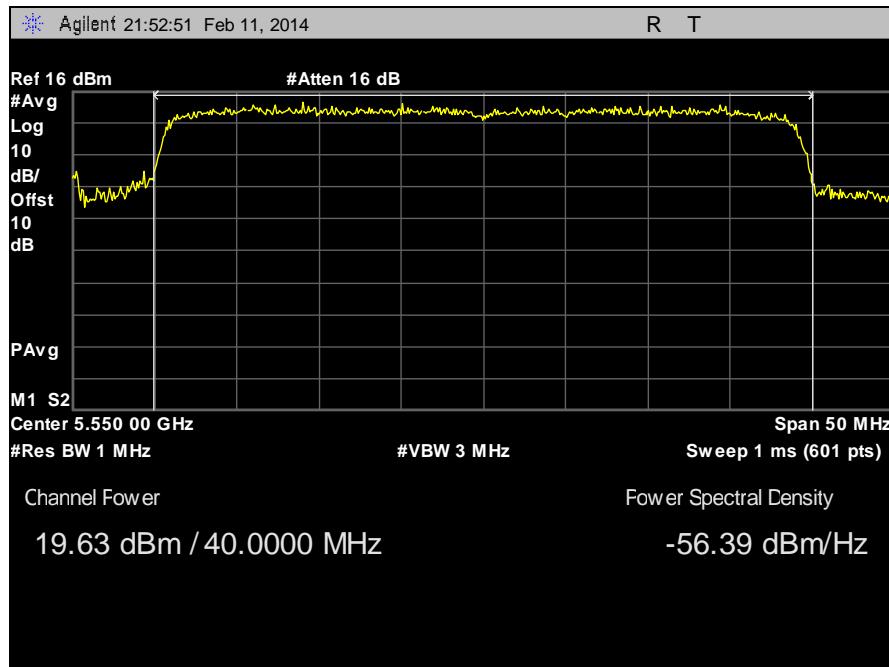


**Plot 68. RF Power Output, 5550 MHz, 40 MHz, Channel 0**

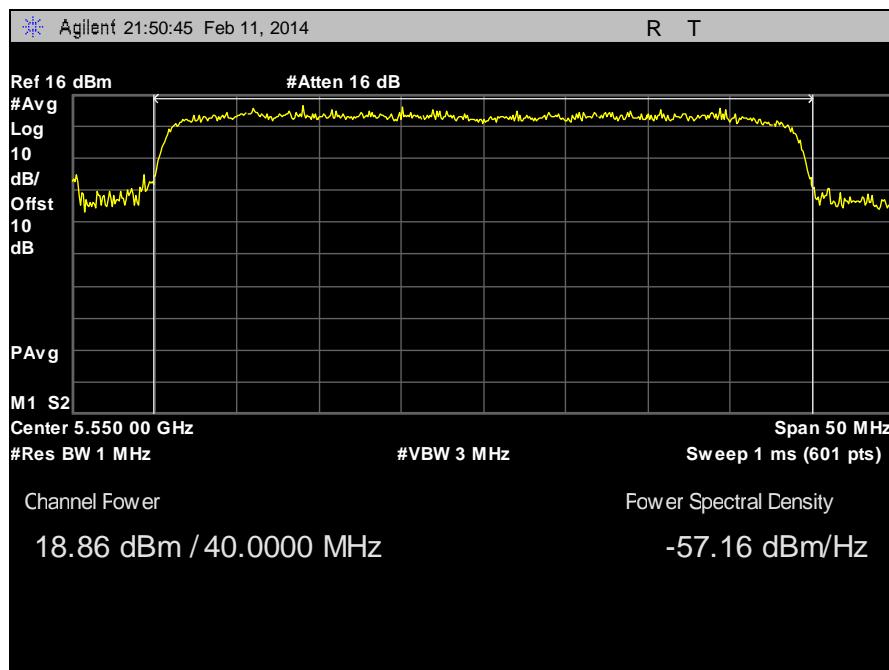

**Plot 69. RF Power Output, 5550 MHz, 40 MHz, Channel 1**

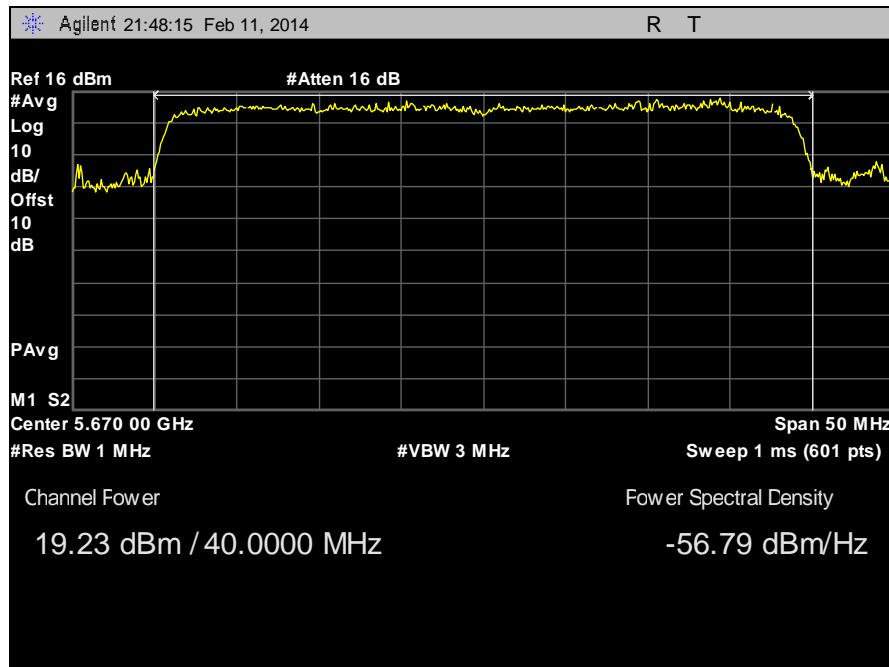

**Plot 70. RF Power Output, 5670 MHz, 40 MHz, Channel 0**

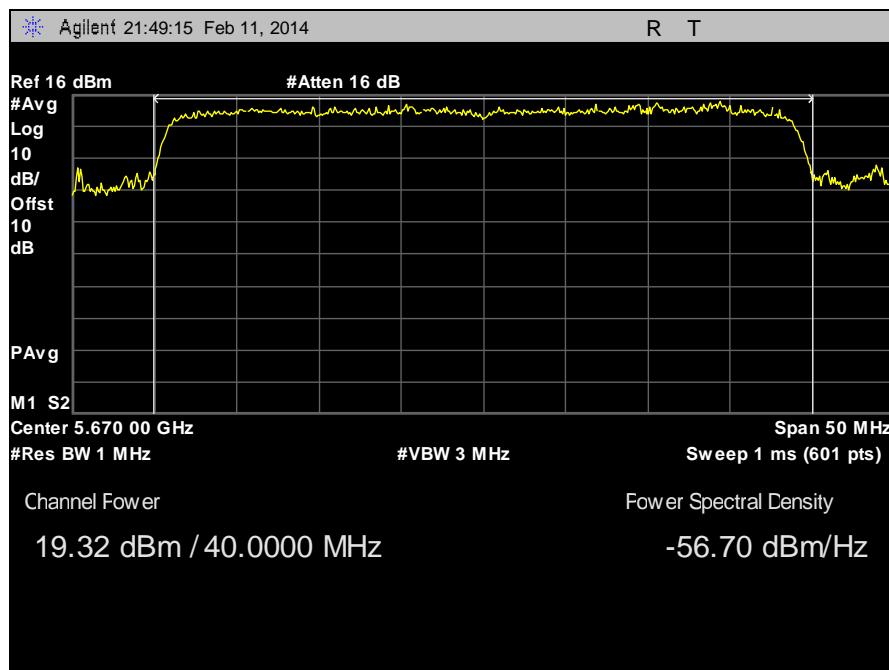

**Plot 71. RF Power Output, 5670 MHz, 40 MHz, Channel 1**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(a)(2) Peak Power Spectral Density

**Test Requirements:** **§ 15.407(a)(2):** In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.

**Test Procedure:** The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level on the EUT. The RBW was set to 1MHz and the VBW was set to 3MHz. The method of measurement SA-1 from FCC Publication 789033 was used.

**Test Results:** Equipment was compliant with the peak power spectral density limits of **§ 15.407 (a)(2)**. The peak power spectral density was determined from plots on the following page(s).

**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/13/13


Frequency (MHz)	Bandwidth	Channel 0 PSD (dBm)	Channel 1 PSD (dBm)	Summed PSD (dBm)	Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
5260	20 MHz	4.57	6.47	8.63	5.00	11.00	-2.37
5300	20 MHz	5.25	6.07	8.69	5.00	11.00	-2.31
5320	20 MHz	5.16	6.34	8.80	5.00	11.00	-2.20
5500	20 MHz	4.71	5.16	7.95	5.00	11.00	-3.05
5580	20 MHz	5.28	6.40	8.89	5.00	11.00	-2.11
5700	20 MHz	5.44	7.11	9.37	5.00	11.00	-1.63
5270	40 MHz	3.18	3.70	6.46	5.00	11.00	-4.54
5310	40 MHz	4.57	4.27	7.43	5.00	11.00	-3.57
5510	40 MHz	3.843	3.804	6.83	5.00	11.00	-4.17
5550	40 MHz	3.681	3.904	6.80	5.00	12.00	-5.20
5670	40 MHz	3.261	3.975	6.64	5.00	11.00	-4.36

**Table 16. Power Spectral Density, Test Results**




**Figure 4. Power Spectral Density Test Setup**


## Electromagnetic Compatibility Criteria for Intentional Radiators

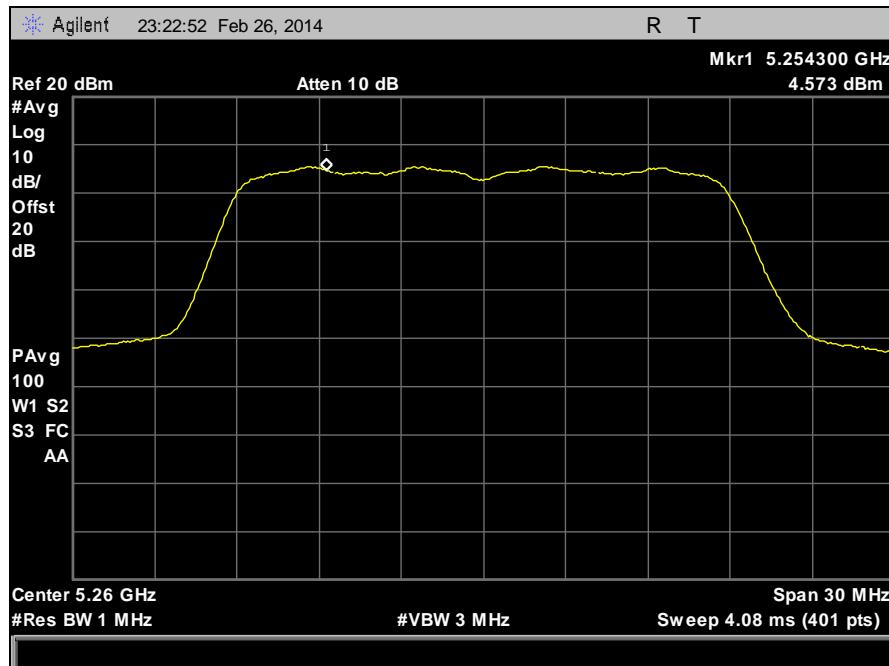


Plot 72. Power Spectral Density, 5260 MHz, 20 MHz, Channel 0

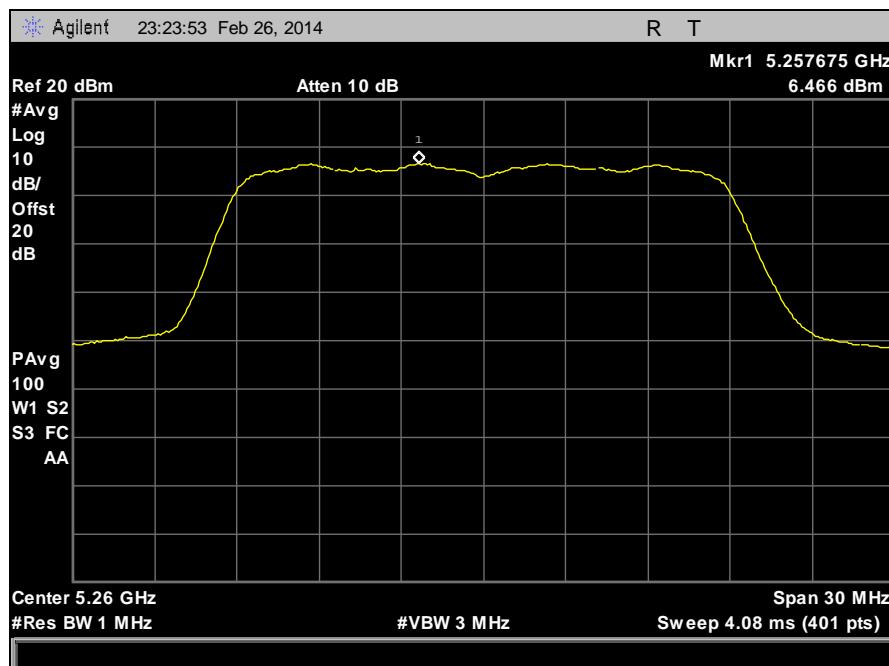


Plot 73. Power Spectral Density, 5260 MHz, 20 MHz, Channel 1

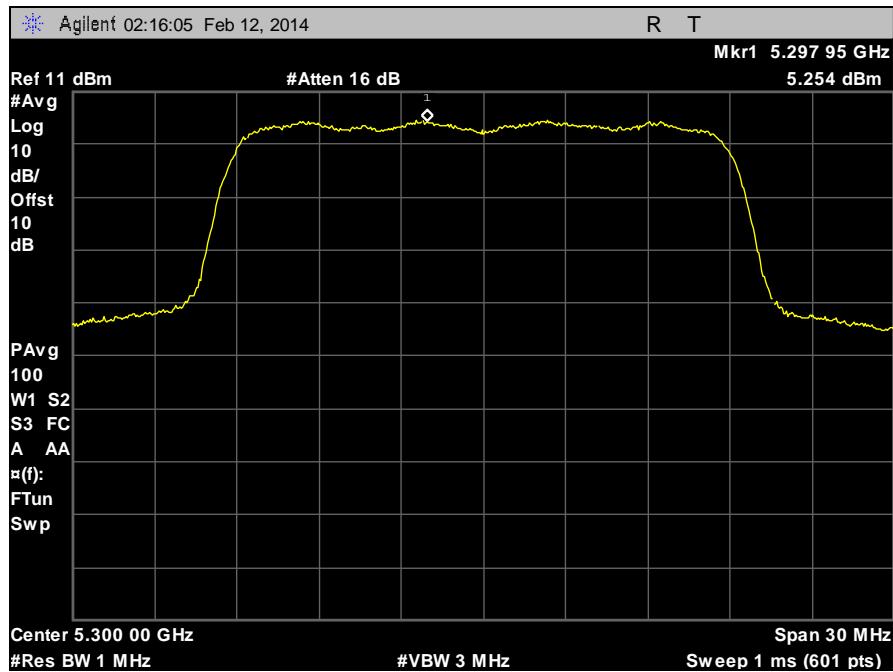


Plot 74. Power Spectral Density, 5300 MHz, 20 MHz, Channel 0

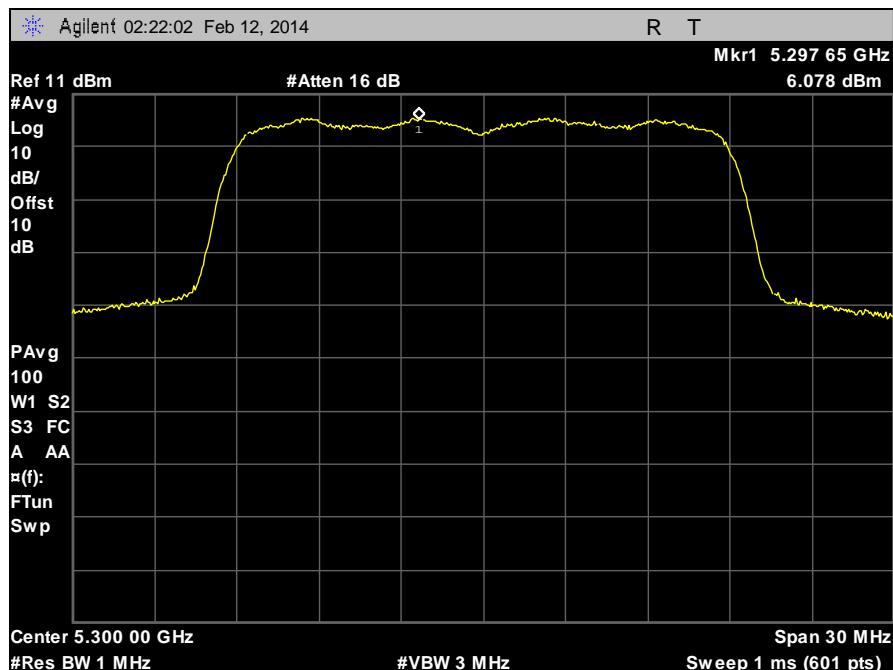


Plot 75. Power Spectral Density, 5300 MHz, 20 MHz, Channel 1

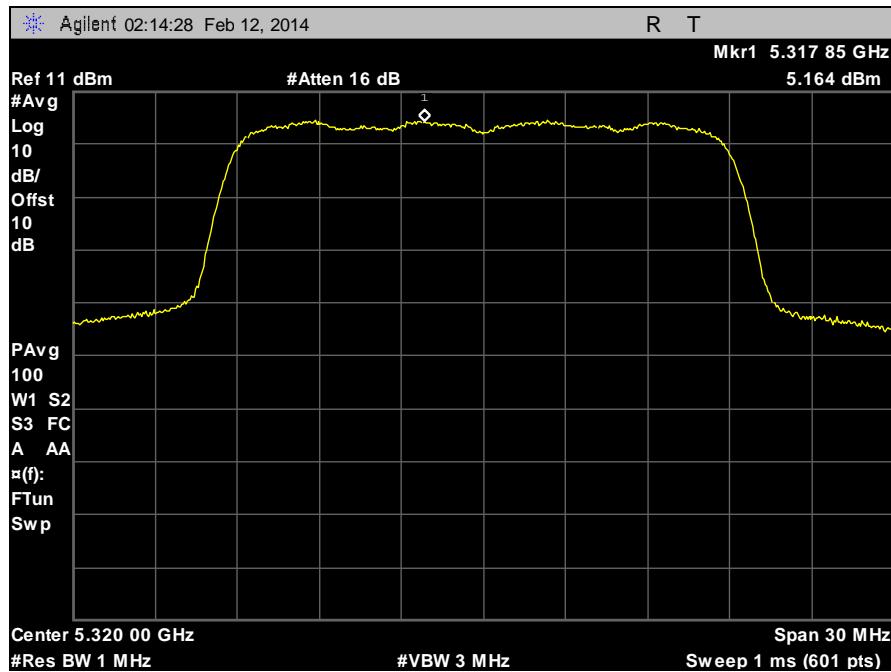


Plot 76. Power Spectral Density, 5320 MHz, 20 MHz, Channel 0

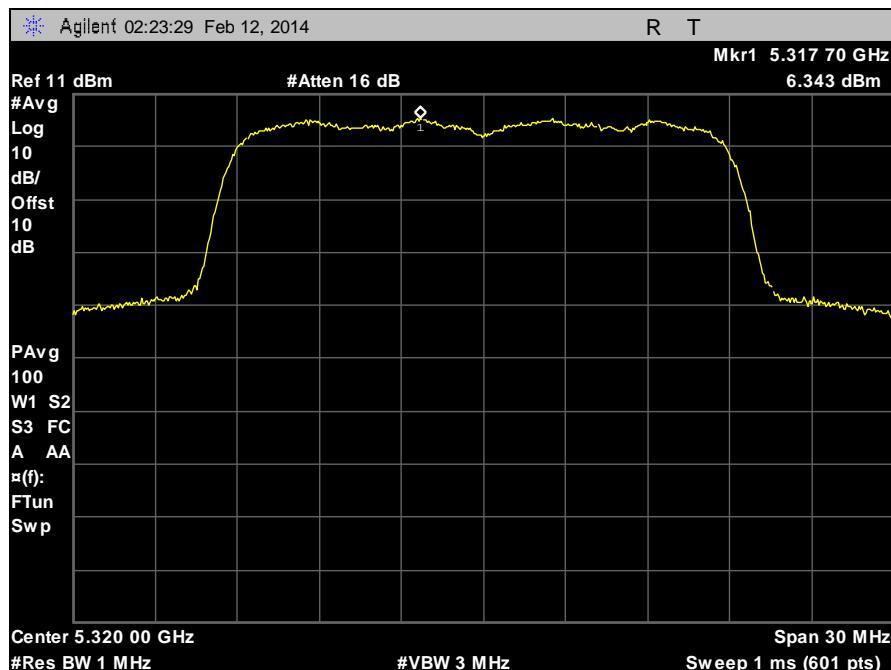


Plot 77. Power Spectral Density, 5320 MHz, 20 MHz, Channel 1

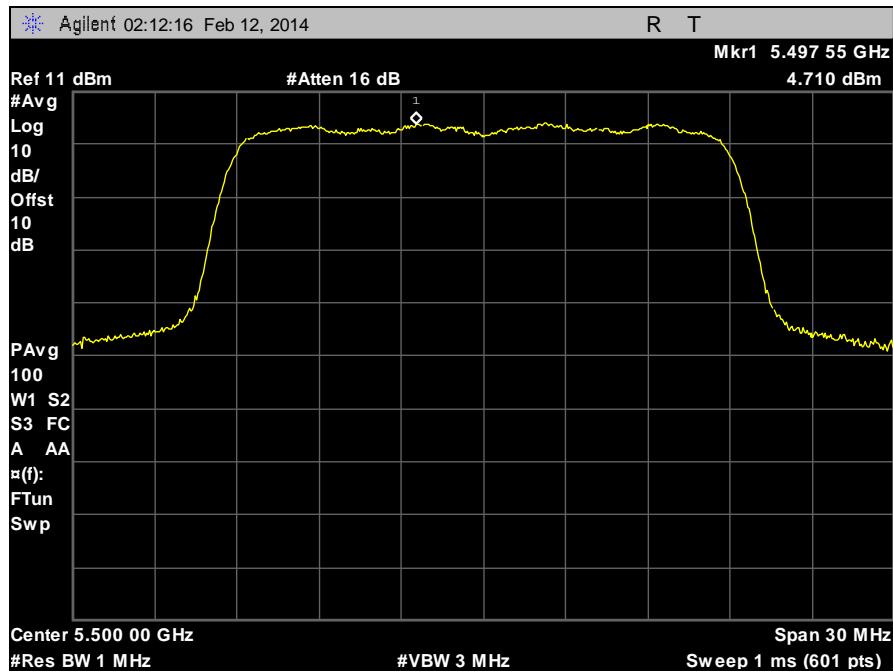


Plot 78. Power Spectral Density, 5500 MHz, 20 MHz, Channel 0

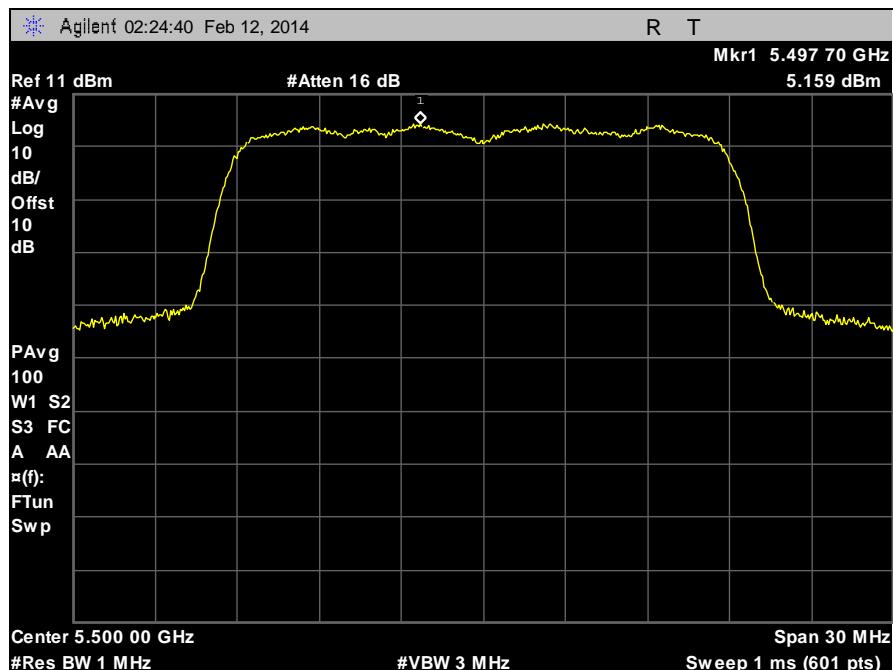


Plot 79. Power Spectral Density, 5500 MHz, 20 MHz, Channel 1

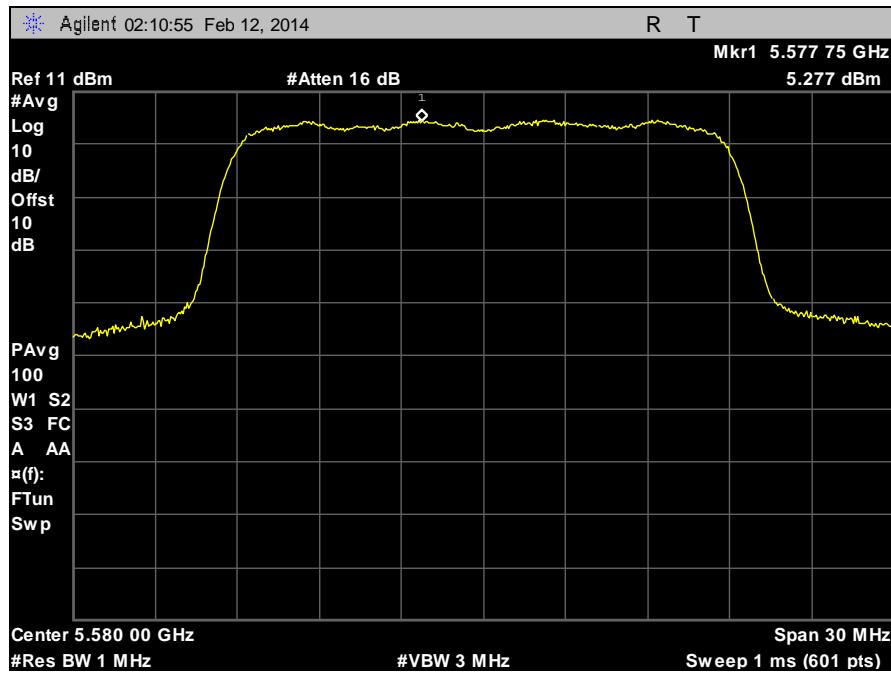


Plot 80. Power Spectral Density, 5580 MHz, 20 MHz, Channel 0

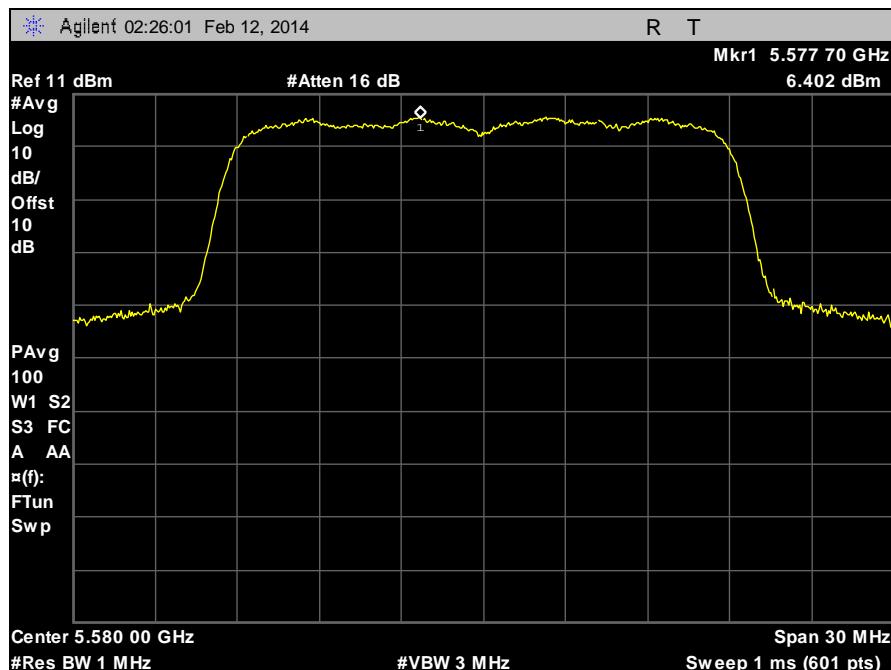


Plot 81. Power Spectral Density, 5580 MHz, 20 MHz, Channel 0

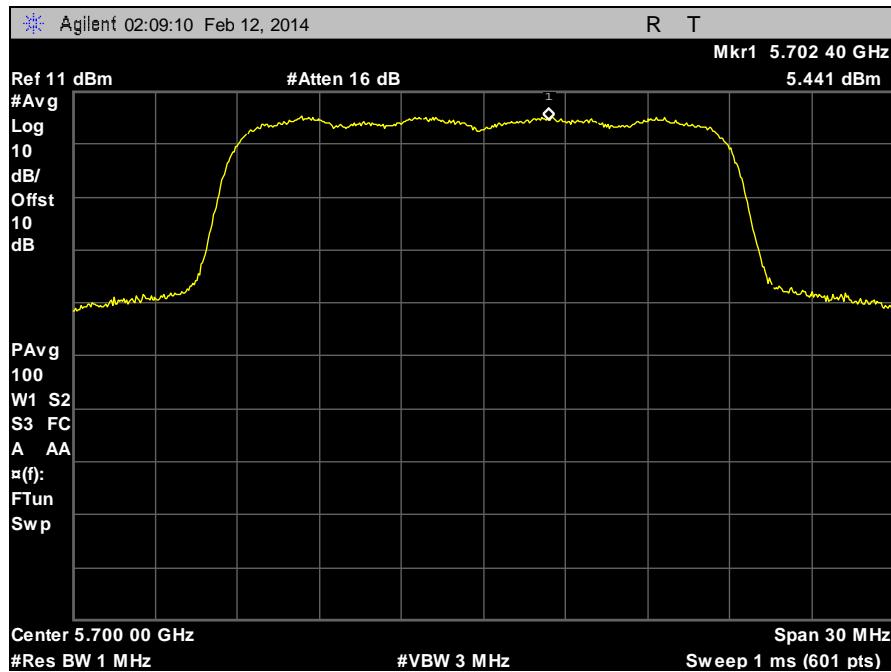


Plot 82. Power Spectral Density, 5700 MHz, 20 MHz, Channel 0

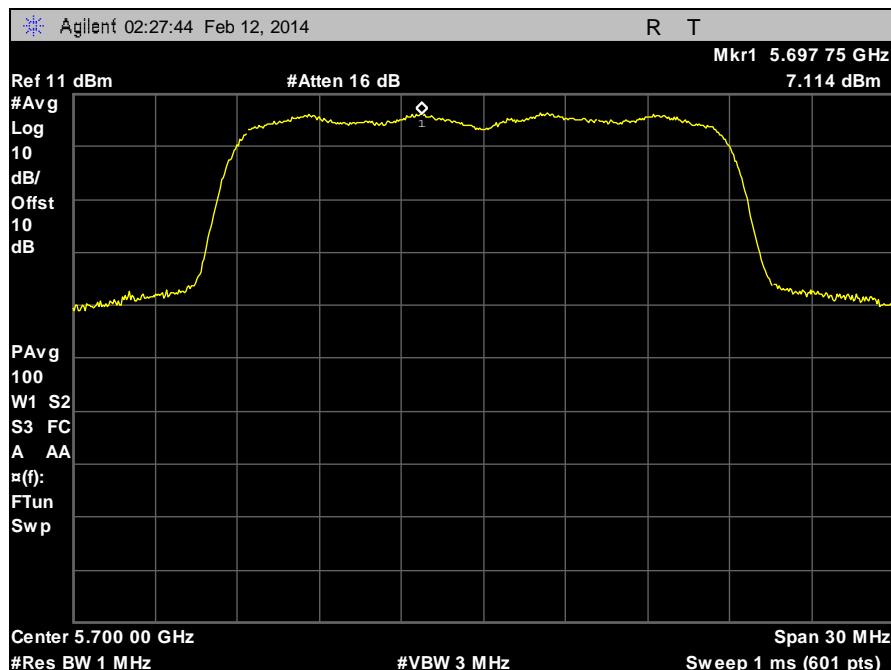


Plot 83. Power Spectral Density, 5700 MHz, 20 MHz, Channel 1

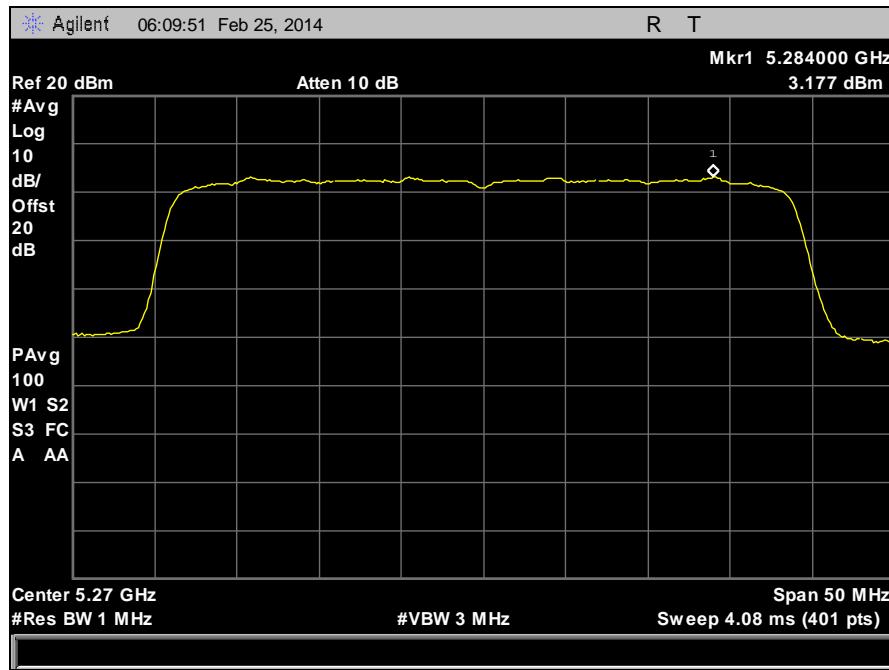


Plot 84. Power Spectral Density, 5270 MHz, 40 MHz, Channel 0

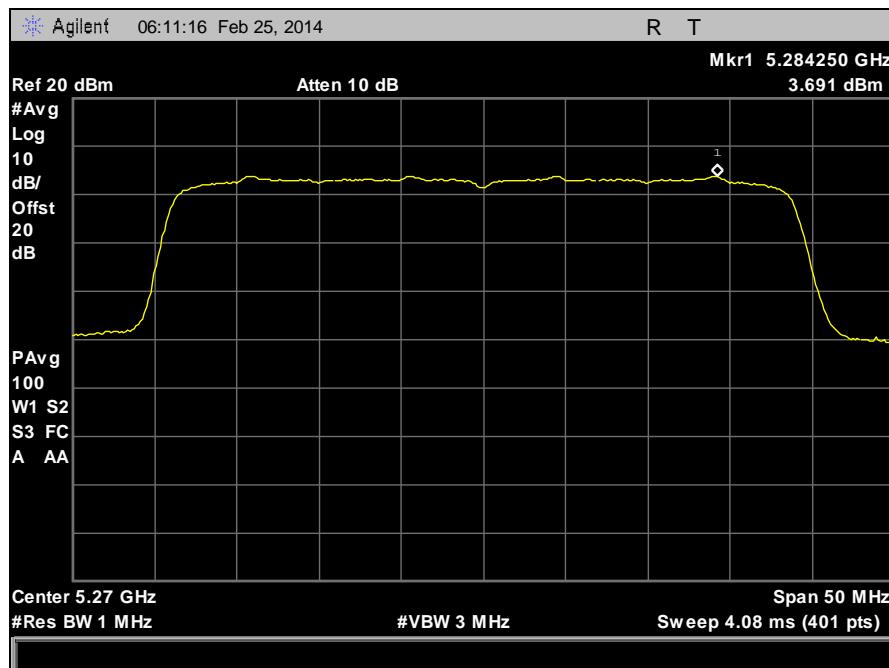


Plot 85. Power Spectral Density, 5270 MHz, 40 MHz, Channel 1

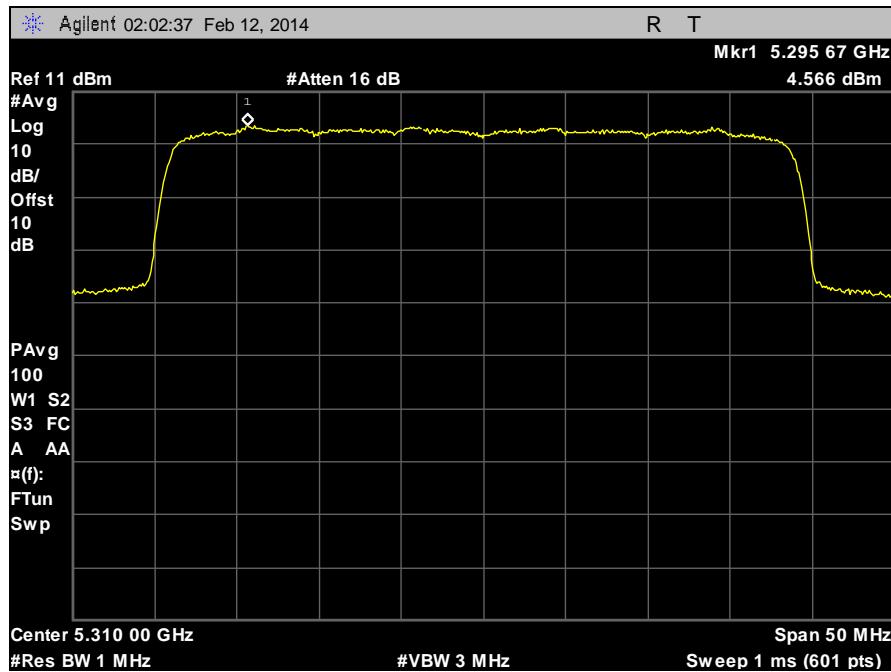


Plot 86. Power Spectral Density, 5310 MHz, 40 MHz, Channel 0

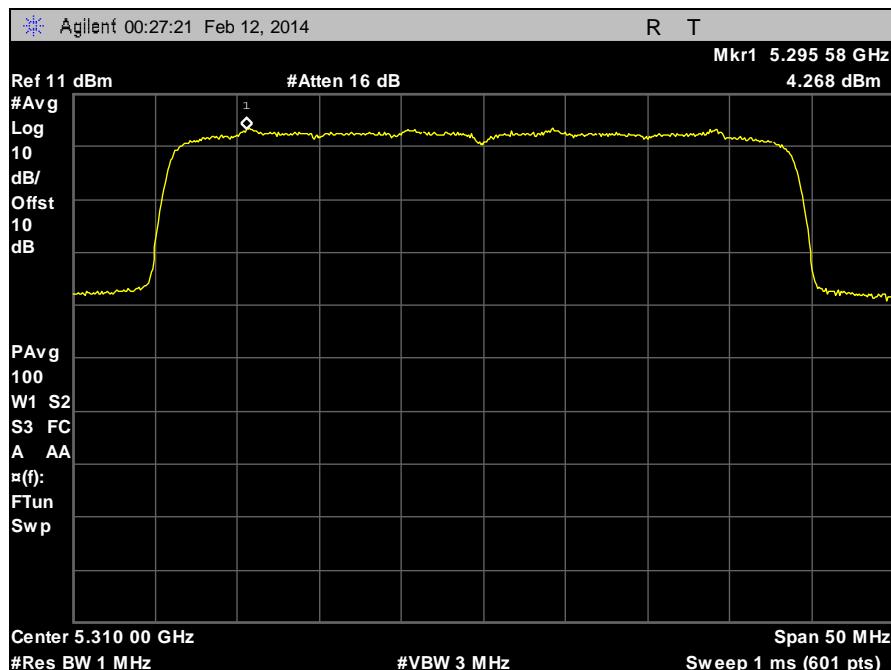


Plot 87. Power Spectral Density, 5310 MHz, 40 MHz, Channel 1

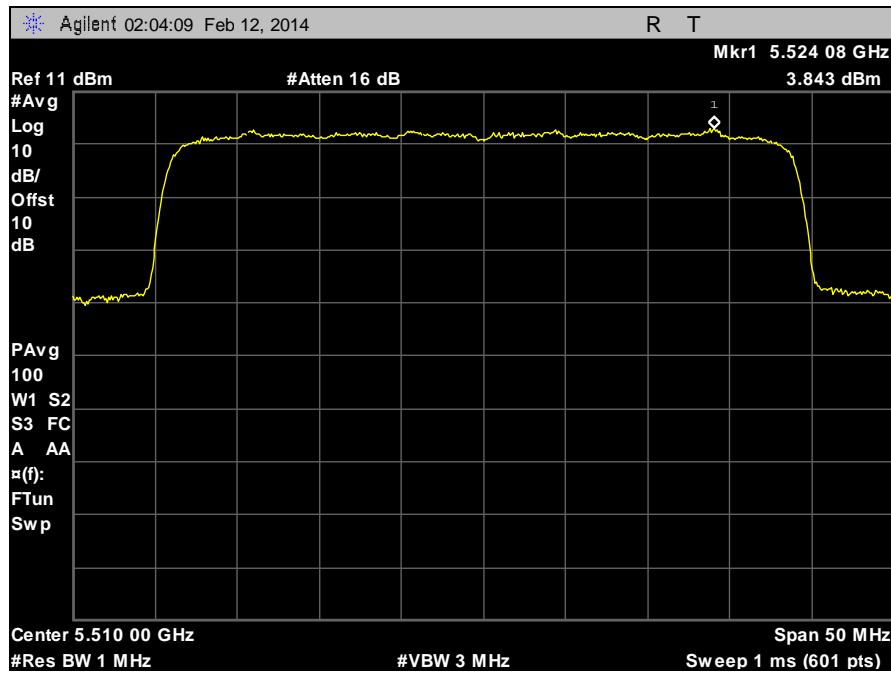


Plot 88. Power Spectral Density, 5510 MHz, 40 MHz, Channel 0

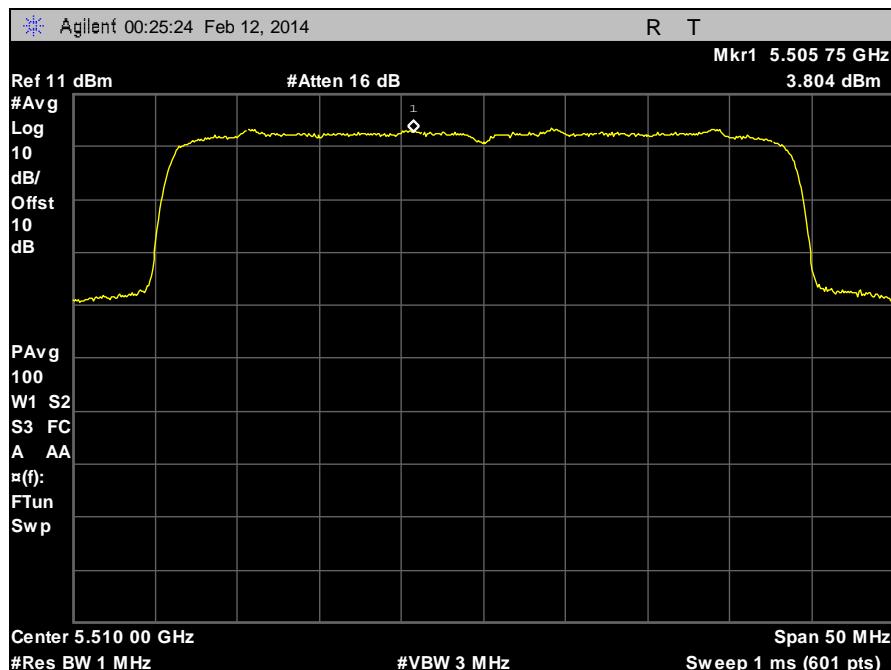


Plot 89. Power Spectral Density, 5510 MHz, 40 MHz, Channel 1

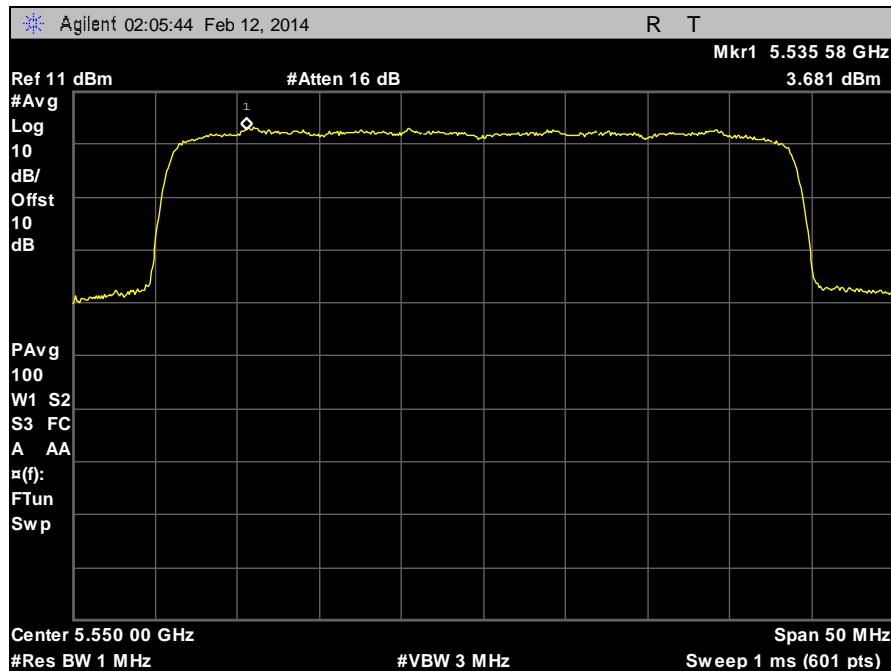


Plot 90. Power Spectral Density, 5550 MHz, 40 MHz, Channel 0

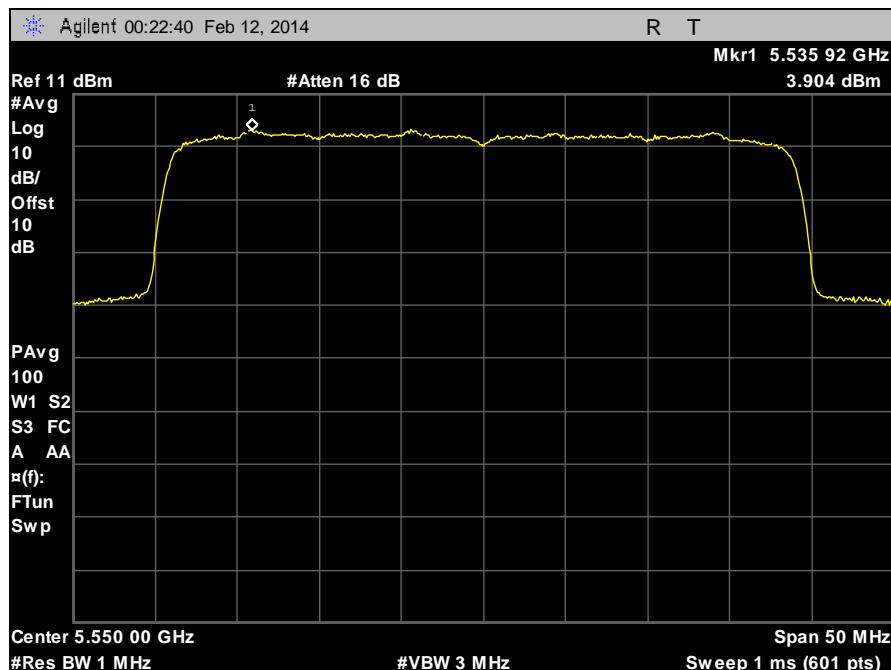

Plot 91. Power Spectral Density, 5550 MHz, 40 MHz, Channel 1

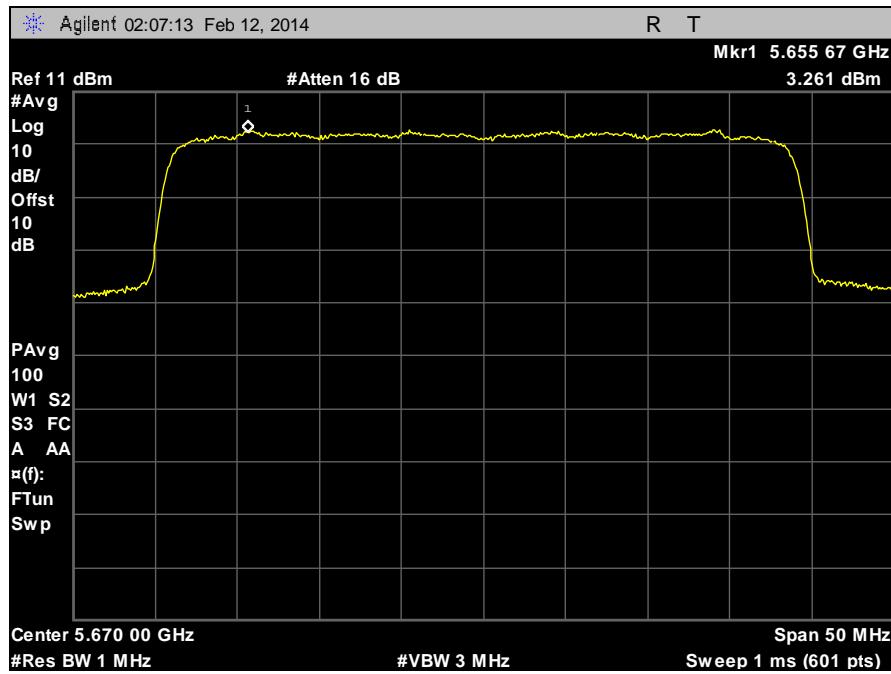

Plot 92. Power Spectral Density, 5670 MHz, 40 MHz, Channel 0

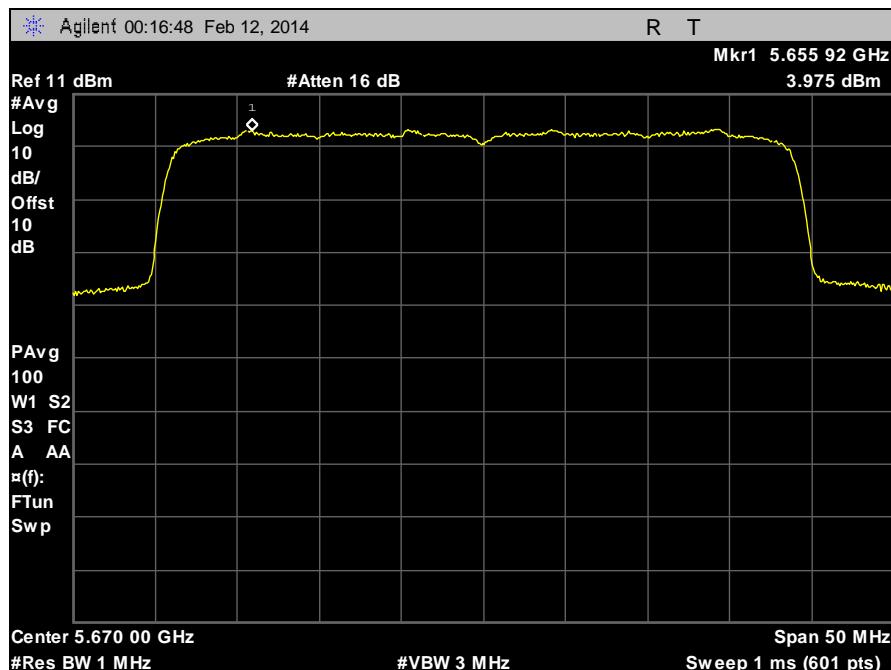

Plot 93. Power Spectral Density, 5670 MHz, 40 MHz, Channel 1

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b)(2), (3), (6), (7) Undesirable Emissions

**Test Requirements:** § 15.407(b)(2), (3), (6), (7); §15.205: Emissions outside the frequency band.

**§ 15.407(b)(2):** For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

**§ 15.407(b)(3):** For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

**§ 15.407(b)(6):** Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

**§ 15.407(b)(7):** The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** The transmitter was placed on an acrylic stand inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Emissions were explored up to 40 GHz. Only noise floor was observed above 18GHz.

The equation, **EIRP= E + 20 log D – 104.8** was used to convert an EIRP limit to a field strength limit.

E = field strength (dBuV/m)


D = Reference measurement distance

**Test Results:** The EUT was compliant with the Radiated Emission limits for Intentional Radiators. See following pages for detailed test results.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/18/13


## § 15.209 Radiated Emissions Limits

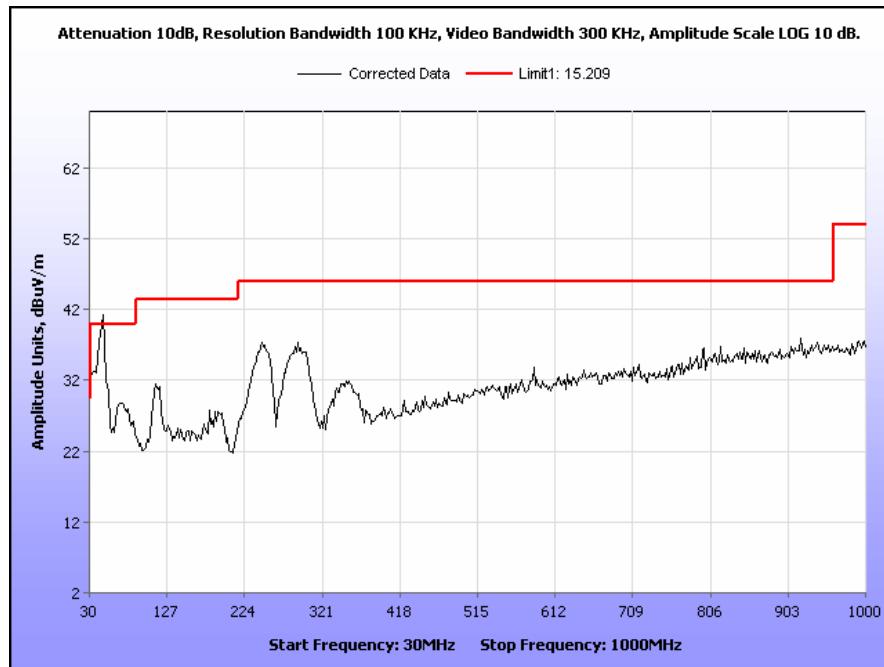


Plot 94. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 30 MHz – 1 GHz

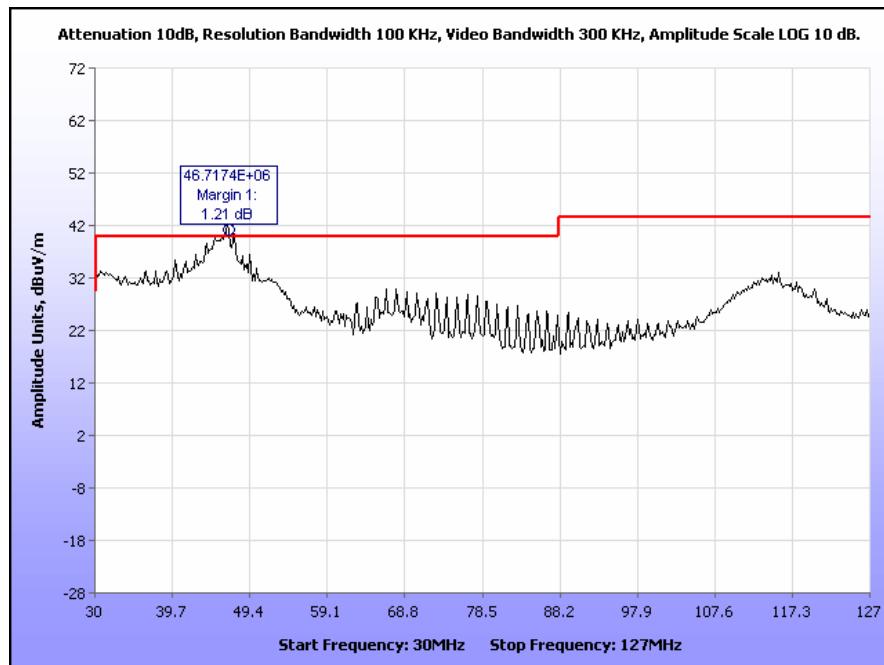


Plot 95. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 30 MHz – 1 GHz

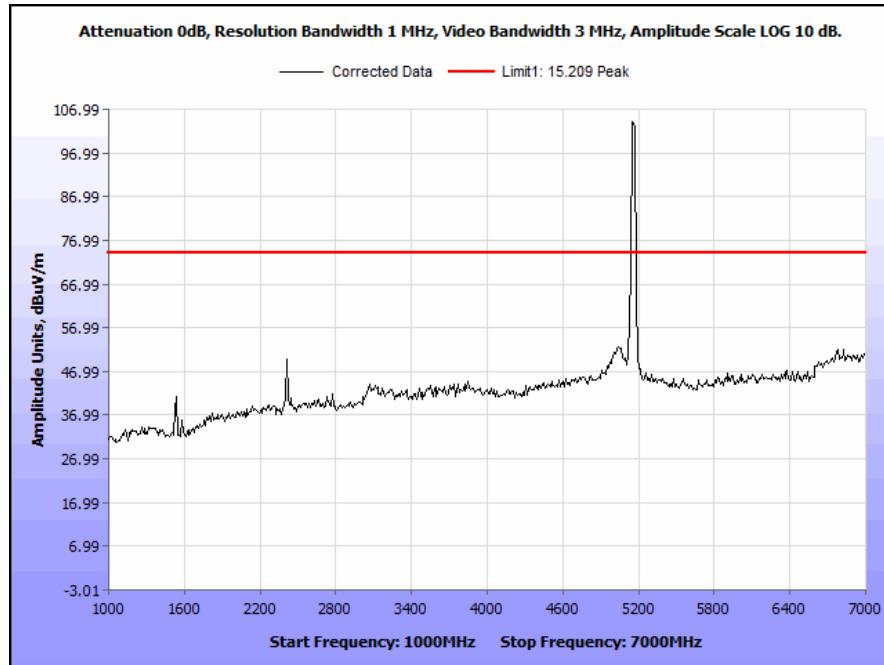


Plot 96. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 1 GHz – 7 GHz, Peak

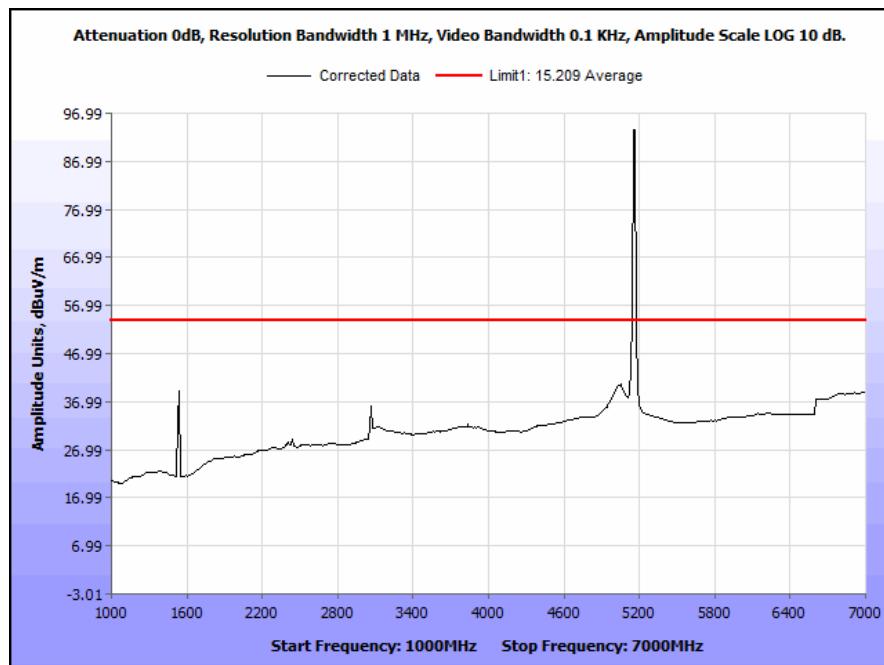


Plot 97. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 1 GHz – 7 GHz, Average

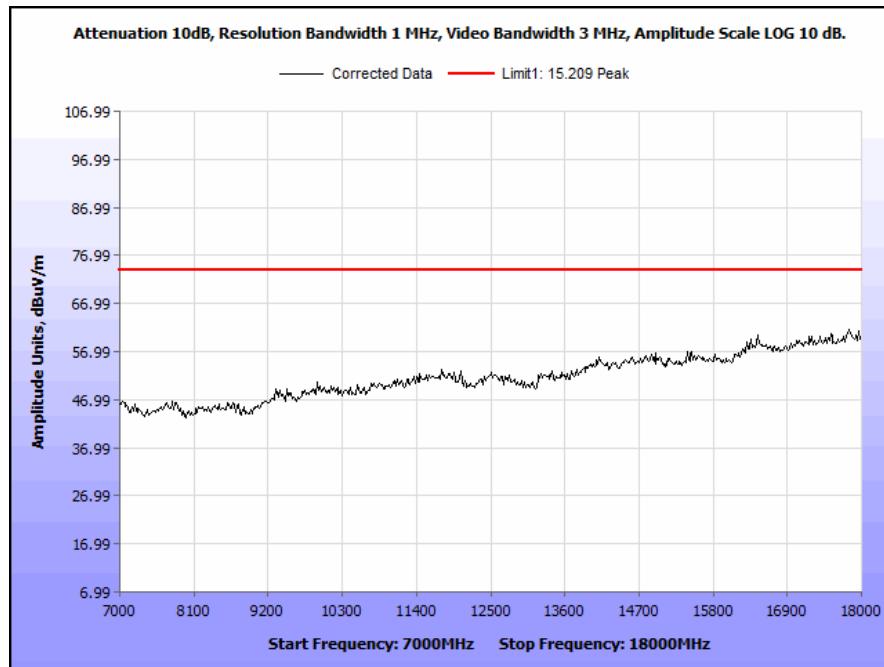


**Plot 98. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 7 GHz – 18 GHz, Peak**

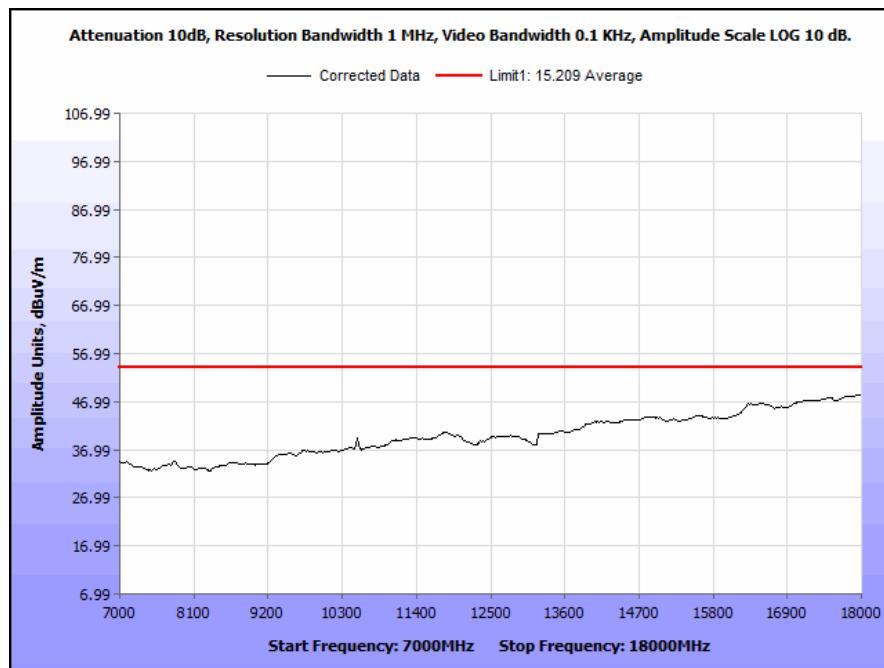


**Plot 99. Radiated Spurious Emissions, 5260 MHz, 20 MHz, 7 GHz – 18 GHz, Average**

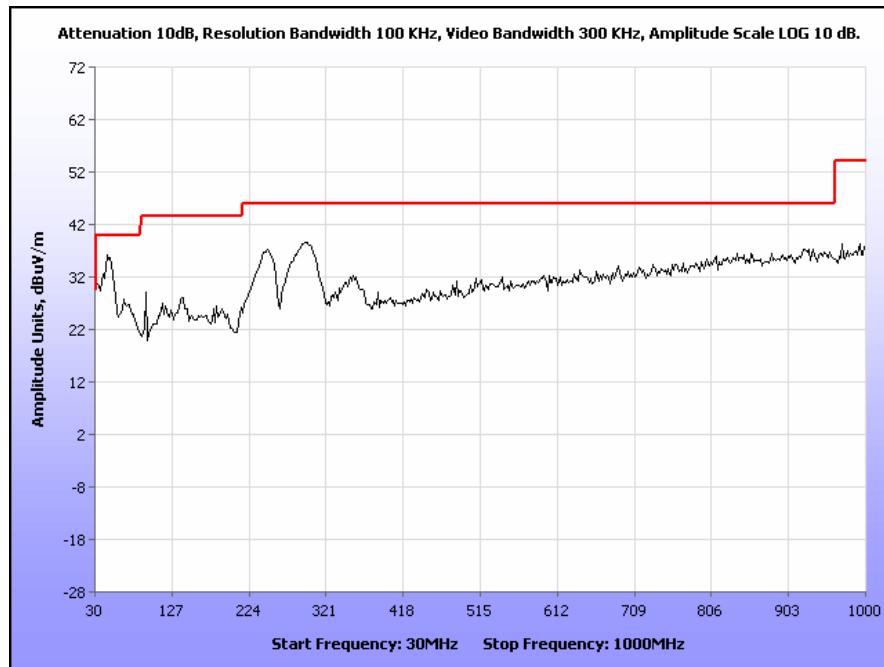


Plot 100. Radiated Spurious Emissions, 5320 MHz, 20 MHz, Tx Power 30, 30 MHz – 1 GHz

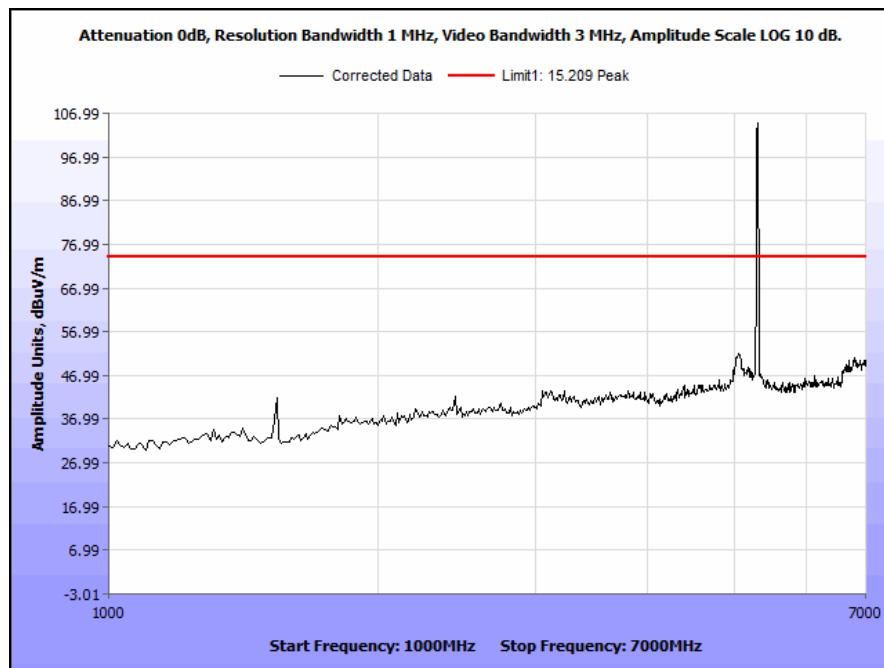


Plot 101. Radiated Spurious Emissions, 5320 MHz, 20 MHz, 1 GHz – 7 GHz, Peak

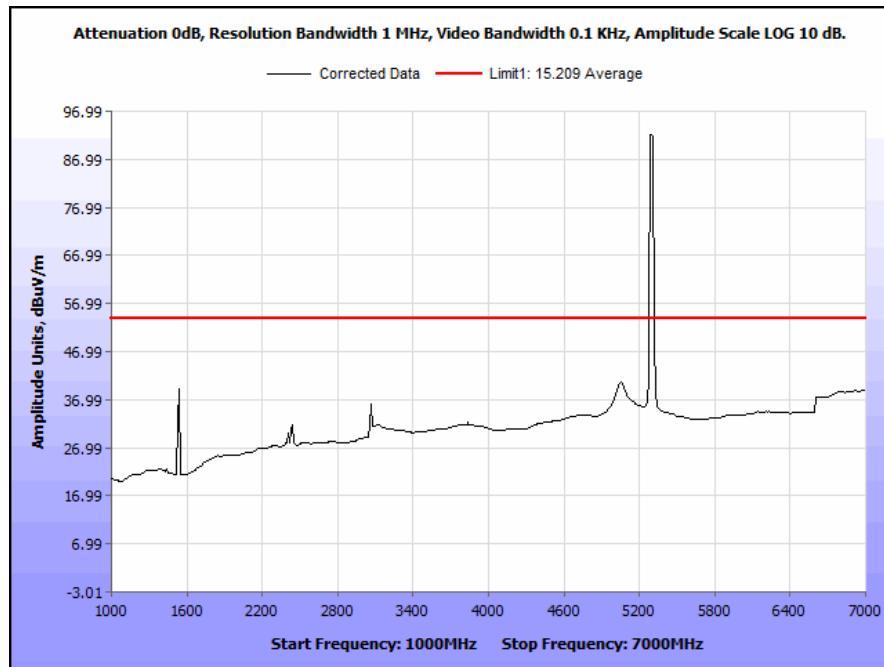


Plot 102. Radiated Spurious Emissions, 5320 MHz, 20 MHz, 1 GHz – 7 GHz, Average

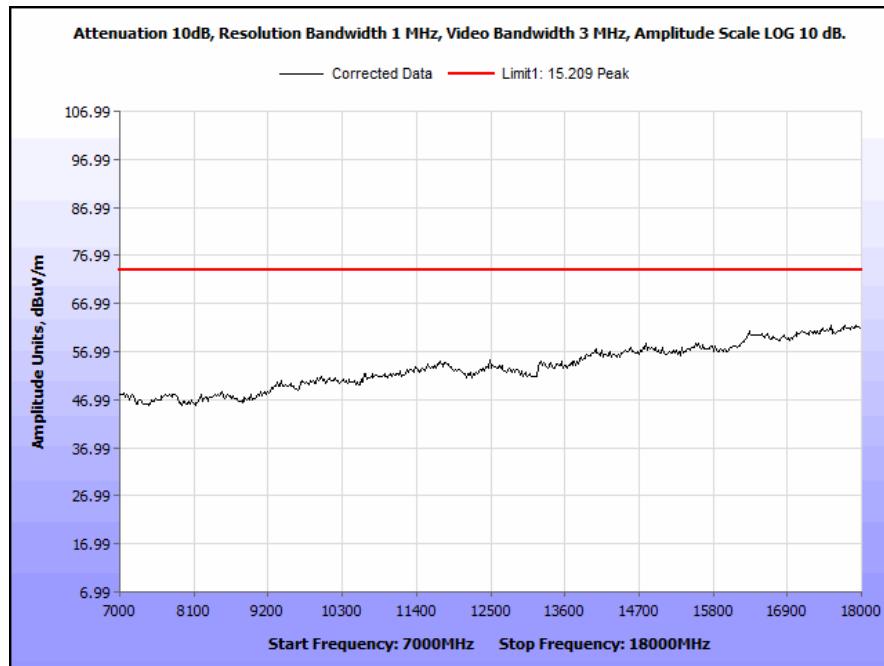


Plot 103. Radiated Spurious Emissions, 5320 MHz, 20 MHz, 7 GHz – 18 GHz, Peak

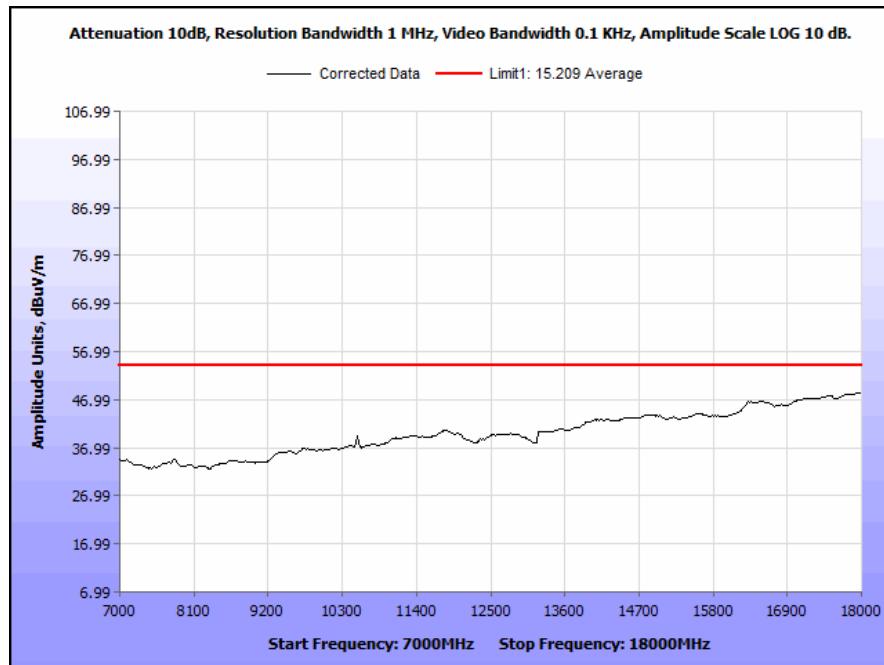


**Plot 104. Radiated Spurious Emissions, 5320 MHz, 20 MHz, 7 GHz – 18 GHz, Average**

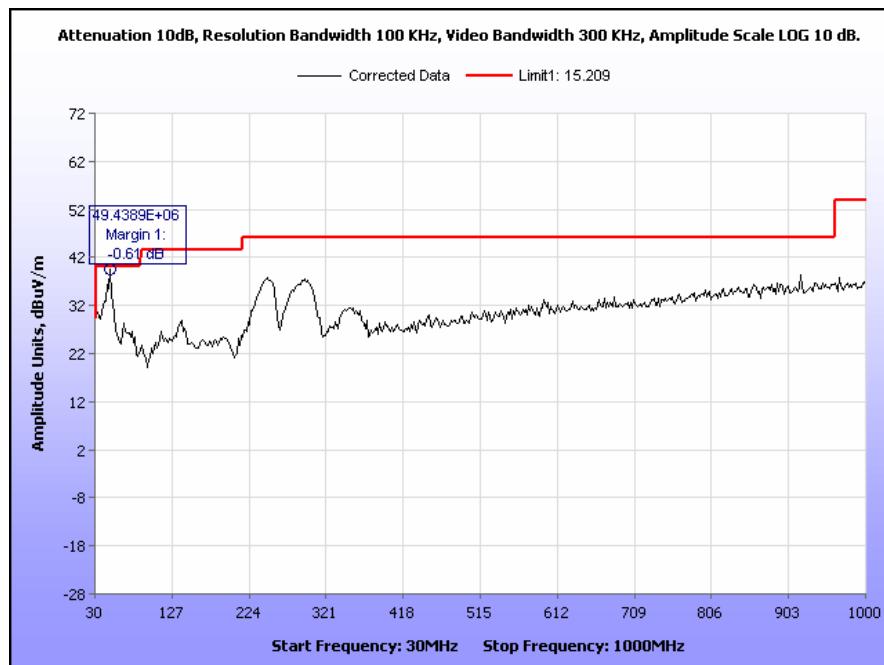


**Plot 105. Radiated Spurious Emissions, 5500 MHz, 20 MHz, Tx Power 30, 30 MHz – 1 GHz**

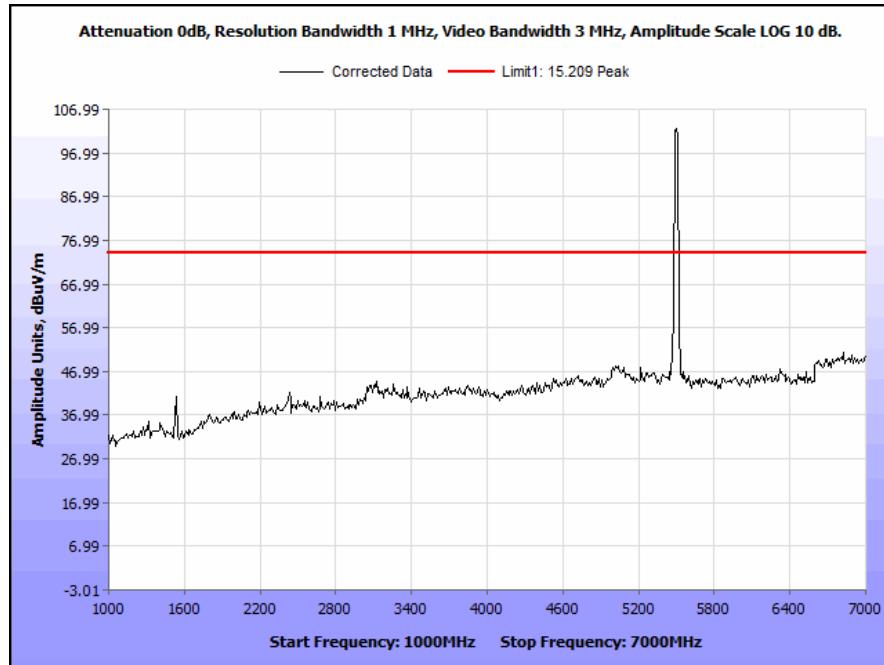


Plot 106. Radiated Spurious Emissions, 5500 MHz, 20 MHz, 1 GHz – 7 GHz, Peak

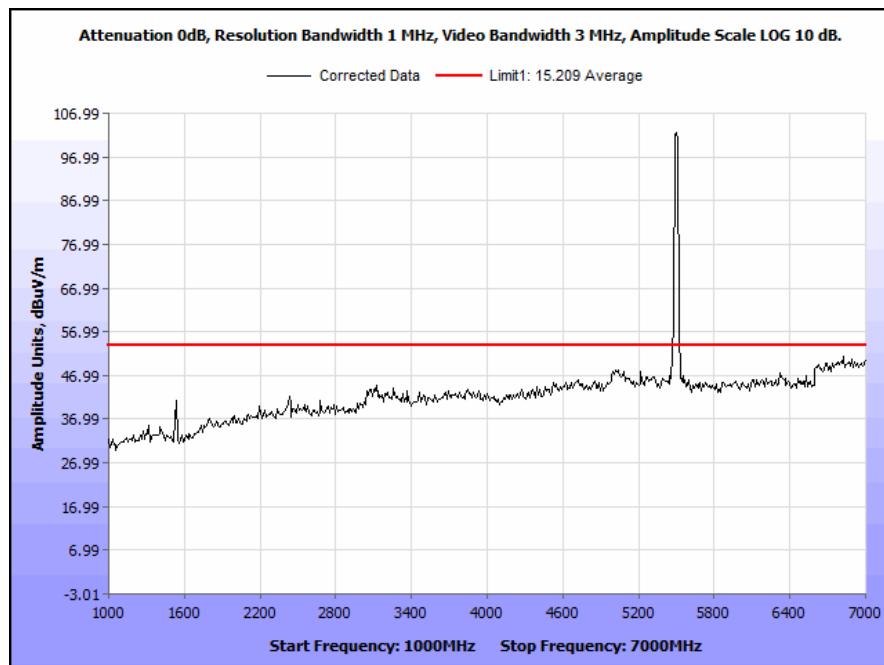


Plot 107. Radiated Spurious Emissions, 5500 MHz, 20 MHz, 1 GHz – 7 GHz, Average

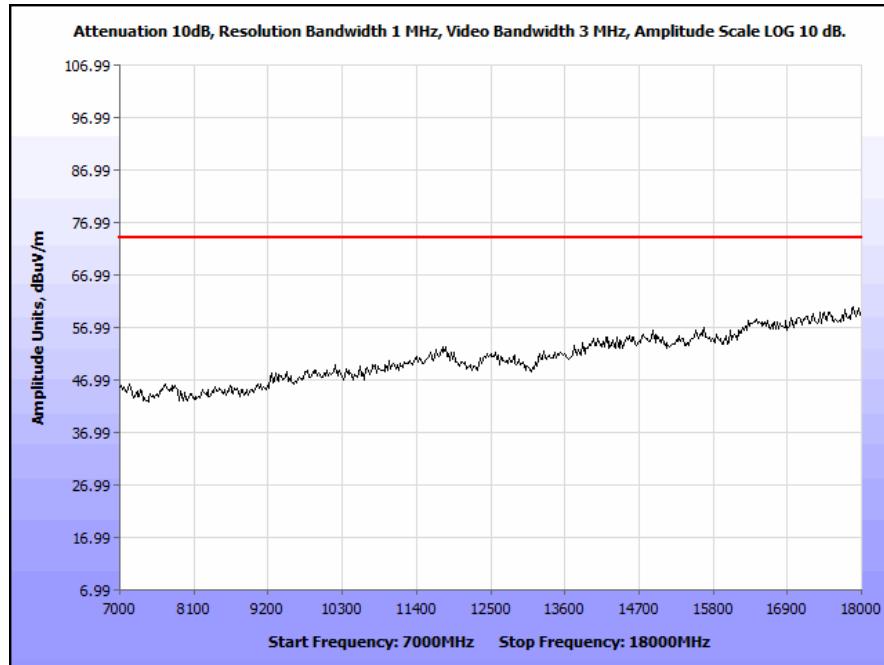


Plot 108. Radiated Spurious Emissions, 5500 MHz, 20 MHz, 7 GHz – 18 GHz, Peak

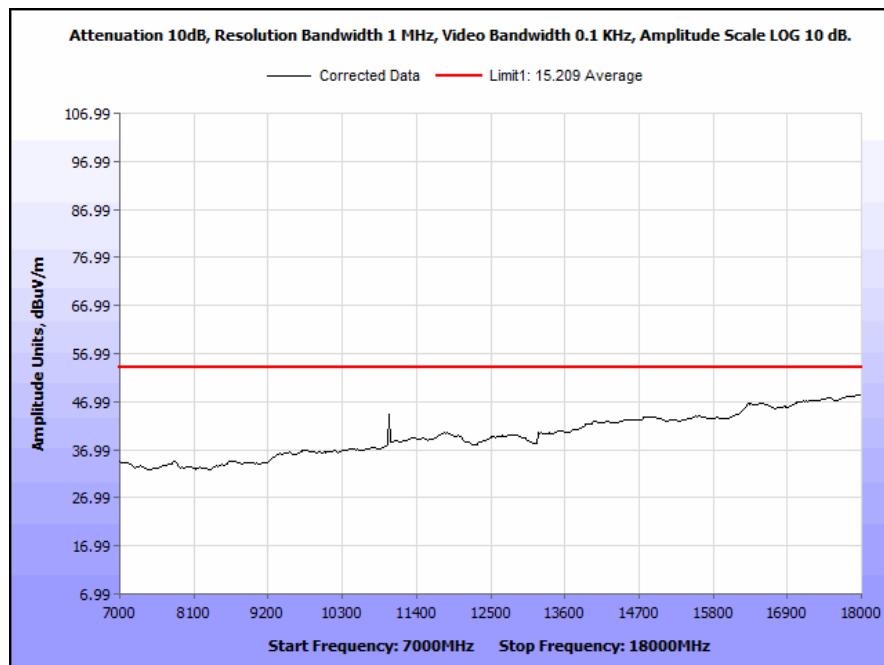


Plot 109. Radiated Spurious Emissions, 5500 MHz, 20 MHz, 7 GHz – 18 GHz, Average

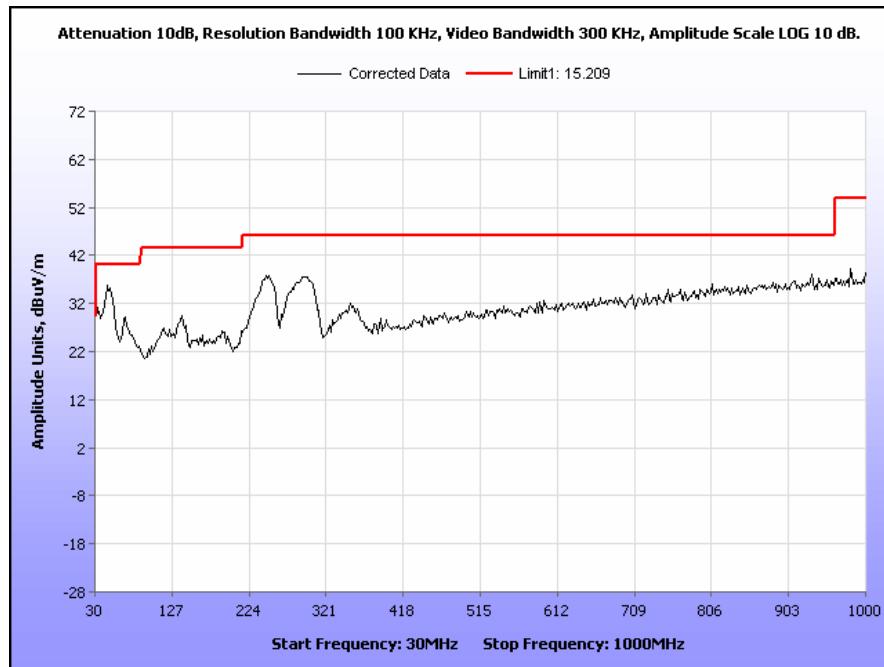


**Plot 110. Radiated Spurious Emissions, 5560 MHz, 20 MHz, Tx Power 30, 30 MHz – 1 GHz**

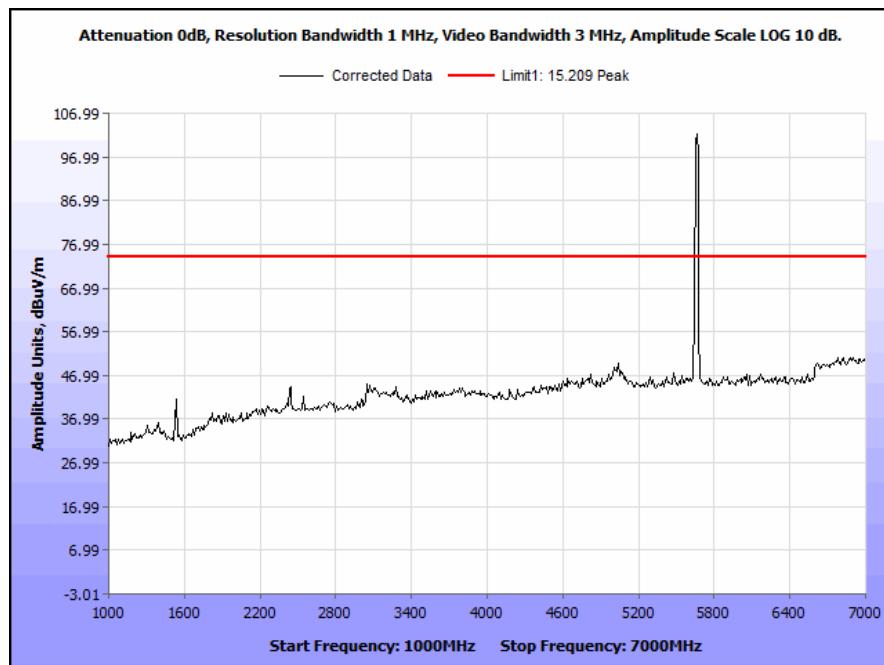


**Plot 111. Radiated Spurious Emissions, 5560 MHz, 20 MHz, 1 GHz – 7 GHz, Peak**

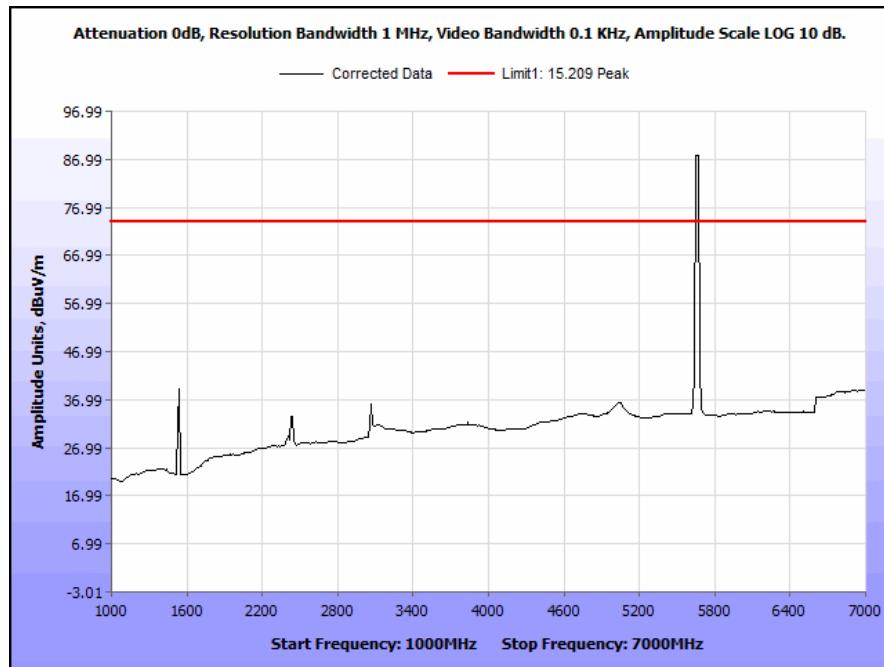


Plot 112. Radiated Spurious Emissions, 5560 MHz, 20 MHz, 1 GHz – 7 GHz, Average

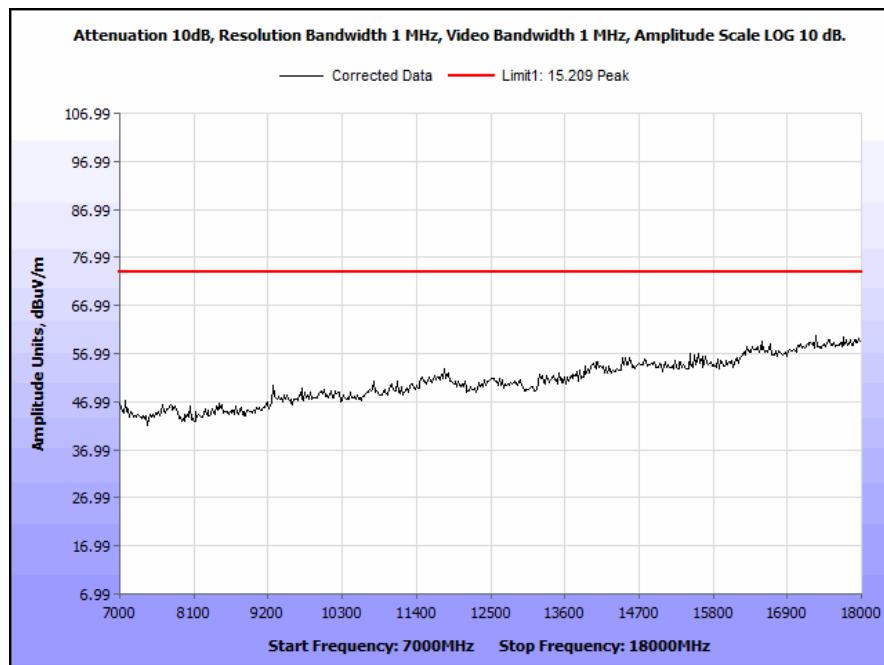


Plot 113. Radiated Spurious Emissions, 5560 MHz, 20 MHz, 7 GHz – 18 GHz, Peak

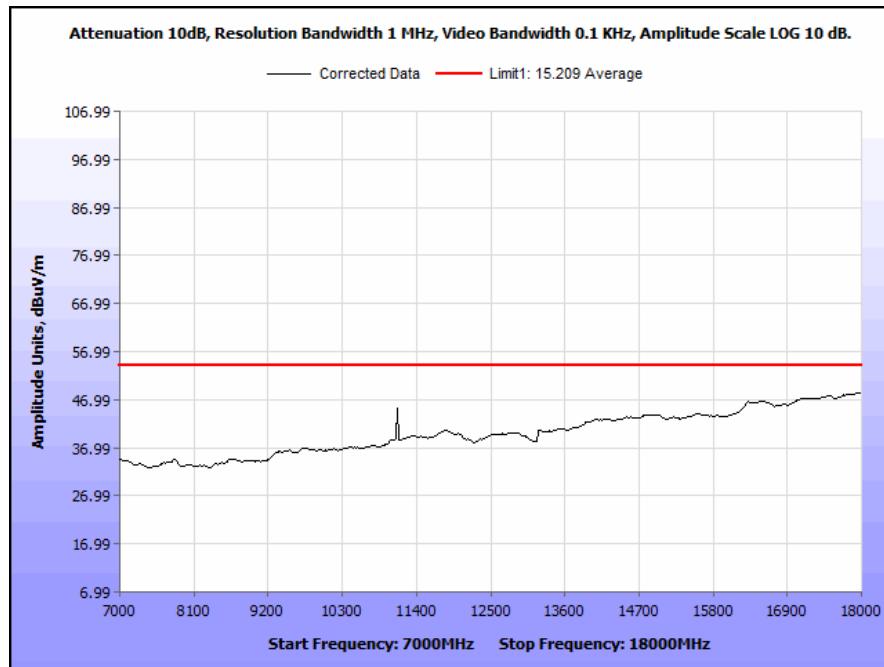


**Plot 114. Radiated Spurious Emissions, 5560 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average**

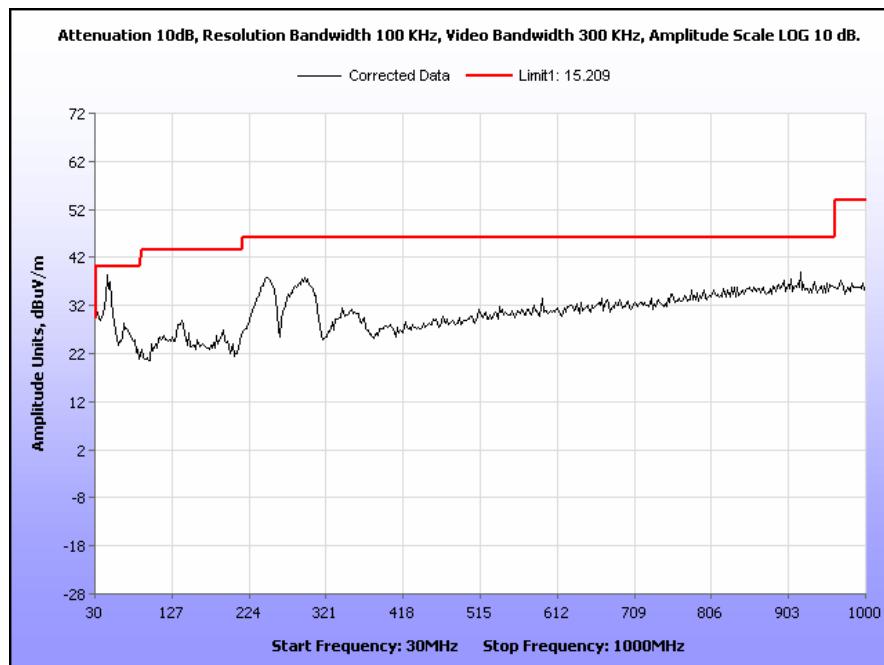


**Plot 115. Radiated Spurious Emissions, 5700 MHz, 20 MHz, Tx Power 30, 30 MHz – 1 GHz**

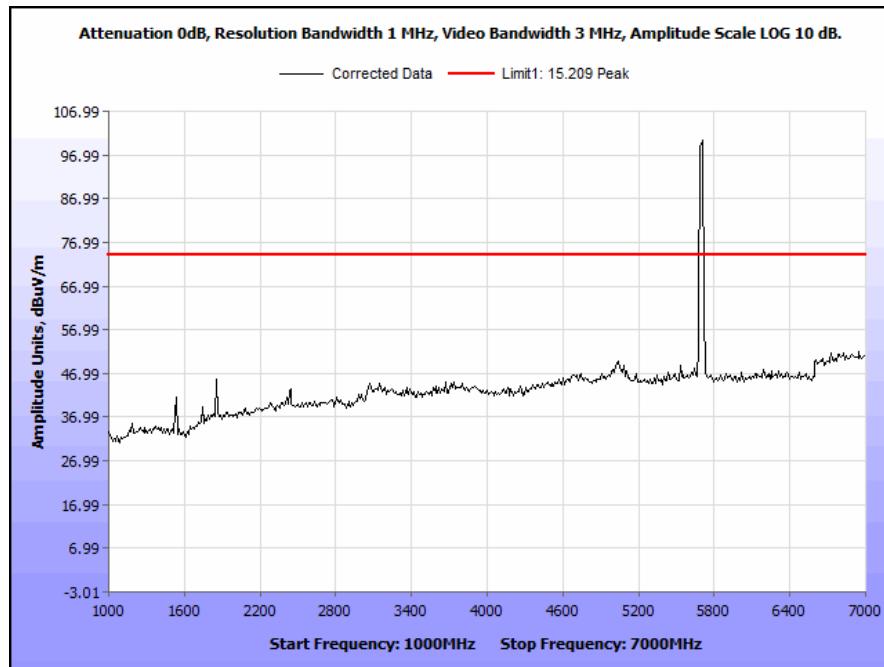


**Plot 116. Radiated Spurious Emissions, 5700 MHz, 20 MHz, 1 GHz – 7 GHz, Peak**

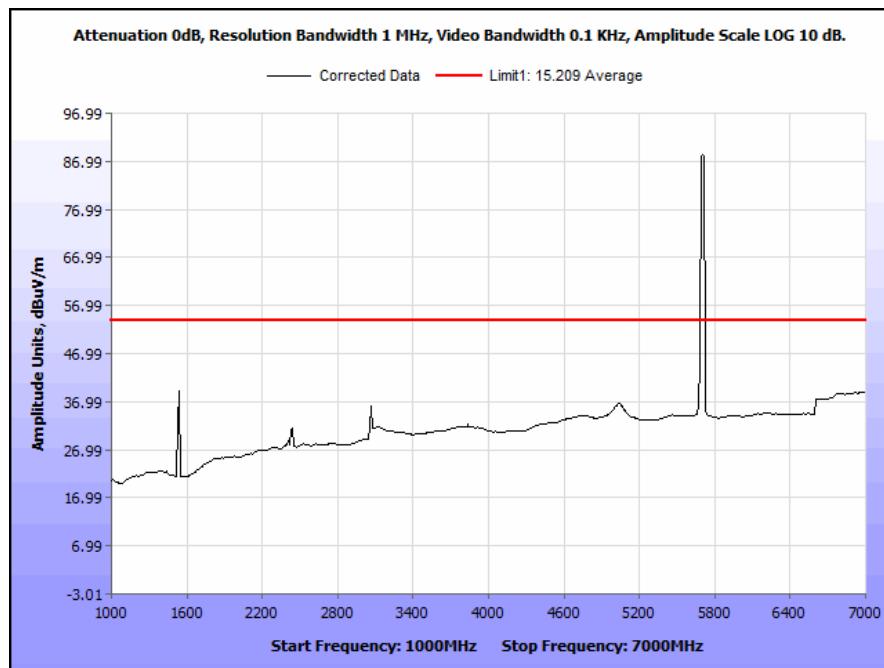


**Plot 117. Radiated Spurious Emissions, 5700 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Average**

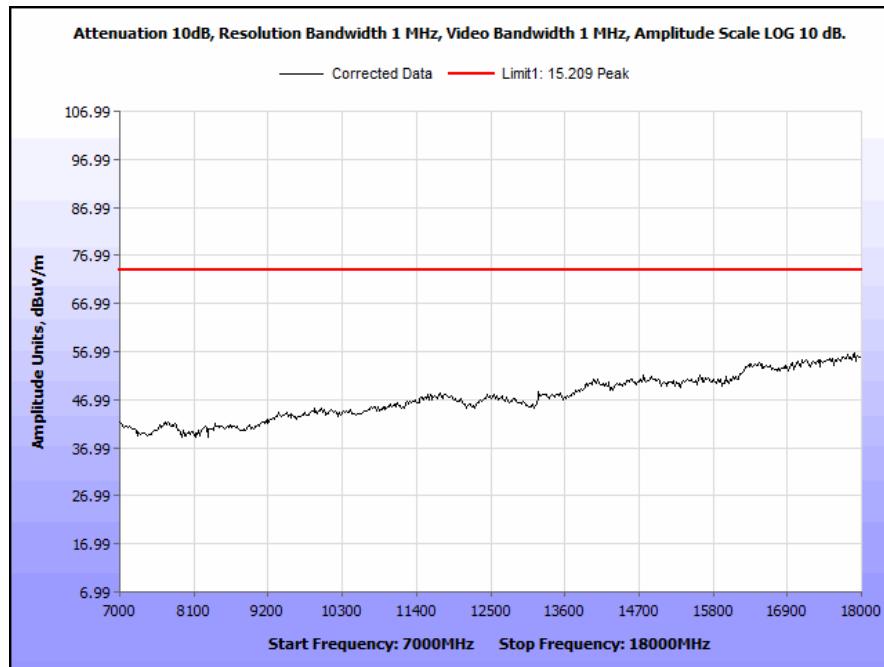


**Plot 118. Radiated Spurious Emissions, 5700 MHz, 20 MHz, 7 GHz – 18 GHz, Peak**

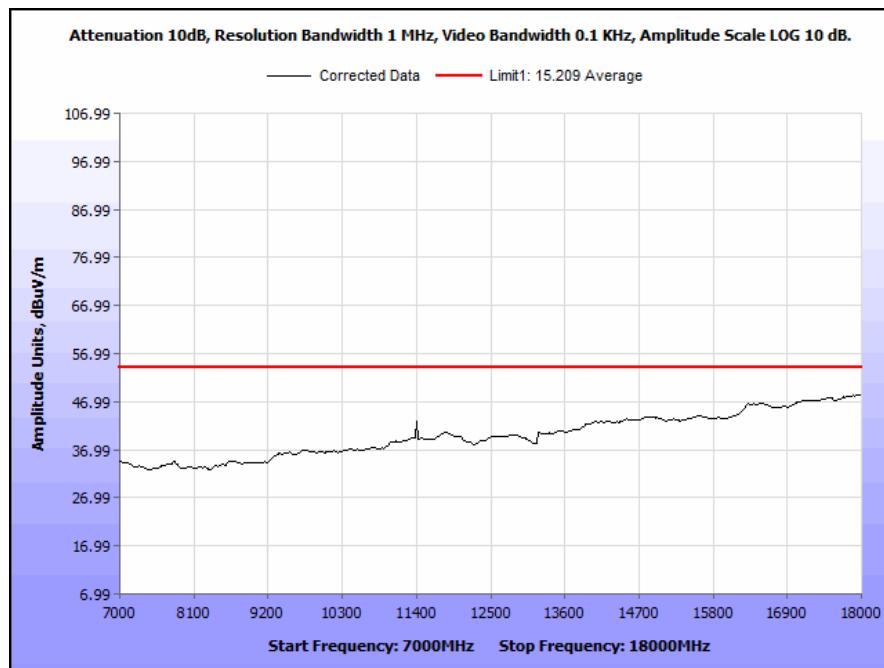


**Plot 119. Radiated Spurious Emissions, 5700 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average**

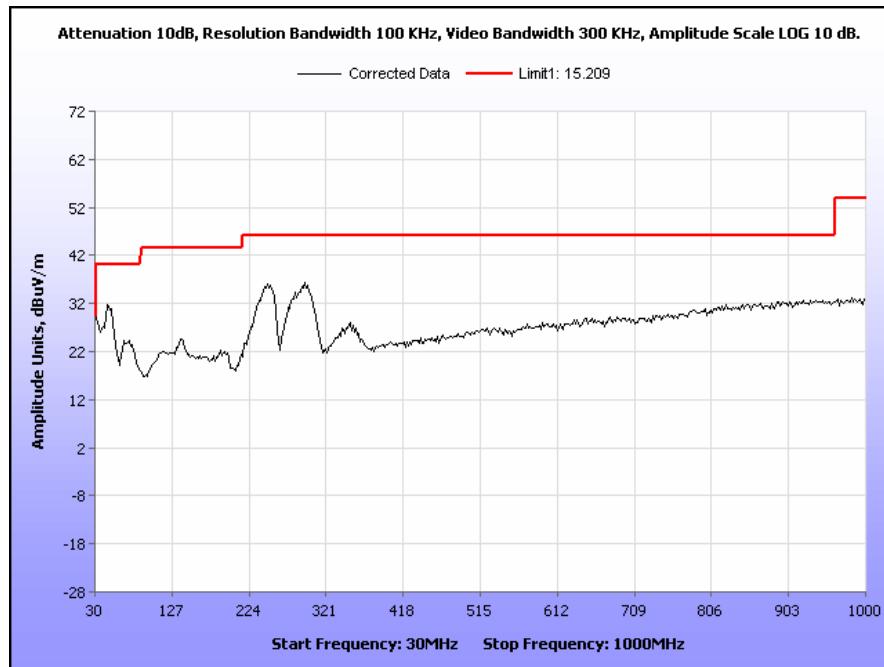


**Plot 120. Radiated Spurious Emissions, 5270 MHz, 40 MHz, Tx Power 30, 30 MHz – 1 GHz**

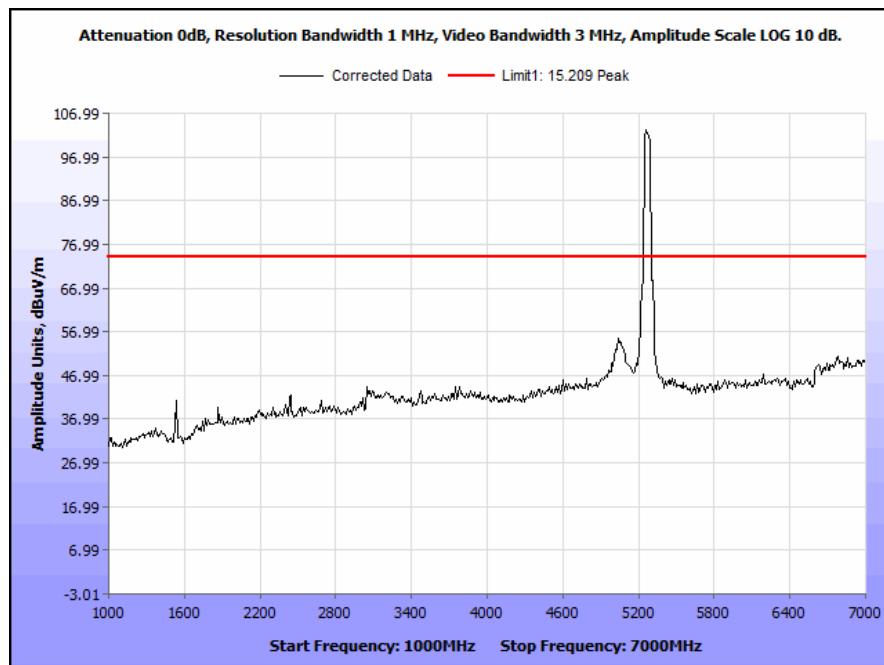


**Plot 121. Radiated Spurious Emissions, 5270 MHz, 40 MHz, 1 GHz – 7 GHz, Peak**

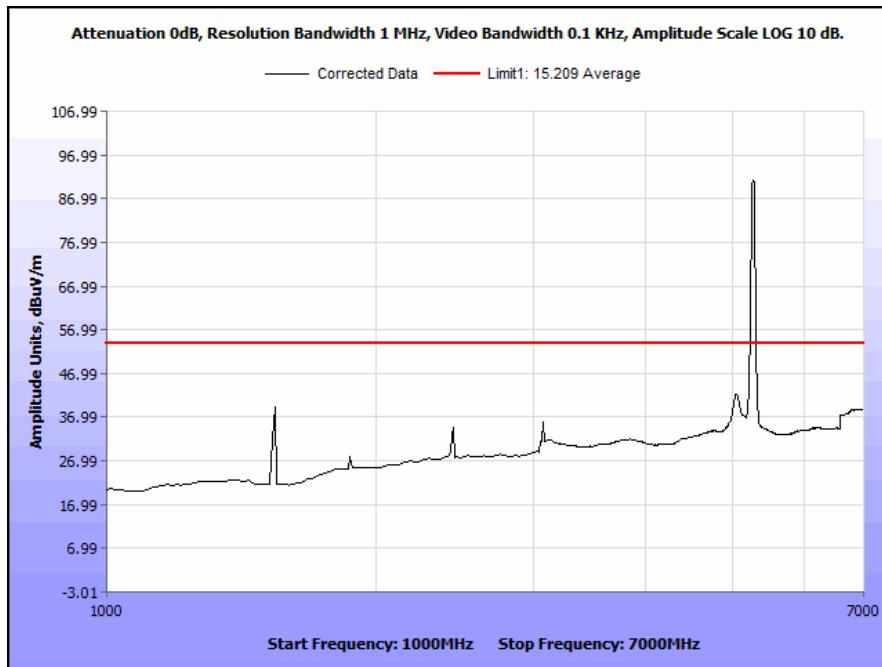


Plot 122. Radiated Spurious Emissions, 5270 MHz, 40 MHz, 1 GHz – 7 GHz, Average

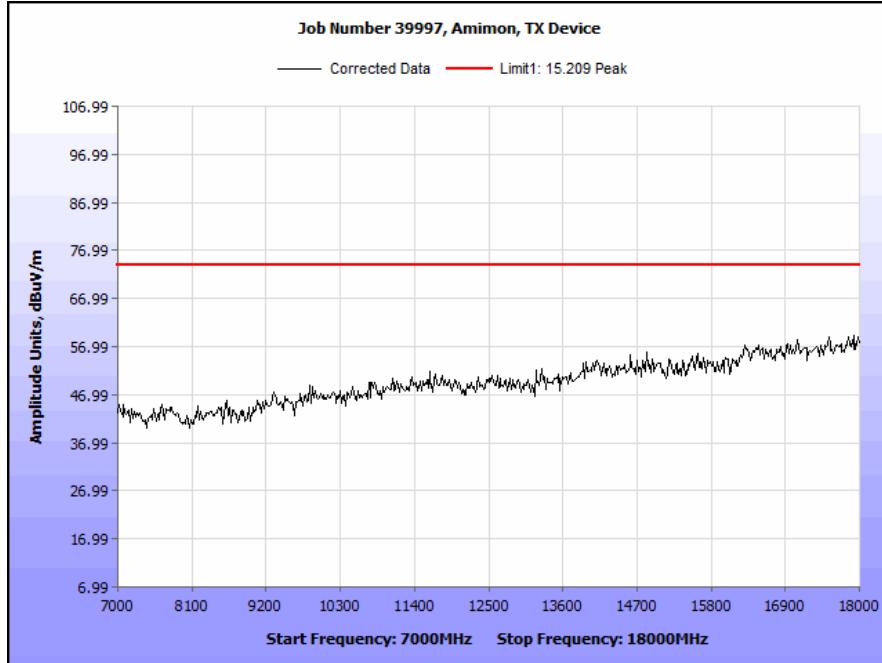


Plot 123. Radiated Spurious Emissions, 5270 MHz, 40 MHz, 7 GHz – 18 GHz, Peak

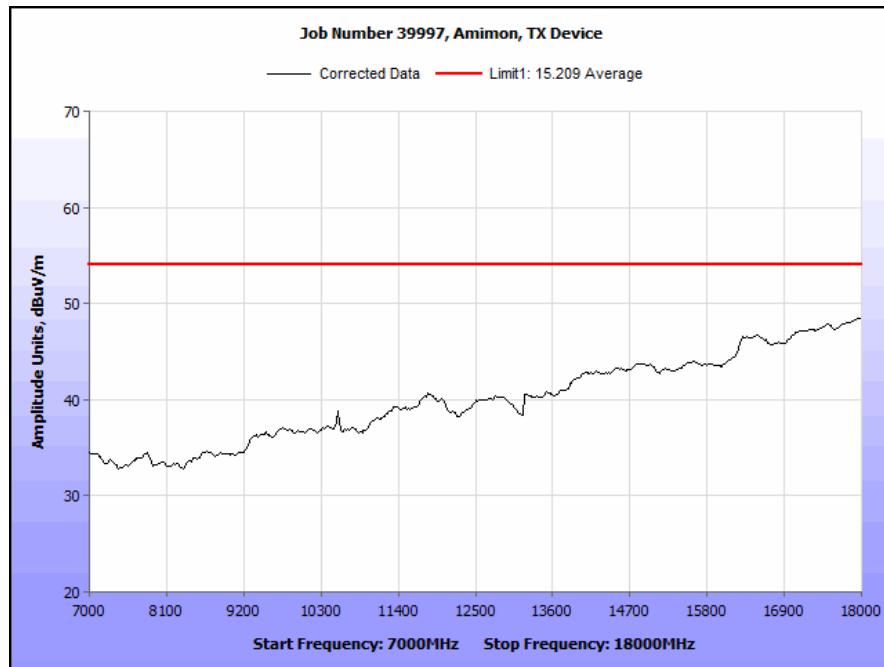


Plot 124. Radiated Spurious Emissions, 5270 MHz, 40 MHz, 7 GHz – 18 GHz, Average

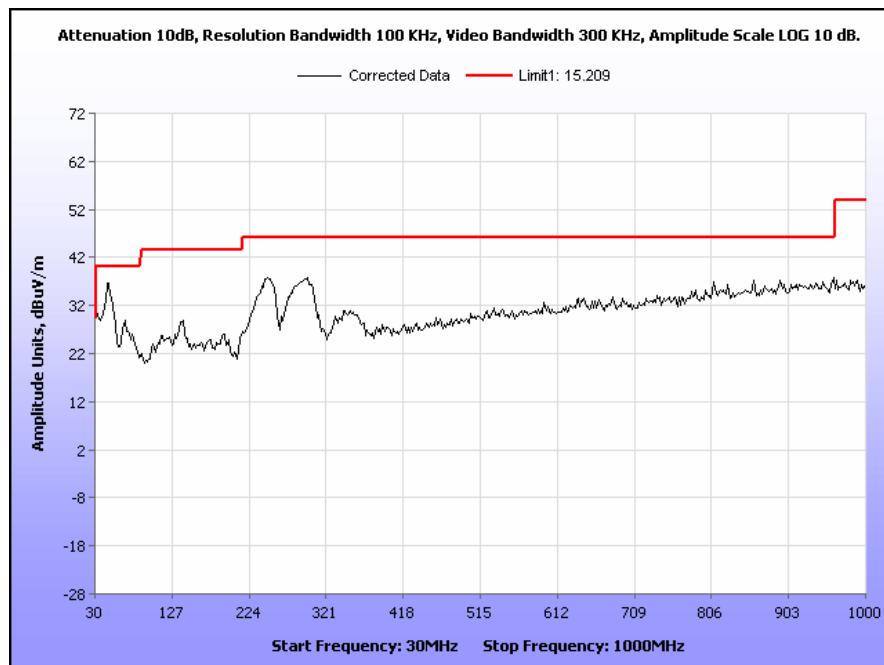


Plot 125. Radiated Spurious Emissions, 5310 MHz, 40 MHz, Tx Power 30, 30 MHz – 1 GHz

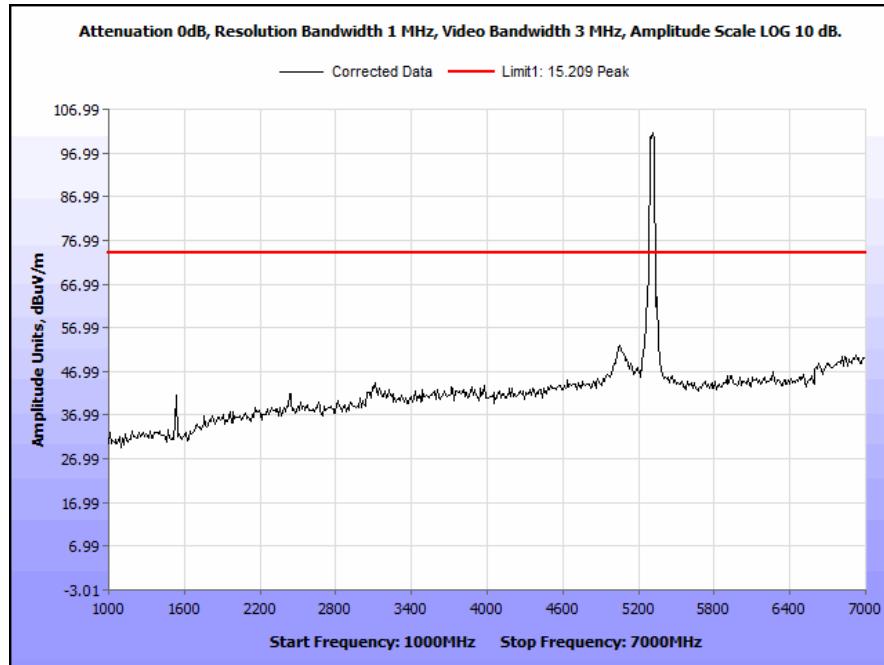


Plot 126. Radiated Spurious Emissions, 5310 MHz, 40 MHz, 1 GHz – 7 GHz, Peak

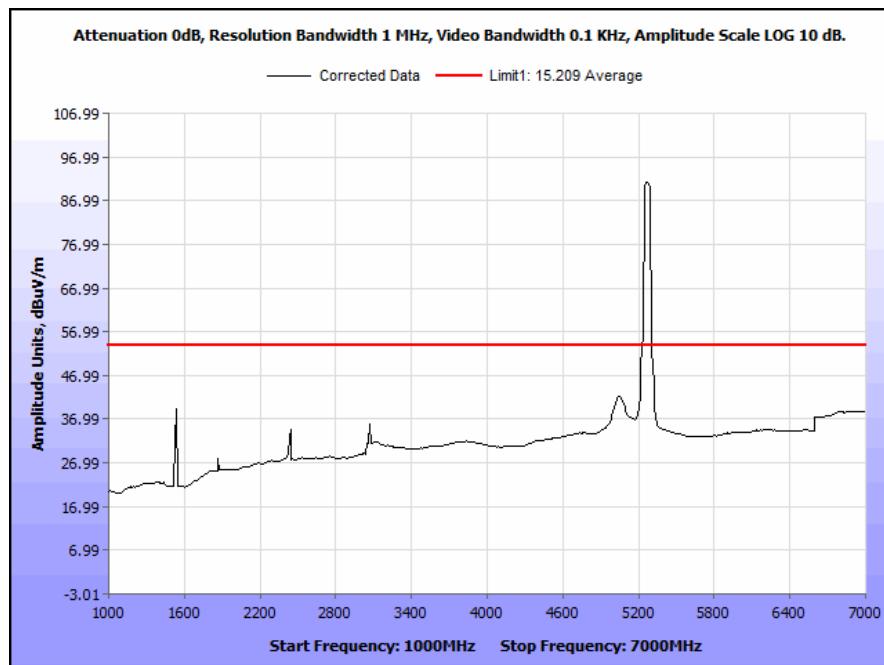


Plot 127. Radiated Spurious Emissions, 5310 MHz, 40 MHz, 1 GHz – 7 GHz, Average

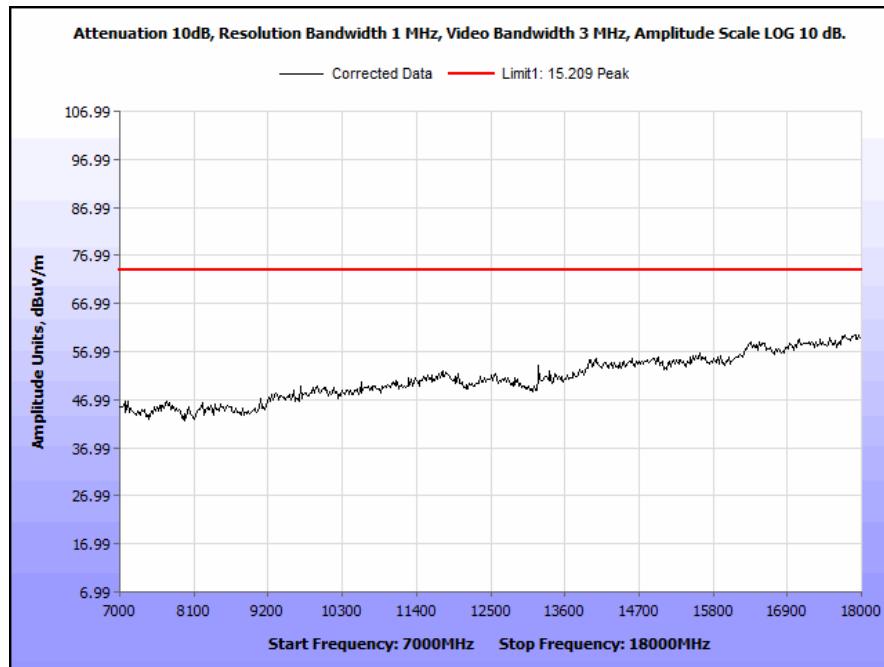


**Plot 128. Radiated Spurious Emissions, 5310 MHz, 40 MHz, 7 GHz – 18 GHz, Peak**

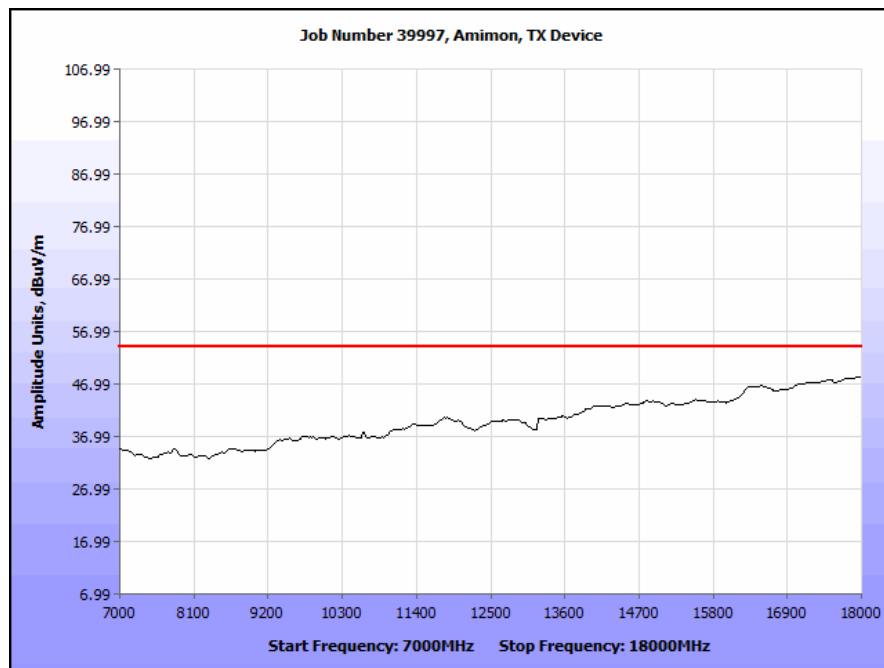


**Plot 129. Radiated Spurious Emissions, 5310 MHz, 40 MHz, 7 GHz – 18 GHz, Average**

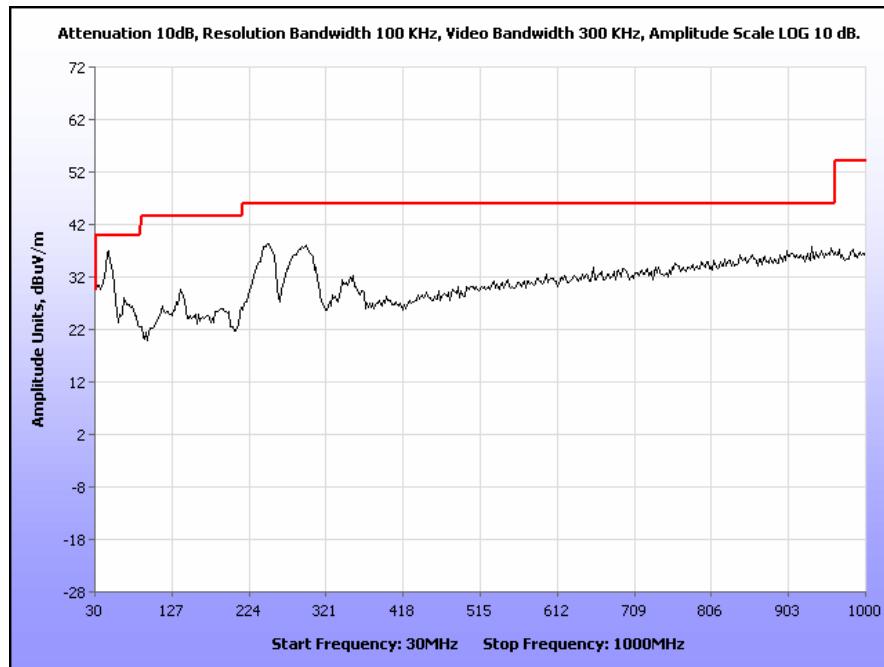


Plot 130. Radiated Spurious Emissions, 5510 MHz, 40 MHz, Tx Power 30, 30 MHz – 1 GHz

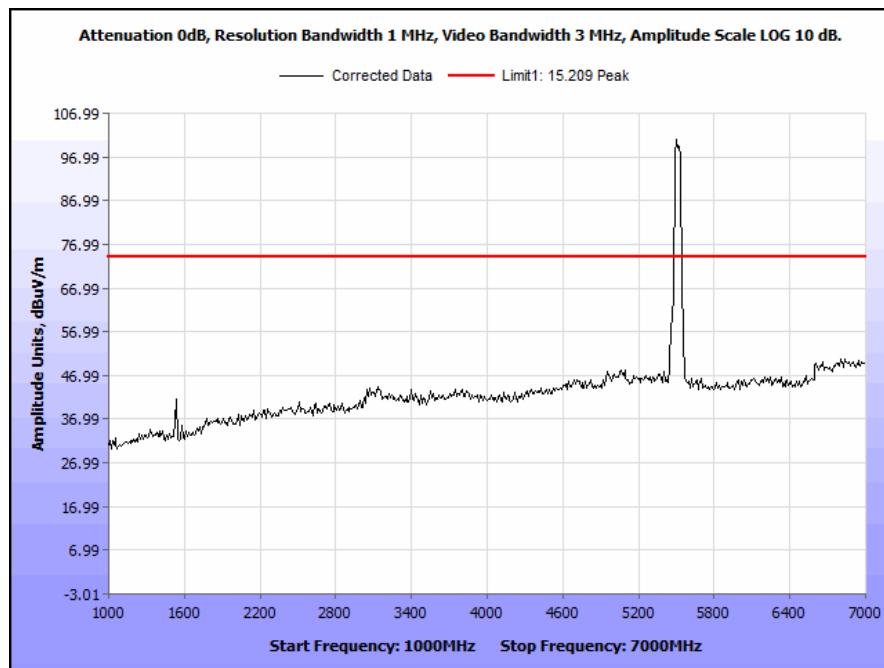


Plot 131. Radiated Spurious Emissions, 5510 MHz, 40 MHz, 1 GHz – 7 GHz, Peak

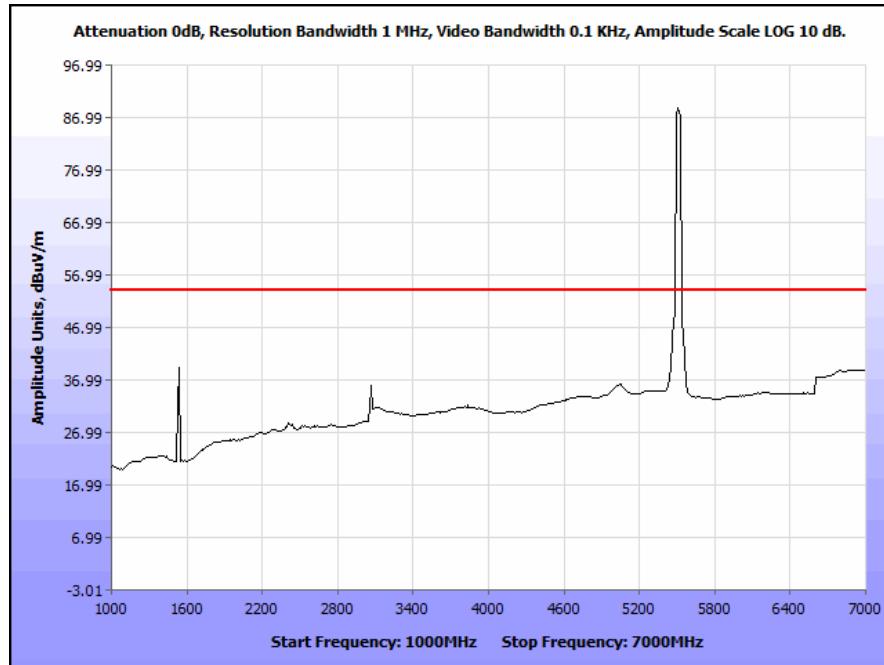


Plot 132. Radiated Spurious Emissions, 5510 MHz, 40 MHz, 1 GHz – 7 GHz, Average

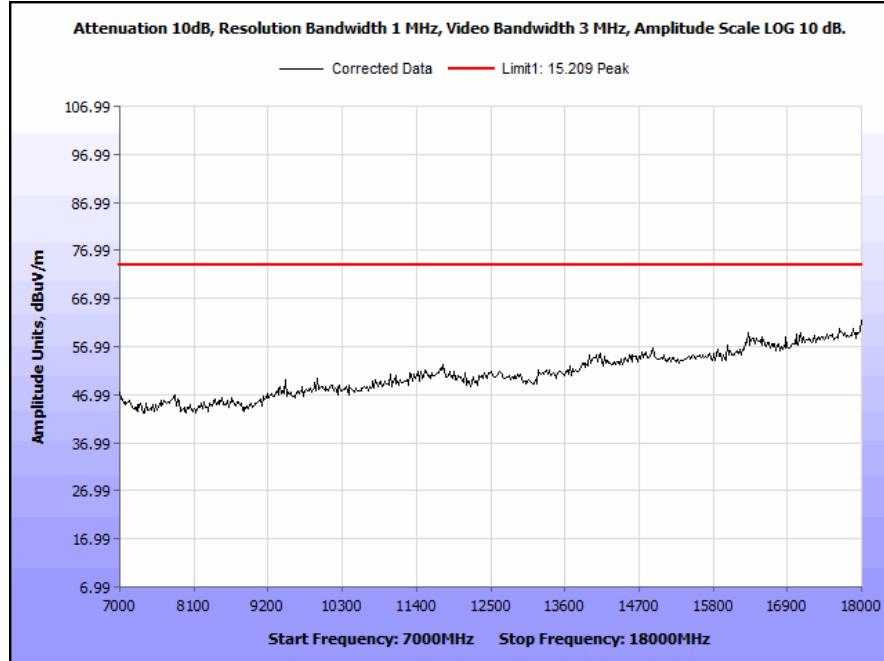


Plot 133. Radiated Spurious Emissions, 5510 MHz, 40 MHz, 7 GHz – 18 GHz, Peak

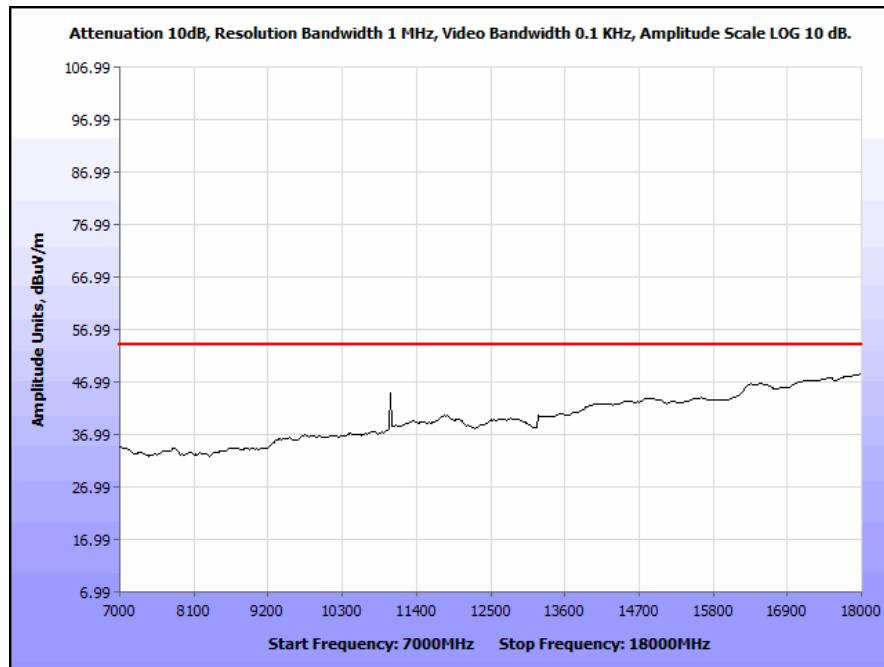


**Plot 134. Radiated Spurious Emissions, 5510 MHz, 40 MHz, 7 GHz – 18 GHz, Average**

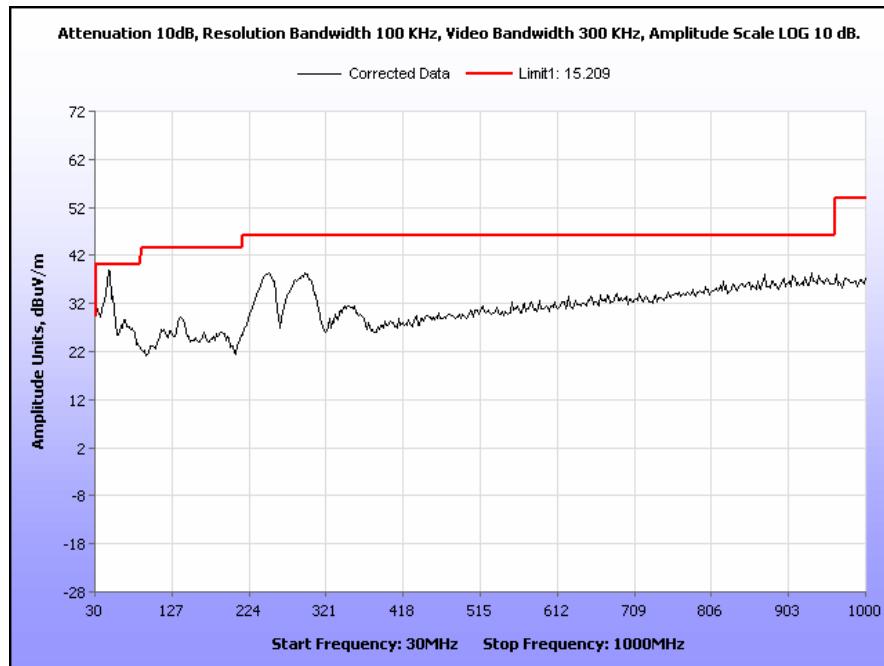


**Plot 135. Radiated Spurious Emissions, 5550 MHz, 40 MHz, Tx Power 30, 30 MHz – 1 GHz**

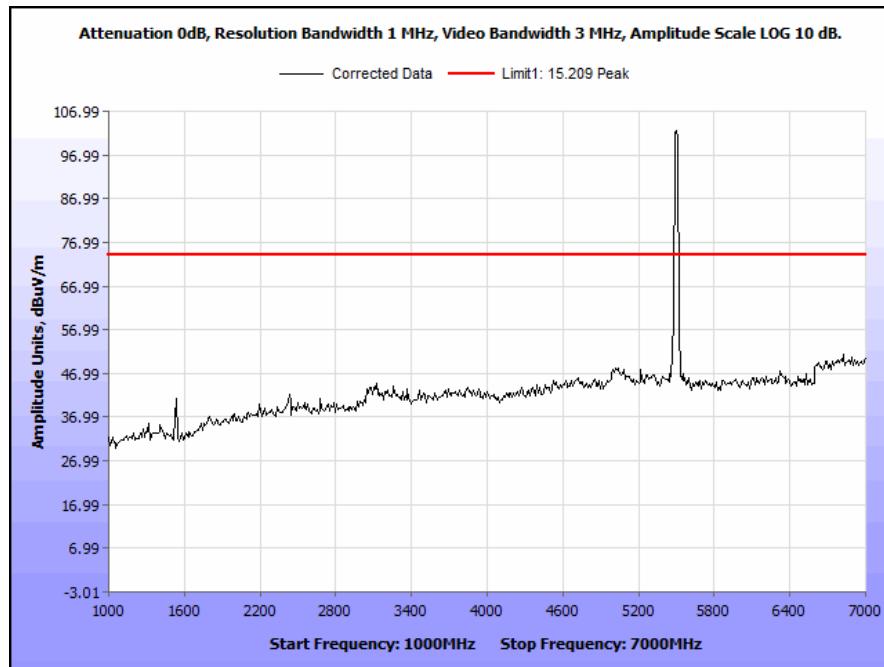


Plot 136. Radiated Spurious Emissions, 5550 MHz, 40 MHz, 1 GHz – 7 GHz, Peak

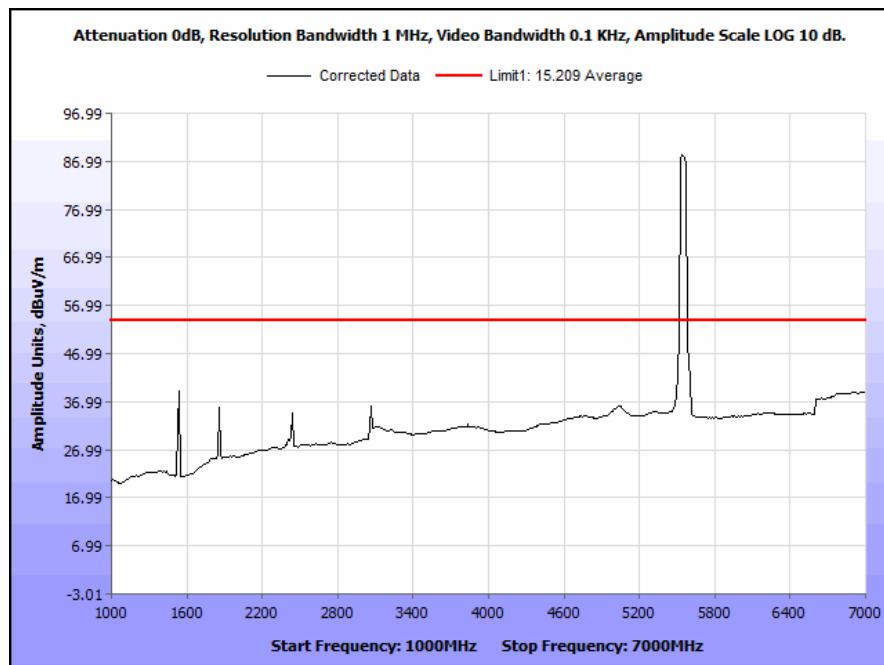

Plot 137. Radiated Spurious Emissions, 5550 MHz, 40 MHz, 1 GHz – 7 GHz, Average

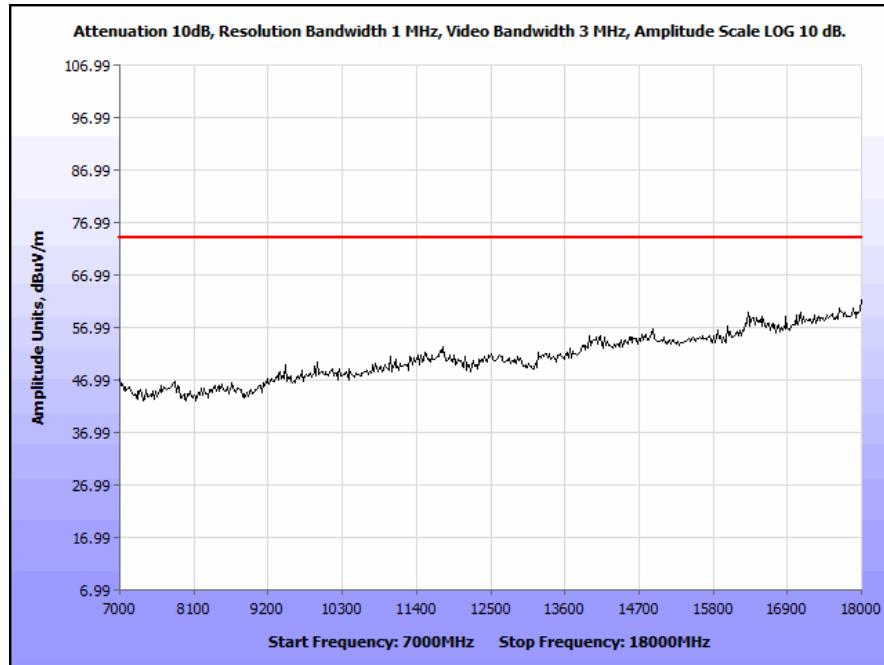


Plot 138. Radiated Spurious Emissions, 5550 MHz, 40 MHz, 7 GHz – 18 GHz, Peak

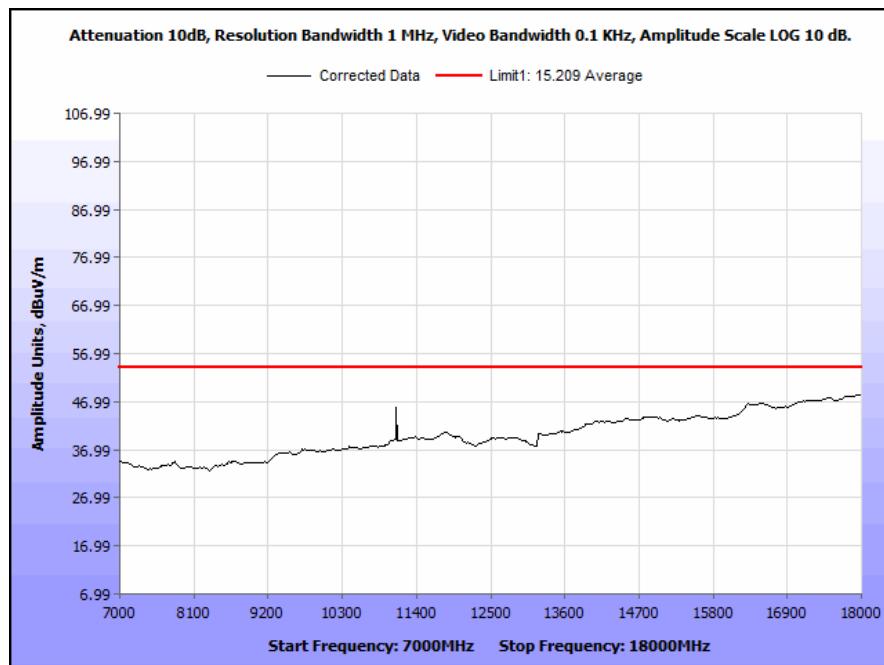

Plot 139. Radiated Spurious Emissions, 5550 MHz, 40 MHz, 7 GHz – 18 GHz, Average




Photograph 5. Radiated Spurious Emissions, Test Setup, Above 1 GHz

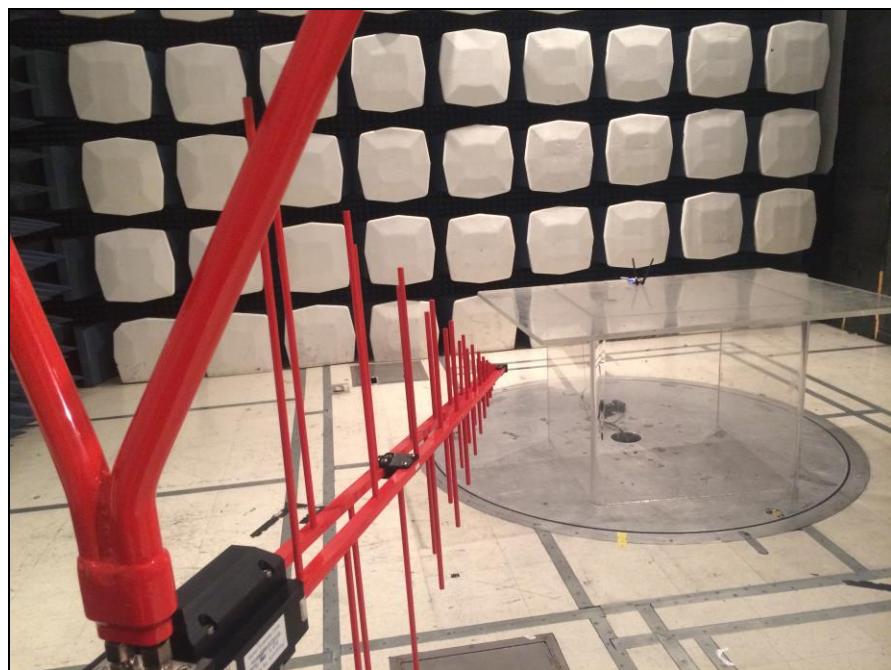


Photograph 6. Radiated Spurious Emissions, Test Setup, Below 1 GHz


## Restricted Band Edge

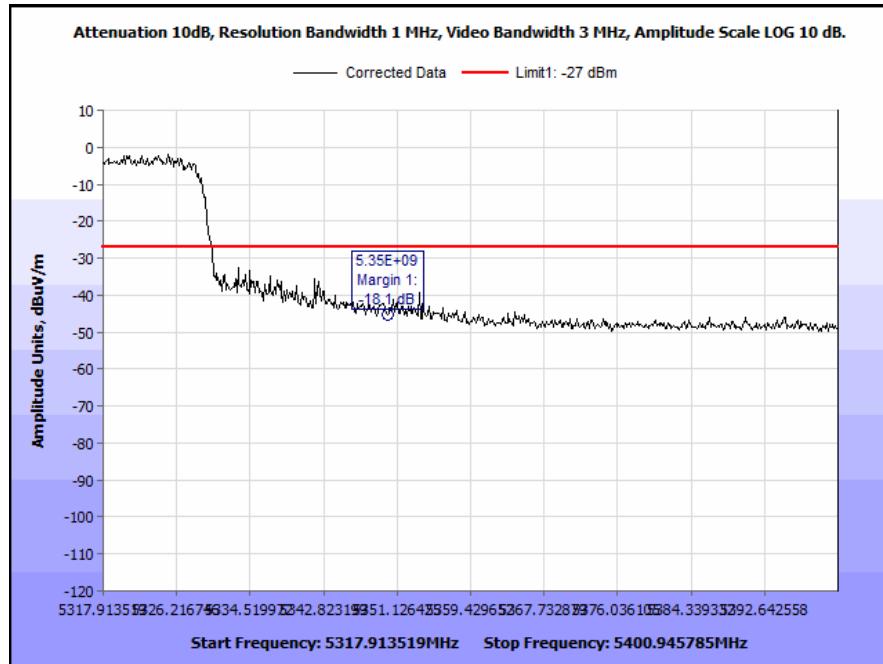


Plot 140. Restricted Band Emissions, 5310 MHz, 40 MHz

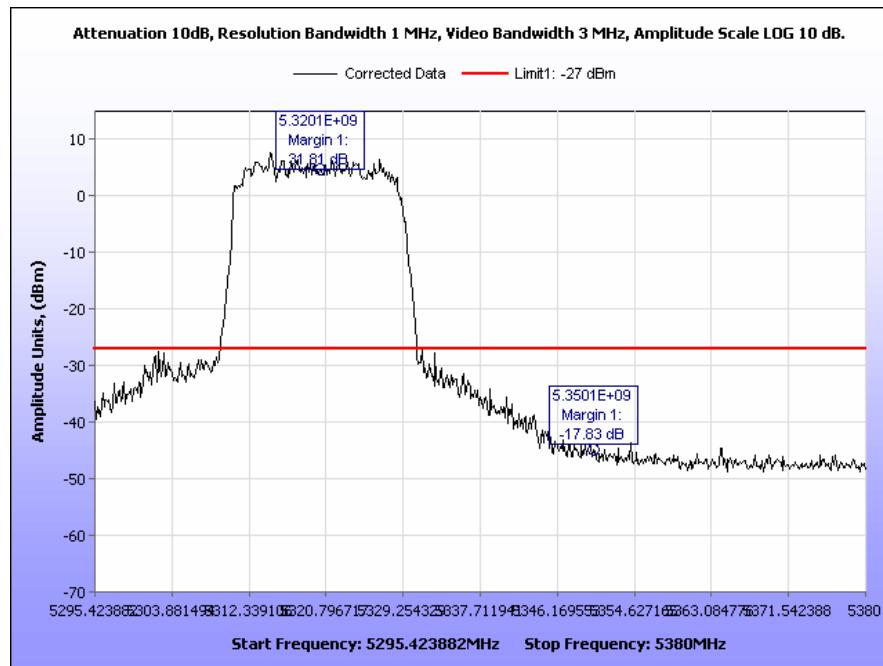

Plot 141. Restricted Band Emissions, 5320 MHz, 20 MHz

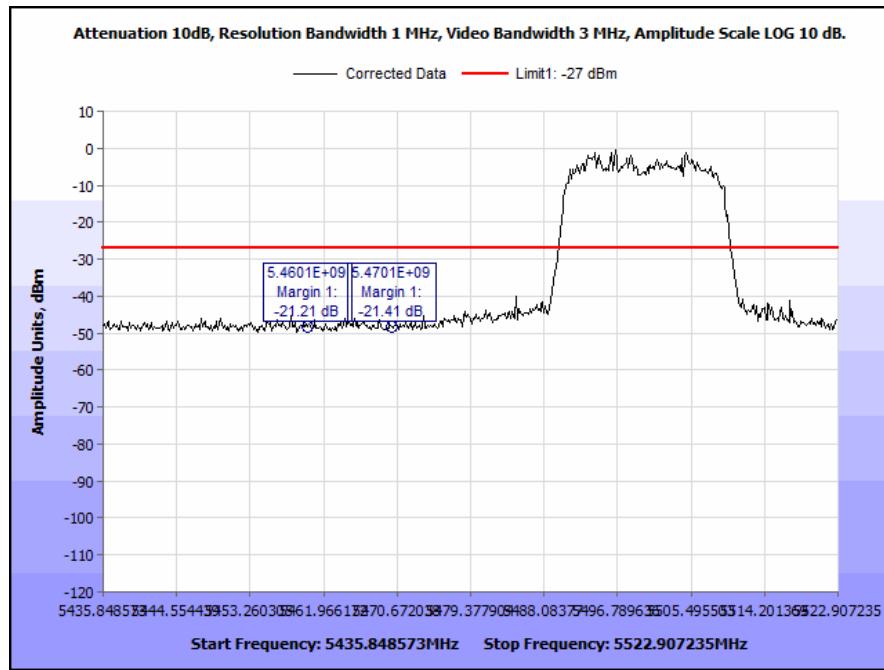


Plot 142. Restricted Band Emissions, 5500 MHz, 20 MHz

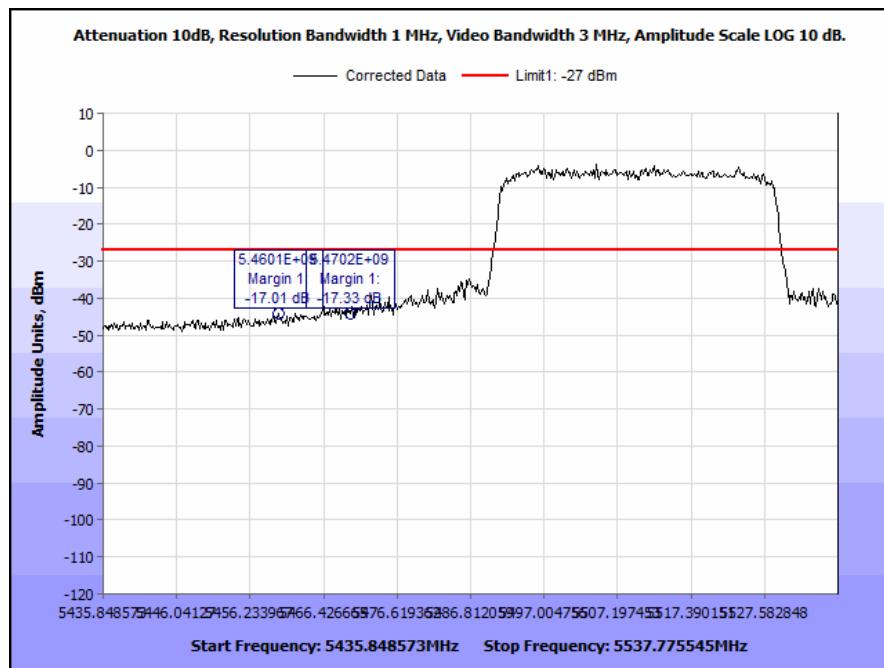


Plot 143. Restricted Band Emissions, 5510 MHz, 40 MHz


### 5600-5650 MHz notched band edges:

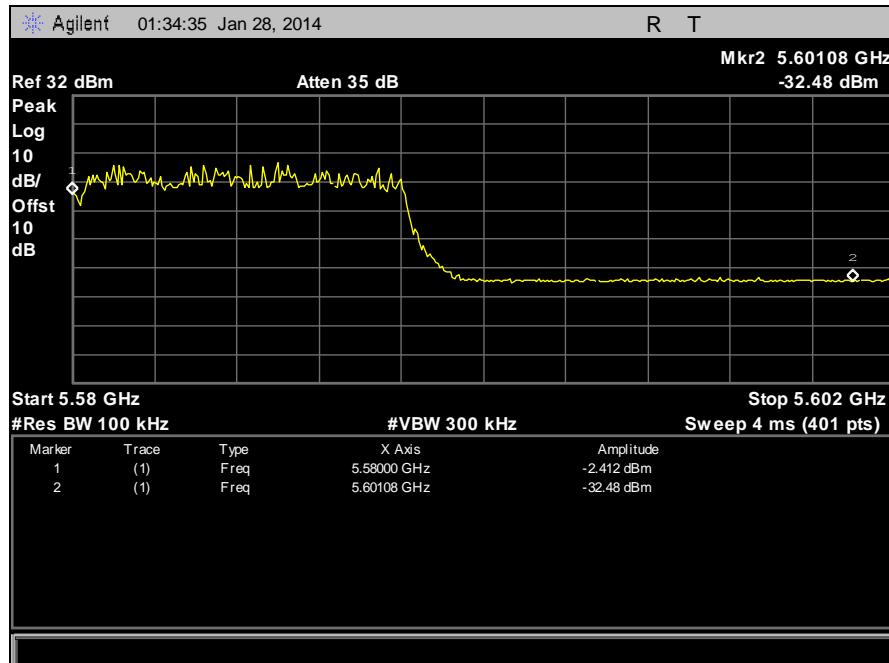


Plot 144. 5580 MHz, 20 MHz channel

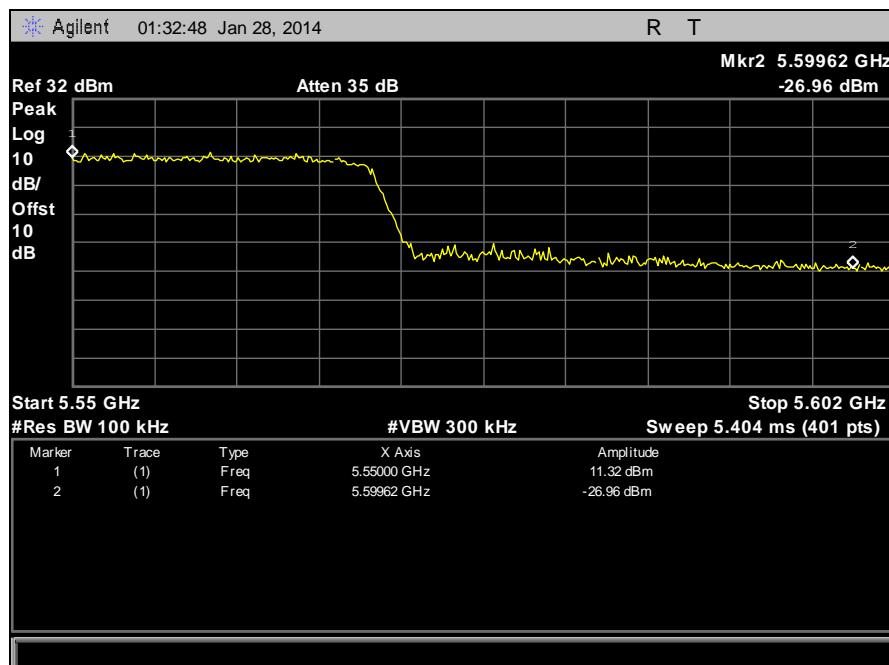


Plot 145. 5550 MHz, 40 MHz channel

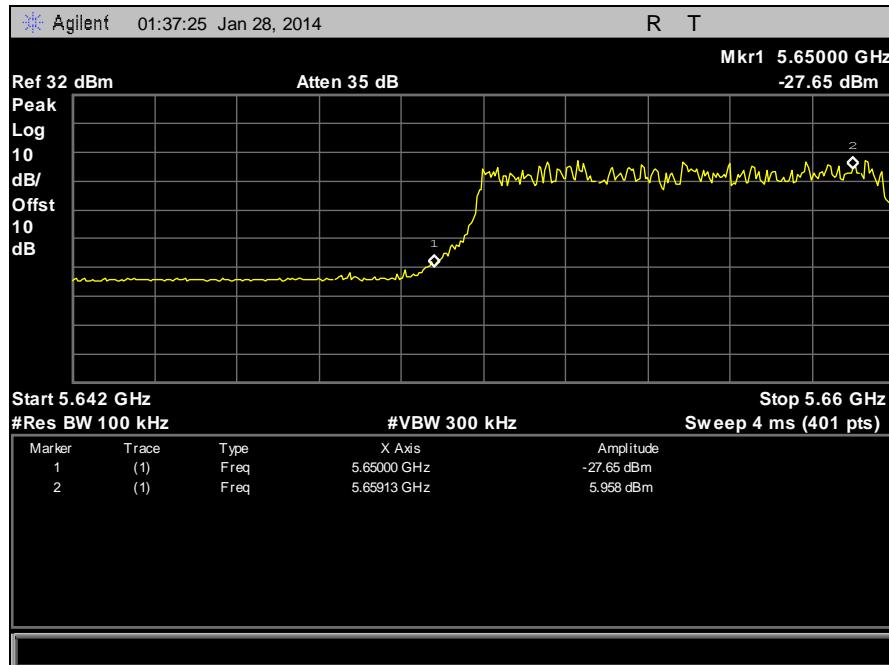


**Plot 146. 5660 MHz, 20 MHz channel**

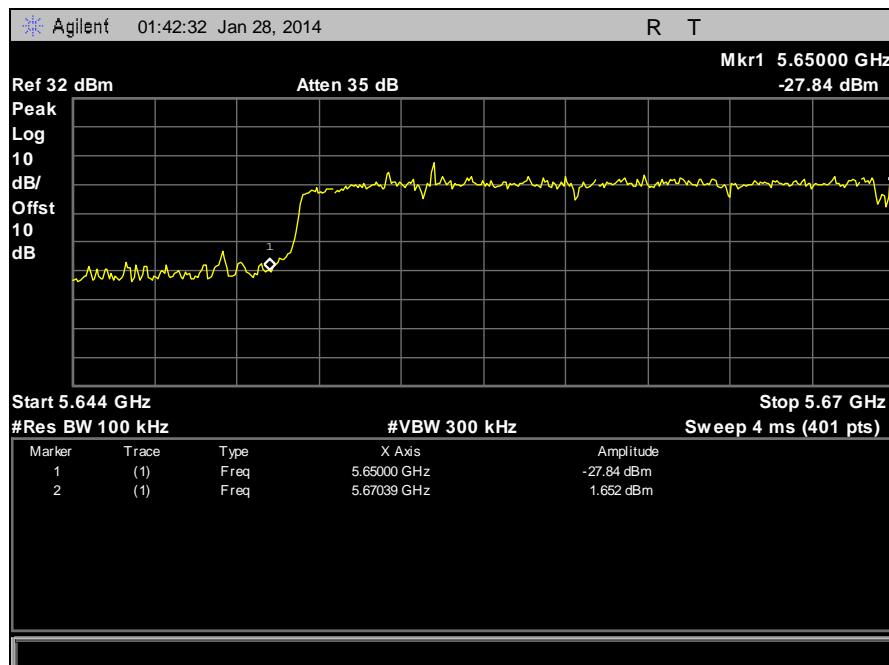

**Plot 147. 5670 MHz, 40 MHz channel**

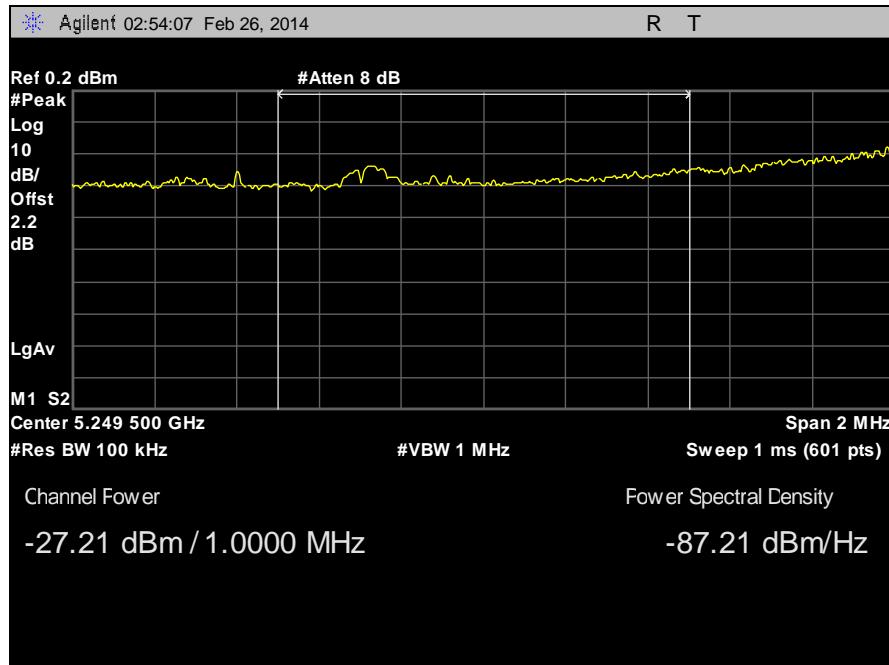

**Plot 148. Band edge Leakage to UNII-1 band 5260MHz (20MHz BW)**

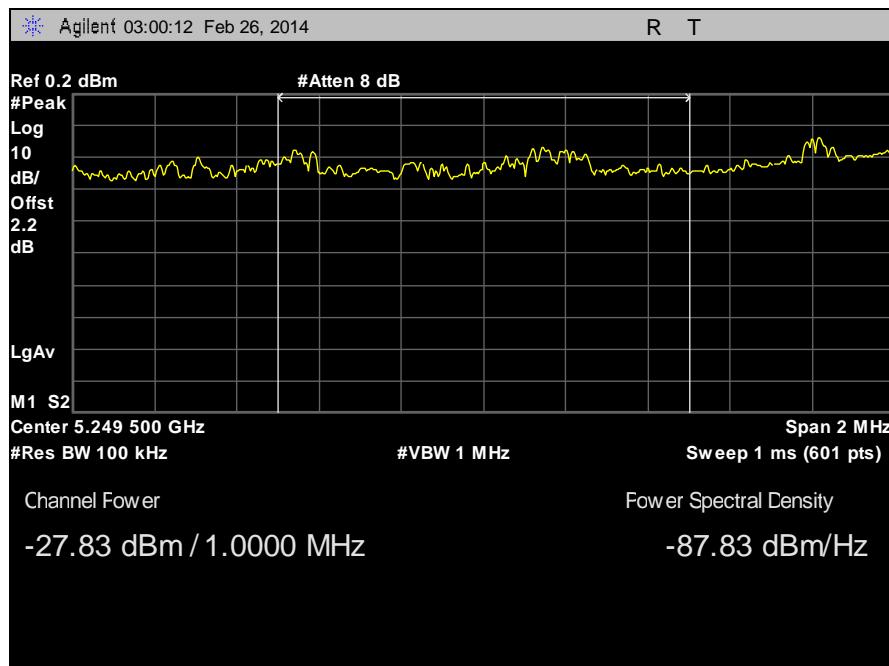

**Plot 149. Band edge Leakage to UNII-1 band 5270MHz (40MHz BW)**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(f) RF Exposure

**RF Exposure Requirements:** **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5180-5240MHz; highest conducted power = 22.29 dBm (Avg) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (<1 mW/cm<sup>2</sup>)

P = Power Input to antenna (169.43 mW)

G = Antenna Gain (3.16 numeric)

R = Minimum Distance between User and Antenna (20 cm)

$$S = (169.43 * 3.16) / (4 * 3.14 * 20^2) = 0.106 \text{ mW/cm}^2$$

Since S < 1 mW/cm<sup>2</sup>, the minimum distance (R) is 20cm

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(g) Frequency Stability

**Test Requirements:** **§ 15.407(g):** Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

**Test Procedure:** The EUT was connected directly to a spectrum analyzer through an attenuator. The resolution band width of the spectrum analyzer was set to 1 MHz. The 1<sup>st</sup> trace of the Spectrum Analyzer was used as a reference at 20°C. A 2<sup>nd</sup> trace was used to show the drift of the carrier at extreme conditions. A delta marker was used to find the drift at a given extreme condition. The two frequencies (i.e. 5300 MHz and 5550 MHz) are derived from one oscillator. Therefore, only one channel was investigated for frequency stability.


**Test Results:** The EUT was compliant with the requirements of **§15.407(g)**.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** 12/16/13

Frequency	5300 MHz	UNII2	
Temperature (C)	Voltage (V)	Center Frequency (MHz)	Drift (PPM)
-20	120	5300.030721	7.373153135
-10	120	5300.036304	8.426538193
0	120	5300.031023	7.430183791
10	120	5300.01879	5.122160152
20	108	5300.004521	2.429830624
20	120	5299.991643	0
20	132	5300.004847	2.4912394
30	120	5299.995562	0.739400222
40	120	5299.992643	0.188715769
50	120	5299.999936	1.564754543
55	120	5300.008566	3.193009374


**Table 17. Frequency Stability, Test Results**

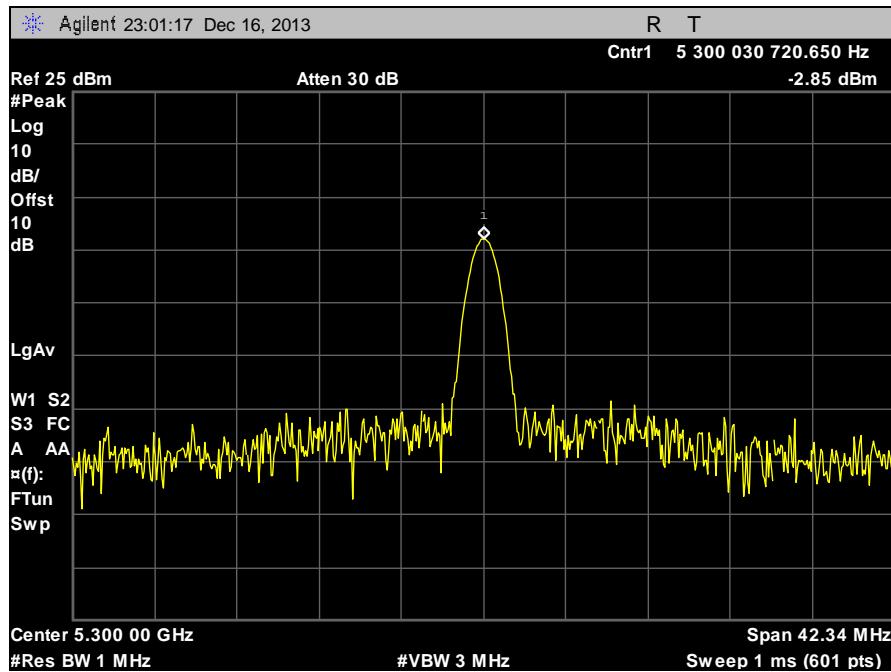


Plot 152. Frequency Stability, 5300 MHz, 20 MHz, -20°C, 120 V

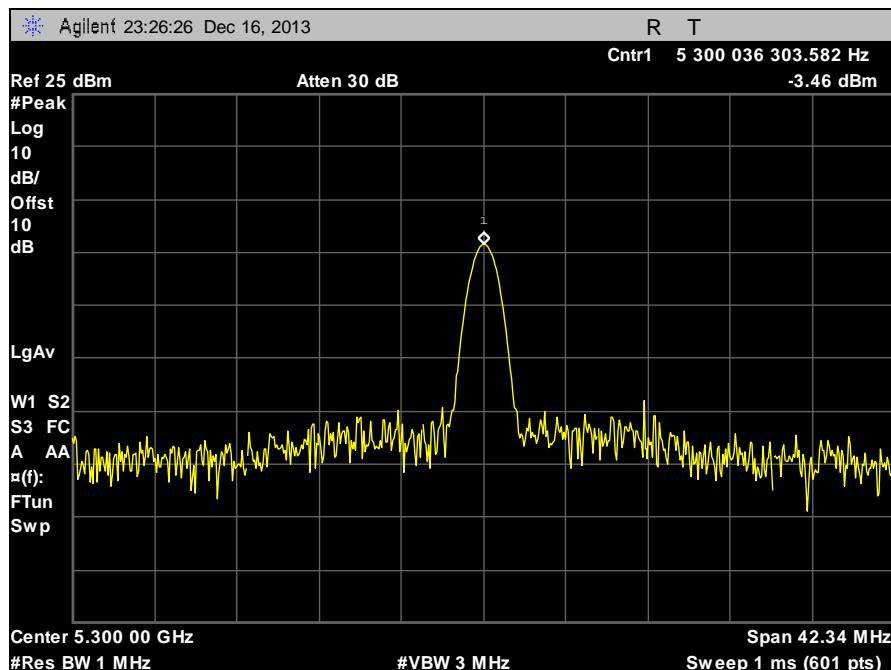


Plot 153. Frequency Stability, 5300 MHz, 20 MHz, -10°C, 120 V

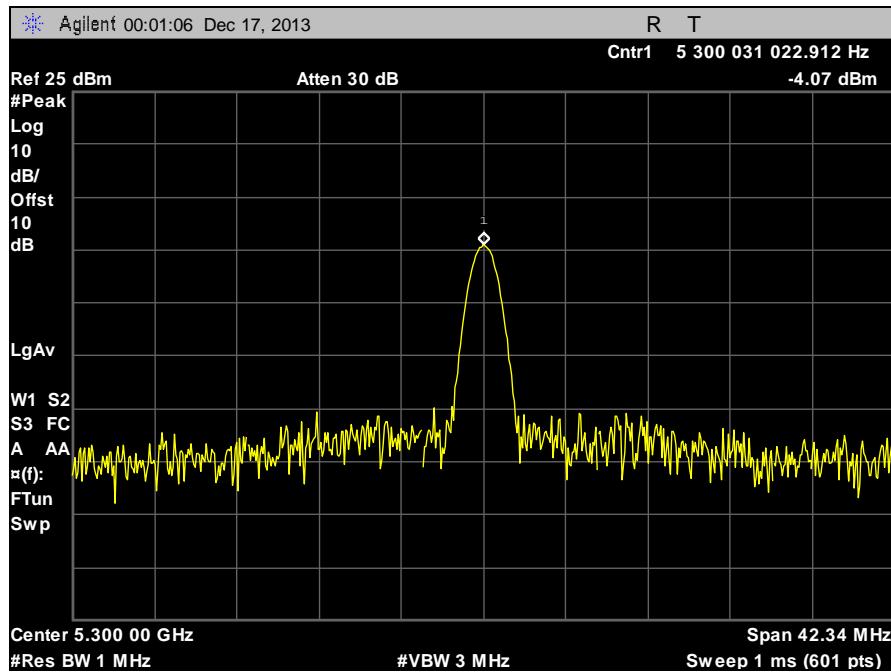


Plot 154. Frequency Stability, 5300 MHz, 20 MHz, 0°C, 120 V

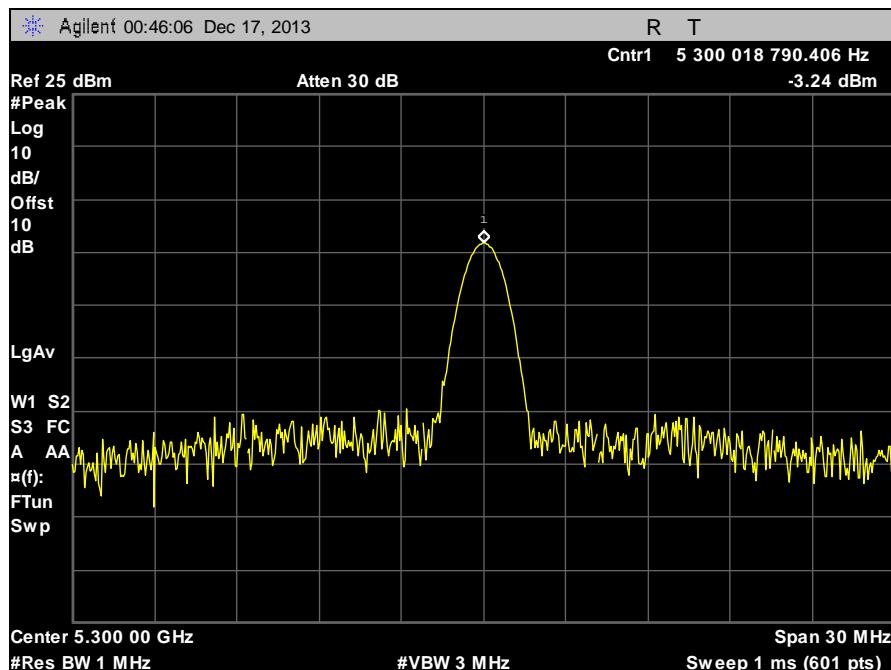


Plot 155. Frequency Stability, 5300 MHz, 20 MHz, 10°C, 120 V

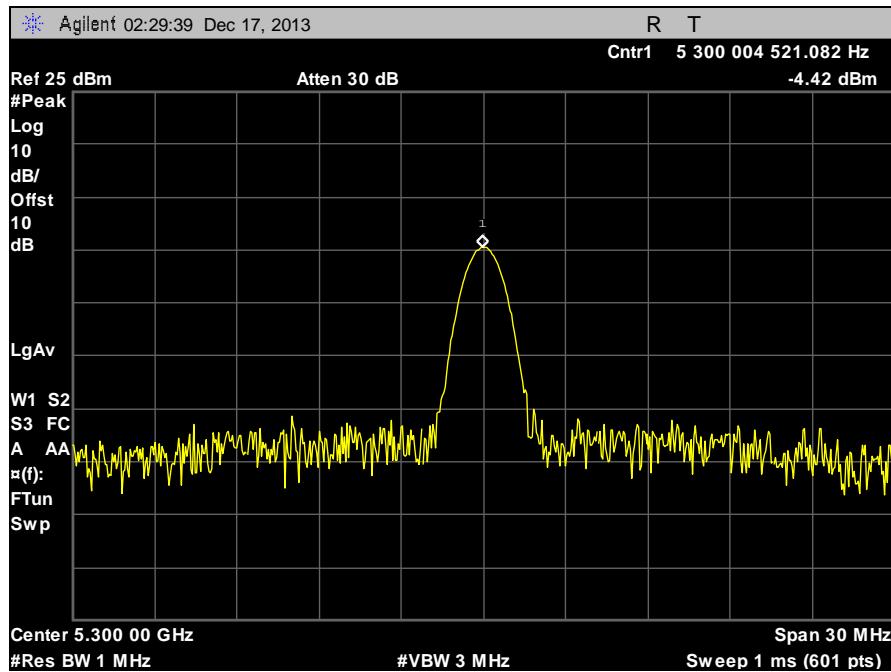


Plot 156. Frequency Stability, 5300 MHz, 20 MHz, 20°C, 108V

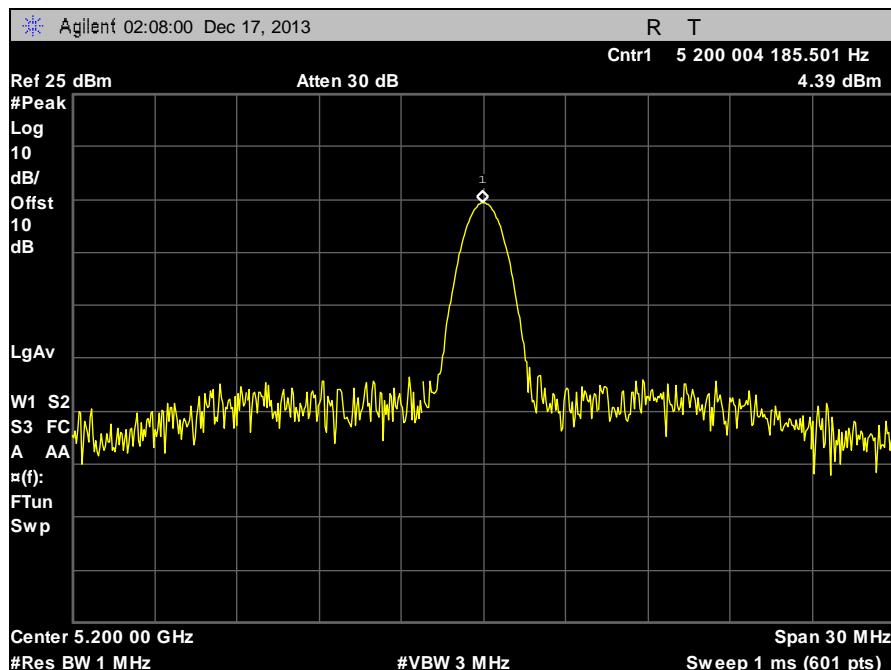


Plot 157. Frequency Stability, 5300 MHz, 20 MHz, 20°C, 120 V

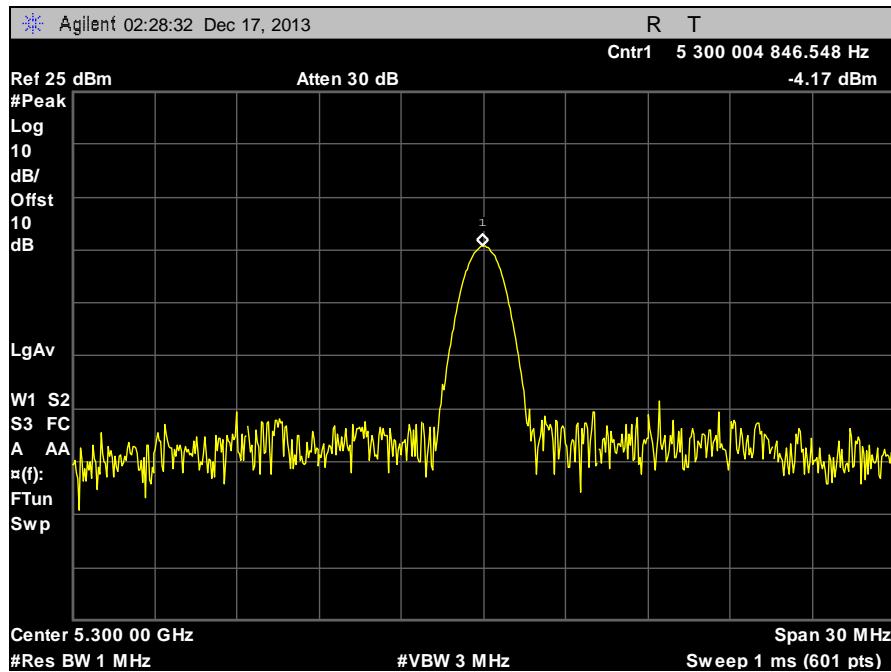


Plot 158. Frequency Stability, 5300 MHz, 20 MHz, 20°C, 132 V

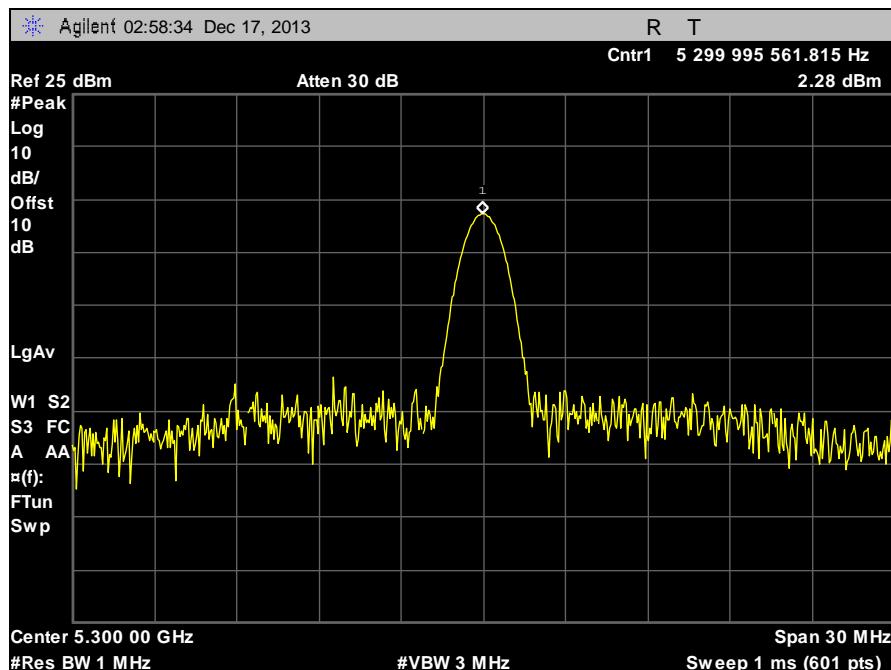


Plot 159. Frequency Stability, 5300 MHz, 20 MHz, 30°C, 120 V

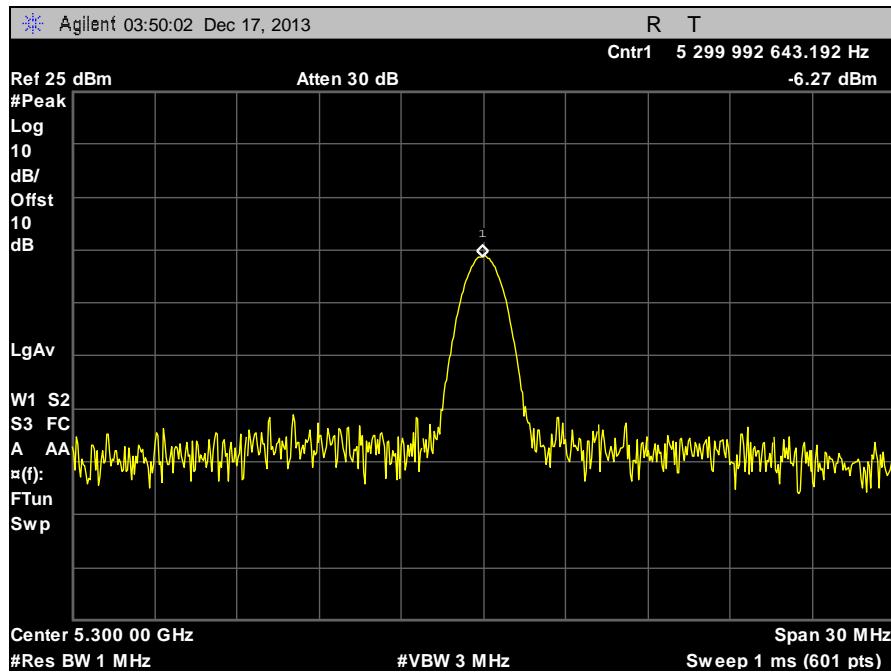

Plot 160. Frequency Stability, 5300 MHz, 20 MHz, 40°C, 120 V

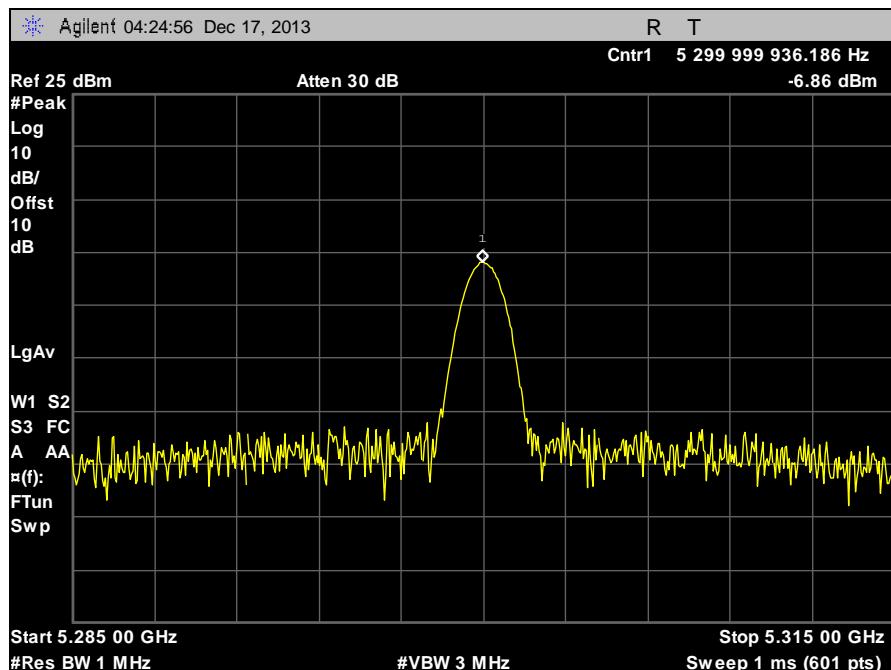

Plot 161. Frequency Stability, 5300 MHz, 20 MHz, 50°C, 120 V

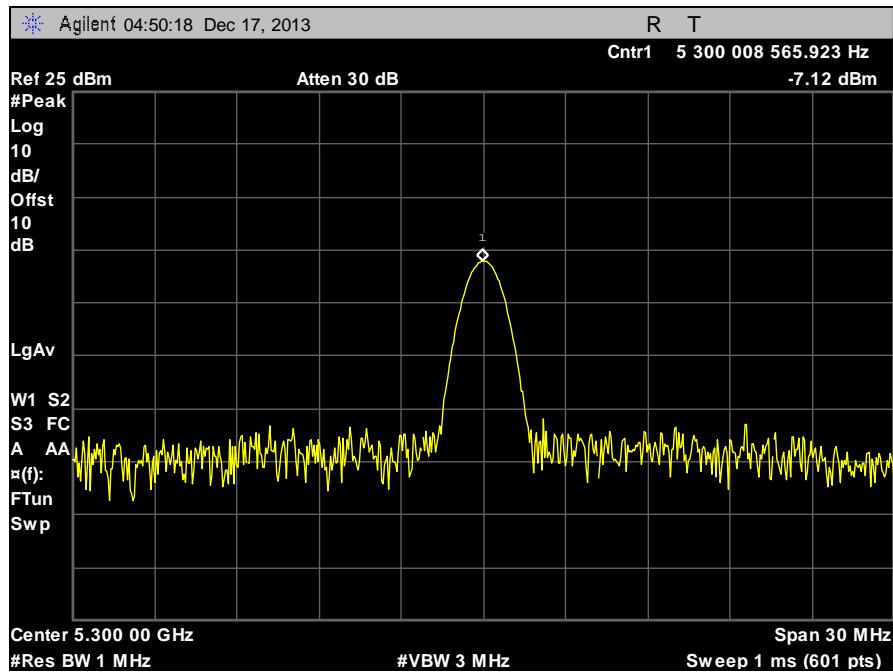

Plot 162. Frequency Stability, 5300 MHz, 20 MHz, 55°C, 120 V

---

## V. DFS Requirements and Radar Waveform Description & Calibration

## A. DFS Requirements

<b>Requirement</b>	<b>Operational Mode</b>		
	<b>Master</b>	<b>Client Without Radar Detection</b>	<b>Client With Radar Detection</b>
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>Uniform Spreading</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Table 18. Applicability of DFS Requirements Prior to Use of a Channel

<b>Requirement</b>	<b>Operational Mode</b>		
	<b>Master</b>	<b>Client Without Radar Detection</b>	<b>Client With Radar Detection</b>
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Table 19. Applicability of DFS Requirements During Normal Operation

<b>Maximum Transmit Power</b>	<b>Value</b>
$\geq 200$ milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

**Note 1:** This is the level at the input of the receiver assuming a 0 dBi receive antenna  
**Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Table 20. DFS Detection Thresholds for Master or Client Devices Incorporating DFS

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the 99% power bandwidth. See Note 3.

**Note 1:** The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

**Note 2:** The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required facilitating *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

**Table 21. DFS Response Requirement Values**

## B. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

### Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

### Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Bursts	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst\_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst\_Count. Each interval is of length  $(12,000,000 / \text{Burst\_Count})$  microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst\_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

**A representative example of a Long Pulse radar test waveform:**

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst\_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

## Graphical Representation of a Long Pulse radar Test Waveform

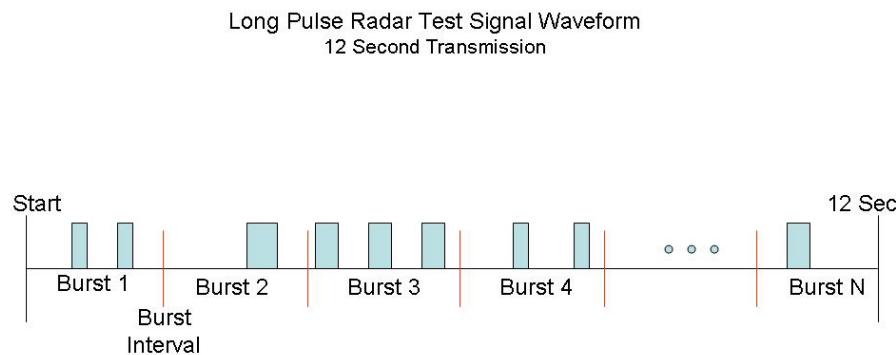

**Figure 5. Long Pulse Radar Test Signal Waveform**

## Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected<sup>1</sup> from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

### C. Radar Waveform Calibration

The following equipment setup was used to calibrate the radiated Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer's resolution bandwidth (RBW) was set to 3 MHz and the video bandwidth (VBW) was set to 3 MHz. The calibration setup is diagrammed in Figure 6, and the radar test signal generator is shown in Photograph 6.



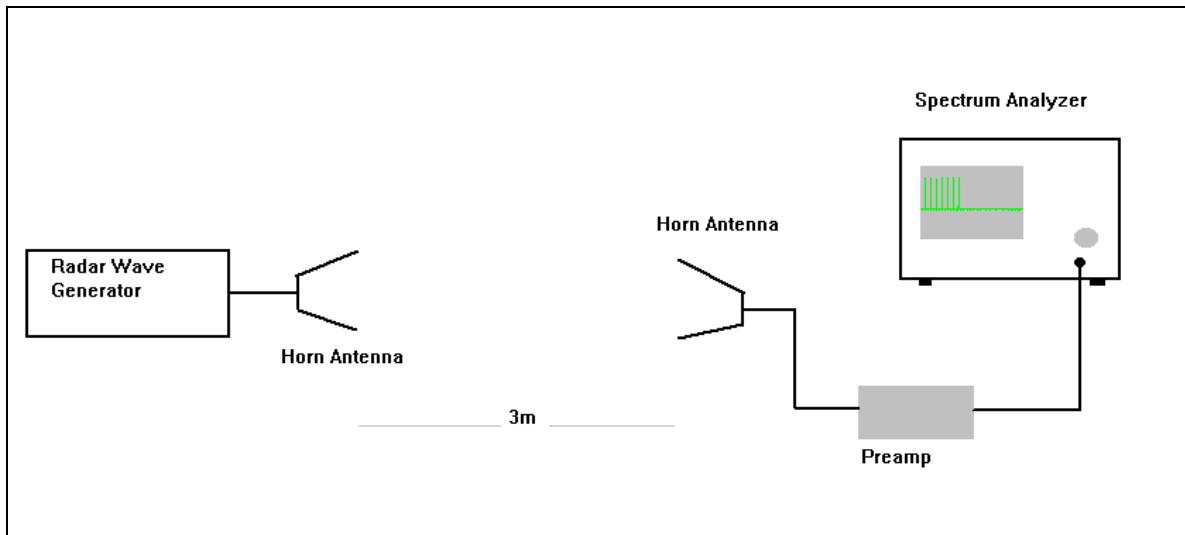


Figure 6. Calibration Test setup

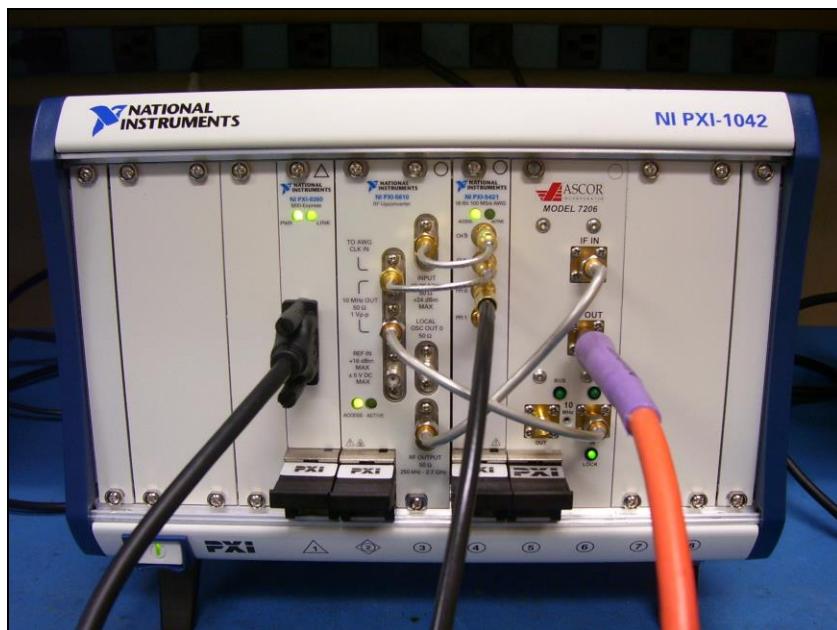


Photograph 6. DFS Radar Test Signal Generator

## Radar Waveform Calibration

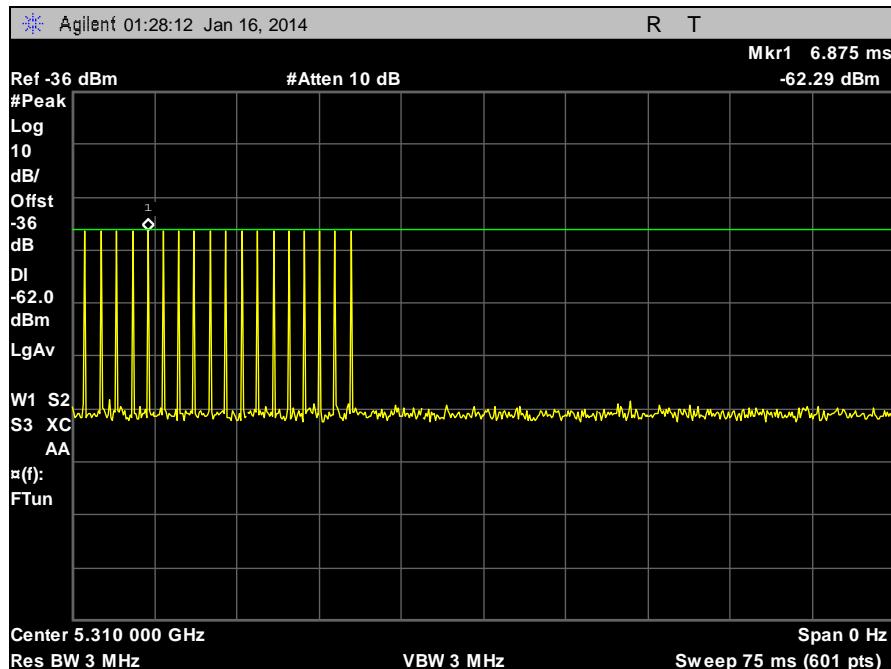

**Plot 150. Calibration, 5310 MHz**

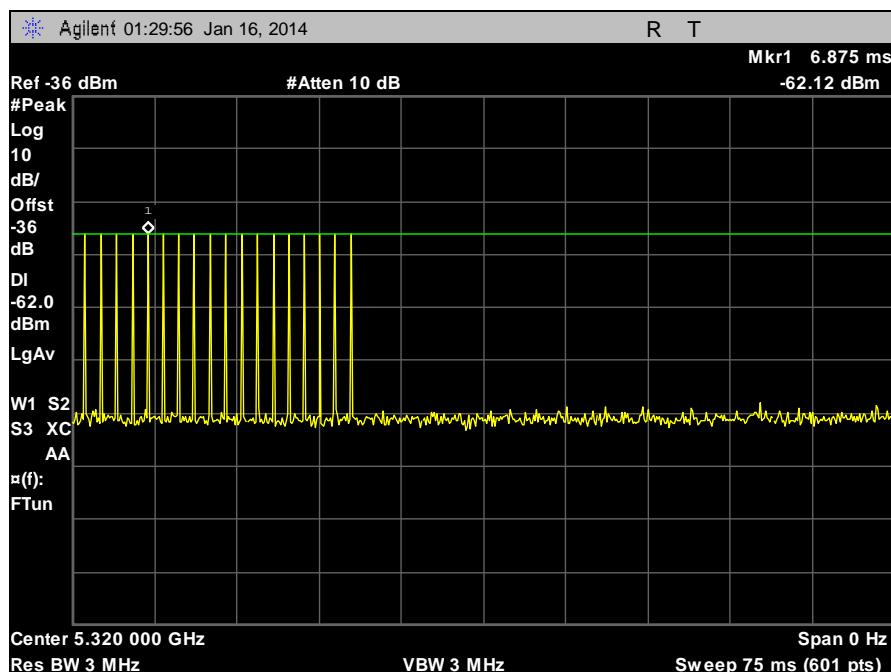

### Plot 151. Calibration, 5320 MHz

## VI. DFS Test Procedure and Test Results

## A. DFS Test Setup

1. A spectrum analyzer is used as a monitor to verify that the Unit Under Test (UUT) has vacated the Channel within the Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and subsequent Channel move. It is also used to monitor UUT transmissions during the Channel Availability Check Time.
2. The test setup, which consists of test equipment and equipment under test (EUT), is diagrammed in Figure 7 and pictured in Photograph 7


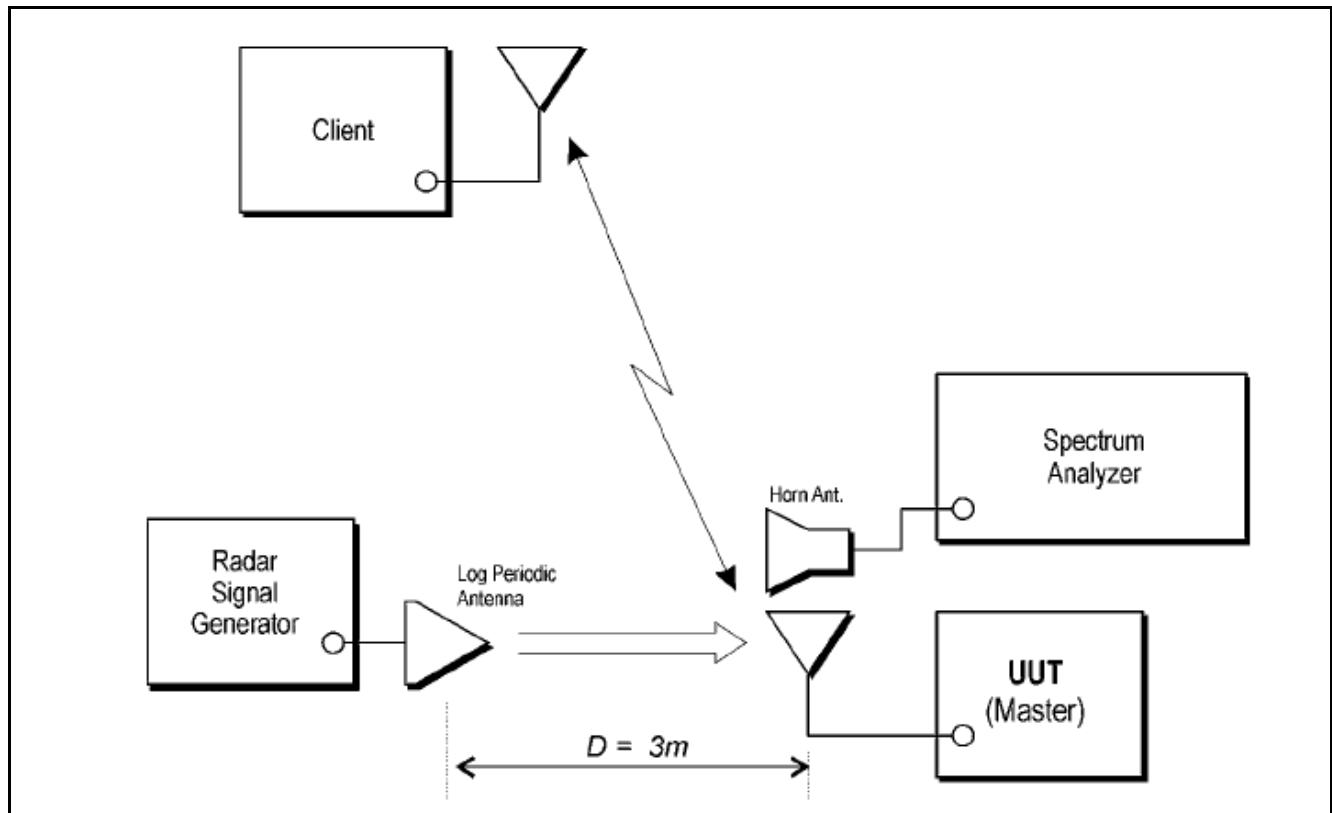


Figure 7. Test Setup Diagram



Photograph 7. Client, Test Setup

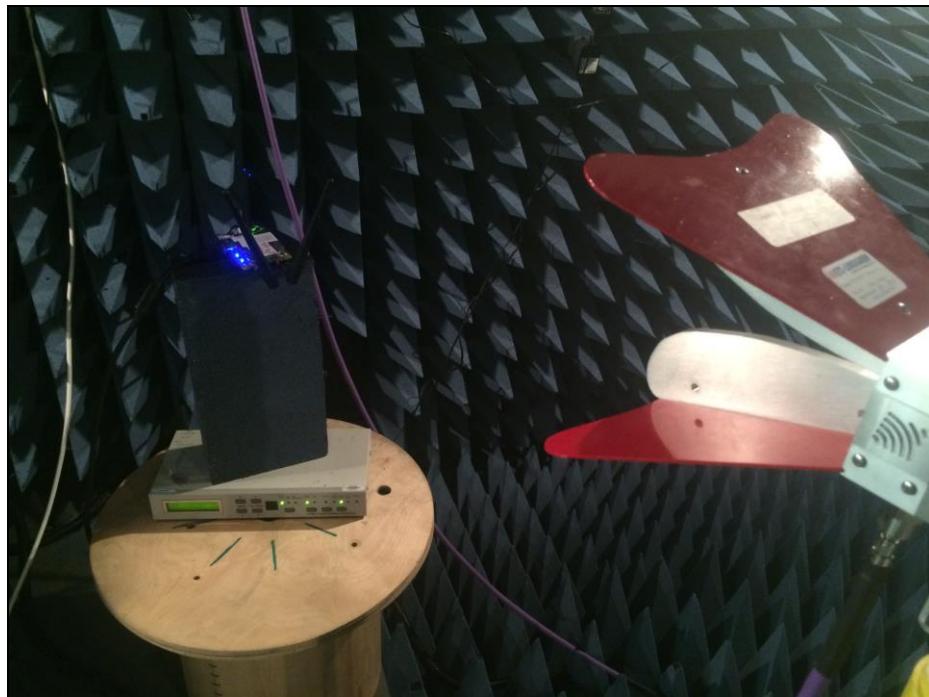

Photograph 8. Master, Test Setup

## B. EUT Information

1. Operating frequency range is 5150-5825 MHz
2. The EUT is a Client device without radar detection
3. The Client device does not have radar capability. It was tested with an approved Master (FCC ID: VQSAMN36254)
4. Highest EIRP = 26.09 dBm; Lowest EIRP = 2dBm
5. 5 dBi Omni-directional antennas
6. For loading the channel in 96% of the time we transmit 1080p60 video resolution pattern. This video pattern is played from video source device that is connected to Falcon TX module through HDMI cable.
7. The goal of the TPC is to maintain average input power of the received antennas within a certain range. The RX should measure the Pin of the 5 received antennas, calculate the average power and then instruct the TX how much output power to transmit.
8. System block diagram is included in user manual Data rate - 63Mbps per channel Channel BW - 20MHz or 40MHz Frame based.
9. 60 seconds to complete power-on cycle.
10. Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user is submitted as a separate declaration in the filing.

## C. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time, and Non-Occupancy Period

**Test Requirements:** **§ 15.407** (Refer to DFS Response Requirement Values table in section III-A of this report.) The UUT shall continuously monitor for radar transmissions in the operating test channel. When a radar burst occurs in the test channel, it has 10 seconds to move to another channel. This 10 second window is termed Channel Move Time (CMT).

When a radar burst occurs, the UUT has 200 milliseconds, plus an aggregate of 60 milliseconds, to cease transmission in the operating test channel. This 200 ms + 60 ms requirement is termed Channel Closing Transmission Time (CCT).

After radar burst and subsequent move to another channel, the UUT shall not resume transmission, on the channel it moved from, for a period of 30 minutes. This requirement is termed Non-Occupancy Period (NOP).

**Test Procedure:** These tests define how the following DFS parameters are verified during In-Service Monitoring: Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-62dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5310 , and 5320 MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -62dBm.


Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time results to the limits defined in the *DFS Response Requirement Values table*.

**Test Results:** The EUT was compliant with § 15.407 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time, and Non-Occupancy Period.


**Test Engineer:** Djed Mouada

**Test Date:** 01/17/14


## Channel Move Time – Plots

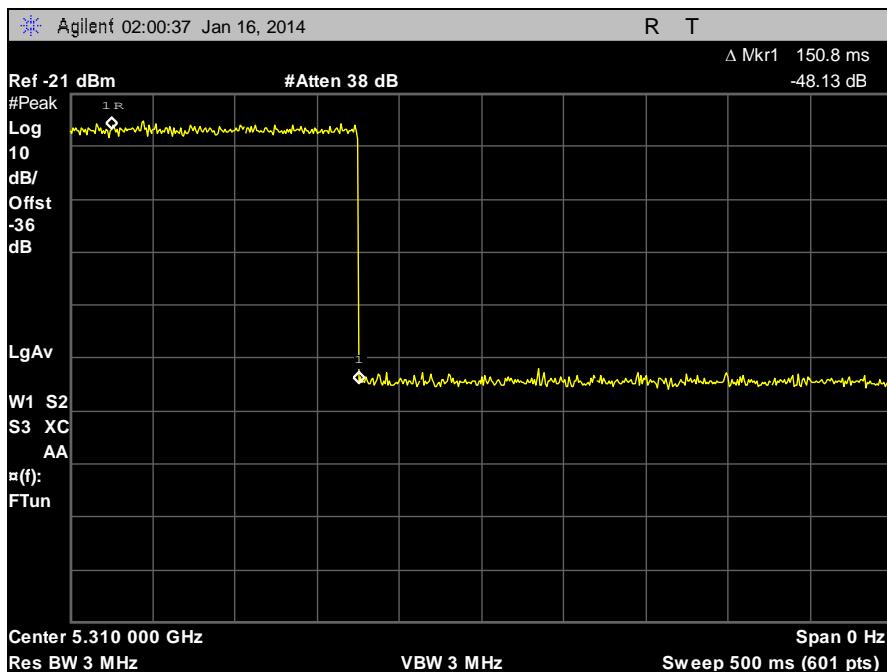


Plot 152. Channel Close, 5310 MHz

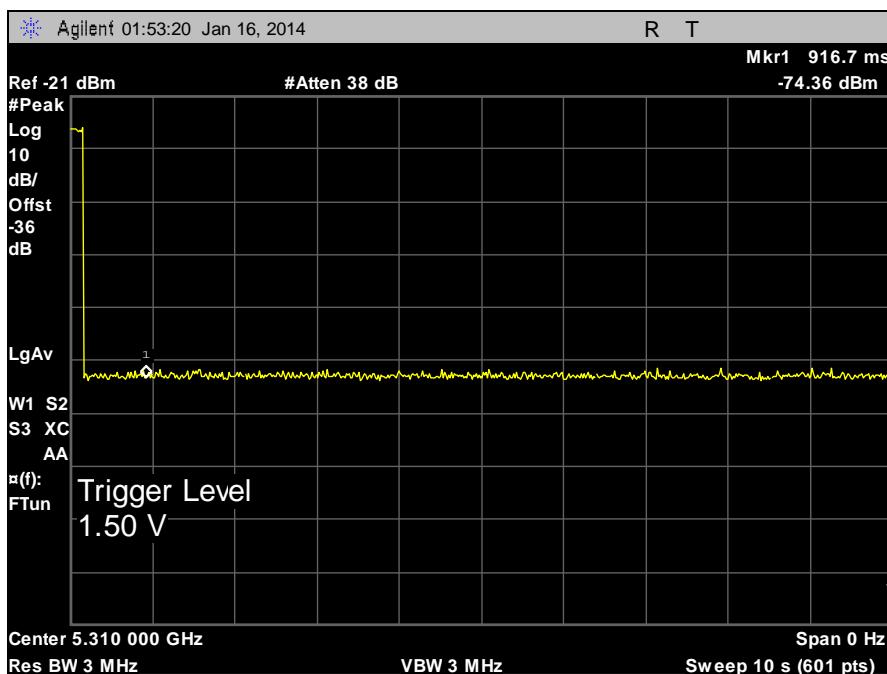

Plot 153. Closing Time, 5310 MHz

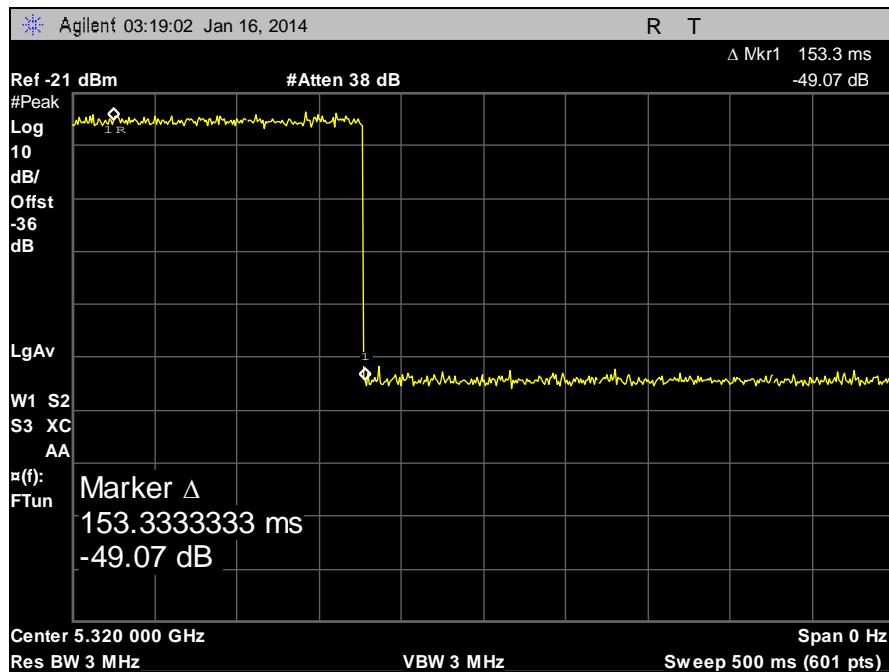


Plot 154. Channel Close, 5320 MHz

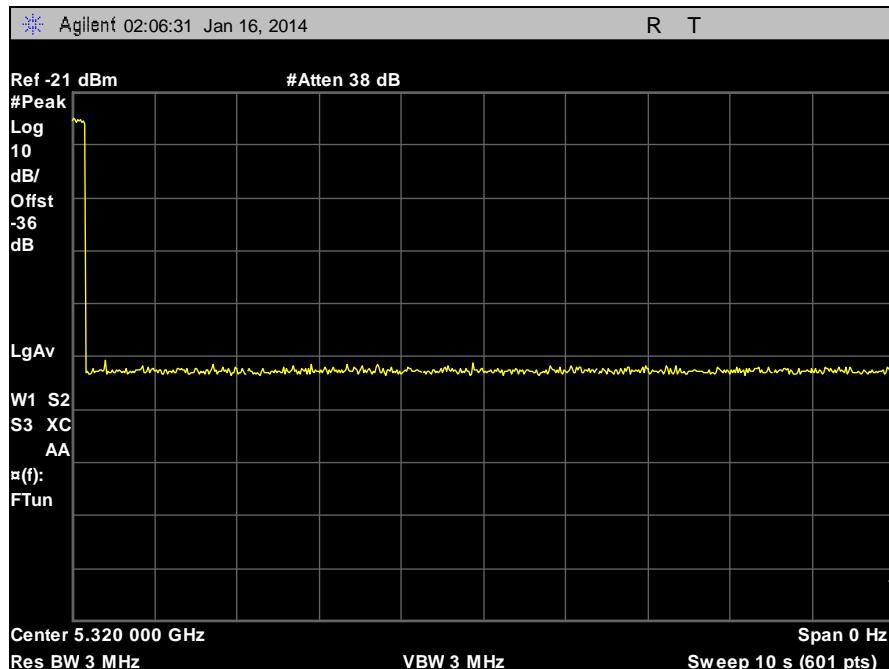


Plot 155. Closing Time, 5320 MHz

## Non-Occupancy Period – Plot

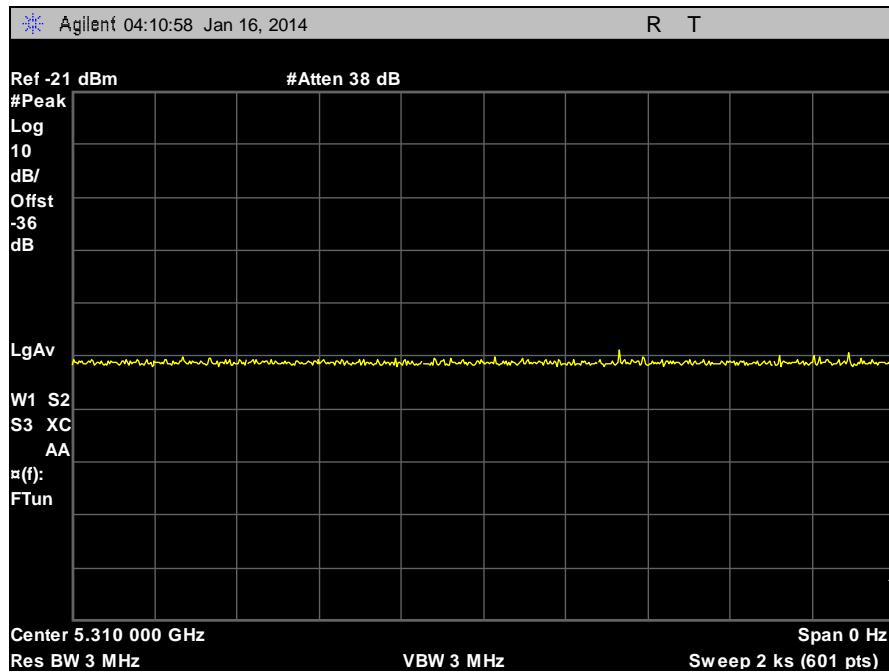

Plot 156. Non-Occupancy Period, 5310 MHz

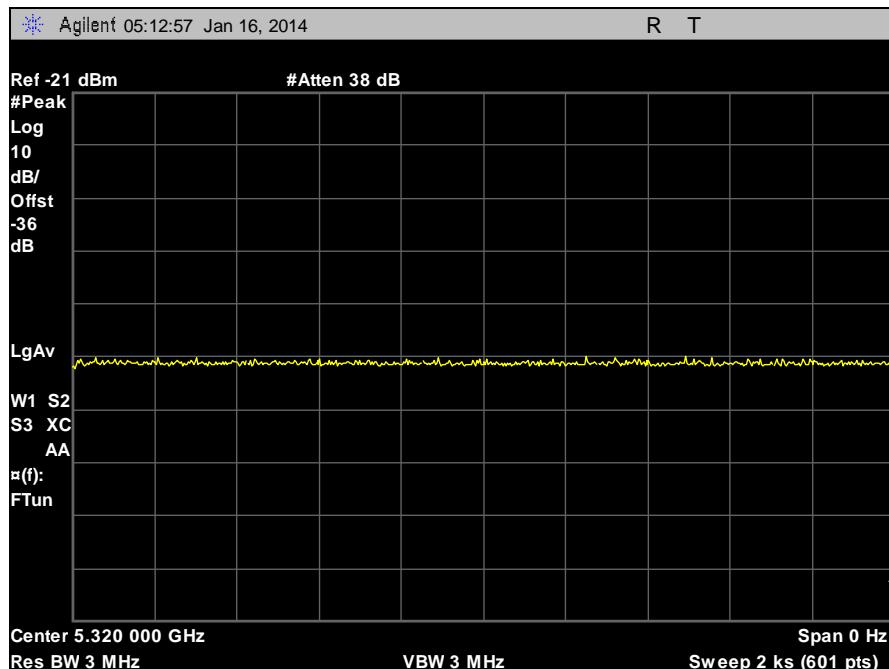

Plot 157. Non-Occupancy Period, 5320 MHz

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET ASSET #	EQUIPMENT	MANUFACTURER	MODEL	LAST CAL DATE	CAL DUE DATE
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY-PROOF	81	SEE NOTE	
1T4300	SEMI-ANECHOIC CHAMBER #1 (FCC)	EMC TEST SYSTEMS	NONE	7/24/2012	7/24/2015
1T4612	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	5/23/2012	11/23/2013
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	7/16/2012	7/16/2013
1T4753	ANTENNA - BILOG	SUNOL SCIENCES	JB6	1/5/2012	7/5/2013
1T4505	TEMPERATURE CHAMBER	TEST EQUITY	115	12/2/2012	12/2/2013
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	8/6/2012	2/6/2014
1T2511	ANTENNA; HORN	EMCO	3115	9/22/2011	3/22/2013
1T4502	COMB GENERATOR	COM-POWER	CGC-255	8/21/2012	2/21/2014
1T4503	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	SEE NOTE	
1T4791	THERM./CLOCK/HUMIDITY	CONTROL COMPANY	06-662-4	3/8/2012	3/8/2014
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS	9322-50-R-10-BNC	11/27/2012	5/27/2014
1T2948	LISN	SOLAR ELECTRONICS	8028-50-TS-24-BNC	1/30/2012	7/30/2013
1T2278	SWEPT SIGNAL GENERATOR	HEWLETT PACKARD	83650B	10/31/2012	10/31/2013
1T4771	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	12/12/2012	12/12/2013
1T4745	ANTENNA; HORN	ETS-LINDGREN	3116	10/19/2012	10/19/2013
1T4681	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4448A	10/18/2012	4/18/2014
1T4504	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	SEE NOTE	
1T4752	PRE-AMPLIFIER	MITEQ	JS44-18004000-35-8P		SEE NOTE
1S2602	DFS SIGNAL GENERATOR	NATIONAL INSTRUMENTS	NIPXI-1042		SEE NOTE
1T4568	RADIATING NOISE SOURCE	MET LABORATORIES	N/A		SEE NOTE
1T4814	COMB GENERATOR	COM-POWER	CGO-5100		SEE NOTE
1T4479	POWER SUPPLY PROGRAMMABLE	CALIFORNIA INSTRUMENTS	1501TC		SEE NOTE

**Table 22. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Amimon  
Kite Tx

Electromagnetic Compatibility  
Certification & User's Manual Information  
CFR Title 47, Part 15B & 15E; ICES-003 & RSS-210

## V. Certification & User's Manual Information



Amimon  
Kite Tx

Electromagnetic Compatibility  
Certification & User's Manual Information  
CFR Title 47, Part 15B & 15E; ICES-003 & RSS-210

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Amimon  
Kite Tx

Electromagnetic Compatibility  
Certification & User's Manual Information  
CFR Title 47, Part 15B & 15E; ICES-003 & RSS-210

## Certification & User's Manual Information

**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:**

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer*, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Amimon  
Kite Tx

Electromagnetic Compatibility  
Certification & User's Manual Information  
CFR Title 47, Part 15B & 15E; ICES-003 & RSS-210

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Amimon  
Kite Tx

Electromagnetic Compatibility  
Certification & User's Manual Information  
CFR Title 47, Part 15B & 15E; ICES-003 & RSS-210

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Amimon  
Kite Tx

Electromagnetic Compatibility  
End of Report  
CFR Title 47, Part 15B & 15E; ICES-003 & RSS-210

## End of Report