



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	PEGATRON CORPORATION
Applicant Address	5F., NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI CITY 11259, Taiwan
FCC ID	VUI-WAP571
Manufacturer's company	MAINTEK Computer (Suzhou) Co., Ltd.
Manufacturer Address	233 JIN FENG RD NEW DISTRICT SUZHOU JIANGSU 215011 CHINA

Product Name	Wireless-AC/N Premium Dual Radio Access Point with PoE
Brand Name	CISCO
Model No.	WAP571
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jun. 05, 2015
Final Test Date	Aug. 05, 2015
Submission Type	Original Equipment
Operate Mode	Master Client without radar detection Bridge

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	8
3.9. EUT Operation during Test	8
3.10. Duty Cycle.....	8
3.11. Test Configurations	9
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement	17
4.4. 6dB Spectrum Bandwidth Measurement	26
4.5. Radiated Emissions Measurement	33
4.6. Emissions Measurement	53
4.7. Antenna Requirements	71
5. LIST OF MEASURING EQUIPMENTS	72
6. MEASUREMENT UNCERTAINTY	73
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR560260AA	Rev. 01	Initial issue of report	Aug. 19, 2015



1. VERIFICATION OF COMPLIANCE

Product Name : Wireless-AC/N Premium Dual Radio Access Point with PoE
Brand Name : CISCO
Model No. : WAP571
Applicant : PEGATRON CORPORATION
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 05, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen', is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	3.32 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.24 dB
4.3	15.247(e)	Power Spectral Density	Complies	0.70 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.78 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.10 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From PoE
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	IEEE 802.11b: 12.94 MHz IEEE 802.11g: 24.49 MHz IEEE 802.11n MCS0 (HT20): 27.44 MHz IEEE 802.11n MCS0 (HT40): 36.18 MHz
Maximum Conducted Output Power	IEEE 802.11b: 29.76 dBm IEEE 802.11g: 29.24 dBm IEEE 802.11n MCS0 (HT20): 29.25 dBm IEEE 802.11n MCS0 (HT40): 23.81 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	<input type="checkbox"/> With beamforming <input checked="" type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	Three (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

Description
Wall-mounted rack*1
RJ-45 cable*1: Non-shielded, 1.8m


3.3. Table for Filed Antenna

Ant.	Brand	Part Number	Antenna Type	Connector	Gain (dBi)
1	Hong Lin	290-30261	PIFA Antenna	I-PEX	1.05
2	Hong Lin	290-30262	PIFA Antenna	I-PEX	1.11
3	Hong Lin	290-30263	PIFA Antenna	I-PEX	1.28

Note: 1. The EUT has three antennas for 2.4GHz WLAN function use.

2. Chain 1: Connect to Ant. 1, Chain 2: Connect to Ant. 2, Chain 3: Connect to Ant. 3.

3. Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

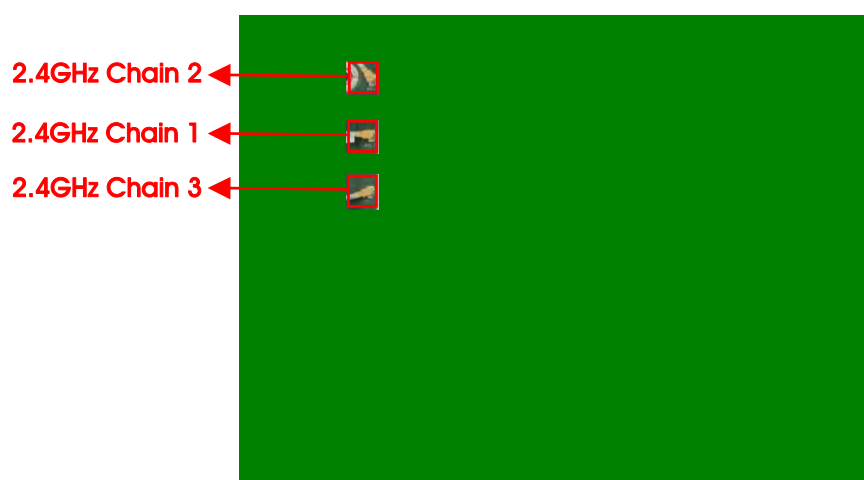

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3

Note: The PoE is for measurement only, would not be marketed.

Support Unit	Brand	Model	FCC ID
PoE	CERIO	POE-S48G	N/A

The following test modes were performed for all tests:

For Radiated Emission below 1GHz test:

Mode 1. Place EUT in Y axis

Mode 2. Place EUT in Z axis

Mode 1 generated the worst test result, so it was recorded in this report.

For Radiated Emission above 1GHz test:

There are two modes of EUT, one is Place EUT in Y axis, and the other is Place EUT in Z axis, after evaluating, Place EUT in Z axis has been evaluated to be the worst case, so it was selected to test and record in this test report.

For Radiated Emission Co-location test:

There are two modes of EUT, one is Place EUT in Y axis, and the other is Place EUT in Z axis.

Place EUT in Y axis generated the worst test result for Radiated emission below 1GHz test, thus the measurement for Radiated emission co-location test will follow this same test configuration.

For Co-location MPE and Radiated Emission Co-location test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB and TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
PoE	CERIO	POE-S48G	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
PoE	CERIO	POE-S48G	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Mtool 2.0.2.3					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	96	100	97	-	-	-
802.11g	81	100	80	-	-	-
802.11n MCS0 HT20	77	100	75	-	-	-
802.11n MCS0 HT40	-	-	-	69	78	65

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.00	0.00	0.01
802.11g	2.058	2.094	98.28	0.08	0.01
802.11n MCS0 HT20	1.884	1.920	98.13	0.08	0.01
802.11n MCS0 HT40	0.916	0.974	94.05	0.27	1.09


3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions Test Configuration

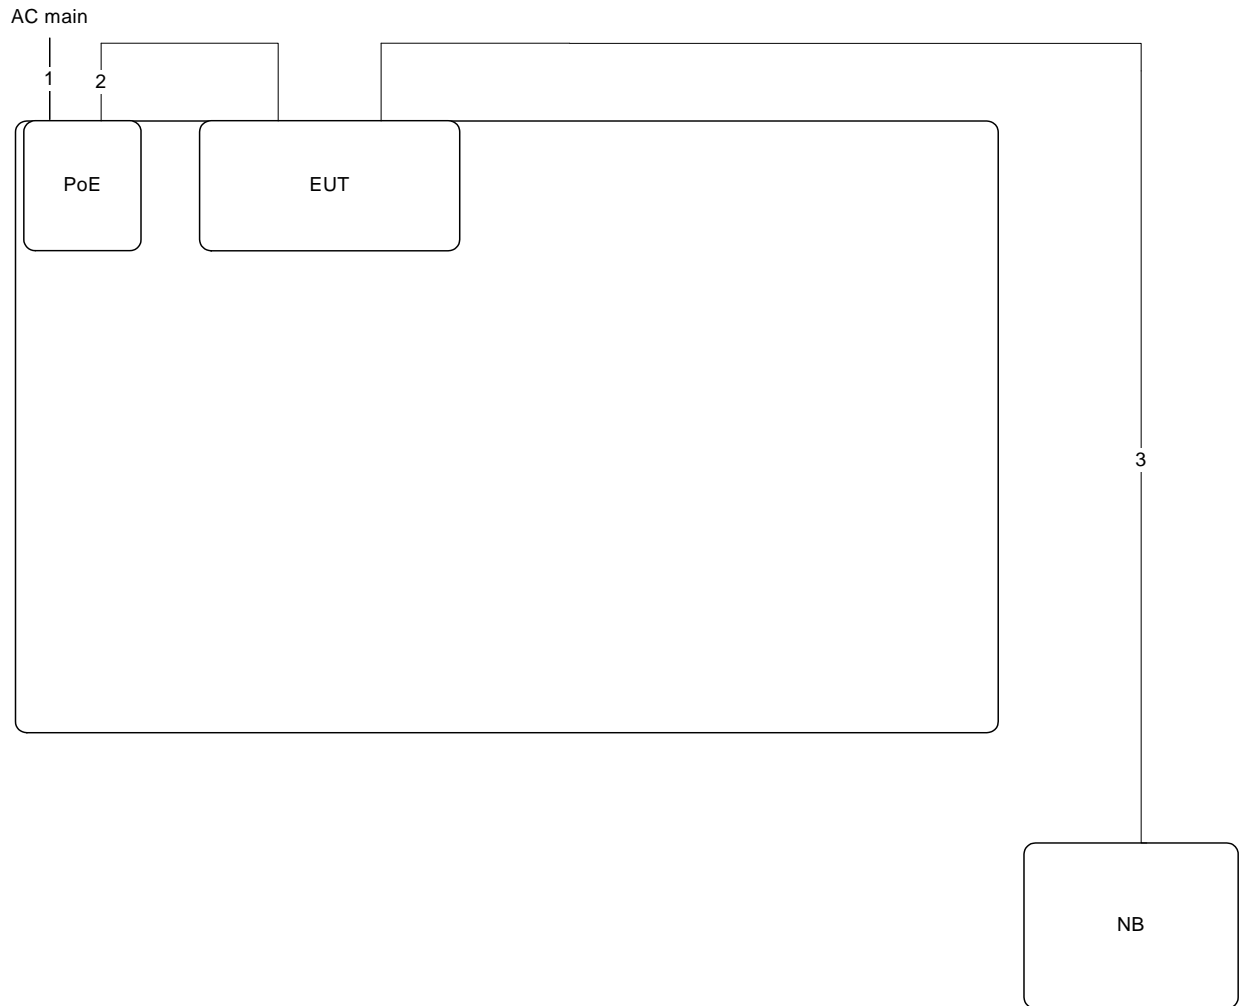

Item	Connection	Shielded	Length
1	Power cable	No	3m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1m

3.11.2. Radiation Emissions Test Configuration

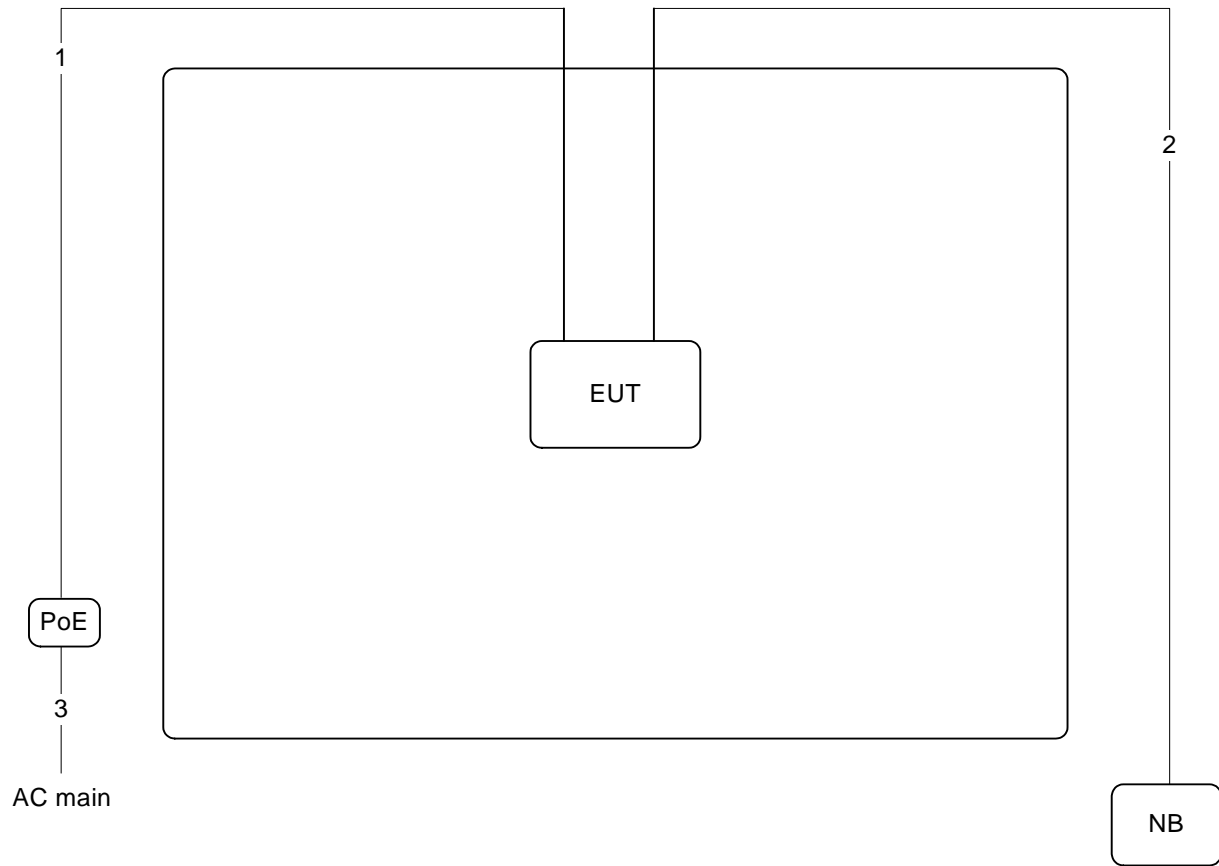

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	10m
3	Power cable	No	3m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

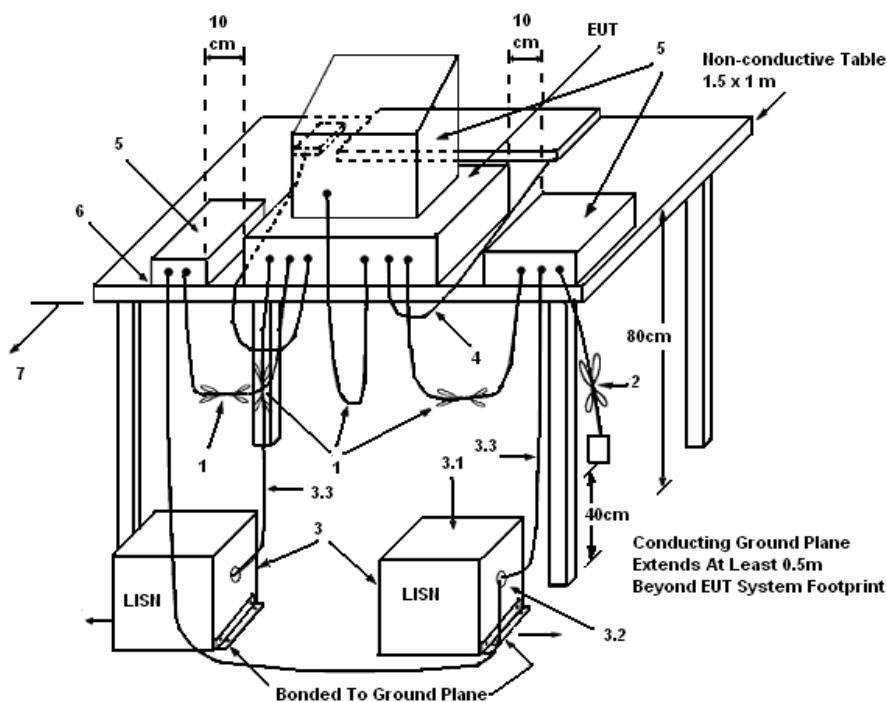

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	60%
Test Engineer	Edison Lin	Phase	Line
Configuration	CTX		

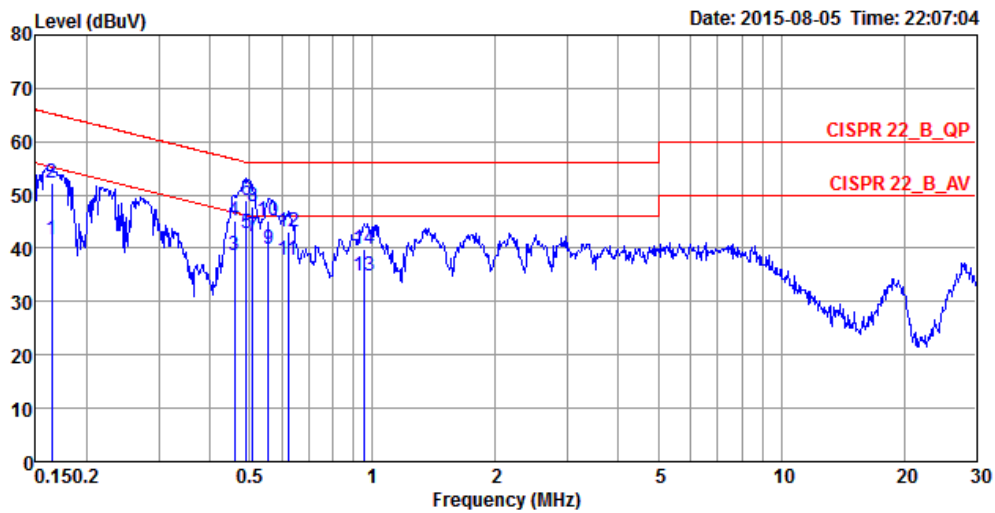

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1641	41.77	-13.48	55.25	31.82	9.93	0.02	LINE	Average
2	0.1641	52.31	-12.94	65.25	42.36	9.93	0.02	LINE	QP
3	0.4588	38.57	-8.14	46.71	28.60	9.93	0.04	LINE	Average
4	0.4588	45.07	-11.64	56.71	35.10	9.93	0.04	LINE	QP
5	0.4915	42.82	-3.32	46.14	32.84	9.94	0.04	LINE	Average
6	0.4915	49.03	-7.11	56.14	39.05	9.94	0.04	LINE	QP
7	0.5101	42.29	-3.71	46.00	32.31	9.94	0.04	LINE	Average
8	0.5101	47.75	-8.25	56.00	37.77	9.94	0.04	LINE	QP
9	0.5552	39.88	-6.12	46.00	29.90	9.94	0.04	LINE	Average
10	0.5552	45.21	-10.79	56.00	35.23	9.94	0.04	LINE	QP
11	0.6205	37.85	-8.15	46.00	27.87	9.94	0.04	LINE	Average
12	0.6205	43.06	-12.94	56.00	33.08	9.94	0.04	LINE	QP
13	0.9531	34.88	-11.12	46.00	24.87	9.96	0.05	LINE	Average
14	0.9531	39.95	-16.05	56.00	29.94	9.96	0.05	LINE	QP

Temperature	23°C	Humidity	60%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	CTX		

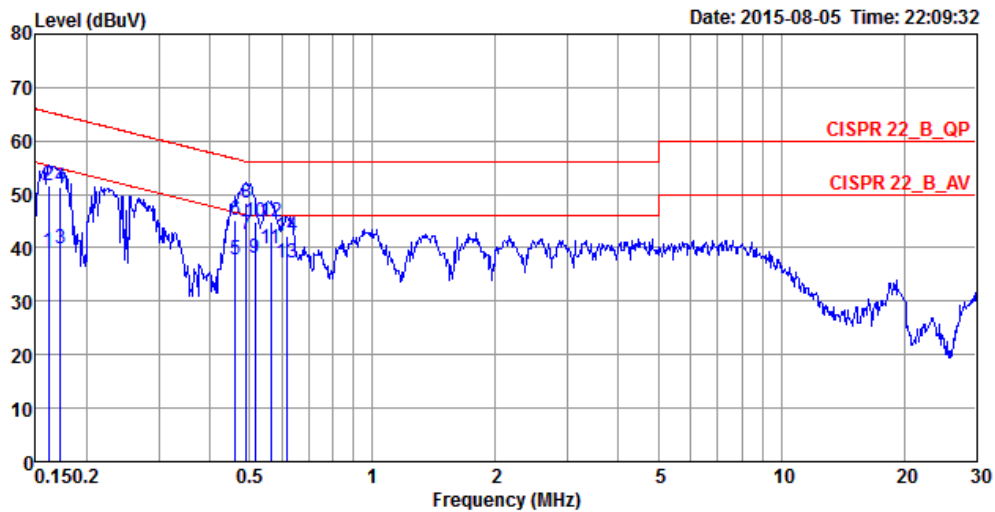

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1616	39.34	-16.04	55.38	29.54	9.78	0.02	NEUTRAL	Average
2	0.1616	51.60	-13.78	65.38	41.80	9.78	0.02	NEUTRAL	QP
3	0.1722	39.76	-15.10	54.86	29.96	9.78	0.02	NEUTRAL	Average
4	0.1722	51.28	-13.58	64.86	41.48	9.78	0.02	NEUTRAL	QP
5	0.4612	37.93	-8.74	46.67	28.10	9.79	0.04	NEUTRAL	Average
6	0.4612	45.04	-11.63	56.67	35.21	9.79	0.04	NEUTRAL	QP
7	0.4915	42.43	-3.71	46.14	32.60	9.79	0.04	NEUTRAL	Average
8	0.4915	48.40	-7.74	56.14	38.57	9.79	0.04	NEUTRAL	QP
9	0.5155	38.14	-7.86	46.00	28.30	9.80	0.04	NEUTRAL	Average
10	0.5155	44.87	-11.13	56.00	35.03	9.80	0.04	NEUTRAL	QP
11	0.5641	39.96	-6.04	46.00	30.12	9.80	0.04	NEUTRAL	Average
12	0.5641	44.87	-11.13	56.00	35.03	9.80	0.04	NEUTRAL	QP
13	0.6173	37.11	-8.89	46.00	27.27	9.80	0.04	NEUTRAL	Average
14	0.6173	42.22	-13.78	56.00	32.38	9.80	0.04	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

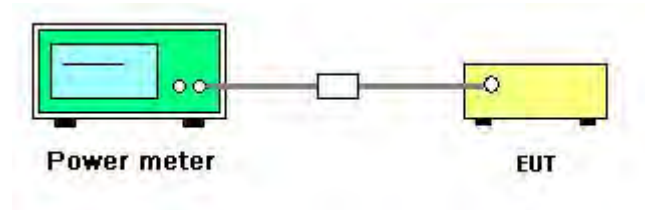

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	26.2°C	Humidity	62%
Test Engineer	Roki Liu	Test Date	Jul. 07, 2015

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11b	2412 MHz	24.30	23.98	24.07	28.89	30.00	Complies
	2437 MHz	24.96	24.98	25.04	29.76	30.00	Complies
	2462 MHz	24.14	24.05	24.26	28.92	30.00	Complies
802.11g	2412 MHz	19.57	19.50	19.58	24.32	30.00	Complies
	2437 MHz	24.51	24.36	24.54	29.24	30.00	Complies
	2462 MHz	19.37	19.37	19.07	24.04	30.00	Complies
802.11n MCS0 HT20	2412 MHz	18.57	18.74	18.49	23.37	30.00	Complies
	2437 MHz	24.48	24.41	24.54	29.25	30.00	Complies
	2462 MHz	18.01	18.08	17.96	22.79	30.00	Complies
802.11n MCS0 HT40	2422 MHz	17.32	17.36	17.01	22.00	30.00	Complies
	2437 MHz	19.18	19.15	18.78	23.81	30.00	Complies
	2452 MHz	16.07	16.03	15.91	20.78	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

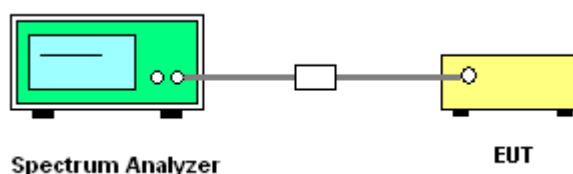

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	26.2°C	Humidity	62%
Test Engineer	Roki Liu		


Mode	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11b	2412 MHz	2.95	1.64	2.10	7.04	8.00	Complies
	2437 MHz	2.45	2.50	2.62	7.30	8.00	Complies
	2462 MHz	2.30	2.80	2.43	7.29	8.00	Complies
802.11g	2412 MHz	-5.12	-4.79	-5.25	-0.28	8.00	Complies
	2437 MHz	-0.79	-0.79	0.16	4.32	8.00	Complies
	2462 MHz	-5.36	-4.62	-6.46	-0.64	8.00	Complies
802.11n MCS0 HT20	2412 MHz	-5.51	-5.48	-5.99	-0.88	8.00	Complies
	2437 MHz	0.31	-1.43	-1.06	4.11	8.00	Complies
	2462 MHz	-6.69	-6.97	-7.07	-2.14	8.00	Complies
802.11n MCS0 HT40	2422 MHz	-10.19	-9.60	-11.03	-5.46	8.00	Complies
	2437 MHz	-8.23	-8.20	-7.76	-3.29	8.00	Complies
	2452 MHz	-10.19	-12.63	-11.40	-6.52	8.00	Complies

Note: $Directional\ Gain = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{K=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 5.92 \text{dBi} < 6 \text{dBi}$, so the limit doesn't reduce.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

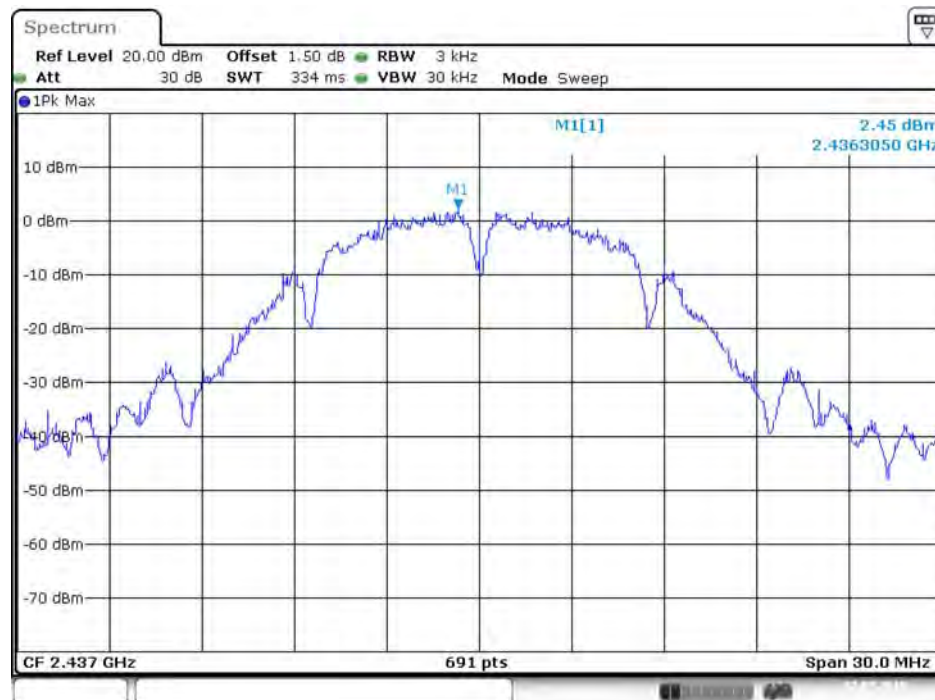

Date: 7.JUL.2015 15:57:51

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2




Date: 7.JUL.2015 15:59:09

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3




Date: 7.JUL.2015 16:00:07

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

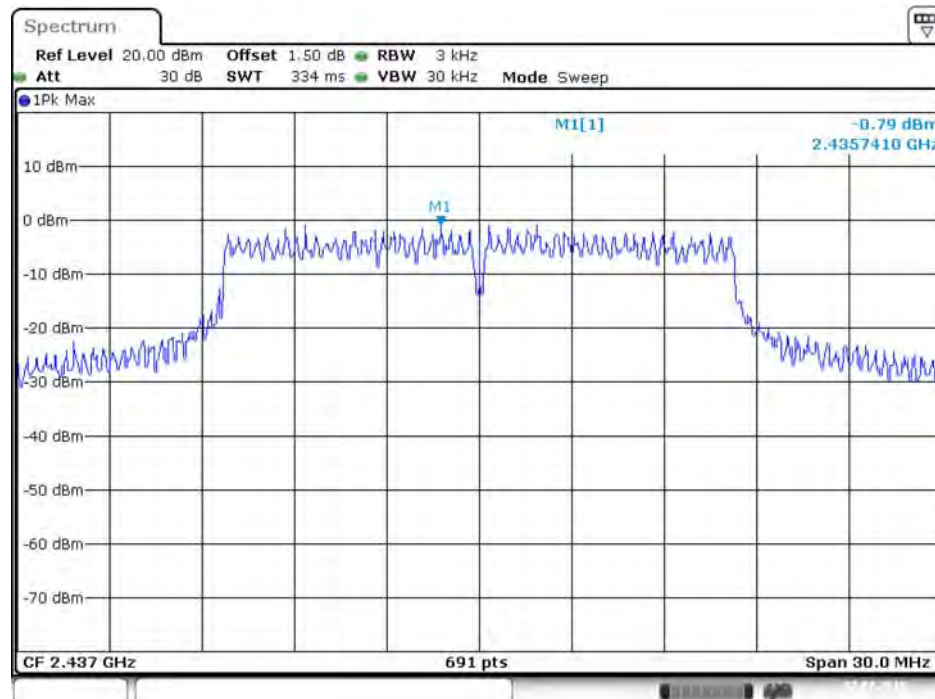


Date: 7.JUL.2015 16:13:03

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

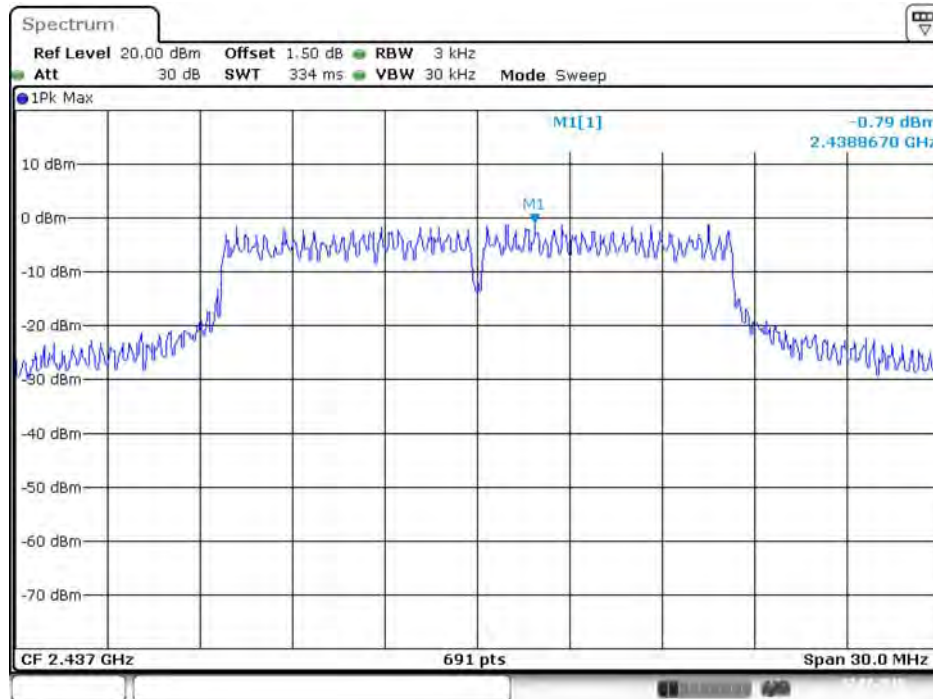


Date: 7.JUL.2015 16:12:14

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

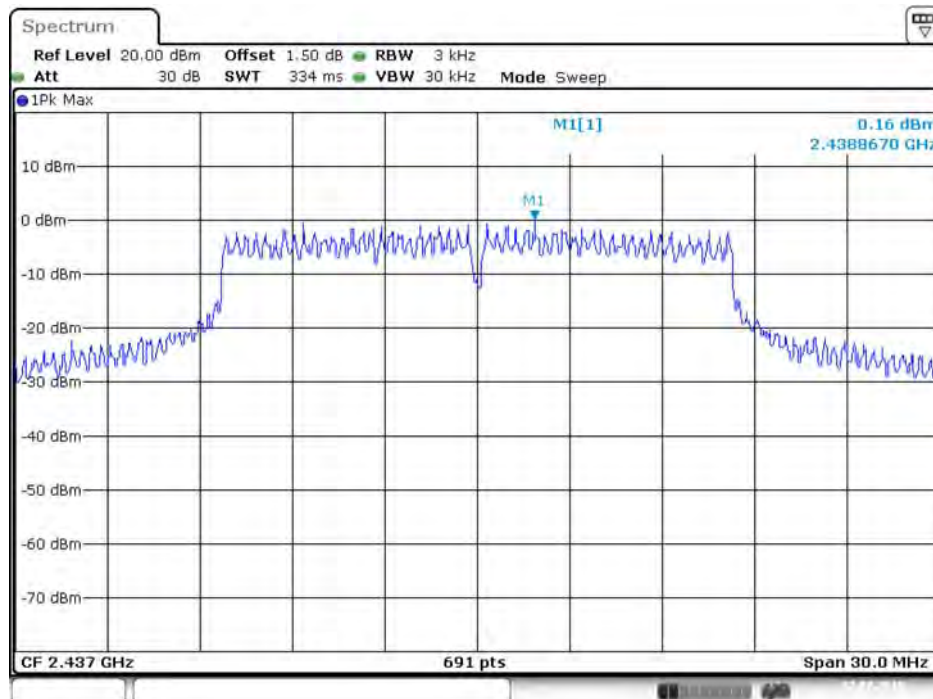


Date: 7.JUL.2015 16:11:15

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

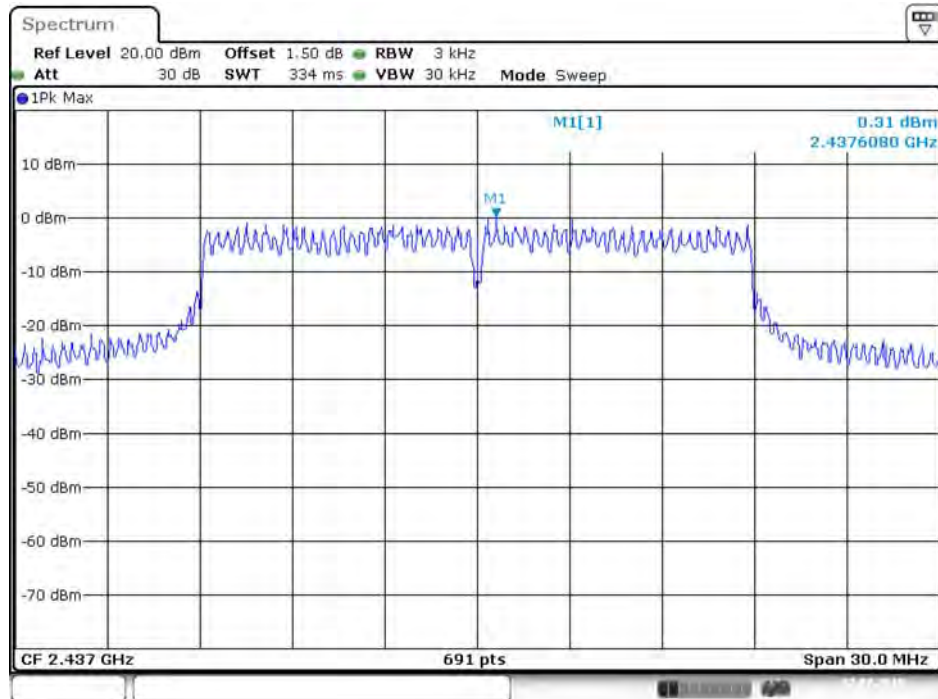


Date: 7.JUL.2015 16:26:03

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

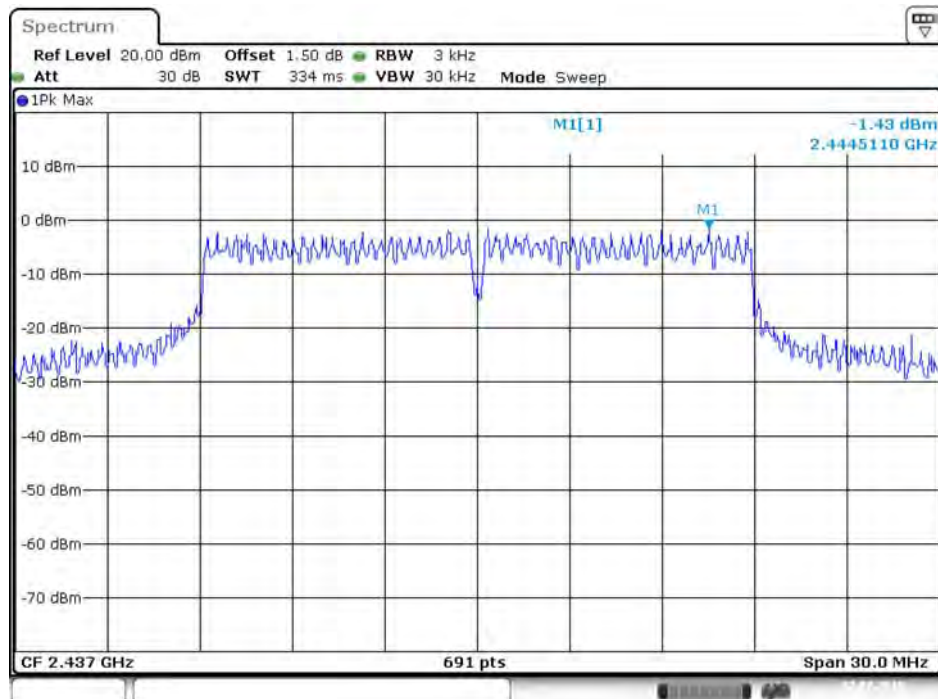


Date: 7.JUL.2015 16:24:00

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

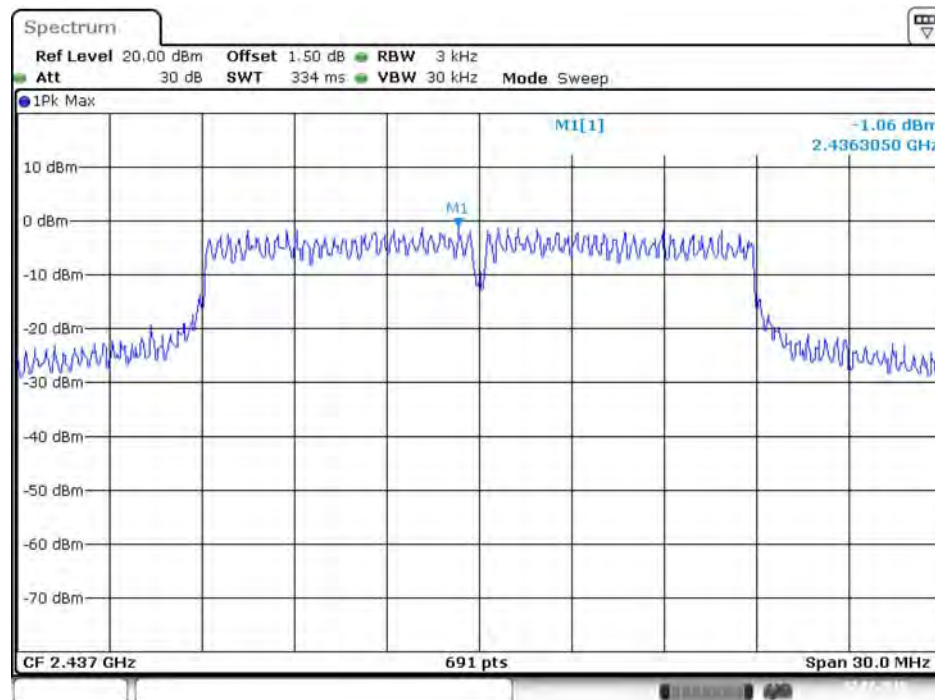


Date: 7.JUL.2015 16:24:45

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

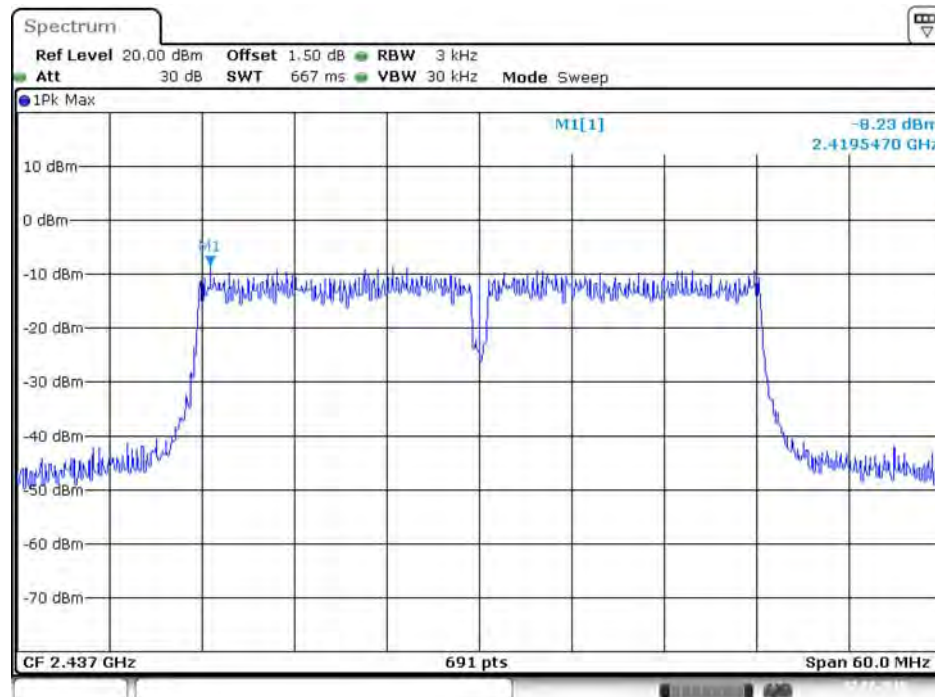


Date: 7.JUL.2015 16:48:52

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

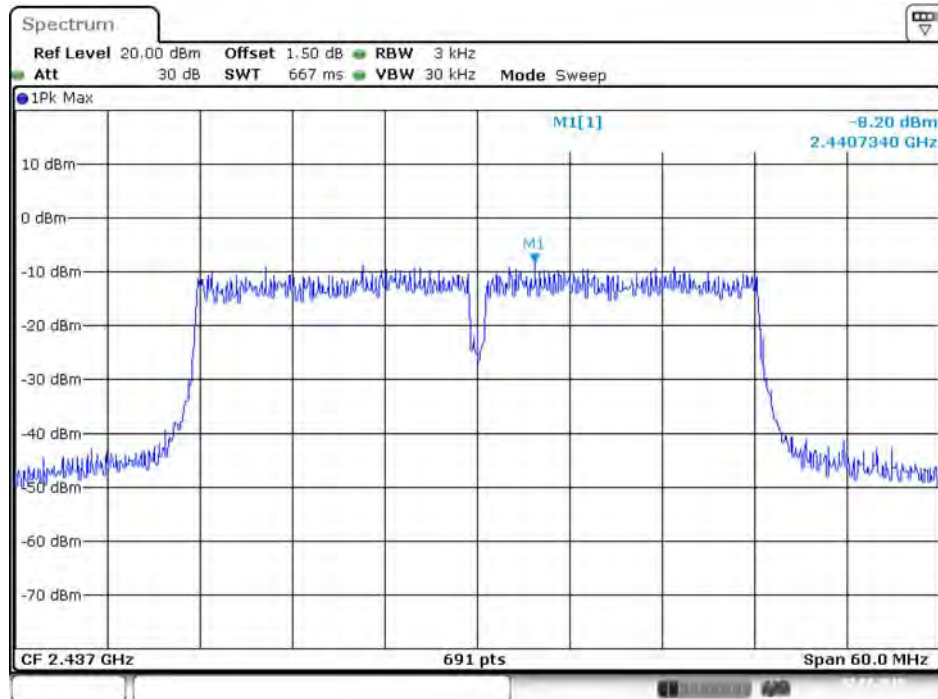

Date: 7.JUL.2015 16:36:37

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

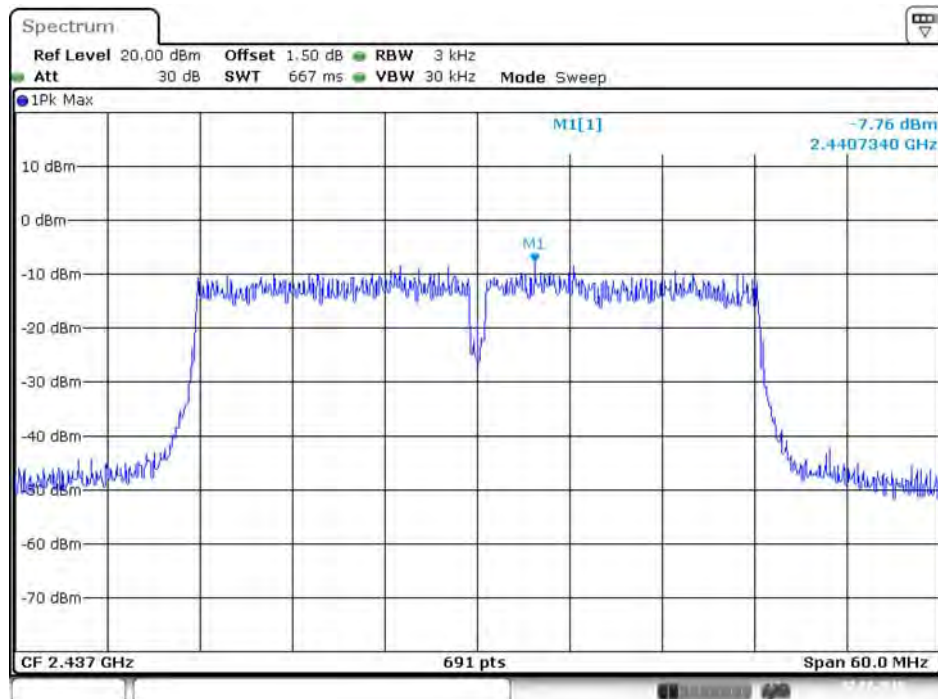

Date: 7.JUL.2015 16:46:13

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth = > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	26.2°C	Humidity	62%
Test Engineer	Roki Liu		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	9.04	12.42	500	Complies
	2437 MHz	8.99	12.94	500	Complies
	2462 MHz	9.04	12.42	500	Complies
802.11g	2412 MHz	11.94	16.85	500	Complies
	2437 MHz	11.25	24.49	500	Complies
	2462 MHz	14.49	16.76	500	Complies
802.11n MCS0 HT20	2412 MHz	15.13	17.63	500	Complies
	2437 MHz	15.07	27.44	500	Complies
	2462 MHz	15.13	17.71	500	Complies
802.11n MCS0 HT40	2422 MHz	33.86	35.89	500	Complies
	2437 MHz	32.58	36.18	500	Complies
	2452 MHz	33.86	36.03	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3




Date: 7.JUL.2015 17:14:11

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3

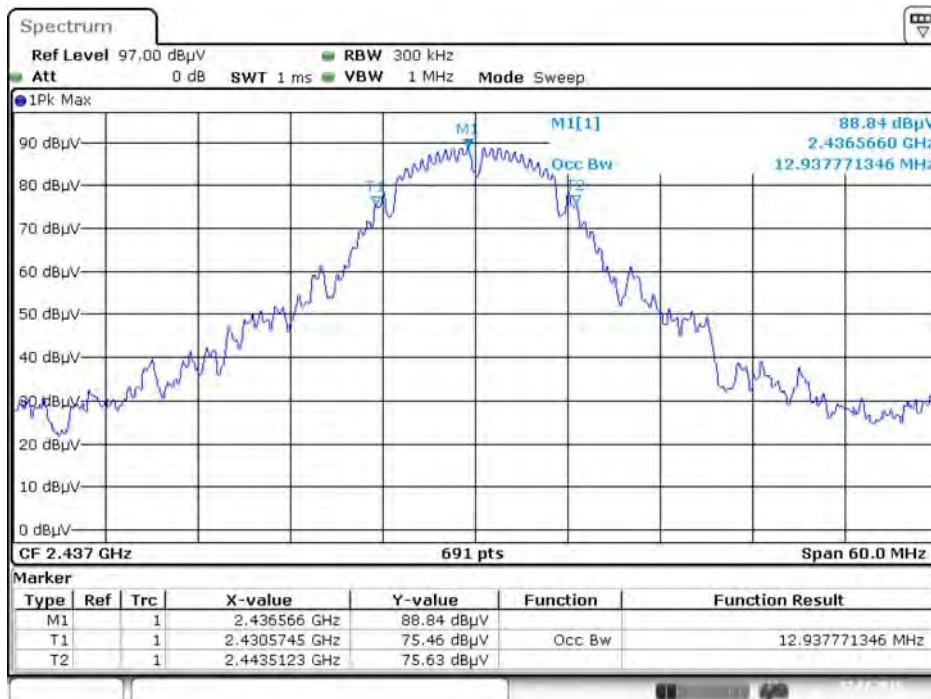


Date: 7.JUL.2015 17:03:59

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3

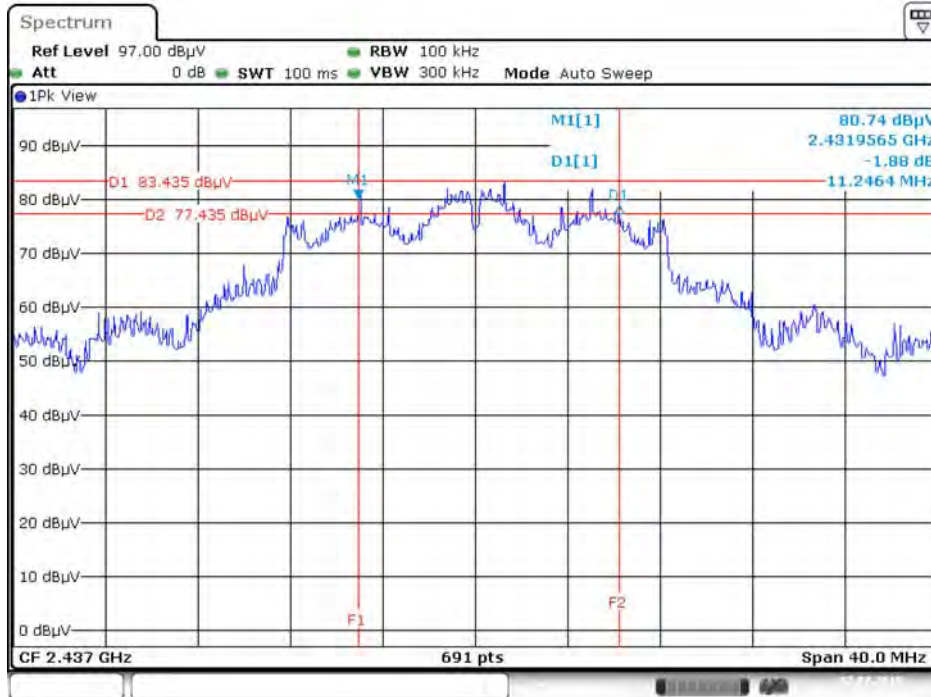

Date: 7.JUL.2015 17:17:42

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3

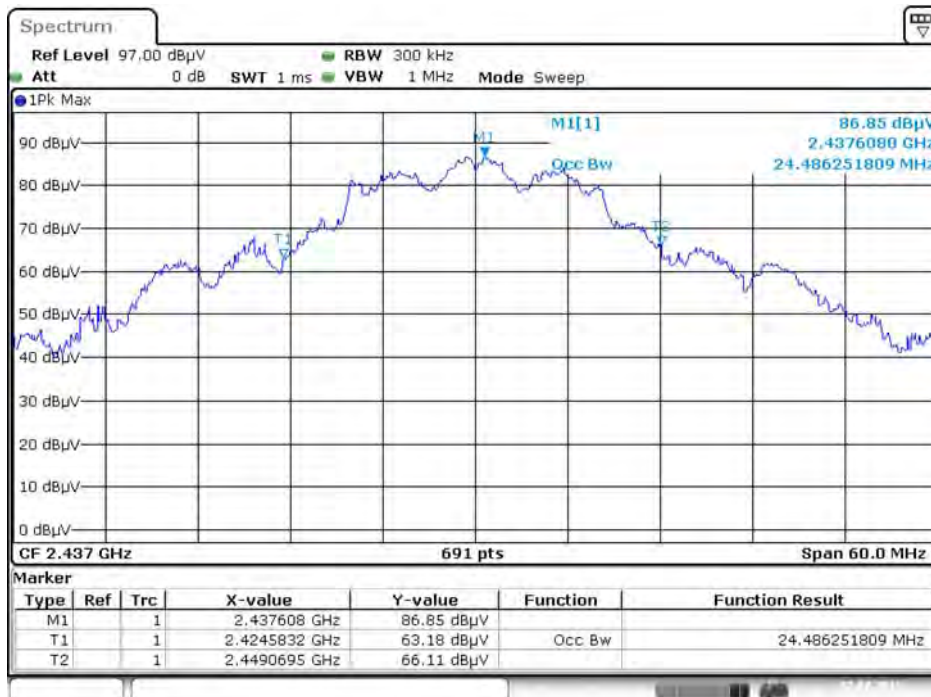

Date: 7.JUL.2015 17:05:32

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3




Date: 7.JUL.2015 17:22:15

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3




Date: 7.JUL.2015 17:07:29

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

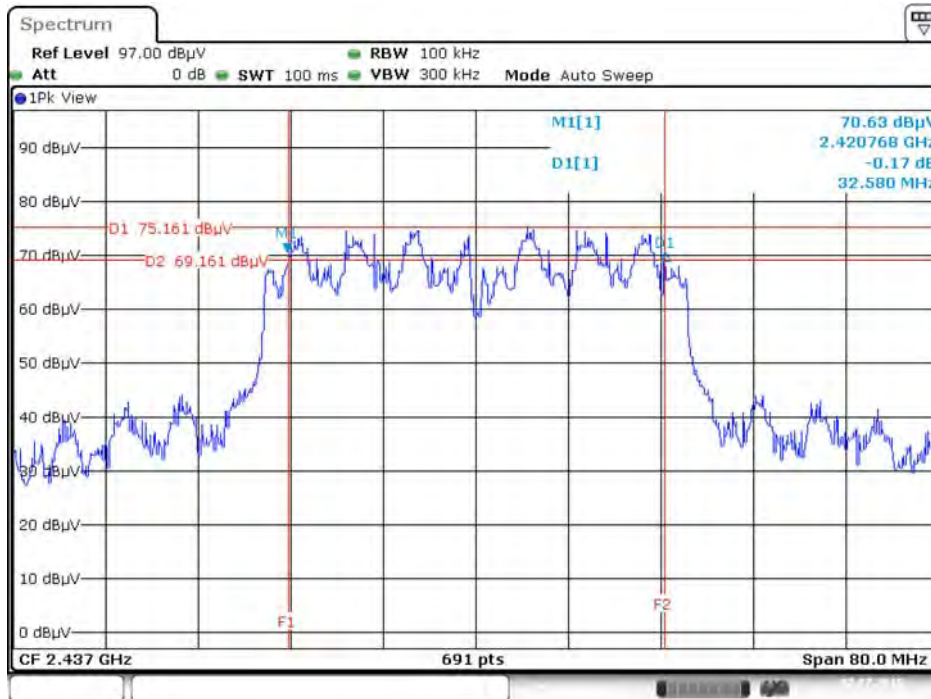

Date: 7.JUL.2015 17:25:30

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

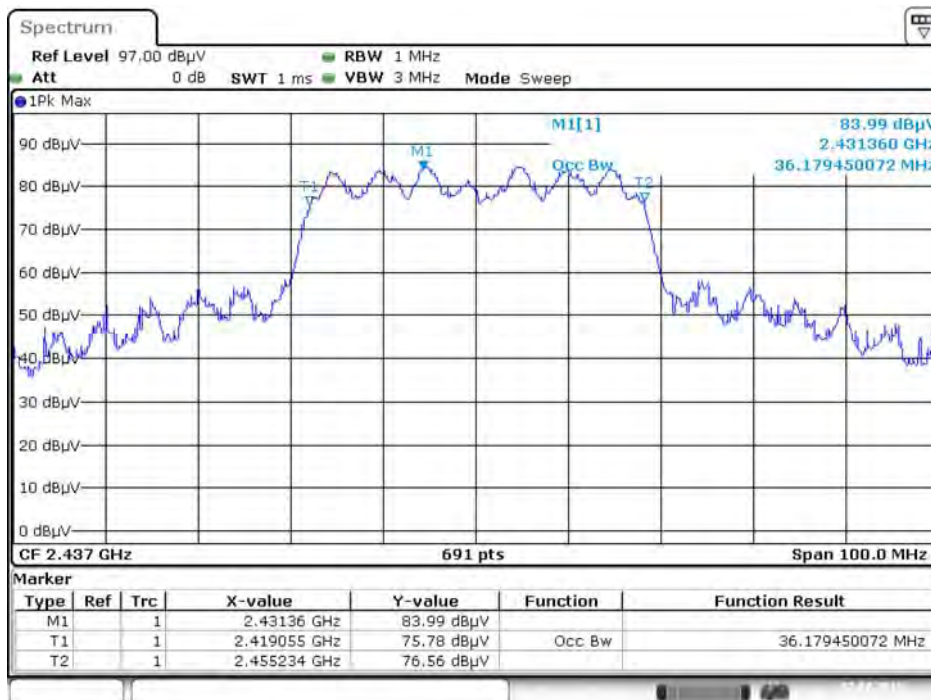

Date: 7.JUL.2015 17:09:35

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

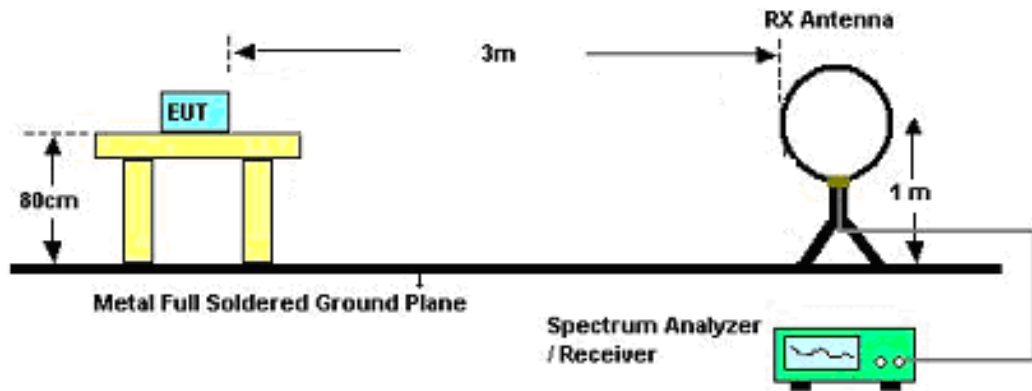

For Radiated Emissions: 30MHz~1GHz

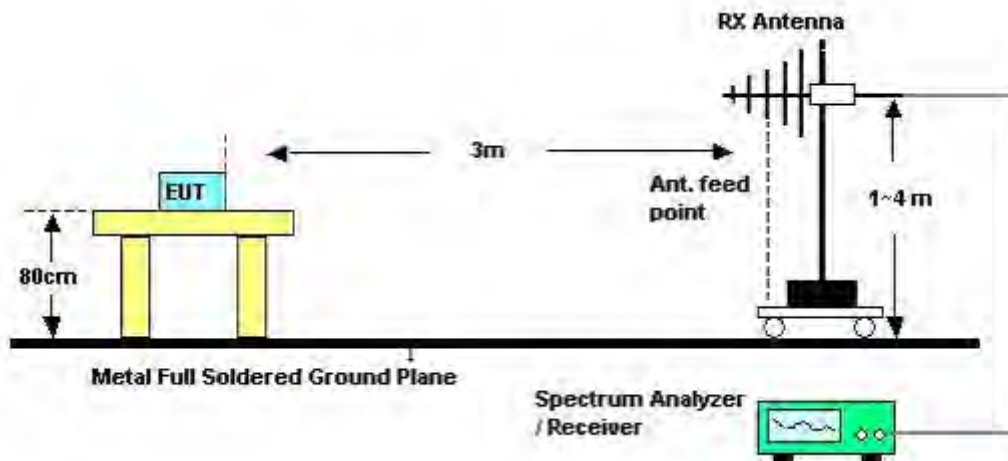

For Radiated Emissions: Above 1GHz

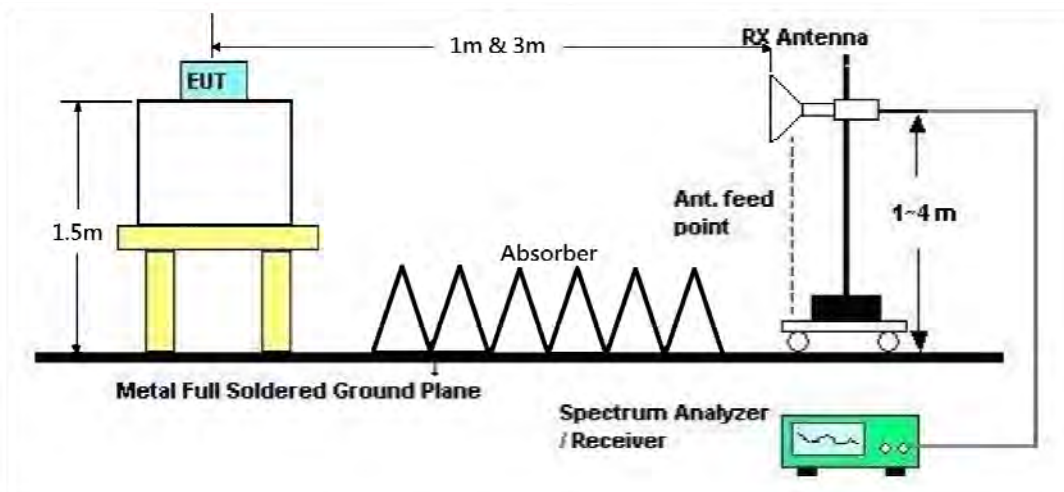

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	CTX
Test Date	Aug. 04, 2015	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	CTX
Test Mode	Mode 1		

Horizontal

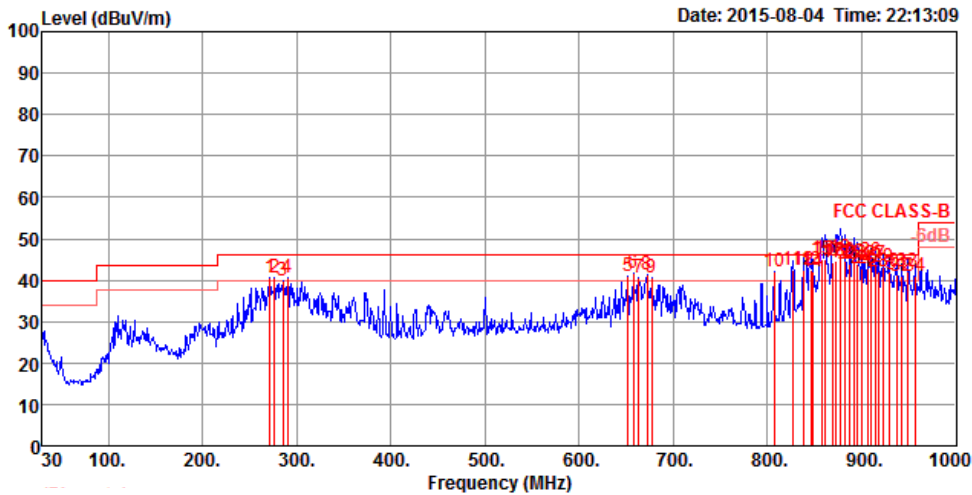


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	271.53	40.60	46.00	-5.40	57.87	1.43	13.59	32.29	100	139 Peak	HORIZONTAL
2	276.38	40.71	46.00	-5.29	58.02	1.44	13.54	32.29	100	150 Peak	HORIZONTAL
3	285.11	40.02	46.00	-5.98	57.25	1.46	13.60	32.29	125	155 Peak	HORIZONTAL
4	289.96	40.75	46.00	-5.25	57.86	1.47	13.70	32.28	125	144 Peak	HORIZONTAL
5	651.77	41.09	46.00	-4.91	51.77	2.10	19.60	32.38	125	103 Peak	HORIZONTAL
6	657.59	41.68	46.00	-4.32	52.34	2.11	19.61	32.38	125	103 Peak	HORIZONTAL
7	663.41	40.55	46.00	-5.45	51.19	2.11	19.63	32.38	125	87 Peak	HORIZONTAL
8	672.14	41.46	46.00	-4.54	52.06	2.12	19.65	32.37	125	268 Peak	HORIZONTAL
9	676.99	40.49	46.00	-5.51	51.08	2.12	19.66	32.37	125	87 Peak	HORIZONTAL
10	806.97	42.24	46.00	-3.76	51.27	2.31	20.88	32.22	100	184 Peak	HORIZONTAL
11	826.37	42.59	46.00	-3.41	51.27	2.34	21.08	32.10	100	184 QP	HORIZONTAL
12	838.98	42.40	46.00	-3.60	50.90	2.35	21.19	32.04	100	178 QP	HORIZONTAL
13	845.77	42.55	46.00	-3.45	50.95	2.36	21.24	32.00	100	178 QP	HORIZONTAL
14	847.71	42.19	46.00	-3.81	50.56	2.36	21.27	32.00	100	184 QP	HORIZONTAL
15	858.38	45.18	46.00	-0.82	53.39	2.38	21.35	31.94	150	170 QP	HORIZONTAL
16	861.29	45.07	46.00	-0.93	53.23	2.38	21.38	31.92	100	184 QP	HORIZONTAL
17	869.05	44.31	46.00	-1.69	52.35	2.39	21.45	31.88	100	184 QP	HORIZONTAL
18	871.96	44.81	46.00	-1.19	52.81	2.40	21.48	31.88	150	181 QP	HORIZONTAL
19	877.78	45.22	46.00	-0.78	53.14	2.40	21.52	31.84	150	176 QP	HORIZONTAL
20	881.66	44.81	46.00	-1.19	52.67	2.41	21.55	31.82	100	188 QP	HORIZONTAL
21	887.48	44.07	46.00	-1.93	51.86	2.41	21.60	31.80	150	181 QP	HORIZONTAL
22	891.36	44.36	46.00	-1.64	52.10	2.42	21.62	31.78	150	186 QP	HORIZONTAL
23	895.24	43.97	46.00	-2.03	51.66	2.42	21.65	31.76	150	192 QP	HORIZONTAL
24	900.09	42.76	46.00	-3.24	50.37	2.43	21.70	31.74	150	186 QP	HORIZONTAL



	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
25	905.91	42.69	46.00	-3.31	50.17	2.44	21.74	31.66	150	197	QP	HORIZONTAL
26	910.76	44.69	46.00	-1.31	52.11	2.44	21.76	31.62	150	186	QP	HORIZONTAL
27	915.61	43.79	46.00	-2.21	51.12	2.45	21.80	31.58	150	186	QP	HORIZONTAL
28	918.52	42.23	46.00	-3.77	49.50	2.45	21.82	31.54	150	190	QP	HORIZONTAL
29	923.37	43.35	46.00	-2.65	50.55	2.46	21.84	31.50	150	186	QP	HORIZONTAL
30	929.19	42.23	46.00	-3.77	49.34	2.47	21.88	31.46	150	181	QP	HORIZONTAL
31	936.95	41.25	46.00	-4.75	48.23	2.48	21.92	31.38	150	186	QP	HORIZONTAL
32	942.77	40.95	46.00	-5.05	47.85	2.48	21.96	31.34	125	194	QP	HORIZONTAL
33	949.56	41.92	46.00	-4.08	48.70	2.49	22.00	31.27	125	190	QP	HORIZONTAL
34	956.35	40.85	46.00	-5.15	47.54	2.50	22.04	31.23	125	194	QP	HORIZONTAL

Vertical

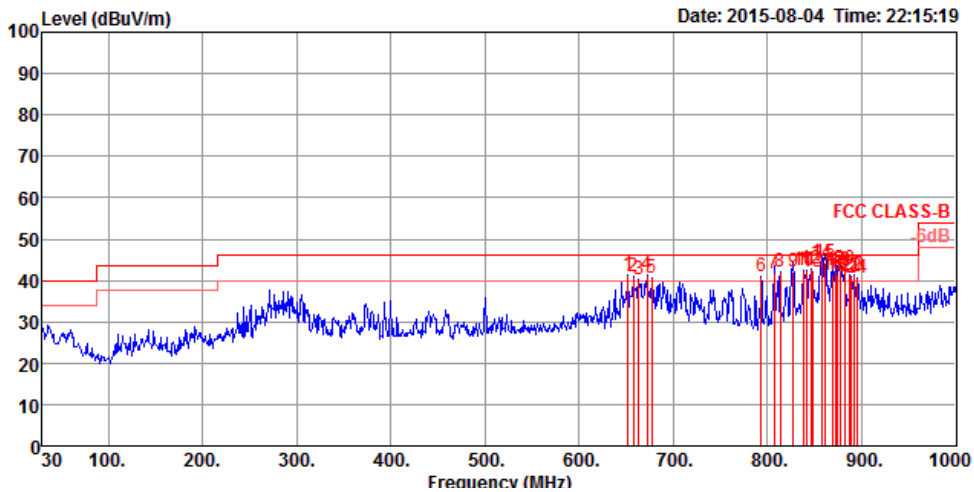

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	651.77	41.22	46.00	-4.78	51.90	2.10	19.60	32.38	150	360 Peak	VERTICAL
2	657.59	41.04	46.00	-4.96	51.70	2.11	19.61	32.38	150	6 Peak	VERTICAL
3	663.41	40.32	46.00	-5.68	50.96	2.11	19.63	32.38	150	6 Peak	VERTICAL
4	672.14	41.47	46.00	-4.53	52.07	2.12	19.65	32.37	150	0 Peak	VERTICAL
5	676.99	40.77	46.00	-5.23	51.36	2.12	19.66	32.37	150	360 Peak	VERTICAL
6	793.39	40.93	46.00	-5.07	50.13	2.29	20.76	32.25	125	360 Peak	VERTICAL
7	806.97	41.56	46.00	-4.44	50.59	2.31	20.88	32.22	125	358 QP	VERTICAL
8	813.76	41.89	46.00	-4.11	50.81	2.32	20.94	32.18	125	356 Peak	VERTICAL
9	827.34	42.16	46.00	-3.84	50.84	2.34	21.08	32.10	125	358 QP	VERTICAL
10	838.98	42.44	46.00	-3.56	50.94	2.35	21.19	32.04	125	358 Peak	VERTICAL
11	840.92	42.27	46.00	-3.73	50.73	2.36	21.22	32.04	125	25 Peak	VERTICAL
12	845.77	42.76	46.00	-3.24	51.16	2.36	21.24	32.00	125	356 Peak	VERTICAL
13	847.71	41.91	46.00	-4.09	50.28	2.36	21.27	32.00	125	0 Peak	VERTICAL
14	858.38	44.20	46.00	-1.80	52.41	2.38	21.35	31.94	125	5 QP	VERTICAL
15	861.29	44.34	46.00	-1.66	52.50	2.38	21.38	31.92	125	356 QP	VERTICAL
16	869.05	41.18	46.00	-4.82	49.22	2.39	21.45	31.88	125	5 QP	VERTICAL
17	871.96	42.50	46.00	-3.50	50.50	2.40	21.48	31.88	125	360 QP	VERTICAL
18	874.87	41.36	46.00	-4.64	49.32	2.40	21.50	31.86	125	41 QP	VERTICAL
19	877.78	42.36	46.00	-3.64	50.28	2.40	21.52	31.84	125	15 QP	VERTICAL
20	881.66	42.83	46.00	-3.17	50.69	2.41	21.55	31.82	125	25 Peak	VERTICAL
21	887.48	41.15	46.00	-4.85	48.94	2.41	21.60	31.80	100	32 Peak	VERTICAL
22	889.42	40.80	46.00	-5.20	48.54	2.42	21.62	31.78	100	38 Peak	VERTICAL
23	891.36	41.16	46.00	-4.84	48.90	2.42	21.62	31.78	100	49 Peak	VERTICAL
24	895.24	40.41	46.00	-5.59	48.10	2.42	21.65	31.76	125	43 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 06, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.58	44.74	74.00	-29.26	41.80	5.59	31.08	33.73	122	261	Peak	HORIZONTAL
2	4823.97	34.50	54.00	-19.50	31.56	5.59	31.08	33.73	122	261	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.94	36.25	54.00	-17.75	33.31	5.59	31.08	33.73	157	191	Average	VERTICAL
2	4824.25	46.18	74.00	-27.82	43.24	5.59	31.08	33.73	157	191	Peak	VERTICAL

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 06, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.97	39.22	54.00	-14.78	36.13	5.62	31.18	33.71	149	201 Average	HORIZONTAL
2	4874.07	47.10	74.00	-26.90	44.01	5.62	31.18	33.71	149	201 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.00	48.06	74.00	-25.94	44.97	5.62	31.18	33.71	144	155 Peak	VERTICAL
2	4874.04	41.05	54.00	-12.95	37.96	5.62	31.18	33.71	144	155 Average	VERTICAL



Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 06, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.99	44.71	74.00	-29.29	41.45	5.66	31.28	33.68	123	237	Peak	HORIZONTAL
2	4924.01	34.15	54.00	-19.85	30.89	5.66	31.28	33.68	123	237	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.94	45.79	74.00	-28.21	42.53	5.66	31.28	33.68	138	120	Peak	VERTICAL
2	4924.06	34.15	54.00	-19.85	30.89	5.66	31.28	33.68	138	120	Average	VERTICAL

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 06, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4820.90	30.96	54.00	-23.04	28.02	5.59	31.08	33.73	159	137 Average	HORIZONTAL
2	4824.72	44.60	74.00	-29.40	41.66	5.59	31.08	33.73	159	137 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4819.64	30.92	54.00	-23.08	27.99	5.58	31.08	33.73	170	70 Average	VERTICAL
2	4820.74	44.40	74.00	-29.60	41.46	5.59	31.08	33.73	170	70 Peak	VERTICAL

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 06, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.00	31.14	54.00	-22.86	28.05	5.62	31.18	33.71	178	240 Average	HORIZONTAL
2	4874.00	45.03	74.00	-28.97	41.94	5.62	31.18	33.71	178	240 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.00	31.41	54.00	-22.59	28.32	5.62	31.18	33.71	162	93 Average	VERTICAL
2	4874.00	45.94	74.00	-28.06	42.85	5.62	31.18	33.71	162	93 Peak	VERTICAL

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4924.00	30.99	54.00	-23.01	27.73	5.66	31.28	33.68	168	99 Average	HORIZONTAL
2	4924.00	45.13	74.00	-28.87	41.87	5.66	31.28	33.68	168	99 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	4924.00	31.00	54.00	-23.00	27.74	5.66	31.28	33.68	141	122 Average	VERTICAL
2	4924.00	43.84	74.00	-30.16	40.58	5.66	31.28	33.68	141	122 Peak	VERTICAL

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4824.00	30.85	54.00	-23.15	27.91	5.59	31.08	33.73	175	102	Average	HORIZONTAL
2	4824.00	45.19	74.00	-28.81	42.25	5.59	31.08	33.73	175	102	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4824.00	31.24	54.00	-22.76	28.30	5.59	31.08	33.73	172	103	Average	VERTICAL
2	4824.00	44.35	74.00	-29.65	41.41	5.59	31.08	33.73	172	103	Peak	VERTICAL



Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.00	31.49	54.00	-22.51	28.40	5.62	31.18	33.71	148	173	Average	HORIZONTAL
2	4874.00	45.32	74.00	-28.68	42.23	5.62	31.18	33.71	148	173	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.00	31.79	54.00	-22.21	28.70	5.62	31.18	33.71	178	106	Average	VERTICAL
2	4874.00	44.87	74.00	-29.13	41.78	5.62	31.18	33.71	178	106	Peak	VERTICAL

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.00	31.26	54.00	-22.74	28.00	5.66	31.28	33.68	131	258	Average	HORIZONTAL
2	4924.00	44.43	74.00	-29.57	41.17	5.66	31.28	33.68	131	258	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.00	31.05	54.00	-22.95	27.79	5.66	31.28	33.68	144	238	Average	VERTICAL
2	4924.00	44.12	74.00	-29.88	40.86	5.66	31.28	33.68	144	238	Peak	VERTICAL



Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4844.00	30.40	54.00	-23.60	27.39	5.60	31.13	33.72	158	193	Average	HORIZONTAL
2	4844.00	43.79	74.00	-30.21	40.78	5.60	31.13	33.72	158	193	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4844.00	30.43	54.00	-23.57	27.42	5.60	31.13	33.72	153	245	Average	VERTICAL
2	4844.00	43.16	74.00	-30.84	40.15	5.60	31.13	33.72	153	245	Peak	VERTICAL

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.00	31.55	54.00	-22.45	28.46	5.62	31.18	33.71	179	168	Average	HORIZONTAL
2	4874.00	45.32	74.00	-28.68	42.23	5.62	31.18	33.71	179	168	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.00	31.62	54.00	-22.38	28.53	5.62	31.18	33.71	175	178	Average	VERTICAL
2	4874.00	44.66	74.00	-29.34	41.57	5.62	31.18	33.71	175	178	Peak	VERTICAL

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4904.00	31.10	54.00	-22.90	27.92	5.64	31.23	33.69	151	212	Average	HORIZONTAL
2	4904.00	44.61	74.00	-29.39	41.43	5.64	31.23	33.69	151	212	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4904.00	31.35	54.00	-22.65	28.17	5.64	31.23	33.69	153	201	Average	VERTICAL
2	4904.00	44.10	74.00	-29.90	40.92	5.64	31.23	33.69	153	201	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 06, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.28	53.73	54.00	-0.27	22.75	3.87	27.11	0.00	194	359 Average	VERTICAL
2	2390.00	62.70	74.00	-11.30	31.72	3.87	27.11	0.00	194	359 Peak	VERTICAL
3 0	2411.28	113.37			82.30	3.89	27.18	0.00	194	359 Average	VERTICAL
4 0	2411.28	116.11			85.04	3.89	27.18	0.00	194	359 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	45.09	54.00	-8.91	14.11	3.87	27.11	0.00	163	1 Average	VERTICAL
2	2390.00	58.17	74.00	-15.83	27.19	3.87	27.11	0.00	163	1 Peak	VERTICAL
3 0	2436.13	117.07			85.92	3.91	27.24	0.00	163	1 Peak	VERTICAL
4 0	2436.42	114.14			82.99	3.91	27.24	0.00	163	1 Average	VERTICAL
5	2483.50	46.76	54.00	-7.24	15.45	3.95	27.36	0.00	163	1 Average	VERTICAL
6	2484.18	59.45	74.00	-14.55	28.14	3.95	27.36	0.00	163	1 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 0	2462.72	114.12			82.88	3.93	27.31	0.00	182	2 Average	VERTICAL
2 0	2463.01	116.91			85.67	3.93	27.31	0.00	182	2 Peak	VERTICAL
3	2483.50	53.68	54.00	-0.32	22.37	3.95	27.36	0.00	182	2 Average	VERTICAL
4	2483.50	63.32	74.00	-10.68	32.01	3.95	27.36	0.00	182	2 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 04, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.86	73.84	74.00	-0.16	42.86	3.87	27.11	0.00	170	356	Peak	VERTICAL
2	2390.00	52.98	54.00	-1.02	22.00	3.87	27.11	0.00	170	356	Average	VERTICAL
3 0	2410.70	113.18			82.13	3.89	27.16	0.00	170	356	Peak	VERTICAL
4 0	2411.28	102.49			71.42	3.89	27.18	0.00	170	356	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.66	48.10	54.00	-5.90	17.12	3.87	27.11	0.00	168	358	Average	VERTICAL
2	2389.13	66.53	74.00	-7.47	35.55	3.87	27.11	0.00	168	358	Peak	VERTICAL
3 0	2435.84	118.63			87.48	3.91	27.24	0.00	168	358	Peak	VERTICAL
4 0	2436.42	107.84			76.69	3.91	27.24	0.00	168	358	Average	VERTICAL
5	2484.18	67.75	74.00	-6.25	36.44	3.95	27.36	0.00	168	358	Peak	VERTICAL
6	2485.91	48.83	54.00	-5.17	17.52	3.95	27.36	0.00	168	358	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 0	2460.70	114.13			82.89	3.93	27.31	0.00	189	2	Peak	VERTICAL
2 0	2461.28	103.43			72.19	3.93	27.31	0.00	189	2	Average	VERTICAL
3	2483.50	53.51	54.00	-0.49	22.20	3.95	27.36	0.00	189	2	Average	VERTICAL
4	2484.00	73.55	74.00	-0.45	42.24	3.95	27.36	0.00	189	2	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 04, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2387.83	73.37	74.00	-0.63	42.39	3.87	27.11	0.00	229	342	Peak	VERTICAL
2	2388.99	51.37	54.00	-2.63	20.39	3.87	27.11	0.00	229	342	Average	VERTICAL
3 0	2413.01	100.76			69.69	3.89	27.18	0.00	229	342	Average	VERTICAL
4 0	2413.30	112.73			81.66	3.89	27.18	0.00	229	342	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.09	48.87	54.00	-5.13	17.89	3.87	27.11	0.00	198	347	Average	VERTICAL
2	2388.95	64.65	74.00	-9.35	33.67	3.87	27.11	0.00	198	347	Peak	VERTICAL
3 0	2437.87	107.03			75.88	3.91	27.24	0.00	198	347	Average	VERTICAL
4 0	2438.16	118.62			87.47	3.91	27.24	0.00	198	347	Peak	VERTICAL
5	2483.50	49.84	54.00	-4.16	18.53	3.95	27.36	0.00	198	347	Average	VERTICAL
6	2483.50	64.12	74.00	-9.88	32.81	3.95	27.36	0.00	198	347	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 0	2462.58	100.93			69.69	3.93	27.31	0.00	195	353	Average	VERTICAL
2 0	2462.58	112.60			81.36	3.93	27.31	0.00	195	353	Peak	VERTICAL
3	2483.50	53.51	54.00	-0.49	22.20	3.95	27.36	0.00	195	353	Average	VERTICAL
4	2483.50	73.90	74.00	-0.10	42.59	3.95	27.36	0.00	195	353	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 06, 2015		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2387.27	53.65	54.00	-0.35	22.68	3.86	27.11	0.00	180	357	Average	VERTICAL
2	2387.85	70.78	74.00	-3.22	39.80	3.87	27.11	0.00	180	357	Peak	VERTICAL
3 0	2427.50	98.01			66.89	3.90	27.22	0.00	180	357	Average	VERTICAL
4 0	2427.79	108.40			77.28	3.90	27.22	0.00	180	357	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2387.51	50.81	54.00	-3.19	19.83	3.87	27.11	0.00	182	2	Average	VERTICAL
2	2388.81	67.65	74.00	-6.35	36.67	3.87	27.11	0.00	182	2	Peak	VERTICAL
3 0	2432.22	100.38			69.24	3.90	27.24	0.00	182	2	Average	VERTICAL
4 0	2432.22	110.00			78.86	3.90	27.24	0.00	182	2	Peak	VERTICAL
5	2483.50	53.51	54.00	-0.49	22.20	3.95	27.36	0.00	182	2	Average	VERTICAL
6	2483.50	69.92	74.00	-4.08	38.61	3.95	27.36	0.00	182	2	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 0	2457.21	97.28			66.07	3.92	27.29	0.00	174	360	Average	VERTICAL
2 0	2457.50	107.34			76.13	3.92	27.29	0.00	174	360	Peak	VERTICAL
3	2487.31	69.04	74.00	-4.96	37.73	3.95	27.36	0.00	174	360	Peak	VERTICAL
4	2487.60	53.61	54.00	-0.39	22.30	3.95	27.36	0.00	174	360	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


Plot on Configuration IEEE 802.11b / Reference Level




Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

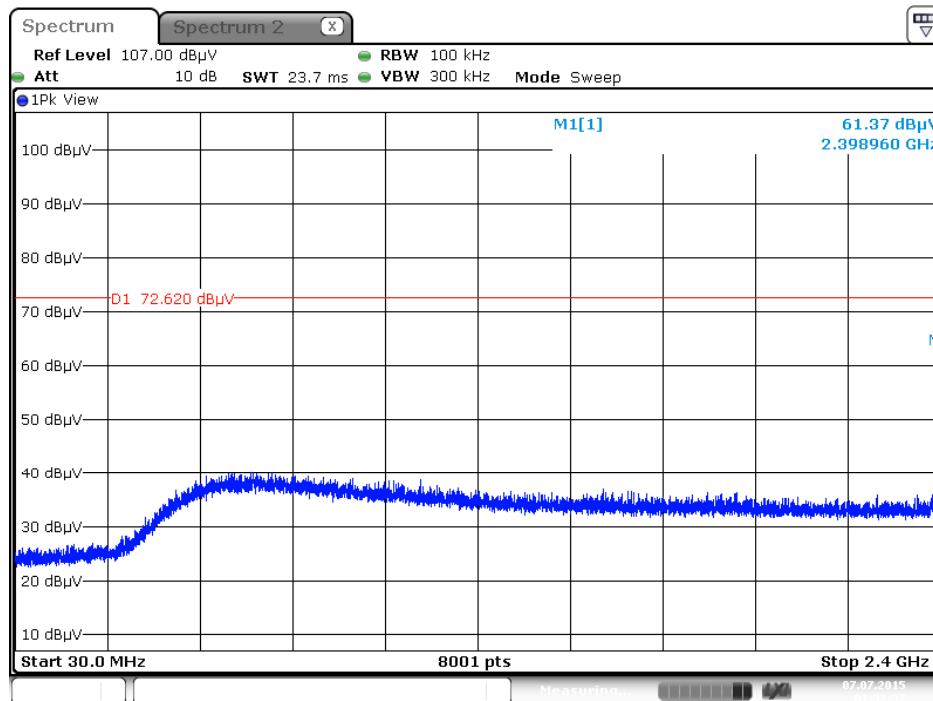


Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

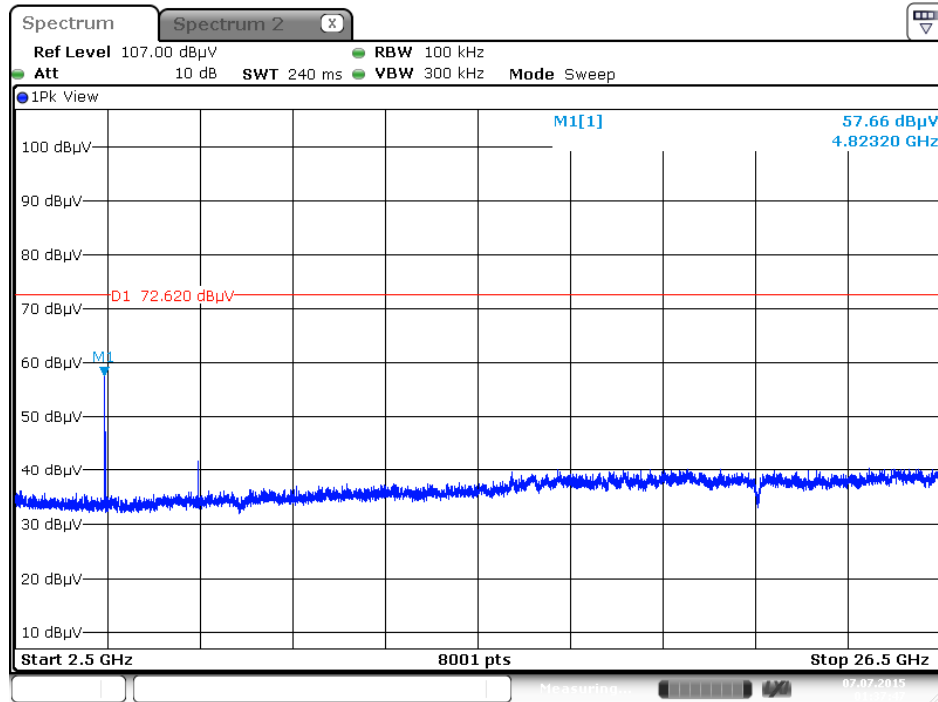

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

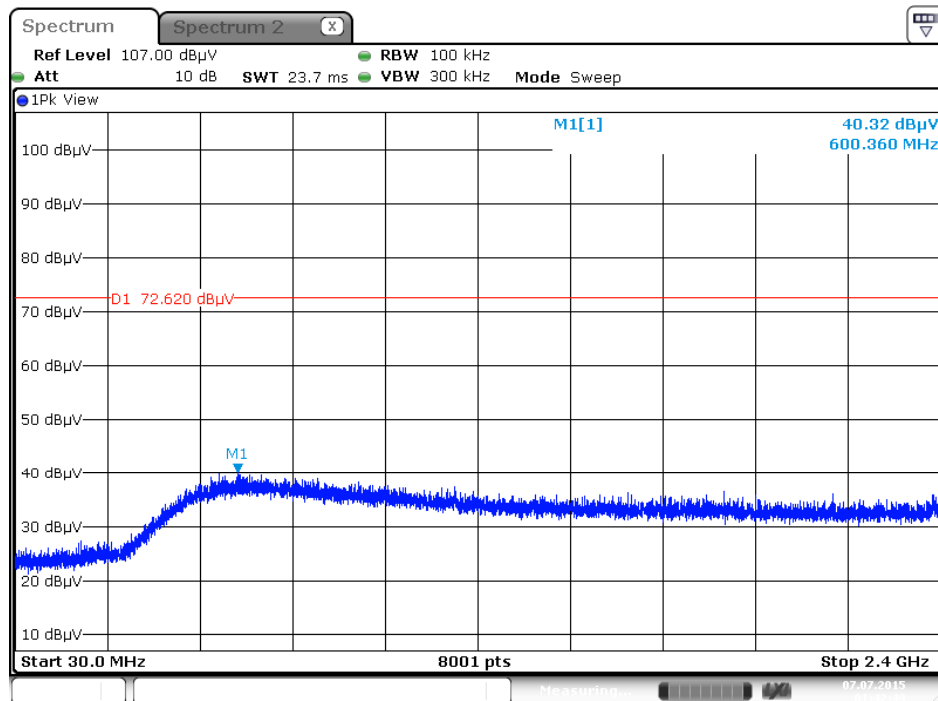


Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

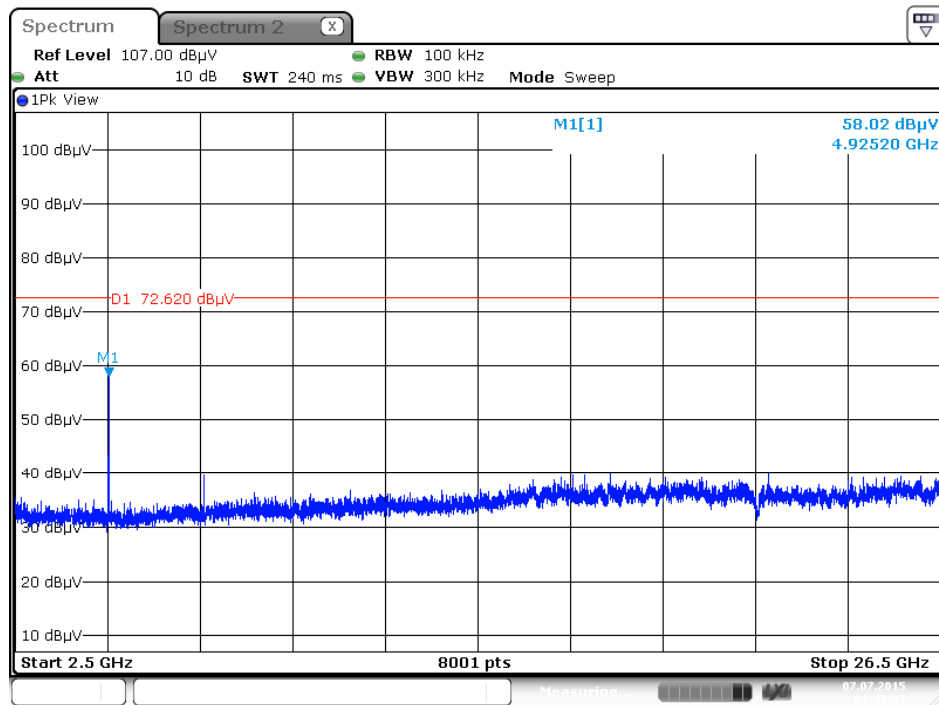


Date: 7 JUL 2015 01:43:36


Plot on Configuration IEEE 802.11g / Reference Level

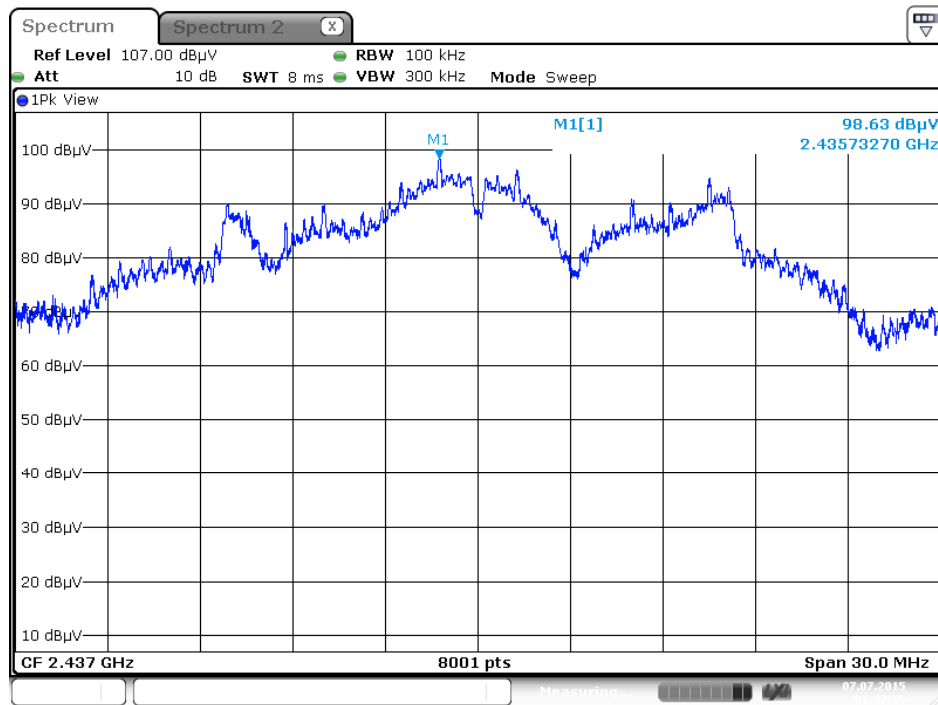


Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

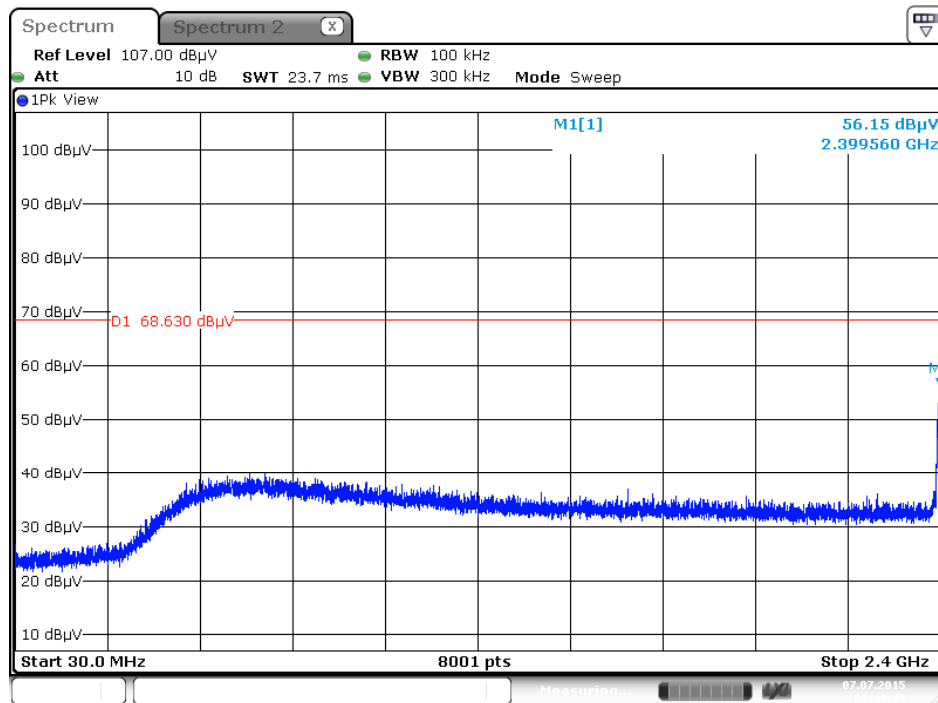


Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

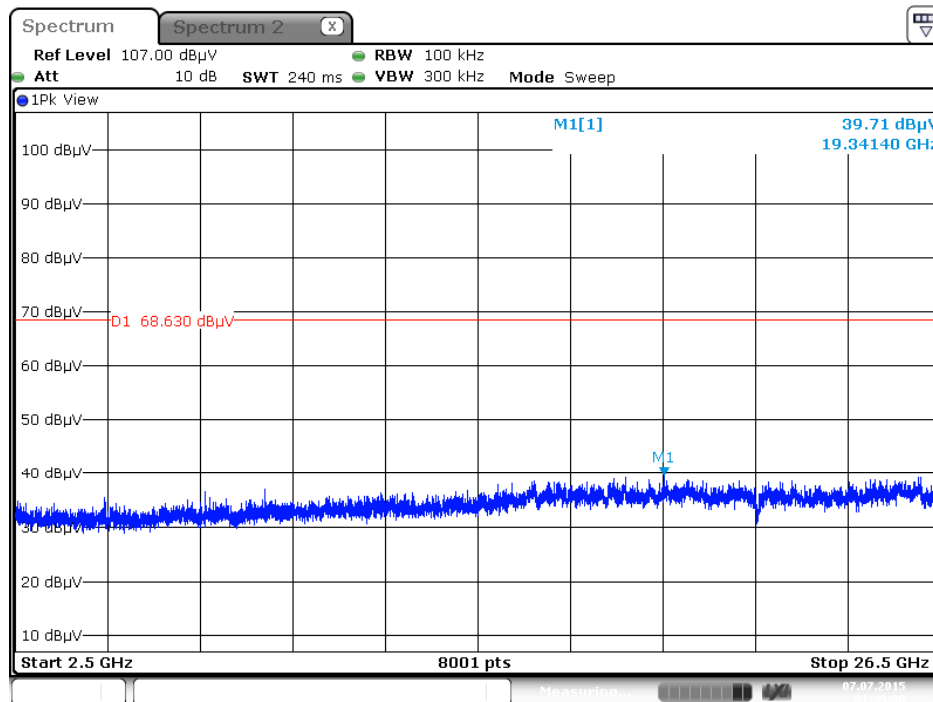

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

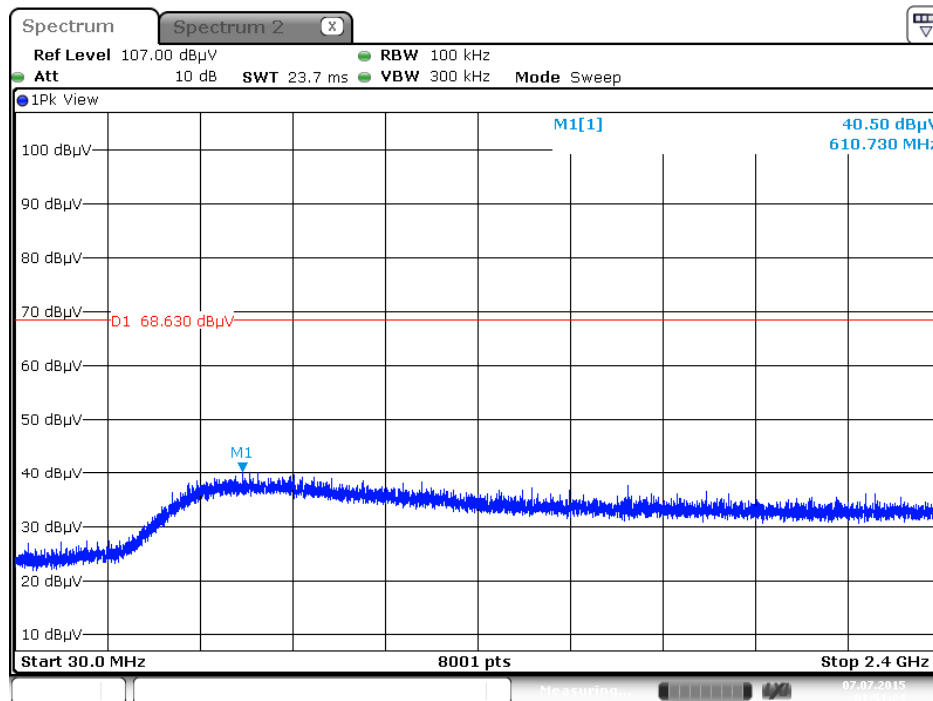


Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

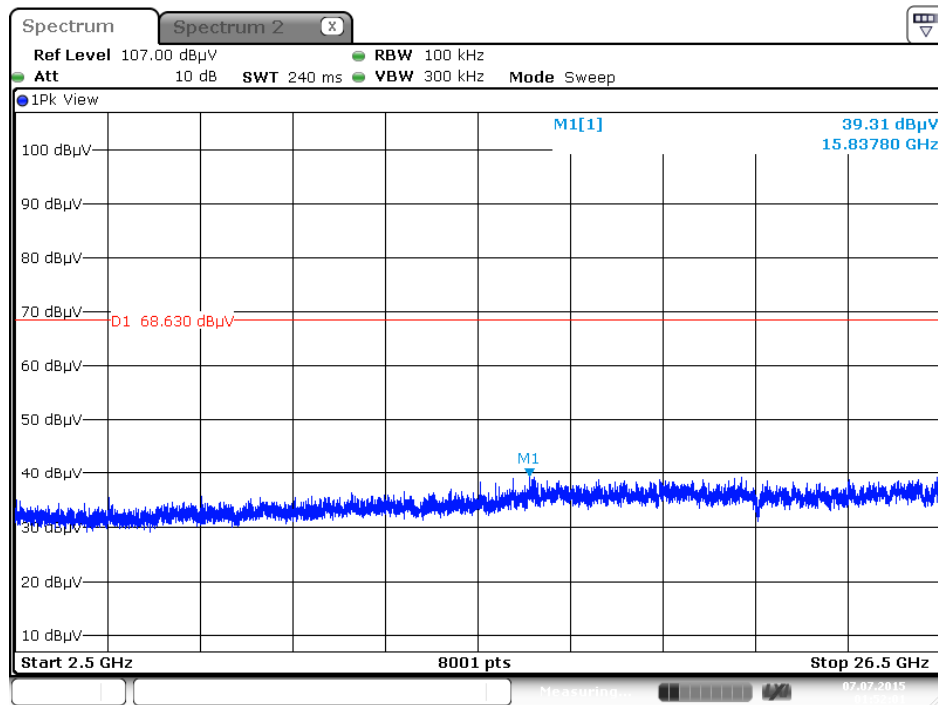


Date: 7 JUL 2015 01:52:01


Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

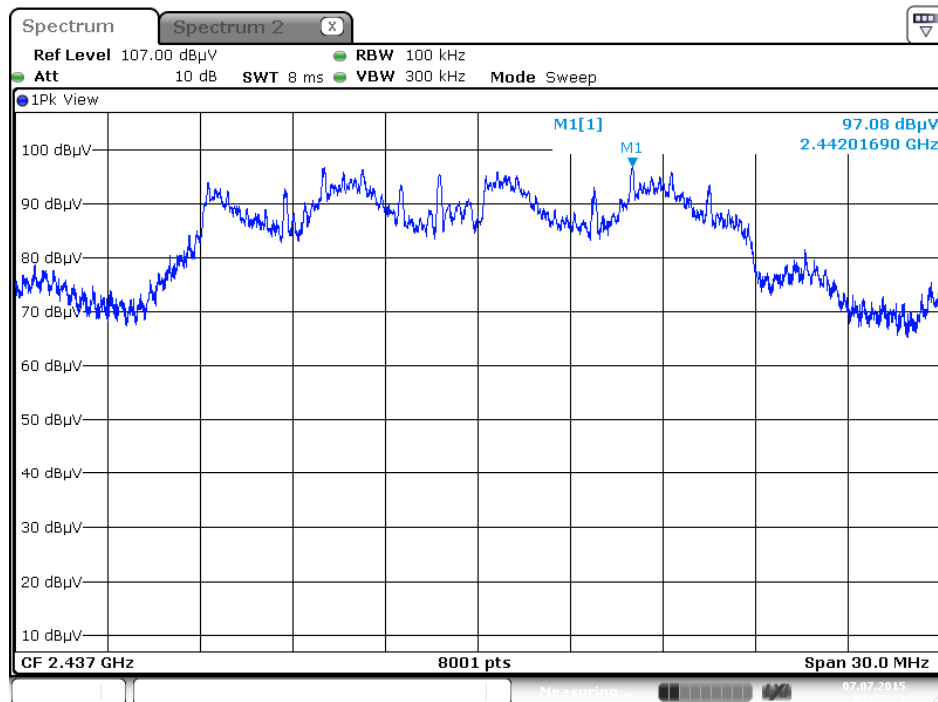


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

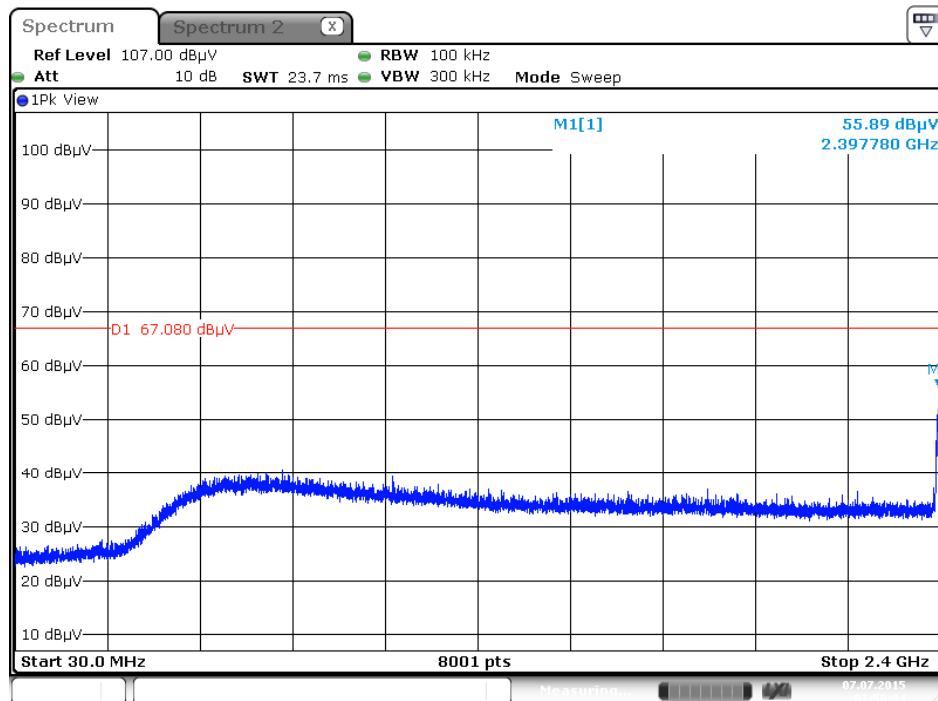


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

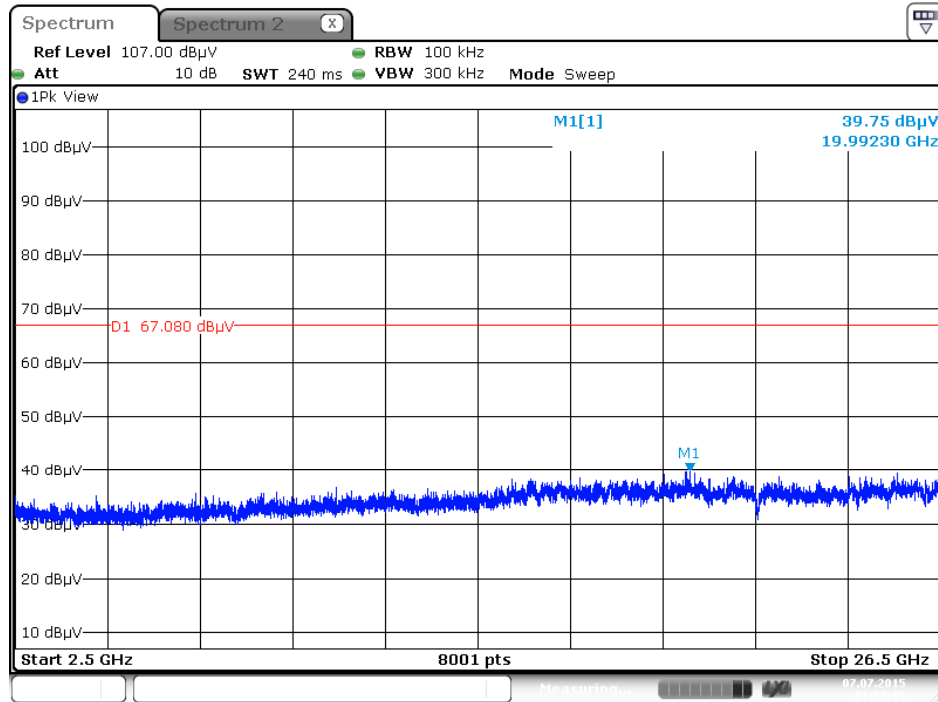

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

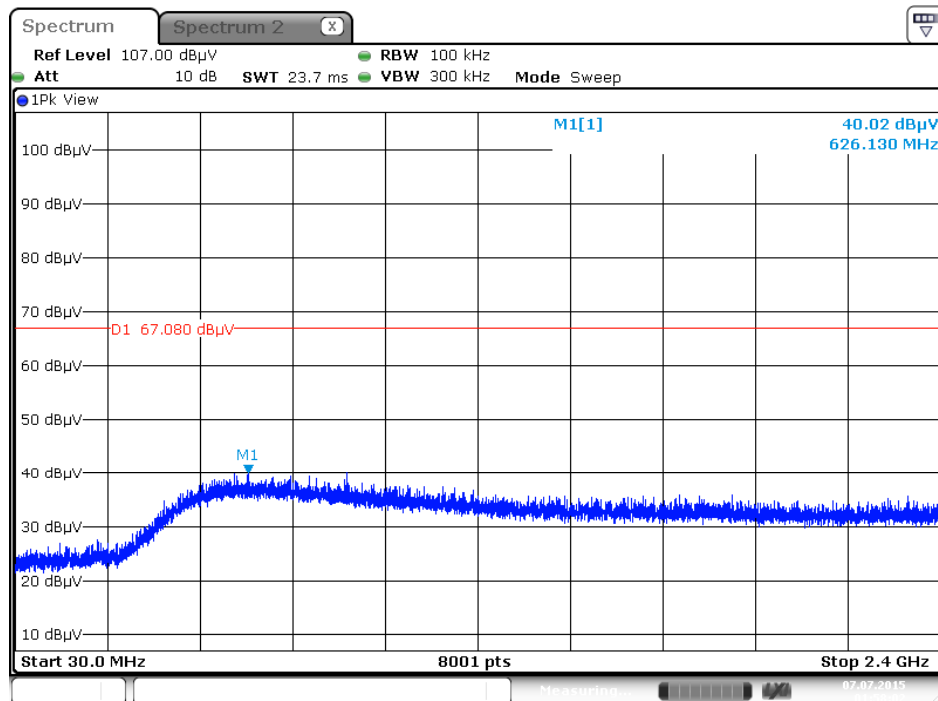


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

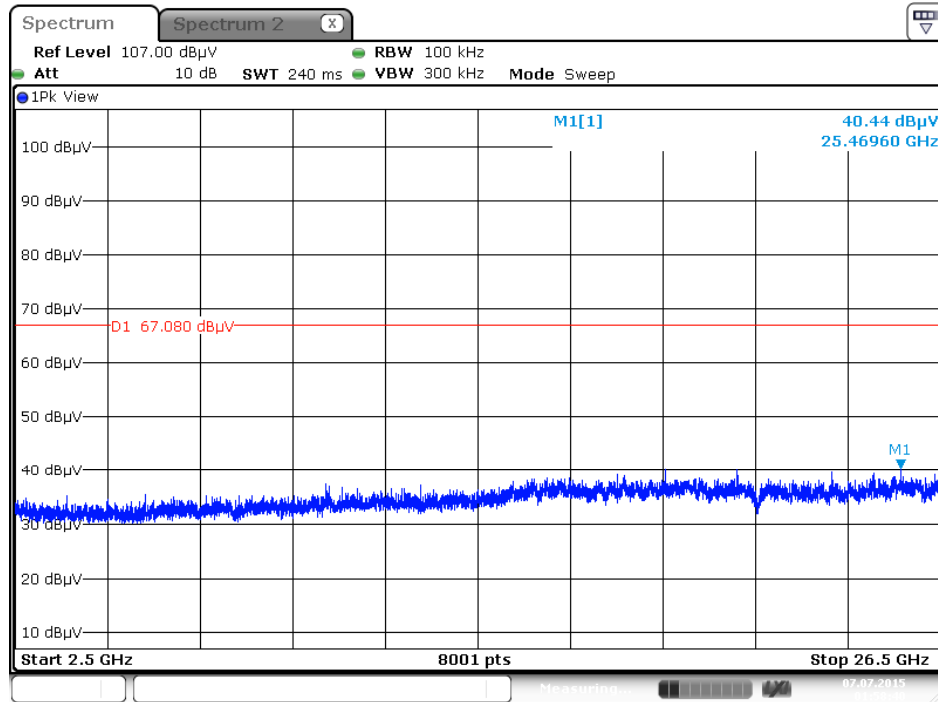


Date: 7 JUL 2015 01:58:39


Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

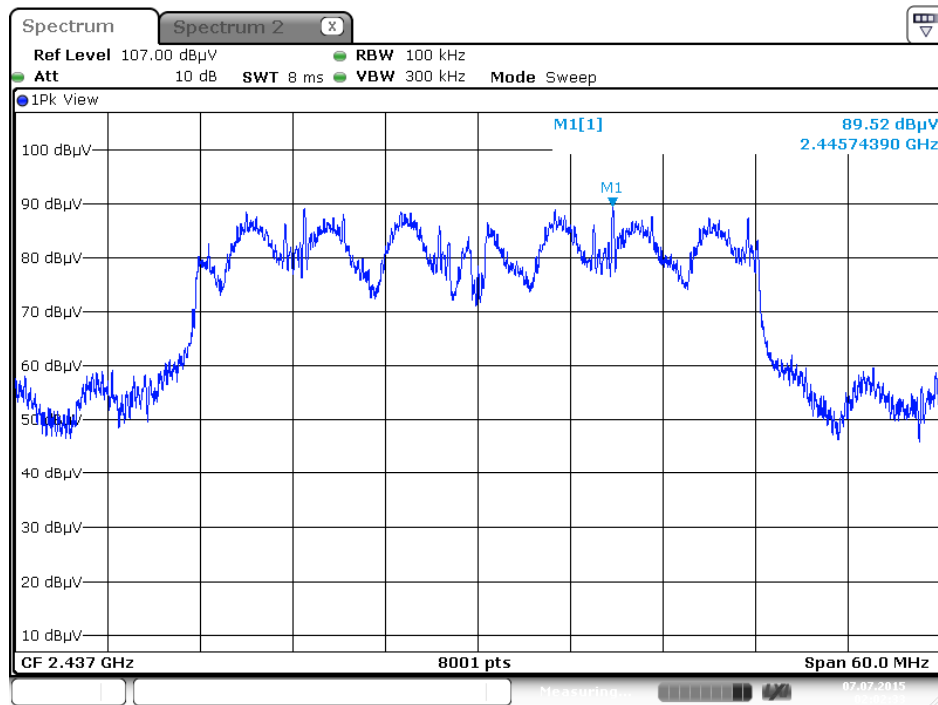


Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

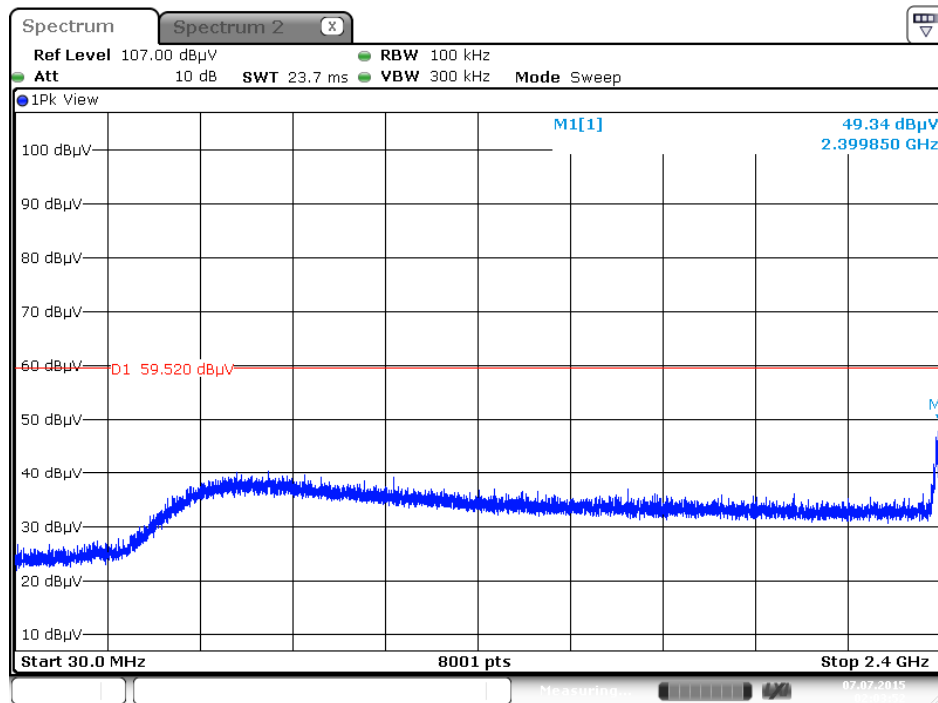


Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

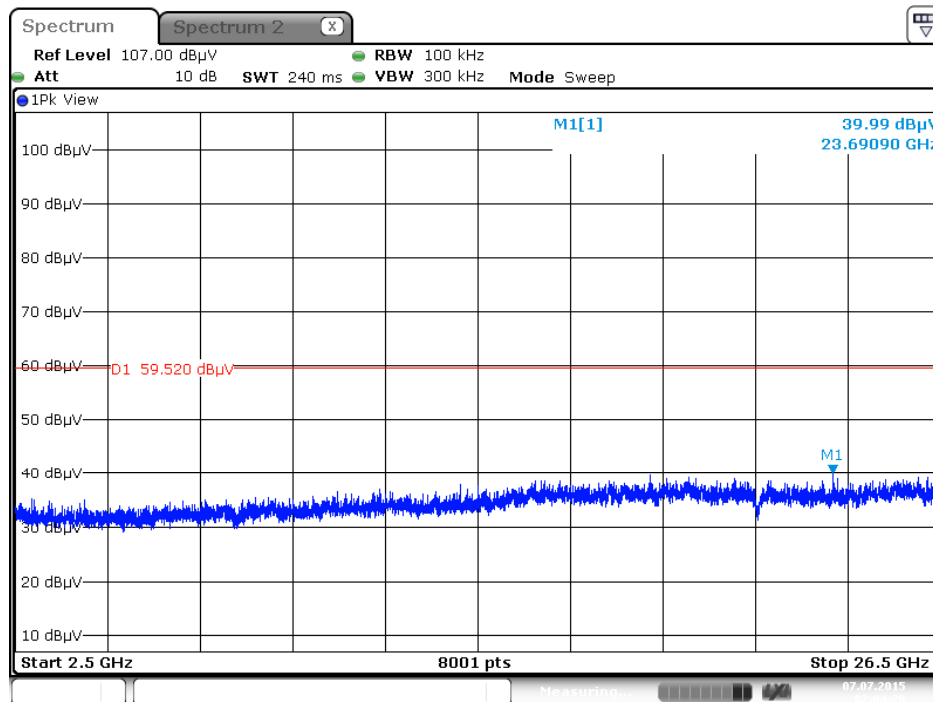

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

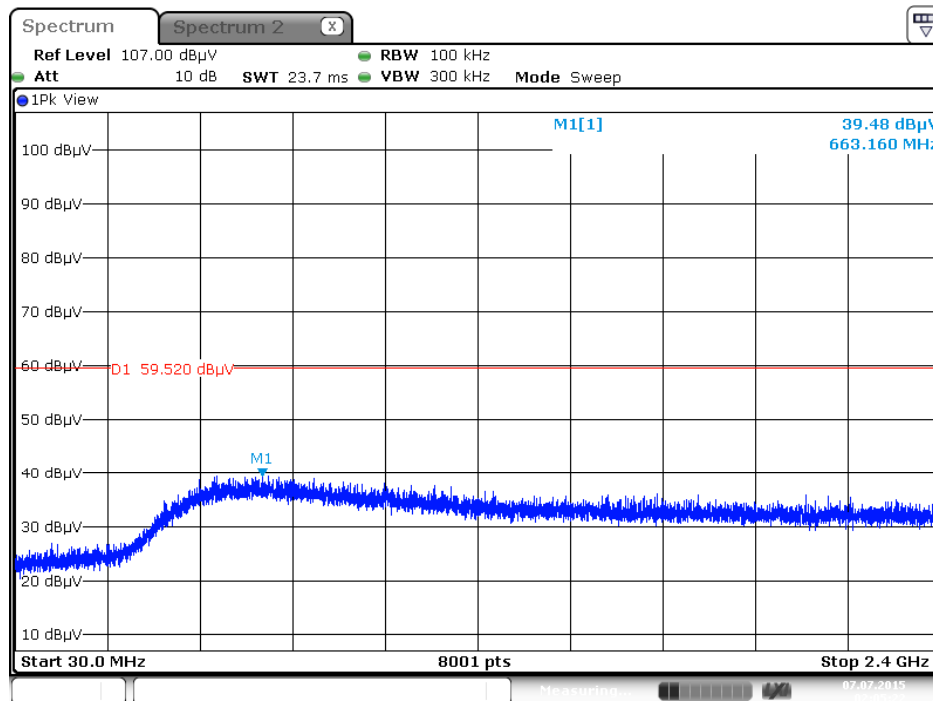

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

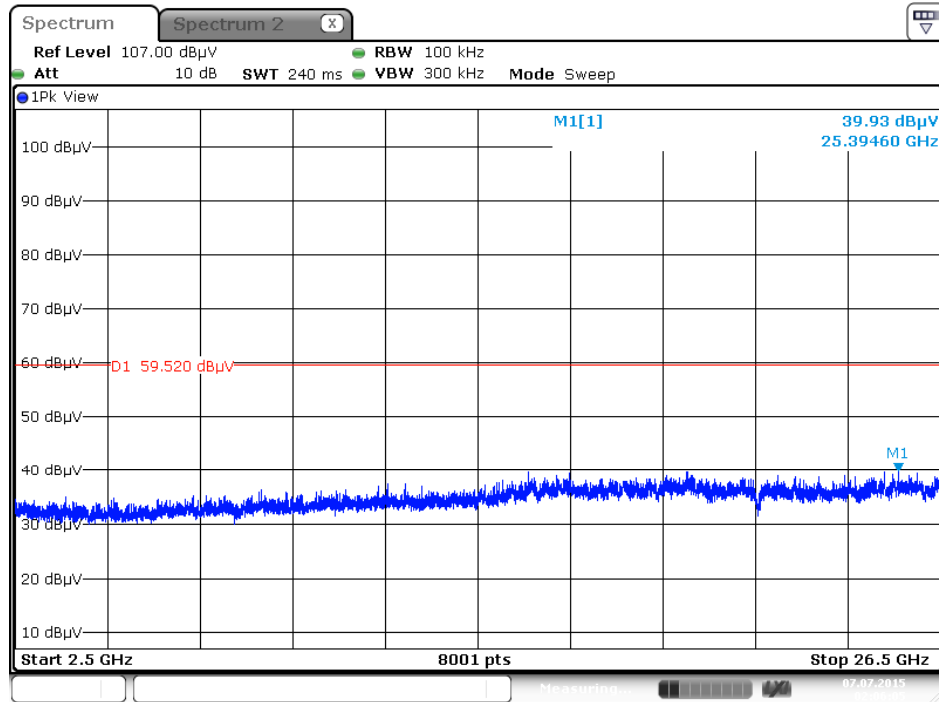

Date: 7 JUL 2015 02:06:05

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (O3CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (O3CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (O3CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (O3CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (O3CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (O3CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (O3CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015	Radiation (O3CH01-CB)
Spectrum analyzer	R&S	FSP40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%