

FCC SAR Measurement and Test Report

For

ATID CO., LTD

#1211 Byuksan/Kyungin Digitalvalley II, 184, Gasan digital 2-ro,

Geumcheon-gu, Seoul, Korea

FCC ID: VUJAT870A

FCC Rules:	<u>FCC Part 2.1093</u> <u>ANSI / IEEE C95.1 :2005+A1:2010</u> <u>ANSI / IEEE C95.3 :2002(R2008)</u> <u>IEEE 1528 :2013</u>
Product Description:	<u>Industrial PDA</u>
Tested Model:	<u>AT870A</u>
Report No.:	<u>STR17068505H</u>
Sample Received Date:	<u>2018-03-23</u>
Tested Date:	<u>2018-03-23 to 2018-03-27</u>
Issued Date:	<u>2018-03-28</u>
Tested By:	<u>Lucy Wei / Engineer</u> <i>Lucy Wei</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. General Information	3
1.1 Product Description for Equipment Under Test (EUT)	3
1.2 Test Standards	6
1.3 Test Methodology	6
1.4 Test Facility	6
2. Summary of Test Results	7
3. Specific Absorption Rate (SAR)	8
3.1 Introduction	8
3.2 SAR Definition	8
4. SAR Measurement System	9
4.1 The Measurement System	9
4.2 Probe	9
4.3 Probe Calibration Process	11
4.4 Phantom	12
4.5 Device Holder	12
4.6 Test Equipment List	13
5. Tissue Simulating Liquids	14
5.1 Composition of Tissue Simulating Liquid	14
5.2 Tissue Dielectric Parameters for Head and Body Phantoms	15
5.3 Tissue Calibration Result	16
6. SAR Measurement Evaluation	17
6.1 Purpose of System Performance Check	17
6.2 System Setup	17
6.3 Validation Results	18
7. EUT Testing Position	20
7.1 Define Two Imaginary Lines on The Handset	20
7.2 Cheek Position	21
7.3 Tilted Position	21
7.4 EUT Antenna Position	22
7.5 EUT Testing Position	23
8. SAR Measurement Procedures	26
8.1 Measurement Procedures	26
8.2 Spatial Peak SAR Evaluation	26
8.3 Area & Zoom Scan Procedures	27
8.4 Volume Scan Procedures	27
8.5 SAR Averaged Methods	27
8.6 Power Drift Monitoring	27
9. SAR Test Result	28
9.1 Conducted RF Output Power	28
9.2 Test Results for Standalone SAR Test	33
9.3 Simultaneous Multi-band Transmission SAR Analysis	39
10. Measurement Uncertainty	51
10.1 Uncertainty for EUT SAR Test	51
10.2 Uncertainty for System Performance Check	52
Annex A. Plots of System Performance Check	54
Annex B. Plots of SAR Measurement	72
Annex C. EUT Photos	103
Annex D. Test Setup Photos	106
Annex E. Calibration Certificate	112

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ATID CO., LTD
 Address of applicant: #1211 Byuksan/Kyungin Digitalvalley II, 184, Gasan digital 2-ro, Geumcheon-gu, Seoul, Korea

Manufacturer: ATID CO., LTD
 Address of manufacturer: #1211 Byuksan/Kyungin Digitalvalley II, 184, Gasan digital 2-ro, Geumcheon-gu, Seoul, Korea

General Description of EUT	
Product Name:	Industrial PDA
Brand Name:	Atid
Model No.:	AT870A
Adding Model(s):	/
Rated Voltage:	DC 3.7V
Battery Capacity:	Rechargeable Li-Ion(2970mAh)
<p><i>The EUT Main board support GSM850/PCS1900, WCDMA Band 2/5 function. It is intended for speech, Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EDGE class 10 for GSM850/900/DCS1800/PCS1900, GPS, RFID, Bluetooth and Wi-Fi functions. For more information see the following datasheet</i></p> <p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. For more information see the following datasheet</i></p>	

Technical Characteristics of EUT	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS 850: 824~849MHz GSM/GPRS 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS 850: 869~894MHz GSM/GPRS 1900: 1930~1990MHz
RF Output Power:	GSM850: 32.95dBm, GSM1900: 29.86dBm EDGE850: 27.49dBm, EDGE1900: 26.05dBm
Type of Modulation:	GMSK,8PSK
Antenna Type:	Internal Antenna
Antenna Gain:	GSM850: -1.29dBi; GSM1900: 1.0dBi
GPRS Class:	Class 10
3G	

Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band II, WCDMA Band V
Uplink Frequency:	WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz
Downlink Frequency:	WCDMA Band II: 1930~1990MHz WCDMA Band V: 869~894MHz
RF Output Power:	WCDMA Band II: 23.07dBi, WCDMA Band V: 25.00dBi
Type of Modulation:	BPSK, QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band II: 1.0dBi, WCDMA Band V: -1.29dBi
WIFI(2.4G)	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20)
AV Output Power:	9.47dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 72.2Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	0.54dBi
Bluetooth	
Bluetooth Version:	V2.1+EDR (BDR/EDR mode)
Frequency Range:	2402-2480MHz
AV Output Power:	-0.606dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	0.54dBi
RF ID	
Frequency Range:	902.75MHz-927.25MHz
RF Output Power:	27.67dBm(Conducted)
Modulation:	ASK
Quantity of Channels:	50
Channel Separation:	500KHz
Antenna Gain:	1.82dBi
WIFI(5G)	
Support Standards:	802.11a, 802.11n-HT20
Frequency Range:	Band 1: 5150-5250MHz, Band 4: 5725-5850MHz
RF Output Power:	8.88dBm (Conducted)

Type of Modulation:	QPSK, 16QAM, 64QAM
Type of Antenna:	Internal Antenna
Antenna Gain:	0dBi

1.2 Test Standards

The following report is prepared on behalf of the ATID CO., LTD in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1 :2005+A1:2010, IEEE 1528-2013, KDB 865664 D01 v01r04, KDB 865664 D02 v01r02, KDB 941225 D06 Hotspot mode v02r01, KDB 447498 D01 v06, KDB 648474 D04 v01r03 ,KDB 941225 D01 v03r01and KDB 248227 D01 v02r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body (0mm Gap)	Hotspot (0mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	
GSM850	1.091	0.544	0.544	1.6
GSM1900	0.222	0.105	0.105	1.6
WCDMA Band V	0.959	0.560	0.560	1.6
WCDMA Band II	0.723	0.469	0.469	1.6
WLAN 2.4GHz	0.051	0.123	0.123	1.6
WLAN 5.2GHz	0.103	0.110	0.110	1.6
Simultaneous Transmission	1.450	0.903	0.903	1.6

Frequency Band	Body (20mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	
RF ID	0.384	1.6

*The highest reported SAR values for head, body, wireless router(hotspot),and simultaneous transmission conditions are **1.091 W/kg**, **0.560 W/kg**, **0.560 W/kg** and **1.450 W/kg** respectively*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1 :2005+A1:2010, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013 and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm
- Distance between dipoles / probe extremity: 2.7mm

- Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

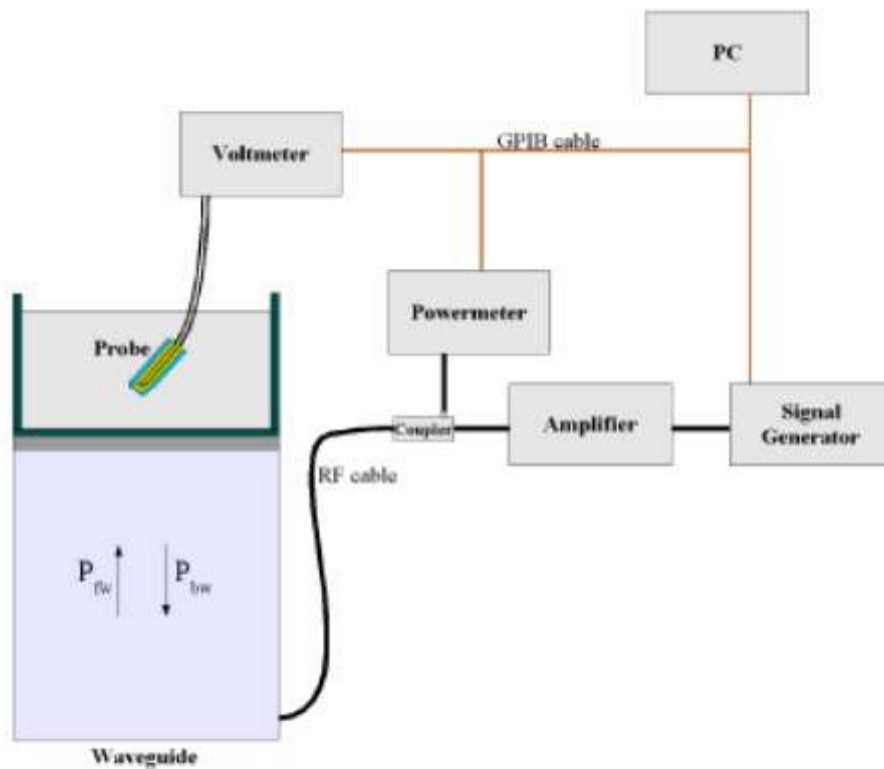

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 °.

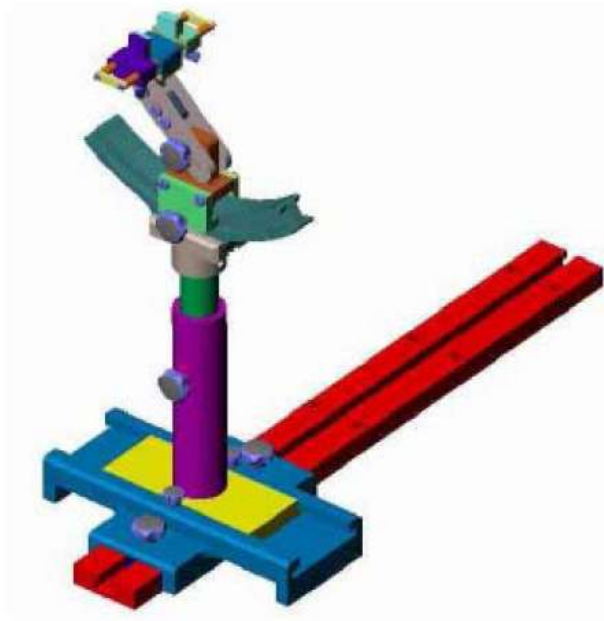

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE5	SN 09/13 EP168	2017-06-01	2018-05-31
E-Field Probe	MVG	SSE2	SN 08/16 EPGO298	2017-09-18	2018-09-17
835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2018-03-20	2019-03-19
900MHz Dipole	MVG	SID900	SN 47/12 DIP 0G900-205	2018-03-20	2019-03-19
1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2018-03-20	2019-03-19
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2018-03-20	2019-03-19
5 GHz Waveguide	MVG	SWG5500	SN 49/16 WGA45	2017-08-07	2018-08-06
Dielectric Probe Kit	MVG	SCLMP	SN 47/12 OCPG49	2018-03-20	2019-03-19
SAM Phantom	MVG	SAM	SN/ 47/12 SAM95	N/A	N/A
MULTIMETER	KEITHLEY	Keithley 2000	4006367	2017-06-12	2018-06-11
Signal Generator	Rohde & Schwarz	SMR20	100047	2017-06-12	2018-06-11
Universal Tester	Rohde & Schwarz	CMU200	112012	2017-06-12	2018-06-11
Network Analyzer	HP	8753C	2901A00831	2017-06-12	2018-06-11
Directional Couplers	Agilent	778D	20160	2017-06-12	2018-06-11

5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



Liquid Height for Head SAR



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Head						
835	40.3	1.4	57.9	0.2	0.2	0
1900	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
Body						
835	50.8	0.9	48.2	0	0.1	0
900	50.8	0.9	48.2	0	0.1	0
1900	70.2	0.4	0	0	0	29.4
2450	68.6	0.1	0	0	0	31.3

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head			
5200	65.52	17.24	17.24
Body			
5200	78.6	10.7	10.7

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
3000	2.40	38.5	2.73	52.0
5200	4.66	36.0	5.30	49.0
5800	5.27	35.3	6.00	48.2

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
835	21.2	0.87	0.90	-3.33	41.11	41.50	-0.94	±5	2018-03-23
1900	21.3	1.38	1.40	-1.43	38.56	40.00	-3.60	±5	2018-03-26
2450	21.3	1.76	1.80	-2.22	38.6	39.2	-1.53	±5	2018-03-27
5200	21.3	4.87	4.66	4.51	35.6	36.0	-1.11	±5	2018-03-27

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
835	21.2	0.95	0.97	-2.06	54.85	55.20	-0.63	±5	2018-03-23
900	21.2	1.02	1.05	-2.86	55.0	55.0	0.01	±5	2018-03-23
1900	21.3	1.50	1.52	-1.32	52.42	53.30	-1.65	±5	2018-03-26
2450	21.3	2.00	1.95	2.56	52.3	52.7	-0.76	±5	2018-03-27
5200	21.3	5.16	5.30	-2.64	48.50	49.0	-1.02	±5	2018-03-27


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

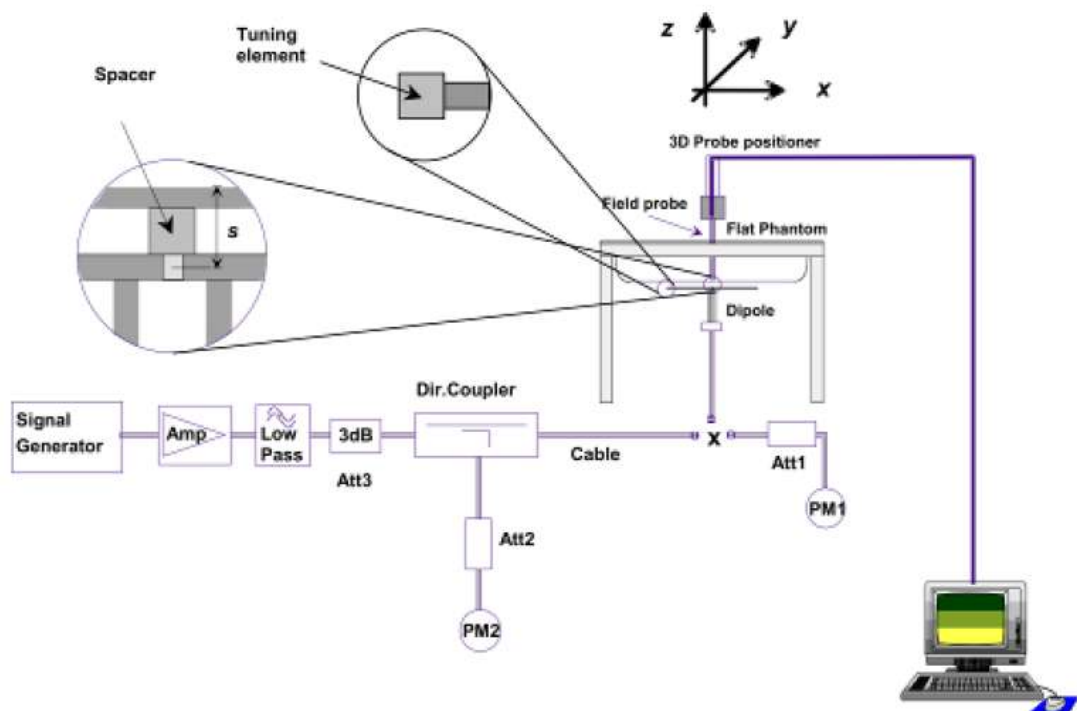

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

The output power on 5 GHz Waveguide must be calibrated to 20 dBm (100mW) before 5 GHz Waveguide is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency MHz	Targeted SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Normalized SAR _{1g} (W/kg)	Tolerance (%)
Head				
835	9.67	2.39	9.56	-0.93
1900	39.58	9.91	39.64	0.13
2450	53.69	13.46	53.84	0.15
Body				
835	9.38	2.36	9.44	0.85
900	10.85	2.78	11.12	2.49
1900	39.10	9.80	39.2	0.49
2450	50.41	12.60	50.4	0.14

Frequency	Liquid	Power (mw)	Targeted SAR1g	Measured SAR1g	Normalized SAR1g	Tolerance
5200	Head	100	161.23	16.946	169.46	5.10
5200	Body	100	154.45	16.681	166.81	8.00

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Define Two Imaginary Lines on The Handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

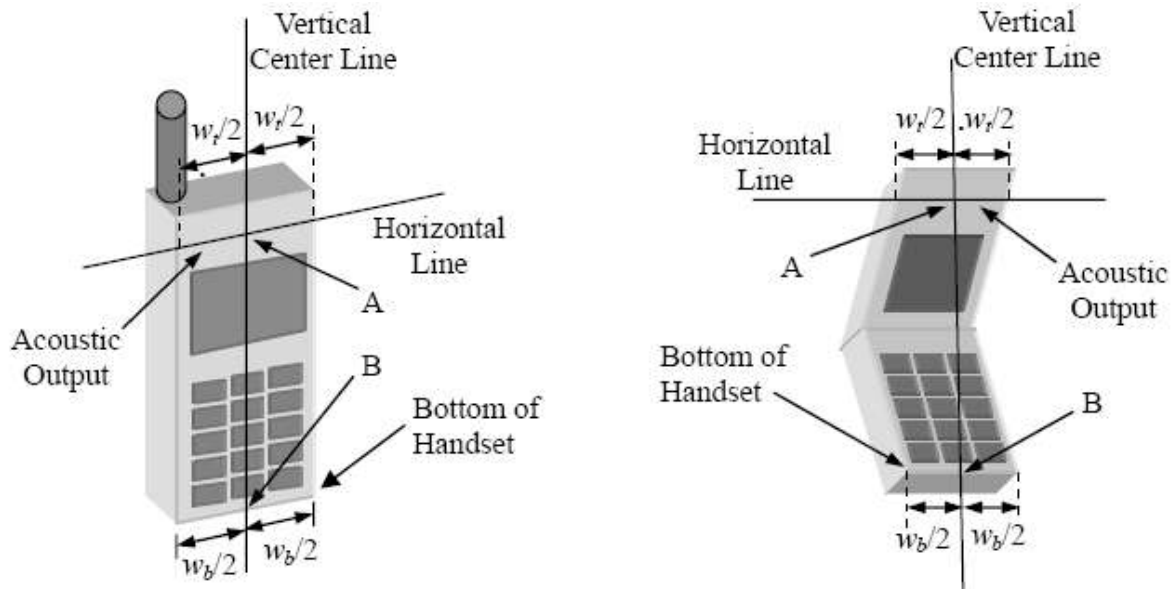


Illustration for Handset Vertical and Horizontal Reference Lines

7.2 Cheek Position

(a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

(b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 7.2).

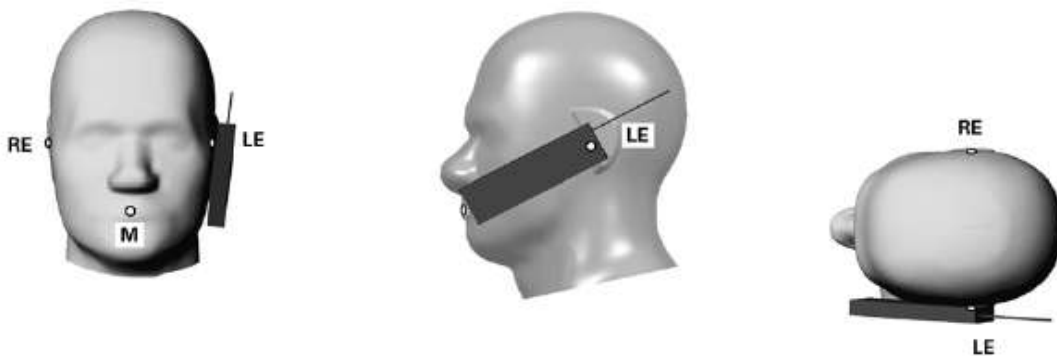


Illustration for Cheek Position

7.3 Tilted Position



(a) To position the device in the “cheek” position described above.

(b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 7.3).



Illustration for Tilted Position

7.4 EUT Antenna Position

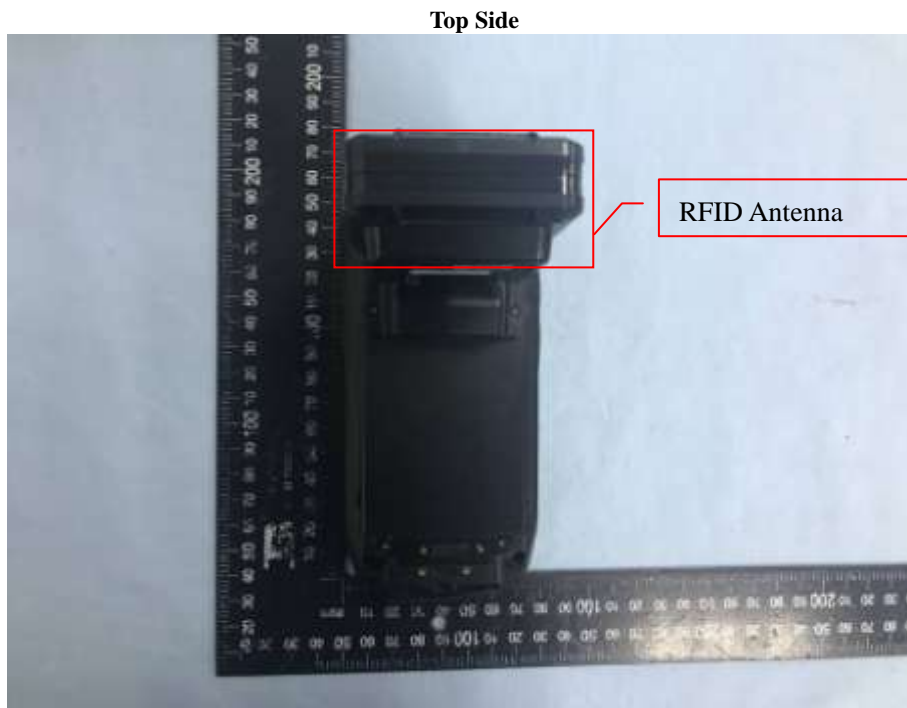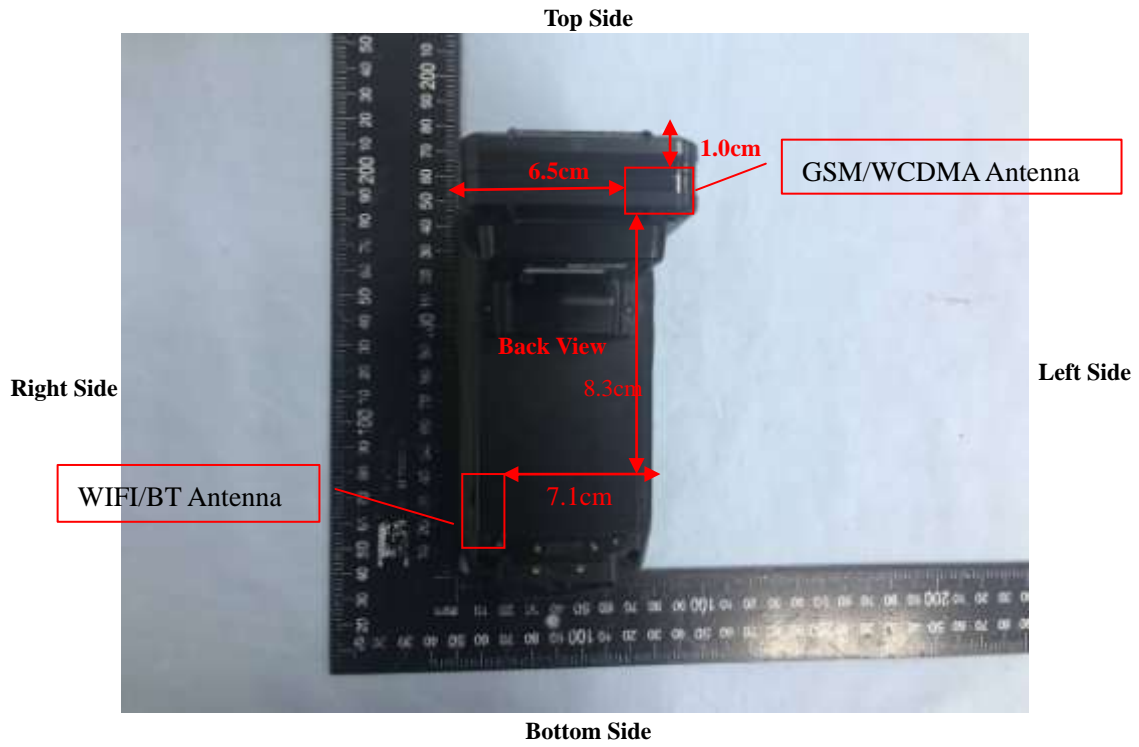

Block Diagram for EUT Antenna Position

7.5 EUT Testing Position

Exclusion Distance Calculation				
Frequency Bands	Service	Maximum Tune-up Power	Average Power	Exclusion Distance
GSM850	GSM	33.5dBm	24.5dBm	35mm
GPRS850	GPRS(2slots)	30.5dBm	24.5dBm	35mm
GSM1900	GSM	30.0dBm	21.0dBm	25mm
GPRS1900	GPRS(2slots)	27.5dBm	21.5dBm	30mm
WCDMA Band V	RMC 12.2k	25.5dBm	25.5dBm	45mm
WCDMA Band II	RMC 12.2k	23.5dBm	23.5dBm	45mm

Note: Refer to Chapter 9.1 Conducted RF Output Power

Remark: 1. Referring to KDB 447498 D06, section 4.3.1, use the 10-g Extremity SAR Exclusion criteria, the distance of the antennas to all adjacent edges SAR test exclusion for adjacent edges.

Head/Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Head SAR tests				
Antennas	Right Cheek	Left Cheek	Right Tilted	Left Tilted
WWAN	Yes	Yes	Yes	Yes
WLAN	Yes	Yes	Yes	Yes

Body/Hotspot SAR tests, Test distance: 0mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom Side
WWAN	Yes	No	No	Yes	Yes	No
WLAN	Yes	Yes	Yes	No	No	Yes

Body SAR tests, Test distance: 20mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom Side
RFID	Yes	No	No	No	No	No


Remark:

1. A non-standard setup was used for SAR testing based on guidance from the FCC. The operational description contains additional information.
2. For RFID Antenna, this front side SAR test combined with the directivity plot should be enough to justify not testing the back side. A similar reasoning can be used to excluded testing the left, right, top, and bottom side of the RFID antenna (since the SAR is expected to be highest on the front side). (*the directivity plot please refer to page 24-25*).
3. Referring to KDB 447498 D06, SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge .
4. Depending on the form factor and dimensions of a device, the test separation distance used for hotspot mode SAR measurement is either 10 mm or that used in the body-worn accessory configuration, whichever is less for

devices with dimension > 9 cm x 5 cm .


5. *Please refer to Annex D for the EUT test setup photos.*

Antenna directivity plot:

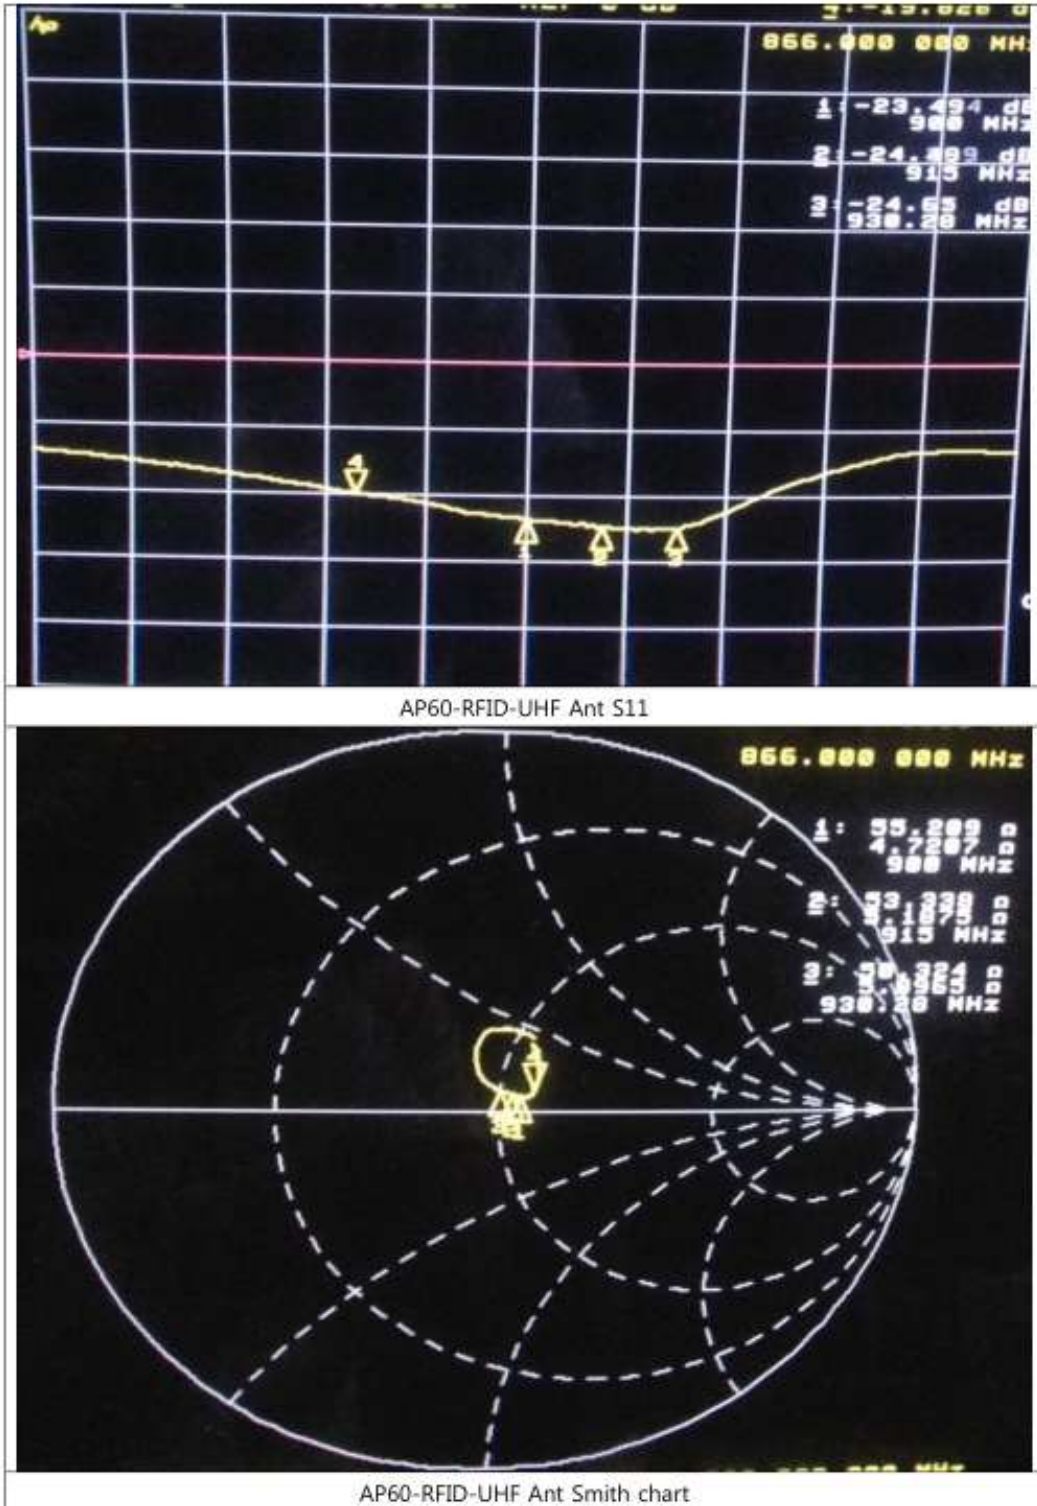

Freq	Antenna	RHCP	Freq.[GHz]													
			0.902	0.904	0.906	0.908	0.91	0.912	0.914	0.916	0.918	0.92	0.922	0.924	0.926	0.928
902-928 MHz (USA)	AP60-RFID-UHF	Av.[dBic]	-3.67	-3.48	-3.34	-3.26	-3.12	-2.98	-2.86	-2.72	-2.64	-2.58	-2.50	-2.44	-2.33	-2.21
		PK.[dBic]	0.06	0.25	0.40	0.50	0.67	0.85	1.01	1.19	1.31	1.39	1.49	1.55	1.69	1.82
		A.R Max[dB]	-1.29	-1.23	-1.06	-0.88	-0.71	-0.58	-0.49	-0.44	-0.40	-0.31	-0.23	-0.15	-0.11	-0.15

RADIATION PATTERN

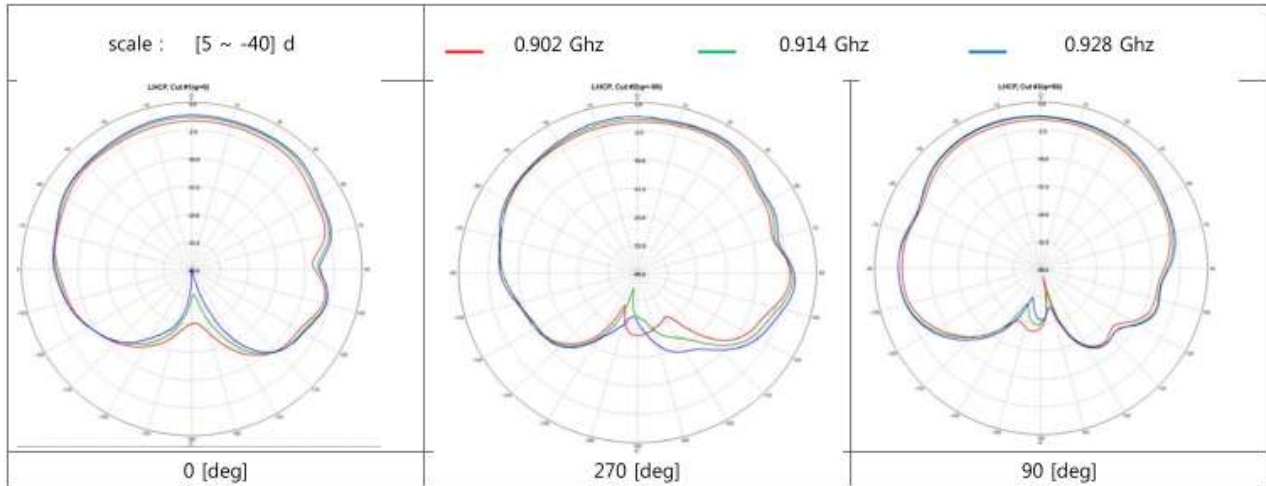

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	32.78	32.89	32.93	29.77	29.34	29.61
GPRS (1 slot)	32.82	32.92	32.95	29.86	29.37	29.66
GPRS (2 slots)	30.40	30.32	30.26	27.07	26.58	26.32
EGPRS (1 slots)	27.49	27.42	27.36	26.05	25.6	25.36
EGPRS (2 slots)	24.46	24.57	24.46	22.92	22.48	22.2

GSM - Source-Based Time-Average Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	23.78	23.89	23.93	20.77	20.34	20.61
GPRS (1 slot)	23.82	23.92	23.95	20.86	20.37	20.66
GPRS (2 slots)	24.40	24.32	24.26	21.07	20.58	20.32
EGPRS (1 slots)	18.49	18.42	18.36	17.05	16.60	16.36
EGPRS (2 slots)	18.46	18.57	18.46	16.92	16.48	16.20

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Remark:

1. For Head SAR testing, GSM and GPRS 2-slots and GPRS 2-slots should be evaluated, therefore the EUT was set in GSM and GPRS 2-slots for GSM850 and GSM ,GPRS 2-slots for GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (2Tx slots) for GSM850 and GPRS (2Tx slots) for GSM1900 due to its highest source-based time-average power.
3. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The DUT do not support DTM function.
5. This device supports VOIP capability through 3rd party apps software.

WCDMA - Average Power (dBm)						
Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4183	4233
Frequency (MHz)	1852.4	1880.0	1907.6	826.4	836.6	846.6
RMC 12.2k	22.78	22.98	23.07	24.87	24.75	25.00
HSDPA Subtest-1	22.51	22.08	22.45	23.58	23.49	23.84
HSDPA Subtest-2	22.48	22.05	22.41	23.55	23.45	23.81
HSDPA Subtest-3	22.47	22.04	22.42	23.57	23.46	23.82
HSDPA Subtest-4	22.47	22.07	22.43	23.56	23.48	23.82
HSUPA Subtest-1	21.84	22.83	22.29	23.43	23.36	23.61
HSUPA Subtest-2	21.81	22.81	22.27	23.41	23.35	23.6
HSUPA Subtest-3	21.8	22.81	22.26	23.42	23.34	23.58
HSUPA Subtest-4	21.83	22.8	22.28	23.42	23.34	23.57
HSUPA Subtest-5	21.81	22.82	22.28	23.41	23.35	23.58

Remark:

1. For Head SAR, per KDB 941225 D01 v03r01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 1/4 dB higher than RMC, SAR tests with AMR 12.2kbps can be excluded.
2. For Body SAR, per KDB 941225 D01 v03r01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 output power is < 1/4 dB higher than RMC, and SAR with RMC 12.2kbps setting is $\cong 1.2\text{W/kg}$, HSDPA SAR evaluation can be excluded.

RF ID - Maximum Average Power	
Frequency (MHz)	Average Power (dBm)
902.75	27.36
914.75	27.60
927.25	27.67

WLAN - Maximum Average Power				
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)
802.11b	11Mbps	CH 01	2412	9.27
		CH 06	2437	9.47
		CH 11	2462	8.63
802.11g	54Mbps	CH 01	2412	8.38
		CH 06	2437	8.46
		CH 11	2462	7.45
802.11n (20MHz)	MCS7	CH 01	2412	7.24
		CH 06	2437	7.38
		CH 11	2462	6.49

WLAN(5.2G) - Maximum Average Power			
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)
A20	CH 36	5180	8.75
	CH 40	5200	8.88
	CH 48	5240	8.31
N20	CH 36	5180	8.00
	CH 40	5200	7.96
	CH 48	5240	7.19

WLAN(5.8G) - Maximum Average Power			
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)
A20	CH149	5745	7.29
	CH157	5785	6.98
	CH165	5825	6.85
N20	CH149	5745	6.40
	CH157	5785	5.91
	CH165	5825	6.06

Remark:

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 3 .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
4. Per KDB 248227 D01 v02r02, SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
 - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
 - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.
5. WLAN(5.8G) maximum output power is 7.29dBm , and Maximum Tune-Up output power is 7.5dBm. So WLAN(5.8G) is more conservative. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, } 4.87\text{mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR,16 where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation¹⁷
 - The result is rounded to one decimal place for comparison

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
7.5	5.62	5	5.745	2.69	3

The exclusion thresholds is $2.69 < 3$, therefore, the RF exposure evaluation is not required.

Bluetooth - Maximum Average Power		
Test Mode	Data Rate	Average Power(dBm)
GFSK	1Mbps	-0.606
Pi/4 QDPSK	2Mbps	-1.181
8DPSK	3Mbps	-1.023

Remark:

Bluetooth maximum output power is -0.606dBm, and Tune-Up output power is 0dBm. Per KDB 447498 D01 v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, 16 where}$$

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
0	1.00	5	2.480	0.31	3

The exclusion threshold is $0.31 < 3$, therefore, the RF exposure evaluation is not required.

9.2 Test Results for Standalone SAR Test

Head SAR

GSM850 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GSM	Right Cheek	251	848.8	32.93	33.50	1.140	0.957	1.091
2.	GSM	Right Cheek	128	824.2	32.78	33.50	1.180	0.813	0.960
3.	GSM	Right Cheek	190	836.4	32.89	33.50	1.151	0.866	0.997
4.	GSM	Right Tilted	251	848.8	32.93	33.50	1.140	0.347	0.396
5.	GSM	Left Cheek	251	848.8	32.93	33.50	1.140	0.65	0.741
6.	GSM	Left Tilted	251	848.8	32.93	33.50	1.140	0.236	0.269

GSM1900 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
7.	GSM	Right Cheek	512	1850.2	29.77	30.00	1.054	0.211	0.222
8.	GSM	Right Tilted	512	1850.2	29.77	30.00	1.054	0.098	0.103
9.	GSM	Left Cheek	512	1850.2	29.77	30.00	1.054	0.132	0.139
10.	GSM	Left Tilted	512	1850.2	29.77	30.00	1.054	0.074	0.078

GSM850 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
11.	GPRS_2TX	Right Cheek	128	824.2	30.40	30.50	1.023	0.425	0.435
12.	GPRS_2TX	Right Tilted	128	824.2	30.40	30.50	1.023	0.238	0.244
13.	GPRS_2TX	Left Cheek	128	824.2	30.40	30.50	1.023	0.372	0.381
14.	GPRS_2TX	Left Tilted	128	824.2	30.40	30.50	1.023	0.129	0.132

GSM1900 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
15.	GPRS_2TX	Right Cheek	512	1850.2	27.07	27.50	1.104	0.200	0.221
16.	GPRS_2TX	Right Tilted	512	1850.2	27.07	27.50	1.104	0.087	0.096
17.	GPRS_2TX	Left Cheek	512	1850.2	27.07	27.50	1.104	0.144	0.159
18.	GPRS_2TX	Left Tilted	512	1850.2	27.07	27.50	1.104	0.064	0.071

WCDMA Band V – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
19.	RMC	Right Cheek	4233	846.6	25.00	25.50	1.122	0.825	0.926
20.	RMC	Right Cheek	4132	826.4	24.87	25.50	1.156	0.636	0.735
21.	RMC	Right Cheek	4183	836.6	24.75	25.50	1.189	0.807	0.959
22.	RMC	Right Tilted	4233	846.6	25.00	25.50	1.122	0.332	0.373
23.	RMC	Left Cheek	4233	846.6	25.00	25.50	1.122	0.685	0.769
24.	RMC	Left Tilted	4233	846.6	25.00	25.50	1.122	0.263	0.295

WCDMA Band II – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
25.	RMC	Right Cheek	9538	1907.6	23.07	23.50	1.104	0.655	0.723
26.	RMC	Right Tilted	9538	1907.6	23.07	23.50	1.104	0.374	0.413
27.	RMC	Left Cheek	9538	1907.6	23.07	23.50	1.104	0.351	0.388
28.	RMC	Left Tilted	9538	1907.6	23.07	23.50	1.104	0.164	0.181

WLAN 2.4GHz – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
29.	802.11b	Right Cheek	06	2437	9.47	10.00	1.130	0.045	0.051
30.	802.11b	Right Tilted	06	2437	9.47	10.00	1.130	0.038	0.043
31.	802.11b	Left Cheek	06	2437	9.47	10.00	1.130	0.015	0.017
32.	802.11b	Left Tilted	06	2437	9.47	10.00	1.130	0.01	0.011

WLAN 5.2GH – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
33.	11a	Right Cheek	40	5200	8.88	9.0	1.028	0.096	0.099
34.	11a	Right Tilted	40	5200	8.88	9.0	1.028	0.031	0.032
35.	11a	Left Cheek	40	5200	8.88	9.0	1.028	0.100	0.103
36.	11a	Left Tilted	40	5200	8.88	9.0	1.028	0.042	0.043

Remark: Per KDB447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

Body SAR

GSM850 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
37.	GPRS_2TX	Front Side	128	824.2	30.40	30.50	1.023	0.532	0.544
38.	GPRS_2TX	Top side	128	824.2	30.40	30.50	1.023	0.149	0.152
39.	GPRS_2TX	Left side	128	824.2	30.40	30.50	1.023	0.042	0.043

GSM1900 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
40.	GPRS_2TX	Front Side	512	1850.2	27.07	27.50	1.104	0.095	0.105
41.	GPRS_2TX	Top side	512	1850.2	27.07	27.50	1.104	0.075	0.083
42.	GPRS_2TX	Left side	512	1850.2	27.07	27.50	1.104	0.054	0.060

WCDMA Band V – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
43.	RMC 12.2k	Front Side	4233	846.6	25.00	25.50	1.122	0.464	0.521
44.	RMC 12.2k	Top side	4233	846.6	25.00	25.50	1.122	0.499	0.560
45.	RMC 12.2k	Left side	4233	846.6	25.00	25.50	1.122	0.035	0.039

WCDMA Band II – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
46.	RMC 12.2k	Front Side	9538	1907.6	23.07	23.50	1.104	0.35	0.386
47.	RMC 12.2k	Top side	9538	1907.6	23.07	23.50	1.104	0.425	0.469
48.	RMC 12.2k	Left side	9538	1907.6	23.07	23.50	1.104	0.047	0.052

WLAN 2.4GHz –Body SAR Test(Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
49.	802.11b	Back Side	06	2437	9.47	10.00	1.130	0.109	0.123
50.	802.11b	Front Side	06	2437	9.47	10.00	1.130	0.026	0.029
51.	802.11b	Bottom side	06	2437	9.47	10.00	1.130	0.014	0.016
52.	802.11b	Right side	06	2437	9.47	10.00	1.130	0.094	0.106

WLAN 5.2GHz –Body SAR Test(Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
53.	11a	Back Side	40	5200	8.88	9.0	1.028	0.107	0.110
54.	11a	Front Side	40	5200	8.88	9.0	1.028	0.079	0.081
55.	11a	Bottom side	40	5200	8.88	9.0	1.028	0.097	0.100
56.	11a	Right side	40	5200	8.88	9.0	1.028	0.072	0.074

RF ID –Body SAR Test (Gap: 20mm)							
Plot No.	Test Position Body	Frequency MHz	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
57.	Front side	927.25	27.67	28.0	1.079	0.356	0.384

Remark: Per KDB447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

Hotspot SAR

GSM850 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
37	GPRS_2TX	Front Side	128	824.2	30.40	30.50	1.023	0.532	0.544
38	GPRS_2TX	Top side	128	824.2	30.40	30.50	1.023	0.149	0.152
39	GPRS_2TX	Left side	128	824.2	30.40	30.50	1.023	0.042	0.043

GSM1900 – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
40	GPRS_2TX	Front Side	512	1850.2	27.07	27.50	1.104	0.095	0.105
41	GPRS_2TX	Top side	512	1850.2	27.07	27.50	1.104	0.075	0.083
42	GPRS_2TX	Left side	512	1850.2	27.07	27.50	1.104	0.054	0.060

WCDMA Band V – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
43	RMC 12.2k	Front Side	4233	846.6	25.00	25.50	1.122	0.464	0.521
44	RMC 12.2k	Top side	4233	846.6	25.00	25.50	1.122	0.499	0.560
45	RMC 12.2k	Left side	4233	846.6	25.00	25.50	1.122	0.035	0.039

WCDMA Band II – Body SAR Test (Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
46	RMC 12.2k	Front Side	9538	1907.6	23.07	23.50	1.104	0.35	0.386
47	RMC 12.2k	Top side	9538	1907.6	23.07	23.50	1.104	0.425	0.469
48	RMC 12.2k	Left side	9538	1907.6	23.07	23.50	1.104	0.047	0.052

WLAN 2.4GHz –Body SAR Test(Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
49	802.11b	Back Side	06	2437	9.47	10.00	1.130	0.109	0.123
50	802.11b	Front Side	06	2437	9.47	10.00	1.130	0.026	0.029
51	802.11b	Bottom side	06	2437	9.47	10.00	1.130	0.014	0.016
52	802.11b	Right side	06	2437	9.47	10.00	1.130	0.094	0.106

WLAN 5.2GHz –Body SAR Test(Gap: 0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
53	11a	Back Side	40	5200	8.88	9.0	1.028	0.107	0.110
54	11a	Front Side	40	5200	8.88	9.0	1.028	0.079	0.081
55	11a	Bottom side	40	5200	8.88	9.0	1.028	0.097	0.100
56	11a	Right side	40	5200	8.88	9.0	1.028	0.072	0.074

Remark: Per KDB447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

9.3 Simultaneous Multi-band Transmission SAR Analysis

List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Head SAR	Body SAR	Hotspot SAR
1	GSM(Voice/Data) + WLAN(Data)	Yes	Yes	Yes
2	WCDMA (Voice/Data)+ WLAN(Data)	Yes	Yes	Yes
3	GSM(Voice/Data) + Bluetooth(Data)	Yes	Yes	-
4	WCDMA(Voice/Data) + Bluetooth(Data)	Yes	Yes	-

Remark:

1. GSM and WCDMA share the same antenna, and cannot transmit simultaneously.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. WLAN and RFID, Bluetooth and RFID, WWAN and RFID cannot transmit simultaneously *respectively*.
4. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

For simultaneous transmission analysis, Bluetooth /WLAN(5.8G)SAR is estimated per KDB 447498 D01 v06 as below:

Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm
0	1.00	5	2.480	7.5	0.042

WLAN(5.8G):

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm
7.5	5.62	5	5.745	7.5	0.359

5. The maximum SAR summation is calculated based on the same configuration and test position.

Head SAR
WWAN and WLAN

Position	WWAN		WLAN(2.4G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	1.091	0.051	1.142
Right Tilted	GSM850	0.396	0.043	0.439
Left Cheek	GSM850	0.741	0.017	0.758
Left Tilted	GSM850	0.269	0.011	0.28
Right Cheek	GSM1900	0.222	0.051	0.273
Right Tilted	GSM1900	0.103	0.043	0.146
Left Cheek	GSM1900	0.139	0.017	0.156
Left Tilted	GSM1900	0.078	0.011	0.089
Right Cheek	GPRS850	0.435	0.051	0.486
Right Tilted	GPRS850	0.244	0.043	0.287
Left Cheek	GPRS850	0.381	0.017	0.398
Left Tilted	GPRS850	0.132	0.011	0.143
Right Cheek	GPRS1900	0.221	0.051	0.272
Right Tilted	GPRS1900	0.096	0.043	0.139
Left Cheek	GPRS1900	0.159	0.017	0.176
Left Tilted	GPRS1900	0.071	0.011	0.082
Right Cheek	WCDMA Band V	0.959	0.051	1.01
Right Tilted	WCDMA Band V	0.373	0.043	0.416
Left Cheek	WCDMA Band V	0.769	0.017	0.786
Left Tilted	WCDMA Band V	0.295	0.011	0.306
Right Cheek	WCDMA Band II	0.723	0.051	0.774
Right Tilted	WCDMA Band II	0.413	0.043	0.456
Left Cheek	WCDMA Band II	0.388	0.017	0.405
Left Tilted	WCDMA Band II	0.181	0.011	0.192

Position	WWAN		WLAN(5.2G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	1.091	0.099	1.190
Right Tilted	GSM850	0.396	0.032	0.428
Left Cheek	GSM850	0.741	0.103	0.844
Left Tilted	GSM850	0.269	0.043	0.312
Right Cheek	GSM1900	0.222	0.099	0.321
Right Tilted	GSM1900	0.103	0.032	0.135
Left Cheek	GSM1900	0.139	0.103	0.242
Left Tilted	GSM1900	0.078	0.043	0.121
Right Cheek	GPRS850	0.435	0.099	0.534
Right Tilted	GPRS850	0.244	0.032	0.276
Left Cheek	GPRS850	0.381	0.103	0.484
Left Tilted	GPRS850	0.132	0.043	0.175
Right Cheek	GPRS1900	0.221	0.099	0.32
Right Tilted	GPRS1900	0.096	0.032	0.128
Left Cheek	GPRS1900	0.159	0.103	0.262
Left Tilted	GPRS1900	0.071	0.043	0.114
Right Cheek	WCDMA Band V	0.959	0.099	1.058
Right Tilted	WCDMA Band V	0.373	0.032	0.405
Left Cheek	WCDMA Band V	0.769	0.103	0.872
Left Tilted	WCDMA Band V	0.295	0.043	0.338
Right Cheek	WCDMA Band II	0.723	0.099	0.822
Right Tilted	WCDMA Band II	0.413	0.032	0.445
Left Cheek	WCDMA Band II	0.388	0.103	0.491
Left Tilted	WCDMA Band II	0.181	0.043	0.224

Position	WWAN		WLAN(5.8G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	1.091	0.359	1.450
Right Tilted	GSM850	0.396	0.359	0.755
Left Cheek	GSM850	0.741	0.359	1.100
Left Tilted	GSM850	0.269	0.359	0.628
Right Cheek	GSM1900	0.222	0.359	0.581
Right Tilted	GSM1900	0.103	0.359	0.462
Left Cheek	GSM1900	0.139	0.359	0.498
Left Tilted	GSM1900	0.078	0.359	0.437
Right Cheek	GPRS850	0.435	0.359	0.794
Right Tilted	GPRS850	0.244	0.359	0.603
Left Cheek	GPRS850	0.381	0.359	0.74
Left Tilted	GPRS850	0.132	0.359	0.491
Right Cheek	GPRS1900	0.221	0.359	0.58
Right Tilted	GPRS1900	0.096	0.359	0.455
Left Cheek	GPRS1900	0.159	0.359	0.518
Left Tilted	GPRS1900	0.071	0.359	0.43
Right Cheek	WCDMA Band V	0.959	0.359	1.318
Right Tilted	WCDMA Band V	0.373	0.359	0.732
Left Cheek	WCDMA Band V	0.769	0.359	1.128
Left Tilted	WCDMA Band V	0.295	0.359	0.654
Right Cheek	WCDMA Band II	0.723	0.359	1.082
Right Tilted	WCDMA Band II	0.413	0.359	0.772
Left Cheek	WCDMA Band II	0.388	0.359	0.747
Left Tilted	WCDMA Band II	0.181	0.359	0.54

WWAN and Bluetooth

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	1.091	0.042	1.133
Right Tilted	GSM850	0.396	0.042	0.438
Left Cheek	GSM850	0.741	0.042	0.783
Left Tilted	GSM850	0.269	0.042	0.311
Right Cheek	GSM1900	0.222	0.042	0.264
Right Tilted	GSM1900	0.103	0.042	0.145
Left Cheek	GSM1900	0.139	0.042	0.181
Left Tilted	GSM1900	0.078	0.042	0.12
Right Cheek	GPRS850	0.435	0.042	0.477
Right Tilted	GPRS850	0.244	0.042	0.286
Left Cheek	GPRS850	0.381	0.042	0.423
Left Tilted	GPRS850	0.132	0.042	0.174
Right Cheek	GPRS1900	0.221	0.042	0.263
Right Tilted	GPRS1900	0.096	0.042	0.138
Left Cheek	GPRS1900	0.159	0.042	0.201
Left Tilted	GPRS1900	0.071	0.042	0.113
Right Cheek	WCDMA Band V	0.959	0.042	1.001
Right Tilted	WCDMA Band V	0.373	0.042	0.415
Left Cheek	WCDMA Band V	0.769	0.042	0.811
Left Tilted	WCDMA Band V	0.295	0.042	0.337
Right Cheek	WCDMA Band II	0.723	0.042	0.765
Right Tilted	WCDMA Band II	0.413	0.042	0.455
Left Cheek	WCDMA Band II	0.388	0.042	0.43
Left Tilted	WCDMA Band II	0.181	0.042	0.223

Body SAR
WWAN and WLAN

Position	WWAN		WLAN(2.4G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	--	0.123	0.123
Front	GSM850	0.544	0.029	0.573
Top side	GSM850	0.152	--	0.152
Bottom side	GSM850	--	0.016	0.016
Right side	GSM850	--	0.106	0.106
Left side	GSM850	0.043	--	0.043
Back	GSM1900	--	0.123	0.123
Front	GSM1900	0.105	0.029	0.134
Top side	GSM1900	0.083	--	0.083
Bottom side	GSM1900	--	0.016	0.016
Right side	GSM1900	--	0.106	0.106
Left side	GSM1900	0.060	--	0.060
Back	WCDMA Band V	--	0.123	0.123
Front	WCDMA Band V	0.521	0.029	0.55
Top side	WCDMA Band V	0.560	--	0.560
Bottom side	WCDMA Band V	--	0.016	0.016
Right side	WCDMA Band V	--	0.106	0.106
Left side	WCDMA Band V	0.039	--	0.039
Back	WCDMA Band II	--	0.123	0.123
Front	WCDMA Band II	0.386	0.029	0.415
Top side	WCDMA Band II	0.469	--	0.469
Bottom side	WCDMA Band II	--	0.016	0.016
Right side	WCDMA Band II	--	0.106	0.106
Left side	WCDMA Band II	0.052	--	0.052

Position	WWAN		WLAN(5.2G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	--	0.110	0.110
Front	GSM850	0.544	0.081	0.625
Top side	GSM850	0.152	--	0.152
Bottom side	GSM850	--	0.100	0.100
Right side	GSM850	--	0.074	0.074
Left side	GSM850	0.043	--	0.043
Back	GSM1900	--	0.110	0.110
Front	GSM1900	0.105	0.081	0.186
Top side	GSM1900	0.083	--	0.083
Bottom side	GSM1900	--	0.100	0.100
Right side	GSM1900	--	0.074	0.074
Left side	GSM1900	0.060	--	0.060
Back	WCDMA Band V	--	0.110	0.110
Front	WCDMA Band V	0.521	0.081	0.602
Top side	WCDMA Band V	0.560	--	0.560
Bottom side	WCDMA Band V	--	0.100	0.100
Right side	WCDMA Band V	--	0.074	0.074
Left side	WCDMA Band V	0.039	--	0.039
Back	WCDMA Band II	--	0.110	0.110
Front	WCDMA Band II	0.386	0.081	0.467
Top side	WCDMA Band II	0.469	--	0.469
Bottom side	WCDMA Band II	--	0.100	0.100
Right side	WCDMA Band II	--	0.074	0.074
Left side	WCDMA Band II	0.052	--	0.052

Position	WWAN		WLAN(5.8G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	--	0.359	0.359
Front	GSM850	0.544	0.359	0.903
Top side	GSM850	0.152	--	0.152
Bottom side	GSM850	--	0.359	0.359
Right side	GSM850	--	0.359	0.359
Left side	GSM850	0.043	--	0.043
Back	GSM1900	--	0.359	0.359
Front	GSM1900	0.105	0.359	0.464
Top side	GSM1900	0.083	--	0.083
Bottom side	GSM1900	--	0.359	0.359
Right side	GSM1900	--	0.359	0.359
Left side	GSM1900	0.060	--	0.060
Back	WCDMA Band V	--	0.359	0.359
Front	WCDMA Band V	0.521	0.359	0.88
Top side	WCDMA Band V	0.560	--	0.560
Bottom side	WCDMA Band V	--	0.359	0.359
Right side	WCDMA Band V	--	0.359	0.359
Left side	WCDMA Band V	0.039	--	0.039
Back	WCDMA Band II	--	0.359	0.359
Front	WCDMA Band II	0.386	0.359	0.745
Top side	WCDMA Band II	0.469	--	0.469
Bottom side	WCDMA Band II	--	0.359	0.359
Right side	WCDMA Band II	--	0.359	0.359
Left side	WCDMA Band II	0.052	--	0.052

WWAN and Bluetooth

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	--	0.042	0.042
Front	GSM850	0.544	0.042	0.586
Top side	GSM850	0.152	--	0.152
Bottom side	GSM850	--	0.042	0.042
Right side	GSM850	--	0.042	0.042
Left side	GSM850	0.043	--	0.043
Back	GSM1900	--	0.042	0.042
Front	GSM1900	0.105	0.042	0.147
Top side	GSM1900	0.083	--	0.083
Bottom side	GSM1900	--	0.042	0.042
Right side	GSM1900	--	0.042	0.042
Left side	GSM1900	0.060	--	0.060
Back	WCDMA Band V	--	0.042	0.042
Front	WCDMA Band V	0.521	0.042	0.563
Top side	WCDMA Band V	0.560	--	0.560
Bottom side	WCDMA Band V	--	0.042	0.042
Right side	WCDMA Band V	--	0.042	0.042
Left side	WCDMA Band V	0.039	--	0.039
Back	WCDMA Band II	--	0.042	0.042
Front	WCDMA Band II	0.386	0.042	0.428
Top side	WCDMA Band II	0.469	--	0.469
Bottom side	WCDMA Band II	--	0.042	0.042
Right side	WCDMA Band II	--	0.042	0.042
Left side	WCDMA Band II	0.052	--	0.052

Hotspot SAR
WWAN and WLAN

Position	WWAN		WLAN(2.4G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	--	0.123	0.123
Front	GSM850	0.544	0.029	0.573
Top side	GSM850	0.152	--	0.152
Bottom side	GSM850	--	0.016	0.016
Right side	GSM850	--	0.106	0.106
Left side	GSM850	0.043	--	0.043
Back	GSM1900	--	0.123	0.123
Front	GSM1900	0.105	0.029	0.134
Top side	GSM1900	0.083	--	0.083
Bottom side	GSM1900	--	0.016	0.016
Right side	GSM1900	--	0.106	0.106
Left side	GSM1900	0.060	--	0.060
Back	WCDMA Band V	--	0.123	0.123
Front	WCDMA Band V	0.521	0.029	0.55
Top side	WCDMA Band V	0.560	--	0.560
Bottom side	WCDMA Band V	--	0.016	0.016
Right side	WCDMA Band V	--	0.106	0.106
Left side	WCDMA Band V	0.039	--	0.039
Back	WCDMA Band II	--	0.123	0.123
Front	WCDMA Band II	0.386	0.029	0.415
Top side	WCDMA Band II	0.469	--	0.469
Bottom side	WCDMA Band II	--	0.016	0.016
Right side	WCDMA Band II	--	0.106	0.106
Left side	WCDMA Band II	0.052	--	0.052

Position	WWAN		WLAN(5.2G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	--	0.110	0.110
Front	GSM850	0.544	0.081	0.625
Top side	GSM850	0.152	--	0.152
Bottom side	GSM850	--	0.100	0.100
Right side	GSM850	--	0.074	0.074
Left side	GSM850	0.043	--	0.043
Back	GSM1900	--	0.110	0.110
Front	GSM1900	0.105	0.081	0.186
Top side	GSM1900	0.083	--	0.083
Bottom side	GSM1900	--	0.100	0.100
Right side	GSM1900	--	0.074	0.074
Left side	GSM1900	0.060	--	0.060
Back	WCDMA Band V	--	0.110	0.110
Front	WCDMA Band V	0.521	0.081	0.602
Top side	WCDMA Band V	0.560	--	0.560
Bottom side	WCDMA Band V	--	0.100	0.100
Right side	WCDMA Band V	--	0.074	0.074
Left side	WCDMA Band V	0.039	--	0.039
Back	WCDMA Band II	--	0.110	0.110
Front	WCDMA Band II	0.386	0.081	0.467
Top side	WCDMA Band II	0.469	--	0.469
Bottom side	WCDMA Band II	--	0.100	0.100
Right side	WCDMA Band II	--	0.074	0.074
Left side	WCDMA Band II	0.052	--	0.052

Position	WWAN		WLAN(5.8G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	--	0.359	0.359
Front	GSM850	0.544	0.359	0.903
Top side	GSM850	0.152	--	0.152
Bottom side	GSM850	--	0.359	0.359
Right side	GSM850	--	0.359	0.359
Left side	GSM850	0.043	--	0.043
Back	GSM1900	--	0.359	0.359
Front	GSM1900	0.105	0.359	0.464
Top side	GSM1900	0.083	--	0.083
Bottom side	GSM1900	--	0.359	0.359
Right side	GSM1900	--	0.359	0.359
Left side	GSM1900	0.060	--	0.060
Back	WCDMA Band V	--	0.359	0.359
Front	WCDMA Band V	0.521	0.359	0.88
Top side	WCDMA Band V	0.560	--	0.560
Bottom side	WCDMA Band V	--	0.359	0.359
Right side	WCDMA Band V	--	0.359	0.359
Left side	WCDMA Band V	0.039	--	0.039
Back	WCDMA Band II	--	0.359	0.359
Front	WCDMA Band II	0.386	0.359	0.745
Top side	WCDMA Band II	0.469	--	0.469
Bottom side	WCDMA Band II	--	0.359	0.359
Right side	WCDMA Band II	--	0.359	0.359
Left side	WCDMA Band II	0.052	--	0.052

10. Measurement Uncertainty

10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test Sample Related									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - deviation	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞

from target value										
Liquid conductivity measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	∞	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	∞	
Liquid permittivity measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	∞	
Combined Standard Uncertainty			RSS				12.98	12.53		
Expanded Uncertainty (95% Confidence interval)			K=2				25.32	24.43		

10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	0	R	$\sqrt{3}$	0	0	0.0	0.0	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max.	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞

SAR Evaluation									
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
Deviation of experimental dipole from numerical dipole	E.6.4	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	2.0	R	$\sqrt{3}$	1	0.84	1.10	1.10	∞
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)			K=2				23.39	22.43	

Annex A. Plots of System Performance Check

MEASUREMENT 1

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/23/2018

Measurement duration: 7 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.814580
Ambient Temperature	21.1
Liquid Temperature	21.3


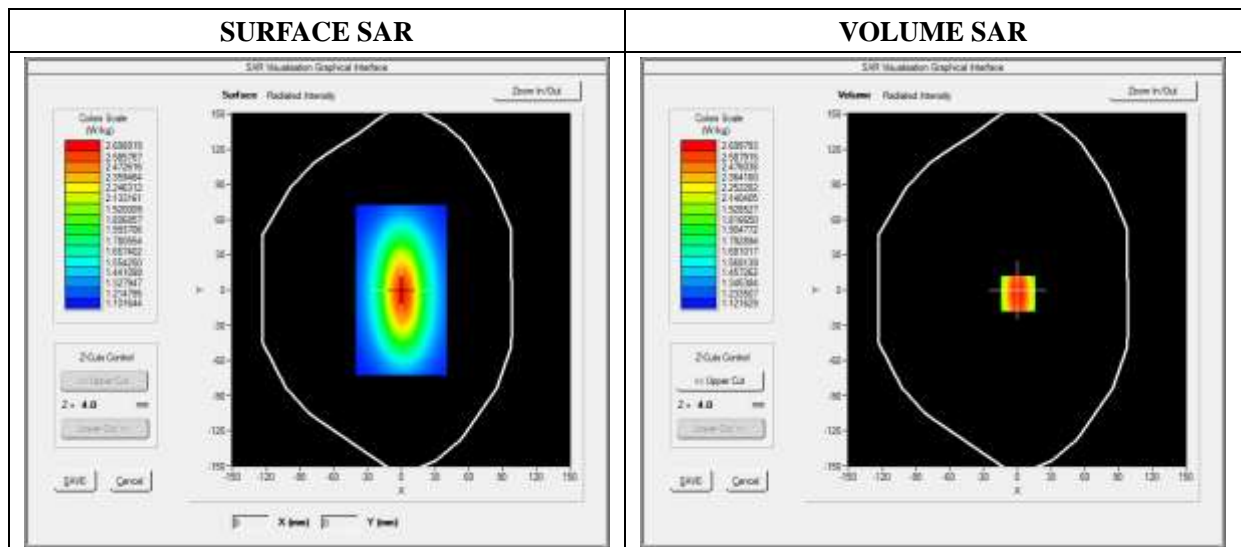


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.129489
SAR 1g (W/Kg)	2.391250

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.4900	1.8942	1.4811	1.3541	1.1123	1.0539

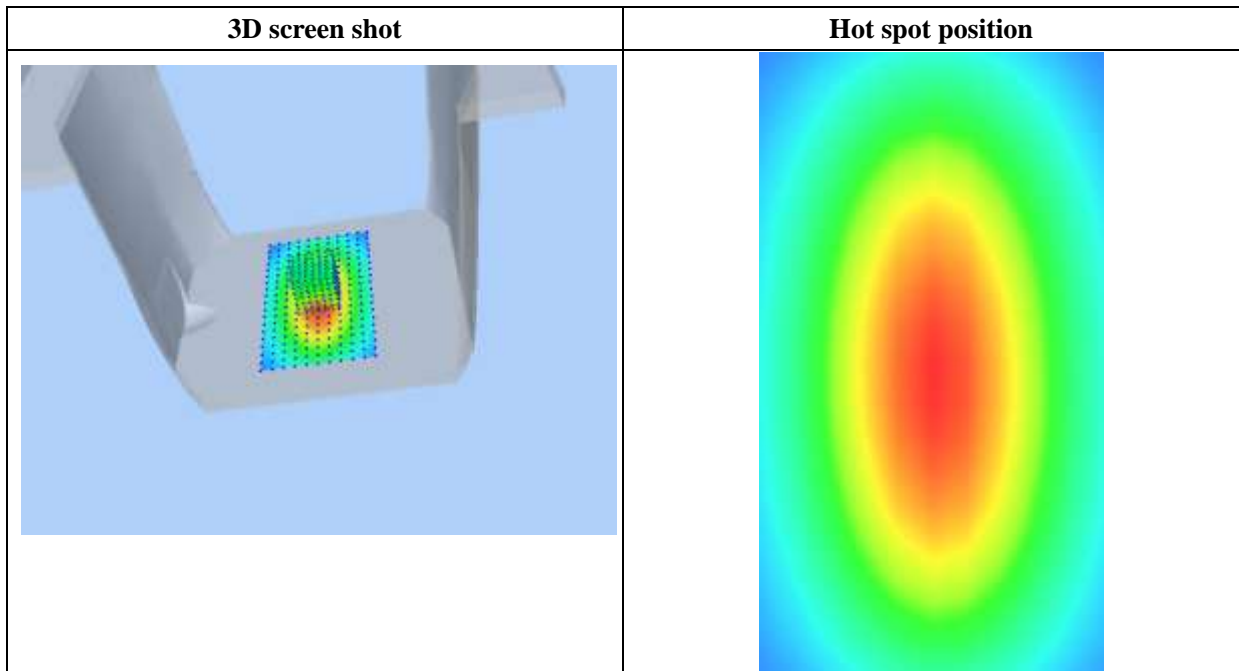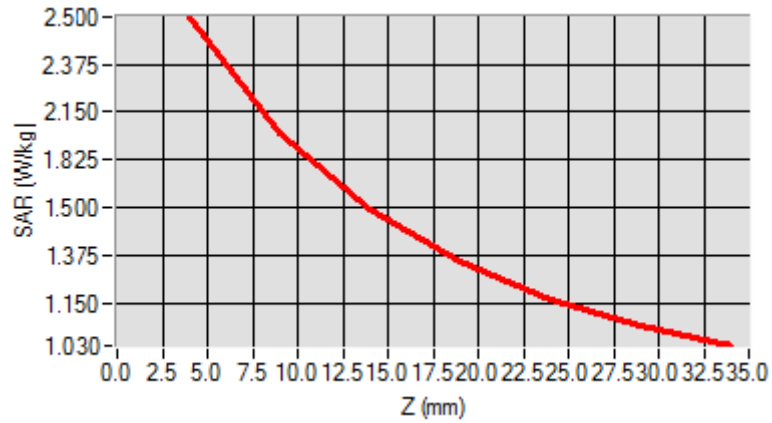

MEASUREMENT 2

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/26/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.022540
Ambient Temperature	21.1
Liquid Temperature	21.3


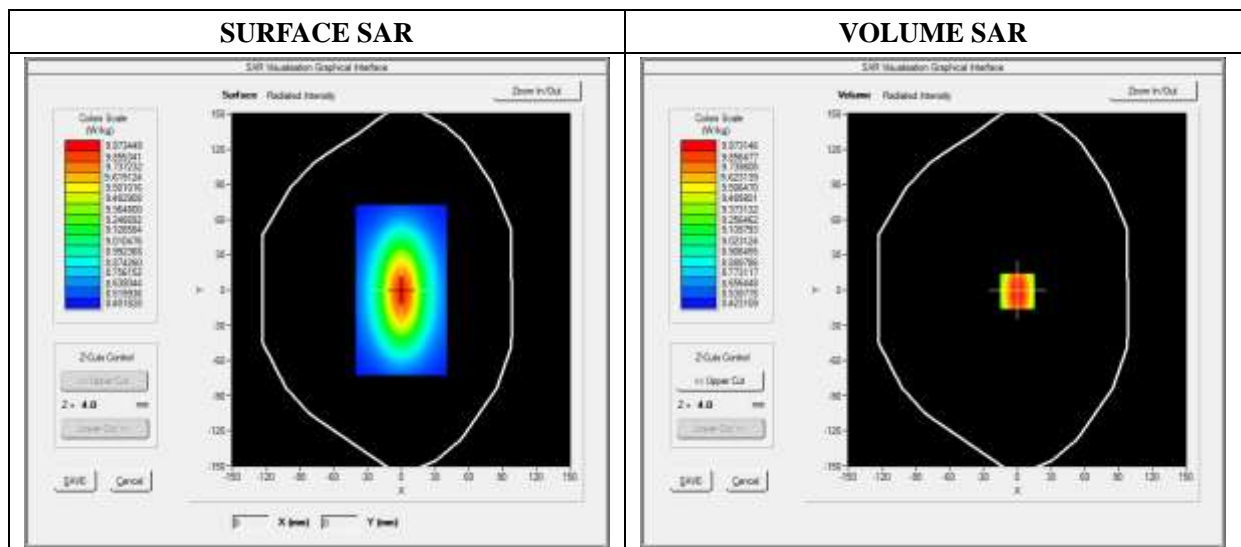


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	7.174526
SAR 1g (W/Kg)	9.913214

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2354	6.8400	5.0121	4.1189	3.0522	2.8424

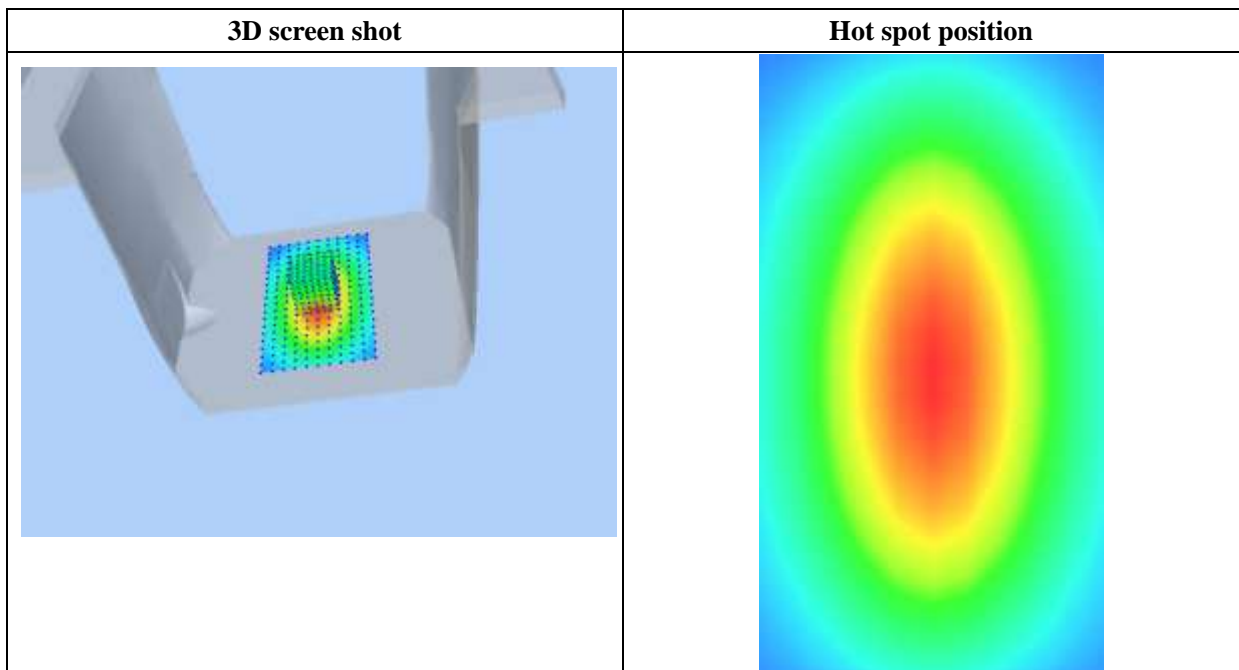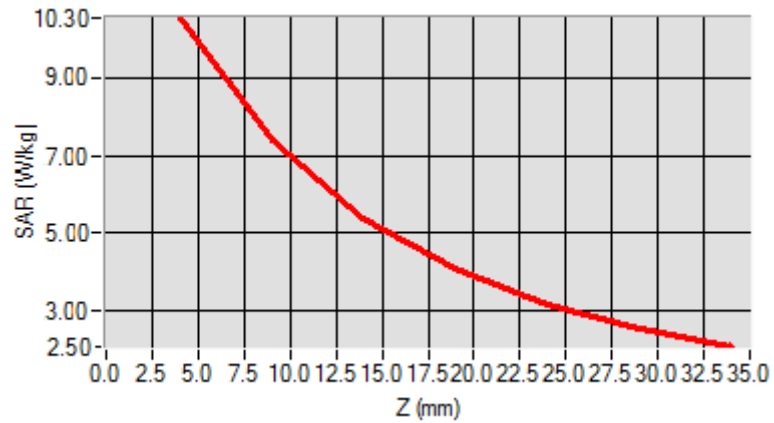

MEASUREMENT 3

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/27/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

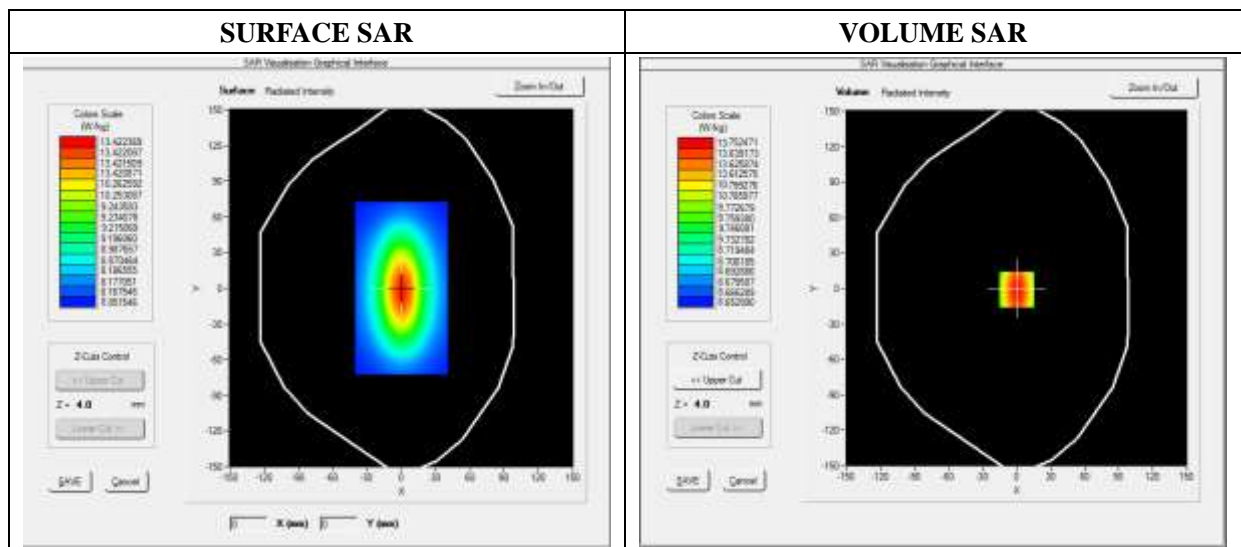


Maximum location: X=0.00, Y=0.00


SAR 10g (W/Kg)	6.352122
SAR 1g (W/Kg)	13.462010

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	12.1355	10.3301	8.4512	6.4365	5.6123	3.5621

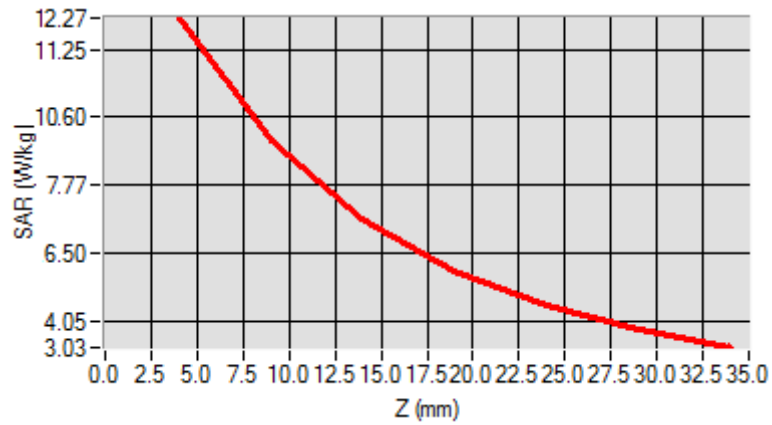

3D screen shot

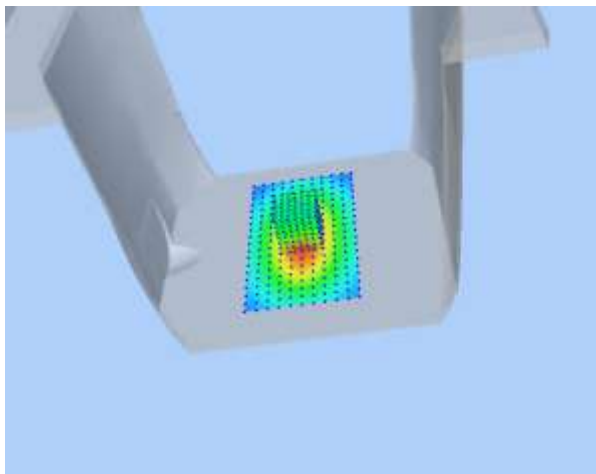

Hot spot position

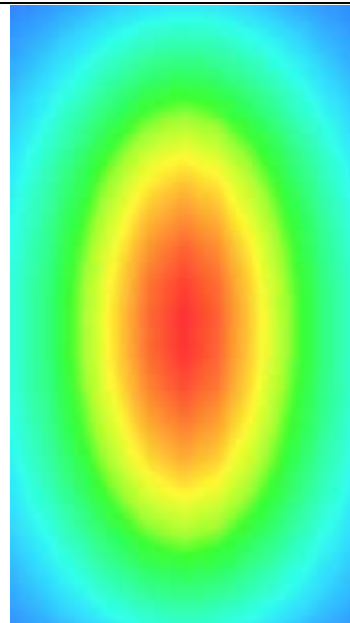

MEASUREMENT 4

For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/27/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 08/16 EPGO298; ConvF: 2.28; Calibrated: 2017/09/18

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative Permittivity (real part)	35.612911
Conductivity (S/m)	4.871483
Power Variation (%)	0.943782
Ambient Temperature	21.1
Liquid Temperature	21.2

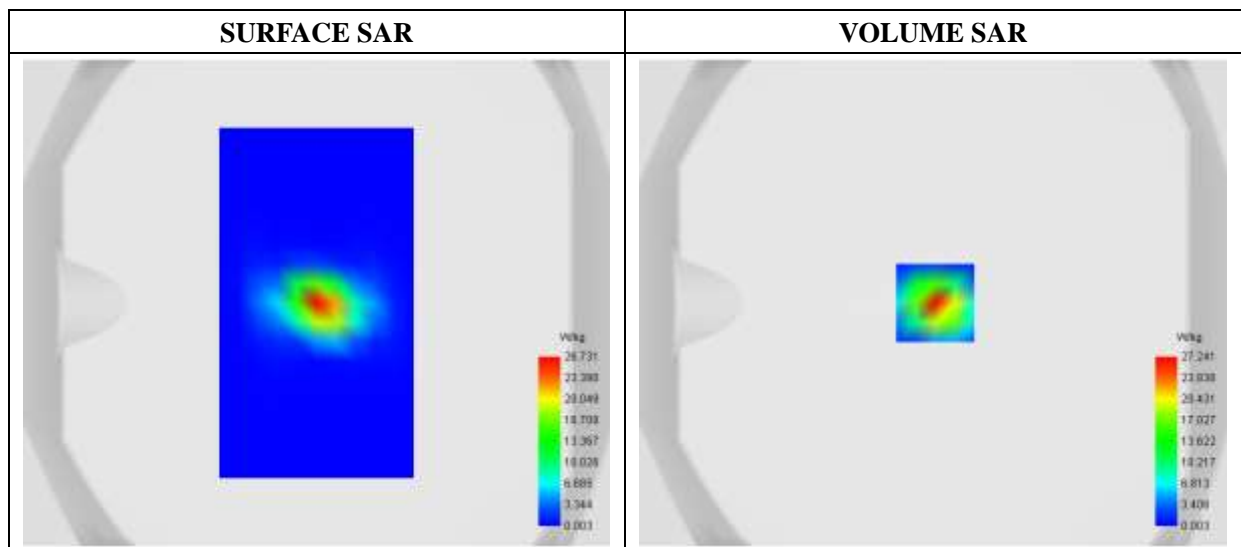

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	5.310334
SAR 1g (W/Kg)	16.946226

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	41.7264	27.2408	6.5746	1.6234	0.3765	0.0793	0.0129

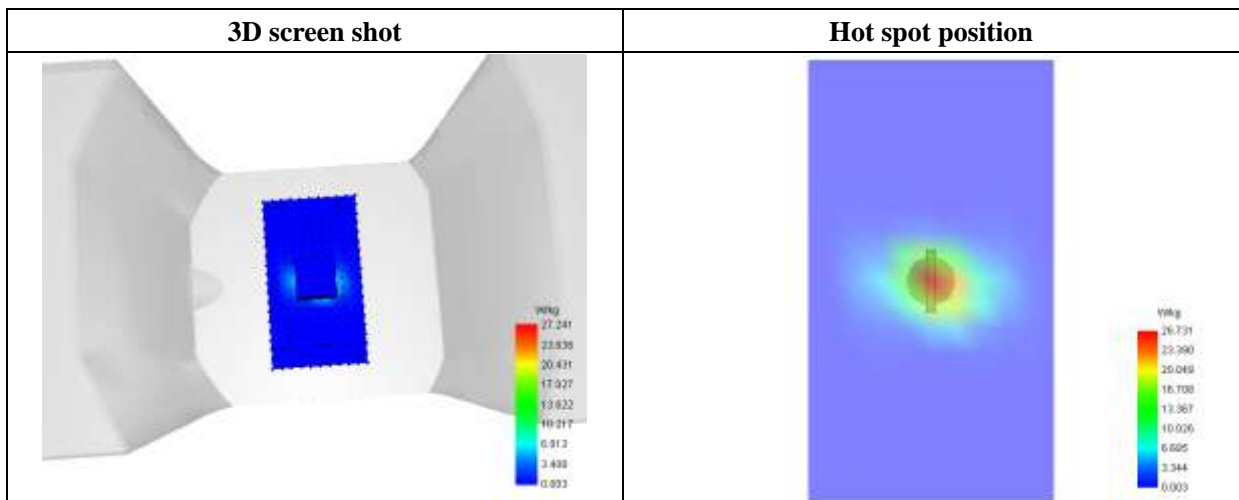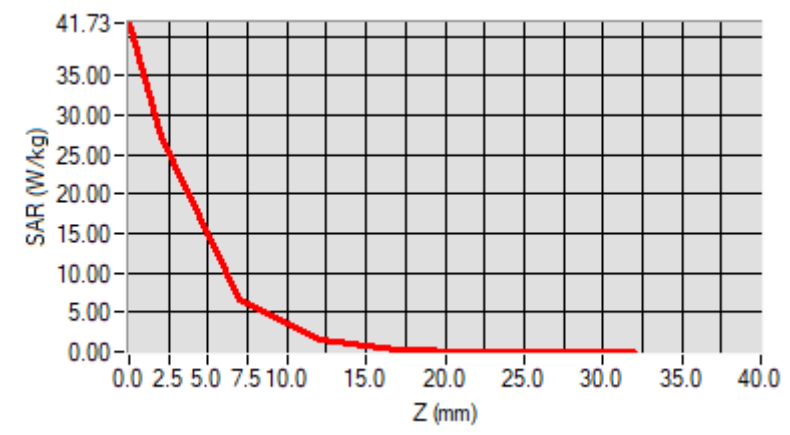

MEASUREMENT 5

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/23/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

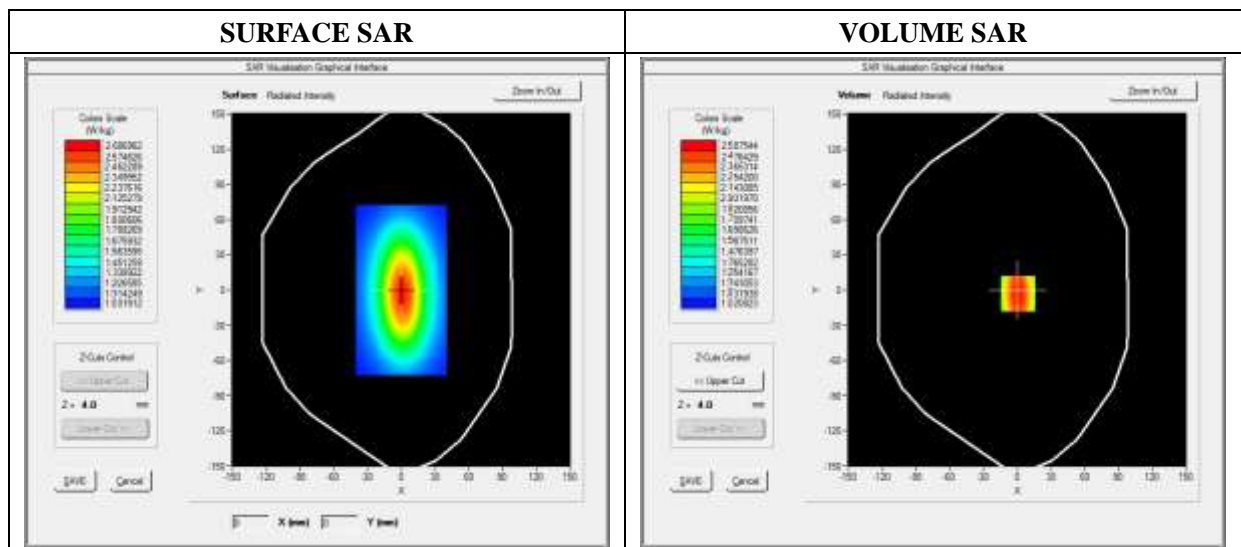




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.028956
SAR 1g (W/Kg)	2.364211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5789	1.1300	0.8795	0.5940	0.5011	0.5100

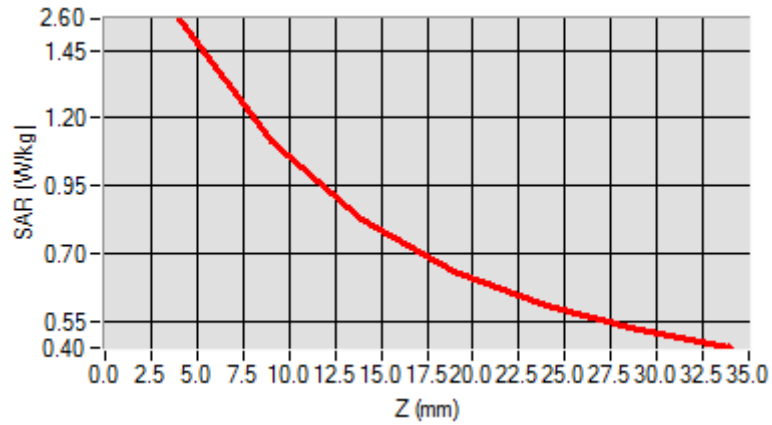

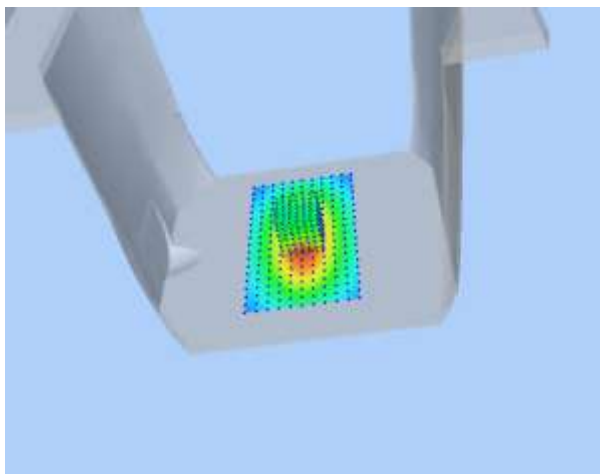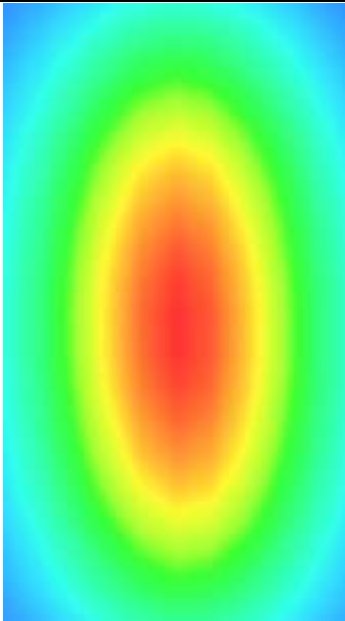3D screen shot	Hot spot position
	

MEASUREMENT 6

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/23/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.41; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW900
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	900.000000
Relative Permittivity (real part)	55.064510
Conductivity (S/m)	1.022000
Power Variation (%)	0.847932
Ambient Temperature	21.1
Liquid Temperature	21.3

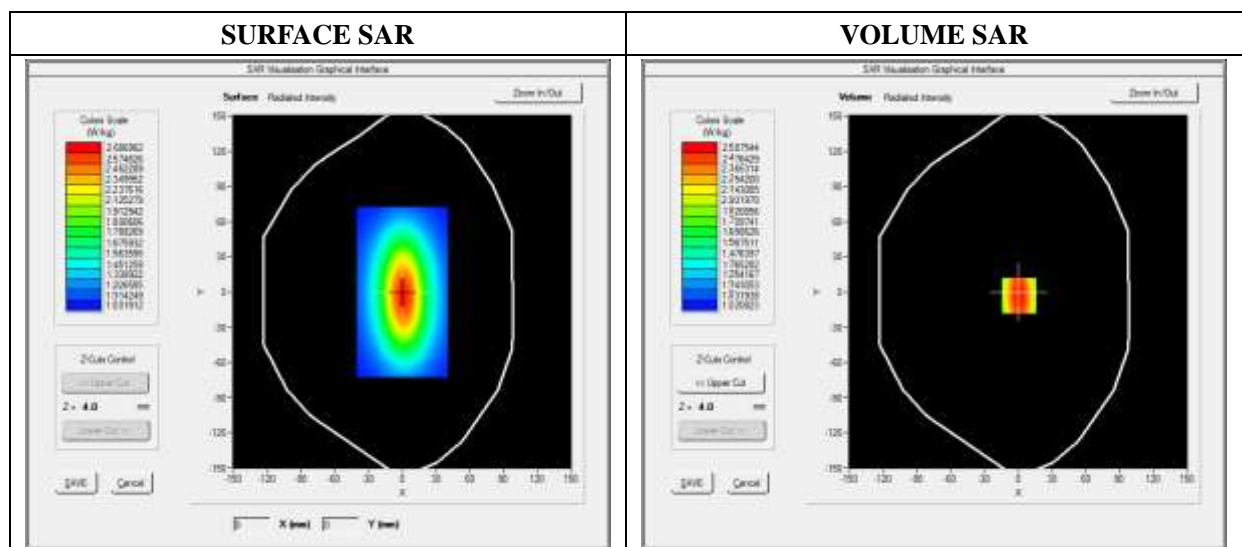




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.662100
SAR 1g (W/Kg)	2.782531

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5989	1.6985	1.1642	0.8322	0.5521	0.4025

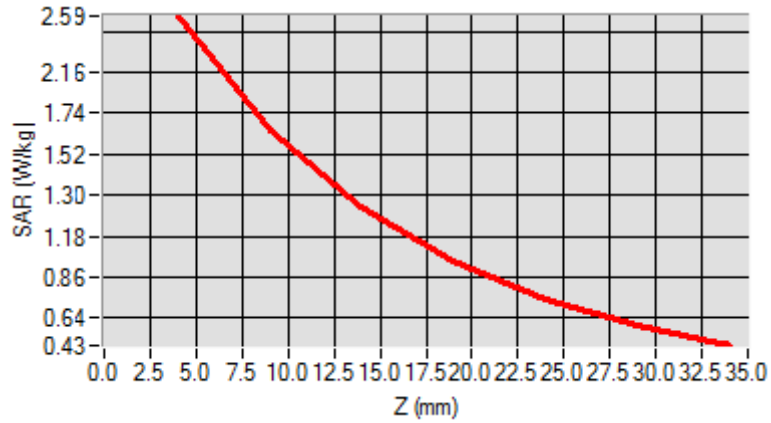

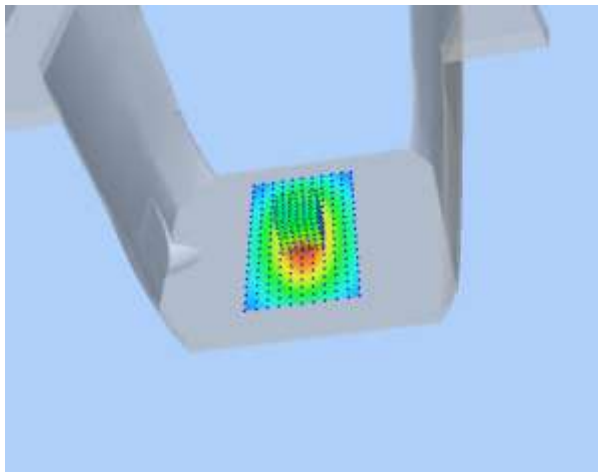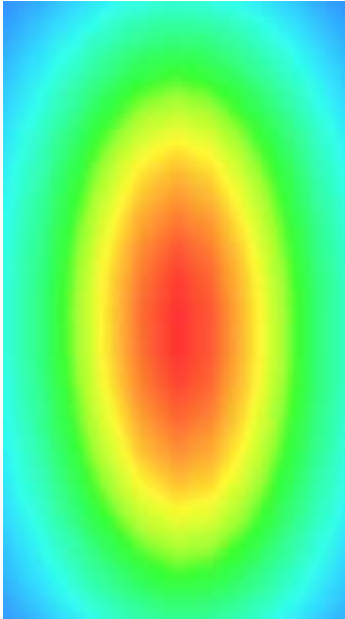3D screen shot	Hot spot position
	

MEASUREMENT 7

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/26/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.541872
Ambient Temperature	21.1
Liquid Temperature	21.3

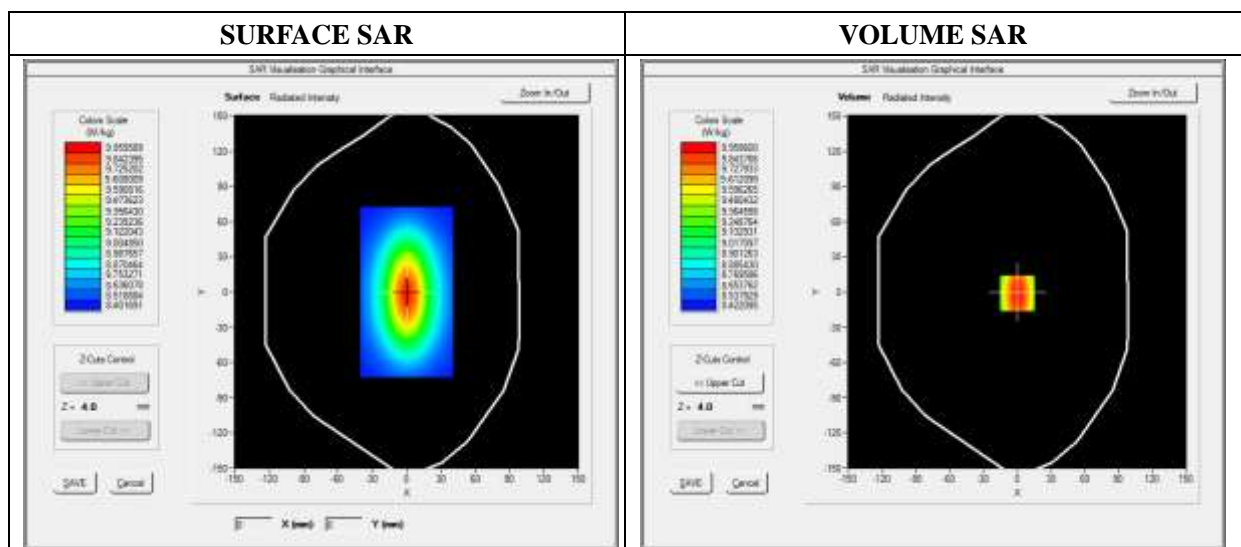


Maximum location: X=0.00, Y=0.00


SAR 10g (W/Kg)	5.134651
SAR 1g (W/Kg)	9.801550

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2031	6.43001	4.9011	4.5325	3.1201	2.5024

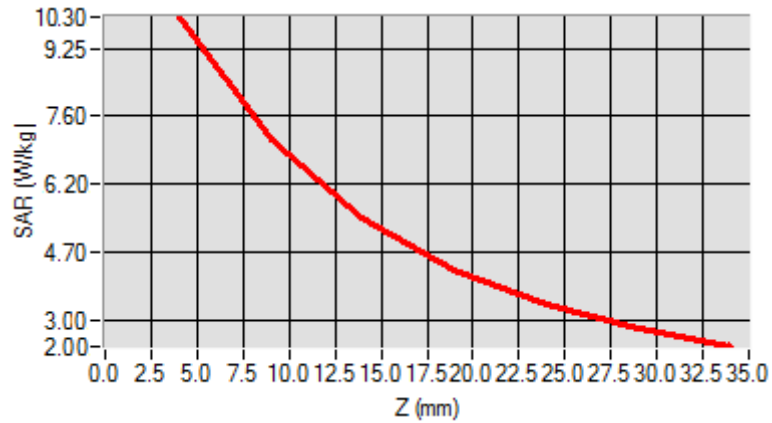

3D screen shot

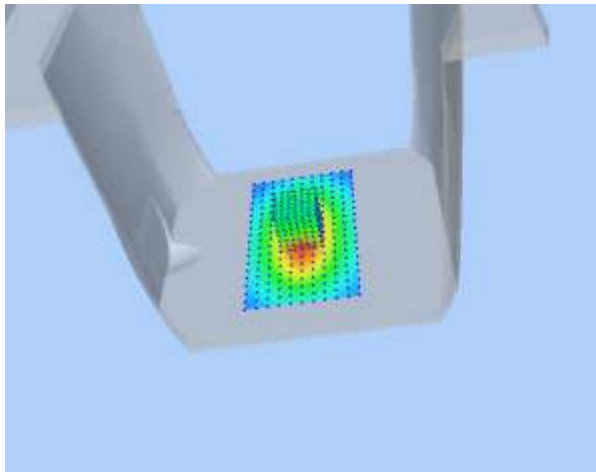

Hot spot position

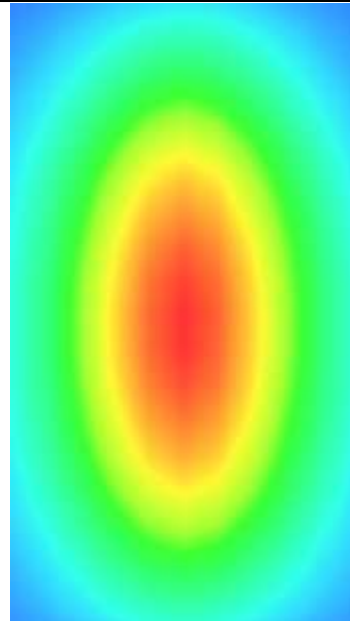

MEASUREMENT 8

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/27/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2


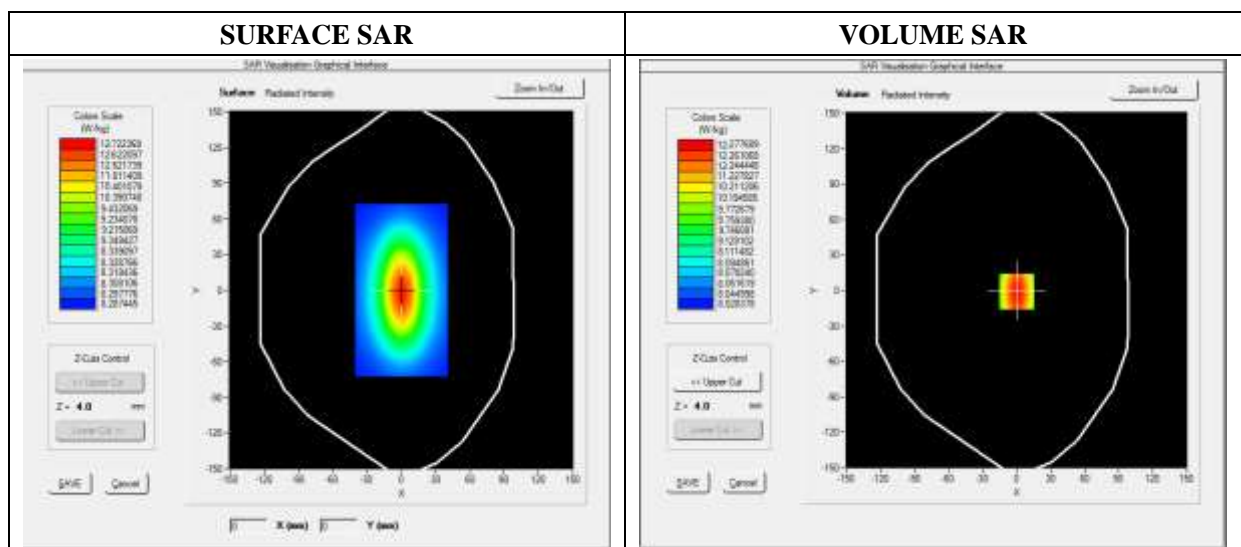


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	6.351512
SAR 1g (W/Kg)	12.600533

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	12.1631	10.01221	9.2566	8.5623	6.3469	4.5626

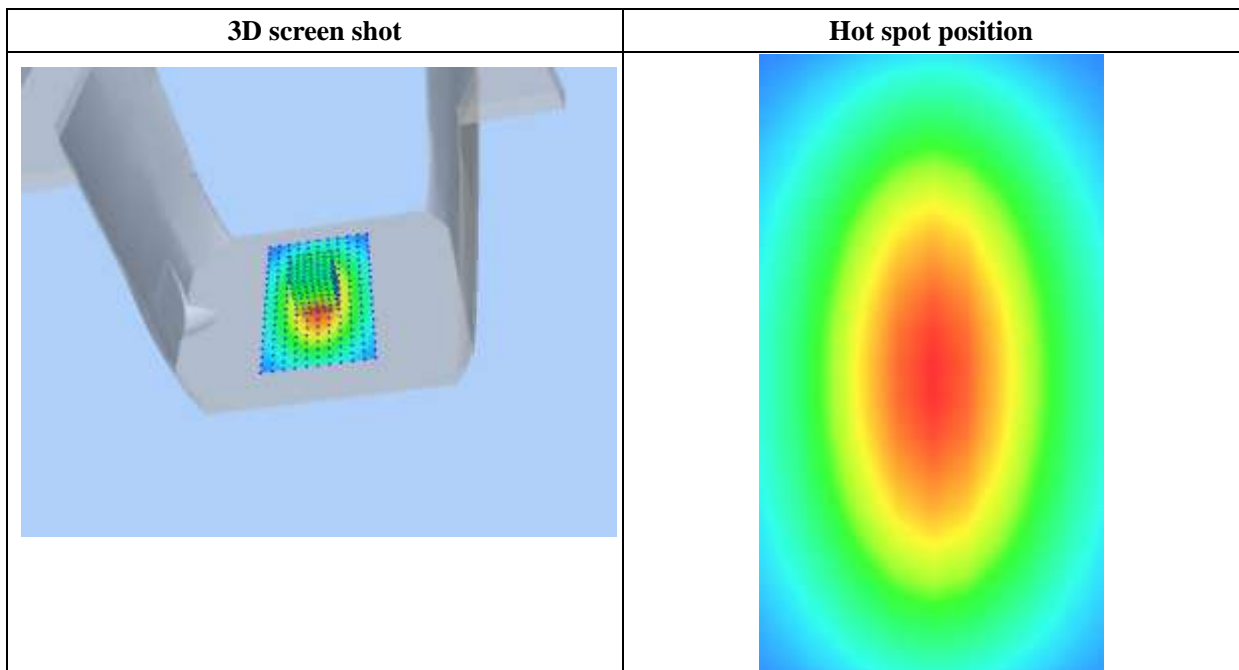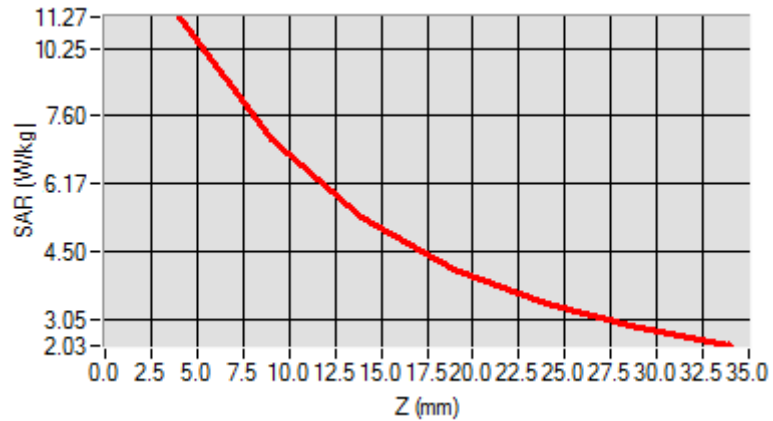

MEASUREMENT 9

For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 03/27/2018

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 08/16 EPGO298; ConvF:2.39; Calibrated: 2017/09/18

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative Permittivity (real part)	48.501939
Conductivity (S/m)	5.161487
Power Variation (%)	0.749201
Ambient Temperature	21.1
Liquid Temperature	21.2

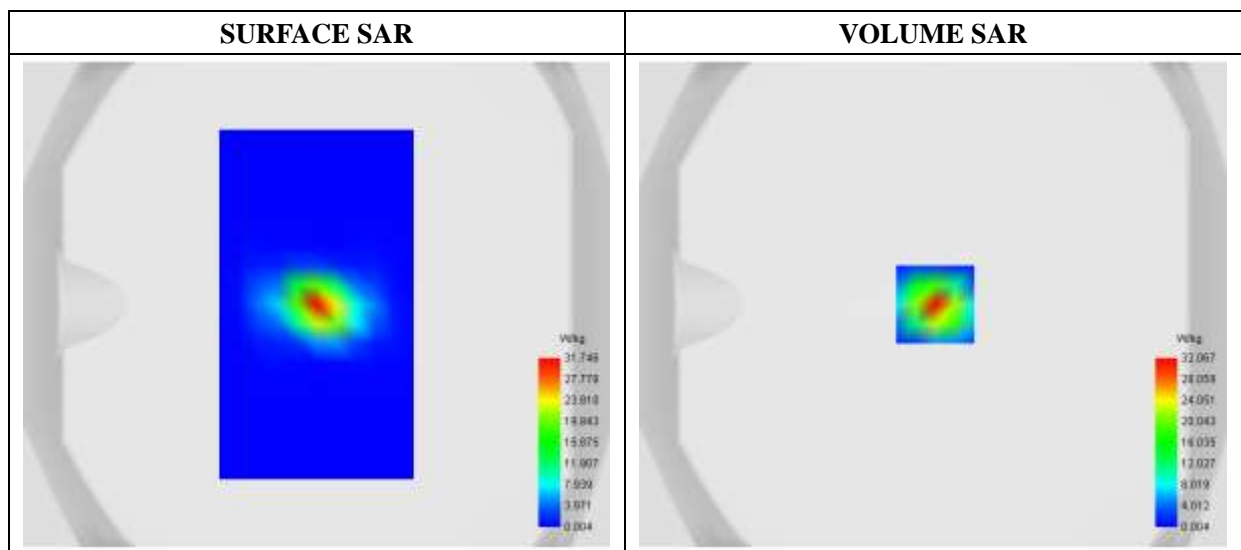

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	6.047588
SAR 1g (W/Kg)	16.681175

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	49.8193	32.0669	7.0244	1.5969	0.3410	0.0635	0.0070

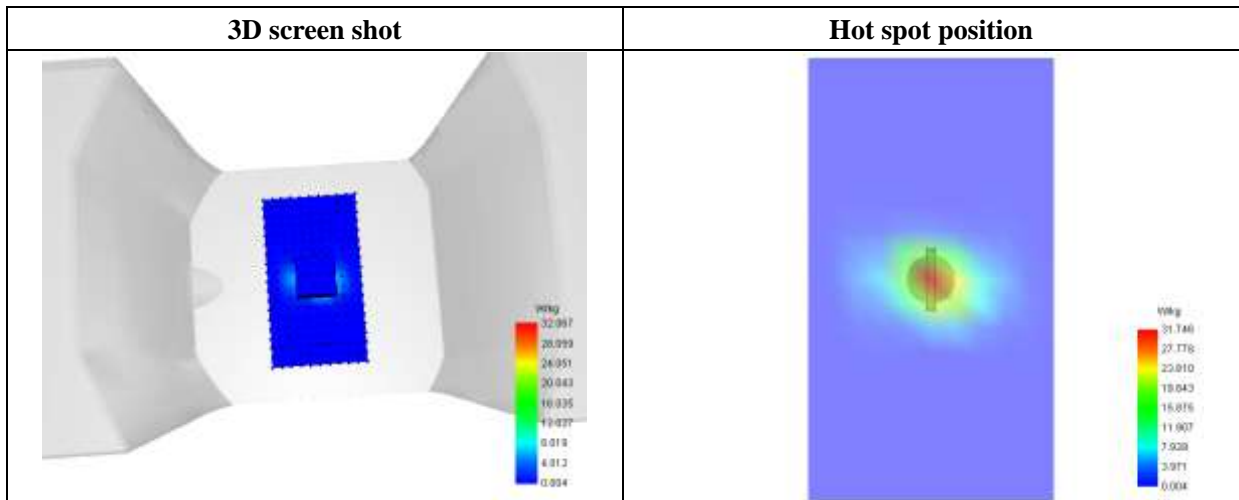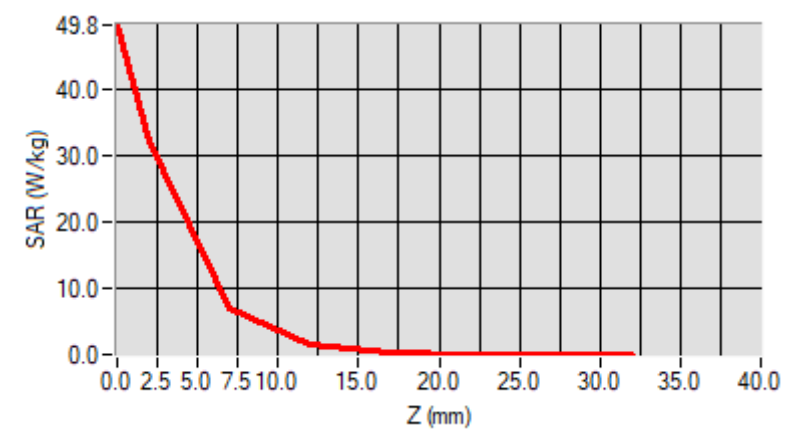

Annex B. Plots of SAR Measurement

<u>TYPE</u>	<u>BAND</u>	<u>PARAMETERS</u>
PDA	GSM850	<u>Measurement 1:</u> Right Head with Cheek device position on High Channel in GSM mode
PDA	GSM1900	<u>Measurement 7:</u> Right Head with Cheek device position on Low Channel in GSM mode
PDA	GPRS850_2TX	<u>Measurement 11:</u> Right Head with Cheek device position on Low Channel in GPRS mode
PDA	GPRS1900_2TX	<u>Measurement 15:</u> Right Head with Cheek device position on Low Channel in GPRS mode
PDA	WCDMA850_RMC	<u>Measurement 19:</u> Right Head with Cheek device position on High Channel in WCDMA mode
PDA	WCDMA1900_RMC	<u>Measurement 25:</u> Right Head with Cheek device position on High Channel in WCDMA mode
PDA	WiFi_802.11b	<u>Measurement 29:</u> Right Head with Cheek device position on Middle Channel in 802.11b mode
PDA	WiFi_802.11a	<u>Measurement 35:</u> Left Head with Cheek device position on Middle Channel in 802.11a mode
PDA	GPRS850_2TX	<u>Measurement 37:</u> Flat Plane with Front device position on Low Channel in GPRS mode
PDA	GPRS1900_2TX	<u>Measurement 40:</u> Flat Plane with Front device position on Low Channel in GPRS mode
PDA	WCDMA850_RMC	<u>Measurement 44:</u> Flat Plane with Top device position on High Channel in WCDMA mode
PDA	WCDMA1900_RMC	<u>Measurement 47:</u> Flat Plane with Top device position on High Channel in WCDMA mode
PDA	WiFi_802.11b	<u>Measurement 49:</u> Flat Plane with Back side device position on Middle Channel in 802.11b mode
PDA	WiFi_802.11a	<u>Measurement 53:</u> Flat Plane with Back side device position on Middle Channel in 802.11a mode
PDA	RF ID	<u>Measurement 57:</u> Flat Plane with Front side device position on High Channel

Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 03/23/2018

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	848.800000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.956700
Ambient Temperature	21.1
Liquid Temperature	21.3

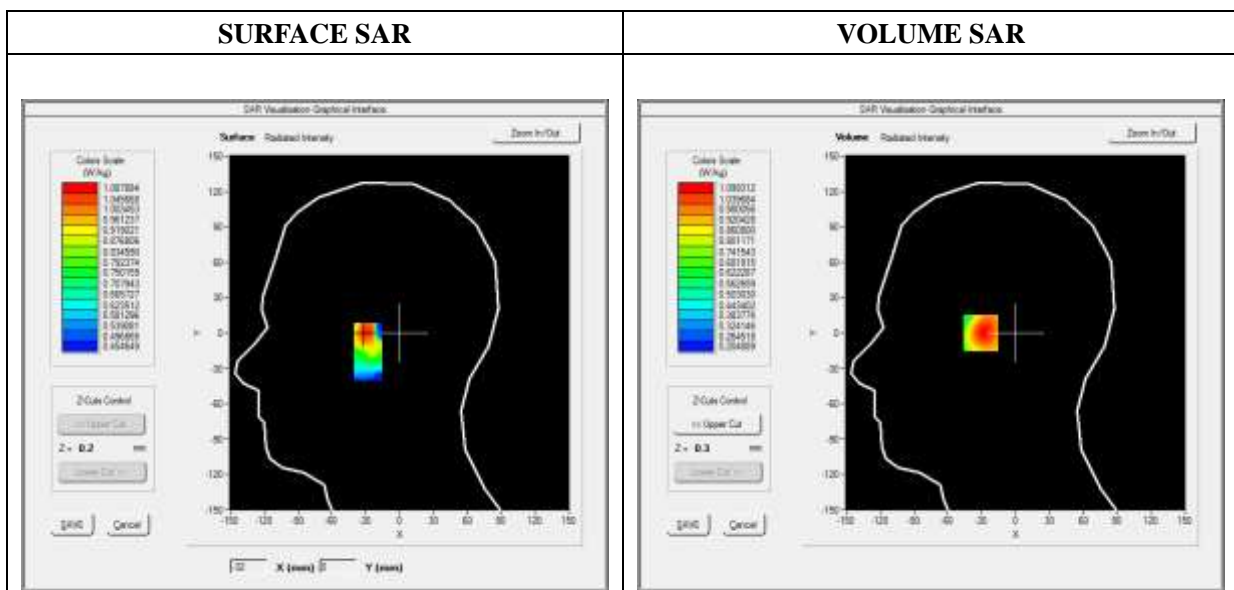




Maximum location: X=-30.00, Y=1.00

SAR Peak: 1.51 W/kg

SAR 10g (W/Kg)	0.755007
SAR 1g (W/Kg)	0.956998

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8229	1.0993	0.7248	0.5720	0.4568

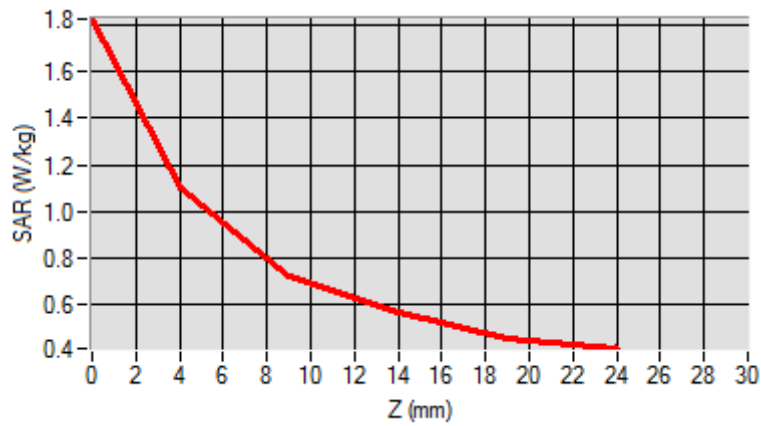

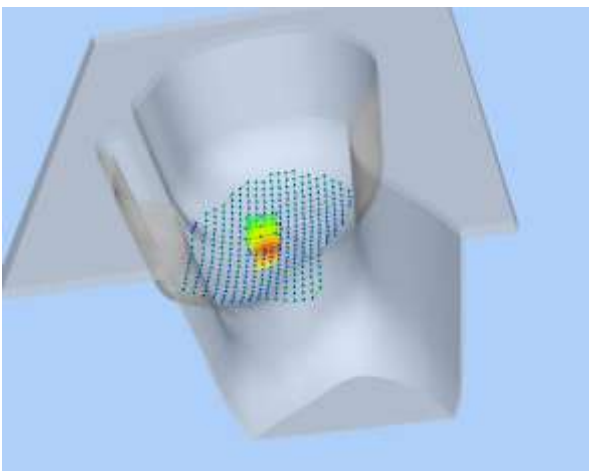3D screen shot	Hot spot position
	

MEASUREMENT 7

Type: Phone measurement (Complete)

Date of measurement: 03/26/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.869568
Ambient Temperature	21.1
Liquid Temperature	21.3

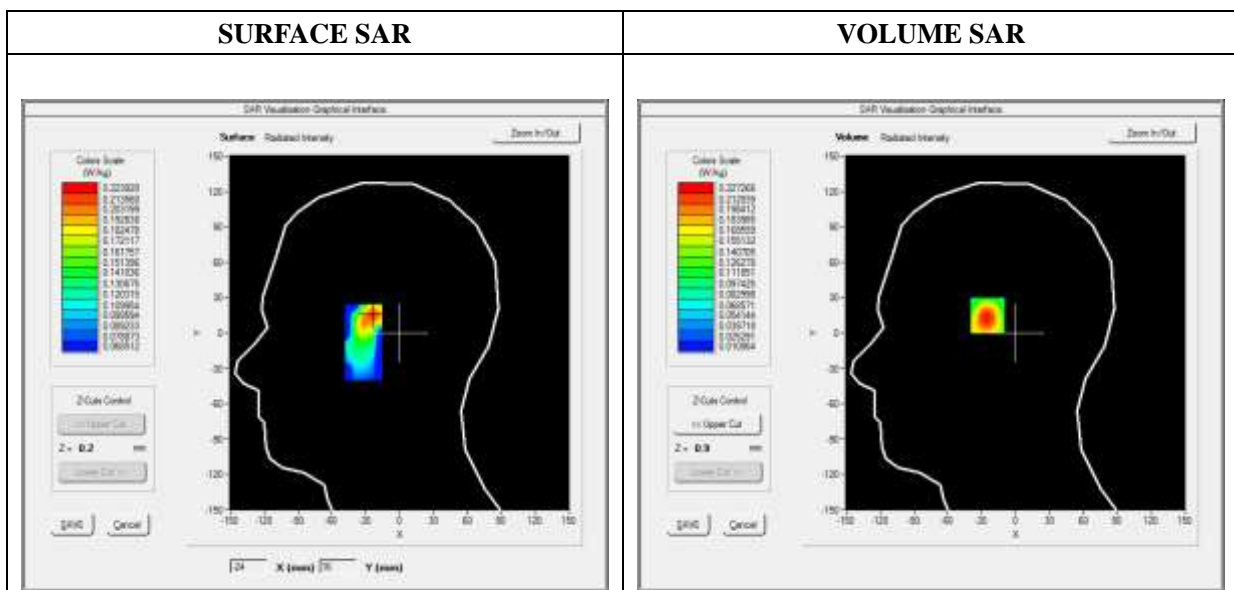




Maximum location: X=-24.00, Y=16.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.118866
SAR 1g (W/Kg)	0.211171

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3509	0.2273	0.1290	0.0737	0.0437

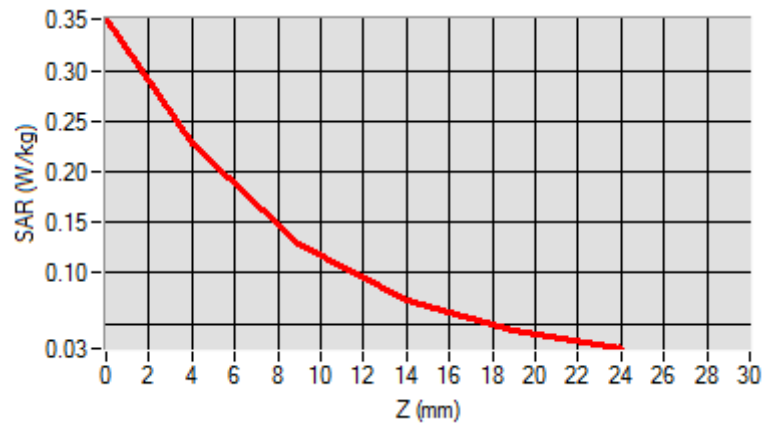

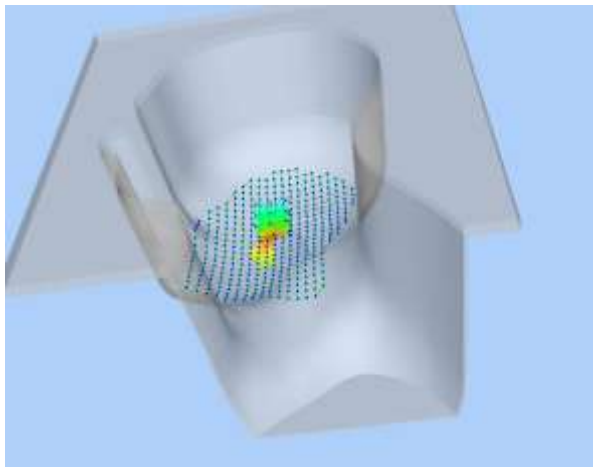3D screen shot	Hot spot position
	

MEASUREMENT 11

Type: Phone measurement (Complete)

Date of measurement: 03/23/2018

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GPRS850_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results


Frequency (MHz)	824.200000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.903833
Ambient Temperature	21.1
Liquid Temperature	21.3

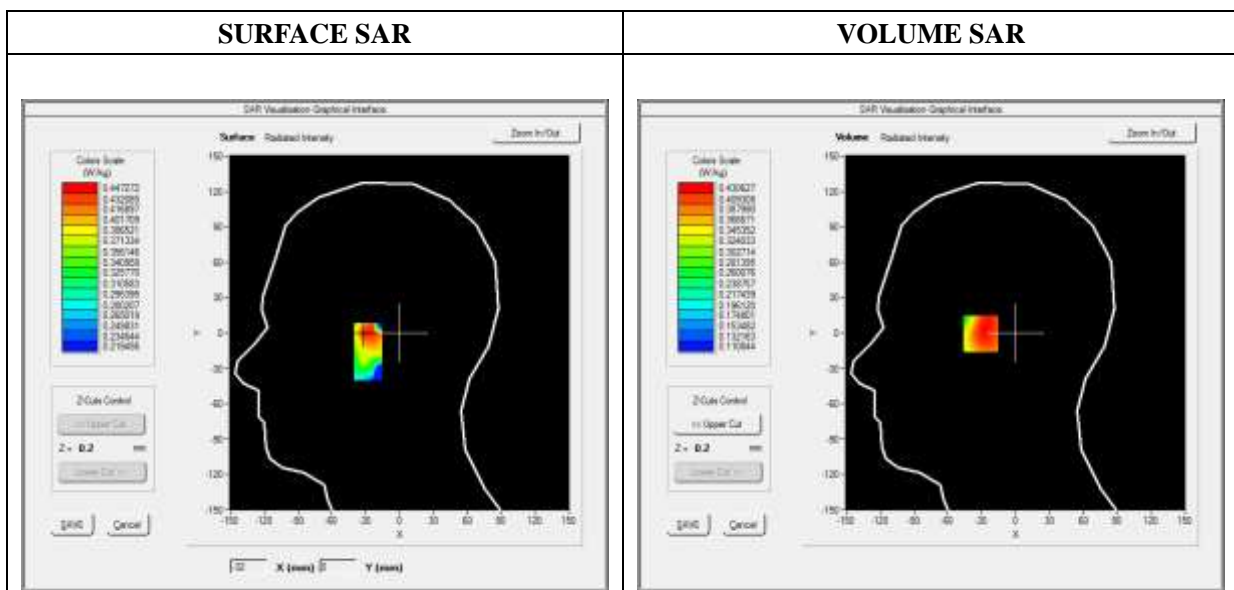



Maximum location: X=-30.00, Y=0.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.338047
SAR 1g (W/Kg)	0.425236

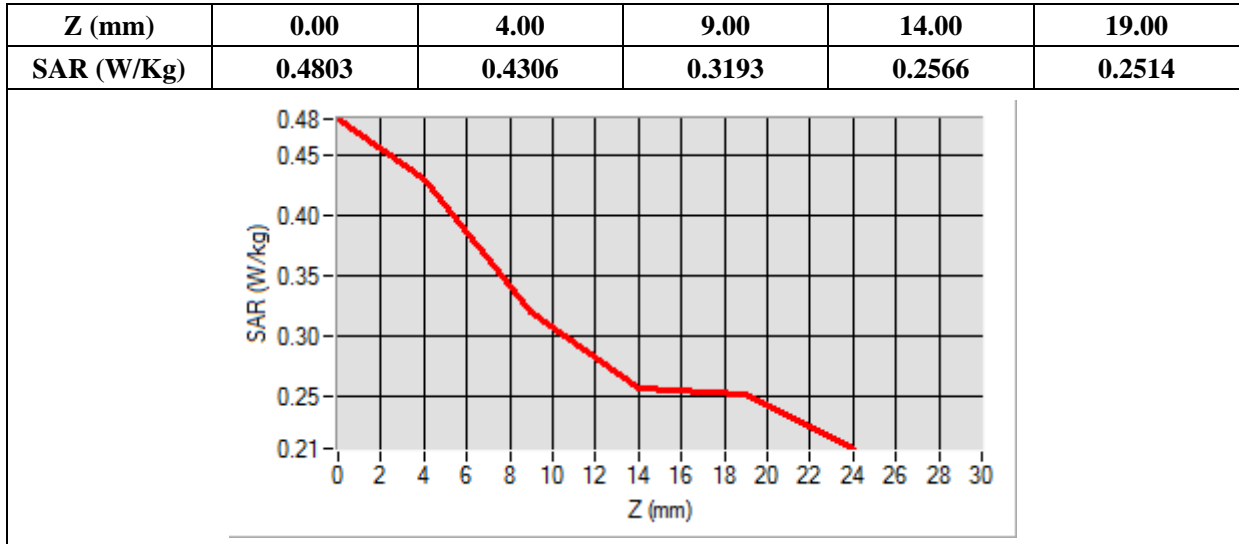

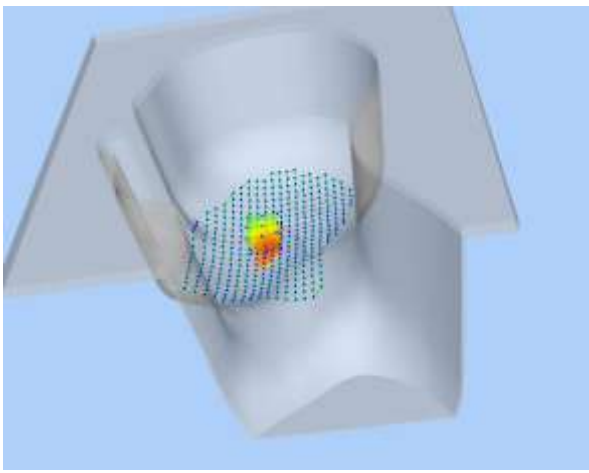3D screen shot	Hot spot position
	

MEASUREMENT 15

Type: Phone measurement (Complete)

Date of measurement: 03/26/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GPRS1900_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.536272
Ambient Temperature	21.1
Liquid Temperature	21.3

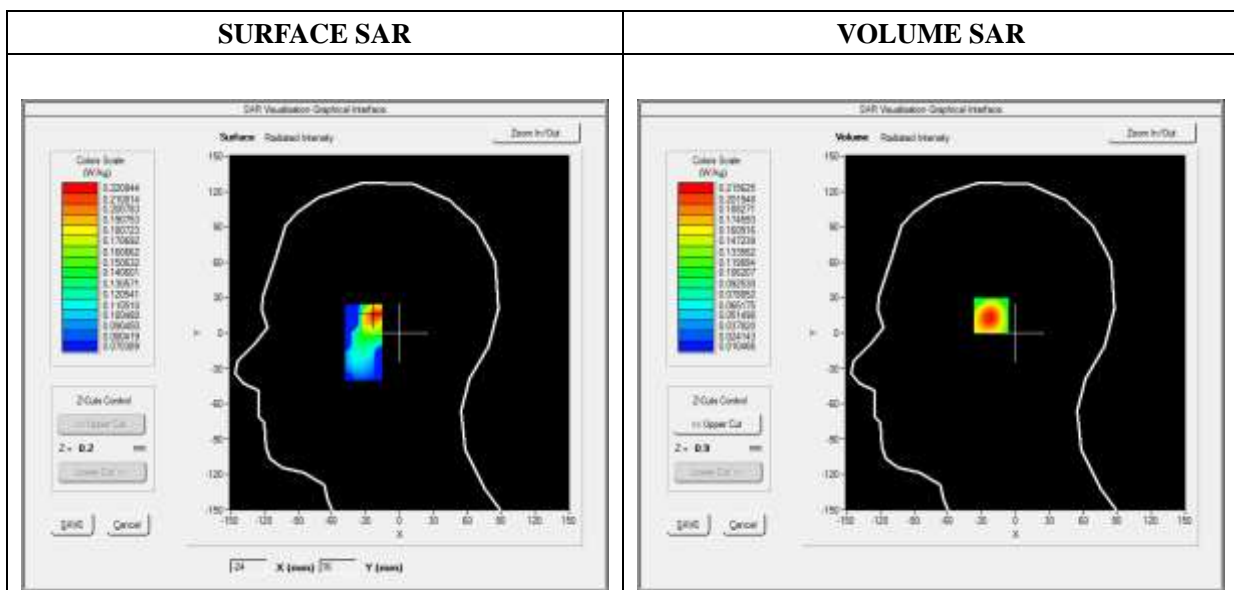




Maximum location: X=-21.00, Y=16.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.114012
SAR 1g (W/Kg)	0.200241

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3213	0.2156	0.1275	0.0743	0.0431

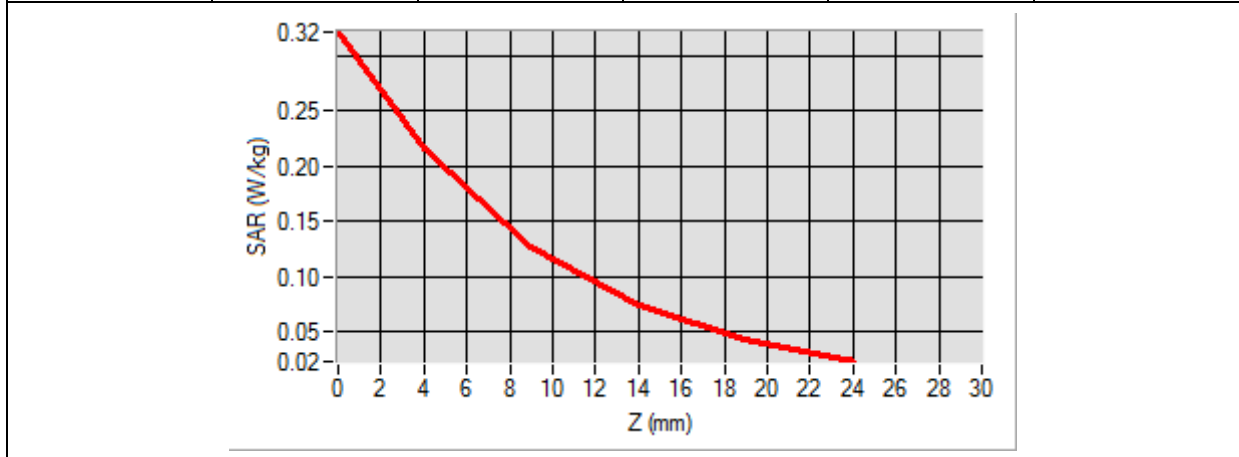

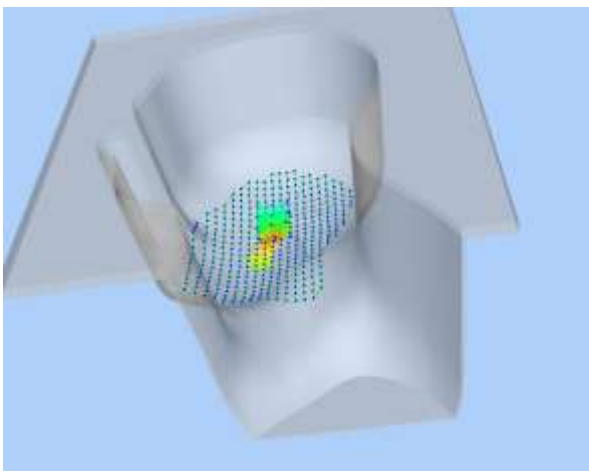3D screen shot	Hot spot position
	

MEASUREMENT 19

Type: Phone measurement (Complete)

Date of measurement: 03/23/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.753989
Ambient Temperature	21.1
Liquid Temperature	21.3

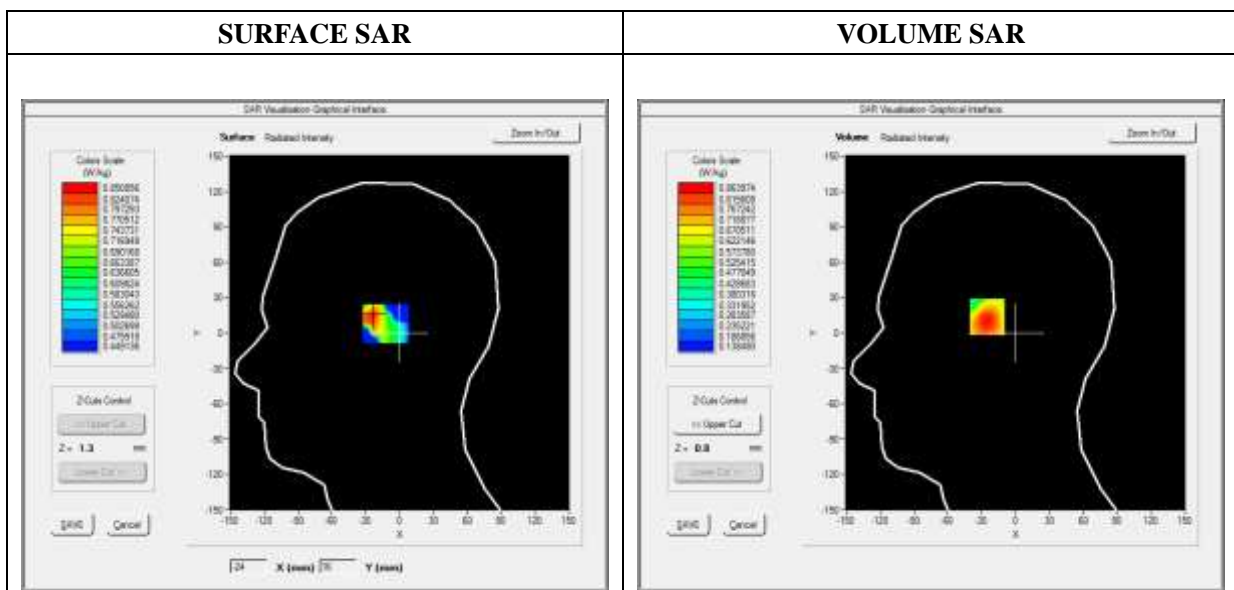




Maximum location: X=-25.00, Y=15.00

SAR Peak: 1.20 W/kg

SAR 10g (W/Kg)	0.571710
SAR 1g (W/Kg)	0.824860

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8322	0.8640	0.5296	0.4386	0.2928

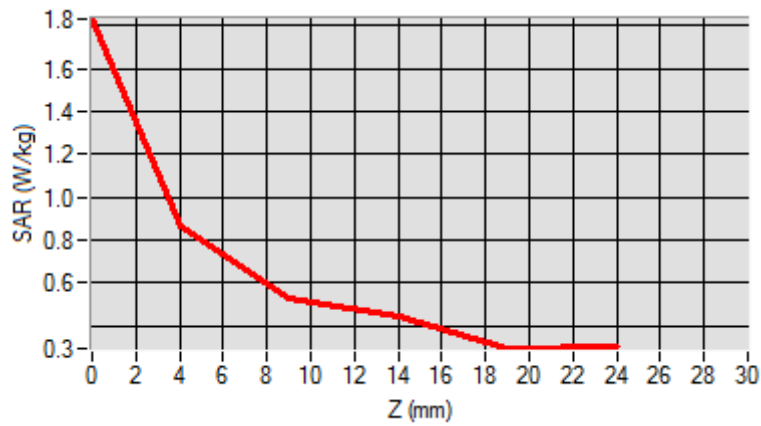

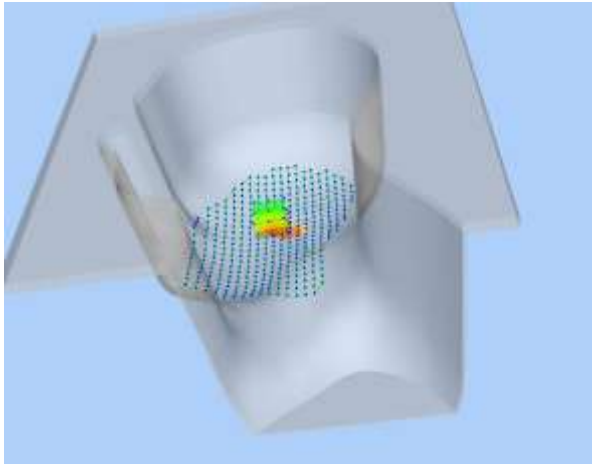3D screen shot	Hot spot position
	

MEASUREMENT 25

Type: Phone measurement (Complete)

Date of measurement: 03/26/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.546537
Ambient Temperature	21.1
Liquid Temperature	21.3

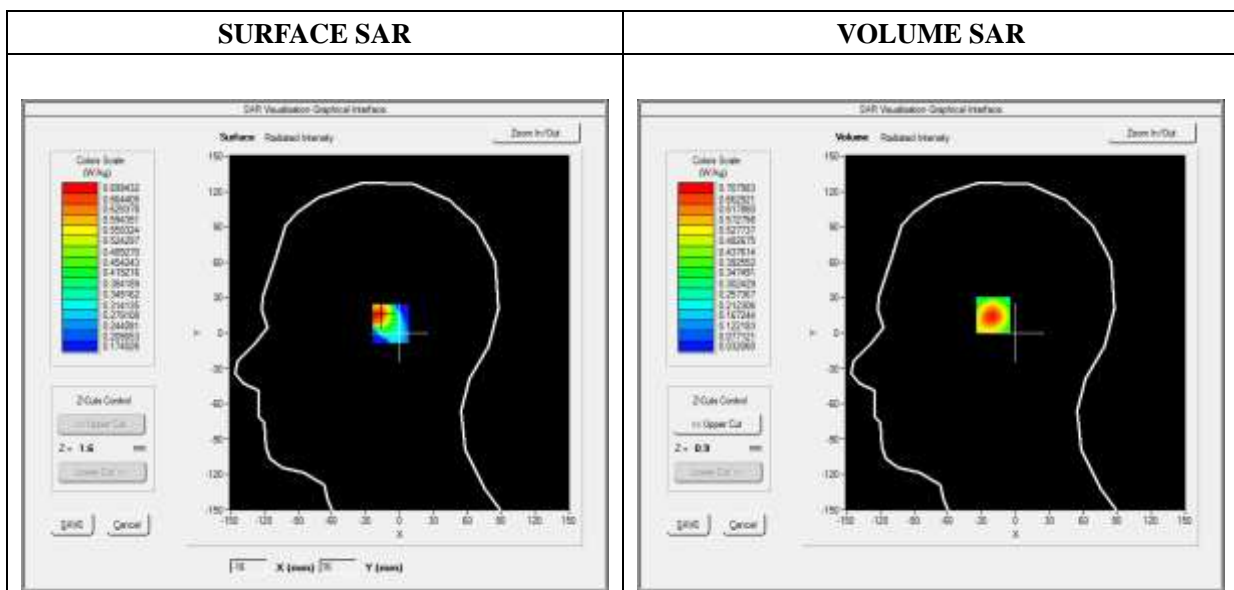




Maximum location: X=-19.00, Y=16.00

SAR Peak: 1.09 W/kg

SAR 10g (W/Kg)	0.360685
SAR 1g (W/Kg)	0.654789

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0898	0.7080	0.4019	0.2272	0.1313

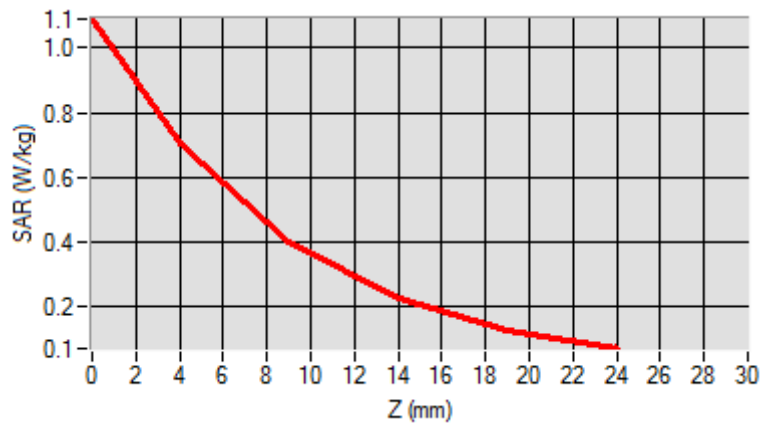

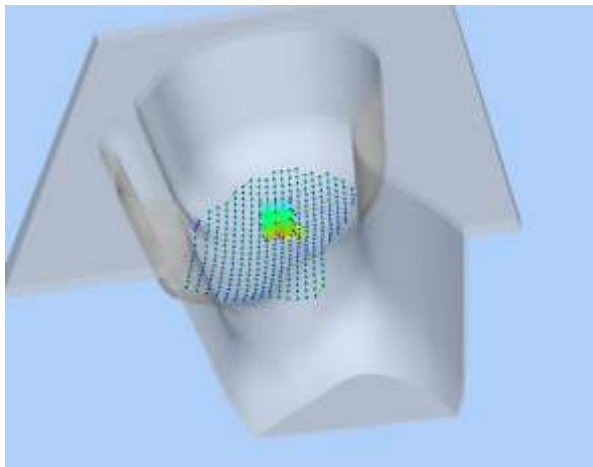3D screen shot	Hot spot position
	

MEASUREMENT 29

Type: Phone measurement (Complete)

Date of measurement: 03/27/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.867589
Ambient Temperature	21.1
Liquid Temperature	21.2

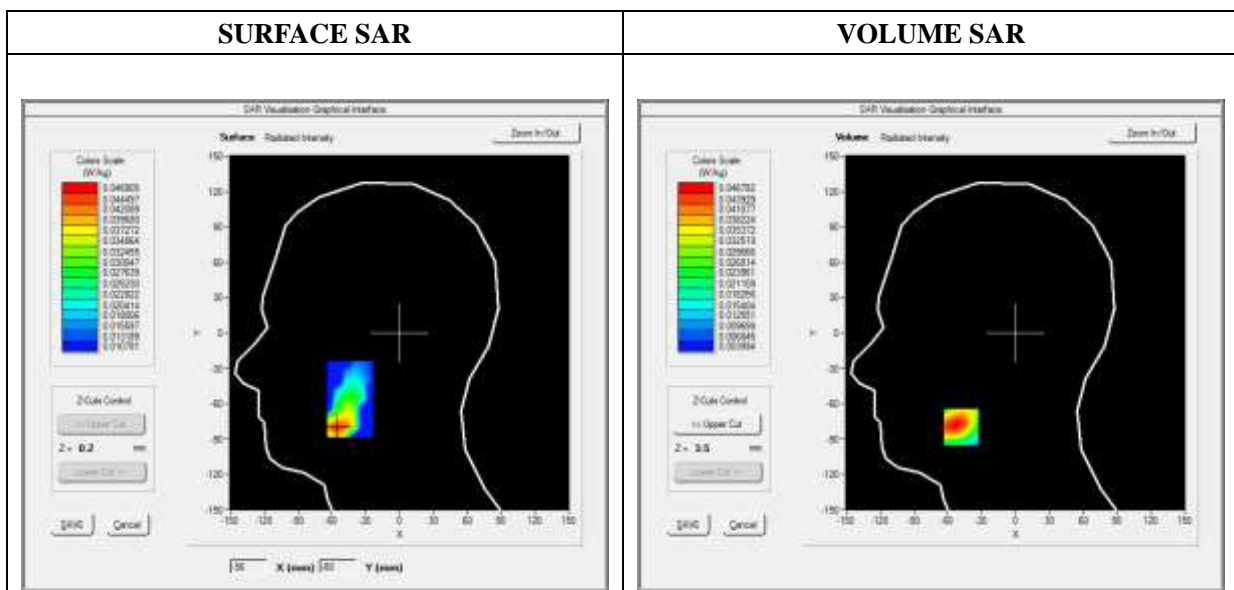




Maximum location: X=-48.00, Y=-80.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.024522
SAR 1g (W/Kg)	0.044631

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0965	0.0468	0.0222	0.0142	0.0091

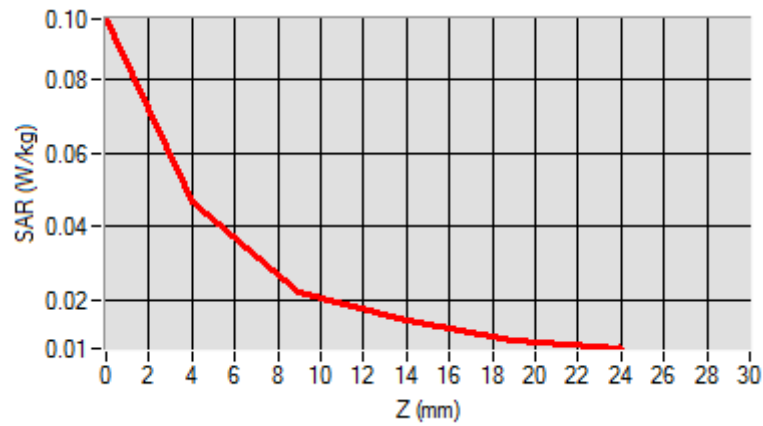

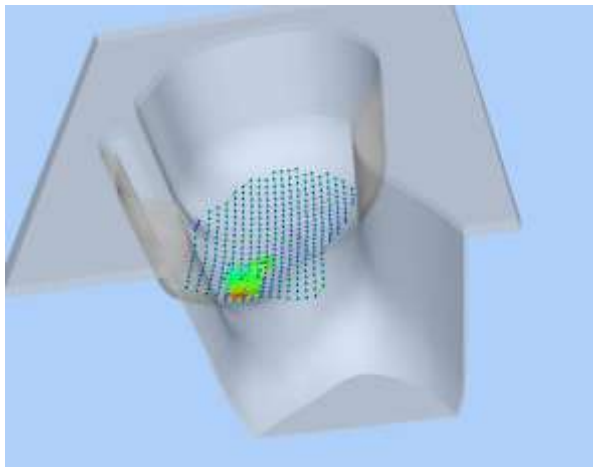3D screen shot	Hot spot position
	

MEASUREMENT 35

Type: Phone measurement (Complete)

Date of measurement: 03/27/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 08/16 EPGO298; ConvF: 2.28; Calibrated: 2017/09/18

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.2G)_802.11a
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative Permittivity (real part)	36.082911
Conductivity (S/m)	4.661483
Power Variation (%)	1.083921
Ambient Temperature	21.1
Liquid Temperature	21.2

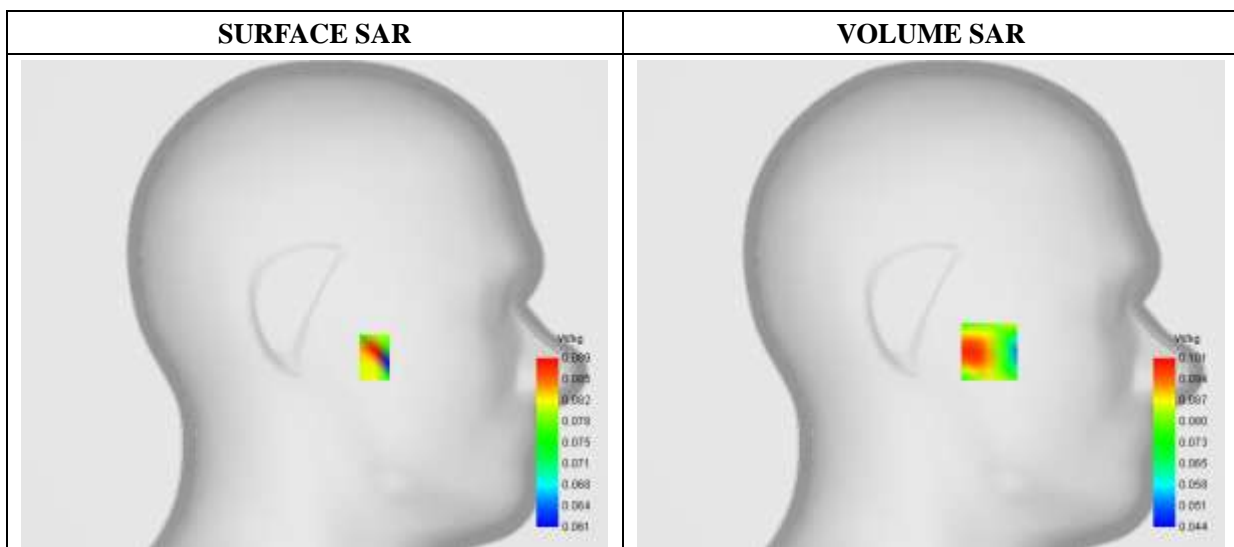

Maximum location: X=-31.00, Y=-25.00

SAR 10g (W/Kg)	0.082914
SAR 1g (W/Kg)	0.100180

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.1113	0.0989	0.0689	0.0589	0.0729

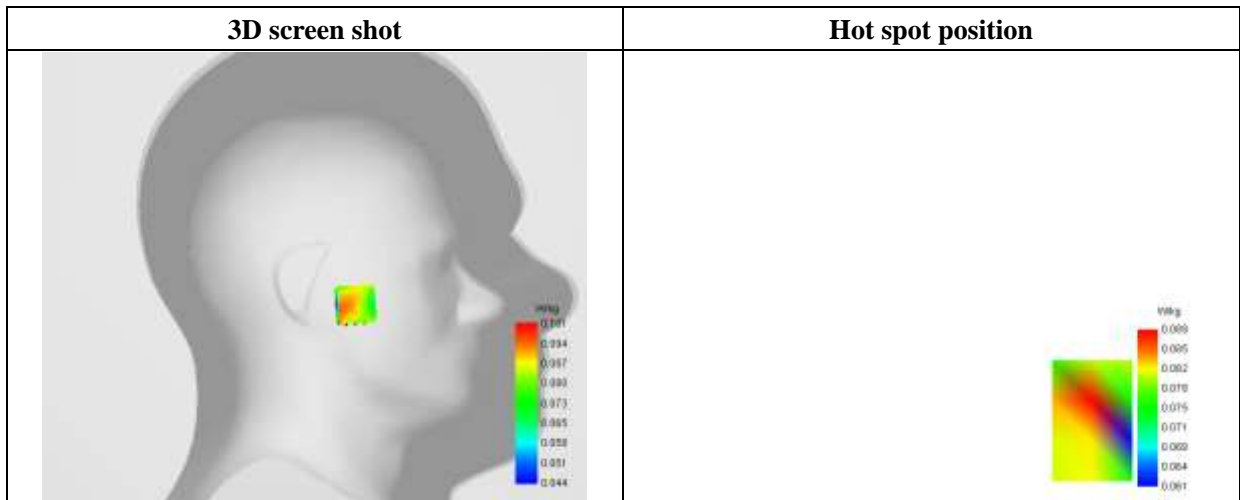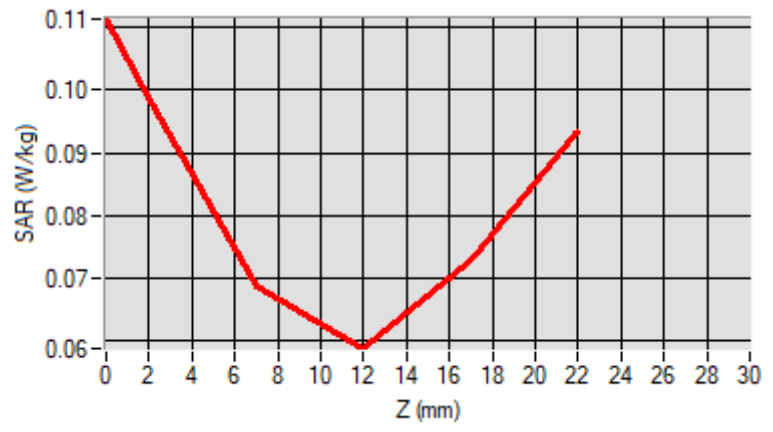

MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 03/23/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Front
Band	GPRS850_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.562472
Ambient Temperature	21.1
Liquid Temperature	21.3

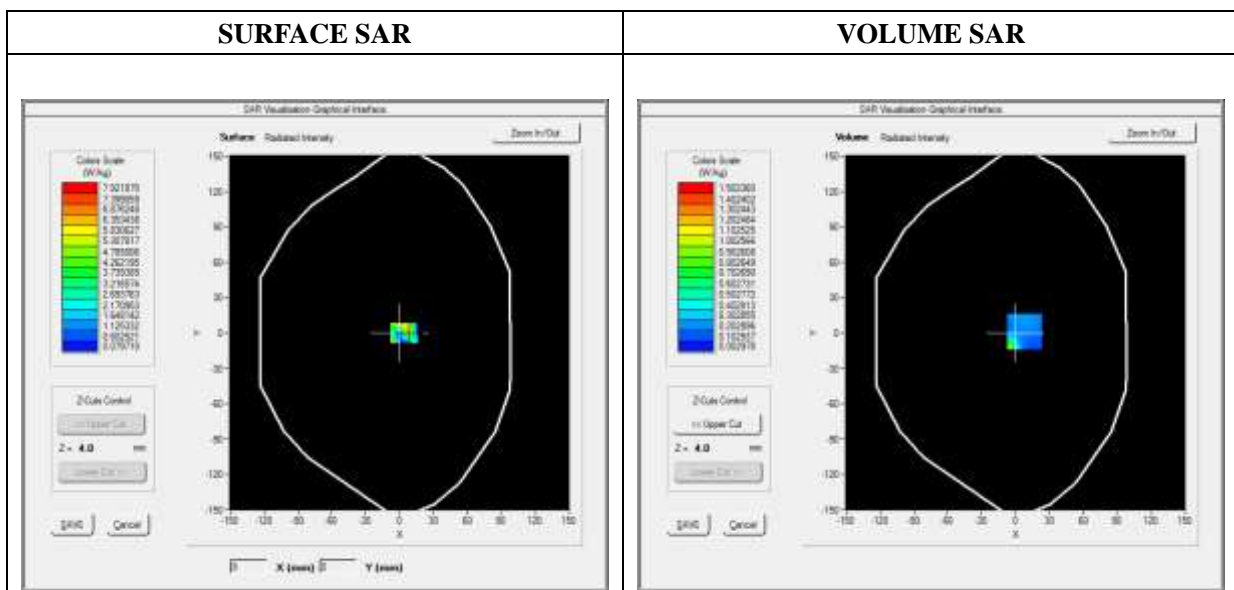




Maximum location: X=8.00, Y=1.00

SAR Peak: 5.14 W/kg

SAR 10g (W/Kg)	0.194038
SAR 1g (W/Kg)	0.532016

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	4.6542	1.5024	0.1276	0.0030	0.0879

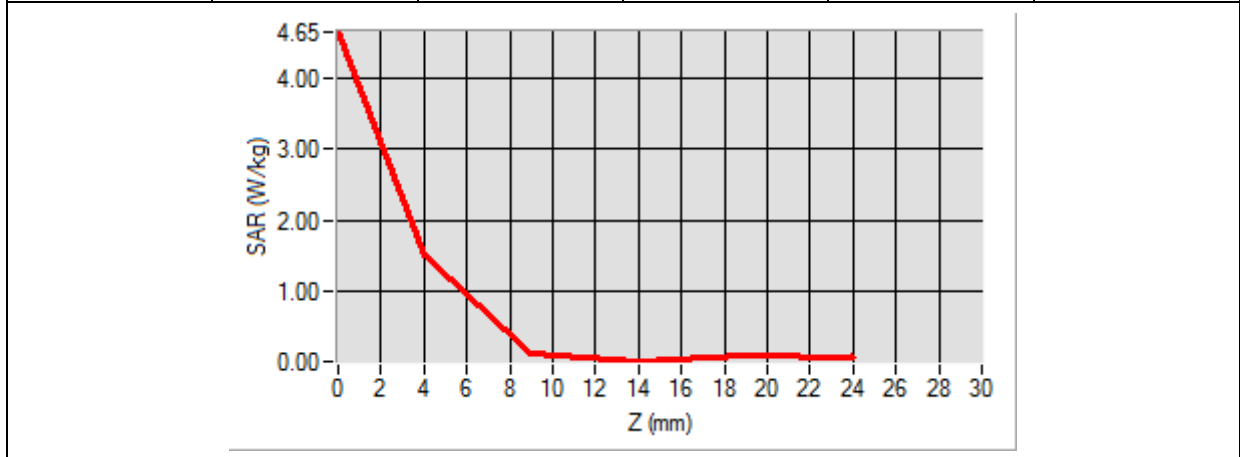

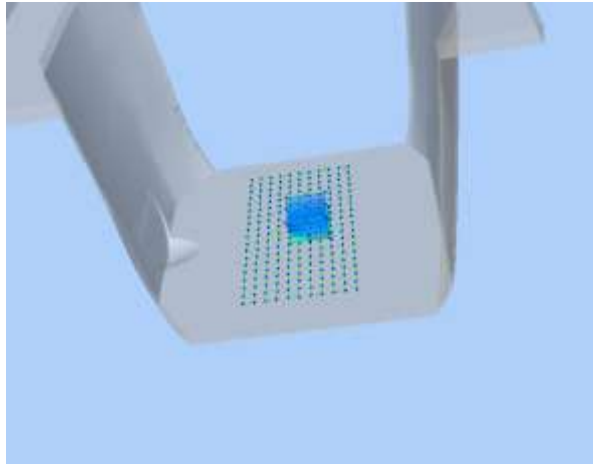3D screen shot	Hot spot position
	

MEASUREMENT 40

Type: Phone measurement (Complete)

Date of measurement: 03/26/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Front side
Band	GPRS1900_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.986340
Ambient Temperature	21.1
Liquid Temperature	21.3

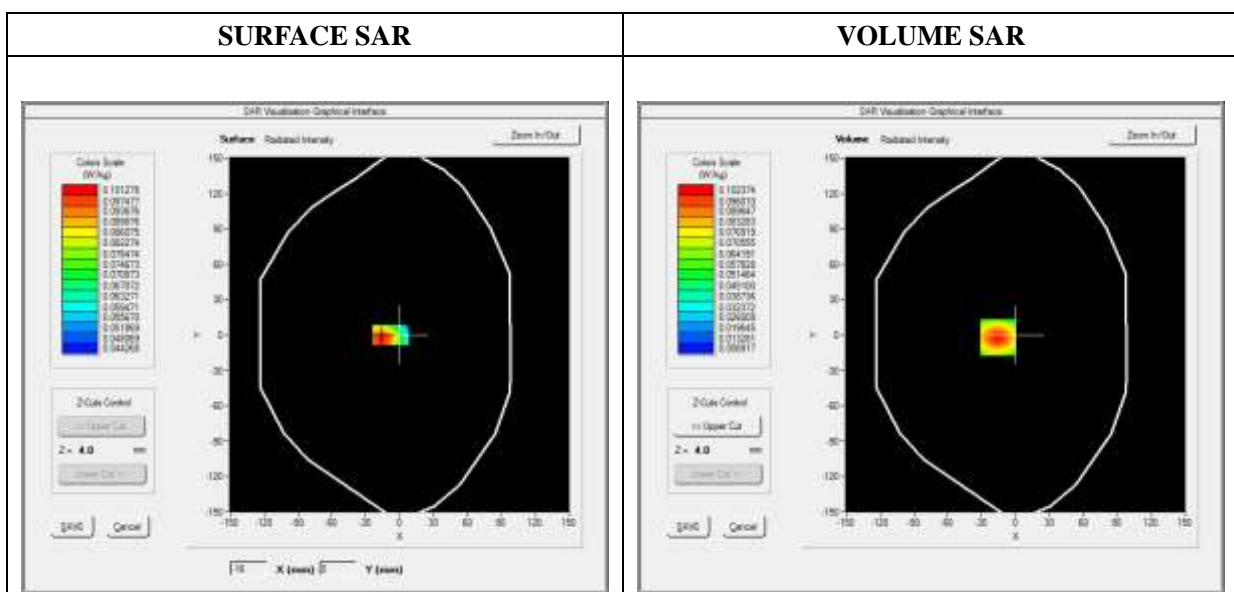




Maximum location: X=-16.00, Y=-2.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.055292
SAR 1g (W/Kg)	0.095021

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1508	0.1024	0.0615	0.0363	0.0213

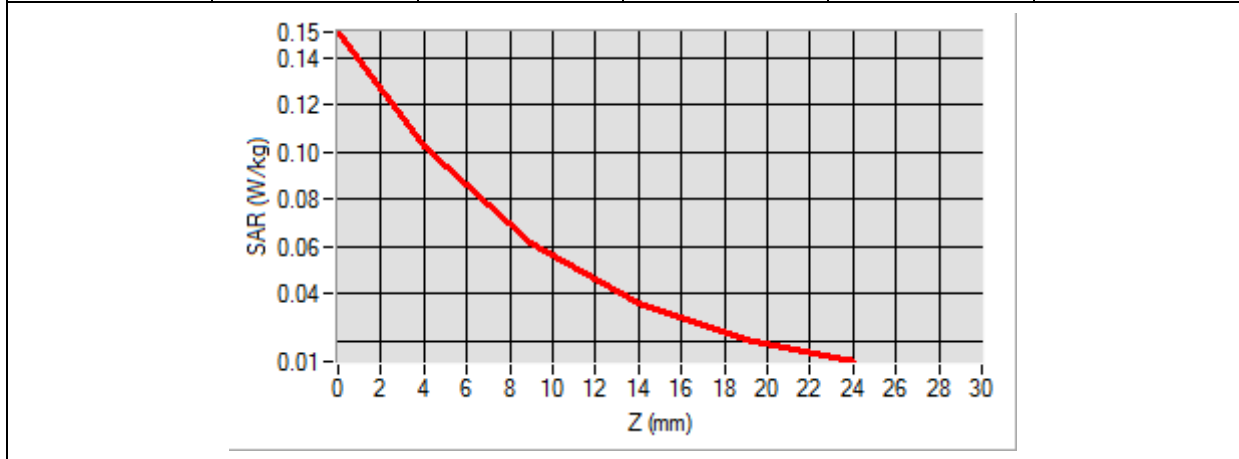

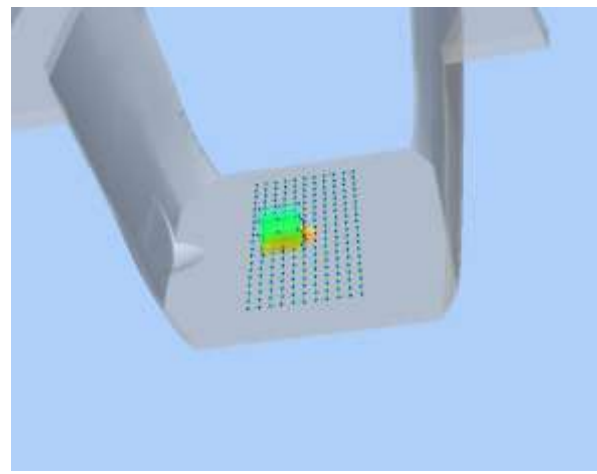3D screen shot	Hot spot position
	

MEASUREMENT 44

Type: Phone measurement (Complete)

Date of measurement: 03/23/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.986458
Ambient Temperature	21.1
Liquid Temperature	21.3

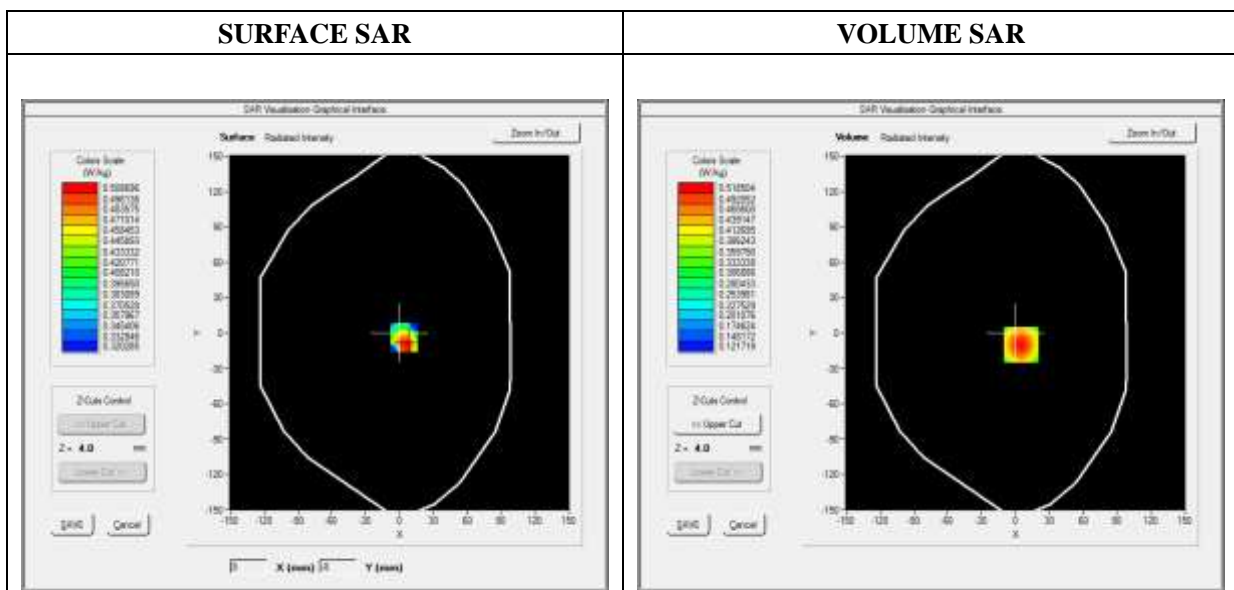




Maximum location: X=5.00, Y=-10.00

SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.356065
SAR 1g (W/Kg)	0.498605

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6410	0.5185	0.3987	0.3097	0.2433

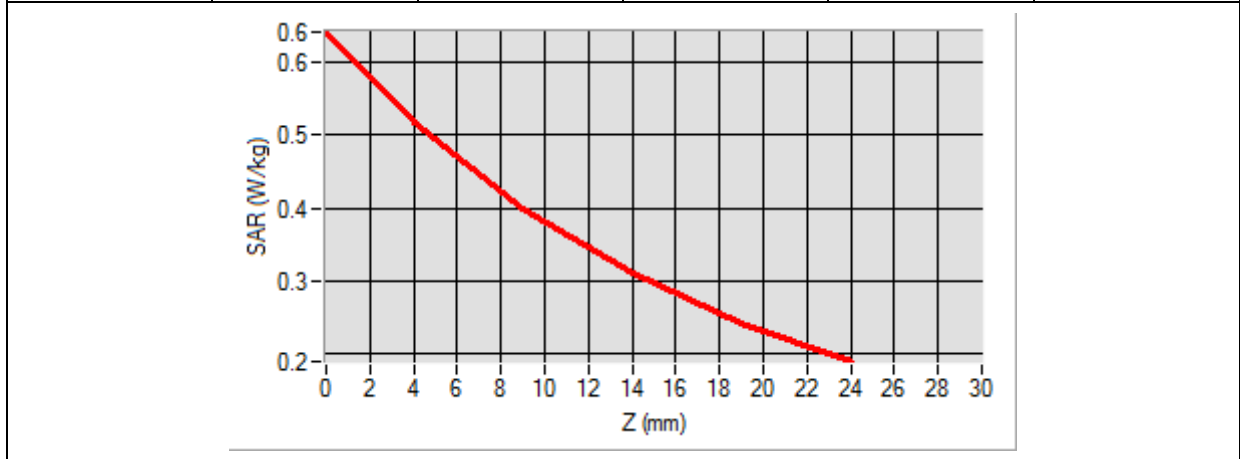

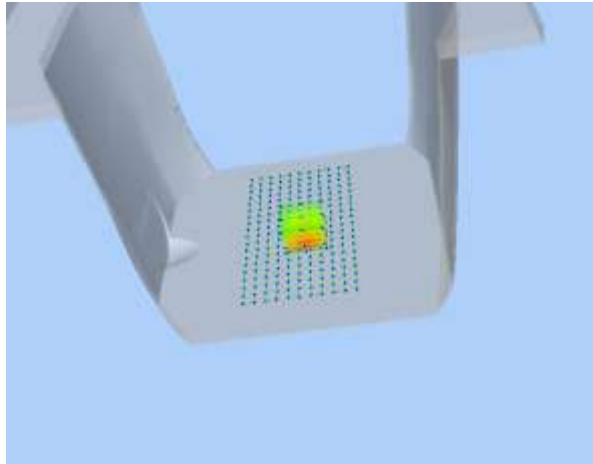3D screen shot	Hot spot position
	

MEASUREMENT 47

Type: Phone measurement (Complete)

Date of measurement: 03/26/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.687492
Ambient Temperature	21.1
Liquid Temperature	21.3

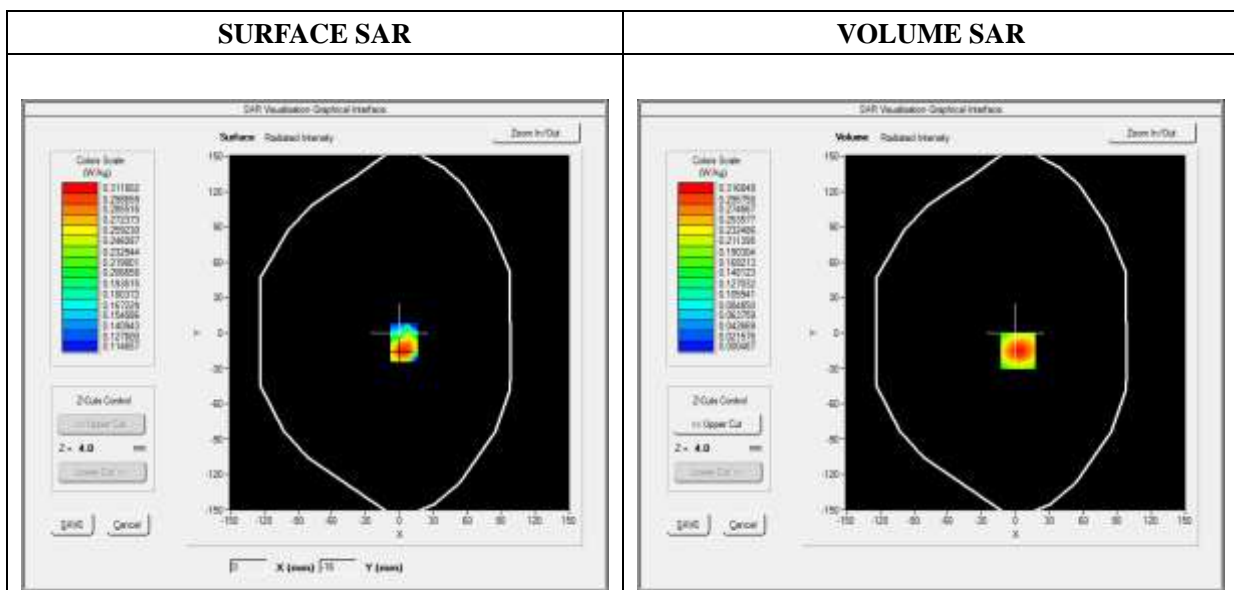




Maximum location: X=2.00, Y=-15.00

SAR Peak: 1.32 W/kg

SAR 10g (W/Kg)	0.178192
SAR 1g (W/Kg)	0.424946

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1979	0.3168	0.0025	0.0014	0.0025

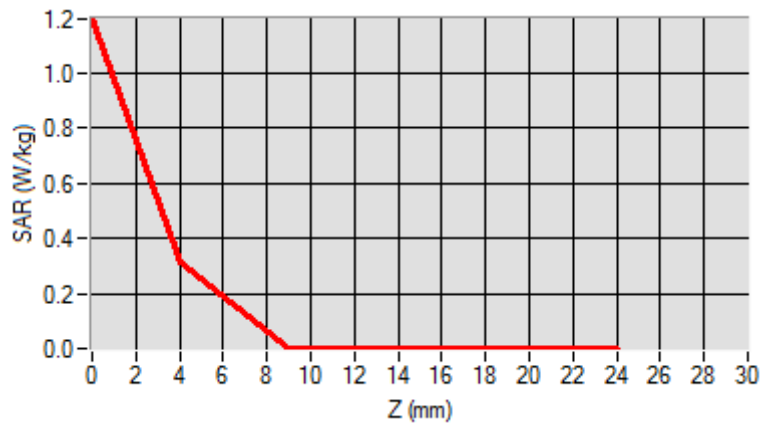

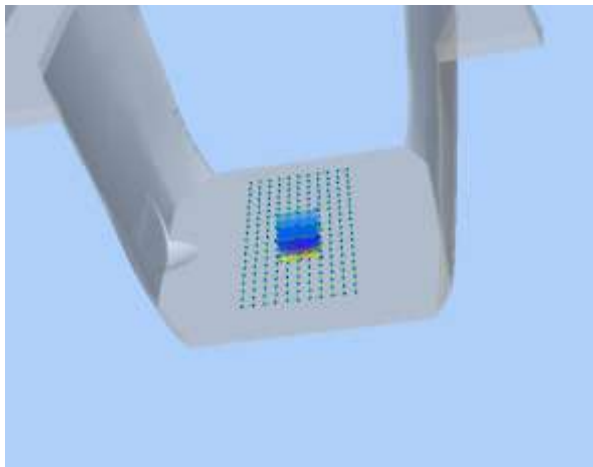3D screen shot	Hot spot position
	

MEASUREMENT 49

Type: Phone measurement (Complete)

Date of measurement: 03/27/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.968546
Ambient Temperature	21.1
Liquid Temperature	21.2

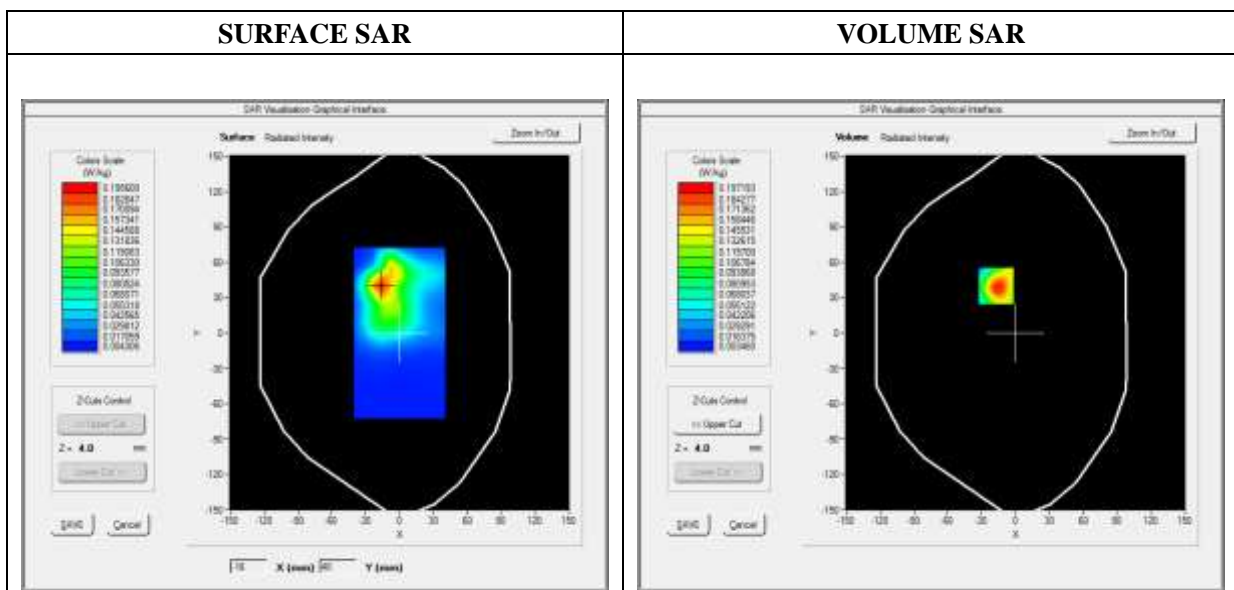




Maximum location: X=-17.00, Y=40.00

SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.082416
SAR 1g (W/Kg)	0.108883

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4306	0.1972	0.0617	0.0176	0.0073

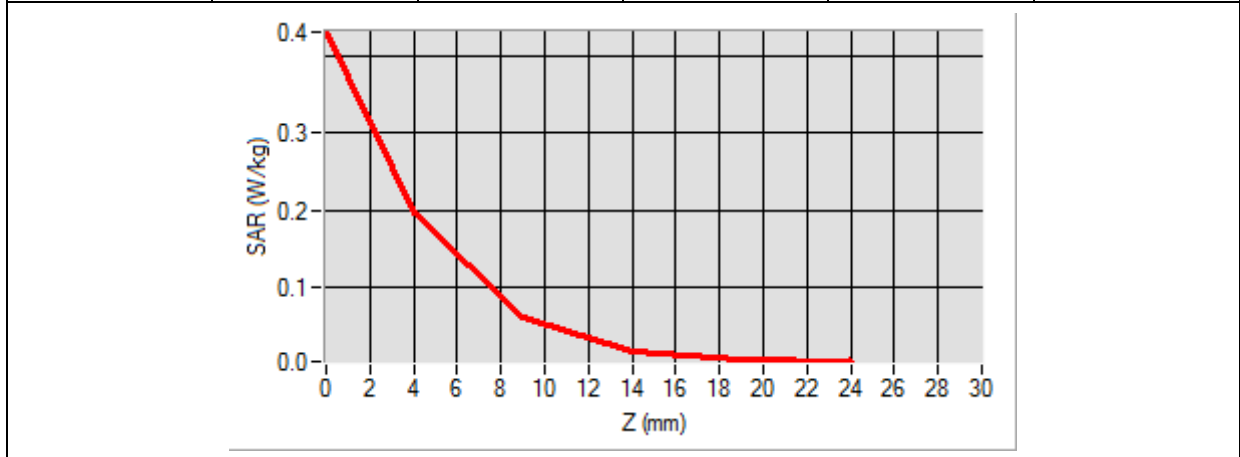

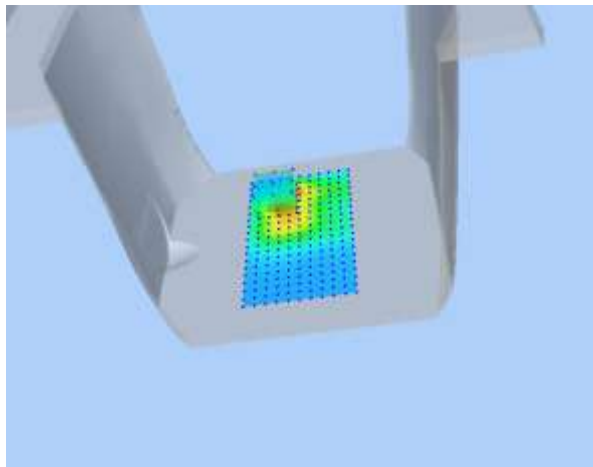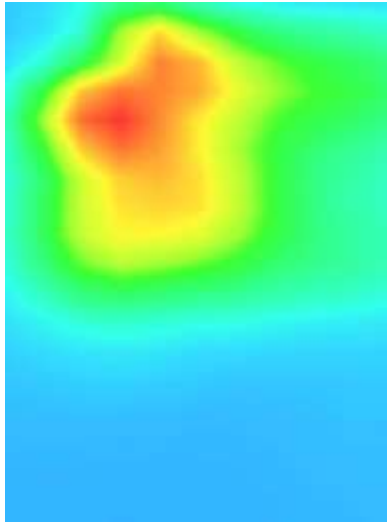3D screen shot	Hot spot position
	

MEASUREMENT 53

Type: Phone measurement (Complete)

Date of measurement: 03/27/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 08/16 EPGO298; ConvF: 2.39; Calibrated: 2017/09/18

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2G)_802.11a
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative Permittivity (real part)	48.501939
Conductivity (S/m)	5.161487
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

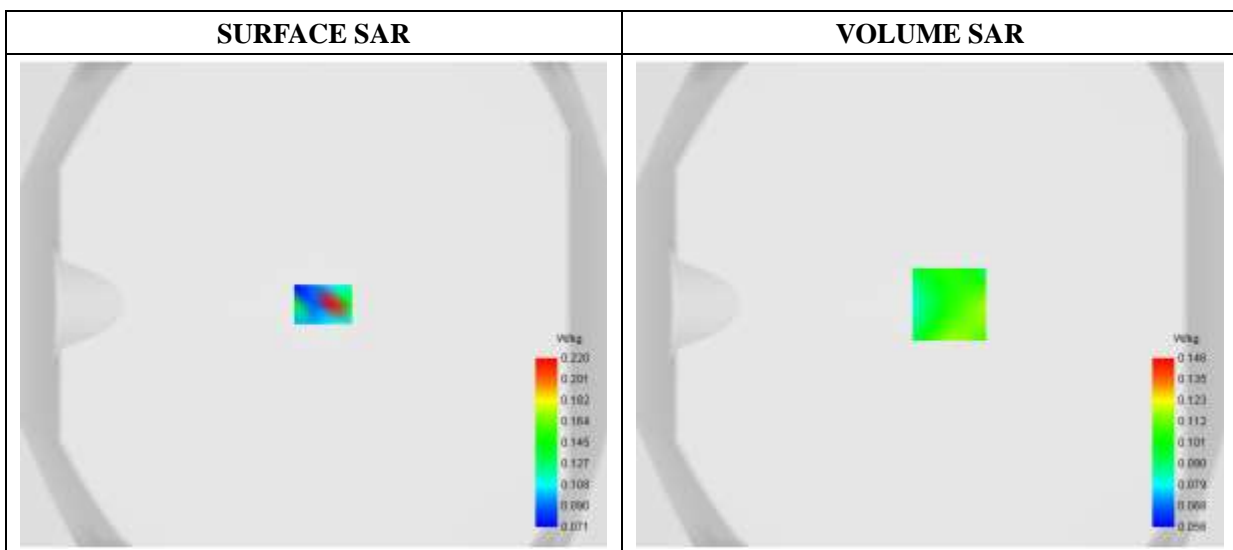

Maximum location: X=8.00, Y=0.00

SAR 10g (W/Kg)	0.091988
SAR 1g (W/Kg)	0.107284

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.1489	0.1167	0.0834	0.0789	0.0801

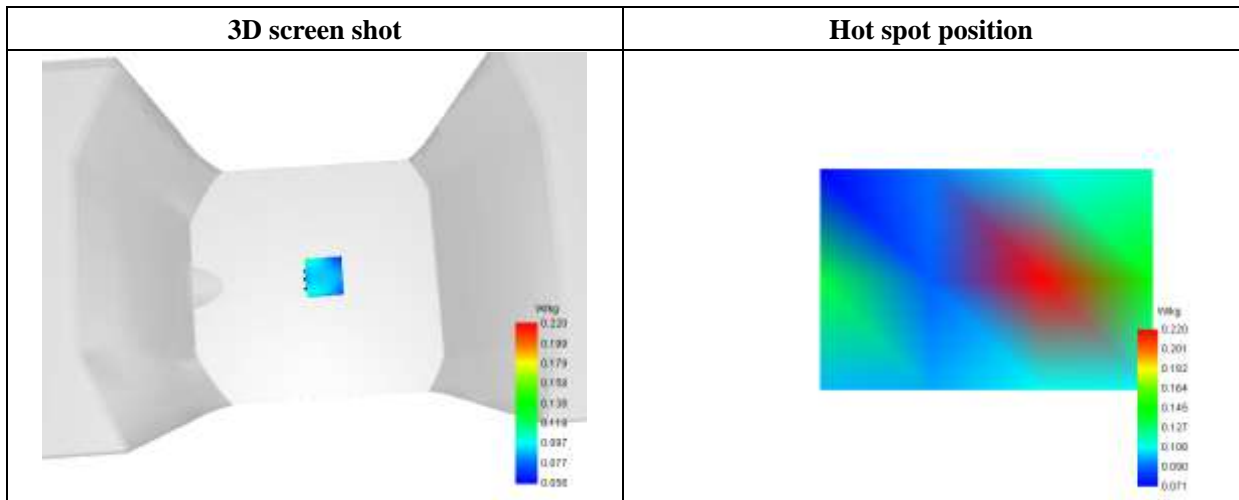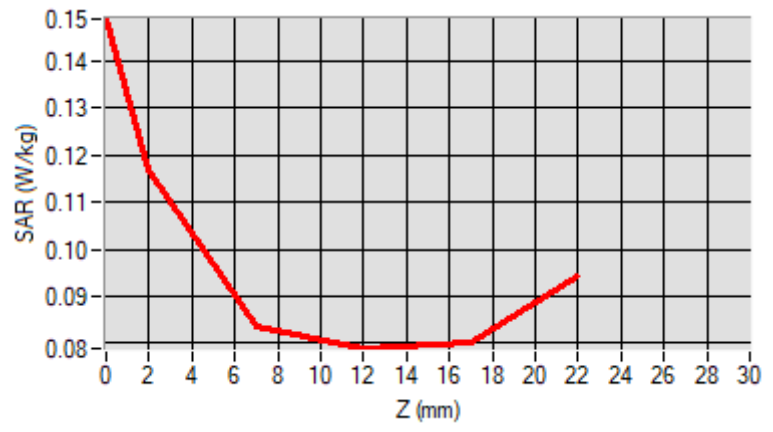

MEASUREMENT 57

Type: Phone measurement (Complete)

Date of measurement: 03/23/2018

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.41; Calibrated: 06/01/2017

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front side
Band	RF ID
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	927.2500000
Relative Permittivity (real part)	54.964510
Conductivity (S/m)	1.022000
Power Variation (%)	0.738822
Ambient Temperature	21.1
Liquid Temperature	21.2

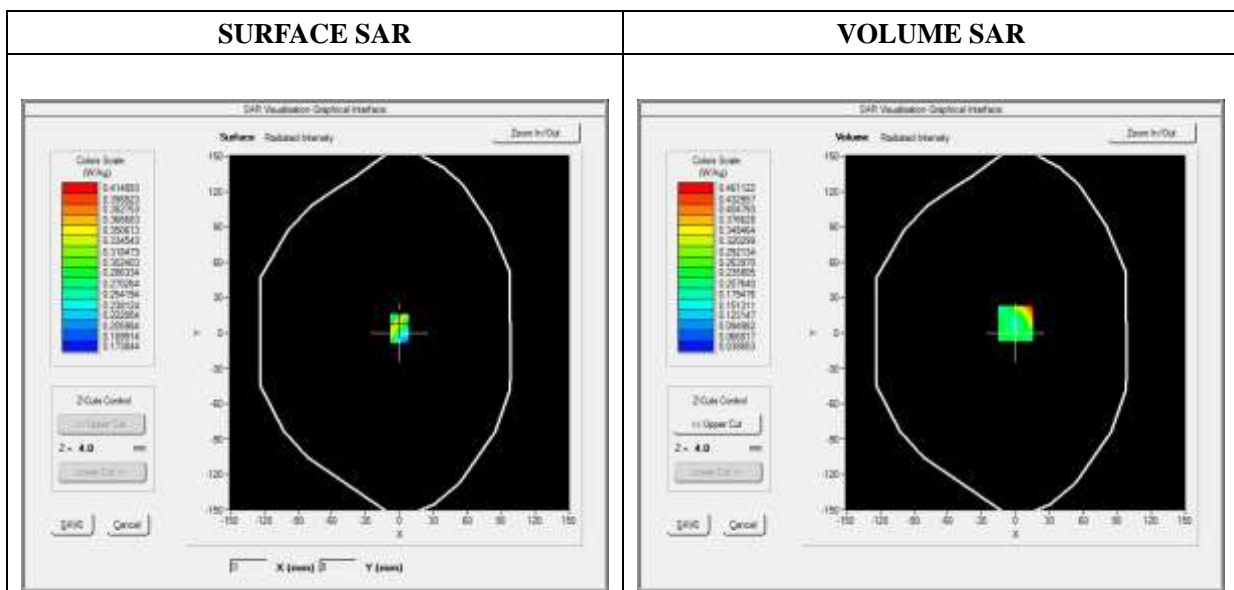




Maximum location: X=0.00, Y=8.00

SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.221663
SAR 1g (W/Kg)	0.356487

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.9868	0.4611	0.1479	0.2281	0.1150

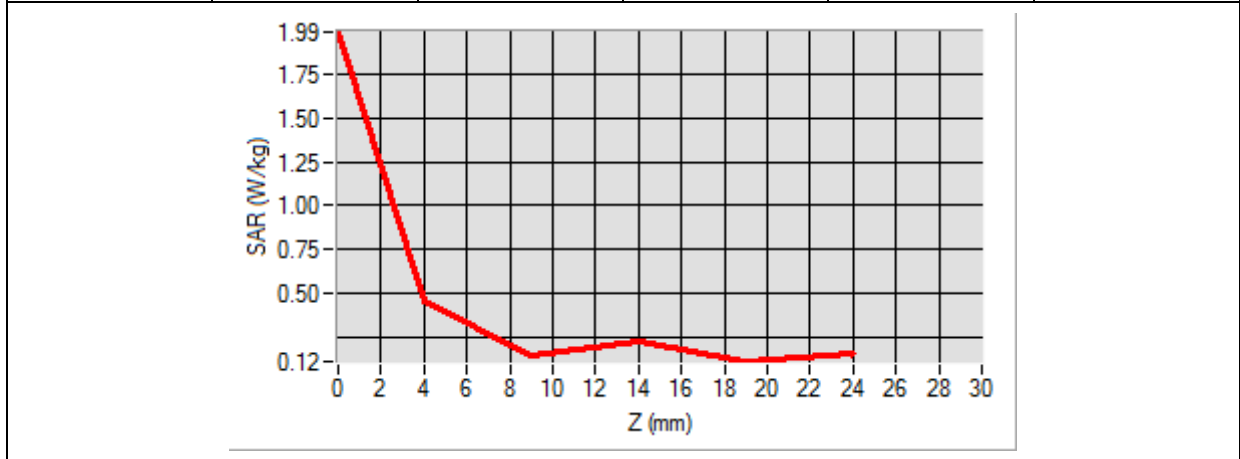

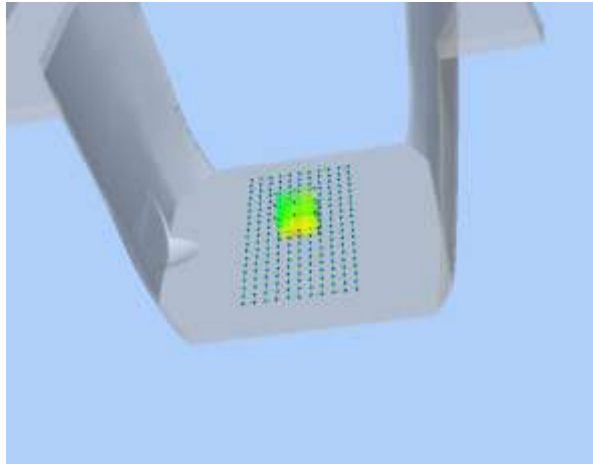3D screen shot	Hot spot position
	

Annex C. EUT Photos

EUT View Front




EUT View Back1



EUT View Back2



Antenna View

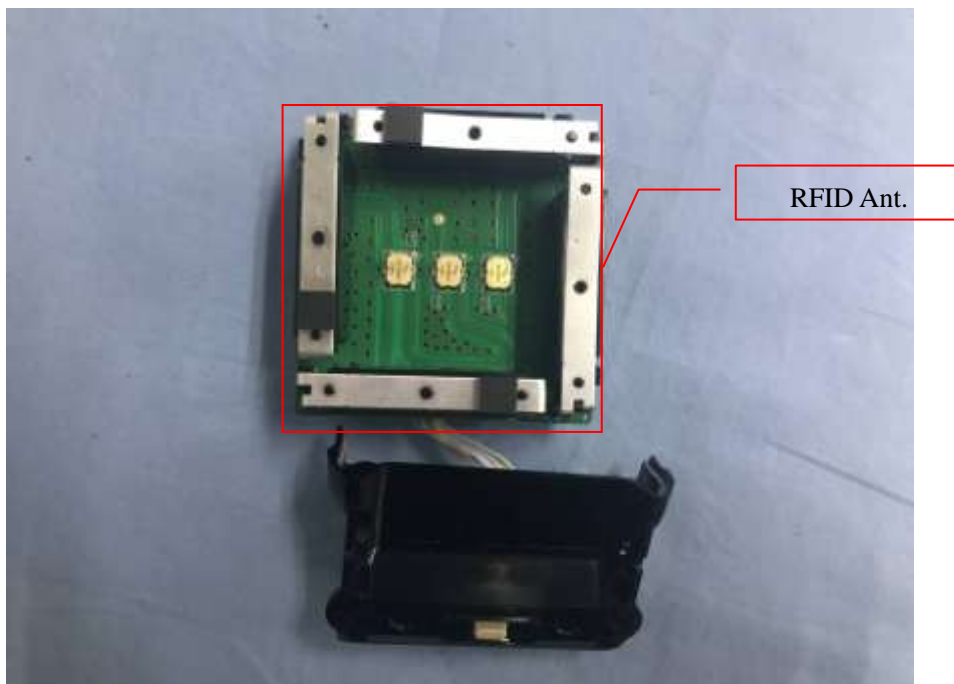

Annex D. Test Setup Photos

Head Exposure Conditions

Cheek



Tilt



Check



Tilt




Body mode Exposure Conditions

Body Front



Body Back

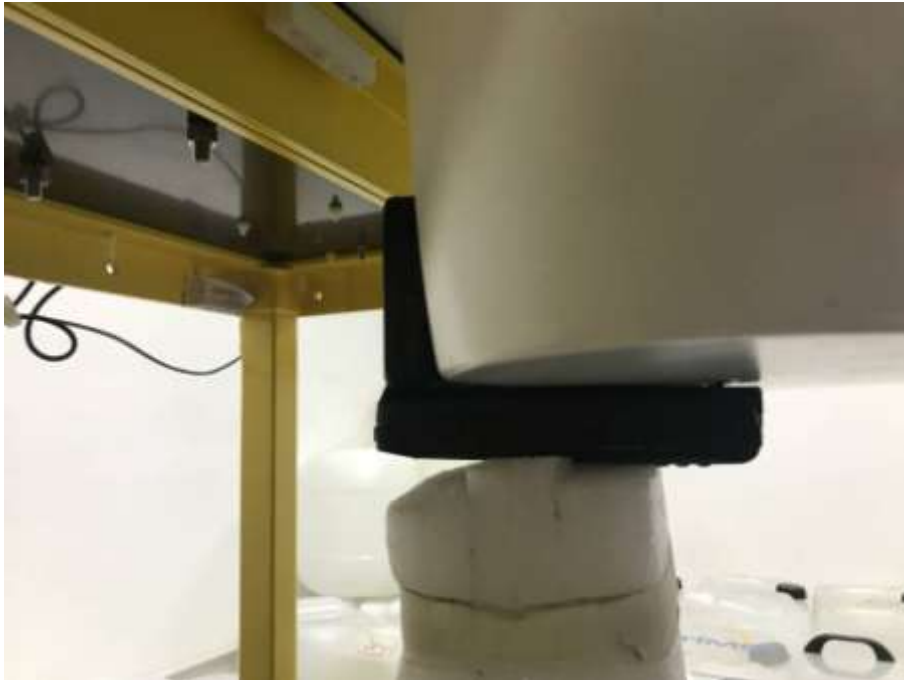

Body Left



Body Right



Body Top



Body Bottom



RFID Body mode Exposure Conditions

Body Front





Annex E. Calibration Certificate

Please refer to the Exhibit for the Calibration Certificate

******* END OF REPORT *******