

**AT4 wireless, S.A.**  
Parque Tecnológico de Andalucía,  
c/Severo Ochoa nº 2  
29590 Campanillas/ Málaga/ España  
Tel. 952 61 91 00 - Fax 952 61 91 13  
MÁLAGA, C.I.F. A29 507 456  
Registro Mercantil de Málaga, Tomo 1169  
Libro 82 Folio 133 Hoja MA3729

---

# ASSESSMENT REPORT

---

**Report No.:**  
**33376IDT.002**


**REPORT ON:** RF EXPOSURE ASSESSMENT OF THE H5321 ERICSSON MOBILE BROADBAND MODULE INSTALLED IN GENERIC HOST PLATFORMS COVERING 7 DIFFERENT COLLOCATION SCENARIOS.

**Product** : Ericsson Mobile Broadband Module  
**Trade Mark** : Ericsson  
**Model** : H5321  
**FCC ID / IC:** : VV7-MBMH5321 / 287AG-MBMH5321  
**Manufacturer** : Ericsson AB  
**Requested by** : Ericsson AB  
**Host Platform** : Generic host platforms covering 7 different collocation scenarios

**Standard(s)** : OET Bulletin 65 Edition 97-01 August 1997  
FCC 47 CFR § 1.1307  
FCC 47 CFR § 1.1310  
RSS-102 Issue 4 - March 2010  
EN 62311:2008  
1999/519/EC Council Recommendation  
Radiocommunications (Electromagnetic Radiation – Human Exposure) Standard 2003  
ARPANSA RPS No. 3  
AS 2772.2-1998:Radiofrequency radiation – Part 2  
Vodafone requirements [1999/519/EC]

This report includes 2 annexes and therefore, the total number of pages is 36.

**IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless, S.A.**

Date: 2011-09-26	Elaborated by:  Date: 2011-09-26 Nadia Martinez Worldwide Compliance Engineer	Page: 1 of 36
------------------	--	---------------

**INDEX**

1. COMPETENCE AND GUARANTEES	3
2. GENERAL CONDITIONS	3
3. CHARACTERISTICS OF THE EVALUATION	3
3.1. SERVICES REQUESTED .....	3
3.2. REQUIREMENTS AND METHOD.....	4
4. IDENTIFICATION DATA SUPPLIED BY THE APPLICANT	5
4.1. APPLICANT .....	5
4.2. REPRESENTATIVE.....	5
4.3. IDENTIFICATION OF ITEM/ITEMS EVALUATED.....	5
5. EVALUATION RESULTS	5
5.1. RESULTS FOR ITEM EVALUATED TRANSMITTING ALONE .....	6
5.2. RESULTS FOR ITEM EVALUATED TRANSMITTING SIMULTANEOUSLY WITH OTHER COLLOCATED TRANSMITTERS .....	6
6. REMARKS AND COMMENTS	7
7. SUMMARY	7
ANNEXES	
A. HOST PLATFORM ANALYSIS.....	8
B. RF EXPOSURE ASSESSMENT.....	23

## 1. COMPETENCE AND GUARANTEES

AT4 wireless is a testing laboratory competent to carry out the evaluation described in this report.

AT4 wireless guarantees the reliability of the data presented in this report, which is based on the information available at AT4 wireless at the time of performance of the evaluation.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under review and the results of such evaluation

## 2. GENERAL CONDITIONS

1. This report refers only to the item that has undergone the evaluation as described in Annex A of this report according to the information provided by the applicant.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

## 3. CHARACTERISTICS OF THE EVALUATION

### 3.1. SERVICES REQUESTED

RF exposure assessment of the H5321 Ericsson Mobile Broadband Module installed in generic host platforms covering 7 different collocation scenarios according to:

Requirements	Frequency bands
<p>OET Bulletin 65 Edition 97-01 August 1997 - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p>FCC 47 CFR § 1.1307 - Actions that may have a significant environmental effect, for which Environmental Assessments (EAs) must be prepared.</p> <p>FCC 47 CFR § 1.1310 - Radiofrequency radiation exposure limits.</p> <p>RSS-102 Issue 4 - March 2010</p>	GSM 850, FDD V, PCS 1900, FDD II
<p>EN 62311:2008 - Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz)</p> <p>1999/519/EC Council Recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)</p>	E-GSM 900, FDD VIII, DCS 1800, FDD I

Report No.: 33376IDT.002		Page: 3 of 36
Date: 2011-09-26		

<p>Radiocommunications (Electromagnetic Radiation – Human Exposure) Standard 2003</p> <p>ARPANSA RPS No. 3 – Maximum Exposure Levels to Radiofrequency Fields (3 kHz to 300 GHz)</p> <p>AS 2772.2-1998: Radiofrequency radiation - Part 2: Principles and methods of measurement - 300 kHz to 100 GHz</p>	FDD V, E-GSM 900, DCS 1800, FDD I
Vodafone requirements [1999/519/EC]	GSM 850, FDD V, FDD VI, E-GSM 900, FDD VIII, DCS 1800, PCS 1900, FDD II, FDD I

### 3.2. REQUIREMENTS AND METHOD

The evaluation has been carried out according to the following documents and standards:

Requirements	Frequency bands
<p>OET Bulletin 65 Edition 97-01 August 1997 - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p>FCC 47 CFR § 1.1307 - Actions that may have a significant environmental effect, for which Environmental Assessments (EAs) must be prepared.</p> <p>FCC 47 CFR § 1.1310 - Radiofrequency radiation exposure limits.</p> <p>RSS-102 Issue 4 - March 2010</p>	GSM 850, FDD V, PCS 1900, FDD II
<p>EN 62311:2008 - Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz)</p> <p>1999/519/EC Council Recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)</p>	E-GSM 900, FDD VIII, DCS 1800, FDD I
<p>Radiocommunications (Electromagnetic Radiation – Human Exposure) Standard 2003</p> <p>ARPANSA RPS No. 3 – Maximum Exposure Levels to Radiofrequency Fields (3 kHz to 300 GHz)</p> <p>AS 2772.2-1998: Radiofrequency radiation - Part 2: Principles and methods of measurement - 300 kHz to 100 GHz</p>	FDD V, E-GSM 900, DCS 1800, FDD I
Vodafone requirements [1999/519/EC]	GSM 850, FDD V, FDD VI, E-GSM 900, FDD VIII, DCS 1800, PCS 1900, FDD II, FDD I

## 4. IDENTIFICATION DATA SUPPLIED BY THE APPLICANT

Identification data included in this section has been supplied by the client.

### 4.1. APPLICANT

**Name / Company:** Ericsson AB

**V.A.T. Registration number:** SE 556056625801

**Address:** Lindholmspiren 11, SE-417 56 Goteborg

**Country:** Sweden

**Telephone:** +46 10 712 0000

**Fax:** +46 10 712 6033

### 4.2. REPRESENTATIVE

**Name:** Fredrik Claesson

**Address:** Lindholmspiren 11, SE-417 56 Goteborg

**Country:** Sweden

**Telephone:** +46 10 712 7856

**Fax:** +46 10 712 6033

### 4.3. IDENTIFICATION OF ITEM/ITEMS EVALUATED

**Product:** Ericsson Mobile Broadband Module

**Trade mark:** Ericsson **Model:** H5321

**FCC ID:** VV7-MBMH5321

**IC:** 287AG-MBMH5321

**Manufacturer:** Ericsson AB

**Country of manufacture:** China

**Host platform:** Generic host platforms covering 7 different collocation scenarios

**Description:** QUAD BAND 850/900/1800/1900 GSM/GPRS/EGPRS class 10, WCDMA Bands I/II/V/VI/VIII HSDPA Cat. 14 HSUPA Cat. 6 PCI Express Half-Mini Card Wireless WAN module installed in generic host platforms covering 7 different collocation scenarios.

## 5. EVALUATION RESULTS

Abbreviations used in the VERDICT column of the following tables are:

- C** Compliant with requirements
- NC** Not Compliant with requirements
- NA** Not Applicable
- NE** Not Evaluated

Report No.: 33376IDT.002		Page: 5 of 36
Date: 2011-09-26		

### 5.1. RESULTS FOR ITEM EVALUATED TRANSMITTING ALONE

DOCUMENT/STANDARD	VERDICT			
	NA	C	NC	NE
<p>OET Bulletin 65 Edition 97-01 August 1997 - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p>FCC 47 CFR § 1.1307 - Actions that may have a significant environmental effect, for which Environmental Assessments (EAs) must be prepared.</p> <p>FCC 47 CFR § 1.1310 - Radiofrequency radiation exposure limits.</p> <p>RSS-102 Issue 4 - March 2010</p>		C		
<p>EN 62311:2008 - Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz)</p> <p>1999/519/EC Council Recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)</p>		C		
<p>Radiocommunications (Electromagnetic Radiation – Human Exposure) Standard 2003</p> <p>ARPANSA RPS No. 3 – Maximum Exposure Levels to Radiofrequency Fields (3 kHz to 300 GHz)</p> <p>AS 2772.2-1998: Radiofrequency radiation - Part 2: Principles and methods of measurement - 300 kHz to 100 GHz</p>		C		
Vodafone requirements [1999/519/EC]		C		

### 5.2. RESULTS FOR ITEM EVALUATED TRANSMITTING SIMULTANEOUSLY WITH OTHER COLLOCATED TRANSMITTERS

DOCUMENT/STANDARD	VERDICT			
	NA	C	NC	NE
<p>OET Bulletin 65 Edition 97-01 August 1997 - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p>FCC 47 CFR § 1.1307 - Actions that may have a significant environmental effect, for which Environmental Assessments (EAs) must be prepared.</p> <p>FCC 47 CFR § 1.1310 - Radiofrequency radiation exposure limits.</p> <p>RSS-102 Issue 4 - March 2010</p>		C		
<p>EN 62311:2008 - Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz)</p> <p>1999/519/EC Council Recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)</p>		C		
<p>Radiocommunications (Electromagnetic Radiation – Human Exposure) Standard 2003</p> <p>ARPANSA RPS No. 3 – Maximum Exposure Levels to Radiofrequency Fields (3 kHz to 300 GHz)</p> <p>AS 2772.2-1998: Radiofrequency radiation - Part 2: Principles and methods of measurement - 300 kHz to 100 GHz</p>		C		

## 6. REMARKS AND COMMENTS

GSM and GPRS modes have been evaluated together because both modes share the same power class and modulation scheme in the uplink.

WCDMA and HSDPA modes have been evaluated together because HSDPA is an improved mode of operation only for Downlink (equipment reception), but using the normal WCDMA mode for the Uplink (equipment transmission).

## 7. SUMMARY

Considering the results of the performed analysis and evaluation, stated in annexes A and B, the item under evaluation is **IN COMPLIANCE** with the specifications listed in section 3.1 “SERVICES REQUESTED”.

NOTE: The results presented in this report apply only to the particular item under evaluation established in section “4.3. IDENTIFICATION OF ITEM/ITEMS EVALUATED” of this document, as presented for evaluation by the applicant.

## ANNEX A

### HOST PLATFORMS ANALYSIS

**Report No: 33376IDT.002**

A.1. SCENARIO 1 .....	9
A.2. SCENARIO 2 .....	11
A.3. SCENARIO 3 .....	13
A.4. SCENARIO 4.....	15
A.5. SCENARIO 5 .....	17
A.6. SCENARIO 6 .....	19
A.7. SCENARIO 7 .....	21



## A.1. SCENARIO 1

Scenario 1 covers a host device where the H5321 Ericsson Mobile Broadband Module is in mobile exposure conditions (antenna-to-user distance > 20 cm) and it is collocated with a Bluetooth transmitter (H5321 antenna-to-Bluetooth antenna distance < 20 cm) which is also in mobile exposure conditions. Other transmitters may be installed in the same host platform but they are not collocated with H5321 Ericsson Mobile Broadband Module.

### MAIN/PRIMARY TRANSMITTER:

#### WWAN transmitter:

Type of equipment : Ericsson Mobile Broadband Module  
 Trade mark : Ericsson  
 Model : H5321  
 FCC ID / IC : VV7-MBMH5321 / 287AG-MBMH5321  
 Maximum antenna gain : Low bands: 2.68 dBi // High bands: 2.61 dBi  
 Output power : See table below

Frequency Band	Mode	Frequency range (MHz)	Maximum conducted output power (dBm)	Maximum conducted output power (mW)	Duty Cycle	Equivalent conducted output power (mW)	Maximum antenna gain (dBi)	Maximum antenna gain (numerical)	EIRP (mW)
GSM 850	GSM/GPRS	824,2 - 848,8	33,51	2243,88	25%	560,97	2,68	1,85	1039,78
	EDGE	824,2 - 848,8	31,17	1309,18	25%	327,30	2,68	1,85	606,65
FDD V	WCDMA/HSDPA	826,4 - 846,6	28,18	657,66	100%	657,66	2,68	1,85	1218,99
	HSUPA	826,4 - 846,6	27,62	578,10	100%	578,10	2,68	1,85	1071,52
FDD VI	WCDMA/HSDPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
	HSUPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
E-GSM 900	GSM/GPRS	880,2 - 914,8	32,60	1819,70	25%	454,93	2,68	1,85	843,22
	EDGE	880,2 - 914,8	27,60	575,44	25%	143,86	2,68	1,85	266,65
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	23,11	204,83	100%	204,83	2,68	1,85	379,66
	HSUPA	882,4 - 912,6	24,27	267,18	100%	267,18	2,68	1,85	495,22
DCS 1800	GSM/GPRS	1710,2 - 1784,8	30,50	1122,02	25%	280,50	2,61	1,82	511,61
	EDGE	1710,2 - 1784,8	26,70	467,74	25%	116,93	2,61	1,82	213,28
PCS 1900	GSM/GPRS	1850,2 - 1909,8	30,40	1096,48	25%	274,12	2,61	1,82	499,97
	EDGE	1850,2 - 1909,8	30,16	1037,53	25%	259,38	2,61	1,82	473,09
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	26,35	431,52	100%	431,52	2,61	1,82	787,05
	HSUPA	1852,4 - 1907,6	25,58	361,41	100%	361,41	2,61	1,82	659,17
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	22,98	198,70	100%	198,70	2,61	1,82	362,41
	HSUPA	1922,4 - 1977,6	22,61	182,31	100%	182,31	2,61	1,82	332,51

### ADDITIONAL/SECONDARY TRANSMITTERS:

#### Bluetooth transmitter:

Type of equipment : Bluetooth<sup>1</sup>  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below


Scenario 1			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
Bluetooth	100	76%	76,43

<sup>1</sup> It could be also Bluetooth + UWB transmitter.  
 UWB contribution does not need to be considered.

**WORST CASE CONSIDERATIONS:**

- Antenna-to-user distance: 20 cm.
  - o Any antenna-to-user distance > 20 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- H5321 antenna gains: Low bands: 2.68 dBi // High bands: 2.61 dBi
  - o Any antenna gains below the specified would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Bluetooth EIRP: 100 mW
  - o Any Bluetooth (or Bluetooth + UWB) transmitter with EIRP below 100 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Antenna-to-antenna distances: 0 cm
  - o Any antenna-to-antenna distance > 0 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.

**SAMPLE CONFIGURATION:**

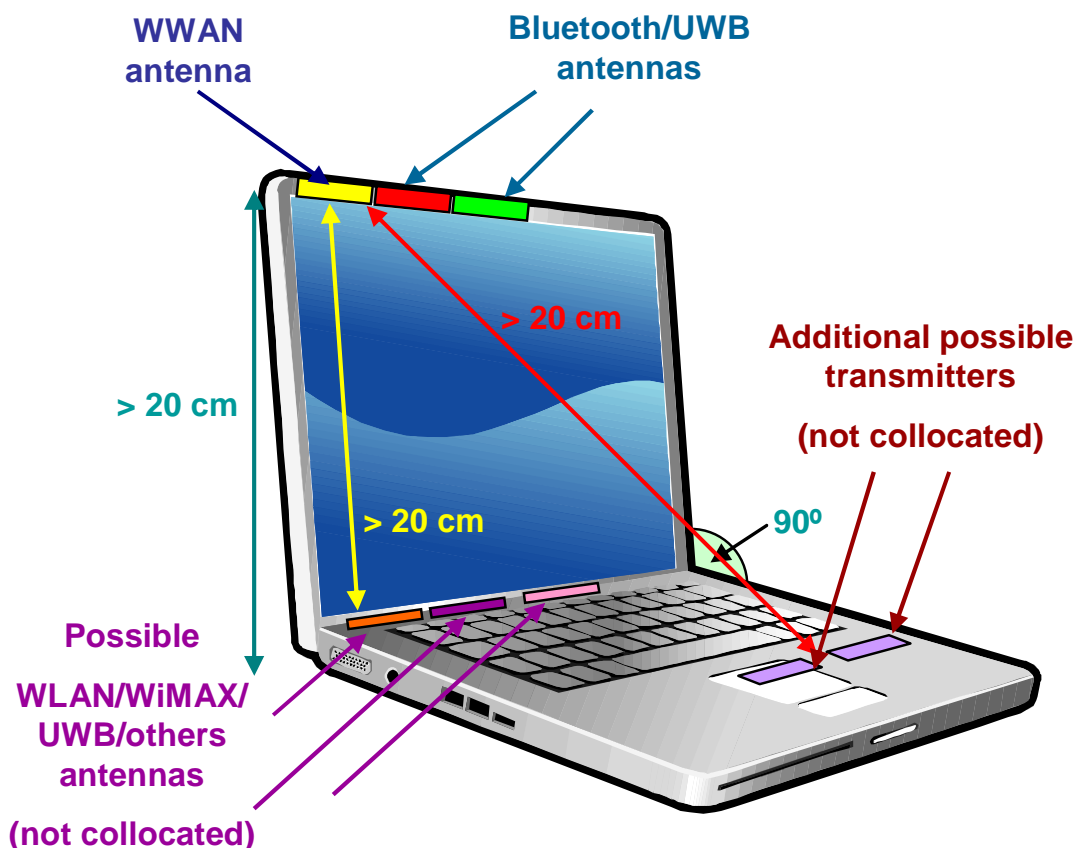

Report No.: 33376IDT.002		Page: 10 of 36
Date: 2011-09-26		Annex A

## A.2. SCENARIO 2

Scenario 2 covers a host device where the H5321 Ericsson Mobile Broadband Module is in mobile exposure conditions (antenna-to-user distance > 20 cm) and it is collocated with a WLAN transmitter (H5321 antenna-to-WLAN antenna distance < 20 cm) which is also in mobile exposure conditions.

WLAN transmitter may have other antennas in portable exposure conditions but they are not collocated with H5321 Ericsson Mobile Broadband Module antenna.

Other transmitters may be installed in the same host platform but they are not collocated with H5321 Ericsson Mobile Broadband Module.

### MAIN/PRIMARY TRANSMITTER:

#### WWAN transmitter:

Type of equipment : Ericsson Mobile Broadband Module  
 Trade mark : Ericsson  
 Model : H5321  
 FCC ID / IC : VV7-MBMH5321 / 287AG-MBMH5321  
 Maximum antenna gain : Low bands: 2.68 dBi // High bands: 2.61 dBi  
 Output power : See table below

Frequency Band	Mode	Frequency range (MHz)	Maximum conducted output power (dBm)	Maximum conducted output power (mW)	Duty Cycle	Equivalent conducted output power (mW)	Maximum antenna gain (dBi)	Maximum antenna gain (numerical)	EIRP (mW)
GSM 850	GSM/GPRS	824,2 - 848,8	33,51	2243,88	25%	560,97	2,68	1,85	1039,78
	EDGE	824,2 - 848,8	31,17	1309,18	25%	327,30	2,68	1,85	606,65
FDD V	WCDMA/HSDPA	826,4 - 846,6	28,18	657,66	100%	657,66	2,68	1,85	1218,99
	HSUPA	826,4 - 846,6	27,62	578,10	100%	578,10	2,68	1,85	1071,52
FDD VI	WCDMA/HSDPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
	HSUPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
E-GSM 900	GSM/GPRS	880,2 - 914,8	32,60	1819,70	25%	454,93	2,68	1,85	843,22
	EDGE	880,2 - 914,8	27,60	575,44	25%	143,86	2,68	1,85	266,65
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	23,11	204,83	100%	204,83	2,68	1,85	379,66
	HSUPA	882,4 - 912,6	24,27	267,18	100%	267,18	2,68	1,85	495,22
DCS 1800	GSM/GPRS	1710,2 - 1784,8	30,50	1122,02	25%	280,50	2,61	1,82	511,61
	EDGE	1710,2 - 1784,8	26,70	467,74	25%	116,93	2,61	1,82	213,28
PCS 1900	GSM/GPRS	1850,2 - 1909,8	30,40	1096,48	25%	274,12	2,61	1,82	499,97
	EDGE	1850,2 - 1909,8	30,16	1037,53	25%	259,38	2,61	1,82	473,09
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	26,35	431,52	100%	431,52	2,61	1,82	787,05
	HSUPA	1852,4 - 1907,6	25,58	361,41	100%	361,41	2,61	1,82	659,17
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	22,98	198,70	100%	198,70	2,61	1,82	362,41
	HSUPA	1922,4 - 1977,6	22,61	182,31	100%	182,31	2,61	1,82	332,51

### ADDITIONAL/SECONDARY TRANSMITTERS:

#### WLAN transmitter:

Type of equipment : WLAN<sup>2</sup>  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below


Scenario 3			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
WLAN	2000	100%	2000,00

<sup>2</sup> It could be also WLAN/WiMAX combo transmitter where WLAN and WiMAX transmitters do not transmit simultaneously.

**WORST CASE CONSIDERATIONS:**

- Antenna-to-user distance: 20 cm.
  - o Any antenna-to-user distance > 20 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- H5321 antenna gains: Low bands: 2.68 dBi // High bands: 2.61 dBi
  - o Any antenna gains below the specified would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- WLAN EIRP: 2000 mW
  - o Any WLAN transmitter with EIRP below 2000 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Antenna-to-antenna distances: 0 cm
  - o Any antenna-to-antenna distance > 0 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.

**SAMPLE CONFIGURATION:**

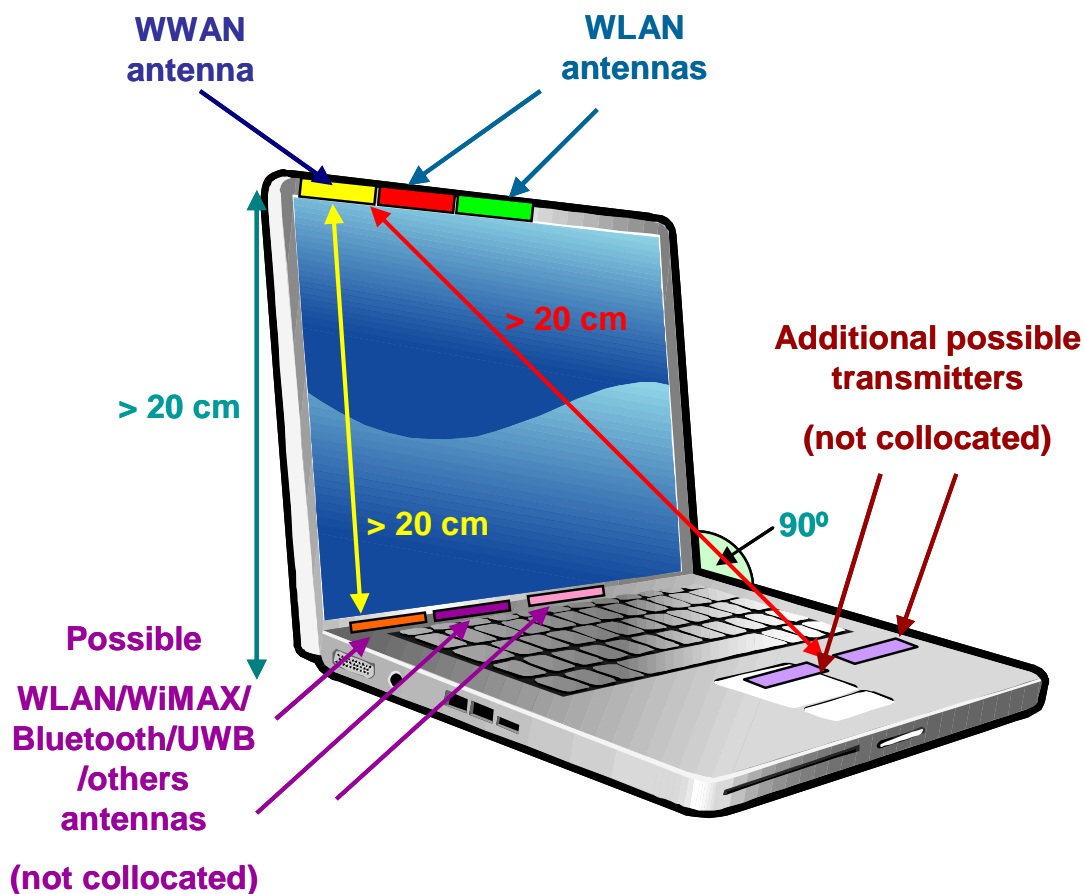

Report No.: 33376IDT.002  Date: 2011-09-26		Page: 12 of 36  Annex A
---	--	-------------------------------

### A.3. SCENARIO 3

Scenario 3 covers a host device where the H5321 Ericsson Mobile Broadband Module is in mobile exposure conditions (antenna-to-user distance > 20 cm) and it is collocated with a WLAN transmitter and a Bluetooth transmitter (H5321 antenna-to-WLAN/Bluetooth antenna distance < 20 cm) which are also in mobile exposure conditions.

WLAN transmitter may have other antennas in portable exposure conditions but they are not collocated with H5321 Ericsson Mobile Broadband Module antenna.

Other transmitters may be installed in the same host platform but they are not collocated with H5321 Ericsson Mobile Broadband Module.

#### MAIN/PRIMARY TRANSMITTER:

##### WWAN transmitter:

Type of equipment : Ericsson Mobile Broadband Module  
 Trade mark : Ericsson  
 Model : H5321  
 FCC ID / IC : VV7-MBMH5321 / 287AG-MBMH5321  
 Maximum antenna gain : Low bands: 2.68 dBi // High bands: 2.61 dBi  
 Output power : See table below

Frequency Band	Mode	Frequency range (MHz)	Maximum conducted output power (dBm)	Maximum conducted output power (mW)	Duty Cycle	Equivalent conducted output power (mW)	Maximum antenna gain (dBi)	Maximum antenna gain (numerical)	EIRP (mW)
GSM 850	GSM/GPRS	824,2 - 848,8	33,51	2243,88	25%	560,97	2,68	1,85	1039,78
	EDGE	824,2 - 848,8	31,17	1309,18	25%	327,30	2,68	1,85	606,65
FDD V	WCDMA/HSDPA	826,4 - 846,6	28,18	657,66	100%	657,66	2,68	1,85	1218,99
	HSUPA	826,4 - 846,6	27,62	578,10	100%	578,10	2,68	1,85	1071,52
FDD VI	WCDMA/HSDPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
	HSUPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
E-GSM 900	GSM/GPRS	880,2 - 914,8	32,60	1819,70	25%	454,93	2,68	1,85	843,22
	EDGE	880,2 - 914,8	27,60	575,44	25%	143,86	2,68	1,85	266,65
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	23,11	204,83	100%	204,83	2,68	1,85	379,66
	HSUPA	882,4 - 912,6	24,27	267,18	100%	267,18	2,68	1,85	495,22
DCS 1800	GSM/GPRS	1710,2 - 1784,8	30,50	1122,02	25%	280,50	2,61	1,82	511,61
	EDGE	1710,2 - 1784,8	26,70	467,74	25%	116,93	2,61	1,82	213,28
PCS 1900	GSM/GPRS	1850,2 - 1909,8	30,40	1096,48	25%	274,12	2,61	1,82	499,97
	EDGE	1850,2 - 1909,8	30,16	1037,53	25%	259,38	2,61	1,82	473,09
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	26,35	431,52	100%	431,52	2,61	1,82	787,05
	HSUPA	1852,4 - 1907,6	25,58	361,41	100%	361,41	2,61	1,82	659,17
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	22,98	198,70	100%	198,70	2,61	1,82	362,41
	HSUPA	1922,4 - 1977,6	22,61	182,31	100%	182,31	2,61	1,82	332,51

#### ADDITIONAL/SECONDARY TRANSMITTERS:

##### WLAN transmitter:

Type of equipment : WLAN<sup>3</sup>  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below

Scenario 3			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
WLAN	2000	100%	2000,00

<sup>3</sup> It could be also WLAN/WiMAX combo transmitter where WLAN and WiMAX transmitters do not transmit simultaneously.

**Bluetooth transmitter:**

Type of equipment : Bluetooth<sup>4</sup>  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below


Scenario 3			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
Bluetooth	100	76%	76,43

<sup>4</sup> It could be also Bluetooth + UWB transmitter.  
 UWB contribution does not need to be considered.

**WORST CASE CONSIDERATIONS:**

- Antenna-to-user distance: 20 cm.
  - o Any antenna-to-user distance > 20 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- H5321 antenna gains: Low bands: 2.68 dBi // High bands: 2.61 dBi
  - o Any antenna gains below the specified would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- WLAN EIRP: 2000 mW
  - o Any WLAN transmitter with EIRP below 2000 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Bluetooth EIRP: 100 mW
  - o Any Bluetooth (or Bluetooth + UWB) transmitter with EIRP below 100 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Antenna-to-antenna distances: 0 cm
  - o Any antenna-to-antenna distance > 0 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.

**SAMPLE CONFIGURATION:**

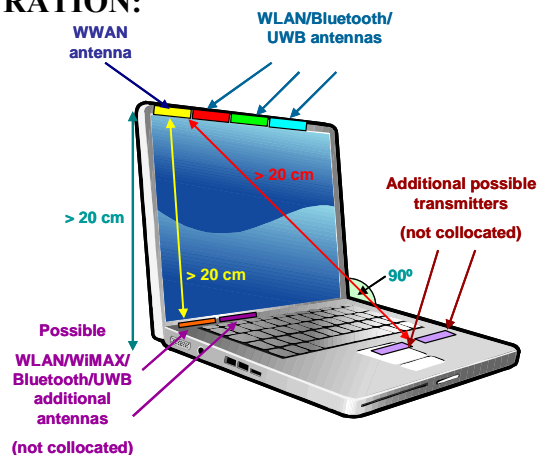

Report No.: 33376IDT.002		Page: 14 of 36
Date: 2011-09-26		Annex A

#### A.4. SCENARIO 4

Scenario 4 covers a host device where the H5321 Ericsson Mobile Broadband Module is in mobile exposure conditions (antenna-to-user distance > 20 cm) and it is collocated with a WiMAX transmitter (H5321 antenna-to-WiMAX antenna distance < 20 cm) which is also in mobile exposure conditions.

WiMAX transmitter may have other antennas in portable exposure conditions but they are not collocated with H5321 Ericsson Mobile Broadband Module antenna.

Other transmitters may be installed in the same host platform but they are not collocated with H5321 Ericsson Mobile Broadband Module.

#### MAIN/PRIMARY TRANSMITTER:

Type of equipment : Ericsson Mobile Broadband Module  
 Trade mark : Ericsson  
 Model : H5321  
 FCC ID / IC : VV7-MBMH5321 / 287AG-MBMH5321  
 Maximum antenna gain : Low bands: 2.68 dBi // High bands: 2.61 dBi  
 Output power : See table below

Frequency Band	Mode	Frequency range (MHz)	Maximum conducted output power (dBm)	Maximum conducted output power (mW)	Duty Cycle	Equivalent conducted output power (mW)	Maximum antenna gain (dBi)	Maximum antenna gain (numerical)	EIRP (mW)
GSM 850	GSM/GPRS	824,2 - 848,8	33,51	2243,88	25%	560,97	2,68	1,85	1039,78
	EDGE	824,2 - 848,8	31,17	1309,18	25%	327,30	2,68	1,85	606,65
FDD V	WCDMA/HSDPA	826,4 - 846,6	28,18	657,66	100%	657,66	2,68	1,85	1218,99
	HSUPA	826,4 - 846,6	27,62	578,10	100%	578,10	2,68	1,85	1071,52
FDD VI	WCDMA/HSDPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
	HSUPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
E-GSM 900	GSM/GPRS	880,2 - 914,8	32,60	1819,70	25%	454,93	2,68	1,85	843,22
	EDGE	880,2 - 914,8	27,60	575,44	25%	143,86	2,68	1,85	266,65
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	23,11	204,83	100%	204,83	2,68	1,85	379,66
	HSUPA	882,4 - 912,6	24,27	267,18	100%	267,18	2,68	1,85	495,22
DCS 1800	GSM/GPRS	1710,2 - 1784,8	30,50	1122,02	25%	280,50	2,61	1,82	511,61
	EDGE	1710,2 - 1784,8	26,70	467,74	25%	116,93	2,61	1,82	213,28
PCS 1900	GSM/GPRS	1850,2 - 1909,8	30,40	1096,48	25%	274,12	2,61	1,82	499,97
	EDGE	1850,2 - 1909,8	30,16	1037,53	25%	259,38	2,61	1,82	473,09
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	26,35	431,52	100%	431,52	2,61	1,82	787,05
	HSUPA	1852,4 - 1907,6	25,58	361,41	100%	361,41	2,61	1,82	659,17
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	22,98	198,70	100%	198,70	2,61	1,82	362,41
	HSUPA	1922,4 - 1977,6	22,61	182,31	100%	182,31	2,61	1,82	332,51

#### ADDITIONAL/SECONDARY TRANSMITTERS:

##### WiMAX transmitter:

Type of equipment : WiMAX<sup>5</sup>  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below


Scenario 4			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
WiMAX	2000	100%	2000,00

<sup>5</sup> It could be also WLAN/WiMAX combo transmitter where WLAN and WiMAX transmitters do not transmit simultaneously.

**WORST CASE CONSIDERATIONS:**

- Antenna-to-user distance: 20 cm.
  - o Any antenna-to-user distance > 20 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- H5321 antenna gains: Low bands: 2.68 dBi // High bands: 2.61 dBi
  - o Any antenna gains below the specified would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- WiMAX EIRP: 2000 mW
  - o Any WiMAX transmitter with EIRP below 2000 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Antenna-to-antenna distances: 0 cm
  - o Any antenna-to-antenna distance > 0 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.

**SAMPLE CONFIGURATION:**

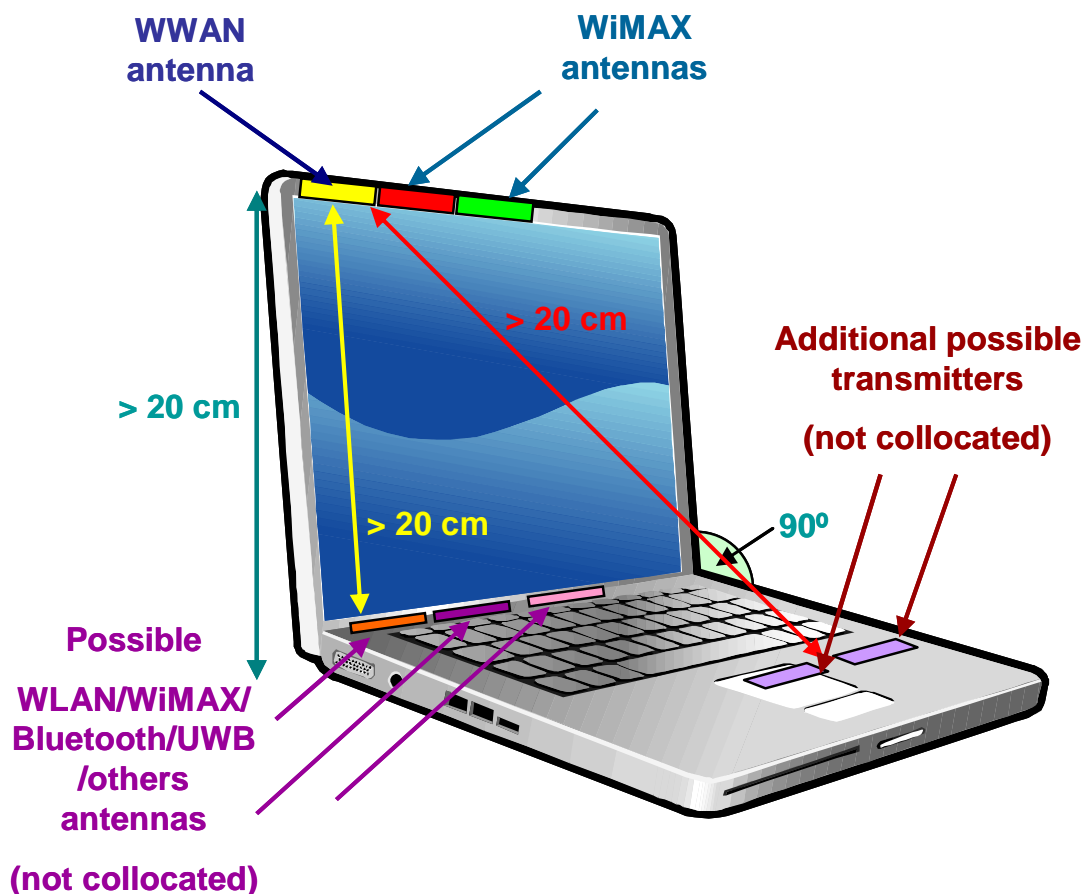

Report No.: 33376IDT.002  Date: 2011-09-26		Page: 16 of 36  Annex A
---	--	-------------------------------



## A.5. SCENARIO 5

Scenario 5 covers a host device where the H5321 Ericsson Mobile Broadband Module is in mobile exposure conditions (antenna-to-user distance > 20 cm) and it is collocated with a WiMAX transmitter and a Bluetooth transmitter (H5321 antenna-to-WiMAX/Bluetooth antenna distance < 20 cm) which are also in mobile exposure conditions.

WiMAX transmitter may have other antennas in portable exposure conditions but they are not collocated with H5321 Ericsson Mobile Broadband Module antenna.

Other transmitters may be installed in the same host platform but they are not collocated with H5321 Ericsson Mobile Broadband Module.

### MAIN/PRIMARY TRANSMITTER:

#### WWAN transmitter:

Type of equipment : Ericsson Mobile Broadband Module  
 Trade mark : Ericsson  
 Model : H5321  
 FCC ID / IC : VV7-MBMH5321 / 287AG-MBMH5321  
 Maximum antenna gain : Low bands: 2.68 dBi // High bands: 2.61 dBi  
 Output power : See table below

Frequency Band	Mode	Frequency range (MHz)	Maximum conducted output power (dBm)	Maximum conducted output power (mW)	Duty Cycle	Equivalent conducted output power (mW)	Maximum antenna gain (dBi)	Maximum antenna gain (numerical)	EIRP (mW)
GSM 850	GSM/GPRS	824,2 - 848,8	33,51	2243,88	25%	560,97	2,68	1,85	1039,78
	EDGE	824,2 - 848,8	31,17	1309,18	25%	327,30	2,68	1,85	606,65
FDD V	WCDMA/HSDPA	826,4 - 846,6	28,18	657,66	100%	657,66	2,68	1,85	1218,99
	HSUPA	826,4 - 846,6	27,62	578,10	100%	578,10	2,68	1,85	1071,52
FDD VI	WCDMA/HSDPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
	HSUPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
E-GSM 900	GSM/GPRS	880,2 - 914,8	32,60	1819,70	25%	454,93	2,68	1,85	843,22
	EDGE	880,2 - 914,8	27,60	575,44	25%	143,86	2,68	1,85	266,65
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	23,11	204,83	100%	204,83	2,68	1,85	379,66
	HSUPA	882,4 - 912,6	24,27	267,18	100%	267,18	2,68	1,85	495,22
DCS 1800	GSM/GPRS	1710,2 - 1784,8	30,50	1122,02	25%	280,50	2,61	1,82	511,61
	EDGE	1710,2 - 1784,8	26,70	467,74	25%	116,93	2,61	1,82	213,28
PCS 1900	GSM/GPRS	1850,2 - 1909,8	30,40	1096,48	25%	274,12	2,61	1,82	499,97
	EDGE	1850,2 - 1909,8	30,16	1037,53	25%	259,38	2,61	1,82	473,09
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	26,35	431,52	100%	431,52	2,61	1,82	787,05
	HSUPA	1852,4 - 1907,6	25,58	361,41	100%	361,41	2,61	1,82	659,17
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	22,98	198,70	100%	198,70	2,61	1,82	362,41
	HSUPA	1922,4 - 1977,6	22,61	182,31	100%	182,31	2,61	1,82	332,51

### ADDITIONAL/SECONDARY TRANSMITTERS:

#### WiMAX transmitter:

Type of equipment : WiMAX<sup>6</sup>  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below

Scenario 5			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
WiMAX	2000	100%	2000,00

<sup>6</sup> It could be also WLAN/WiMAX combo transmitter where WLAN and WiMAX transmitters do not transmit simultaneously.

Report No.: 33376IDT.002		Page: 17 of 36
Date: 2011-09-26		Annex A

**Bluetooth transmitter:**

Type of equipment : Bluetooth<sup>7</sup>  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below


Scenario 5			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
Bluetooth	100	76%	76,43

<sup>7</sup> It could be also Bluetooth + UWB transmitter.  
 UWB contribution does not need to be considered.

**WORST CASE CONSIDERATIONS:**

- Antenna-to-user distance: 20 cm.
  - o Any antenna-to-user distance > 20 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- H5321 antenna gains: Low bands: 2.68 dBi // High bands: 2.61 dBi
  - o Any antenna gains below the specified would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- WiMAX EIRP: 2000 mW
  - o Any WiMAX transmitter with EIRP below 2000 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Bluetooth EIRP: 100 mW
  - o Any Bluetooth (or Bluetooth + UWB) transmitter with EIRP below 100 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Antenna-to-antenna distances: 0 cm
  - o Any antenna-to-antenna distance > 0 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.

**SAMPLE CONFIGURATION:**

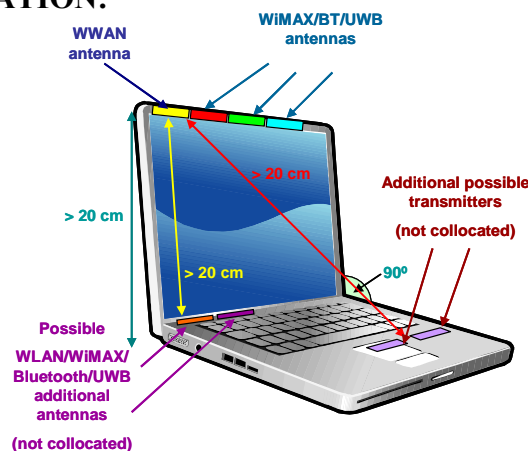

Report No.: 33376IDT.002		Page: 18 of 36
Date: 2011-09-26		Annex A

## A.6. SCENARIO 6

Scenario 6 covers a host device where the H5321 Ericsson Mobile Broadband Module is in mobile exposure conditions (antenna-to-user distance > 20 cm) and it is collocated with a WLAN transmitter and a WiMAX transmitter (H5321 antenna-to-WLAN/WiMAX antenna distance < 20 cm) which are also in mobile exposure conditions.

WLAN/WiMAX transmitters may have other antennas in portable exposure conditions but they are not collocated with H5321 Ericsson Mobile Broadband Module antenna.

Other transmitters may be installed in the same host platform but they are not collocated with H5321 Ericsson Mobile Broadband Module.

### MAIN/PRIMARY TRANSMITTER:

#### WWAN transmitter:

Type of equipment : Ericsson Mobile Broadband Module  
 Trade mark : Ericsson  
 Model : H5321  
 FCC ID / IC : VV7-MBMH5321 / 287AG-MBMH5321  
 Maximum antenna gain : Low bands: 2.68 dBi // High bands: 2.61 dBi  
 Output power : See table below

Frequency Band	Mode	Frequency range (MHz)	Maximum conducted output power (dBm)	Maximum conducted output power (mW)	Duty Cycle	Equivalent conducted output power (mW)	Maximum antenna gain (dBi)	Maximum antenna gain (numerical)	EIRP (mW)
GSM 850	GSM/GPRS	824,2 - 848,8	33,51	2243,88	25%	560,97	2,68	1,85	1039,78
	EDGE	824,2 - 848,8	31,17	1309,18	25%	327,30	2,68	1,85	606,65
FDD V	WCDMA/HSDPA	826,4 - 846,6	28,18	657,66	100%	657,66	2,68	1,85	1218,99
	HSUPA	826,4 - 846,6	27,62	578,10	100%	578,10	2,68	1,85	1071,52
FDD VI	WCDMA/HSDPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
	HSUPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
E-GSM 900	GSM/GPRS	880,2 - 914,8	32,60	1819,70	25%	454,93	2,68	1,85	843,22
	EDGE	880,2 - 914,8	27,60	575,44	25%	143,86	2,68	1,85	266,65
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	23,11	204,83	100%	204,83	2,68	1,85	379,66
	HSUPA	882,4 - 912,6	24,27	267,18	100%	267,18	2,68	1,85	495,22
DCS 1800	GSM/GPRS	1710,2 - 1784,8	30,50	1122,02	25%	280,50	2,61	1,82	511,61
	EDGE	1710,2 - 1784,8	26,70	467,74	25%	116,93	2,61	1,82	213,28
PCS 1900	GSM/GPRS	1850,2 - 1909,8	30,40	1096,48	25%	274,12	2,61	1,82	499,97
	EDGE	1850,2 - 1909,8	30,16	1037,53	25%	259,38	2,61	1,82	473,09
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	26,35	431,52	100%	431,52	2,61	1,82	787,05
	HSUPA	1852,4 - 1907,6	25,58	361,41	100%	361,41	2,61	1,82	659,17
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	22,98	198,70	100%	198,70	2,61	1,82	362,41
	HSUPA	1922,4 - 1977,6	22,61	182,31	100%	182,31	2,61	1,82	332,51

### ADDITIONAL/SECONDARY TRANSMITTERS:

#### WLAN/WiMAX transmitter:

Type of equipment : WLAN / WiMAX  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below

Scenario 6			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
WLAN / WiMAX	2000 <sup>8</sup>	100%	2000,00


<sup>8</sup> Aggregated EIRP of WLAN and WiMAX transmitters

Report No.: 33376IDT.002		Page: 19 of 36
Date: 2011-09-26		Annex A

### WORST CASE CONSIDERATIONS:

- Antenna-to-user distance: 20 cm.
  - o Any antenna-to-user distance > 20 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- H5321 antenna gains: Low bands: 2.68 dBi // High bands: 2.61 dBi
  - o Any antenna gains below the specified would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- WLAN EIRP + WiMAX EIRP: 2000 mW
  - o Any WLAN transmitter and WiMAX transmitters with aggregated EIRP below 2000 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Antenna-to-antenna distances: 0 cm
  - o Any antenna-to-antenna distance > 0 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.

### SAMPLE CONFIGURATION:

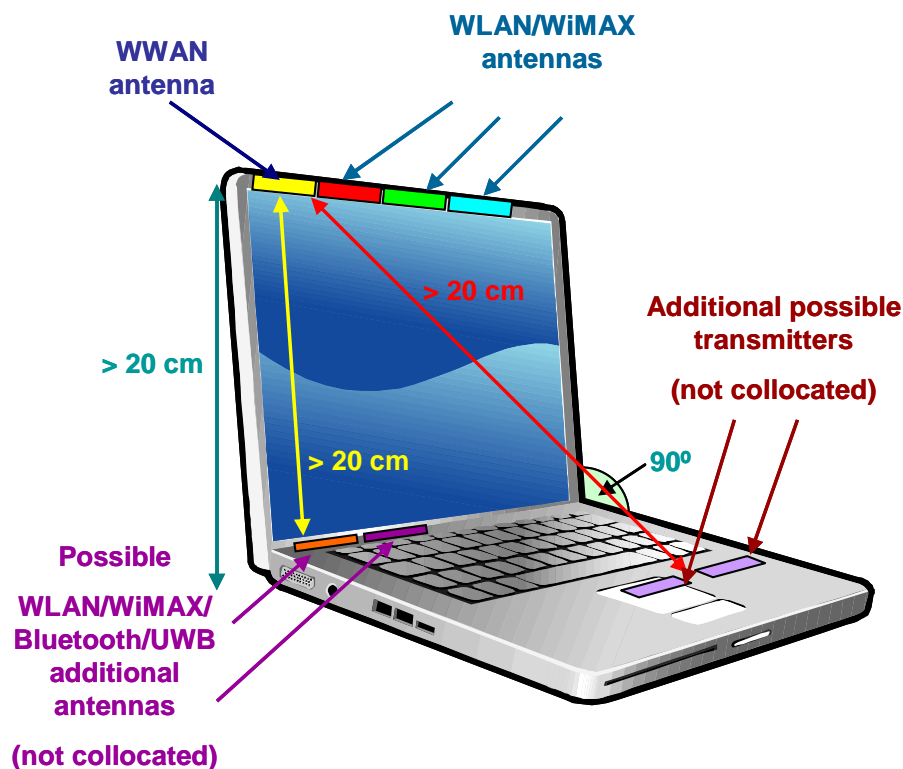

Report No.: 33376IDT.002		Page: 20 of 36
Date: 2011-09-26		Annex A

## A.7. SCENARIO 7

Scenario 6 covers a host device where the H5321 Ericsson Mobile Broadband Module is in mobile exposure conditions (antenna-to-user distance > 20 cm) and it is collocated with a WLAN transmitter a WiMAX transmitter and a Bluetooth transmitter (H5321 antenna-to-WLAN/WiMAX/Bluetooth antenna distance < 20 cm) which are also in mobile exposure conditions.

WLAN/WiMAX transmitters may have other antennas in portable exposure conditions but they are not collocated with H5321 Ericsson Mobile Broadband Module antenna.

Other transmitters may be installed in the same host platform but they are not collocated with H5321 Ericsson Mobile Broadband Module.

### MAIN/PRIMARY TRANSMITTER:

#### WWAN transmitter:

Type of equipment : Ericsson Mobile Broadband Module  
 Trade mark : Ericsson  
 Model : H5321  
 FCC ID / IC : VV7-MBMH5321 / 287AG-MBMH5321  
 Maximum antenna gain : Low bands: 2.68 dBi // High bands: 2.61 dBi  
 Output power : See table below

Frequency Band	Mode	Frequency range (MHz)	Maximum conducted output power (dBm)	Maximum conducted output power (mW)	Duty Cycle	Equivalent conducted output power (mW)	Maximum antenna gain (dBi)	Maximum antenna gain (numerical)	EIRP (mW)
GSM 850	GSM/GPRS	824,2 - 848,8	33,51	2243,88	25%	560,97	2,68	1,85	1039,78
	EDGE	824,2 - 848,8	31,17	1309,18	25%	327,30	2,68	1,85	606,65
FDD V	WCDMA/HSDPA	826,4 - 846,6	28,18	657,66	100%	657,66	2,68	1,85	1218,99
	HSUPA	826,4 - 846,6	27,62	578,10	100%	578,10	2,68	1,85	1071,52
FDD VI	WCDMA/HSDPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
	HSUPA	832,4 - 837,6	23,61	229,77	100%	229,77	2,68	1,85	425,89
E-GSM 900	GSM/GPRS	880,2 - 914,8	32,60	1819,70	25%	454,93	2,68	1,85	843,22
	EDGE	880,2 - 914,8	27,60	575,44	25%	143,86	2,68	1,85	266,65
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	23,11	204,83	100%	204,83	2,68	1,85	379,66
	HSUPA	882,4 - 912,6	24,27	267,18	100%	267,18	2,68	1,85	495,22
DCS 1800	GSM/GPRS	1710,2 - 1784,8	30,50	1122,02	25%	280,50	2,61	1,82	511,61
	EDGE	1710,2 - 1784,8	26,70	467,74	25%	116,93	2,61	1,82	213,28
PCS 1900	GSM/GPRS	1850,2 - 1909,8	30,40	1096,48	25%	274,12	2,61	1,82	499,97
	EDGE	1850,2 - 1909,8	30,16	1037,53	25%	259,38	2,61	1,82	473,09
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	26,35	431,52	100%	431,52	2,61	1,82	787,05
	HSUPA	1852,4 - 1907,6	25,58	361,41	100%	361,41	2,61	1,82	659,17
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	22,98	198,70	100%	198,70	2,61	1,82	362,41
	HSUPA	1922,4 - 1977,6	22,61	182,31	100%	182,31	2,61	1,82	332,51

#### WLAN/WiMAX transmitter:

Type of equipment : WLAN / WiMAX  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below

Scenario 6			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
WLAN / WiMAX	2000 <sup>9</sup>	100%	2000,00

<sup>9</sup> Aggregated EIRP of WLAN and WiMAX transmitters

Report No.: 33376IDT.002		Page: 21 of 36
Date: 2011-09-26		Annex A

**Bluetooth transmitter:**

Type of equipment : Bluetooth<sup>10</sup>  
 Trade mark : Any  
 Model : Any  
 FCC ID / IC : Any  
 Output power : See table below


Scenario 5			
Type of transmitter	Maximum EIRP (mW)	Duty Cycle	EIRP (mW)
Bluetooth	100	76%	76,43

<sup>10</sup> It could be also Bluetooth + UWB transmitter.  
 UWB contribution does not need to be considered.

**WORST CASE CONSIDERATIONS:**

- Antenna-to-user distance: 20 cm.
  - o Any antenna-to-user distance > 20 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- H5321 antenna gains: Low bands: 2.68 dBi // High bands: 2.61 dBi
  - o Any antenna gains below the specified would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- WLAN EIRP + WiMAX EIRP: 2000 mW
  - o Any WLAN transmitter and WiMAX transmitters with aggregated EIRP below 2000 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Bluetooth EIRP: 100 mW
  - o Any Bluetooth (or Bluetooth + UWB) transmitter with EIRP below 100 mW would be covered by the analysis included in this report as far as it would provide better exposure conditions.
- Antenna-to-antenna distances: 0 cm
  - o Any antenna-to-antenna distance > 0 cm would be covered by the analysis included in this report as far as it would provide better exposure conditions.

**SAMPLE CONFIGURATION:**

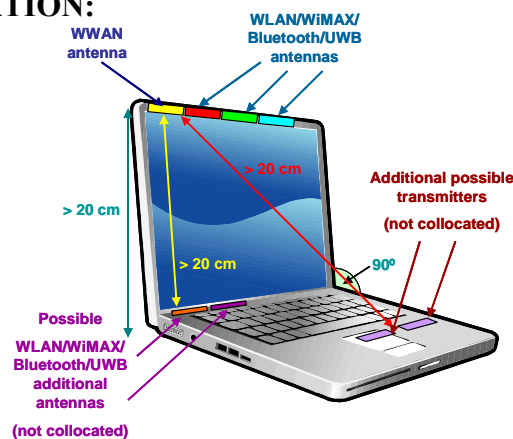

Report No.: 33376IDT.002		Page: 22 of 36
Date: 2011-09-26		Annex A

## ANNEX B

### RF EXPOSURE ASSESSMENT

<b>Report No: 33376IDT.002</b>
--------------------------------

B.1. MAXIMUM PERMISSIBLE EXPOSURE (MPE) LIMITS.....	24
B.1.1. FCC / IC LIMITS .....	24
B.1.2. EUROPEAN UNION MPE LIMITS .....	25
B.1.3. AUSTRALIA MPE LIMITS.....	25
B.1.4. VODAFONE MPE LIMITS .....	26
B.2. RF EXPOSURE ASSESSMENT – INDIVIDUAL TRANSMITTERS.....	28
B.2.1. INTRODUCTION.....	28
B.2.2. RF EXPOSURE ASSESSMENT FOR H5321 ERICSSON MOBILE BROADBAND MODULE INSTALLED IN GENERIC HOST PLATFORMS .....	28
B.2.3. RF EXPOSURE ASSESSMENT FOR SECONDARY TRANSMITTERS INSTALLED IN GENERIC HOST PLATFORMS ...	30
B.3. RF EXPOSURE ASSESSMENT – COLLOCATION CONSIDERATIONS..	30
B.3.1. INTRODUCTION.....	30
B.3.2. FCC / IC REQUIREMENTS .....	30
B.3.3. EUROPEAN UNION REQUIREMENTS.....	32
B.3.4. AUSTRALIA REQUIREMENTS .....	33
B.3.5. VODAFONE REQUIREMENTS .....	35

Report No.: 33376IDT.002		Page 23 of 36
Date: 2011-09-26		Annex B

## B.1. MAXIMUM PERMISSIBLE EXPOSURE (MPE) LIMITS

### B.1.1. FCC / IC LIMITS

#### Normative documents:

- OET Bulletin 65 Edition 97-01 August 1997 - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
- FCC 47 CFR § 1.1307 - Actions that may have a significant environmental effect, for which Environmental Assessments (EAs) must be prepared.
- FCC 47 CFR § 1.1310 - Radiofrequency radiation exposure limits.1999/519/EC Council Recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)
- RSS-102 Issue 4 - March 2010

#### Reference levels:

The table below is excerpted from Table 1B of 47 CFR 1.1310 titled Limits for Maximum Permissible Exposure (MPE), Limits for General Population/Uncontrolled Exposure:

Frequency Range (MHz)	Power density ( $\frac{mW}{cm^2}$ )	Averaging time (minutes)
300 – 1500	$\frac{f(MHz)}{1500}$	30
1500 – 100.000	1.0	30

The table below is excerpted from item 4.2 of RSS-102 Issue 4, titled RF Field Strength Limits for Devices Used by the General Public:

Frequency Range (MHz)	Power density ( $\frac{W}{m^2}$ )	Averaging time (minutes)
300 – 1500	$f(MHz) / 150$	6
1500 – 100.000	10	6

#### MPE limits:

- Main/Primary transmitter (H5321 Ericsson Mobile Broadband Module):

Frequency Band	Mode	Frequency Range (MHz)	Reference frequency (MHz)	MPE limit ( $S_{ca}$ ) ( $\frac{mW}{cm^2}$ )
GSM 850	GSM/GPRS	824,2 - 848,8	824,20	0,5494667
	EDGE	824,2 - 848,8	824,20	0,5494667
FDD V	WCDMA/HSDPA	826,4 - 846,6	826,40	0,5509333
	HSUPA	826,4 - 846,6	826,40	0,5509333
PCS 1900	GSM/GPRS	1850,2 - 1909,8	1850,20	1,0000000
	EDGE	1850,2 - 1909,8	1850,20	1,0000000
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	1852,40	1,0000000
	HSUPA	1852,4 - 1907,6	1852,40	1,0000000

Report No.: 33376IDT.002		Page: 24 of 36
Date: 2011-09-26		Annex B



- Additional/Secondary transmitters: All the transmission frequencies for collocated transmitter modules are above 1.5 GHz, so that the MPE limit is 1 mW/cm<sup>2</sup>.

### B.1.2. EUROPEAN UNION MPE LIMITS

#### Normative document:

- EN 62311:2008 - Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz)
- 1999/519/EC Council Recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

#### Reference levels:

The table below is excerpted from Table 2 of 1999/519/EC, titled “Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)”:

Frequency range	E-field strength ( $\frac{V}{m}$ )	H-field strength ( $\frac{A}{m}$ )	B-field ( $\mu T$ )	Equivalent plane wave power density $S_{eq}$ ( $\frac{W}{m^2}$ )
400 - 2000 MHz	$1,375 \cdot f(MHz)^{1/2}$	$0,0037 \cdot f(MHz)^{1/2}$	$0,0046 \cdot f(MHz)^{1/2}$	$\frac{f(MHz)}{200}$
2 - 300 GHz	61	0,16	0,2	10

#### MPE limits:

- Main/Primary transmitter (H5321 Ericsson Mobile Broadband Module):

Frequency Band	Mode	Frequency Range (MHz)	Reference frequency (MHz)	MPE limit ( $S_{eq}$ ) ( $\frac{mW}{cm^2}$ )
E-GSM 900	GSM/GPRS	880,2 - 914,8	880,20	0,4401000
	EDGE	880,2 - 914,8	880,20	0,4401000
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	882,40	0,4412000
	HSUPA	882,4 - 912,6	882,40	0,4412000
DCS 1800	GSM/GPRS	1710,2 - 1784,8	1710,20	0,8551000
	EDGE	1710,2 - 1784,8	1710,20	0,8551000
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	1922,40	0,9612000
	HSUPA	1922,4 - 1977,6	1922,40	0,9612000

- Additional/Secondary transmitters: All the transmission frequencies for collocated transmitter modules are above 2 GHz, so that the MPE limit is 1 mW/cm<sup>2</sup>.

### B.1.3. AUSTRALIA MPE LIMITS

#### Normative documents:

- Radiocommunications (Electromagnetic Radiation – Human Exposure) Standard 2003

Report No.: 33376IDT.002		Page: 25 of 36
Date: 2011-09-26		Annex B

- ARPANSA RPS No. 3 – Maximum Exposure Levels to Radiofrequency Fields (3 kHz to 300 GHz)
- AS 2772.2-1998: Radiofrequency radiation - Part 2: Principles and methods of measurement - 300 kHz to 100 GHz

**Reference levels:**

The table below is excerpted from Table 7 of ARPANSA RPS No. 3, titled “Reference levels for time averaged exposure to RMS electric and magnetic fields (unperturbed rms values)”:

Exposure category	Frequency range	E-field strength ( $\frac{V}{m}$ rms)	H-field strength ( $\frac{A}{m}$ rms)	Equivalent plane wave power density $S_{eq}$ ( $\frac{W}{m^2}$ )	Equivalent plane wave power density $S_{eq}$ ( $\frac{mW}{cm^2}$ )
General public	400 MHz - 2 GHz	$1,37 \cdot f(MHz)^{1/2}$	$0,00364 \cdot f(MHz)^{1/2}$	$\frac{f(MHz)}{200}$	$\frac{f(MHz)}{2000}$
General public	2 - 300 GHz	61	0,16	10	1

**MPE limits:**

- Main/Primary transmitter (H5321 Ericsson Mobile Broadband Module):

Frequency Band	Mode	Frequency Range (MHz)	Reference frequency (MHz)	MPE limit ( $S_{eq}$ ) ( $\frac{mW}{cm^2}$ )
FDD V	WCDMA/HSDPA	826,4 - 846,6	826,40	0,4132000
	HSUPA	826,4 - 846,6	826,40	0,4132000
E-GSM 900	GSM/GPRS	880,2 - 914,8	880,20	0,4401000
	EDGE	880,2 - 914,8	880,20	0,4401000
DCS 1800	GSM/GPRS	1710,2 - 1784,8	1710,20	0,8551000
	EDGE	1710,2 - 1784,8	1710,20	0,8551000
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	1922,40	0,9612000
	HSUPA	1922,4 - 1977,6	1922,40	0,9612000

- Additional/Secondary transmitters: All the transmission frequencies for collocated transmitter modules are above 2 GHz, so that the MPE limit is  $1 \text{ mW/cm}^2$ .

**B.1.4. VODAFONE MPE LIMITS**

**Normative document:**

- 1999/519/EC Council Recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

Report No.: 33376IDT.002		Page: 26 of 36
Date: 2011-09-26		Annex B

**Reference levels:**

The table below is excerpted from Table 2 of 1999/519/EC, titled “Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)”:

Exposure category	Frequency range	E-field strength ( $\frac{V}{m}$ rms)	H-field strength ( $\frac{A}{m}$ rms)	Equivalent plane wave power density $S_{eq}$ ( $\frac{W}{m^2}$ )	Equivalent plane wave power density $S_{eq}$ ( $\frac{mW}{cm^2}$ )
General public	400 MHz - 2 GHz	$1,37 \cdot f(MHz)^{1/2}$	$0,00364 \cdot f(MHz)^{1/2}$	$\frac{f(MHz)}{200}$	$\frac{f(MHz)}{2000}$
General public	2 - 300 GHz	61	0,16	10	1

**MPE limits:**

- Main/Primary transmitter (H5321 Ericsson Mobile Broadband Module):

Frequency Band	Mode	Frequency Range (MHz)	Reference frequency (MHz)	MPE limit ( $S_{Lim}$ ) ( $\frac{mW}{cm^2}$ )
GSM 850	GSM/GPRS	824,2 - 848,8	824,20	0,4121000
	EDGE	824,2 - 848,8	824,20	0,4121000
FDD V	WCDMA/HSDPA	826,4 - 846,6	826,40	0,4132000
	HSUPA	826,4 - 846,6	826,40	0,4132000
FDD VI	WCDMA/HSDPA	832,4 - 837,6	832,40	0,4162000
	HSUPA	832,4 - 837,6	832,40	0,4162000
E-GSM 900	GSM/GPRS	880,2 - 914,8	880,20	0,4401000
	EDGE	880,2 - 914,8	880,20	0,4401000
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	882,40	0,4412000
	HSUPA	882,4 - 912,6	882,40	0,4412000
DCS 1800	GSM/GPRS	1710,2 - 1784,8	1710,20	0,8551000
	EDGE	1710,2 - 1784,8	1710,20	0,8551000
PCS 1900	GSM/GPRS	1850,2 - 1909,8	1850,20	0,9251000
	EDGE	1850,2 - 1909,8	1850,20	0,9251000
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	1852,40	0,9262000
	HSUPA	1852,4 - 1907,6	1852,40	0,9262000
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	1922,40	0,9612000
	HSUPA	1922,4 - 1977,6	1922,40	0,9612000

- Additional/Secondary transmitters: All the transmission frequencies for WLAN and Bluetooth modules are above 2 GHz, so that the MPE limit is  $1 \text{ mW/cm}^2$ .

Report No.: 33376IDT.002		Page: 27 of 36
Date: 2011-09-26		Annex B

## B.2. RF EXPOSURE ASSESSMENT – INDIVIDUAL TRANSMITTERS

### B.2.1. INTRODUCTION

Calculations to predict power density levels in the far-field of the antenna are made by use of the following equation:

$$S = \frac{P \cdot G}{4\pi R^2} = \frac{EIRP}{4\pi R^2}$$

where: S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

### B.2.2. RF EXPOSURE ASSESSMENT FOR H5321 ERICSSON MOBILE BROADBAND MODULE INSTALLED IN GENERIC HOST PLATFORMS

#### FCC / IC REQUIREMENTS

Frequency Band	Mode	Frequency Range (MHz)	EIRP (mW)	Evaluation distance (R) (cm)	Power Density (S <sub>eq</sub> ) $S = \frac{P \cdot G}{4\pi R^2} = \frac{EIRP}{4\pi R^2}$ ( $\frac{mW}{cm^2}$ )	MPE limit (S <sub>Lim</sub> ) ( $\frac{mW}{cm^2}$ )	COMPLIANCE (S <sub>eq</sub> < S <sub>Lim</sub> ) ( $\frac{mW}{cm^2}$ )
GSM 850	GSM/GPRS	824,2 - 848,8	1039,78	20,00	0,2068570	0,5494667	COMPLIANT
	EDGE	824,2 - 848,8	606,65	20,00	0,1206897	0,5494667	COMPLIANT
FDD V	WCDMA/HSDPA	826,4 - 846,6	1218,99	20,00	0,2425103	0,5509333	COMPLIANT
	HSUPA	826,4 - 846,6	1071,52	20,00	0,2131720	0,5509333	COMPLIANT
PCS 1900	GSM/GPRS	1850,2 - 1909,8	499,97	20,00	0,0994650	1,0000000	COMPLIANT
	EDGE	1850,2 - 1909,8	473,09	20,00	0,0941175	1,0000000	COMPLIANT
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	787,05	20,00	0,1565778	1,0000000	COMPLIANT
	HSUPA	1852,4 - 1907,6	659,17	20,00	0,1311385	1,0000000	COMPLIANT

#### EUROPEAN UNION REQUIREMENTS

Frequency Band	Mode	Frequency Range (MHz)	EIRP (mW)	Evaluation distance (R) (cm)	Power Density (S <sub>eq</sub> ) $S = \frac{P \cdot G}{4\pi R^2} = \frac{EIRP}{4\pi R^2}$ ( $\frac{mW}{cm^2}$ )	MPE limit (S <sub>Lim</sub> ) ( $\frac{mW}{cm^2}$ )	COMPLIANCE (S <sub>eq</sub> < S <sub>Lim</sub> ) ( $\frac{mW}{cm^2}$ )
E-GSM 900	GSM/GPRS	880,2 - 914,8	843,22	20,00	0,1677529	0,4401000	COMPLIANT
	EDGE	880,2 - 914,8	266,65	20,00	0,0530481	0,4401000	COMPLIANT
FDD VIII	GSM/GPRS	882,4 - 912,6	379,66	20,00	0,0755319	0,4412000	COMPLIANT
	EDGE	882,4 - 912,6	495,22	20,00	0,0985213	0,4412000	COMPLIANT
DCS 1800	GSM/GPRS	1710,2 - 1784,8	511,61	20,00	0,1017818	0,8551000	COMPLIANT
	EDGE	1710,2 - 1784,8	213,28	20,00	0,0424297	0,8551000	COMPLIANT
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	362,41	20,00	0,0720991	0,9612000	COMPLIANT
	HSUPA	1922,4 - 1977,6	332,51	20,00	0,0661500	0,9612000	COMPLIANT

Report No.: 33376IDT.002		Page: 28 of 36
Date: 2011-09-26		Annex B

### AUSTRALIA REQUIREMENTS

Frequency Band	Mode	Frequency Range (MHz)	EIRP (mW)	Evaluation distance (R) (cm)	Power Density ( $S_{eq}$ ) $S = \frac{P \cdot G}{4\pi R^2} = \frac{EIRP}{4\pi R^2}$ $\left(\frac{mW}{cm^2}\right)$	MPE limit ( $S_{Lim}$ ) $\left(\frac{mW}{cm^2}\right)$	COMPLIANCE ( $S_{eq} < S_{Lim}$ ) $\left(\frac{mW}{cm^2}\right)$
FDD V	WCDMA/HSDPA	826,4 - 846,6	1218,99	20,00	0,2425103	0,4132000	COMPLIANT
	HSUPA	826,4 - 846,6	1071,52	20,00	0,2131720	0,4132000	COMPLIANT
E-GSM 900	GSM/GPRS	880,2 - 914,8	843,22	20,00	0,1677529	0,4401000	COMPLIANT
	EDGE	880,2 - 914,8	266,65	20,00	0,0530481	0,4401000	COMPLIANT
DCS 1800	GSM/GPRS	1710,2 - 1784,8	511,61	20,00	0,1017818	0,8551000	COMPLIANT
	EDGE	1710,2 - 1784,8	213,28	20,00	0,0424297	0,8551000	COMPLIANT
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	362,41	20,00	0,0720991	0,9612000	COMPLIANT
	HSUPA	1922,4 - 1977,6	332,51	20,00	0,0661500	0,9612000	COMPLIANT

### VODAFONE REQUIREMENTS

Frequency Band	Mode	Frequency Range (MHz)	EIRP (mW)	Evaluation distance (R) (cm)	Power Density ( $S_{eq}$ ) $S = \frac{P \cdot G}{4\pi R^2} = \frac{EIRP}{4\pi R^2}$ $\left(\frac{mW}{cm^2}\right)$	MPE limit ( $S_{Lim}$ ) $\left(\frac{mW}{cm^2}\right)$	COMPLIANCE ( $S_{eq} < S_{Lim}$ ) $\left(\frac{mW}{cm^2}\right)$
GSM 850	GSM/GPRS	824,2 - 848,8	1039,78	20	0,2068570	0,4121000	COMPLIANT
	EDGE	824,2 - 848,8	606,65	20	0,1206897	0,4121000	COMPLIANT
FDD V	WCDMA/HSDPA	826,4 - 846,6	1218,99	20	0,2425103	0,4132000	COMPLIANT
	HSUPA	826,4 - 846,6	1071,52	20	0,2131720	0,4132000	COMPLIANT
FDD VI	WCDMA/HSDPA	832,4 - 837,6	425,89	20	0,0847286	0,4162000	COMPLIANT
	HSUPA	832,4 - 837,6	425,89	20	0,0847286	0,4162000	COMPLIANT
E-GSM 900	GSM/GPRS	880,2 - 914,8	843,22	20	0,1677529	0,4401000	COMPLIANT
	EDGE	880,2 - 914,8	266,65	20	0,0530481	0,4401000	COMPLIANT
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	379,66	20	0,0755319	0,4412000	COMPLIANT
	HSUPA	882,4 - 912,6	495,22	20	0,0985213	0,4412000	COMPLIANT
DCS 1800	GSM/GPRS	1710,2 - 1784,8	511,61	20	0,1017818	0,8551000	COMPLIANT
	EDGE	1710,2 - 1784,8	213,28	20	0,0424297	0,8551000	COMPLIANT
PCS 1900	GSM/GPRS	1850,2 - 1909,8	499,97	20	0,0994650	0,9251000	COMPLIANT
	EDGE	1850,2 - 1909,8	473,09	20	0,0941175	0,9251000	COMPLIANT
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	787,05	20	0,1565778	0,9262000	COMPLIANT
	HSUPA	1852,4 - 1907,6	659,17	20	0,1311385	0,9262000	COMPLIANT
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	362,41	20	0,0720991	0,9612000	COMPLIANT
	HSUPA	1922,4 - 1977,6	332,51	20	0,0661500	0,9612000	COMPLIANT

### B.2.3. RF EXPOSURE ASSESSMENT FOR SECONDARY TRANSMITTERS INSTALLED IN GENERIC HOST PLATFORMS

Model name	FCC ID	EIRP (mW)	Evaluation distance (cm)	Power Density ( $S_{eq}$ ) $S = \frac{P \cdot G}{4\pi R^2} = \frac{EIRP}{4\pi R^2}$ $\left(\frac{mW}{cm^2}\right)$	MPE limit ( $S_{Lim}$ ) $\left(\frac{mW}{cm^2}\right)$	COMPLIANCE ( $S_{eq} < S_{Lim}$ )
Scenario 1	Bluetooth	76,43	20,00	0,0152046	1,0000000	COMPLIANT
Scenario 2	WLAN	2000,00	20,00	0,3978874	1,0000000	COMPLIANT
Scenario 3	WLAN	2000,00	20,00	0,3978874	1,0000000	COMPLIANT
	Bluetooth	76,43	20,00	0,0152046	1,0000000	COMPLIANT
Scenario 4	WiMAX	2000,00	20,00	0,3978874	1,0000000	COMPLIANT
Scenario 5	WiMAX	2000,00	20,00	0,3978874	1,0000000	COMPLIANT
	Bluetooth	76,43	20,00	0,0152046	1,0000000	COMPLIANT
Scenario 6	WLAN	2000,00	20,00	0,3978874	1,0000000	COMPLIANT
	WiMAX		20,00	0,0081	1,0000000	COMPLIANT
Scenario 7	WLAN	2000,00	20,00	0,3978874	1,0000000	COMPLIANT
	WiMAX		20,00	0,0112	1,0000000	COMPLIANT
	Bluetooth	76,43	20,00	0,0152046	1,0000000	COMPLIANT

### B.3. RF EXPOSURE ASSESSMENT – COLLOCATION CONSIDERATIONS

#### B.3.1. INTRODUCTION

In situations where simultaneous exposure to fields of different equipment and frequencies occurs, the possibility that these exposures will be additive in their effects must be considered. Calculations based on this additivity are performed by the sum of relative exposure for each equipment according to the following compliance criteria:

$$\sum_1^N \frac{S_{eqn}}{S_{Limn}} = \frac{S_{eq1}}{S_{Lim1}} + \frac{S_{eq2}}{S_{Lim2}} + \dots + \frac{S_{eqN}}{S_{LimN}} \leq 1$$

where:

$S_{eq}$  is the power density of the electromagnetic field caused, at a given distance (evaluation distance), by a specific equipment transmitting at a defined frequency.

$S_{Lim}$  is the MPE limit for the evaluated transmission frequency.

#### B.3.2. FCC / IC REQUIREMENTS

#### RELATIVE EXPOSURE FOR H5321 ERICSSON BROADBAND MODULE

Frequency Band	Mode	Frequency Range (MHz)	$S_{eq}$	$S_{Lim}$	$\frac{S_{eq}}{S_{Lim}}$
GSM 850	GSM/GPRS	824,2 - 848,8	0,2068570	0,5494667	0,3764686
	EDGE	824,2 - 848,8	0,1206897	0,5494667	0,2196488

Report No.: 33376IDT.002		Page: 30 of 36
Date: 2011-09-26		Annex B

FDD V	WCDMA/HSDPA	826,4 - 846,6	0,2425103	0,5509333	<b>0,4401808</b>
	HSUPA	826,4 - 846,6	0,2131720	0,5509333	0,3869288
PCS 1900	GSM/GPRS	1850,2 - 1909,8	0,0994650	1,0000000	0,0994650
	EDGE	1850,2 - 1909,8	0,0941175	1,0000000	0,0941175
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	0,1565778	1,0000000	0,1565778
	HSUPA	1852,4 - 1907,6	0,1311385	1,0000000	0,1311385

### RELATIVE EXPOSURE FOR SECONDARY TRANSMITTERS

SCENARIO	Type of transmitter	$S_{eq}$	$S_{Lim}$	$\frac{S_{eq}}{S_{Lim}}$
Scenario 1	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 2	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
Scenario 3	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 4	WiMAX	0,3978874	1,0000000	<b>0,3978874</b>
Scenario 5	WiMAX	0,3978874	1,0000000	<b>0,3978874</b>
	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 6	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	WiMAX			
Scenario 7	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	WiMAX			
	Bluetooth	0,0152046	1,0000000	0,0152046

### SIMULTANEOUS EXPOSURE

SCENARIO	Equipment		Maximum $\frac{S_{eq}}{S_{Lim}}$	Maximum	COMPLIANCE
				$\frac{S_{Pri}}{S_{Lim\_Pri}} + \sum \frac{S_{Sec}}{S_{Lim\_Sec}}$	$\frac{S_{Pri}}{S_{Lim\_Pri}} + \sum \frac{S_{Sec}}{S_{Lim\_Sec}} < 1$
Scenario 1	Primary transmitter	Ericsson H5321	0,4401808	0,4553854	COMPLIANT
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 2	Primary transmitter	Ericsson H5321	0,4401808	0,8380682	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
Scenario 3	Primary transmitter	Ericsson H5321	0,4401808	<b>0,8532728</b>	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 4	Primary transmitter	Ericsson H5321	0,4401808	0,8380682	COMPLIANT
	Secondary transmitter	WiMAX	0,3978874		

Report No.: 33376IDT.002		Page: 31 of 36
Date: 2011-09-26		Annex B

<b>Scenario 5</b>	Primary transmitter	Ericsson H5321	0,4401808	<b>0,8532728</b>	<b>COMPLIANT</b>
	Secondary transmitter	WiMAX	0,3978874		
	Secondary transmitter	Bluetooth	0,0152046		
<b>Scenario 6</b>	Primary transmitter	Ericsson H5321	0,4401808	0,8380682	<b>COMPLIANT</b>
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	WiMAX			
<b>Scenario 7</b>	Primary transmitter	Ericsson H5321	0,4401808	<b>0,8532728</b>	<b>COMPLIANT</b>
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	WiMAX			
	Secondary transmitter	Bluetooth	0,0152046		

### B.3.3. EUROPEAN UNION REQUIREMENTS

#### RELATIVE EXPOSURE FOR H5321 ERICSSON BROADBAND MODULE

Frequency Band	Mode	Frequency Range (MHz)	$S_{eq}$	$S_{Lim}$	$\frac{S_{eq}}{S_{Lim}}$
E-GSM 900	GSM/GPRS	880,2 - 914,8	0,1677529	0,4401000	<b>0,3811701</b>
	EDGE	880,2 - 914,8	0,0530481	0,4401000	0,1205366
FDD VIII	GSM/GPRS	882,4 - 912,6	0,0755319	0,4412000	0,1711964
	EDGE	882,4 - 912,6	0,0985213	0,4412000	0,2233030
DCS 1800	GSM/GPRS	1710,2 - 1784,8	0,1017818	0,8551000	0,1190291
	EDGE	1710,2 - 1784,8	0,0424297	0,8551000	0,0496196
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	0,0720991	0,9612000	0,0750095
	HSUPA	1922,4 - 1977,6	0,0661500	0,9612000	0,0688203

#### RELATIVE EXPOSURE FOR SECONDARY TRANSMITTERS

SCENARIO	Type of transmitter	$S_{eq}$	$S_{Lim}$	$\frac{S_{eq}}{S_{Lim}}$
Scenario 1	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 2	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
Scenario 3	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 4	WiMAX	0,3978874	1,0000000	<b>0,3978874</b>
Scenario 5	WiMAX	0,3978874	1,0000000	<b>0,3978874</b>
	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 6	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	WiMAX			
Scenario 7	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	WiMAX			
	Bluetooth	0,0152046	1,0000000	0,0152046

Report No.: 33376IDT.002		Page: 32 of 36
Date: 2011-09-26		Annex B



### SIMULTANEOUS EXPOSURE

SCENARIO	Equipment		Maximum $\frac{S_{eq}}{S_{Lim}}$	Maximum $\frac{S_{Pri}}{S_{Lim\_Pri}} +$	COMPLIANCE $\frac{S_{Pri}}{S_{Lim\_Pri}} +$
				$\sum \frac{S_{Sec}}{S_{Lim\_Sec}}$	$\sum \frac{S_{Sec}}{S_{Lim\_Sec}} < 1$
Scenario 1	Primary transmitter	Ericsson H5321	0,3811701	0,3963747	COMPLIANT
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 2	Primary transmitter	Ericsson H5321	0,3811701	0,7790574	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
Scenario 3	Primary transmitter	Ericsson H5321	0,3811701	0,7942620	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 4	Primary transmitter	Ericsson H5321	0,3811701	0,7790574	COMPLIANT
	Secondary transmitter	WiMAX	0,3978874		
Scenario 5	Primary transmitter	Ericsson H5321	0,3811701	0,7942620	COMPLIANT
	Secondary transmitter	WiMAX	0,3978874		
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 6	Primary transmitter	Ericsson H5321	0,3811701	0,7790574	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	WiMAX			
Scenario 7	Primary transmitter	Ericsson H5321	0,3811701	0,7942620	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	WiMAX			
	Secondary transmitter	Bluetooth	0,0152046		

### B.3.4. AUSTRALIA REQUIREMENTS

#### RELATIVE EXPOSURE FOR H5321 ERICSSON BROADBAND MODULE

Manufacturer	Model name	Frequency range (MHz)	$S_{eq}$	$S_{Lim}$	$\frac{S_{eq}}{S_{Lim}}$
FDD V	WCDMA/HSDPA	826,4 - 846,6	0,2425103	0,4132000	0,5869077
	HSUPA	826,4 - 846,6	0,2131720	0,4132000	0,5159051
E-GSM 900	GSM/GPRS	880,2 - 914,8	0,1677529	0,4401000	0,3811701
	EDGE	880,2 - 914,8	0,0530481	0,4401000	0,1205366
DCS 1800	GSM/GPRS	1710,2 - 1784,8	0,1017818	0,8551000	0,1190291
	EDGE	1710,2 - 1784,8	0,0424297	0,8551000	0,0496196
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	0,0720991	0,9612000	0,0750095
	HSUPA	1922,4 - 1977,6	0,0661500	0,9612000	0,0688203

### RELATIVE EXPOSURE FOR SECONDARY TRANSMITTERS

SCENARIO	Type of transmitter	$S_{eq}$	$S_{Lim}$	$\frac{S_{eq}}{S_{Lim}}$
Scenario 1	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 2	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
Scenario 3	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 4	WiMAX	0,3978874	1,0000000	<b>0,3978874</b>
Scenario 5	WiMAX	0,3978874	1,0000000	<b>0,3978874</b>
	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 6	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	WiMAX			
Scenario 7	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	WiMAX			
	Bluetooth	0,0152046	1,0000000	0,0152046

### SIMULTANEOUS EXPOSURE

SCENARIO	Equipment		Maximum $\frac{S_{eq}}{S_{Lim}}$	Maximum $\frac{S_{Pri}}{S_{Lim\_Pri}} + \sum \frac{S_{Sec}}{S_{Lim\_Sec}}$	COMPLIANCE $\frac{S_{Pri}}{S_{Lim\_Pri}} + \sum \frac{S_{Sec}}{S_{Lim\_Sec}} < 1$
Scenario 1	Primary transmitter	Ericsson H5321	0,5869077	0,6021123	COMPLIANT
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 2	Primary transmitter	Ericsson H5321	0,5869077	0,9847951	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
Scenario 3	Primary transmitter	Ericsson H5321	0,5869077	<b>0,9999997</b>	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 4	Primary transmitter	Ericsson H5321	0,5869077	0,9847951	COMPLIANT
	Secondary transmitter	WiMAX	0,3978874		
Scenario 5	Primary transmitter	Ericsson H5321	0,5869077	<b>0,9999997</b>	COMPLIANT
	Secondary transmitter	WiMAX	0,3978874		
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 6	Primary transmitter	Ericsson H5321	0,5869077	0,9847951	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	WiMAX			

Report No.: 33376IDT.002		Page: 34 of 36
Date: 2011-09-26		Annex B

Scenario 7	Primary transmitter	Ericsson H5321	0,5869077	0,9999997	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	WiMAX			
	Secondary transmitter	Bluetooth	0,0152046		

### B.3.5. VODAFONE REQUIREMENTS

#### RELATIVE EXPOSURE FOR H5321 ERICSSON BROADBAND MODULE

Manufacturer	Model name	Frequency range (MHz)	S <sub>eq</sub>	S <sub>Lim</sub>	$\frac{S_{eq}}{S_{Lim}}$
GSM 850	GSM/GPRS	824,2 - 848,8	0,2068570	0,4121000	0,5019582
	EDGE	824,2 - 848,8	0,1206897	0,4121000	0,2928650
FDD V	WCDMA/HSDPA	826,4 - 846,6	0,2425103	0,4132000	<b>0,5869077</b>
	HSUPA	826,4 - 846,6	0,2131720	0,4132000	0,5159051
FDD VI	WCDMA/HSDPA	832,4 - 837,6	0,0847286	0,4162000	0,2035767
	HSUPA	832,4 - 837,6	0,0847286	0,4162000	0,2035767
E-GSM 900	GSM/GPRS	880,2 - 914,8	0,1677529	0,4401000	0,3811701
	EDGE	880,2 - 914,8	0,0530481	0,4401000	0,1205366
FDD VIII	WCDMA/HSDPA	882,4 - 912,6	0,0755319	0,4412000	0,1711964
	HSUPA	882,4 - 912,6	0,0985213	0,4412000	0,2233030
DCS 1800	GSM/GPRS	1710,2 - 1784,8	0,1017818	0,8551000	0,1190291
	EDGE	1710,2 - 1784,8	0,0424297	0,8551000	0,0496196
PCS 1900	GSM/GPRS	1850,2 - 1909,8	0,0994650	0,9251000	0,1075181
	EDGE	1850,2 - 1909,8	0,0941175	0,9251000	0,1017376
FDD II	WCDMA/HSDPA	1852,4 - 1907,6	0,1565778	0,9262000	0,1690540
	HSUPA	1852,4 - 1907,6	0,1311385	0,9262000	0,1415876
FDD I	WCDMA/HSDPA	1922,4 - 1977,6	0,0720991	0,9612000	0,0750095
	HSUPA	1922,4 - 1977,6	0,0661500	0,9612000	0,0688203

#### RELATIVE EXPOSURE FOR SECONDARY TRANSMITTERS

SCENARIO	Type of transmitter	S <sub>eq</sub>	S <sub>Lim</sub>	$\frac{S_{eq}}{S_{Lim}}$
Scenario 1	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 2	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
Scenario 3	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	Bluetooth	0,0152046	1,0000000	0,0152046
Scenario 4	WiMAX	0,3978874	1,0000000	<b>0,3978874</b>
Scenario 5	WiMAX	0,3978874	1,0000000	<b>0,3978874</b>
	Bluetooth	0,0152046	1,0000000	0,0152046

Report No.: 33376IDT.002		Page: 35 of 36
Date: 2011-09-26		Annex B

Scenario 6	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	WiMAX			
Scenario 7	WLAN	0,3978874	1,0000000	<b>0,3978874</b>
	WiMAX			
	Bluetooth	0,0152046	1,0000000	0,0152046

### SIMULTANEOUS EXPOSURE

SCENARIO	Equipment		Maximum $\frac{S_{eq}}{S_{Lim}}$	Maximum	COMPLIANCE
				$\frac{S_{Pri}}{S_{Lim\_Pri}} + \sum \frac{S_{Sec}}{S_{Lim\_Sec}}$	$\frac{S_{Pri}}{S_{Lim\_Pri}} + \sum \frac{S_{Sec}}{S_{Lim\_Sec}} < 1$
Scenario 1	Primary transmitter	Ericsson H5321	0,5869077	0,6021123	COMPLIANT
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 2	Primary transmitter	Ericsson H5321	0,5869077	0,9847951	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
Scenario 3	Primary transmitter	Ericsson H5321	0,5869077	<b>0,9999997</b>	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 4	Primary transmitter	Ericsson H5321	0,5869077	0,9847951	COMPLIANT
	Secondary transmitter	WiMAX	0,3978874		
Scenario 5	Primary transmitter	Ericsson H5321	0,5869077	<b>0,9999997</b>	COMPLIANT
	Secondary transmitter	WiMAX	0,3978874		
	Secondary transmitter	Bluetooth	0,0152046		
Scenario 6	Primary transmitter	Ericsson H5321	0,5869077	0,9847951	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	WiMAX			
Scenario 7	Primary transmitter	Ericsson H5321	0,5869077	<b>0,9999997</b>	COMPLIANT
	Secondary transmitter	WLAN	0,3978874		
	Secondary transmitter	WiMAX			
	Secondary transmitter	Bluetooth	0,0152046		