



**中认信通**  
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant: Beijing Jia An Electronic Technology Co., Ltd**

Address: No.19 Gu Cheng West Street, Shi Jing Shan District Beijing, 100043,China

**FCC ID: VVJ-DTU-LR-A-915L**

**Product Type: LP22-915**

**Standard(s): 47 CFR Part 15, Subpart C(15.247)**

**ANSI C63.10-2013**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number: CR230740211-00A**

**Date Of Issue: 2023/11/2**

**Reviewed By: Calvin Chen**

Title: RF Engineer

**Approved By: Sun Zhong**

Title: Manager

**Test Laboratory: China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>5</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>8</b>
1.2.1 EUT Operation Condition: .....	8
1.2.2 Support Equipment List and Details .....	8
1.2.3 Support Cable List and Details .....	8
1.2.4 Block Diagram of Test Setup.....	9
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>12</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>12</b>
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup .....	13
3.1.4 Test Procedure .....	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
<b>3.2 RADIATION SPURIOUS EMISSIONS.....</b>	<b>15</b>
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	16
3.2.4 Test Procedure .....	16
3.2.5 Corrected Amplitude & Margin Calculation.....	16
<b>3.3 6 DB EMISSION BANDWIDTH:.....</b>	<b>17</b>
3.3.1 Applicable Standard.....	17
3.3.2 EUT Setup.....	17
3.3.3 Test Procedure .....	17
<b>3.4 MAXIMUM CONDUCTED OUTPUT POWER: .....</b>	<b>18</b>
3.4.1 Applicable Standard.....	18
3.4.2 EUT Setup.....	18
3.4.3 Test Procedure .....	18
<b>3.5 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>19</b>
3.5.1 Applicable Standard.....	19
3.5.2 EUT Setup.....	19
3.5.3 Test Procedure .....	19
<b>3.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE: .....</b>	<b>20</b>
3.6.1 Applicable Standard.....	20
3.6.2 EUT Setup.....	20
3.6.3 Test Procedure .....	20
<b>3.7 DUTY CYCLE:.....</b>	<b>21</b>
3.7.1 EUT Setup.....	21
3.7.2 Test Procedure .....	21

**3.8 ANTENNA REQUIREMENT..... 21**  
    3.8.1 Applicable Standard.....21  
    3.8.2 Judgment.....21

**4. Test DATA AND RESULTS ..... 22**  
    **4.1 AC LINE CONDUCTED EMISSIONS..... 22**  
    **4.2 RADIATION SPURIOUS EMISSIONS ..... 25**  
    **4.3 6 dB EMISSION BANDWIDTH ..... 43**  
    **4.4 MAXIMUM CONDUCTED OUTPUT POWER..... 45**  
    **4.5 MAXIMUM POWER SPECTRAL DENSITY ..... 46**  
    **4.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE..... 48**  
    **4.7 DUTY CYCLE ..... 50**

**5. RF EXPOSURE EVALUATION ..... 51**  
    **5.1 APPLICABLE STANDARD..... 51**  
    **5. 2 PROCEDURE..... 51**  
    **5.3 MEASUREMENT RESULT ..... 51**

**6. EUT PHOTOGRAPHS ..... 52**


**7. TEST SETUP PHOTOGRAPHS ..... 53**

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230740211-00A	Original Report	2023/11/2

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Type:</b>	LP22-915
<b>EUT Model:</b>	DTU_LR_A
<b>Trade Name:</b>	
<b>Operation Frequency:</b>	905-925MHz
<b>Maximum Average Output Power (Conducted):</b>	19.04 dBm
<b>Modulation Type:</b>	GMSK
<b>Rated Input Voltage:</b>	12~36VDC
<b>Serial Number:</b>	2870-1
<b>EUT Received Date:</b>	2023/7/17
<b>EUT Received Status:</b>	Good
<p>Note: The device only equips one type of Dipole Antenna (Maximum antenna gain is 5 dBi) for sales. However, different extension cables with suction cups will be added according to different market demands. See the external photos for specific specifications. For antenna extension cables with suction cups, the manufacturer declares that the cables are the same, but the length of cables and the size of suction cups are different. Please refers to the external photos for more details. The antenna extension cables with suction cup(Ø6.0cm) and antenna without any extension cables directly connected to the EUT were selected to perform Radiation Spurious Emissions Test.</p>	

#### Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	905.0	12	910.5	23	916.0	34	921.5
2	905.5	13	911.0	24	916.5	35	922.0
3	906.0	14	911.5	25	917.0	36	922.5
4	906.5	15	912.0	26	917.5	37	923.0
5	907.0	16	912.5	27	918.0	38	923.5
6	907.5	17	913.0	28	918.5	39	924.0
7	908.0	18	913.5	29	919.0	40	924.5
8	908.5	19	914.0	30	919.5	41	925.0
9	909.0	20	914.5	31	920.0	/	/
10	909.5	21	915.0	32	920.5	/	/
11	910.0	22	915.5	33	921.0	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	905
Middle	915
Highest	925

**Antenna Information Detail▲:**

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Dipole Antenna	50	905-925MHz	5 dBi

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Accessory Information:**

NO.

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
<b>Equipment Modifications:</b>	No		
<b>EUT Exercise Software:</b>	Engineer mode		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
GMSK	default	default	default

### 1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
ORIENTAL HERO ELE.FTY	POWER ADAPTER	OH-101511201000U3- UL	E230964
CANSEC	4G DTU-Master	LP22-915	204A386953315002
Lenovo	Laptop	T460S	60PDTEK8


### 1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	NO	NO	1.2	Adapter	EUT
RS232 Cable	NO	NO	3	EUT	Laptop
RS485 Cable	NO	NO	3	EUT	4G DTU-Master




### 1.2.4 Block Diagram of Test Setup

#### AC line conducted emissions

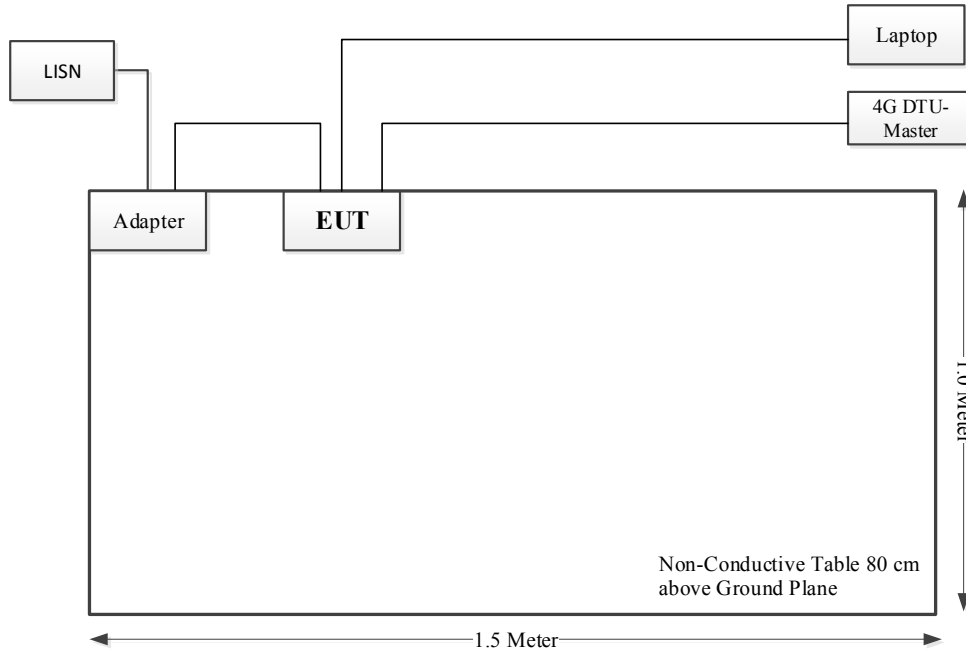

#### Spurious emissions

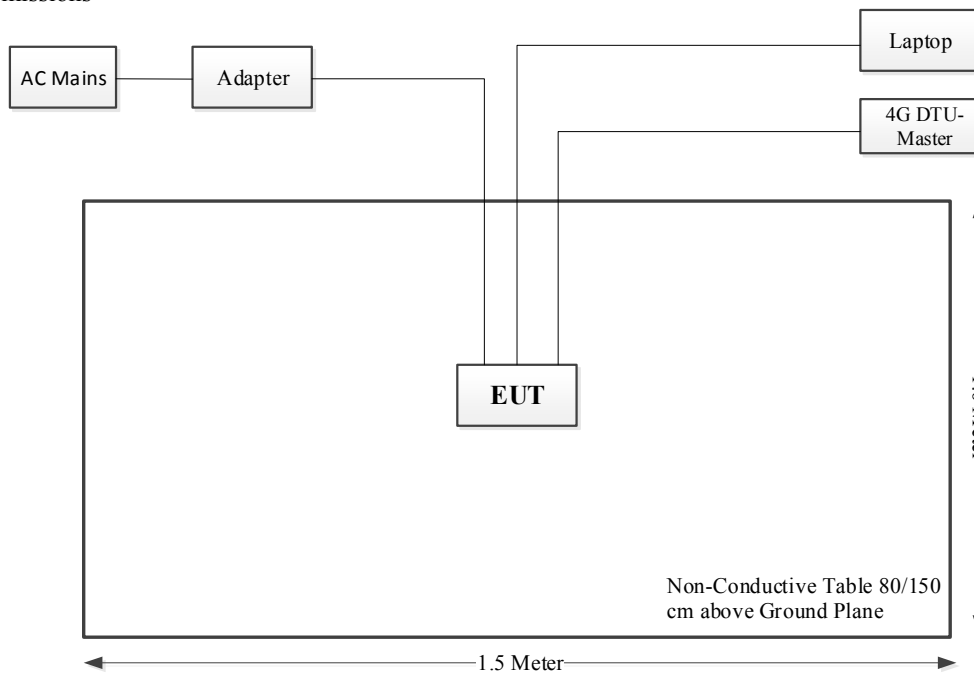

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
FCC§15.247 (i) & §1.1307	RF Exposure Evaluation	Compliant

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup



- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions


### 3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 3.2.2 EUT Setup

#### Below 1GHz:

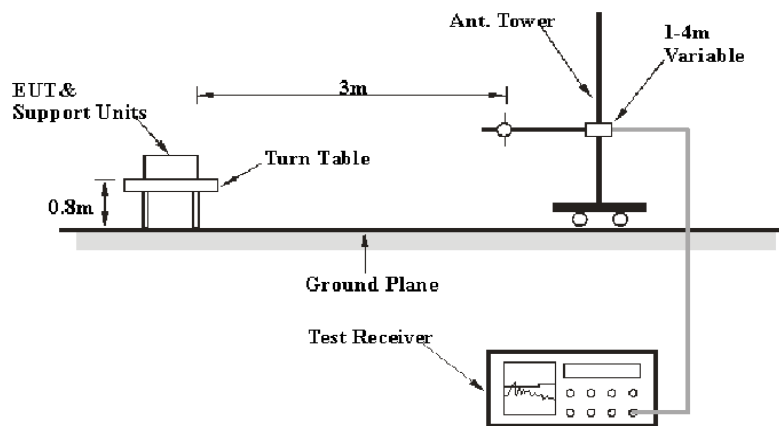

#### Above 1GHz:

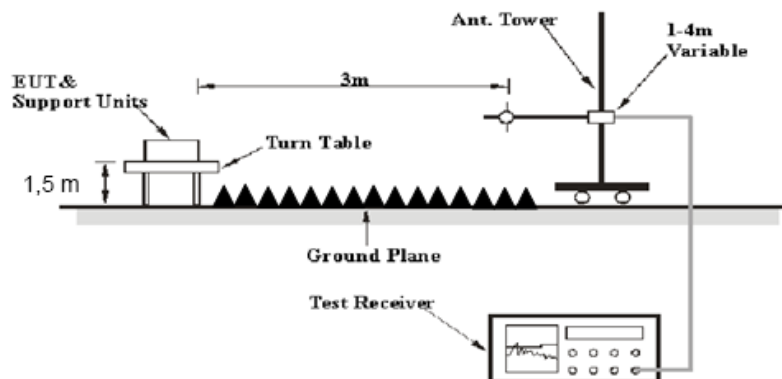

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 10 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result




### 3.3 6 dB Emission Bandwidth:

#### 3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.3.2 EUT Setup

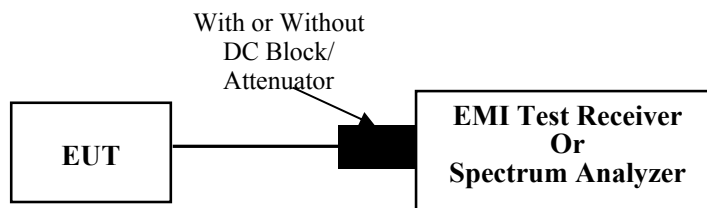

#### 3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


### 3.4 Maximum Conducted Output Power:

#### 3.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

#### 3.4.2 EUT Setup

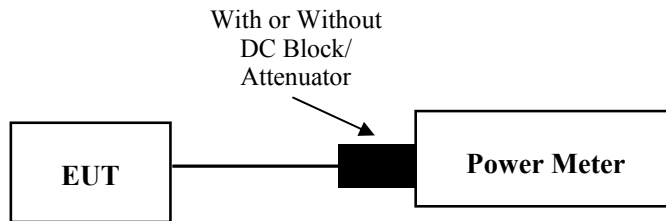

#### 3.4.3 Test Procedure

##### Average Power Test:

According to ANSI C63.10-2013 Section 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.


### 3.5 Maximum power spectral density:

#### 3.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 3.5.2 EUT Setup

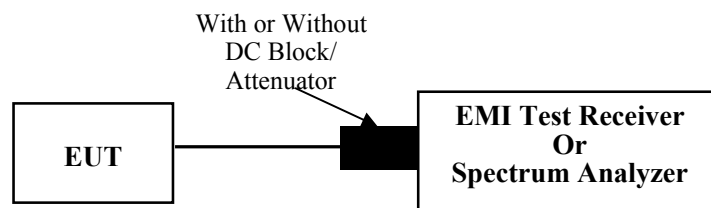

#### 3.5.3 Test Procedure

##### Duty cycle $\geq 98\%$

According to ANSI C63.10-2013 Section 11.10.3

##### Duty cycle $< 98\%$ , duty cycle variations are less than $\pm 2\%$

According to ANSI C63.10-2013 Section 11.10.5

##### Duty cycle $< 98\%$ , duty cycle variations exceed $\pm 2\%$

According to ANSI C63.10-2013 Section 11.10.7


### 3.6 100 kHz Bandwidth of Frequency Band Edge:

#### 3.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 3.6.2 EUT Setup

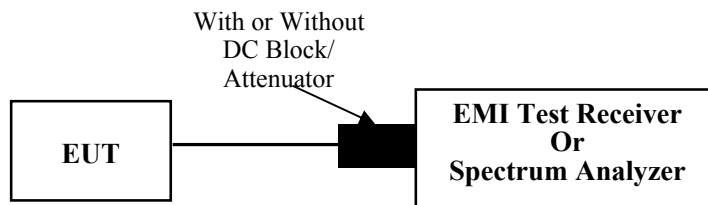

#### 3.6.3 Test Procedure


According to ANSI C63.10-2013 Section 11.11

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

### 3.7 Duty Cycle:

#### 3.7.1 EUT Setup

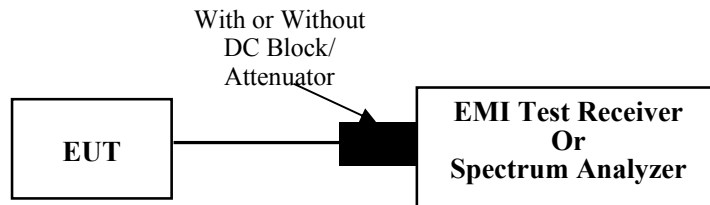

#### 3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 3.8 Antenna Requirement

#### 3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### 3.8.2 Judgment

**Compliant.** Please refer to the Antenna Information detail in Section 1.

## 4. Test DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

Serial Number:	2870-1	Test Date:	2023/11/1
Test Site:	CE	Test Mode:	Transmitting (Tested at maximum output power channel: lowest channel)
Tester:	David Huang	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	26.9	Relative Humidity: (%)	51	ATM Pressure: (kPa)	101.3
----------------------	------	---------------------------	----	------------------------	-------


#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: CR230740211-RF  
 Tester: David Huang  
 Port: Line  
 Note: Transmitting(SRD)


Date: 2023-11-01

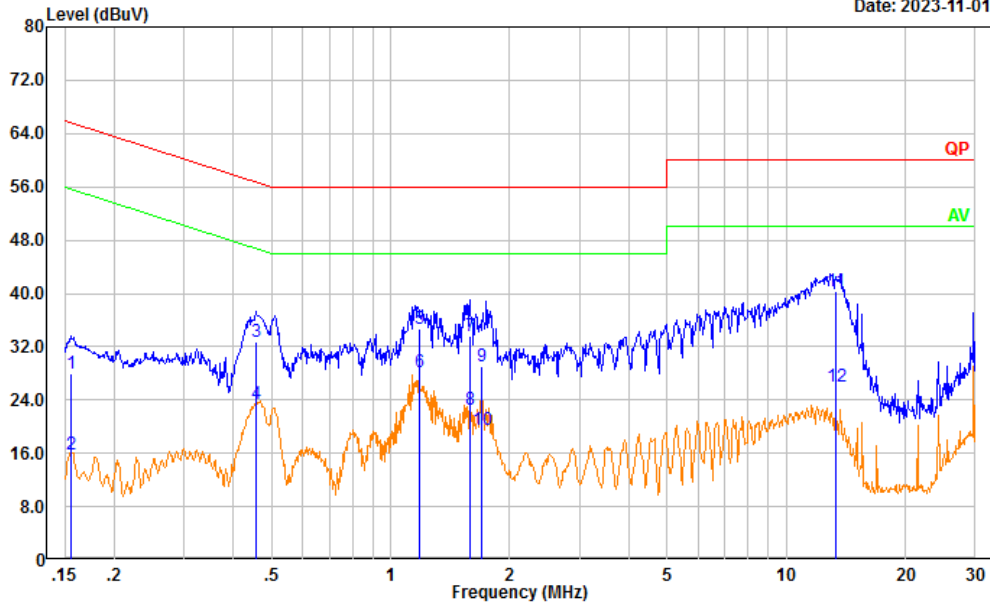

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	18.33	9.61	27.94	65.67	37.73	QP
2	0.156	6.25	9.61	15.86	55.67	39.81	Average
3	0.457	23.15	9.61	32.76	56.75	23.99	QP
4	0.457	13.91	9.61	23.52	46.75	23.23	Average
5	1.179	25.12	9.62	34.74	56.00	21.26	QP
6	1.179	18.49	9.62	28.11	46.00	17.89	Average
7	1.588	24.01	9.63	33.64	56.00	22.36	QP
8	1.588	12.93	9.63	22.56	46.00	23.44	Average
9	1.702	19.35	9.63	28.98	56.00	27.02	QP
10	1.702	9.89	9.63	19.52	46.00	26.48	Average
11	13.295	30.61	9.68	40.29	60.00	19.71	QP
12	13.295	16.36	9.68	26.04	50.00	23.96	Average

Project No.: CR230740211-RF  
 Tester: David Huang  
 Port: neutral  
 Note: Transmitting(SRD)

Date: 2023-11-01

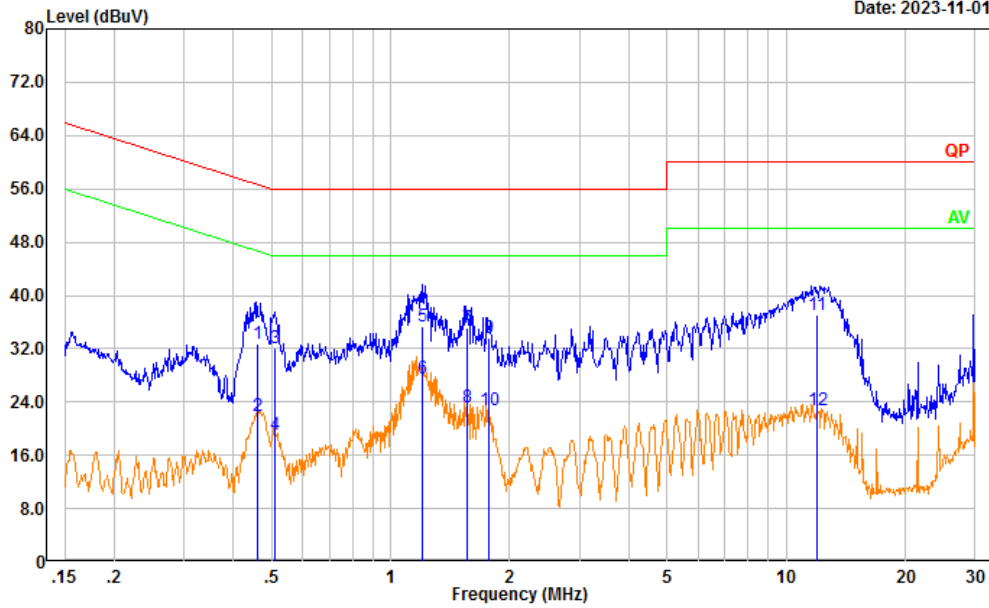

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.461	23.22	9.61	32.83	56.67	23.84	QP
2	0.461	12.21	9.61	21.82	46.67	24.85	Average
3	0.510	22.54	9.61	32.15	56.00	23.85	QP
4	0.510	9.40	9.61	19.01	46.00	26.99	Average
5	1.205	25.69	9.62	35.31	56.00	20.69	QP
6	1.205	17.81	9.62	27.43	46.00	18.57	Average
7	1.562	25.41	9.63	35.04	56.00	20.96	QP
8	1.562	13.57	9.63	23.20	46.00	22.80	Average
9	1.768	24.08	9.63	33.71	56.00	22.29	QP
10	1.768	13.23	9.63	22.86	46.00	23.14	Average
11	11.936	27.45	9.67	37.12	60.00	22.88	QP
12	11.936	13.01	9.67	22.68	50.00	27.32	Average



## 4.2 Radiation Spurious Emissions

Serial Number:	287O-1	Test Date:	2023/10/30~2023/10/31
Test Site:	966-2,966-1	Test Mode:	Transmitting
Tester:	Vic Du, coco Tian	Test Result:	Pass

### Environmental Conditions:

Temperature: (°C)	26~26.7	Relative Humidity: (%)	61~67	ATM Pressure: (kPa)	100.1~101.2
----------------------	---------	---------------------------	-------	------------------------	-------------

### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/9/18	2026/9/17
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2023/2/22	2025/2/23
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8

\* **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data:

Please refer to the below tables.

The maximum value of the fundamental (low channel 905MHz) on the X-axis:117.04dB $\mu$ V/m

The maximum value of the fundamental (low channel 905MHz) on the Y-axis:117.85dB $\mu$ V/m \*(worst case position)

The maximum value of the fundamental (low channel 905MHz) on the Z-axis:117.23dB $\mu$ V/m

The maximum value of the fundamental (low channel 905MHz) on the Y-axis:116.02dB $\mu$ V/m (EUT's antenna with extension cable(1m))

The maximum value of the fundamental (low channel 905MHz) on the Y-axis:115.02dB $\mu$ V/m (EUT's antenna with extension cable(3m))

The maximum value of the fundamental (low channel 905MHz) on the Y-axis:113.69dB $\mu$ V/m (EUT's antenna with extension cable(5m))


After pre-scan in the X, Y and Z axes of orientation, the worst-case Y-axis is below:

**1) 30MHz-1GHz**

Test plots for tested at low channel:

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: horizontal  
 Note:


Date: 2023-10-30

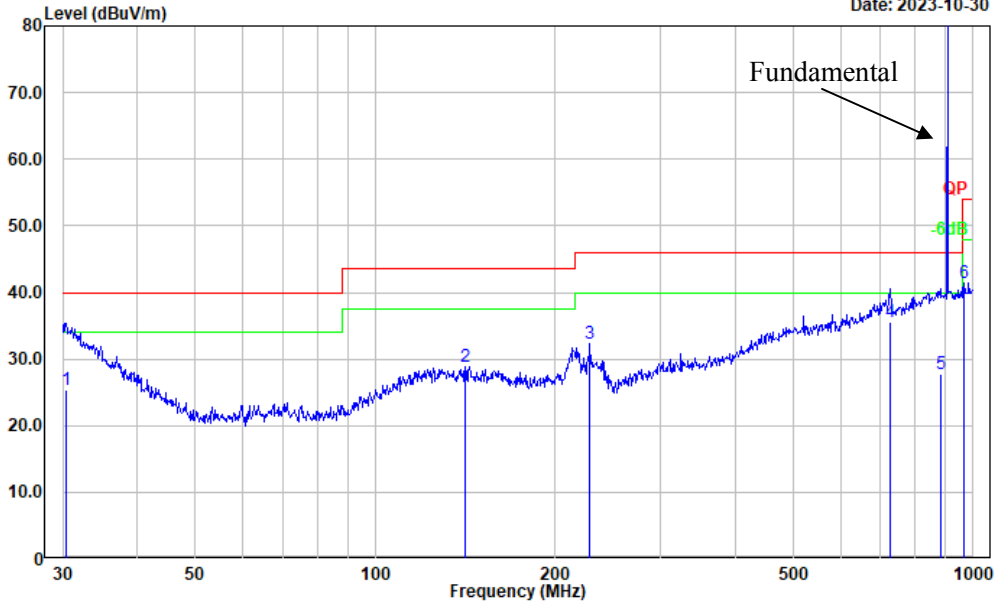

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	-2.08	27.35	25.27	40.00	14.73	QP
2	141.330	9.22	19.67	28.89	43.50	14.61	Peak
3	228.490	13.73	18.47	32.20	46.00	13.80	Peak
4	726.805	7.45	28.03	35.48	46.00	10.52	QP
5	881.407	-1.83	29.68	27.85	46.00	18.15	QP
6	965.542	11.09	30.26	41.35	54.00	12.65	Peak

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: vertical  
 Note:

Date: 2023-10-30

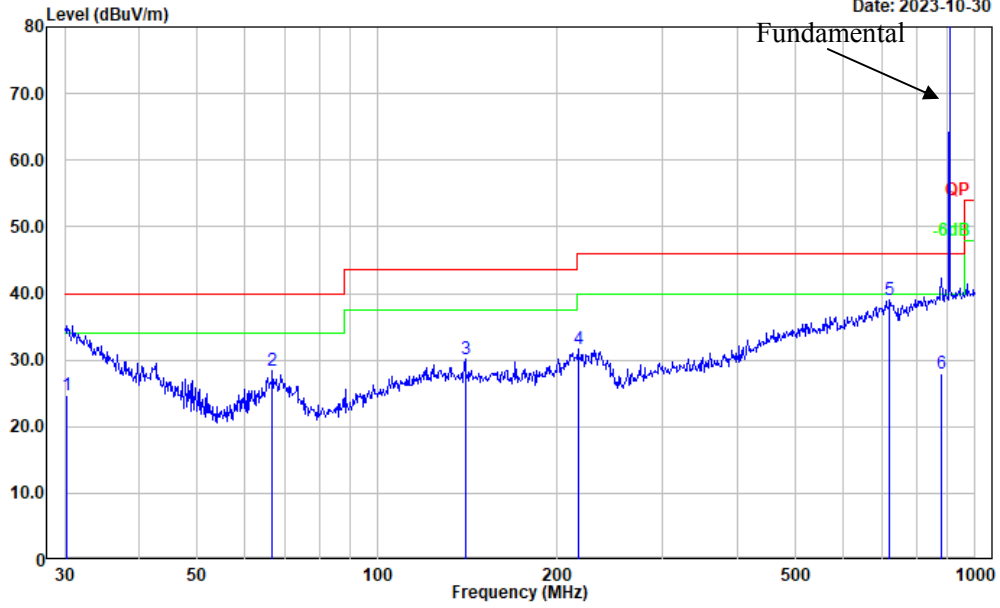


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	-2.72	27.44	24.72	40.00	15.28	QP
2	66.733	13.66	14.64	28.30	40.00	11.70	Peak
3	140.342	10.51	19.72	30.23	43.50	13.27	Peak
4	216.783	12.98	18.68	31.66	46.00	14.34	Peak
5	719.200	11.09	27.90	38.99	46.00	7.01	Peak
6	878.322	-1.61	29.65	28.04	46.00	17.96	QP

Test plots for tested at middle channel:

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: horizontal  
 Note:


Date: 2023-10-30

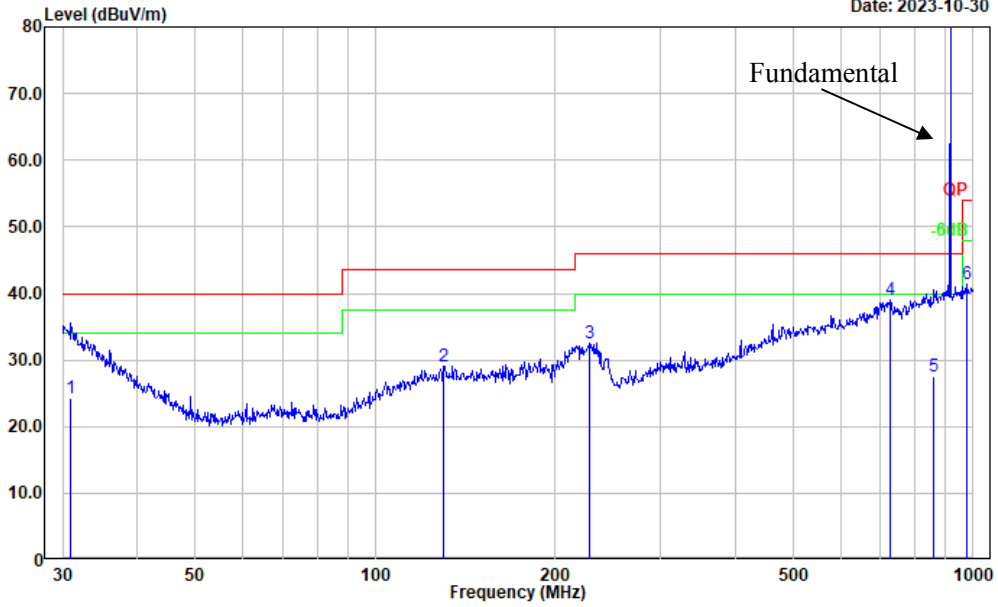

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.962	-2.70	26.94	24.24	40.00	15.76	QP
2	130.379	8.98	20.17	29.15	43.50	14.35	Peak
3	227.691	14.11	18.50	32.61	46.00	13.39	Peak
4	726.805	11.08	28.03	39.11	46.00	6.89	Peak
5	860.035	-1.94	29.53	27.59	46.00	18.41	QP
6	975.753	11.06	30.40	41.46	54.00	12.54	Peak

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: vertical  
 Note:

Date: 2023-10-30

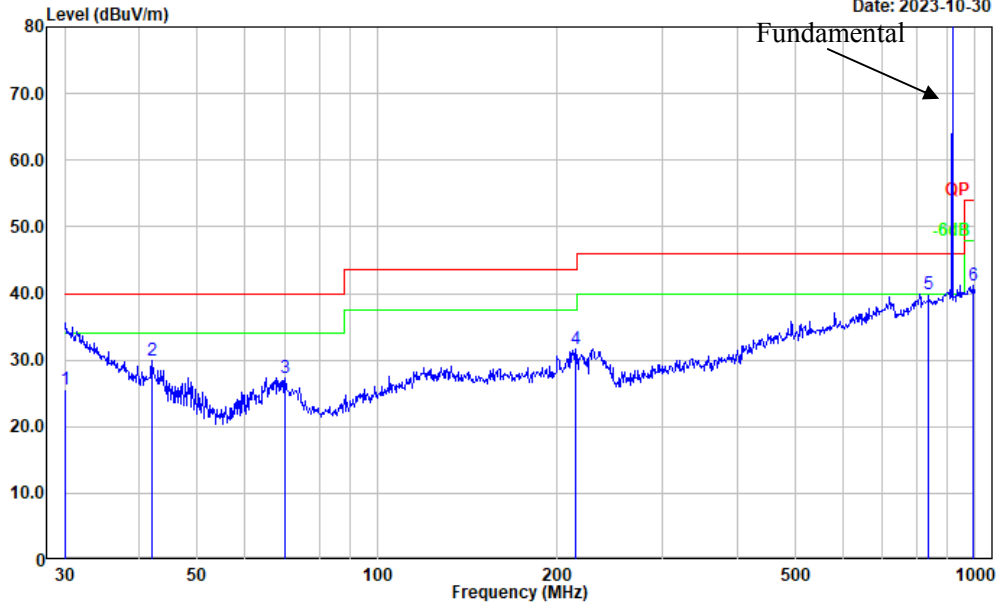


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	-2.02	27.60	25.58	40.00	14.42	QP
2	42.007	10.97	18.98	29.95	40.00	10.05	Peak
3	70.090	12.43	14.89	27.32	40.00	12.68	Peak
4	214.514	12.98	18.75	31.73	43.50	11.77	Peak
5	836.244	10.53	29.27	39.80	46.00	6.20	Peak
6	993.011	10.63	30.65	41.28	54.00	12.72	Peak

Test plots for tested at high channel:

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: horizontal  
 Note:


Date: 2023-10-30

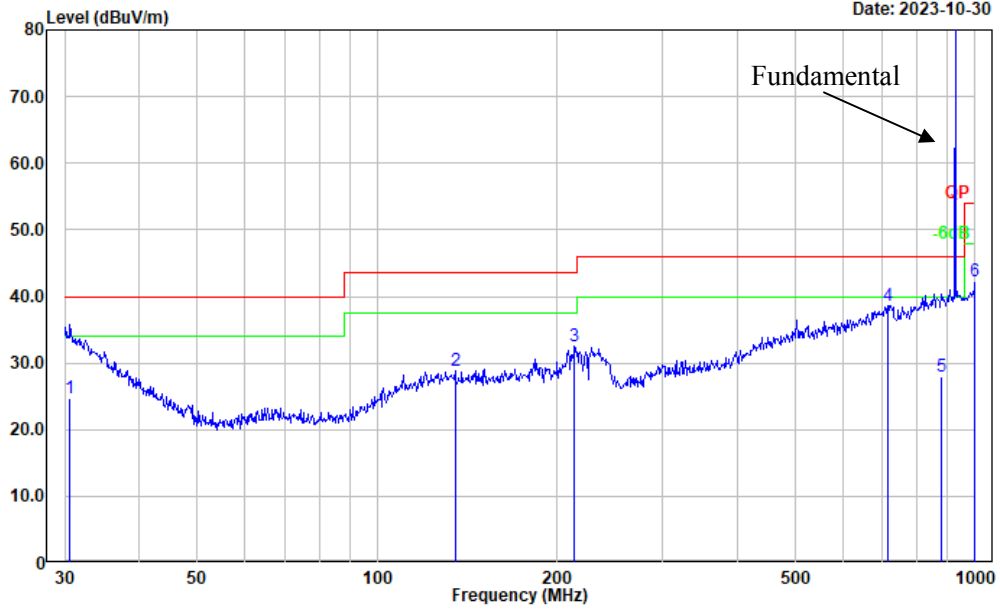

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	-2.55	27.19	24.64	40.00	15.36	QP
2	135.032	8.91	19.95	28.86	43.50	14.64	Peak
3	213.763	13.70	18.77	32.47	43.50	11.03	Peak
4	714.173	10.80	27.89	38.69	46.00	7.31	Peak
5	878.322	-1.73	29.65	27.92	46.00	18.08	QP
6	1000.000	11.58	30.70	42.28	54.00	11.72	Peak

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: vertical  
 Note:

Date: 2023-10-30

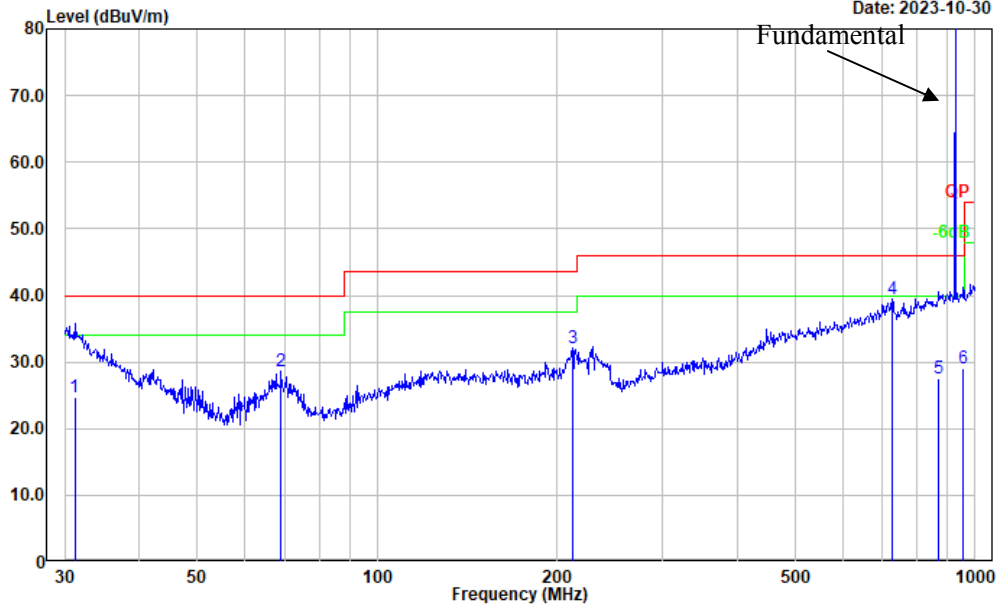


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.180	-2.10	26.78	24.68	40.00	15.32	QP
2	69.114	13.74	14.80	28.54	40.00	11.46	Peak
3	212.270	13.20	18.80	32.00	43.50	11.50	Peak
4	726.805	11.45	28.03	39.48	46.00	6.52	Peak
5	869.130	-1.98	29.53	27.55	46.00	18.45	QP
6	955.438	-1.08	30.10	29.02	46.00	16.98	QP

Test plots for maximum output power channel: low channel (EUT equips with the antenna which is mounted on a sucker with an extension cord, 1.0-meter cable length)

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: horizontal  
 Note:


Date: 2023-10-30

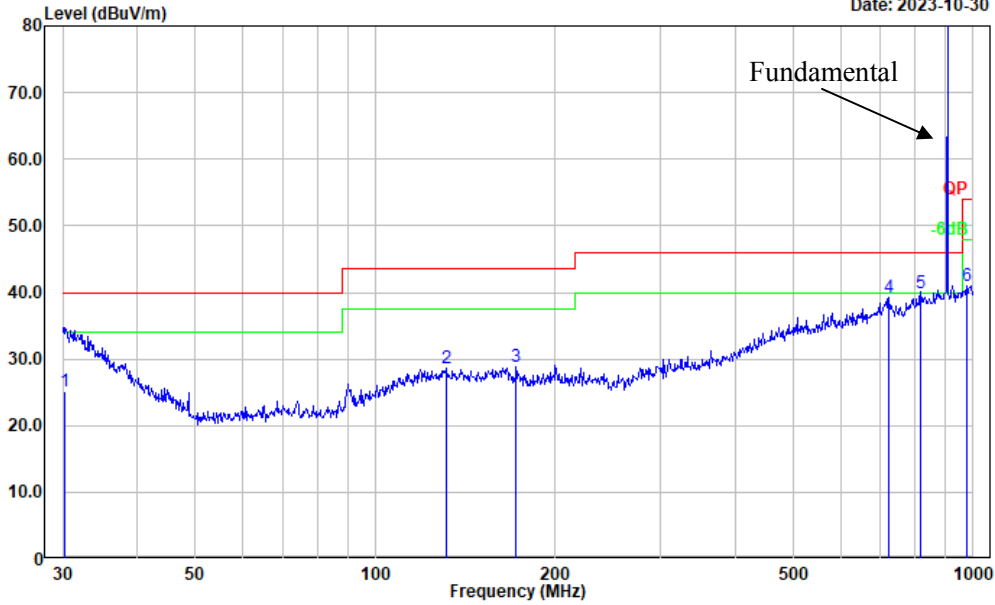

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	-2.28	27.44	25.16	40.00	14.84	QP
2	131.297	8.39	20.14	28.53	43.50	14.97	Peak
3	171.995	10.32	18.48	28.80	43.50	14.70	Peak
4	724.261	11.20	28.00	39.20	46.00	6.80	Peak
5	815.968	10.84	29.11	39.95	46.00	6.05	Peak
6	975.753	10.60	30.40	41.00	54.00	13.00	Peak



Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: vertical  
 Note:

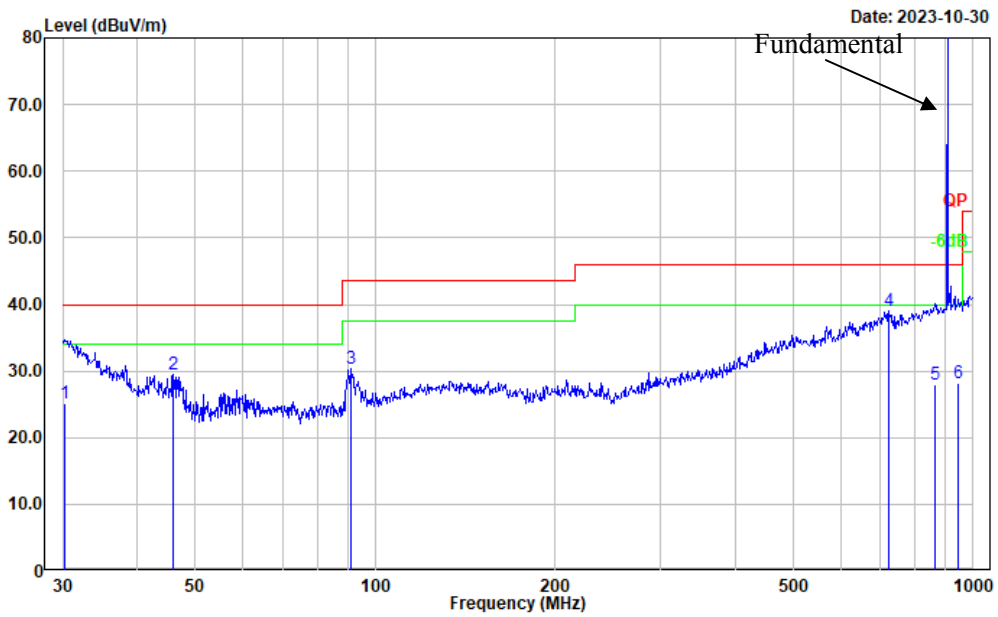


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	-2.25	27.44	25.19	40.00	14.81	QP
2	45.855	12.67	16.76	29.43	40.00	10.57	Peak
3	90.855	15.53	14.79	30.32	43.50	13.18	Peak
4	721.726	11.14	27.94	39.08	46.00	6.92	Peak
5	863.056	-1.62	29.55	27.93	46.00	18.07	QP
6	945.440	-1.83	30.02	28.19	46.00	17.81	QP

Test plots for maximum output power channel: low channel (EUT equips with the antenna which is mounted on a sucker with an extension cord, 3.0-meter cable length)

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: horizontal  
 Note:


Date: 2023-10-30

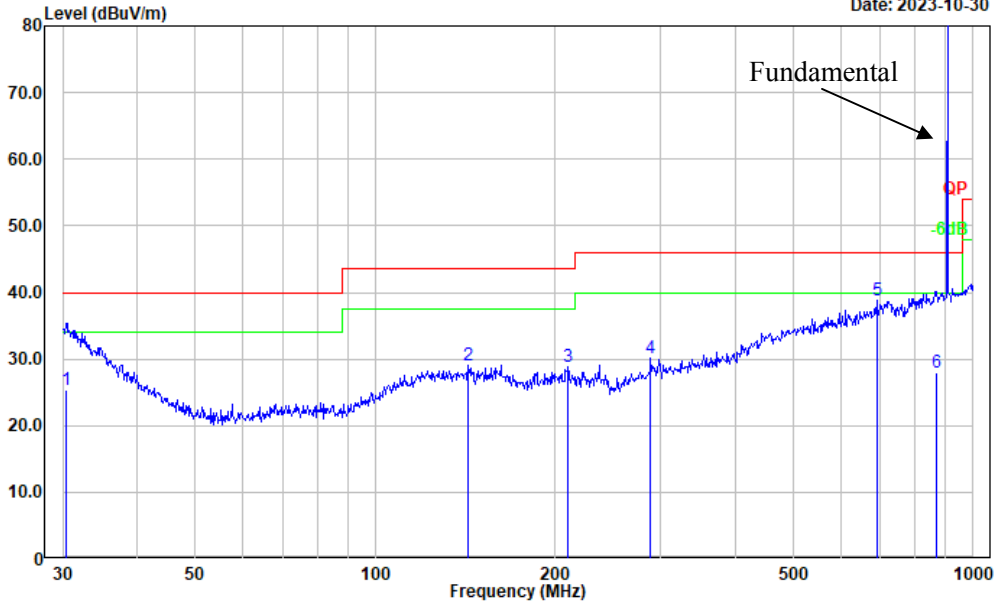

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	-2.08	27.35	25.27	40.00	14.73	QP
2	143.326	9.37	19.66	29.03	43.50	14.47	Peak
3	210.048	10.01	18.87	28.88	43.50	14.62	Peak
4	289.002	9.89	20.18	30.07	46.00	15.93	Peak
5	689.565	11.16	27.58	38.74	46.00	7.26	Peak
6	866.088	-1.63	29.56	27.93	46.00	18.07	QP

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: vertical  
 Note:

Date: 2023-10-30

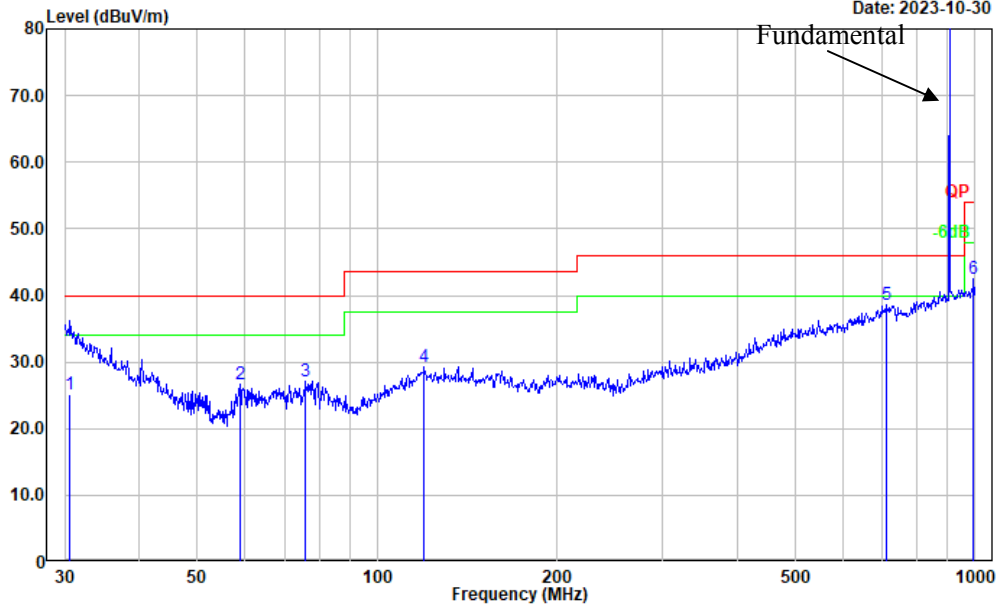


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	-2.08	27.19	25.11	40.00	14.89	QP
2	59.025	12.51	14.17	26.68	40.00	13.32	Peak
3	75.977	12.81	14.39	27.20	40.00	12.80	Peak
4	119.856	9.35	19.98	29.33	43.50	14.17	Peak
5	711.674	10.65	27.85	38.50	46.00	7.50	Peak
6	993.011	11.74	30.65	42.39	54.00	11.61	Peak

Test plots for maximum output power channel: low channel (EUT equips with the antenna which is mounted on a sucker with an extension cord, 5.0-meter cable length)


Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: horizontal  
 Note:

Date: 2023-10-30

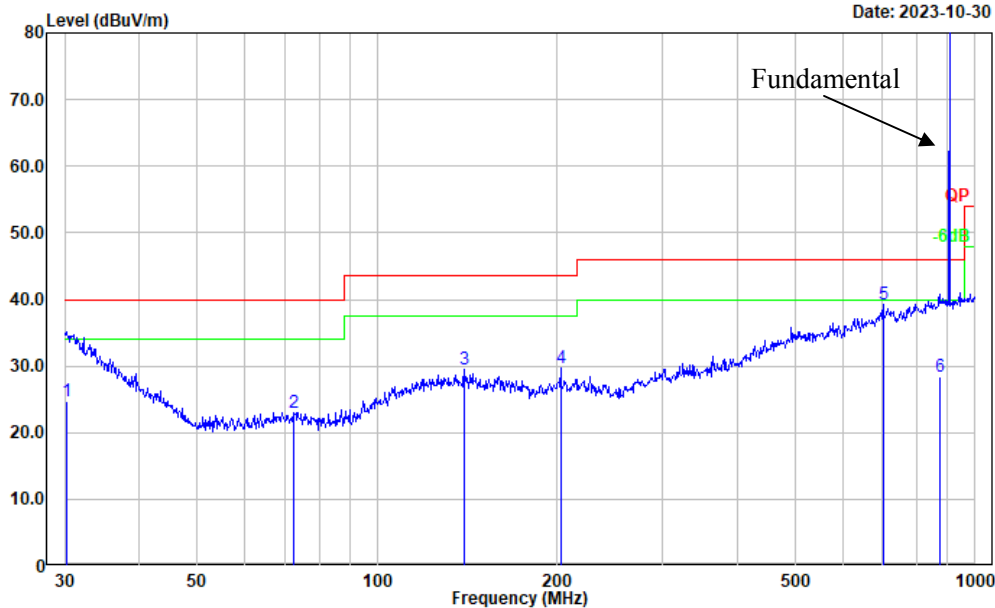

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.317	-2.73	27.44	24.71	40.00	15.29	QP
2	72.338	8.38	14.69	23.07	40.00	16.93	Peak
3	139.851	9.64	19.76	29.40	43.50	14.10	Peak
4	202.810	10.57	19.06	29.63	43.50	13.87	Peak
5	701.761	11.46	27.73	39.19	46.00	6.81	Peak
6	872.183	-1.12	29.56	28.44	46.00	17.56	QP

Project No.: CR230740211-RF  
 Tester: Vic Du  
 Polarization: vertical  
 Note:

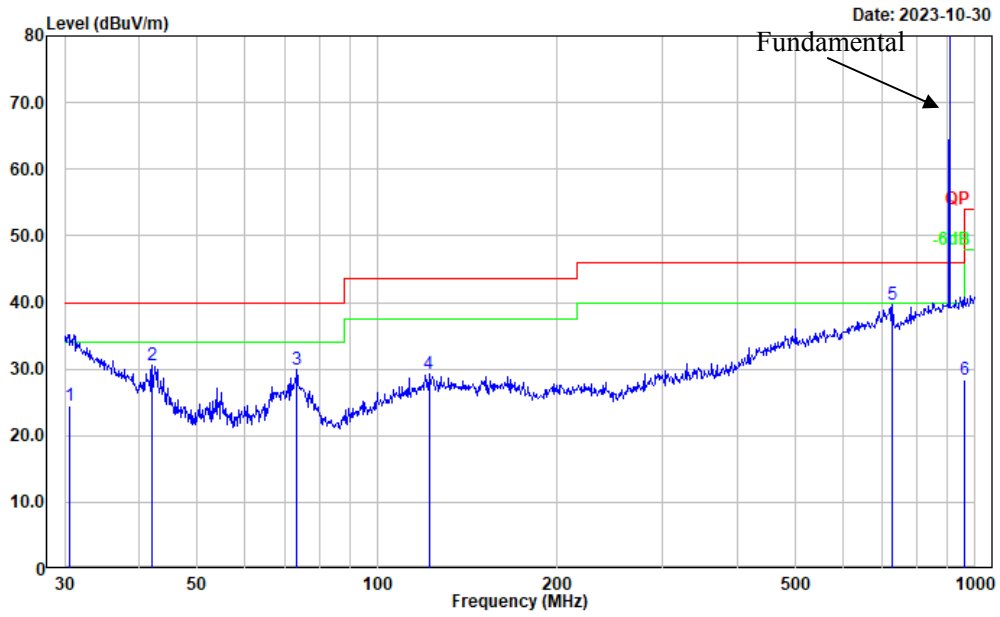

Date: 2023-10-30

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	-2.84	27.27	24.43	40.00	15.57	QP
2	42.007	11.53	18.98	30.51	40.00	9.49	Peak
3	73.359	15.27	14.60	29.87	40.00	10.13	Peak
4	121.976	9.23	20.01	29.24	43.50	14.26	Peak
5	726.805	11.56	28.03	39.59	46.00	6.41	Peak
6	958.794	-1.67	30.14	28.47	46.00	17.53	QP


**2) Bandedge and 1-10GHz** (Tested with the antenna of the EUT is directly installed on the EUT without using an extension cord which with the maximum output power from the fundamental test):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel:905 MHz							
905.00	78.64	QP	H	29.48	108.12	N/A	N/A
905.00	88.37	QP	V	29.48	117.85	N/A	N/A
902.00	37.19	QP	V	29.46	66.65	97.85	31.20
1810.000	42.13	PK	H	1.34	43.47	74.00	30.53
1810.000	31.24	AV	H	1.34	32.58	54.00	21.42
1810.000	41.29	PK	V	1.34	42.63	74.00	31.37
1810.000	29.90	AV	V	1.34	31.24	54.00	22.76
2715.000	41.29	PK	H	4.78	46.07	74.00	27.93
2715.000	30.96	AV	H	4.78	35.74	54.00	18.26
2715.000	42.29	PK	V	4.78	47.07	74.00	26.93
2715.000	31.22	AV	V	4.78	36.00	54.00	18.00
Middle Channel: 915 MHz							
915.00	78.34	QP	H	29.62	107.96	N/A	N/A
915.00	88.16	QP	V	29.62	117.78	N/A	N/A
1830.000	35.97	PK	H	1.43	37.40	74.00	36.60
1830.000	24.88	AV	H	1.43	26.31	54.00	27.69
1830.000	35.77	PK	V	1.43	37.20	74.00	36.80
1830.000	24.66	AV	V	1.43	26.09	54.00	27.91
2745.000	35.33	PK	H	4.91	40.24	74.00	33.76
2745.000	24.36	AV	H	4.91	29.27	54.00	24.73
2745.000	35.65	PK	V	4.91	40.56	74.00	33.44
2745.000	24.63	AV	V	4.91	29.54	54.00	24.46
7320.000	39.11	PK	H	14.80	53.91	74.00	20.09
7320.000	28.32	AV	H	14.80	43.12	54.00	10.88
7320.000	43.25	PK	V	14.80	58.05	74.00	15.95
7320.000	32.44	AV	V	14.80	47.24	54.00	<b>6.76</b>
High Channel: 925 MHz							
925.00	77.12	QP	H	29.66	106.78	N/A	N/A
925.00	88.07	QP	V	29.66	117.73	N/A	N/A
928.00	34.70	QP	V	29.70	64.40	97.73	33.33
1850.000	36.35	PK	H	1.53	37.88	74.00	36.12
1850.000	25.28	AV	H	1.53	26.81	54.00	27.19
1850.000	42.35	PK	V	1.53	43.88	74.00	30.12
1850.000	41.16	AV	V	1.53	42.69	54.00	11.31
2775.000	38.11	PK	H	5.02	43.13	74.00	30.88
2775.000	27.64	AV	H	5.02	32.66	54.00	21.34
2775.000	41.39	PK	V	5.02	46.41	74.00	27.59
2775.000	30.02	AV	V	5.02	35.04	54.00	18.96
7400.000	38.27	PK	H	14.93	53.20	74.00	20.80
7400.000	23.39	AV	H	14.93	38.32	54.00	15.68
7400.000	38.28	PK	V	14.93	53.21	74.00	20.79
7400.000	27.35	AV	V	14.93	42.28	54.00	11.72

**Worst Test plots (middle channel was the worst case in Radiation Spurious Emissions test)**

**Horizontal**

Project No.: CR230740211-RF  
 Tester: coco Tian  
 Polarization: horizontal  
 Note:

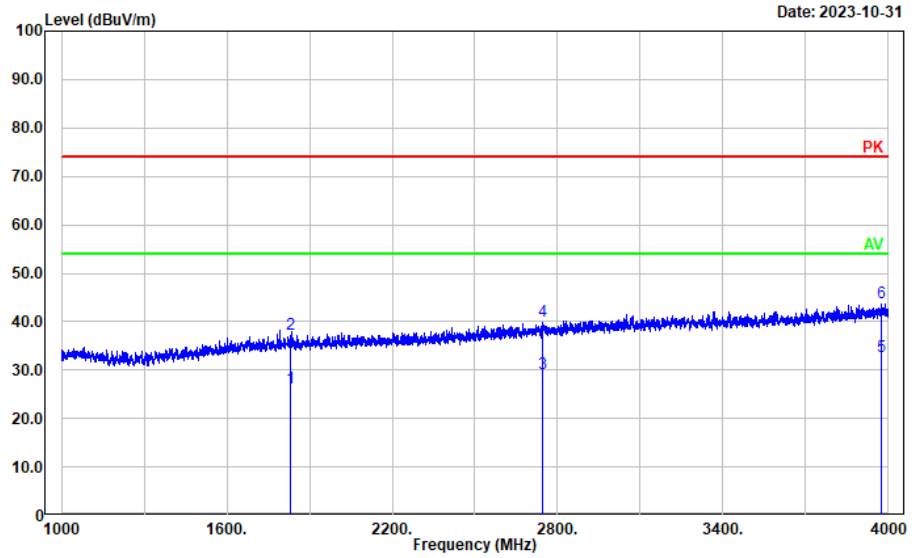


1-4GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1830.000	24.88	1.43	26.31	54.00	27.69	Average
2	1830.000	35.97	1.43	37.40	74.00	36.60	Peak
3	2745.000	24.36	4.91	29.27	54.00	24.73	Average
4	2745.000	35.33	4.91	40.24	74.00	33.76	Peak
5	3975.995	23.55	9.29	32.84	54.00	21.16	Average
6	3975.995	34.73	9.29	44.02	74.00	29.98	Peak

Project No.: CR230740211-RF  
 Tester: coco Tian  
 Polarization: horizontal  
 Note:

Date: 2023-10-31

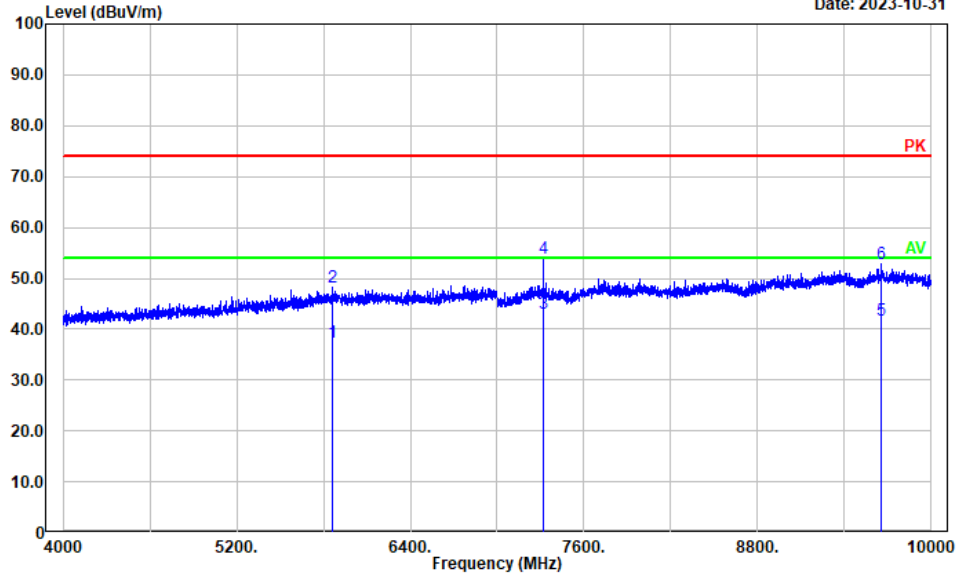

4-10GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5863.973	24.37	13.11	37.48	54.00	16.52	Average
2	5863.973	35.02	13.11	48.13	74.00	25.87	Peak
3	7320.000	28.32	14.80	43.12	54.00	10.88	Average
4	7320.000	39.11	14.80	53.91	74.00	20.09	Peak
5	9655.531	23.10	18.62	41.72	54.00	12.28	Average
6	9655.531	34.24	18.62	52.86	74.00	21.14	Peak




**Vertical**

Project No.: CR230740211-RF  
 Tester: coco Tian  
 Polarization: vertical  
 Note:

Date: 2023-10-31


1-4GHz

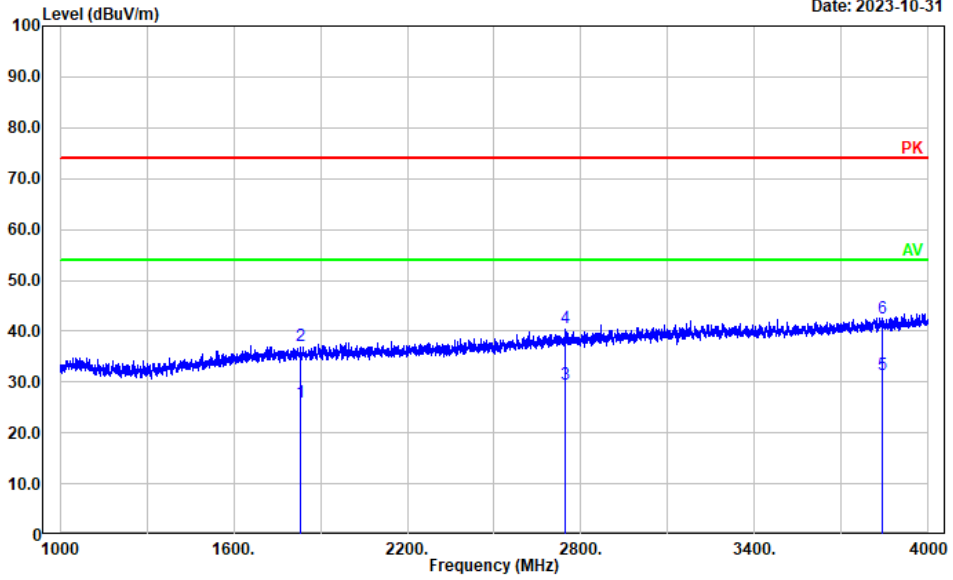

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	1830.000	24.66	1.43	26.09	54.00	27.91	Average
2	1830.000	35.77	1.43	37.20	74.00	36.80	Peak
3	2745.000	24.63	4.91	29.54	54.00	24.46	Average
4	2745.000	35.65	4.91	40.56	74.00	33.44	Peak
5	3840.368	22.62	8.80	31.42	54.00	22.58	Average
6	3840.368	33.86	8.80	42.66	74.00	31.34	Peak

Project No.: CR230740211-RF  
 Tester: coco Tian  
 Polarization: vertical  
 Note:

Date: 2023-10-31

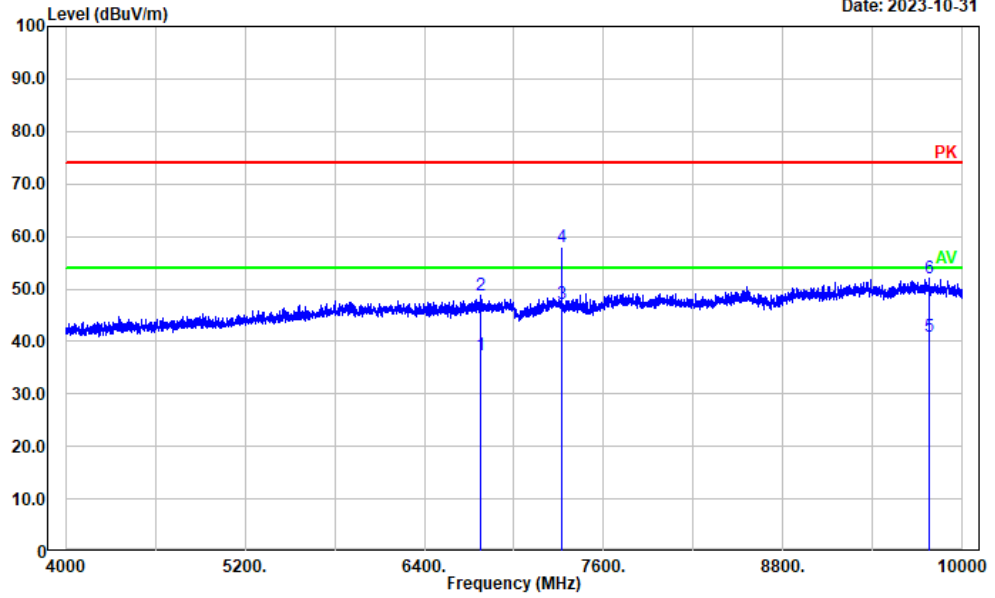

4-10GHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	6777.355	23.52	13.82	37.34	54.00	16.66	Average
2	6777.355	34.98	13.82	48.80	74.00	25.20	Peak
3	7320.000	32.44	14.80	47.24	54.00	6.76	Average
4	7320.000	43.25	14.80	58.05	74.00	15.95	Peak
5	9777.956	22.39	18.53	40.92	54.00	13.08	Average
6	9777.956	33.41	18.53	51.94	74.00	22.06	Peak

**4.3 6 dB Emission Bandwidth**

Serial Number:	287O-1	Test Date:	2023/9/4
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.1	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.3
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

\* *Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

Test Channel	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
Lowest	905	0.63	$\geq 0.5$
Middle	915	0.62	$\geq 0.5$
Highest	925	0.62	$\geq 0.5$

<b>6dB Emission Bandwidth</b>	
Lowest Channel	<p>                     Ref: 40 dBm    Att: 35 dB    RBW: 100 kHz    Delta 1 [T1]: -0.59 dB                      VBW: 300 kHz    VFL: 11.26 dBm                      SWT: 2.5 ms    Center: 905 MHz    Span: 3 MHz                 </p> <p>                     Comment: ProjectNo.:CR230740211    Tester:LingLing Li                      Date: 4.SEP.2023 15:26:39                 </p>
Middle Channel	<p>                     Ref: 40 dBm    Att: 35 dB    RBW: 100 kHz    Delta 1 [T1]: -0.16 dB                      VBW: 300 kHz    VFL: 11.94 dBm                      SWT: 2.5 ms    Center: 915 MHz    Span: 3 MHz                 </p> <p>                     Comment: ProjectNo.:CR230740211    Tester:LingLing Li                      Date: 4.SEP.2023 15:32:58                 </p>
Highest Channel	<p>                     Ref: 40 dBm    Att: 35 dB    RBW: 100 kHz    Delta 1 [T1]: -0.66 dB                      VBW: 300 kHz    VFL: 11.21 dBm                      SWT: 2.5 ms    Center: 925 MHz    Span: 3 MHz                 </p> <p>                     Comment: ProjectNo.:CR230740211    Tester:LingLing Li                      Date: 4.SEP.2023 15:36:24                 </p>

**4.4 Maximum Conducted Output Power**

Serial Number:	287O-1	Test Date:	2023/9/4
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.1	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.3
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Channel	Test Frequency (MHz)	Maximum Average Conducted Output Power (dBm)	Limit (dBm)
Lowest	905	19.04	≤30
Middle	915	18.87	≤30
Highest	925	18.91	≤30

**4.5 Maximum Power Spectral Density**

Serial Number:	287O-1	Test Date:	2023/9/4
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.1	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.3
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**




Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Channel	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Lowest	905	-5.64	≤8.00
Middle	915	-2.82	≤8.00
Highest	925	-3.19	≤8.00

### Maximum power spectral density
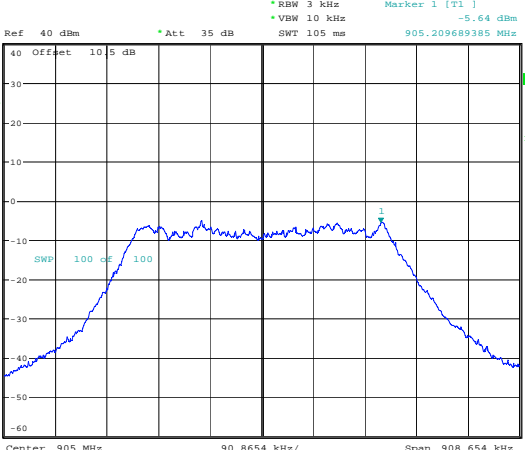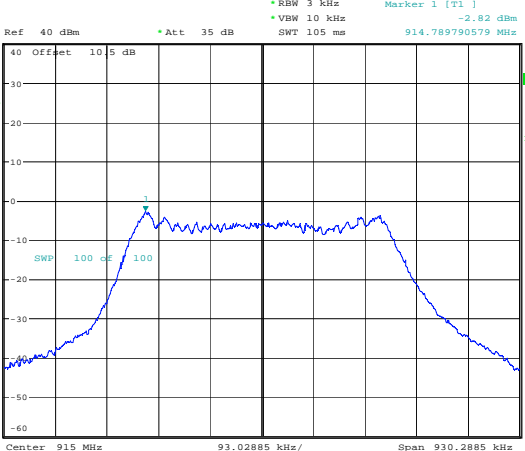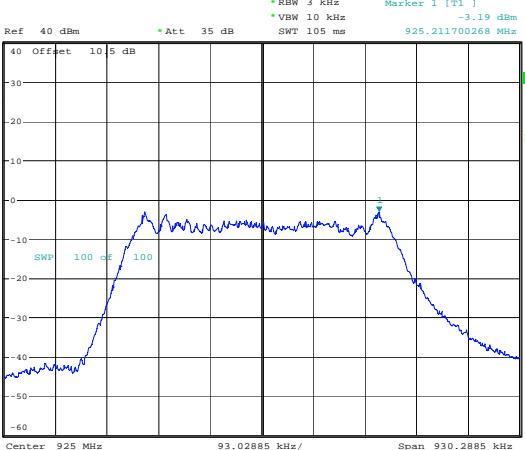
<p>Lowest Channel</p>	 <p>Ref 40 dBm Att 35 dB RBW 3 kHz Marker 1 [T1] -5.64 dBm          VBW 10 kHz          SWT 105 ms 905.209689385 MHz</p> <p>Offset 10.5 dB</p> <p>1 RBW AVG</p> <p>SWP 100 dB 100</p> <p>Center 905 MHz 90.8654 kHz/ Span 908.654 kHz</p> <p>Comment: ProjectNo.:CR230740211 Tester:LingLing Li          Date: 4.SEP.2023 15:29:41</p>
<p>Middle Channel</p>	 <p>Ref 40 dBm Att 35 dB RBW 3 kHz Marker 1 [T1] -2.82 dBm          VBW 10 kHz          SWT 105 ms 914.789790579 MHz</p> <p>Offset 10.5 dB</p> <p>1 RBW AVG</p> <p>SWP 100 dB 100</p> <p>Center 915 MHz 93.02885 kHz/ Span 930.2885 kHz</p> <p>Comment: ProjectNo.:CR230740211 Tester:LingLing Li          Date: 4.SEP.2023 15:34:54</p>
<p>Highest Channel</p>	 <p>Ref 40 dBm Att 35 dB RBW 3 kHz Marker 1 [T1] -3.19 dBm          VBW 10 kHz          SWT 105 ms 925.211700268 MHz</p> <p>Offset 10.5 dB</p> <p>1 RBW AVG</p> <p>SWP 100 dB 100</p> <p>Center 925 MHz 93.02885 kHz/ Span 930.2885 kHz</p> <p>Comment: ProjectNo.:CR230740211 Tester:LingLing Li          Date: 4.SEP.2023 15:38:08</p>

**4.6 100 kHz Bandwidth of Frequency Band Edge**

Serial Number:	287O-1	Test Date:	2023/9/15
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.2	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.4
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

\* *Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*




### 100 kHz Bandwidth of Frequency Band Edge

Lowest Band edge

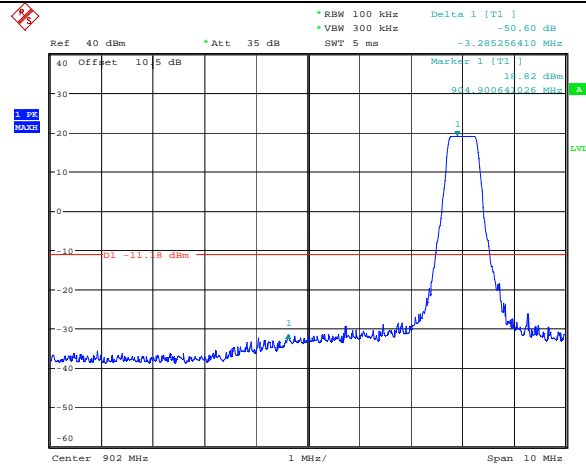

Highest Band edge

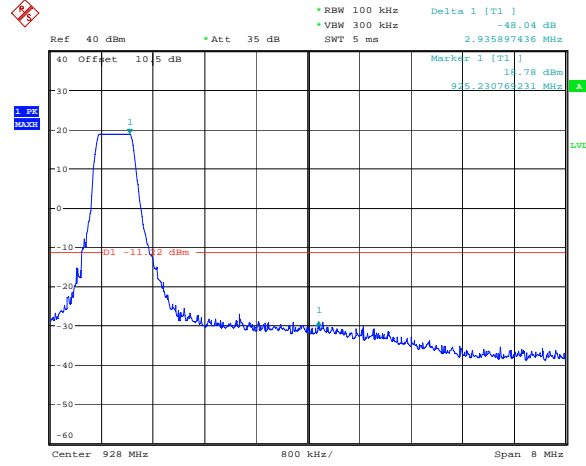

**4.7 Duty Cycle**

Serial Number:	287O-1	Test Date:	2023/9/4
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	N/A

Environmental Conditions:					
Temperature: (°C)	26.1	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.3


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (kHz)
915	100	100	100.00	/	0.01

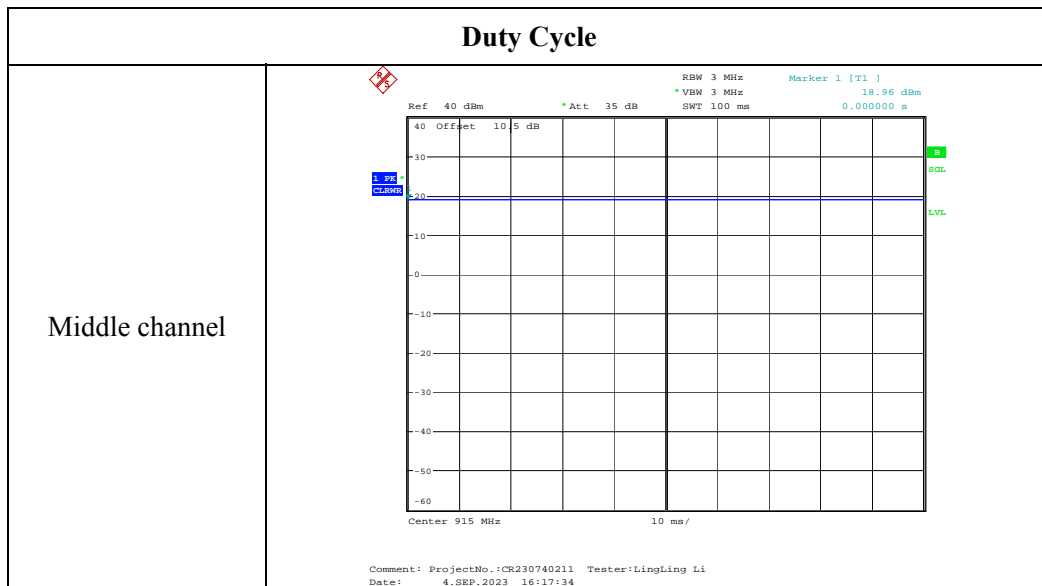

## 5. RF EXPOSURE EVALUATION

### 5.1 Applicable Standard

FCC §15.247 (i) and subpart §1.1307

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

### 5.2 Procedure

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of  $\lambda/4$  or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2 f$ .
1,500-100,000	$19.2R^2$ .

### 5.3 Measurement Result

Radio	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP (mW)	Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP		MPE-Based Exemption
							dBm	mW	
Lora-DTS	905-925	52.79	200	463.36	21	5	23.85	242.66	Compliant

Note: The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.

**Result: The device compliant the MPE-Based Exemption at 20cm distances.**

## **6. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR230740211-EXP EUT EXTERNAL PHOTOGRAPHS and CR230740211-INP EUT INTERNAL PHOTOGRAPHS

## **7. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment CR230740211-00A-TSP TEST SETUP PHOTOGRAPHS.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***