

# FCC Part 15B Measurement and Test Report

For

**LM Technologies Ltd.**

**Unit 19 32-34 Gordon House Road, London NW51LP United Kingdom**

**FCC ID: VVX808-04XX**

**Test Rule(s):** FCC Part 15 Subpart B

**Product Description:** LM808 WiFi USB Adapter 433Mbps

**Tested Model:** 808-04xx

**Report No.:** STR17058201I-3

**Tested Date:** 2017-05-15 to 2017-07-03

**Issued Date:** 2017-07-03

**Tested By:** Jason Su / Engineer

*Jason Su*

**Reviewed By:** Silin Chen / EMC Manager

*Silin Chen*

**Approved & Authorized By:** Jandy So / PSQ Manager

*Jandy So*

**Prepared By:**

**Shenzhen SEM.Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

---

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND OPERATION MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
<b>2. SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>3. CONDUCTED EMISSIONS</b>	<b>8</b>
3.1 TEST PROCEDURE	8
3.2 BASIC TEST SETUP BLOCK DIAGRAM	8
3.3 ENVIRONMENTAL CONDITIONS	8
3.4 SUMMARY OF TEST RESULTS/PLOTS	8
3.5 CONDUCTED EMISSIONS TEST DATA	9
<b>4. RADIATED EMISSIONS</b>	<b>11</b>
4.1 TEST PROCEDURE	11
4.2 TEST RECEIVER SETUP	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	12
4.4 ENVIRONMENTAL CONDITIONS	12
4.5 SUMMARY OF TEST RESULTS/PLOTS	12

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: LM Technologies Ltd.  
Address of applicant: Unit 19 32-34 Gordon House Road, London  
NW51LP United Kingdom

Manufacturer: LM Technologies Ltd.  
Address of manufacturer: Unit 19 32-34 Gordon House Road, London  
NW51LP United Kingdom

General Description of EUT	
Product Name:	LM808 WiFi USB Adapter 433Mbps
Trade Name:	LM Technologies Ltd
Model No.:	808-04xx
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	USB DC5V
Rated Current:	/
Rated Power:	/
Power Adapter Model:	/
Lowest Internal Frequency:	40MHz
Highest Internal Frequency:	40MHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the LM Technologies Ltd in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Data Transmission	Connected to Notebook

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2017-06-12	2018-06-11
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-12	2018-06-11
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-12	2018-06-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-12	2018-06-11
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11

---

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant


N/A: not applicable

### 3. Conducted Emissions

#### 3.1 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.2 Basic Test Setup Block Diagram

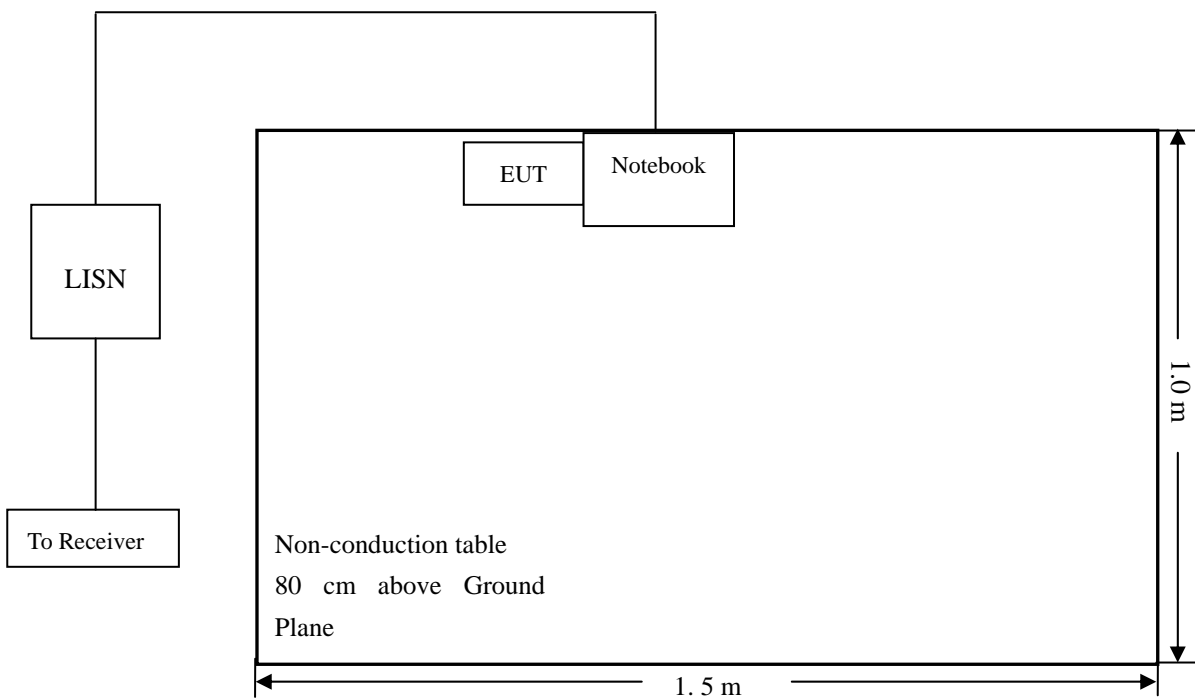

#### 3.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

#### 3.4 Summary of Test Results/Plots

According to the data in section 3.5, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

**-7.68 dB at 0.3820 MHz** in the **Neutral, Average** detector, 0.15-30MHz




### 3.5 Conducted Emissions Test Data

#### Plot of Conducted Emissions Test Data


EUT: LM808 WiFi USB Adapter 433Mbps  
 Tested Model: 808-04xx  
 Operating Condition: TM1  
 Comment: AC 120V/60Hz; USB 5V

Test Specification: Neutral

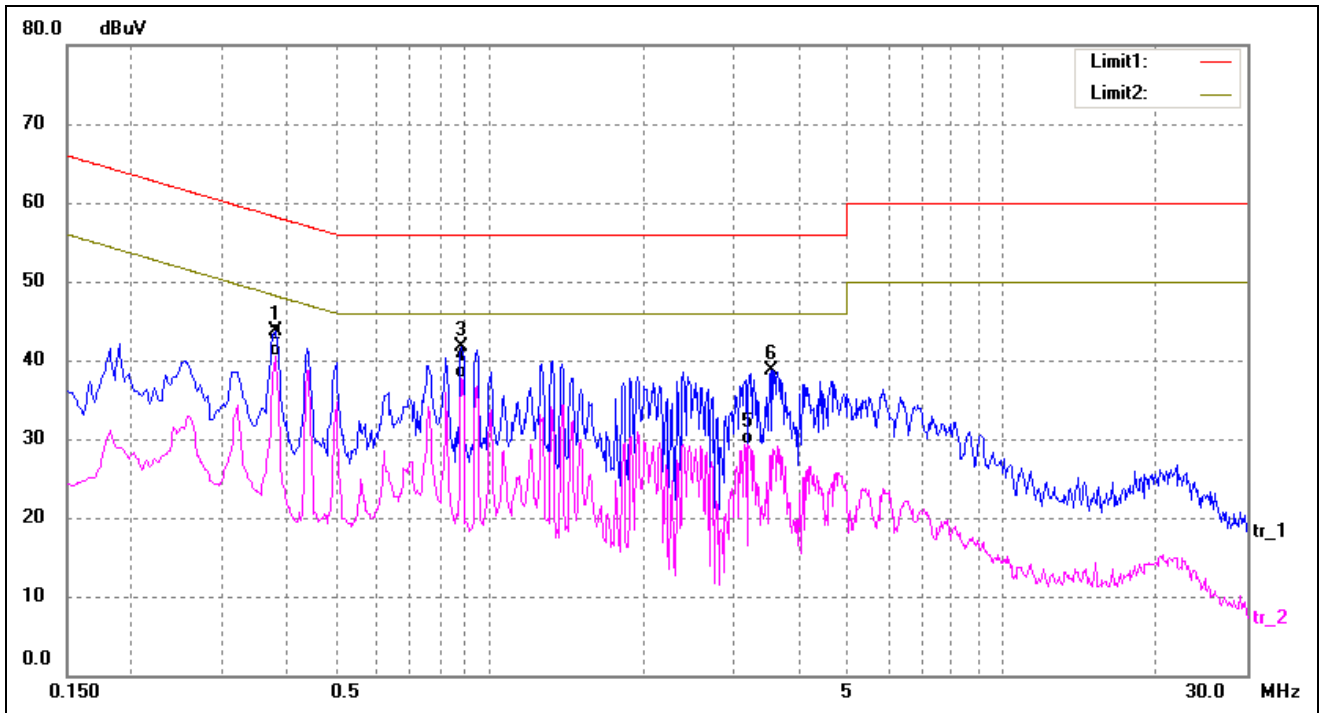

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3820	33.95	9.80	43.75	58.24	-14.49	QP
2*	0.3820	30.76	9.80	40.56	48.24	-7.68	AVG
3	0.8820	31.88	9.77	41.65	56.00	-14.35	QP
4	0.8820	27.95	9.77	37.72	46.00	-8.28	AVG
5	3.2060	19.65	9.70	29.35	46.00	-16.65	AVG
6	3.5380	28.99	9.70	38.69	56.00	-17.31	QP

Test Specification: Line

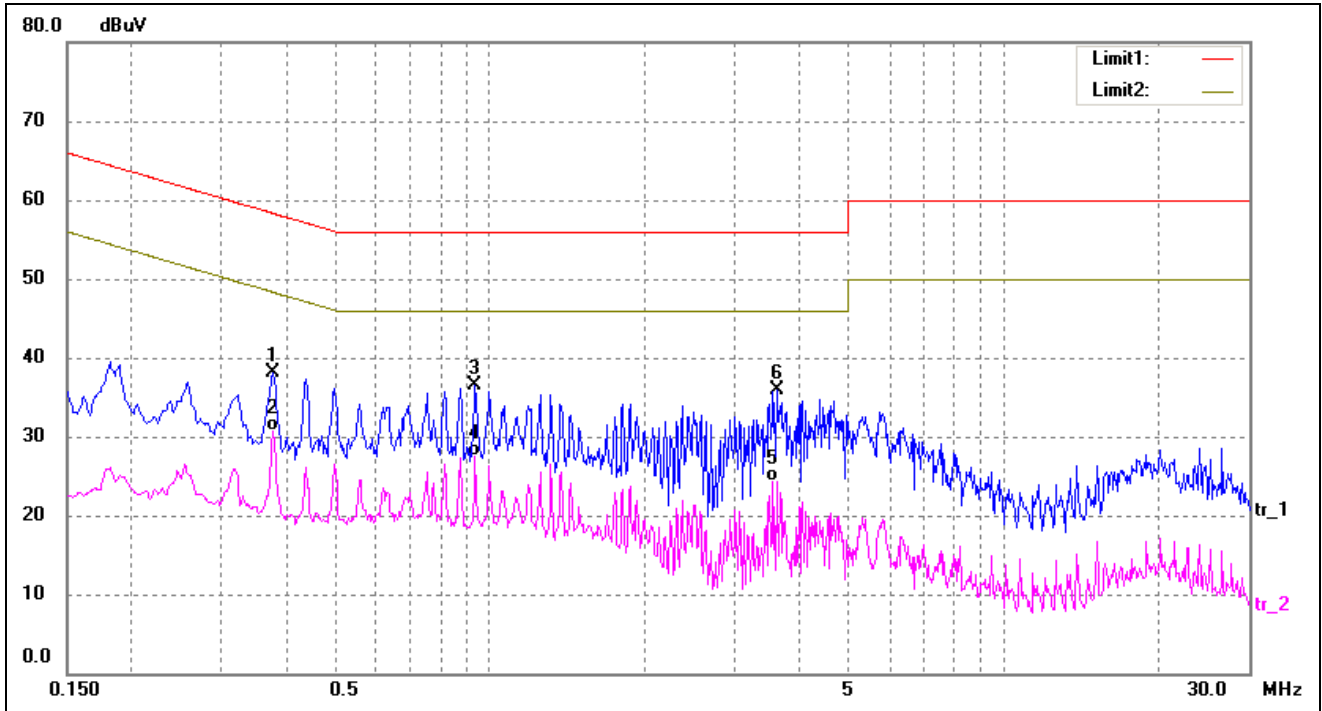

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3780	28.36	9.80	38.16	58.32	-20.16	QP
2*	0.3780	20.93	9.80	30.73	48.32	-17.59	AVG
3	0.9380	26.78	9.76	36.54	56.00	-19.46	QP
4	0.9380	17.68	9.76	27.44	46.00	-18.56	AVG
5	3.5580	14.55	9.70	24.25	46.00	-21.75	AVG
6	3.6180	26.29	9.69	35.98	56.00	-20.02	QP


## 4. Radiated Emissions

### 4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

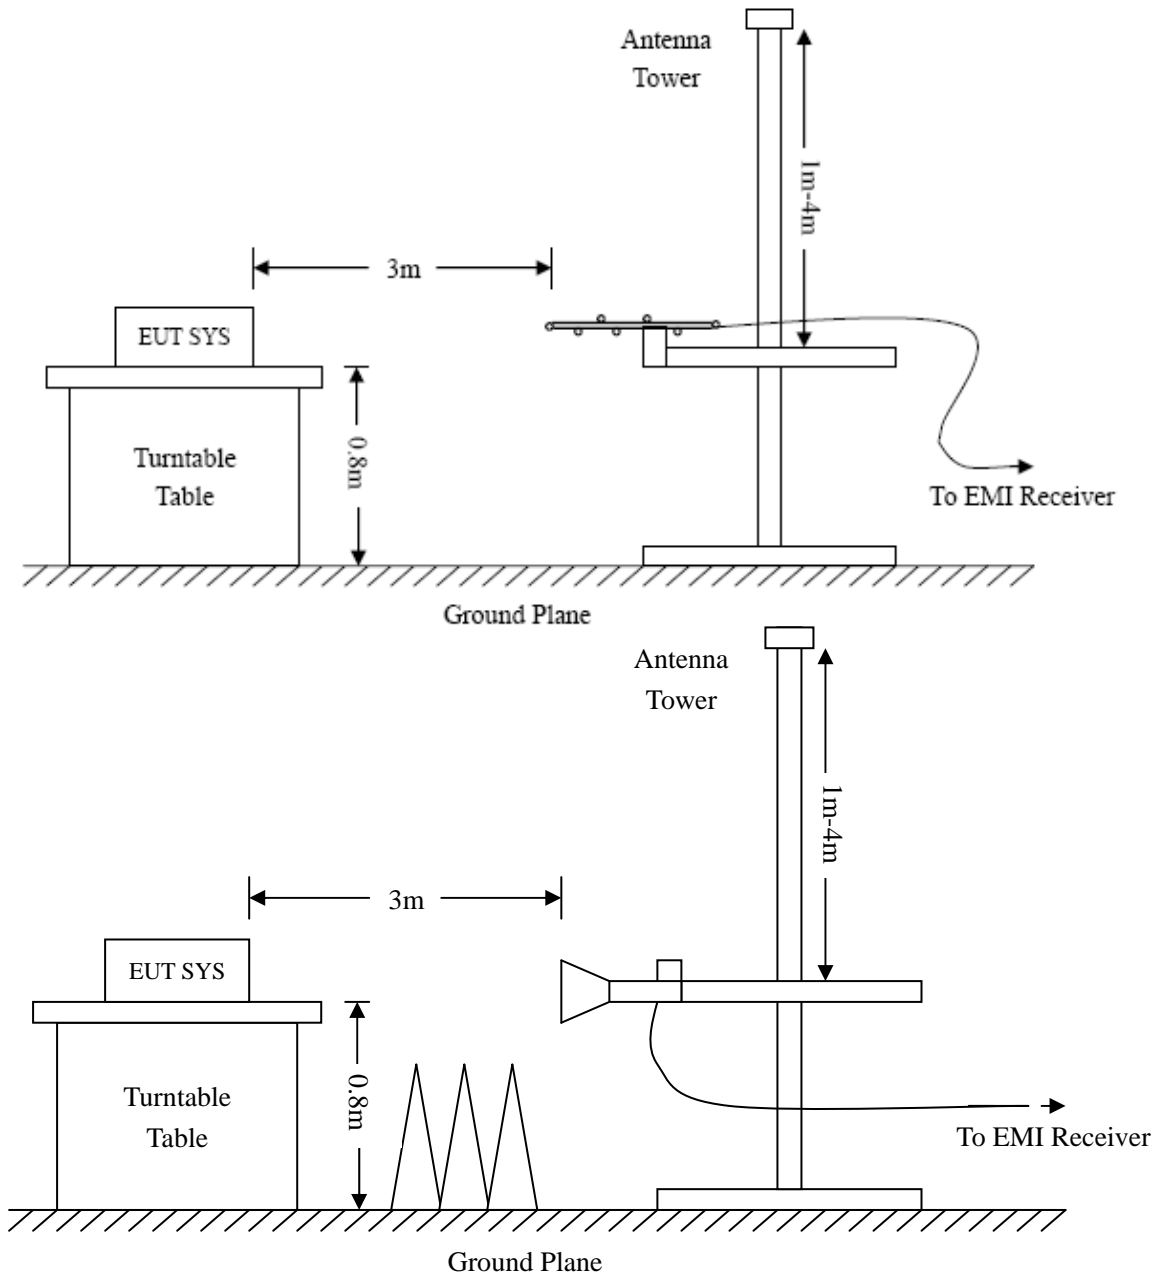

### 4.2 Test Receiver Setup

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

### 4.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

### 4.5 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-6.61 dB at 528.2458 MHz in the Vertical polarization, 30MHz to 29 GHz, 3Meters**

**Plot of Radiated Emissions Test Data**


EUT: LM808 WiFi USB Adapter 433Mbps

Tested Model: 808-04xx

Operating Condition: TM1


Comment: AC 120V/60Hz; USB 5V

Test Specification: Horizontal

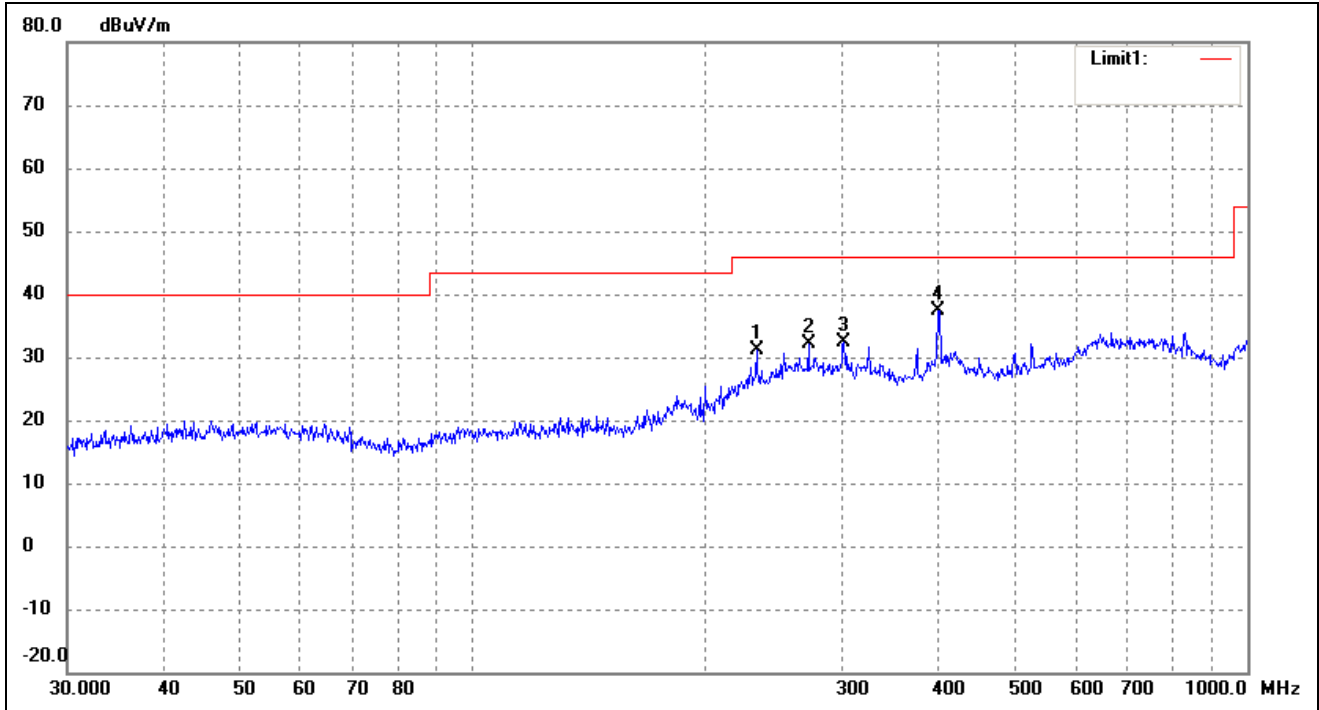

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	232.5318	22.59	8.45	31.04	46.00	-14.96	28	100	QP
2	271.3245	21.70	10.51	32.21	46.00	-13.79	291	100	QP
3	301.4223	20.32	11.94	32.26	46.00	-13.74	71	100	QP
4	399.0301	24.70	12.64	37.34	46.00	-8.66	254	100	QP

Test Specification: Vertical

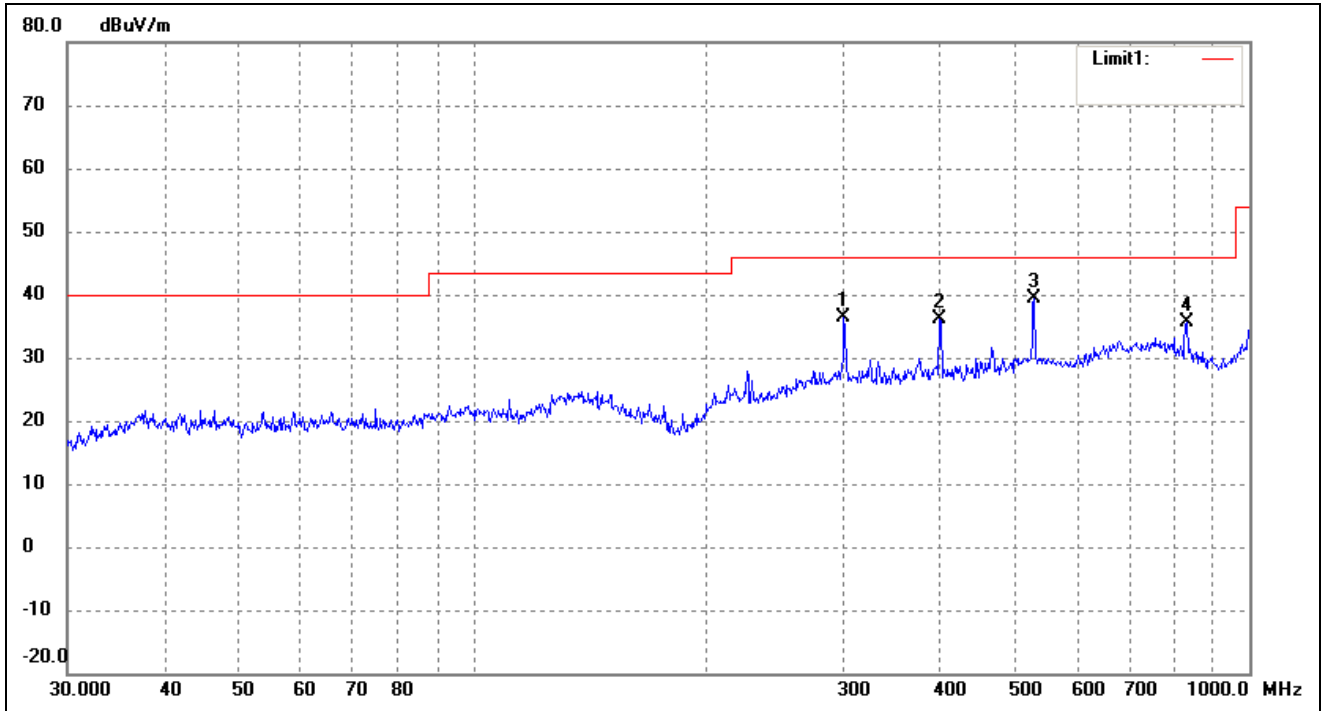

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	300.3673	24.33	11.95	36.28	46.00	-9.72	294	100	QP
2	399.0301	23.50	12.64	36.14	46.00	-9.86	134	100	QP
3	528.2458	25.53	13.86	39.39	46.00	-6.61	75	100	QP
4	830.4002	19.76	15.86	35.62	46.00	-10.38	138	100	QP

Note: Testing is carried out with frequency rang 30MHz to the 29GHz, which above 1GHz are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

\*\*\*\*\* END OF REPORT \*\*\*\*\*