

FCC PART 15.247


TEST REPORT

For

Atmel Norway AS

Vestre Rosten 79, TRONDHEIM, Norway 7075

FCC ID: VW4A092722

Report Type: Original Report	Product Type: ATSAMR30-XPRO
Report Number: RSZ161223003-00	
Report Date: 2017-01-23	
Oscar Ye 	
Reviewed By:	Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
FCC §15.247 (I) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	14
APPLICABLE STANDARD	14
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP.....	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	17
CORRECTED FACTOR & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST RESULTS SUMMARY	22
TEST DATA	23
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST DATA	46
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(e) - POWER SPECTRAL DENSITY	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST DATA	55

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Atmel Norway AS*'s product, model number: *A09-2722 (FCC ID: VW4A092722 and the version is Rev06)* or the "EUT" in this report was an *ATSAMR30-XPRO*, which was measured approximately: 95.65 mm (L) x 66 mm (W) x 13.9 mm (H), rated with input voltage: DC 3.3 V from system.

**All measurement and test data in this report was gathered from production sample serial number: 1603941 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-12-23.*

Objective

This report is prepared on behalf of *Atmel Norway AS* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		±3.26 dB
RF conducted test with spectrum		±0.9dB
RF Output Power with Power meter		±0.5dB
Radiated emission	30MHz~1GHz	±5.91dB
	Above 1G	±4.92dB
Occupied Bandwidth		±0.5kHz
Temperature		±1.0°C
Humidity		±6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.

900 MHz:

BPSK-40-ALT, OQPSK-SIN-250 and OQPSK-SIN-1000-SCR-ON three mode was tested.

10 channels are provided to testing:

(Note: The channel separation is 2.0MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	906	6	916
2	908	7	918
3	910	8	920
4	912	9	922
5	914	10	924

EUT was tested with Channel 906MHz, 914MHz and 924MHz.

Equipment Modifications


No modification was made to the EUT tested.

EUT Exercise Software


The software “Atmel Studio 7.0” was used for testing, which was provided by manufacturer. The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Duty cycle
Antenna 1


BPSK-40-ALT mode

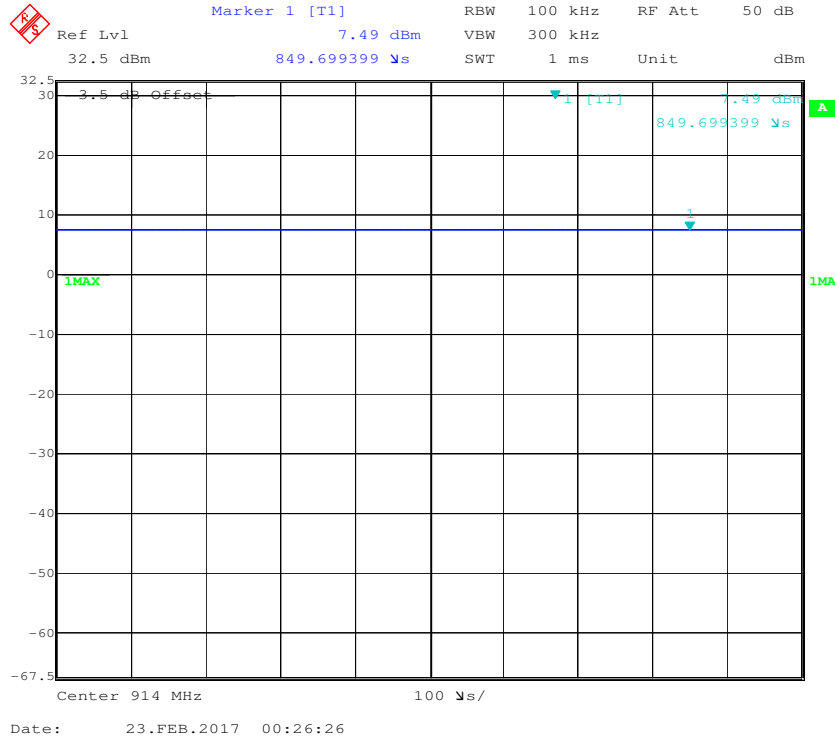

OQPSK-SIN-250 mode

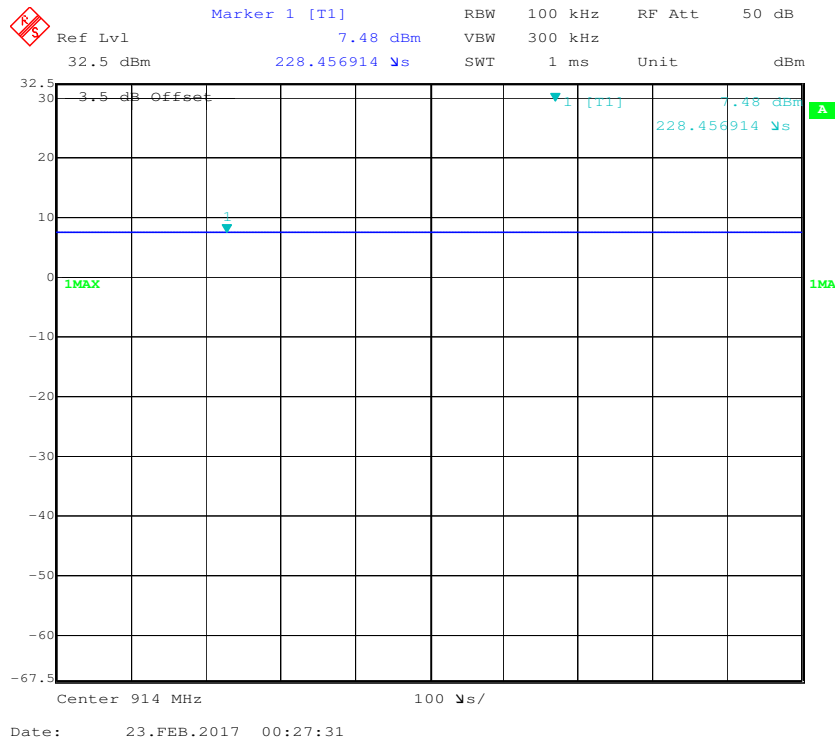


OQPSK-SIN-1000-SCR-ON mode

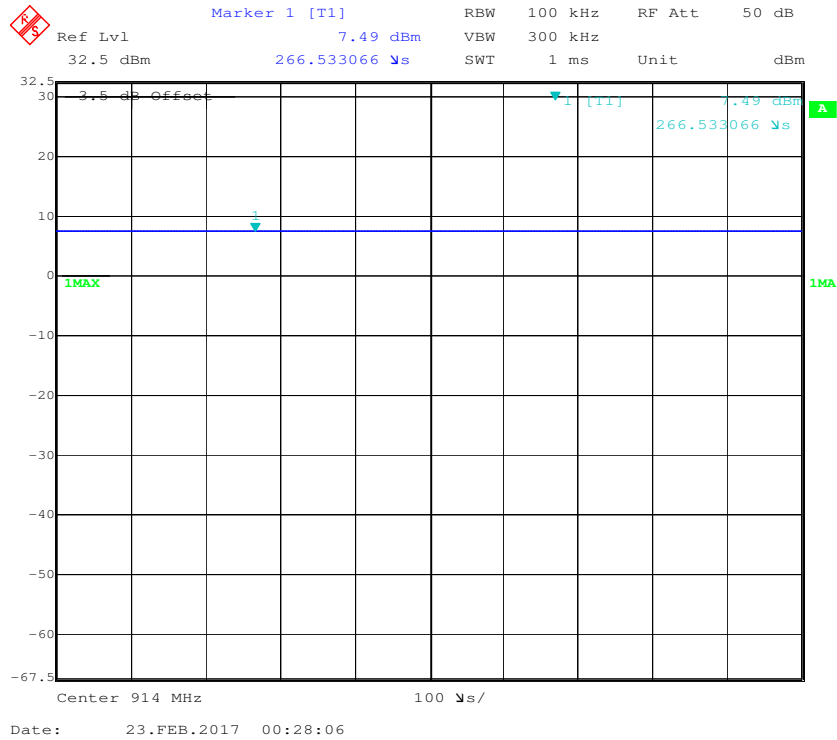


Antenna 2


BPSK-40-ALT mode

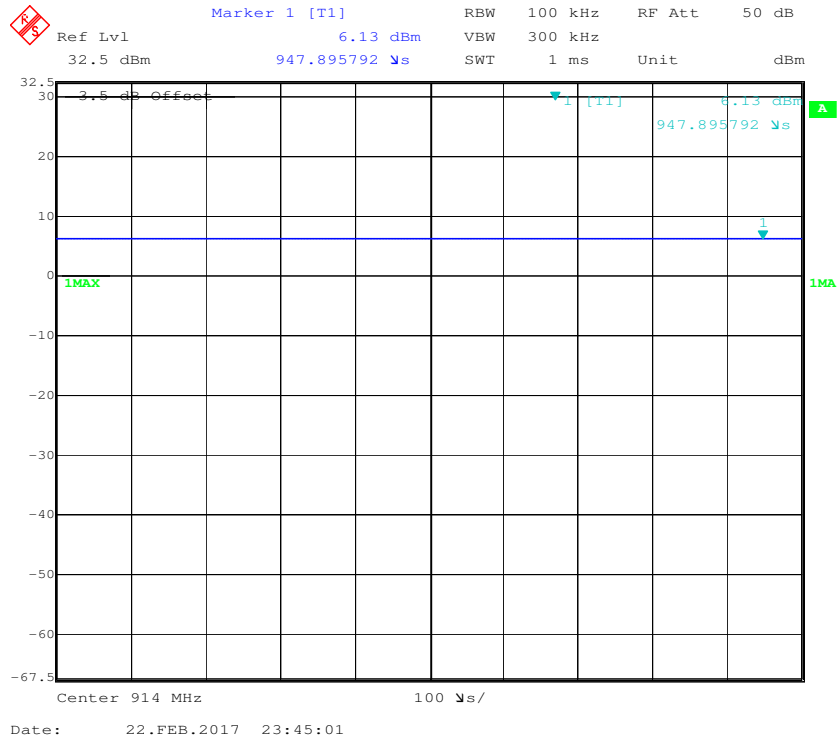

OQPSK-SIN-250 mode

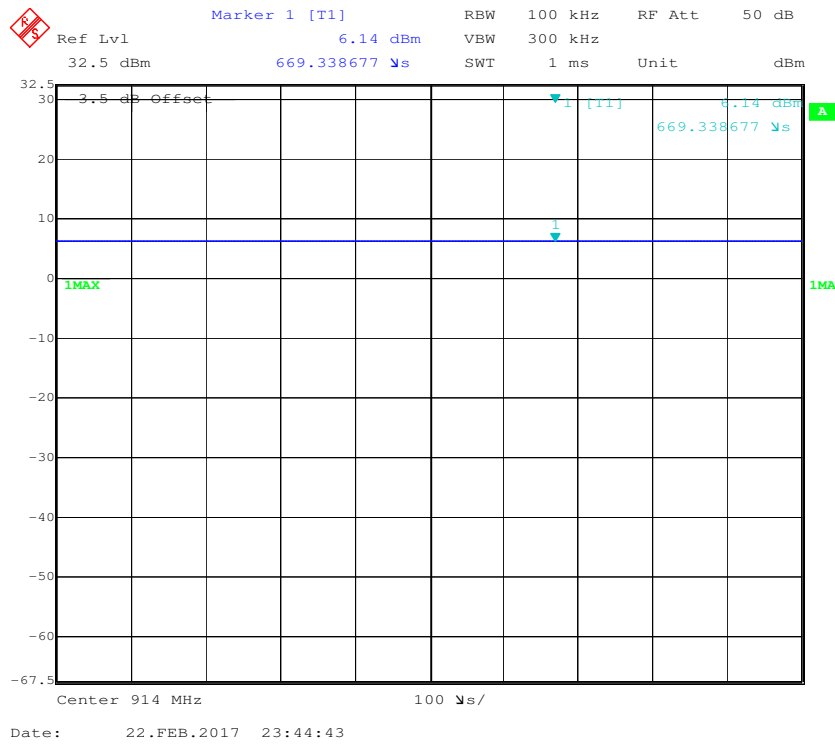

OQPSK-SIN-1000-SCR-ON mode

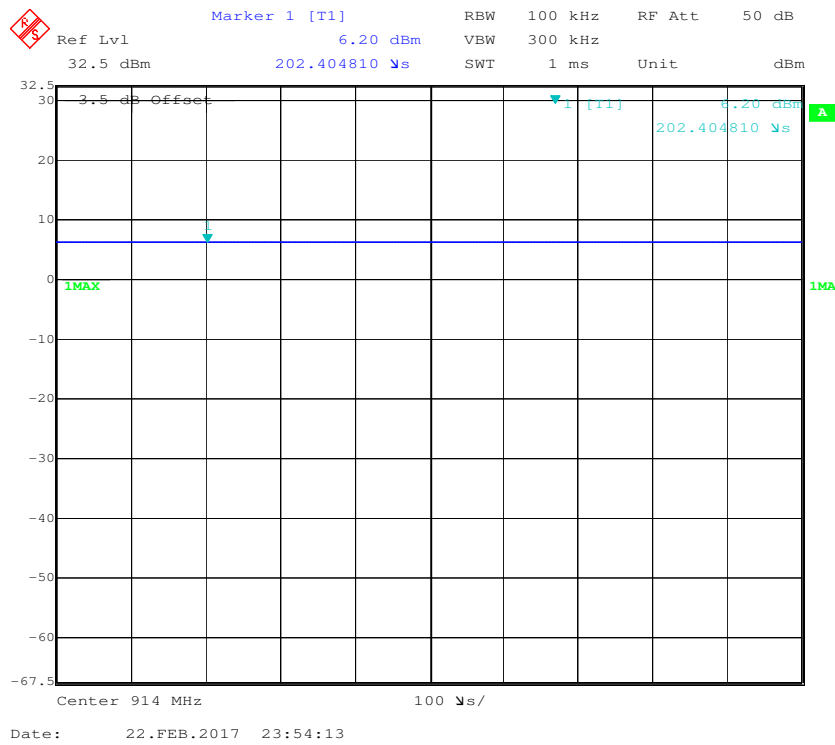

	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	10log(1/x)
Antenna 1	BPSK-40-ALT	100	-	-	10Hz	0
	OQPSK-SIN-250	100	-	-	10Hz	0
	OQPSK-SIN-1000-SCR-ON	100	-	-	10Hz	0
Antenna 2	BPSK-40-ALT	100	-	-	10Hz	0
	OQPSK-SIN-250	100	-	-	10Hz	0
	OQPSK-SIN-1000-SCR-ON	100	-	-	10Hz	0

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	T400	R8-LXAXE 09/12
DELL	Mouse	MOC5UO	G1900NKD
DELL	Adapter	LA90PM130	CN-06C3W2-72438-6BT-194A-A03

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-Shielding Detachable USB Cable	1.5	PC	Mouse
Un-shielding Detachable USB Cable	1.0	EUT	PC
Un-shielding Detachable AC Cable	0.9	Adapter	LISN 1
Un-shielding Un-detachable DC Cable	0.9	Adapter	PC

Block Diagram of Test Setup

For conducted emission

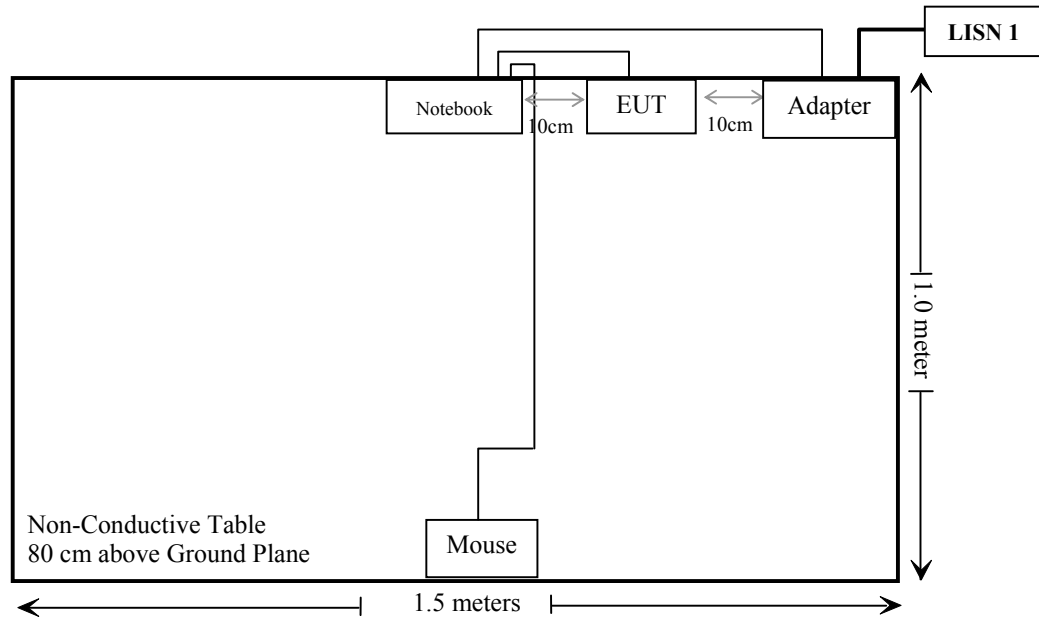

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2016-11-25	2017-11-25
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-10
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2016-06-18	2017-06-17
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2016-09-08	2017-09-08
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	NCR	NCR
Radiation test					
Sonoma Instrument	Amplifier	330	171377	2016-12-12	2017-12-12
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-25
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-09-08	2017-09-08
EMCO	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-25
ETS	Horn Antenna	3115	6229	2016-01-11	2019-01-10
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-12
RF Conducted test					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2016-12-09	2017-12-08
BACL	RF cable	KS-LAB-012	KS-LAB-012	2016-12-15	2017-12-15
WEINSCHL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Agilent	Power Meter	N1912A	MY5000492	2016-11-18	2017-11-17
Agilent	Power Sensor	N1921A	MY54210024	2016-11-18	2017-11-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (I) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

The worst case is antenna 1 (only one antenna was used when EUT working):

Mode	Frequency (MHz)	Antenna Gain		Max Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BPSK-40- ALT	906	-0.5	0.89	7.0	5.01	20	0.0009	0.6
OQPSK- SIN-250	906	-0.5	0.89	7.0	5.01	20	0.0009	0.6
OQPSK- SIN-1000- SCR-ON	906	-0.5	0.89	7.0	5.01	20	0.0009	0.6

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT used one ceramic chip antenna and one external antenna, ceramic chip antenna gain is -0.5 dBi, external 1/4 wave whip antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	22 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Layne Li on 2017-01-10.

EUT operation mode: Transmitting (900MHz)

AC 120V/60 Hz, Line


Full Spectrum

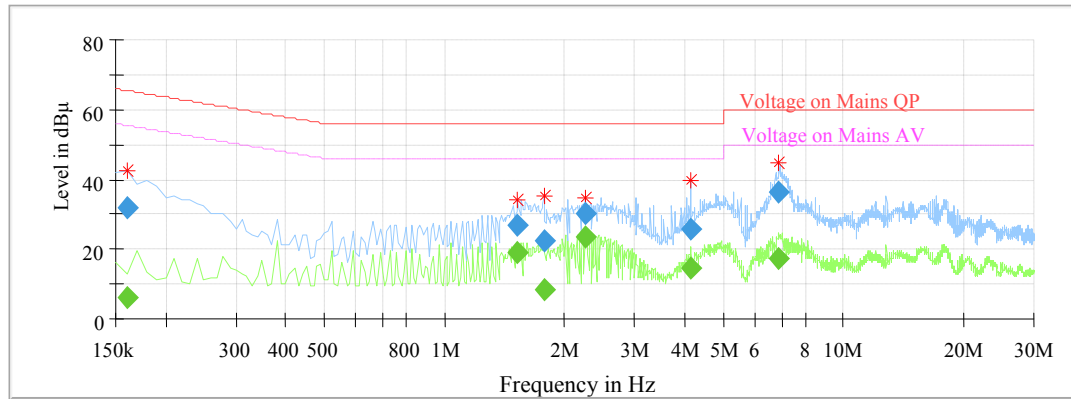

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.160000	---	6.00	9.000	L1	10.1	49.46	55.46	Compliance
0.160000	31.84	---	9.000	L1	10.1	33.62	65.46	Compliance
1.530000	---	19.04	9.000	L1	9.8	26.96	46.00	Compliance
1.530000	27.06	---	9.000	L1	9.8	28.94	56.00	Compliance
1.780000	---	8.55	9.000	L1	9.8	37.45	46.00	Compliance
1.780000	22.15	---	9.000	L1	9.8	33.85	56.00	Compliance
2.250000	---	23.43	9.000	L1	9.9	22.57	46.00	Compliance
2.250000	30.01	---	9.000	L1	9.9	25.99	56.00	Compliance
4.140000	---	14.31	9.000	L1	9.9	31.69	46.00	Compliance
4.140000	25.74	---	9.000	L1	9.9	30.26	56.00	Compliance
6.890000	---	17.59	9.000	L1	10.0	32.41	50.00	Compliance
6.890000	36.19	---	9.000	L1	10.0	23.81	60.00	Compliance

AC 120V/60 Hz, Neutral

Full Spectrum

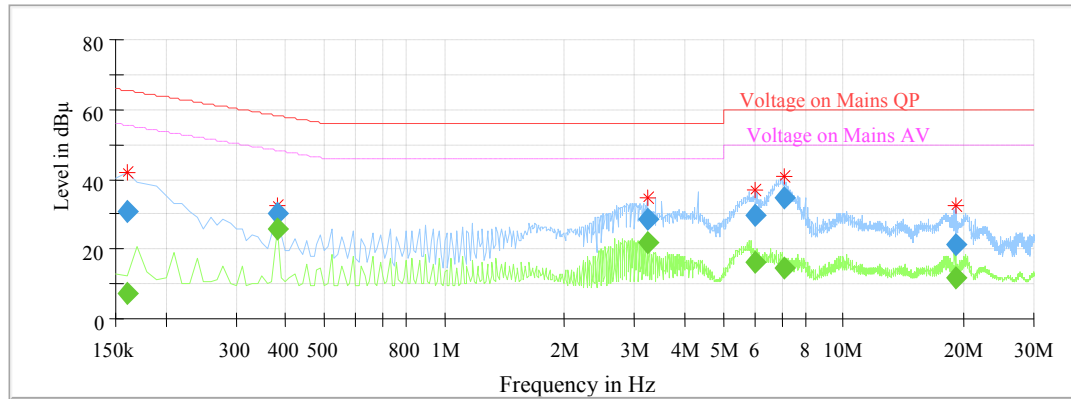

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.160000	---	7.41	9.000	N	10.1	48.05	55.46	Compliance
0.160000	31.02	---	9.000	N	10.1	34.44	65.46	Compliance
0.380000	---	25.57	9.000	N	10.1	22.71	48.28	Compliance
0.380000	30.15	---	9.000	N	10.1	28.13	58.28	Compliance
3.220000	---	21.59	9.000	N	9.9	24.41	46.00	Compliance
3.220000	28.65	---	9.000	N	9.9	27.35	56.00	Compliance
5.990000	---	16.04	9.000	N	9.9	33.96	50.00	Compliance
5.990000	29.51	---	9.000	N	9.9	30.49	60.00	Compliance
7.090000	---	14.37	9.000	N	9.9	35.63	50.00	Compliance
7.090000	34.73	---	9.000	N	9.9	25.27	60.00	Compliance
19.060000	---	11.69	9.000	N	10.1	38.31	50.00	Compliance
19.060000	21.22	---	9.000	N	10.1	38.78	60.00	Compliance

Note:


- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

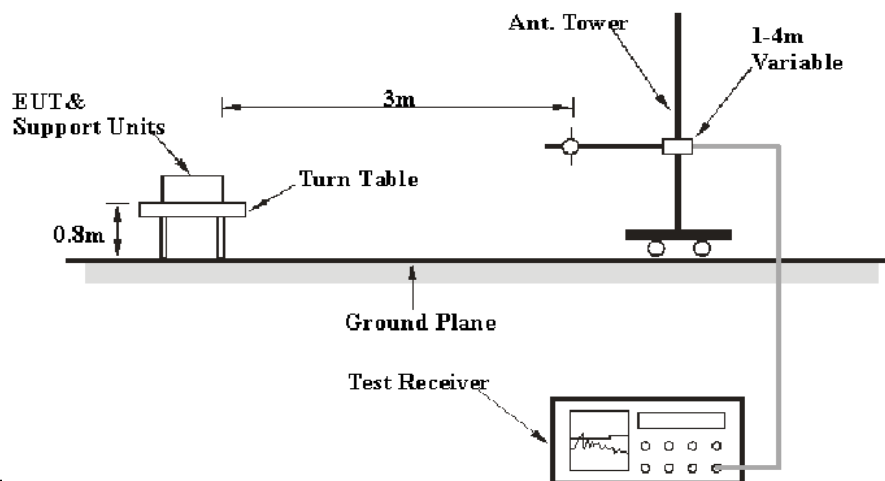

Above 1GHz:

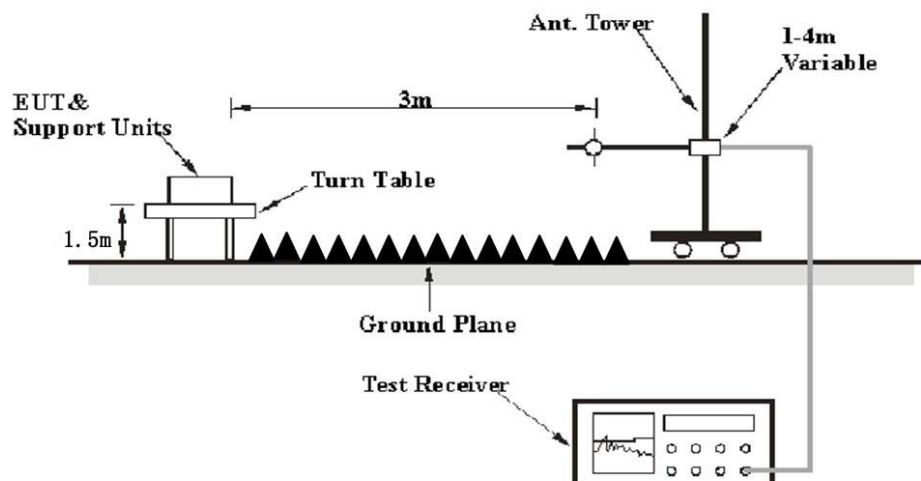

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Ave.
	1MHz	> 1/T ^{Note 2}	/	Ave.

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	22 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Layne Li on 2017-01-10.

EUT operation mode: Transmitting (900MHz)

30 MHz-10 GHz:**Antenna 1****BPSK-40-ALT Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(906MHz)									
840.32	37.21	QP	350	1.9	H	-1.59	35.62	46	10.38
906.00	101.87	PK	69	1.6	H	-0.86	101.01	/	/
906.00	101.72	Ave.	69	1.6	H	-0.86	100.86	/	/
906.00	92.92	PK	52	1.7	V	-0.86	92.06	/	/
906.00	92.59	Ave.	52	1.7	V	-0.86	91.73	/	/
1812.00	47.05	PK	142	1.6	V	-8.04	39.01	74	34.99
1812.00	41.4	Ave.	142	1.6	V	-8.04	33.36	54	20.64
2718.00	48.04	PK	80	2.3	V	-4.88	43.16	74	30.84
2718.00	35.62	Ave.	80	2.3	V	-4.88	30.74	54	23.26
3624.00	46.08	PK	305	1.7	V	-1.61	44.47	74	29.53
3624.00	31.81	Ave.	305	1.7	V	-1.61	30.20	54	23.80

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel(914 MHz)									
840.32	37.17	QP	277	1.4	H	-1.59	35.58	46	10.42
914.00	101.59	PK	53	1.2	H	-0.86	100.73	/	/
914.00	101.11	Ave.	53	1.2	H	-0.86	100.25	/	/
914.00	94.05	PK	53	1.2	V	-0.86	93.19	/	/
914.00	93.74	Ave.	53	1.2	V	-0.86	92.88	/	/
1828.00	46.71	PK	7	1.2	V	-8.04	38.67	74	35.33
1828.00	39.18	Ave.	7	1.2	V	-8.04	31.14	54	22.86
2742.00	47.67	PK	11	1.7	V	-4.88	42.79	74	31.21
2742.00	35.97	Ave.	11	1.7	V	-4.88	31.09	54	22.91
3656.00	45.49	PK	39	2.3	V	-1.28	44.21	74	29.79
3656.00	32.02	Ave.	39	2.3	V	-1.28	30.74	54	23.26
High Channel(924MHz)									
840.32	37.15	QP	94	1.6	H	-1.59	35.56	46	10.44
924.00	105.06	PK	264	1.3	H	-0.86	104.20	/	/
924.00	104.24	Ave.	264	1.3	H	-0.86	103.38	/	/
924.00	93.82	PK	264	1.3	V	-0.86	92.96	/	/
924.00	93.69	Ave.	264	1.3	V	-0.86	92.83	/	/
1848.00	46.07	PK	288	1.8	V	-8.04	38.03	74	35.97
1848.00	37.65	Ave.	288	1.8	V	-8.04	29.61	54	24.39
2772.00	47.7	PK	226	1.2	V	-4.33	43.37	74	30.63
2772.00	36.06	Ave.	226	1.2	V	-4.33	31.73	54	22.27
3696.00	45.82	PK	338	2.3	V	-1.28	44.54	74	29.46
3696.00	32.08	Ave.	338	2.3	V	-1.28	30.80	54	23.20

OQPSK-SIN-250 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(906MHz)									
840.32	37.26	QP	19	1.9	H	-1.59	35.67	46	10.33
906.00	106.00	PK	89	1.2	H	-0.86	105.14	/	/
906.00	105.69	Ave.	89	1.2	H	-0.86	104.83	/	/
906.00	93.75	PK	89	1.2	V	-0.86	92.89	/	/
906.00	93.43	Ave.	89	1.2	V	-0.86	92.57	/	/
1812.00	48.28	PK	354	1.4	V	-8.04	40.24	74	33.76
1812.00	43.67	Ave.	354	1.4	V	-8.04	35.63	54	18.37
2718.00	48.57	PK	11	2.1	V	-4.88	43.69	74	30.31
2718.00	37.21	Ave.	11	2.1	V	-4.88	32.33	54	21.67
3624.00	46.36	PK	158	2.3	V	-1.61	44.75	74	29.25
3624.00	31.95	Ave.	158	2.3	V	-1.61	30.34	54	23.66
Middle Channel(914 MHz)									
840.32	37.31	QP	96	1.4	H	-1.59	35.72	46	10.28
914.00	105.71	PK	282	1.5	H	-0.86	104.85	/	/
914.00	105.02	Ave.	282	1.5	H	-0.86	104.16	/	/
914.00	94.27	PK	282	1.5	V	-0.86	93.41	/	/
914.00	93.89	Ave.	282	1.5	V	-0.86	93.03	/	/
1828.00	47.33	PK	295	1.5	V	-8.04	39.29	74	34.71
1828.00	42.22	Ave.	295	1.5	V	-8.04	34.18	54	19.82
2742.00	48.24	PK	79	2.0	V	-4.88	43.36	74	30.64
2742.00	36.61	Ave.	79	2.0	V	-4.88	31.73	54	22.27
3656.00	46.59	PK	253	2.3	V	-1.28	45.31	74	28.69
3656.00	32.11	Ave.	253	2.3	V	-1.28	30.83	54	23.17

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(924 MHz)									
840.32	37.25	QP	25	2.0	H	-1.59	35.66	46	10.34
924.00	103.38	PK	359	1.2	H	-0.86	102.52	/	/
924.00	102.82	Ave.	359	1.2	H	-0.86	101.96	/	/
924.00	95.96	PK	359	1.2	V	-0.86	95.10	/	/
924.00	95.78	Ave.	359	1.2	V	-0.86	94.92	/	/
1848.00	47.5	PK	56	1.0	V	-8.04	39.46	74	34.54
1848.00	41.18	Ave.	56	1.0	V	-8.04	33.14	54	20.86
2772.00	48.19	PK	343	1.5	V	-4.33	43.86	74	30.14
2772.00	36.61	Ave.	343	1.5	V	-4.33	32.28	54	21.72
3696.00	46.67	PK	342	2.2	V	-1.28	45.39	74	28.61
3696.00	32.18	Ave.	342	2.2	V	-1.28	30.90	54	23.10

OQPSK-SIN-1000-SCR-ON Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(906MHz)									
840.32	37.41	QP	276	1.4	H	-1.59	35.82	46	10.18
906.00	104.94	PK	167	1.6	H	-0.86	104.08	/	/
906.00	104.11	Ave.	167	1.6	H	-0.86	103.25	/	/
906.00	94.19	PK	167	1.6	V	-0.86	93.33	/	/
906.00	93.67	Ave.	167	1.6	V	-0.86	92.81	/	/
1812.00	48.86	PK	32	2.1	V	-8.04	40.82	74	33.18
1812.00	44.16	Ave.	32	2.1	V	-8.04	36.12	54	17.88
2718.00	49.61	PK	288	2.1	V	-4.88	44.73	74	29.27
2718.00	37.36	Ave.	288	2.1	V	-4.88	32.48	54	21.52
3624.00	46.81	PK	215	2.4	V	-1.61	45.20	74	28.80
3624.00	32.21	Ave.	215	2.4	V	-1.61	30.60	54	23.40
Middle Channel(914 MHz)									
840.32	37.32	QP	308	1.4	H	-1.59	35.73	46	10.27
914.00	105.22	PK	85	1.8	H	-0.86	104.36	/	/
914.00	104.72	Ave.	85	1.8	H	-0.86	103.86	/	/
914.00	95.35	PK	85	1.8	V	-0.86	94.49	/	/
914.00	94.78	Ave.	85	1.8	V	-0.86	93.92	/	/
1828.00	47.3	PK	299	1.6	V	-8.04	39.26	74	34.74
1828.00	41.82	Ave.	299	1.6	V	-8.04	33.78	54	20.22
2742.00	49.2	PK	127	1.3	V	-4.88	44.32	74	29.68
2742.00	37.27	Ave.	127	1.3	V	-4.88	32.39	54	21.61
3656.00	46.82	PK	295	1.0	V	-1.28	45.54	74	28.46
3656.00	32.24	Ave.	295	1.0	V	-1.28	30.96	54	23.04

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(924 MHz)									
840.32	37.21	QP	146	1.7	H	-1.59	35.62	46	10.38
924.00	106.14	PK	281	2.0	H	-0.86	105.28	/	/
924.00	105.71	Ave.	281	2.0	H	-0.86	104.85	/	/
924.00	93.95	PK	281	2.0	V	-0.86	93.09	/	/
924.00	93.51	Ave.	281	2.0	V	-0.86	92.65	/	/
1848.00	47.78	PK	85	1.1	V	-8.04	39.74	74	34.26
1848.00	41.4	Ave.	85	1.1	V	-8.04	33.36	54	20.64
2772.00	49.22	PK	200	2.5	V	-4.33	44.89	74	29.11
2772.00	37.2	Ave.	200	2.5	V	-4.33	32.87	54	21.13
3696.00	46.99	PK	108	2.0	V	-1.28	45.71	74	28.29
3696.00	32.37	Ave.	108	2.0	V	-1.28	31.09	54	22.91

Antenna 2:**BPSK-40-ALT Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(906MHz)									
841.37	36.55	QP	350	1.9	H	-1.59	34.96	46	11.04
906	101.85	PK	69	1.6	V	-0.86	100.99	/	/
906	101.69	Ave.	69	1.6	V	-0.86	100.83	/	/
906	100.90	PK	52	1.7	H	-0.86	100.04	/	/
906	100.72	Ave.	52	1.7	H	-0.86	99.86	/	/
1812.00	50.34	PK	169	1.5	H	-8.04	42.30	74	31.70
1812.00	41.18	Ave.	169	1.5	H	-8.04	33.14	54	20.86
2718.00	49	PK	191	2.2	H	-4.88	44.12	74	29.88
2718.00	34.87	Ave.	191	2.2	H	-4.88	29.99	54	24.01
3624.00	47.09	PK	182	1.4	H	-1.61	45.48	74	28.52
3624.00	31.46	Ave.	182	1.4	H	-1.61	29.85	54	24.15

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel(914 MHz)									
841.37	36.42	QP	350	1.9	H	-1.59	34.83	46	11.17
914	101.80	PK	53	1.2	V	-0.86	100.94	/	/
914	101.62	Ave.	53	1.2	V	-0.86	100.76	/	/
914	100.84	PK	53	1.2	H	-0.86	99.98	/	/
914	100.68	Ave.	53	1.2	H	-0.86	99.82	/	/
1828.00	48.49	PK	220	1.9	H	-8.04	40.45	74	33.55
1828.00	38.3	Ave.	220	1.9	H	-8.04	30.26	54	23.74
2742.00	49.6	PK	80	1.9	H	-4.88	44.72	74	29.28
2742.00	35.78	Ave.	80	1.9	H	-4.88	30.90	54	23.10
3656.00	48.35	PK	231	2.0	H	-1.28	47.07	74	26.93
3656.00	39.5	Ave.	231	2.0	H	-1.28	38.22	54	15.78
High Channel(924MHz)									
841.37	36.47	QP	350	1.9	H	-1.59	34.88	46	11.17
924	102.02	PK	264	1.3	V	-0.86	101.16	/	/
924	101.84	Ave.	264	1.3	V	-0.86	100.98	/	/
924	101.29	PK	264	1.3	H	-0.86	100.43	/	/
924	101.07	Ave.	264	1.3	H	-0.86	100.21	/	/
1848.00	48.3	PK	232	1.9	H	-8.04	40.26	74	33.74
1848.00	38.9	Ave.	232	1.9	H	-8.04	30.86	54	23.14
2772.00	49.41	PK	216	2.5	H	-4.33	45.08	74	28.92
2772.00	35.66	Ave.	216	2.5	H	-4.33	31.33	54	22.67
3696.00	50.39	PK	210	1.5	H	-1.28	49.11	74	24.89
3696.00	43.84	Ave.	210	1.5	H	-1.28	42.56	54	11.44

OQPSK-SIN-250 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(906MHz)									
841.37	36.32	QP	350	1.9	H	-1.59	34.73	46	11.27
906	102.29	PK	69	1.6	V	-0.86	101.43	/	/
906	101.87	Ave.	69	1.6	V	-0.86	101.01	/	/
906	101.82	PK	52	1.7	H	-0.86	100.96	/	/
906	101.54	Ave.	52	1.7	H	-0.86	100.68	/	/
1812.00	47.84	PK	139	1.8	H	-8.04	39.80	74	34.20
1812.00	36.59	Ave.	139	1.8	H	-8.04	28.55	54	25.45
2718.00	50.58	PK	231	1.0	H	-4.88	45.70	74	28.30
2718.00	43.74	Ave.	231	1.0	H	-4.88	38.86	54	15.14
3624.00	47.21	PK	39	2.0	H	-1.61	45.60	74	28.40
3624.00	31.46	Ave.	39	2.0	H	-1.61	29.85	54	24.15
Middle Channel(914 MHz)									
841.37	36.46	QP	350	1.9	H	-1.59	34.87	46	11.27
914	102.15	PK	53	1.2	V	-0.86	101.29	/	/
914	101.89	Ave.	53	1.2	V	-0.86	101.03	/	/
914	101.54	PK	53	1.2	H	-0.86	100.68	/	/
914	101.22	Ave.	53	1.2	H	-0.86	100.36	/	/
1828.00	49.46	PK	272	1.7	H	-8.04	41.42	74	32.58
1828.00	41.61	Ave.	272	1.7	H	-8.04	33.57	54	20.43
2742.00	49.81	PK	72	1.9	H	-4.88	44.93	74	29.07
2742.00	37.37	Ave.	72	1.9	H	-4.88	32.49	54	21.51
3656.00	48.2	PK	60	2.4	H	-1.28	46.92	74	27.08
3656.00	33.98	Ave.	60	2.4	H	-1.28	32.70	54	21.30

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(924 MHz)									
841.37	36.41	QP	350	1.9	H	-1.59	34.82	46	11.18
924	102.83	PK	264	1.3	V	-0.86	101.97	/	/
924	102.54	Ave.	264	1.3	V	-0.86	101.68	/	/
924	101.84	PK	264	1.3	H	-0.86	100.98	/	/
924	101.48	Ave.	264	1.3	H	-0.86	100.62	/	/
1848.00	46.47	PK	201	2.1	H	-8.04	38.43	74	35.57
1848.00	38.6	Ave.	201	2.1	H	-8.04	30.56	54	23.44
2772.00	50.84	PK	76	2.3	H	-4.33	46.51	74	27.49
2772.00	37.94	Ave.	76	2.3	H	-4.33	33.61	54	20.39
3696.00	49.45	PK	148	1.3	H	-1.28	48.17	74	25.83
3696.00	37.82	Ave.	148	1.3	H	-1.28	36.54	54	17.46

OQPSK-SIN-1000-SCR-ON Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel(906MHz)									
841.37	36.52	QP	350	1.9	H	-1.59	34.93	46	11.07
906	102.05	PK	69	1.6	V	-0.86	101.19	/	/
906	101.84	Ave.	69	1.6	V	-0.86	100.98	/	/
906	101.51	PK	52	1.7	H	-0.86	100.65	/	/
906	101.18	Ave.	52	1.7	H	-0.86	100.32	/	/
1812.00	48.16	PK	352	2.4	H	-8.04	40.12	74	33.88
1812.00	41.61	Ave.	352	2.4	H	-8.04	33.57	54	20.43
2718.00	51.46	PK	217	2.0	H	-4.88	46.58	74	27.42
2718.00	35.78	Ave.	217	2.0	H	-4.88	30.90	54	23.10
3624.00	47.08	PK	52	2.3	H	-1.61	45.47	74	28.53
3624.00	38.64	Ave.	52	2.3	H	-1.61	37.03	54	16.97
Middle Channel(914 MHz)									
841.37	36.55	QP	350	1.9	H	-1.59	34.96	46	11.04
914	101.88	PK	53	1.2	V	-0.86	101.02	/	/
914	101.72	Ave.	53	1.2	V	-0.86	100.86	/	/
914	101.39	PK	53	1.2	H	-0.86	100.53	/	/
914	100.89	Ave.	53	1.2	H	-0.86	100.03	/	/
1828.00	48.95	PK	123	1.1	H	-8.04	40.91	74	33.09
1828.00	43.16	Ave.	123	1.1	H	-8.04	35.12	54	18.88
2742.00	50.97	PK	283	2.2	H	-4.88	46.09	74	27.91
2742.00	42.63	Ave.	283	2.2	H	-4.88	37.75	54	16.25
3656.00	47.75	PK	145	1.5	H	-1.28	46.47	74	27.53
3656.00	33.98	Ave.	145	1.5	H	-1.28	32.70	54	21.30

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel(924 MHz)									
841.37	36.40	QP	350	1.9	H	-1.59	34.81	46	11.19
924	102.34	PK	264	1.3	V	-0.86	101.48	/	/
924	102.13	Ave.	264	1.3	V	-0.86	101.27	/	/
924	101.78	PK	264	1.3	H	-0.86	100.92	/	/
924	101.53	Ave.	264	1.3	H	-0.86	100.67	/	/
1848.00	47.35	PK	81	1.5	H	-8.04	39.31	74	34.69
1848.00	39.18	Ave.	81	1.5	H	-8.04	31.14	54	22.86
2772.00	51.19	PK	169	1.9	H	-4.33	46.86	74	27.14
2772.00	43.96	Ave.	169	1.9	H	-4.33	39.63	54	14.37
3696.00	49.58	PK	289	1.4	H	-1.28	48.30	74	25.70
3696.00	41.74	Ave.	289	1.4	H	-1.28	40.46	54	13.54

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


Emission more than 20 dB below the limit is not required to be reported.

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

Temperature:	22~24℃
Relative Humidity:	47~52 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Echo Wu from 2017-01-05 to 2017-02-09.

Test Result: Pass.


Please refer to the following table and plots.

EUT operation mode: Transmitting (900MHz)


Antenna 1

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
BPSK-40-ALT mode			
Low	906	0.701	≥ 500
Middle	914	0.691	≥ 500
High	924	0.691	≥ 500
OQPSK-SIN-250 mode			
Low	906	0.852	≥ 500
Middle	914	0.852	≥ 500
High	924	0.852	≥ 500
OQPSK-SIN-1000-SCR-ON mode			
Low	906	0.822	≥ 500
Middle	914	0.842	≥ 500
High	924	0.852	≥ 500


BPSK-40-ALT Low Channel

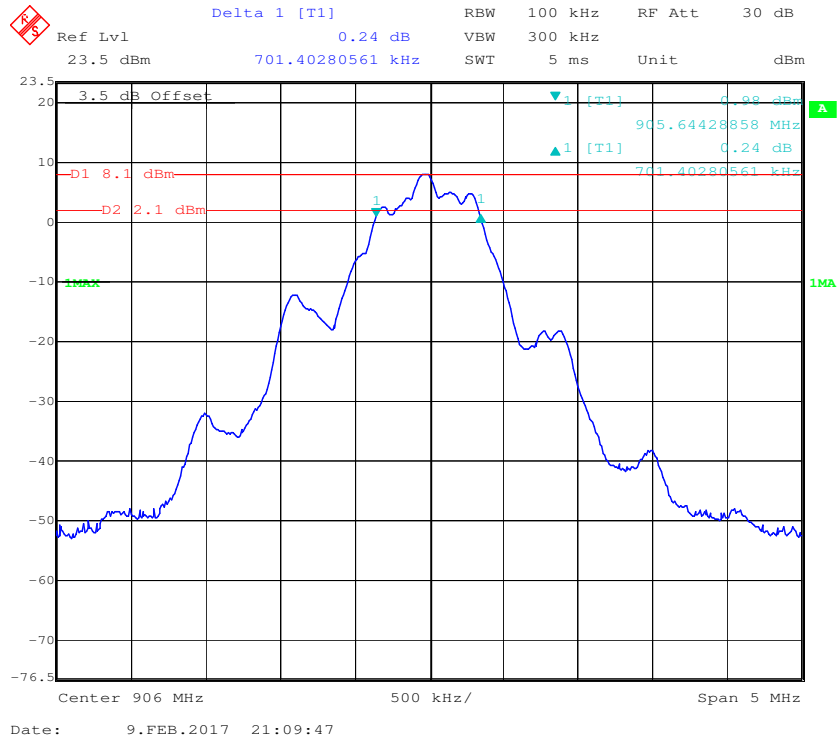


BPSK-40-ALT Middle Channel

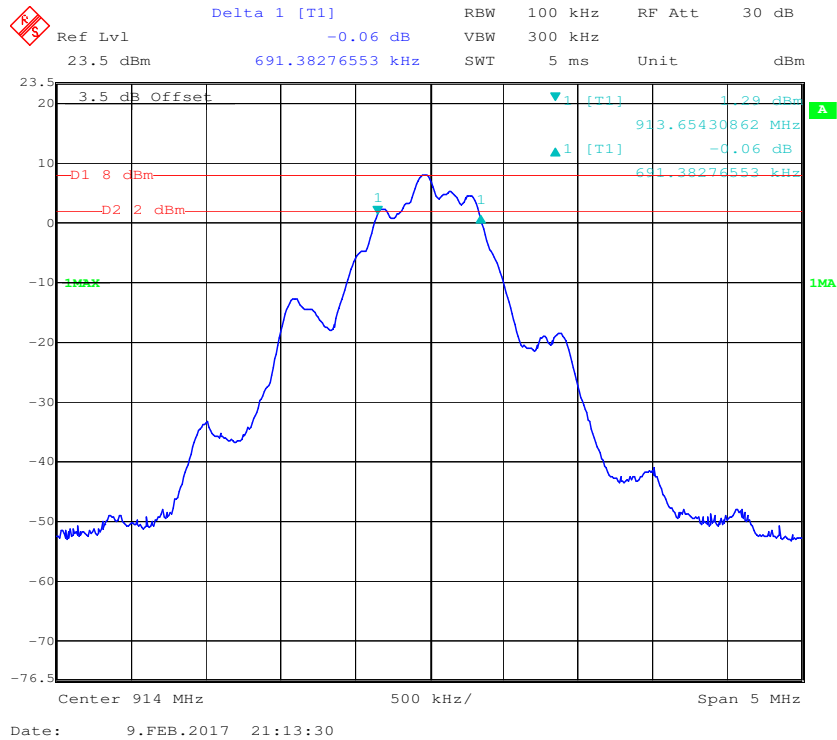

BPSK-40-ALT High Channel

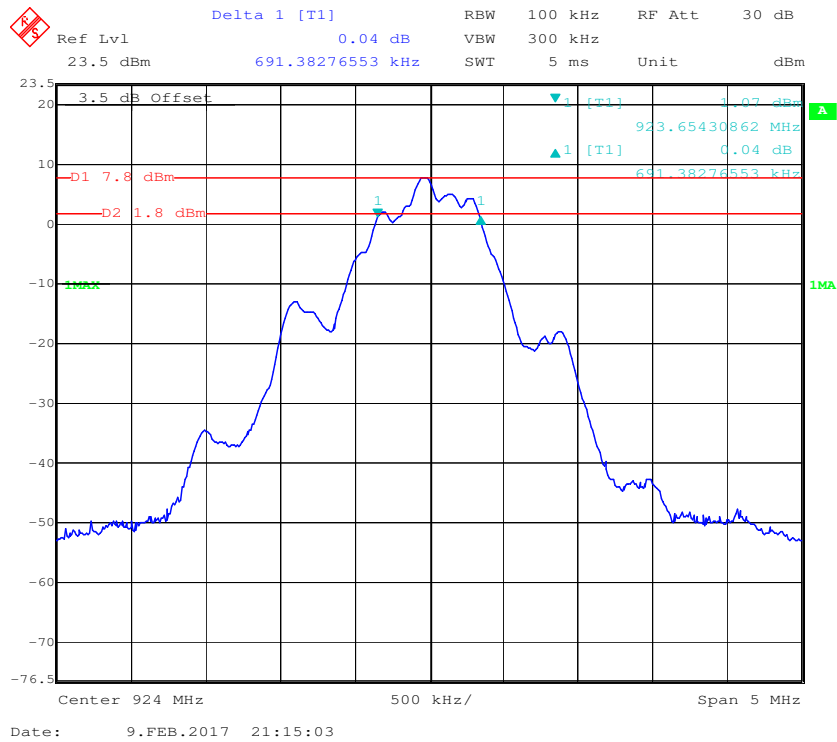

OQPSK-SIN-250 Low Channel

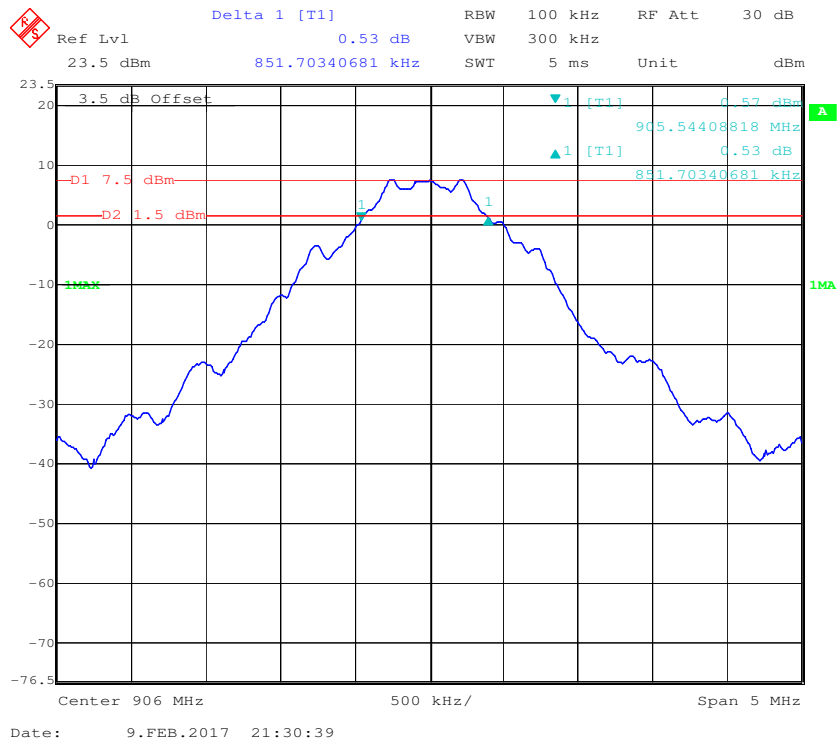

Delta 1 [T1]

Ref Lvl 23.5 dBm

0.13 dB

RBW 100 kHz

VBW 300 kHz

RF Att 30 dB

Unit dBm

3.5 dB Offset

D1 7.6 dBm

D2 1.6 dBm

100 kHz

913.55410822 MHz

0.13 dB

851.70340681 kHz

Center 914 MHz

500 kHz/

Span 5 MHz

Date: 9.FEB.2017 21:32:15

Ref Lvl 23.5 dBm Marker 1 [T1] 0.34 dBm RBW 100 kHz RF Att 30 dB
 923.54408818 MHz VBW 300 kHz Unit dBm
 3.5 dB Offset 5 ms 23.5 dBm


D1 7.3 dBm
 D2 1.3 dBm

1 [T1] 0.34 dBm
 923.54408818 MHz
 1 [T1] 0.80 dB
 851.70340681 kHz


Center 924 MHz 500 kHz/ Span 5 MHz

Date: 9.FEB.2017 21:40:42


OQPSK-SIN-1000-SCR-ON Low Channel

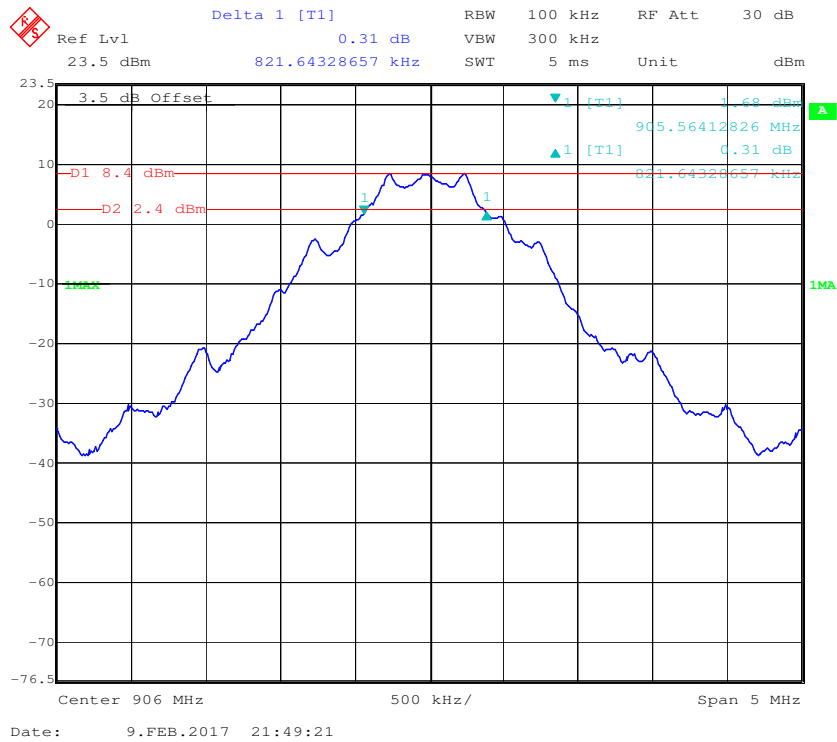

OQPSK-SIN-1000-SCR-ON Middle Channel

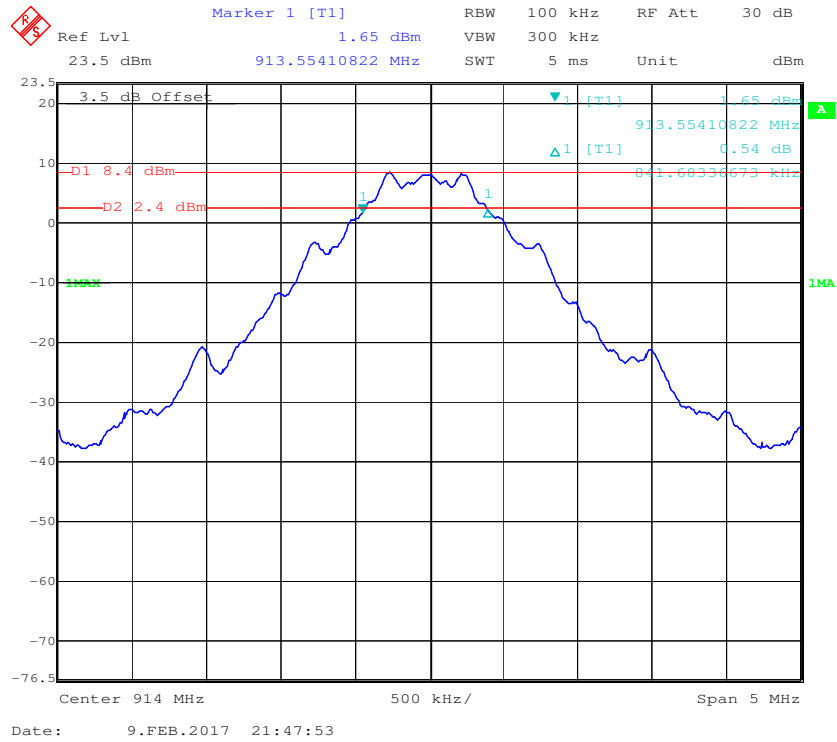


OQPSK-SIN-1000-SCR-ON High Channel

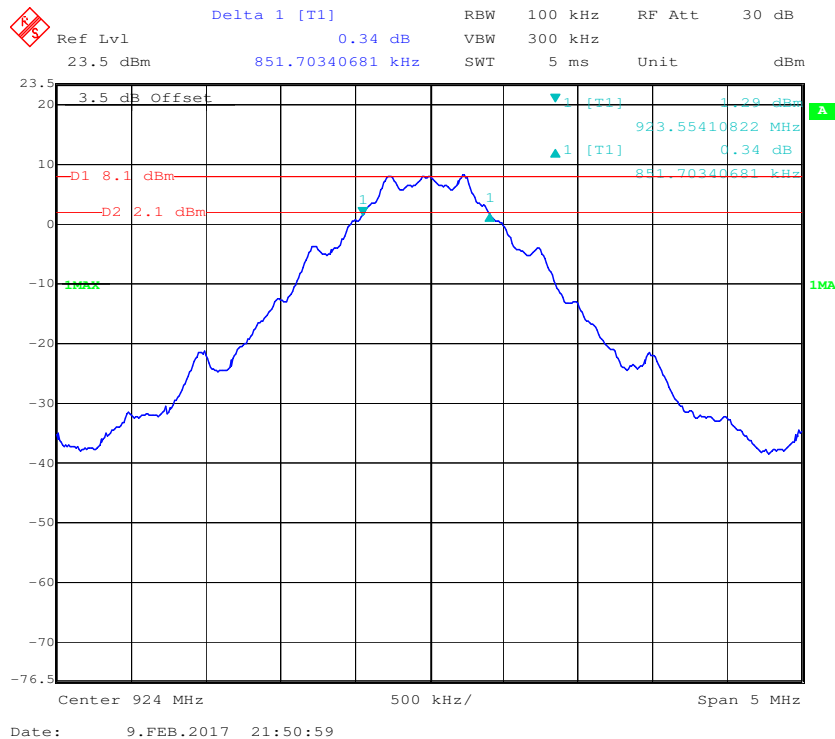


Antenna 2

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
BPSK-40-ALT mode			
Low	906	0.721	≥ 500
Middle	914	0.721	≥ 500
High	924	0.701	≥ 500
OQPSK-SIN-250 mode			
Low	906	0.832	≥ 500
Middle	914	0.852	≥ 500
High	924	0.842	≥ 500
OQPSK-SIN-1000-SCR-ON mode			
Low	906	0.812	≥ 500
Middle	914	0.822	≥ 500
High	924	0.802	≥ 500


BPSK-40-ALT Low Channel

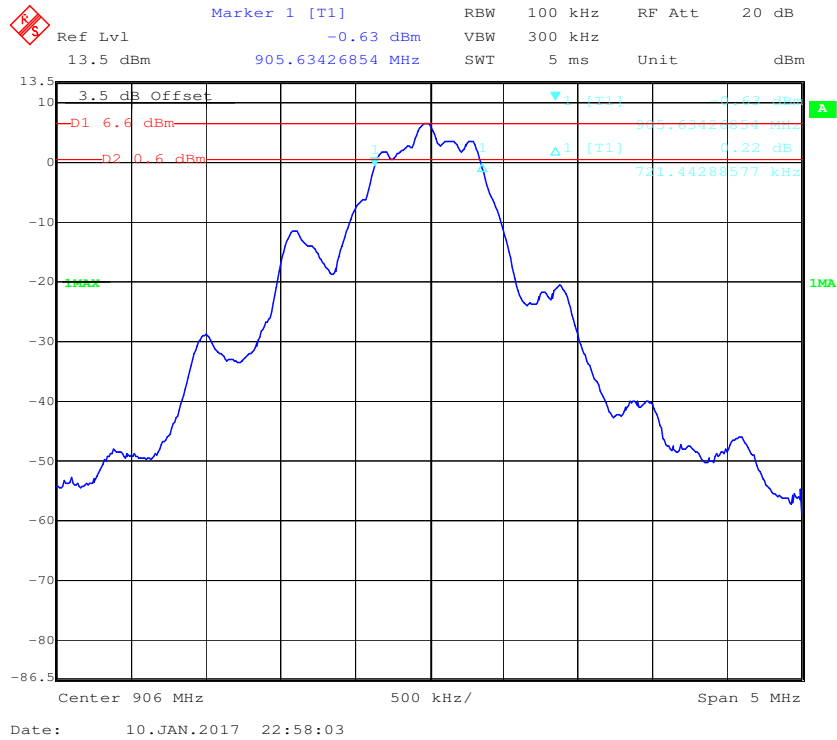


BPSK-40-ALT Middle Channel

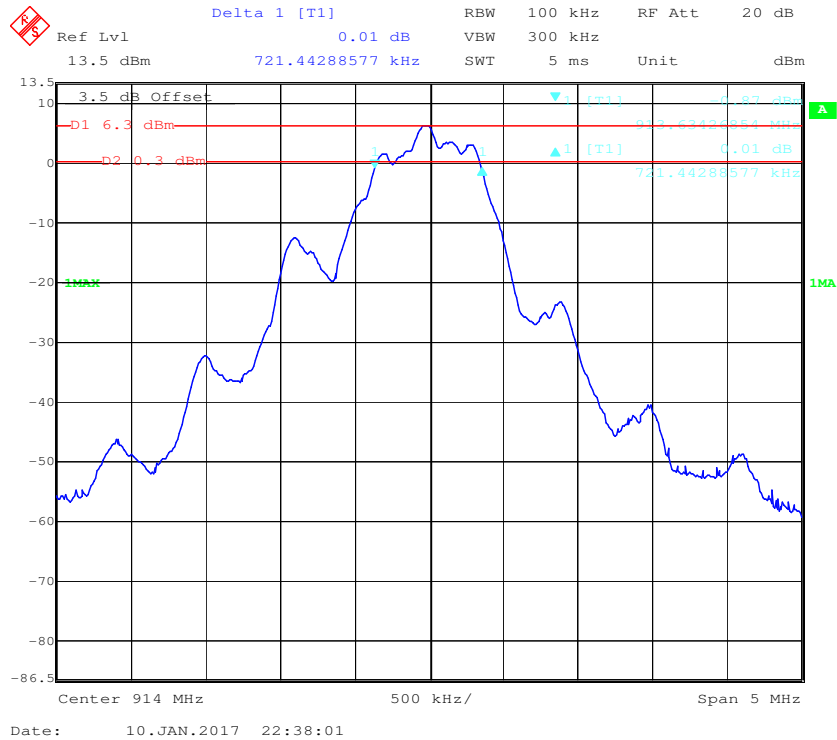


BPSK-40-ALT High Channel

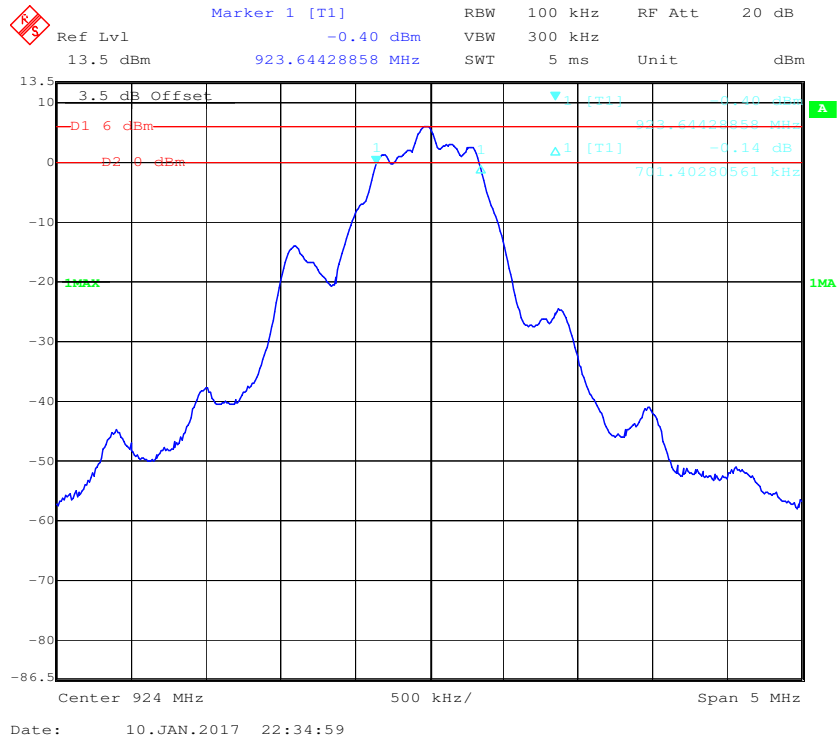


OQPSK-SIN-250 Low Channel

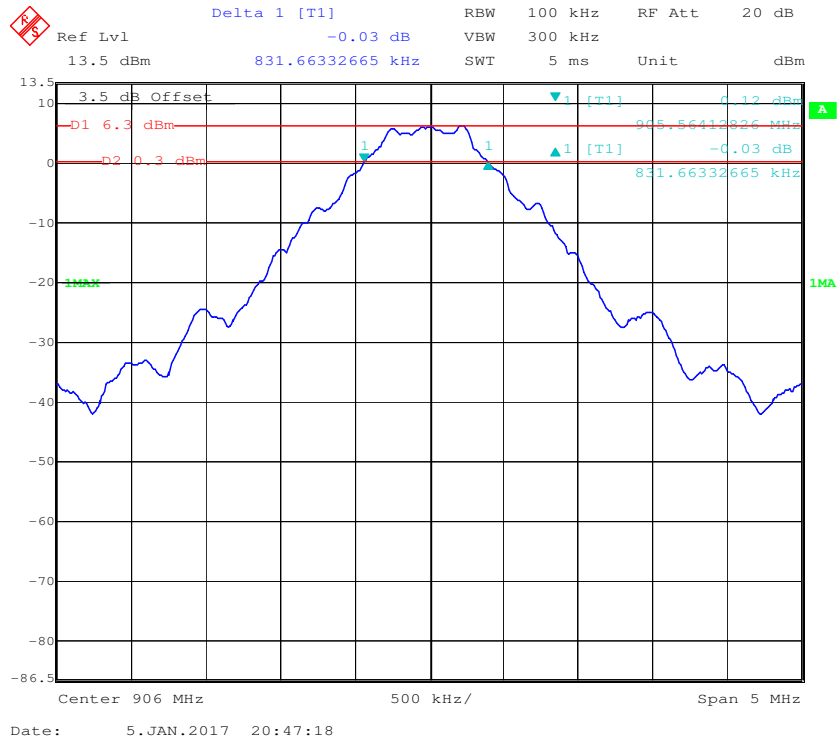


OQPSK-SIN-250 Middle Channel

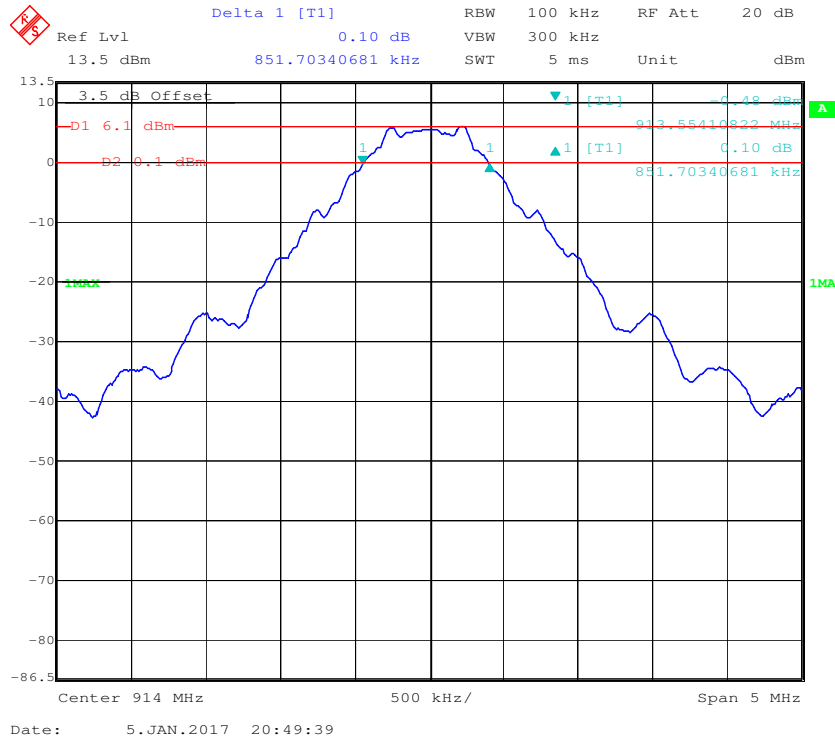


OQPSK-SIN-250 High Channel

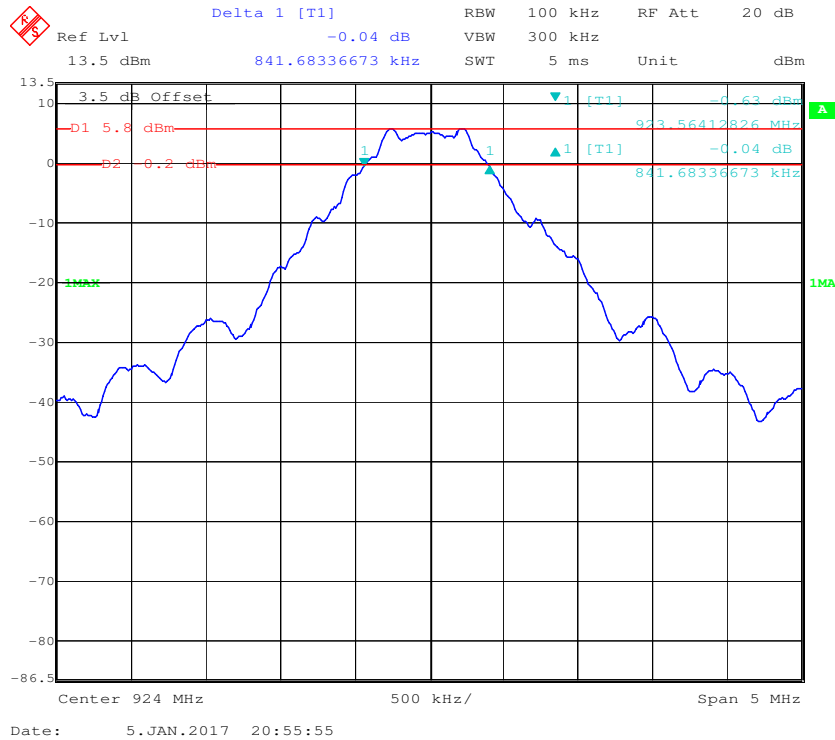


OQPSK-SIN-1000-SCR-ON Low Channel

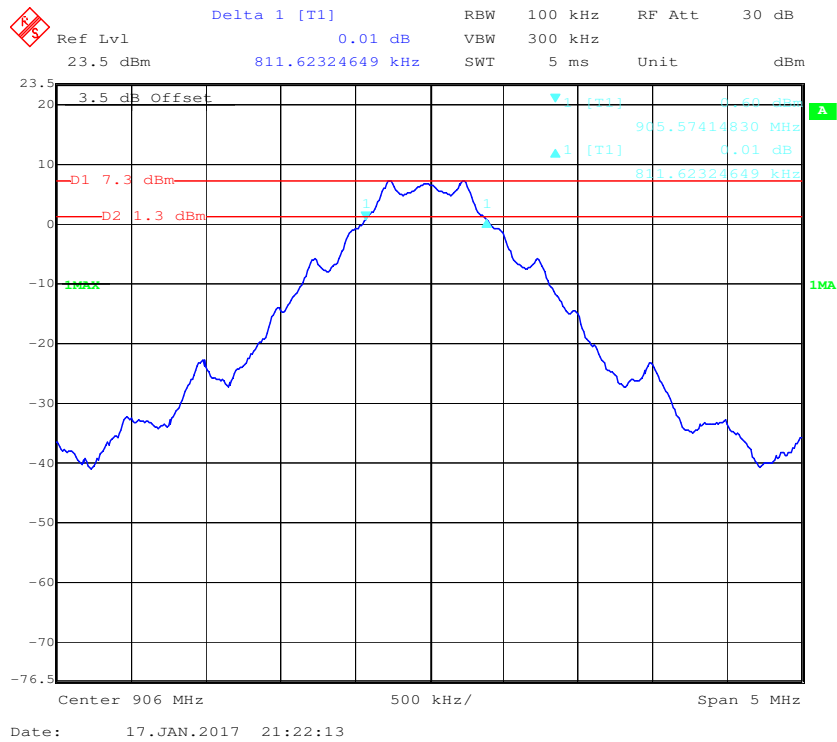

OQPSK-SIN-1000-SCR-ON Middle Channel

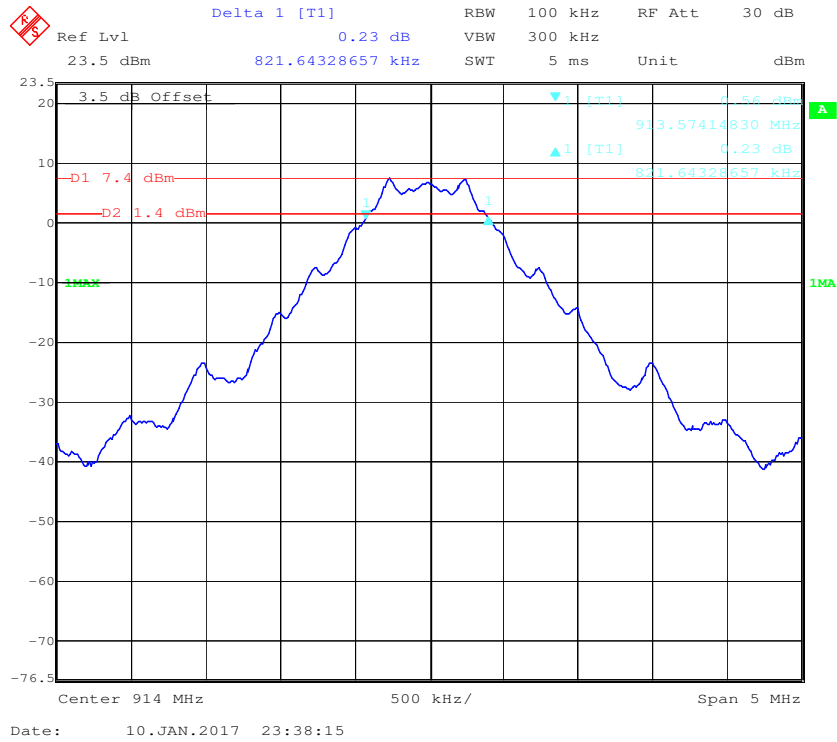

OQPSK-SIN-1000-SCR-ON High Channel

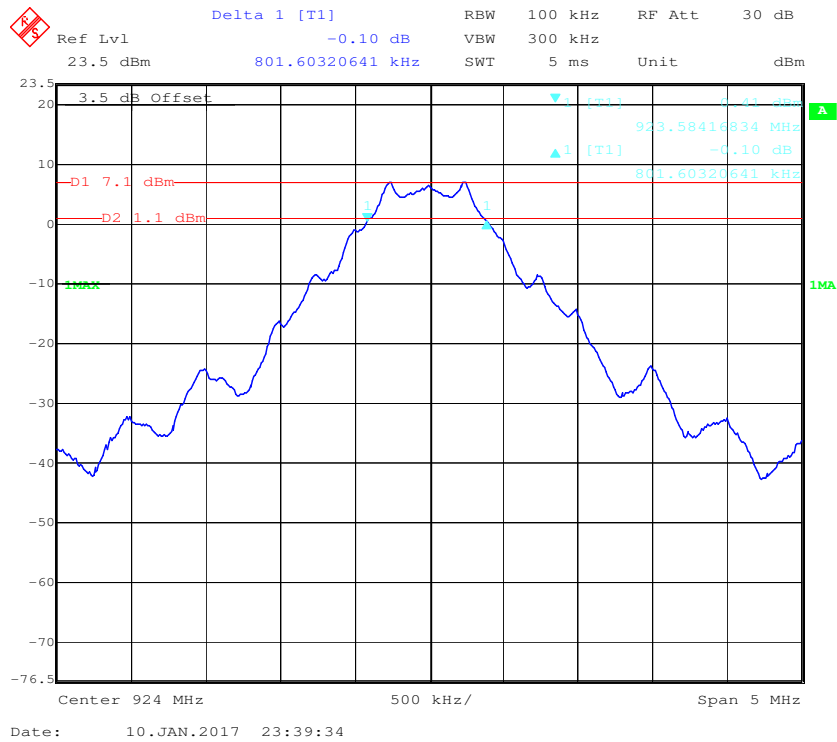


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-01-05.

Maximum peak conducted output power:

EUT operation mode: Transmitting (900MHz)

Antenna 1

Mode	Channel	Frequency (MHz)	Reading (dBm)	Limit (dBm)	Result
BPSK-40-ALT	Low	906	6.88	30	PASS
	Middle	914	6.82	30	PASS
	High	924	6.68	30	PASS
OQPSK-SIN-250	Low	906	6.26	30	PASS
	Middle	914	6.10	30	PASS
	High	924	5.93	30	PASS
OQPSK-SIN-1000-SCR-ON	Low	906	6.27	30	PASS
	Middle	914	6.10	30	PASS
	High	924	5.93	30	PASS

Antenna 2


Mode	Channel	Frequency (MHz)	Reading (dBm)	Limit (dBm)	Result
BPSK-40-ALT	Low	906	5.19	30	PASS
	Middle	914	4.96	30	PASS
	High	924	4.66	30	PASS
OQPSK-SIN-250	Low	906	5.01	30	PASS
	Middle	914	4.65	30	PASS
	High	924	4.22	30	PASS
OQPSK-SIN-1000-SCR-ON	Low	906	5.20	30	PASS
	Middle	914	4.83	30	PASS
	High	924	4.40	30	PASS

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	22~24℃
Relative Humidity:	47~52 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Echo Wu from 2017-01-05 to 2017-02-09.


Test Result: Compliance

Please refer to the following plots.


EUT operation mode: Transmitting (900MHz)

Antenna 1


BPSK-40-ALT: Band Edge, Left Side

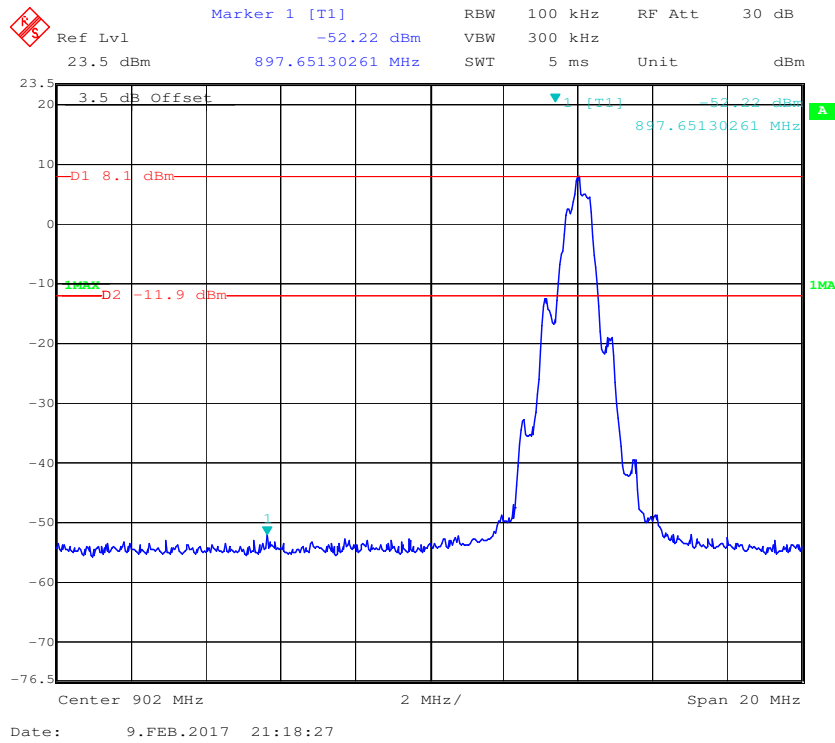


BPSK-40-ALT: Band Edge, Right Side

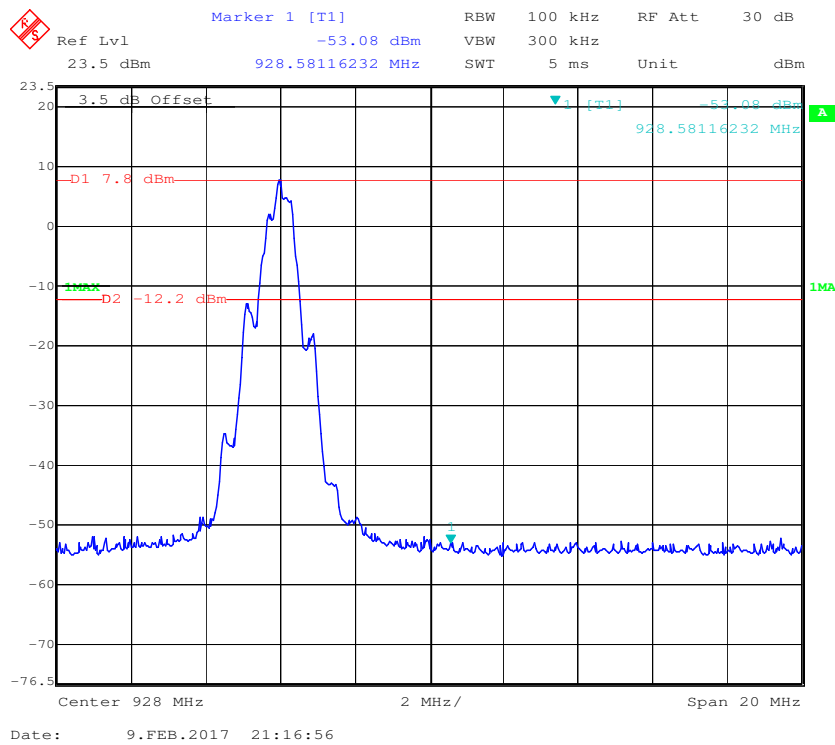


OQPSK-SIN-250: Band Edge, Left Side

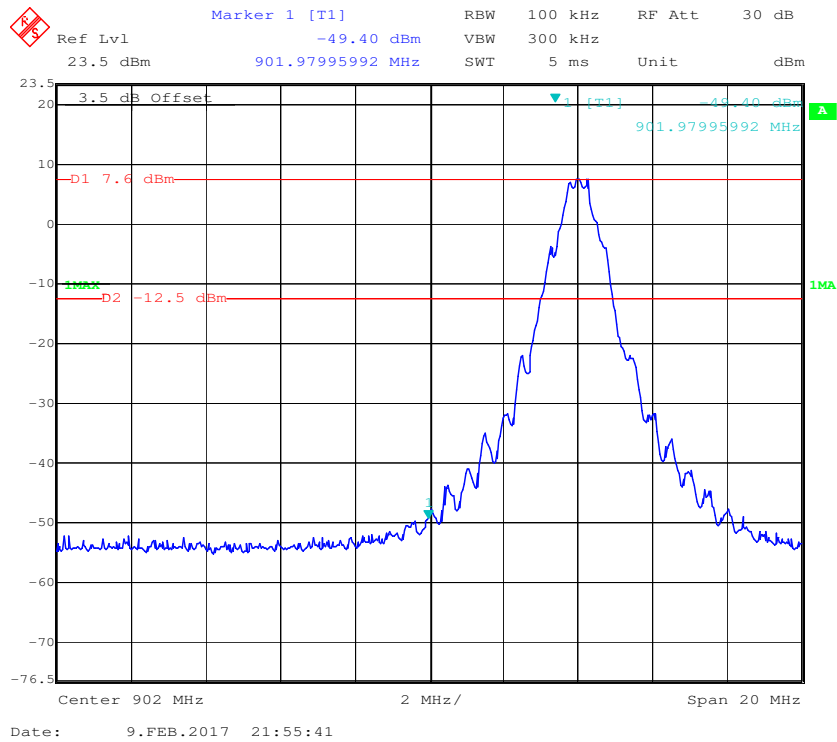


OQPSK-SIN-250: Band Edge, Right Side

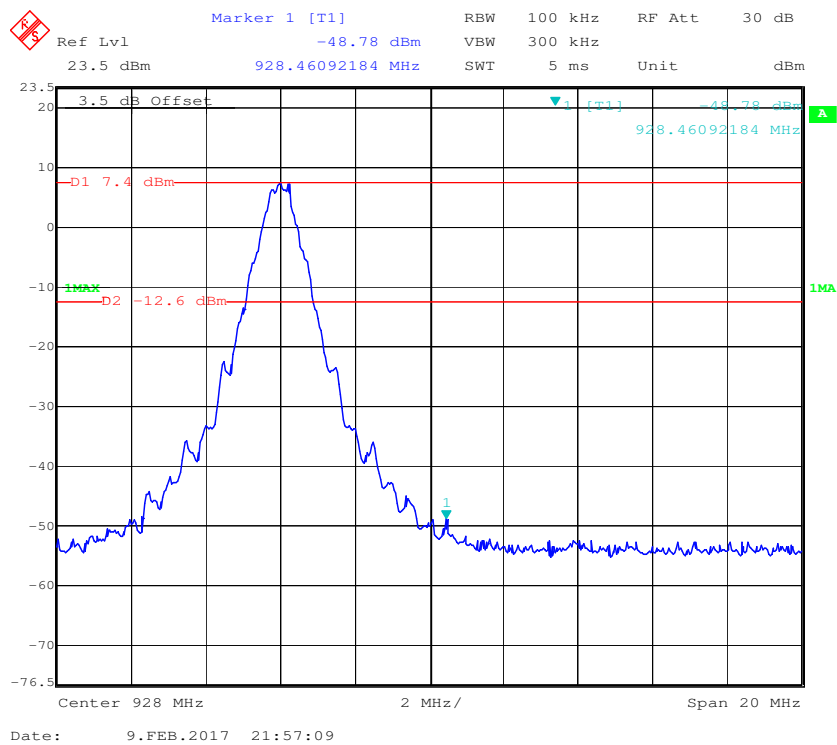

OQPSK-SIN-1000-SCR-ON: Band Edge, Left Side

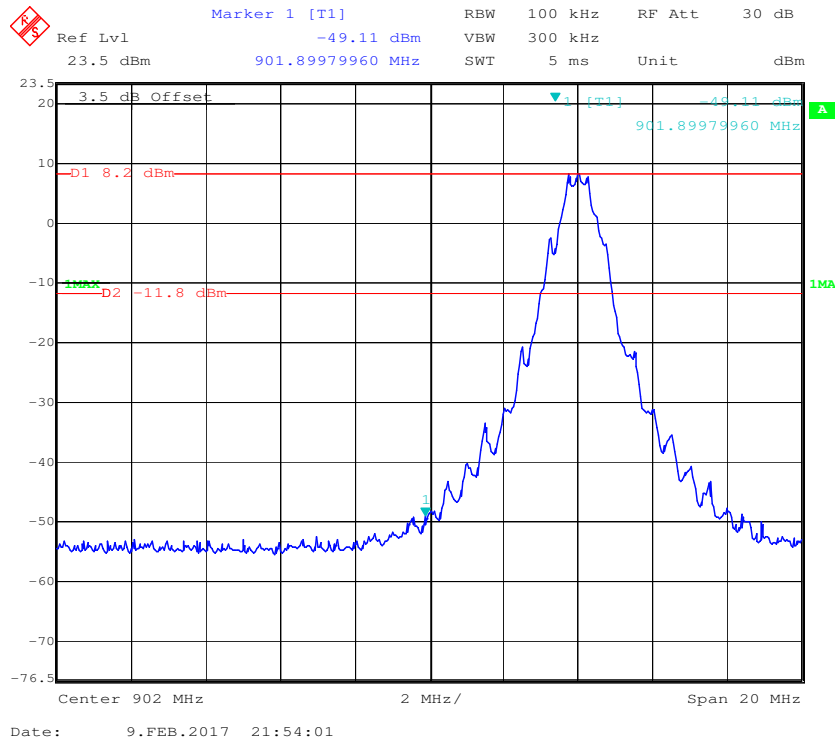


OQPSK-SIN-1000-SCR-ON: Band Edge, Right Side

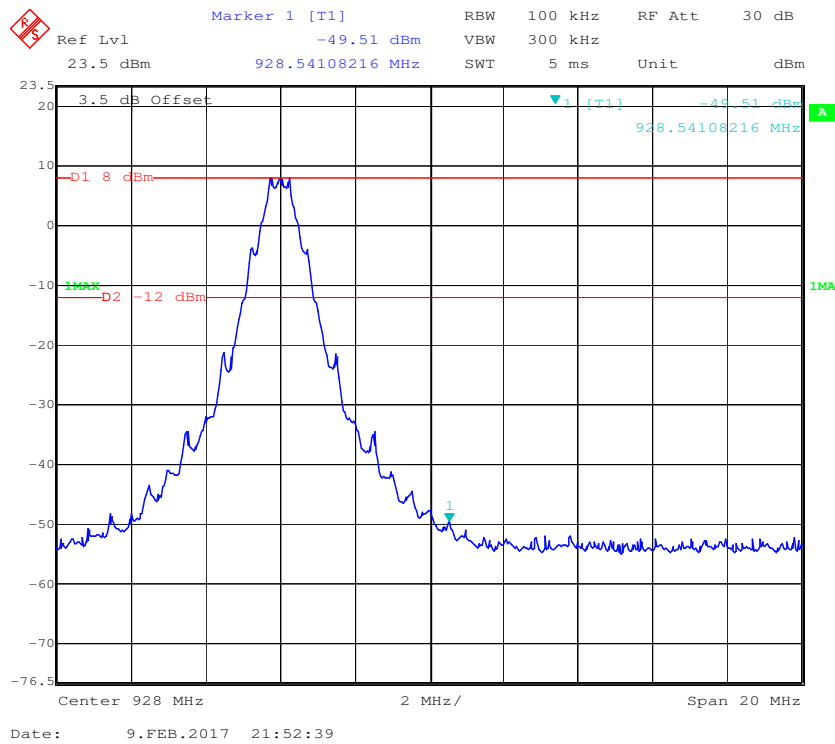


Antenna 2


BPSK-40-ALT: Band Edge, Left Side

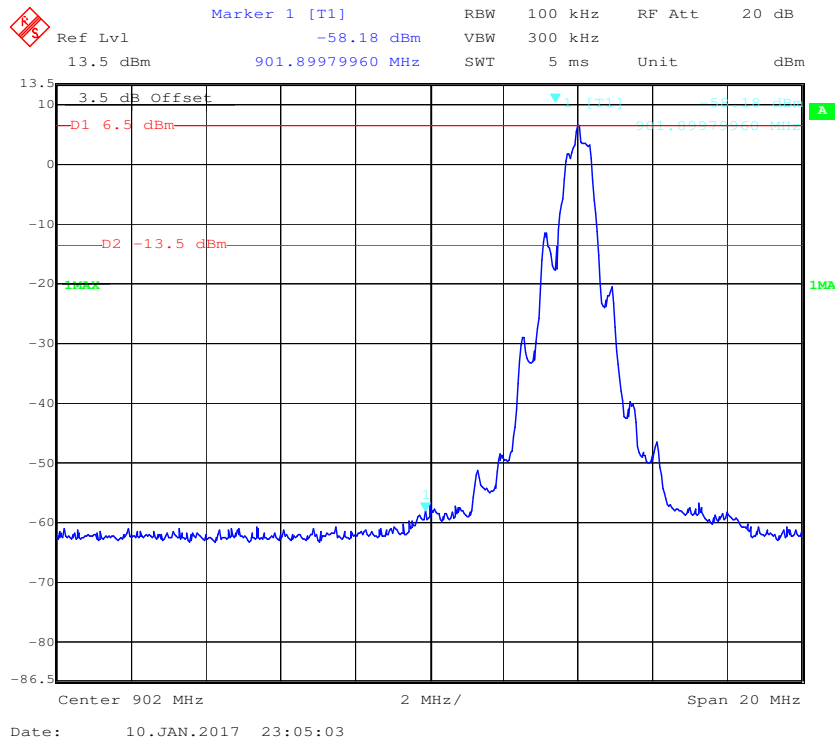


BPSK-40-ALT: Band Edge, Right Side

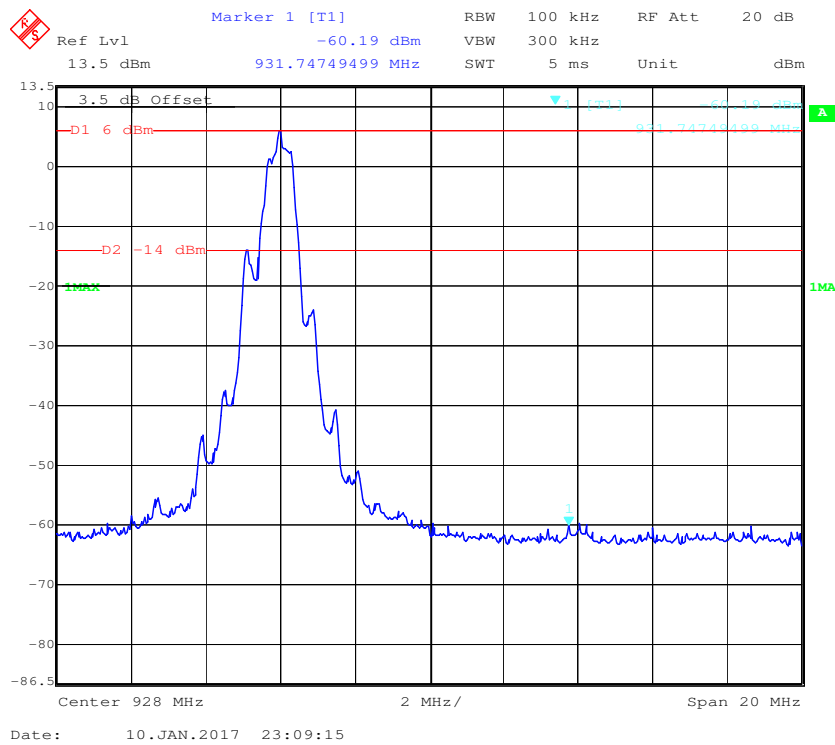


OQPSK-SIN-250: Band Edge, Left Side

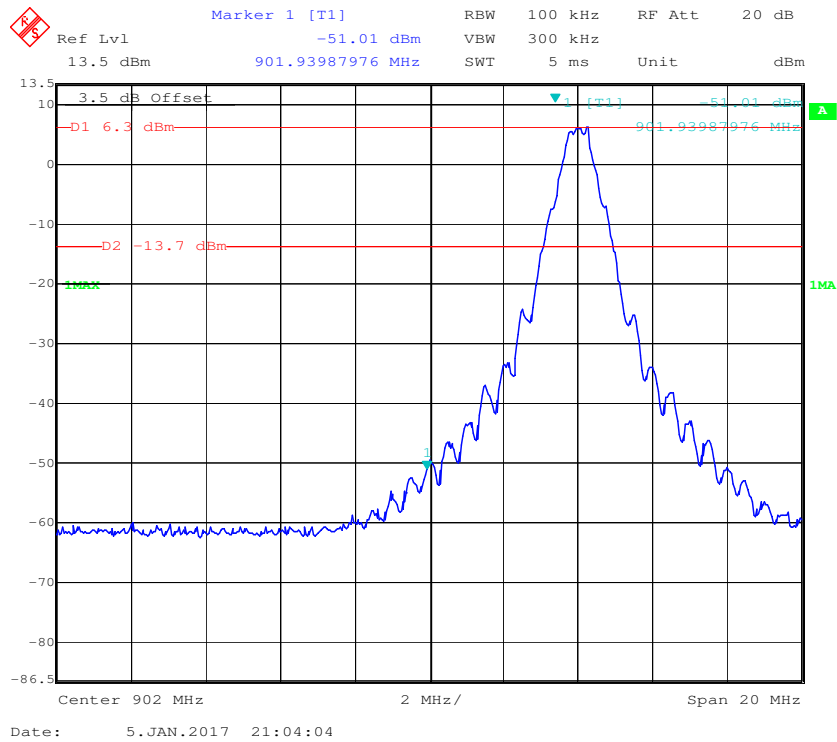


OQPSK-SIN-250: Band Edge, Right Side

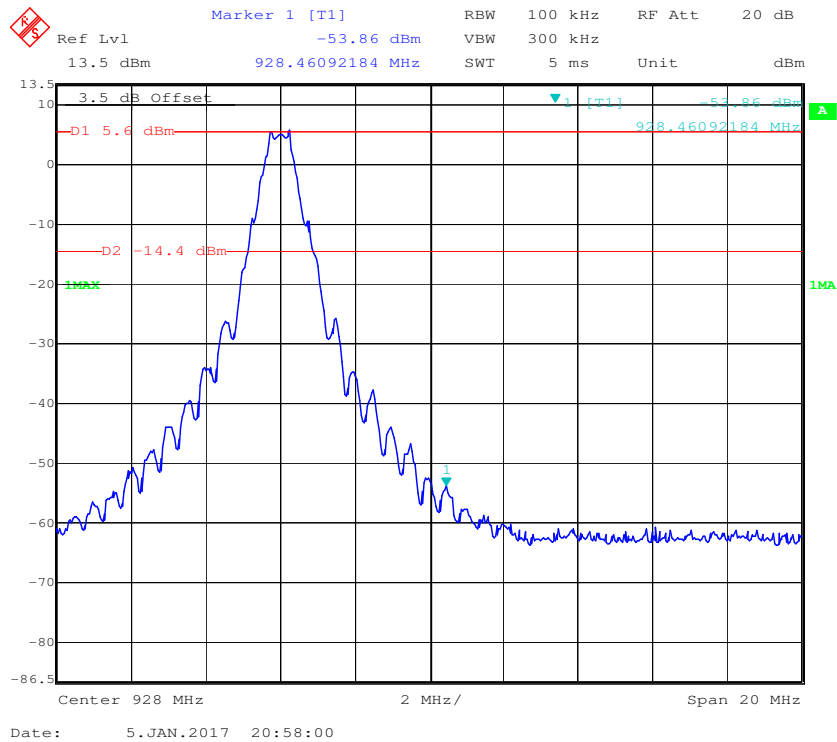

OQPSK-SIN-1000-SCR-ON: Band Edge, Left Side

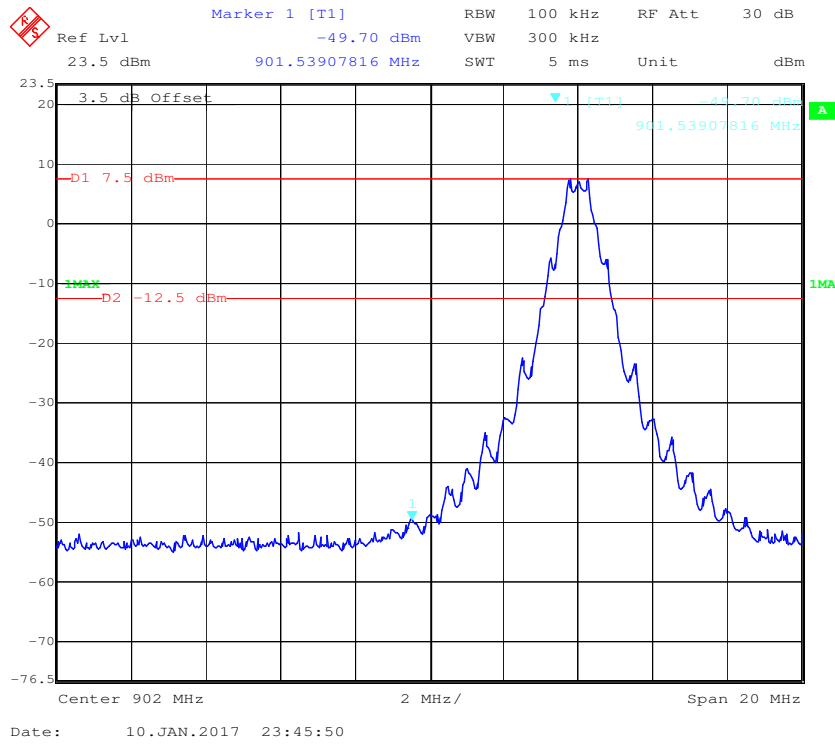

OQPSK-SIN-1000-SCR-ON: Band Edge, Right Side

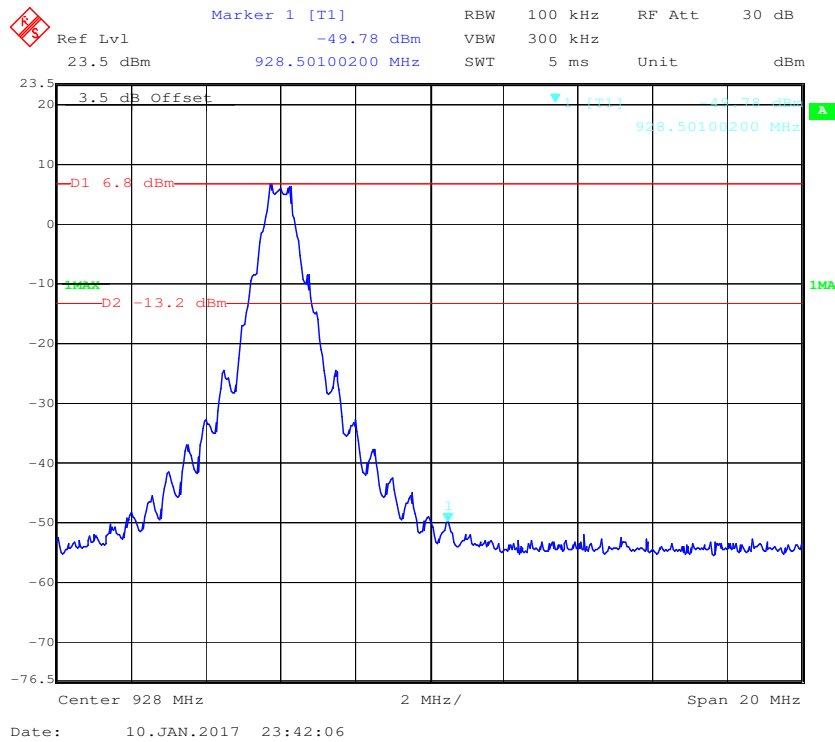

FCC §15.247(e) - POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r05 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	22~24°C
Relative Humidity:	47~52 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Echo Wu from 2017-01-05 to 2017-02-09.


Test Result: Pass

EUT operation mode: Transmitting (900MHz)


Antenna 1

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BPSK-40-ALT mode			
Low	906	-2.71	≤ 8
Middle	914	-2.75	≤ 8
High	924	-4.30	≤ 8
OQPSK-SIN-250 mode			
Low	906	-3.69	≤ 8
Middle	914	-3.02	≤ 8
High	924	-4.84	≤ 8
OQPSK-SIN-1000-SCR-ON mode			
Low	906	-4.41	≤ 8
Middle	914	-4.91	≤ 8
High	924	-4.36	≤ 8


Power Spectral Density, BPSK Low Channel

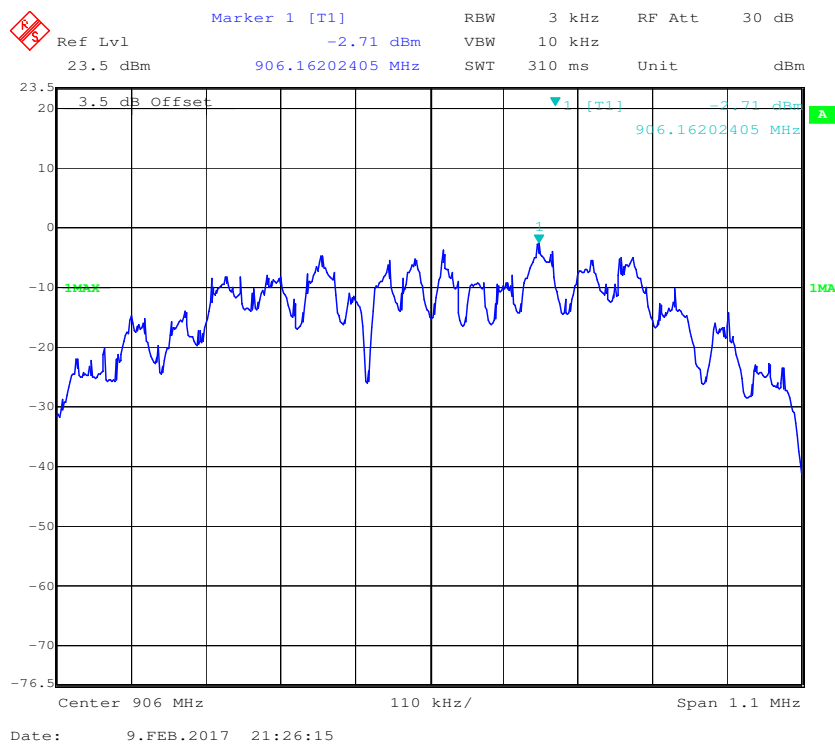


Power Spectral Density, BPSK Middle Channel

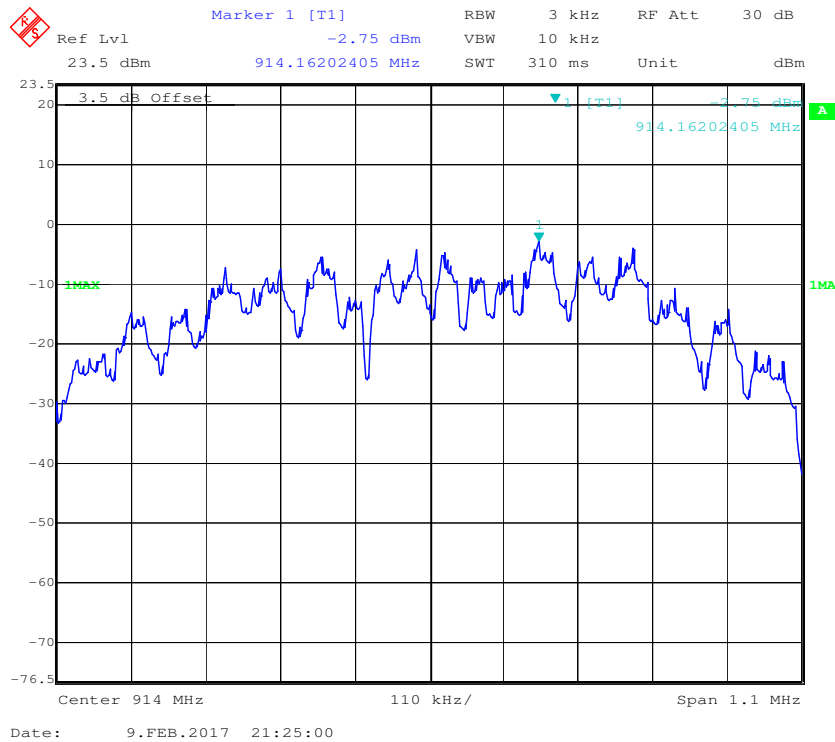


Power Spectral Density, BPSK High Channel

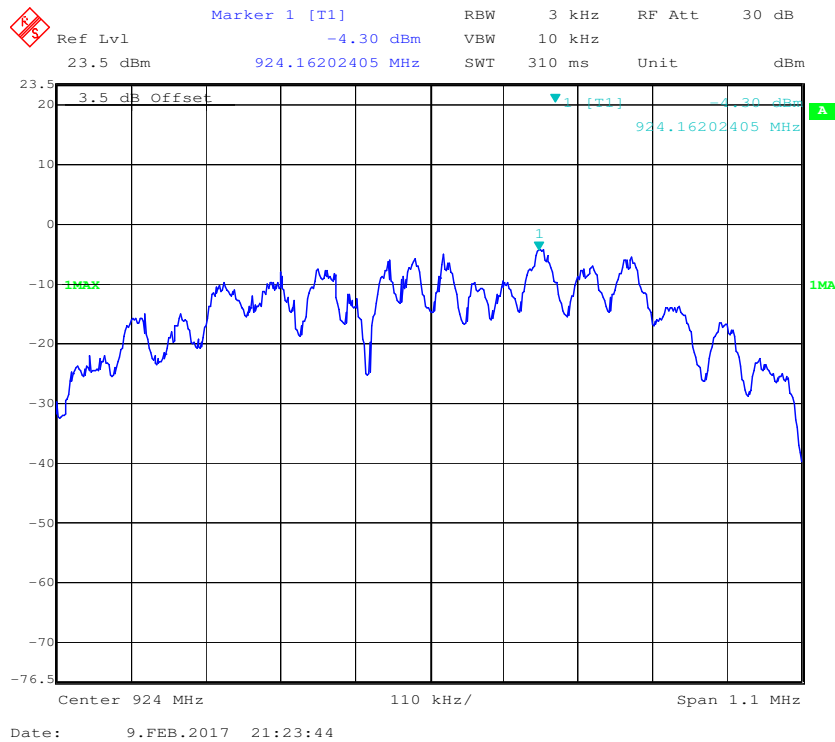


Power Spectral Density, OQPSK-SIN-250 Low Channel

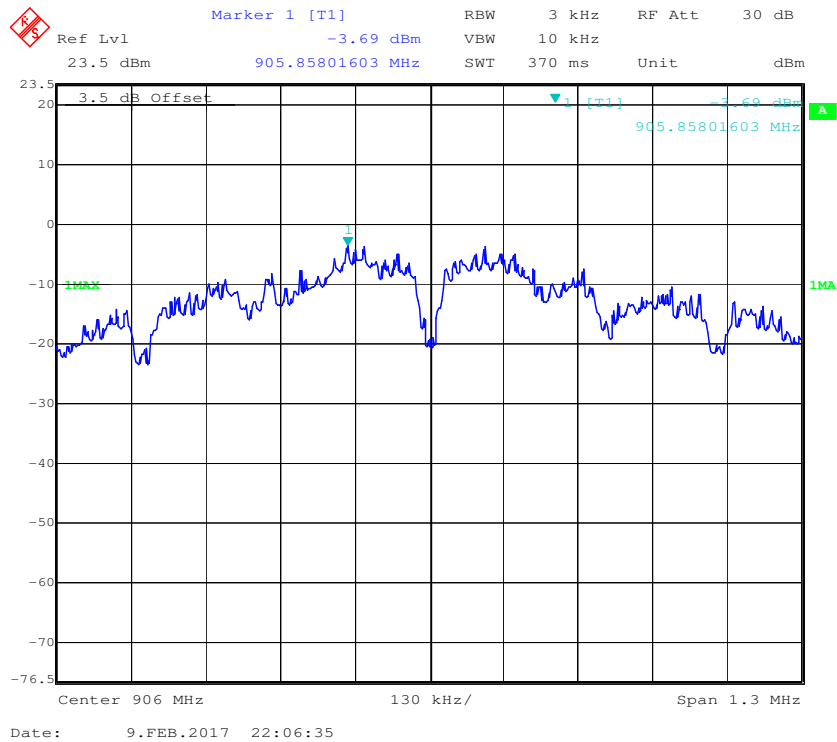


Power Spectral Density, OQPSK-SIN-250 Middle Channel

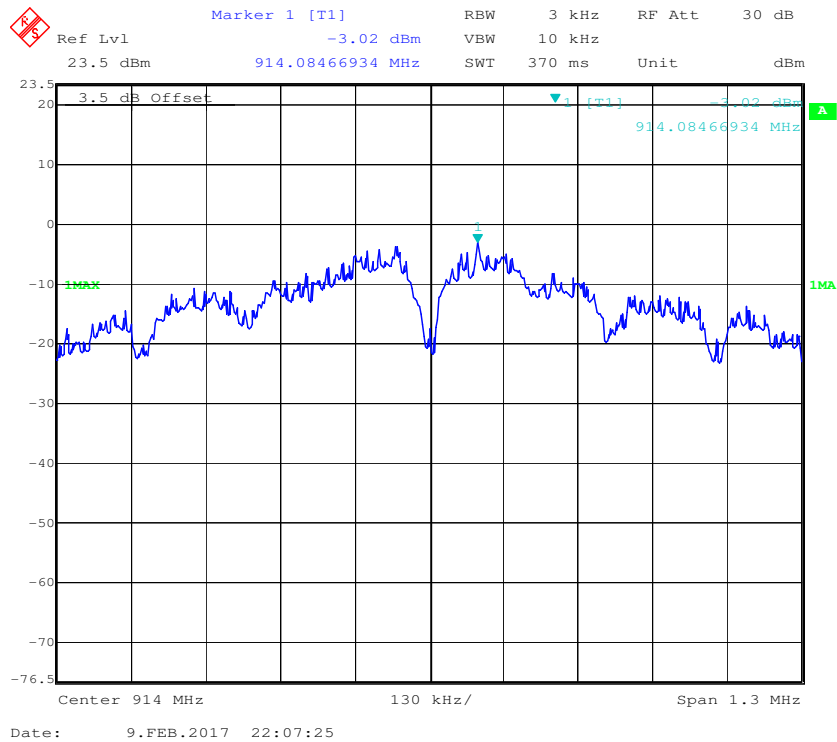


Power Spectral Density, OQPSK-SIN-250 High Channel

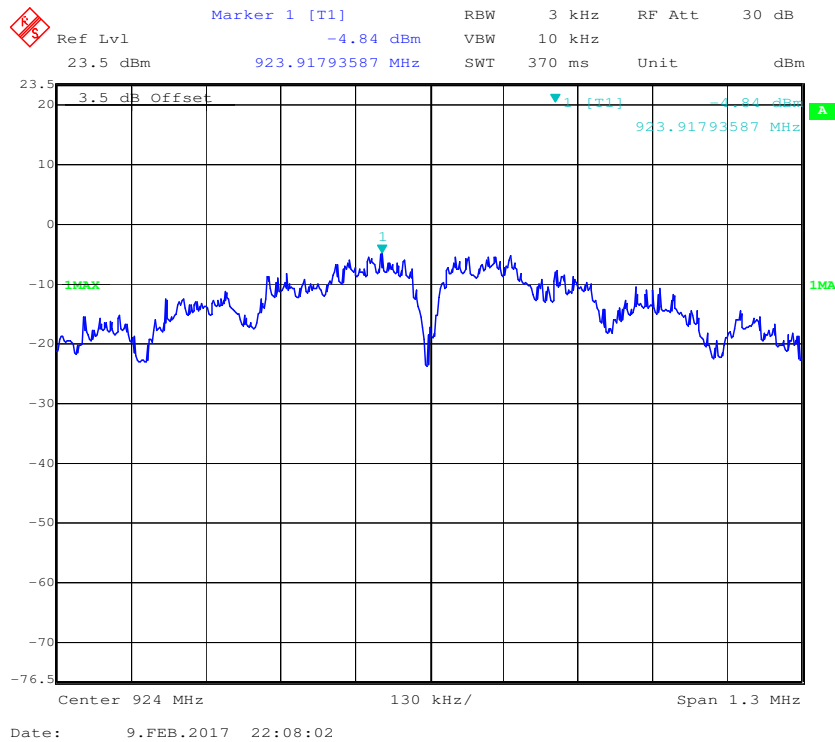


Power Spectral Density, OQPSK-SIN-1000-SCR-ON Low Channel

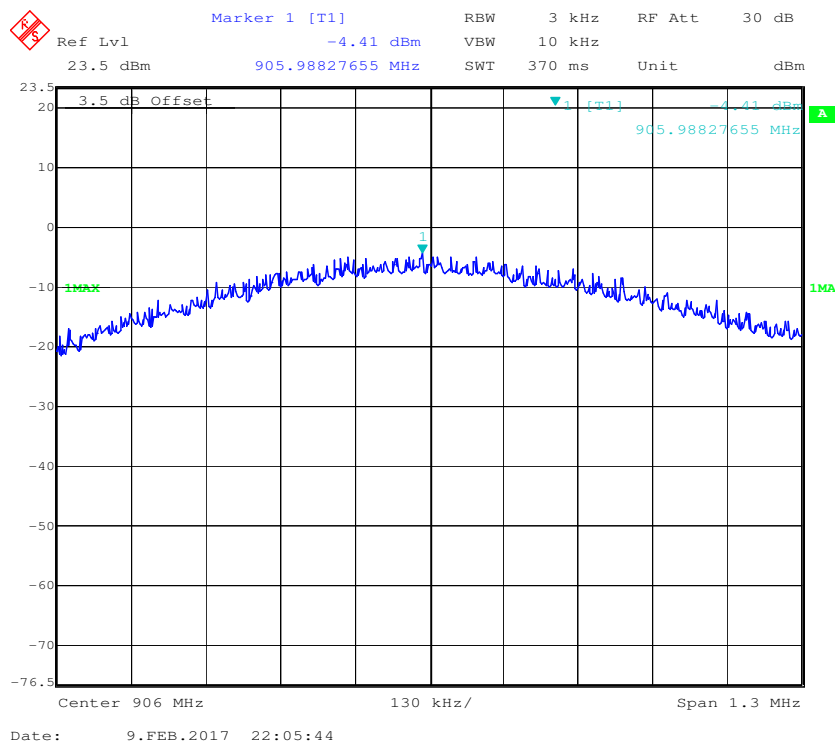

Power Spectral Density, OQPSK-SIN-1000-SCR-ON Middle Channel

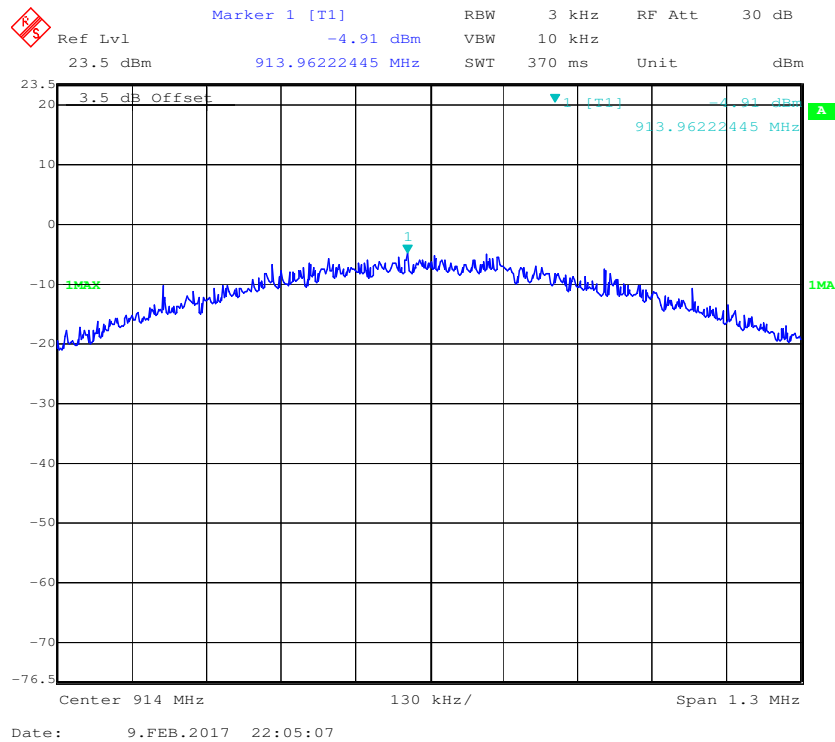


Power Spectral Density, OQPSK-SIN-1000-SCR-ON High Channel

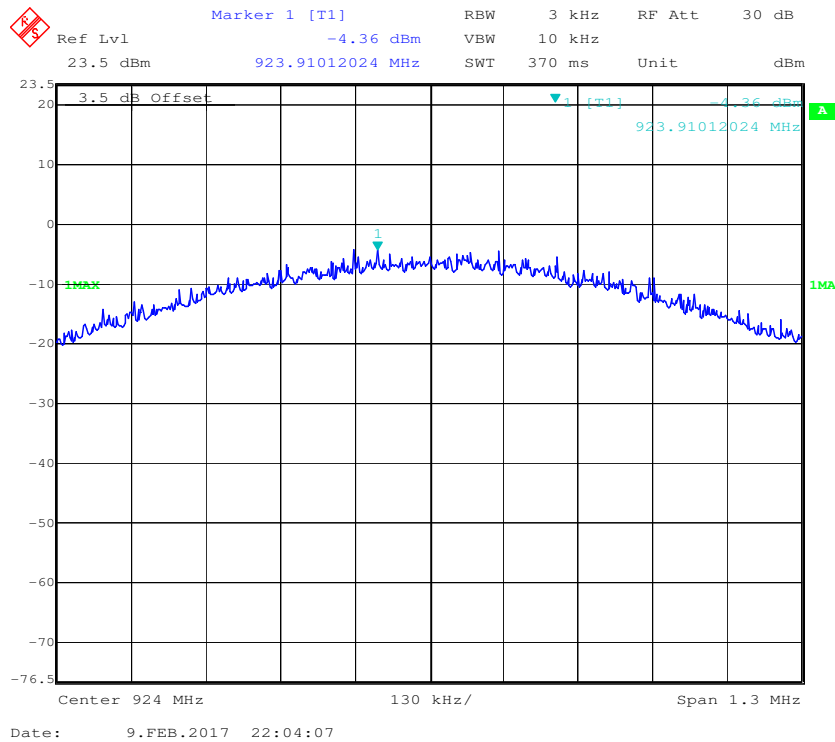


Antenna 2

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BPSK-40-ALT mode			
Low	906	-1.99	≤ 8
Middle	914	-4.23	≤ 8
High	924	-5.17	≤ 8
OQPSK-SIN-250 mode			
Low	906	-5.07	≤ 8
Middle	914	-5.05	≤ 8
High	924	-6.20	≤ 8
OQPSK-SIN-1000-SCR-ON mode			
Low	906	-4.17	≤ 8
Middle	914	-4.08	≤ 8
High	924	-4.68	≤ 8

Power Spectral Density, BPSK Low Channel

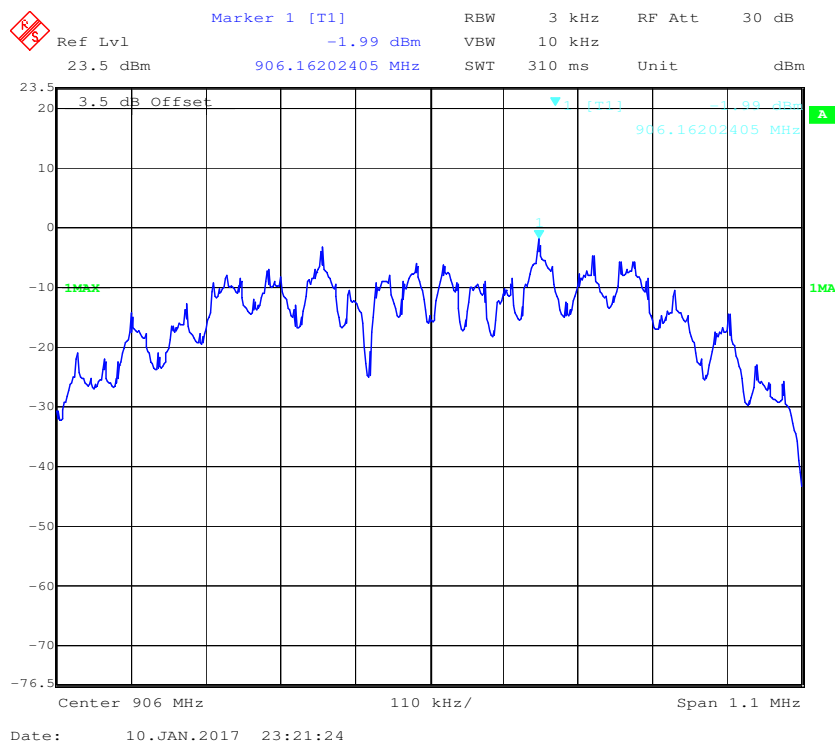


Power Spectral Density, BPSK Middle Channel

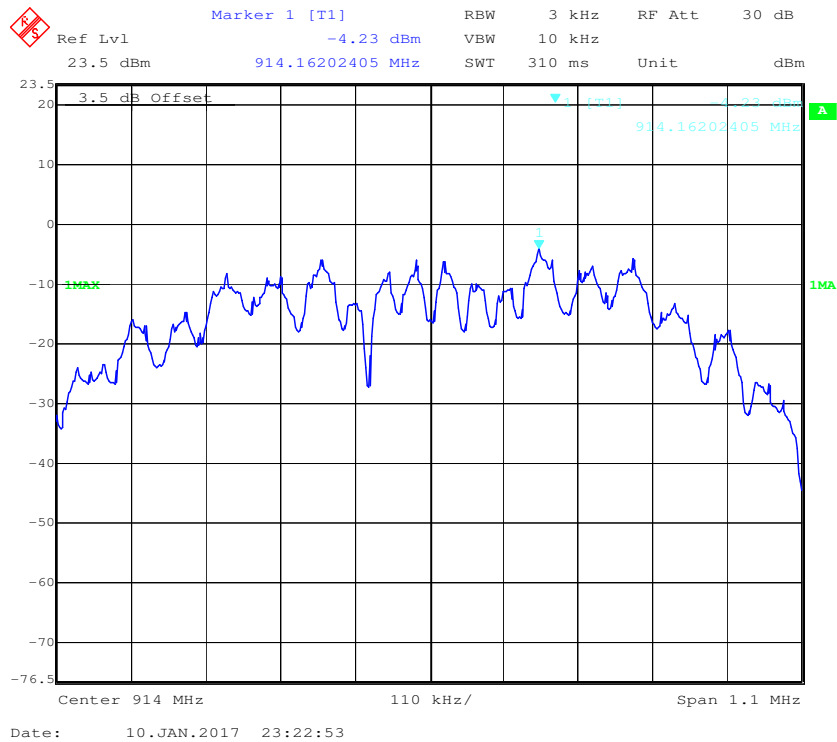


Power Spectral Density, BPSK High Channel




Power Spectral Density, OQPSK-SIN-250 Low Channel

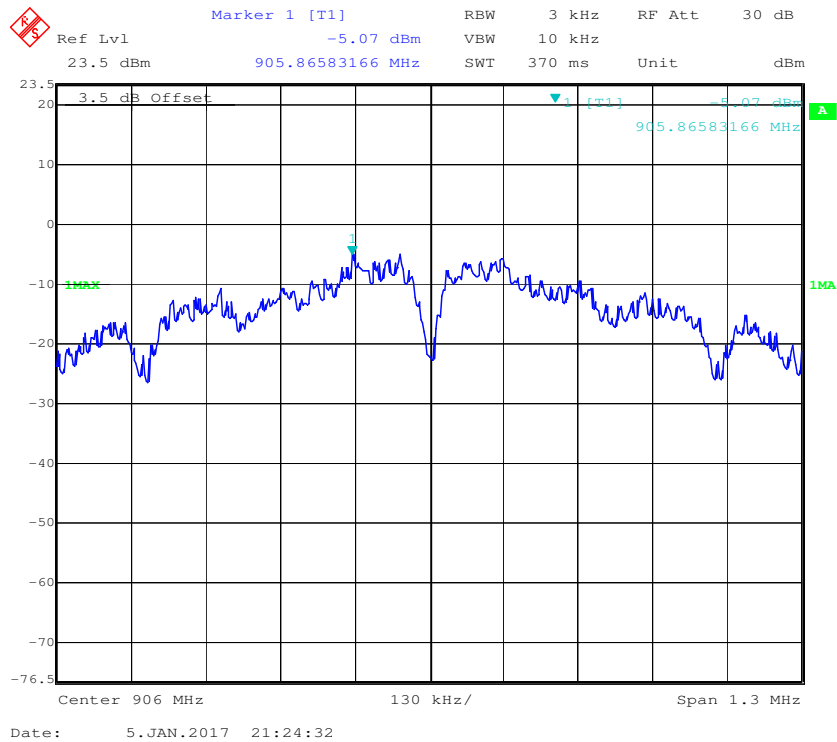


Power Spectral Density, OQPSK-SIN-250 Middle Channel

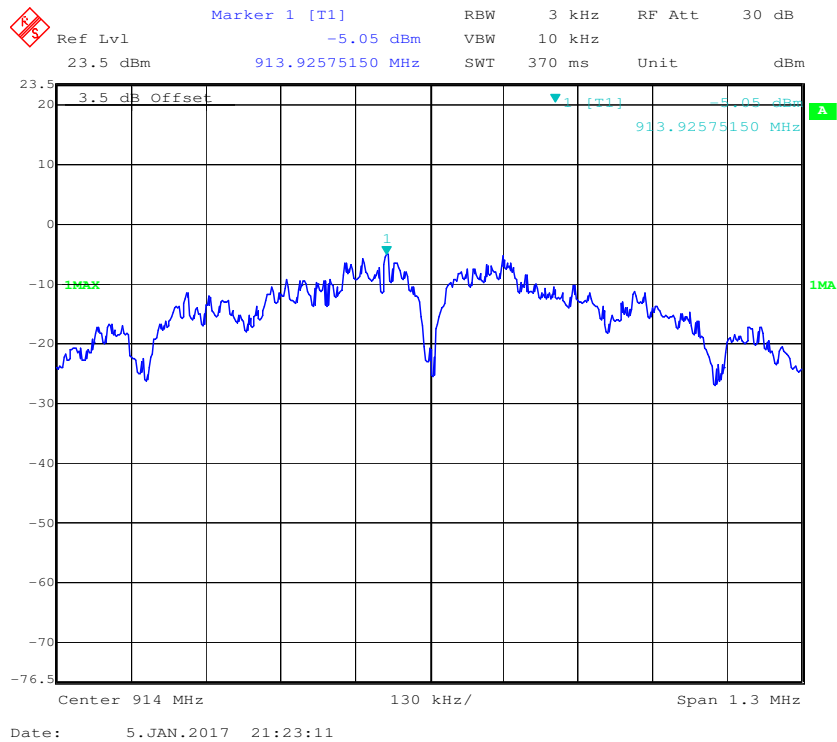


Power Spectral Density, OQPSK-SIN-250 High Channel

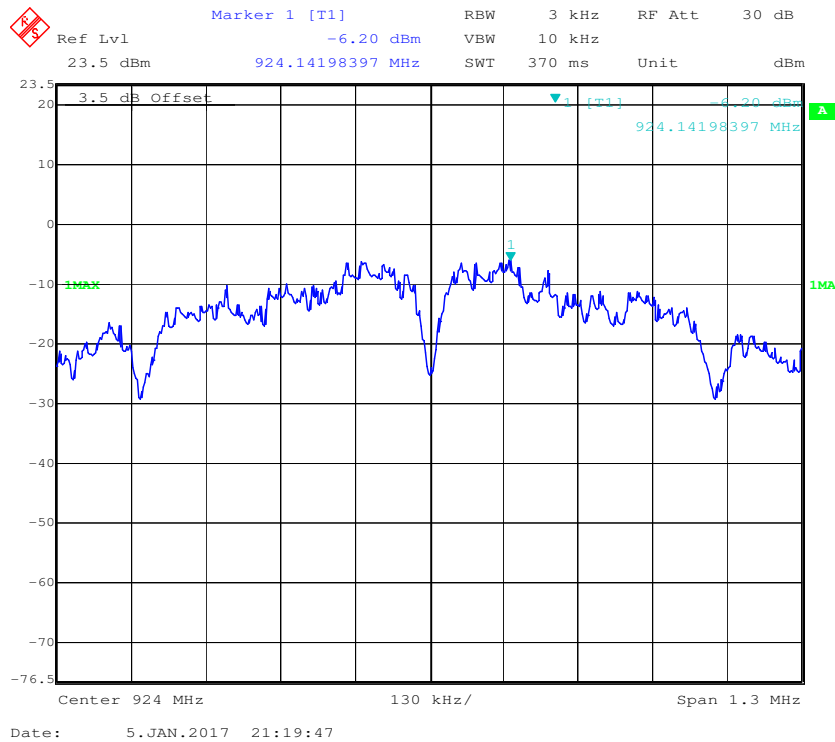


Power Spectral Density, OQPSK-SIN-1000-SCR-ON Low Channel

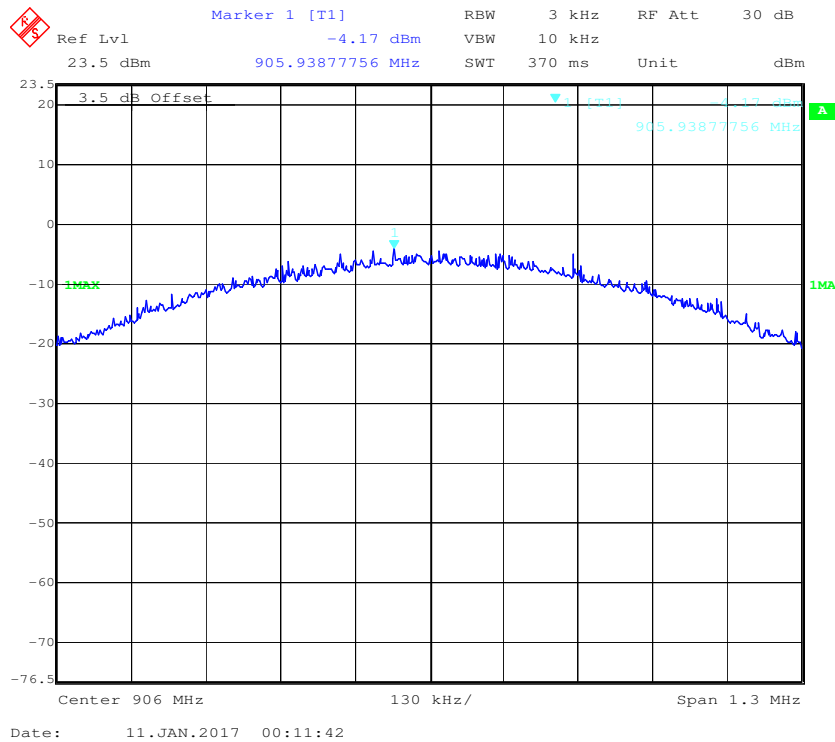

Power Spectral Density, OQPSK-SIN-1000-SCR-ON Middle Channel

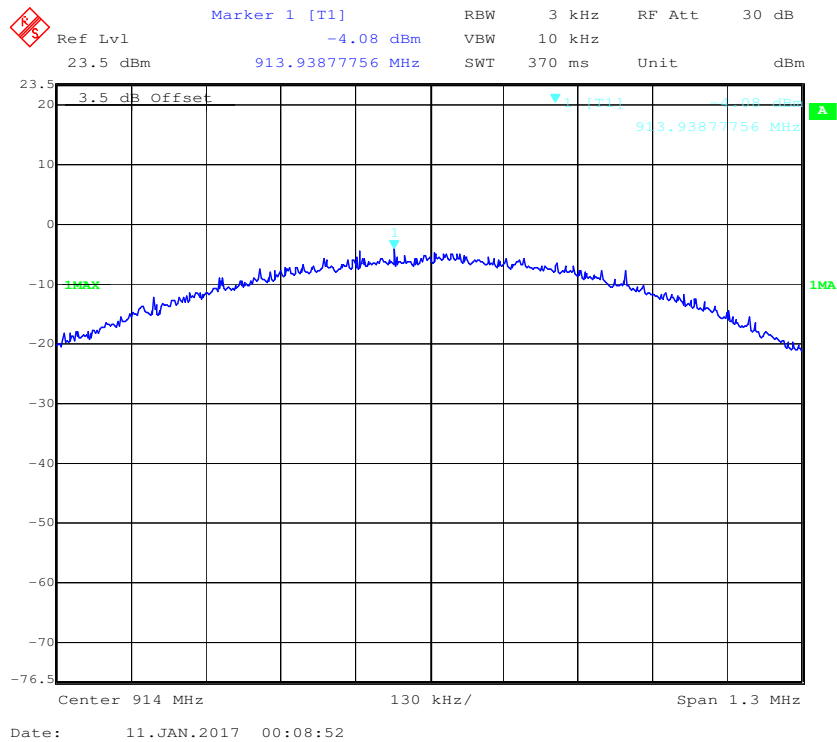

Power Spectral Density, OQPSK-SIN-1000-SCR-ON High Channel

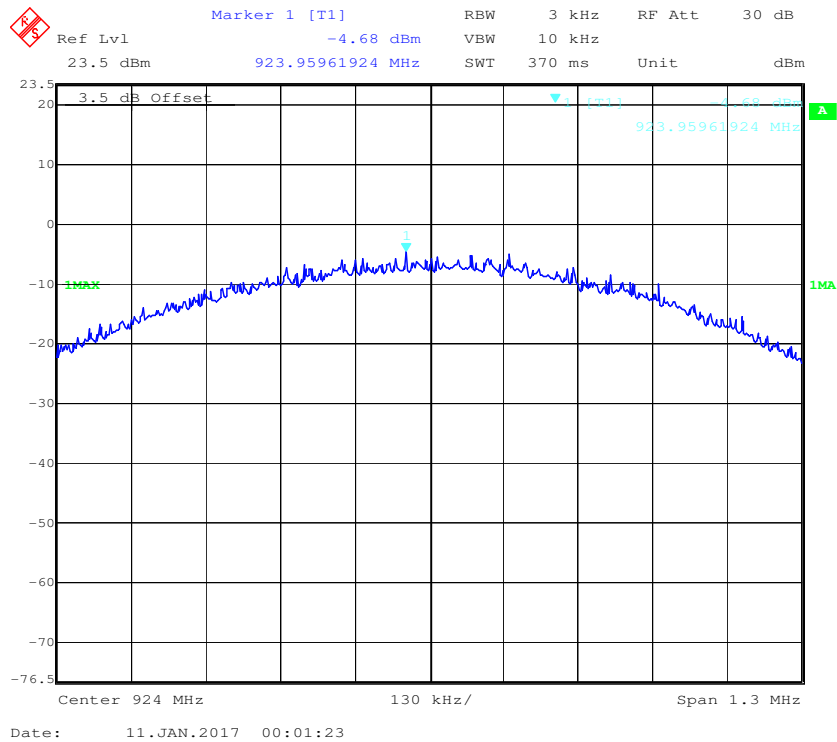

***** END OF REPORT *****