



FCC Radio Test Report

FCC ID: W59XAP1500

This report concerns (check one): Original Grant Class I Change

Issued Date : Nov. 06, 2013
Project No. : 1310C127
Equipment : High Power Dual Band Wireless 900N Low Profile Access Point
Model Name : XAP-1500
Applicant : Luxul Wireless
Address : 14203 Minuteman Drive, Suite 201, Draper, UT USA

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Oct. 22, 2013

Date of Test: Oct. 22, 2013~ Nov. 05, 2013

Testing Engineer : David Mao

(David Mao)

Technical Manager : Leo Hung

(Leo Hung)

Authorized Signatory : Steven Lu

(Steven Lu)

Neutron Engineering Inc.

No.3, Jinshagang 1st Road, ShiXia,

Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of R.O.C., or National Institute of Standards and Technology (NIST) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	14
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION	15
4.1.2 MEASUREMENT INSTRUMENTS LIST	15
4.1.3 TEST PROCEDURE	16
4.1.4 DEVIATION FROM TEST STANDARD	16
4.1.5 TEST SETUP	16
4.1.6 EUT OPERATING CONDITIONS	16
4.1.7 TEST RESULTS	17
4.2 RADIATED EMISSION MEASUREMENT	20
4.2.1 RADIATED EMISSION LIMITS	20
4.2.2 MEASUREMENT INSTRUMENTS LIST	21
4.2.3 TEST PROCEDURE	21
4.2.4 DEVIATION FROM TEST STANDARD	22
4.2.5 TEST SETUP	22
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	24
4.2.8 TEST RESULTS - ABOVE 1000MHZ	31
5 . 26dB SPECTRUM BANDWIDTH	63
5.1 APPLIED PROCEDURES / LIMIT	63
5.1.1 MEASUREMENT INSTRUMENTS LIST	63
5.1.2 TEST PROCEDURE	63
5.1.3 DEVIATION FROM STANDARD	63
5.1.4 TEST SETUP	63
5.1.5 EUT OPERATION CONDITIONS	63
5.1.6 TEST RESULTS	64
6 . MAXIMUM CONDUCTED OUTPUT POWER	70



Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	70
6.1.1 MEASUREMENT INSTRUMENTS LIST	70
6.1.2 TEST PROCEDURE	70
6.1.3 DEVIATION FROM STANDARD	71
6.1.4 TEST SETUP	71
6.1.5 EUT OPERATION CONDITIONS	71
6.1.6 TEST RESULTS	72
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	88
7.1 APPLIED PROCEDURES / LIMIT	88
7.1.1 MEASUREMENT INSTRUMENTS LIST	88
7.1.2 TEST PROCEDURE	88
7.1.3 DEVIATION FROM STANDARD	88
7.1.4 TEST SETUP	88
7.1.5 EUT OPERATION CONDITIONS	88
7.1.6 TEST RESULTS	89
8 . POWER SPECTRAL DENSITY TEST	103
8.1 APPLIED PROCEDURES / LIMIT	103
8.1.1 MEASUREMENT INSTRUMENTS LIST	103
8.1.2 TEST PROCEDURE	103
8.1.3 DEVIATION FROM STANDARD	103
8.1.4 TEST SETUP	103
8.1.5 EUT OPERATION CONDITIONS	103
9 . PEAK EXCURSION MEASUREMENT	120
9.1 APPLIED PROCEDURES / LIMIT	120
9.1.1 MEASUREMENT INSTRUMENTS LIST	120
9.1.2 TEST PROCEDURE	120
9.1.3 DEVIATION FROM STANDARD	120
9.1.4 TEST SETUP	121
9.1.5 EUT OPERATION CONDITIONS	121
9.1.6 TEST RESULTS	122
10 . FREQUENCY STABILITY MEASUREMENT	136
10.1 APPLIED PROCEDURES / LIMIT	136
10.1.1 MEASUREMENT INSTRUMENTS LIST	136
10.1.2 TEST PROCEDURE	136
10.1.3 DEVIATION FROM STANDARD	136
10.1.4 TEST SETUP	137
10.1.5 EUT OPERATION CONDITIONS	137
10.1.6 TEST RESULTS	138
11. EUT TEST PHOTO	145



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FCCP-2-1310C127	Original Issue.	Nov. 06, 2013



1. CERTIFICATION

Equipment : High Power Dual Band Wireless 900N Low Profile Access Point
Brand Name : Luxul Xen™
Model Name : XAP-1500
Applicant : Luxul Wireless
Date of Test : Oct. 22, 2013~ Nov. 05, 2013
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.4 : 2009;
FCC KDB 789033 D01 General UNII Test Procedures v01r03 .

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-2-1310C127) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5150MHz~5250MHz mode part of the product.



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Peak Excursion	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792
 Neutron's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	High Power Dual Band Wireless 900N Low Profile Access Point	
Brand Name	Luxul Xen™	
Model Name	XAP-1500	
Mode Different	N/A	
Product Description	Operation Frequency	Band 1:5150MHz~5250MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	900Mbps
	Antenna Designation	Please see note 3.(Page 10)
	Antenna Gain(Peak)	
	Output Power (Max.)	802.11a: 15.04dBm 802.11n (20M): 13.94dBm 802.11n (40M): 13.55dBm
	More details of EUT technical specification, please refer to the User's Manual.	
Power Source	PoE Power Supply. Manufacturer: Fo Shan Great Power Co., Ltd Model: GRT-480125A	
Power Rating	I/P: AC 100-240V~50/60Hz O/P: DC 48V 1250mA	
Connecting I/O Port(s)	Please refer to the User's Manual.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. Channel List:

802.11a / 802.11n 20MHz		802.11n 40M	
Band 1		Band 1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

3. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
0		Q5078	Internal Antenna	N/A	5.0
1		Q5078	Internal Antenna	N/A	5.0
2		Q5078	Internal Antenna	N/A	5.0

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers (3T3R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}**, that is Directional gain=5.0dBi

4.

Operating Mode	1TX	3TX
802.11a	V (ANT 0 or ANT 1 or ANT 2)	-
802.11n(20MHz)	-	V (ANT 0 + ANT 1 + ANT 2)
802.11n(40MHz)	-	V (ANT 0 + ANT 1 + ANT 2)



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48(Band 1)
Mode 2	TX N20 Mode / CH36, CH40, CH48(Band 1)
Mode 3	TX N40 Mode / CH38, CH46 (Band 1)
Mode 4	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 4	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48(Band 1)
Mode 2	TX N20 Mode / CH36, CH40, CH48(Band 1)
Mode 3	TX N40 Mode / CH38, CH46 (Band 1)

Note: For radiated below 1G test, the 802.11a mode is found to be the worst case and recorded.



3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product


Test software version	MTool_2.0.0.6		
Frequency	5180 MHz	5200MHz	5240 MHz
A Mode	74	74	74
N20 Mode	50	50	50

Test software version	MTool_2.0.0.6		
Frequency	5190 MHz	5230MHz	
N40 Mode	46	46	




3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted TX Mode:

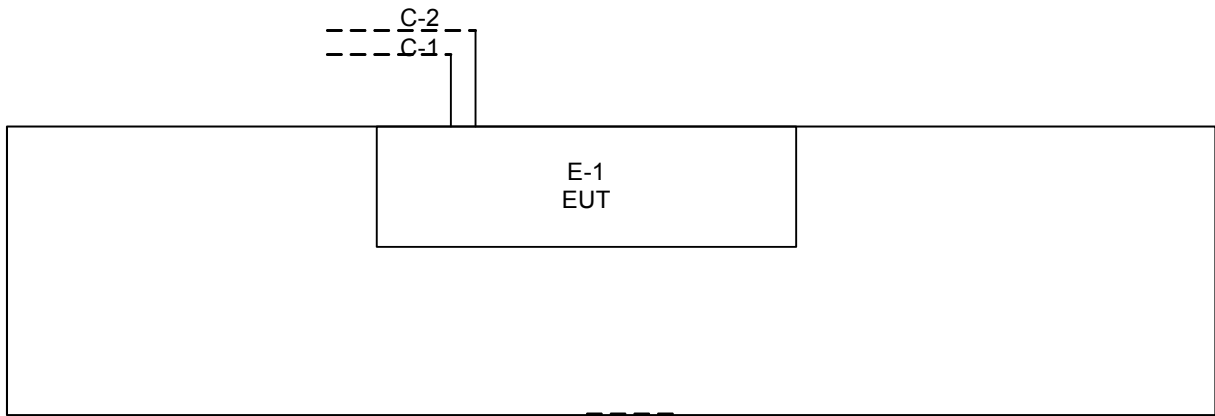


Control Room

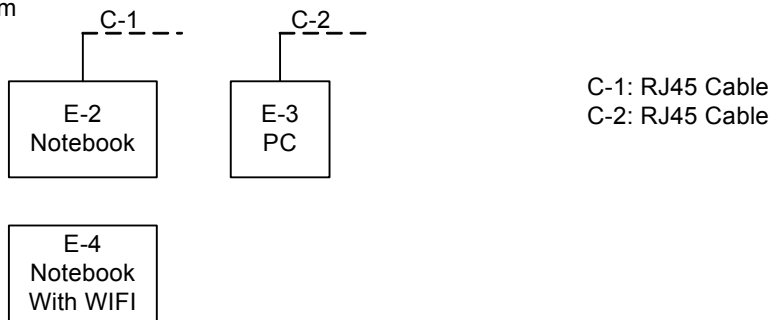

Radiated TX Mode:

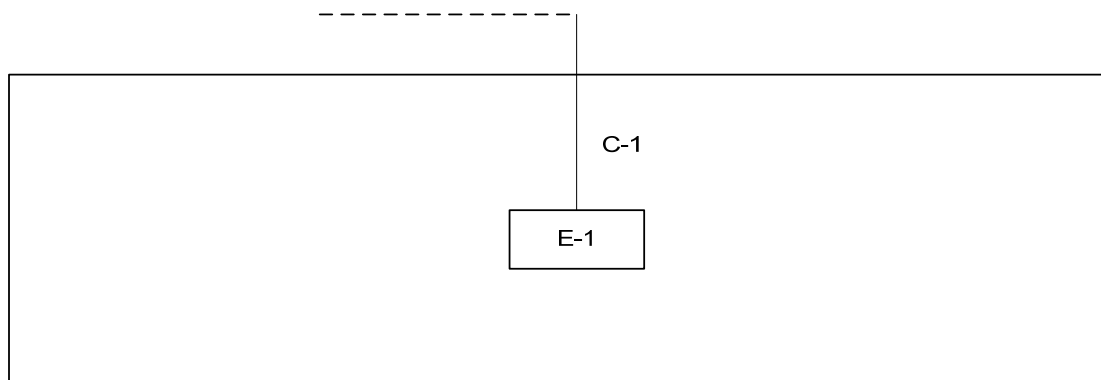

Control Room



C-1: RJ45 Cable



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	High Power Dual Band Wireless 900N Low Profile Access Point	Luxul Xen™	XAP-1500	W59XAP1500	N/A	EUT
E-2	Notebook	Dell	INSPIRON 1420	DOC	JX193A01SDC2	
E-3	PC	Dell	745	DOC	J8K832X	
E-4	Notebook	ASUS	F9Eseries	DOC	7AN0AS301331	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10m	
C-2	NO	NO	10m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov.16, 2013
3	Test Cable	N/A	C_17	N/A	Mar.15, 2014
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Apr. 25, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

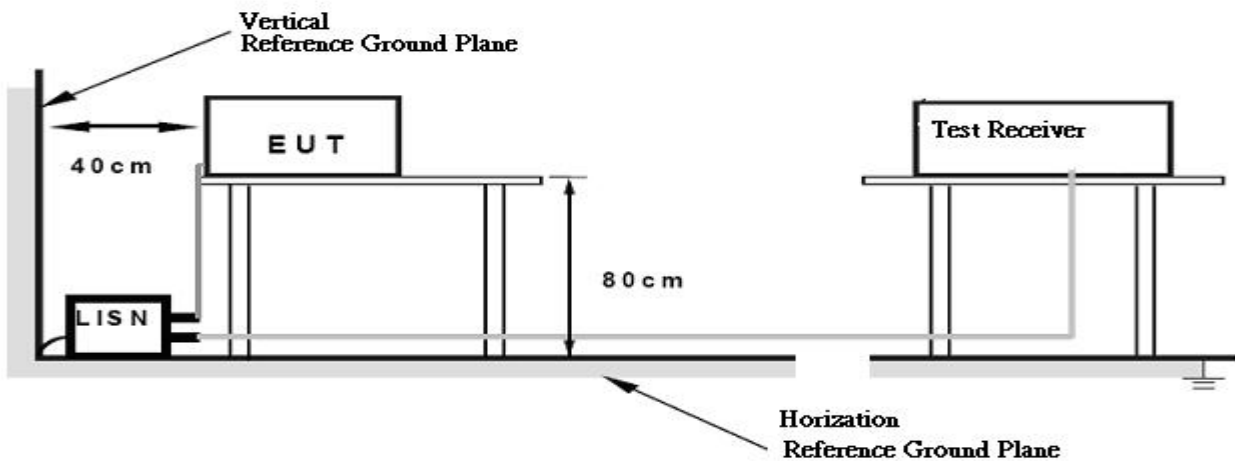

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT was programmed to be in continuously transmitting/TX Mode mode.




4.1.7 TEST RESULTS

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name:	XAP-1500
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Line
Test Mode :	TX Mode		

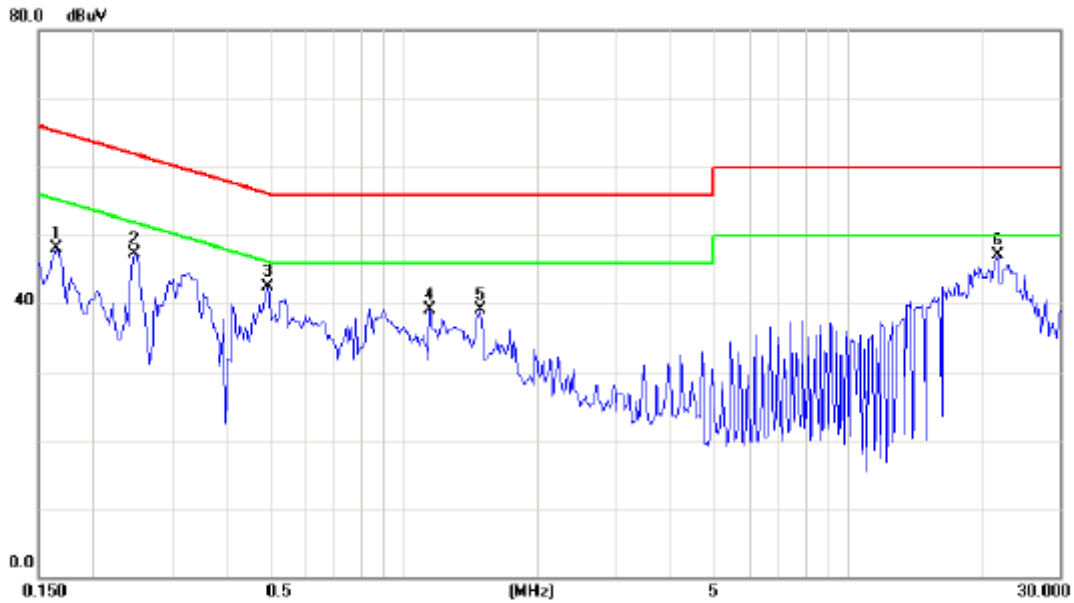

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1650	38.27	9.77	48.04	65.21	-17.17	peak	
2		0.2467	37.60	9.74	47.34	61.87	-14.53	peak	
3		0.4914	32.75	9.70	42.45	56.14	-13.69	peak	
4		1.1411	29.42	9.70	39.12	56.00	-16.88	peak	
5		1.4795	29.33	9.69	39.02	56.00	-16.98	peak	
6	*	21.7150	37.21	9.88	47.09	60.00	-12.91	peak	



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name:	XAP-1500
Temperature:	24 °C	Relative Humidity:	55 %
Test Power:	AC 120V/60Hz	Phase:	Neutral
Test Mode :	TX Mode		

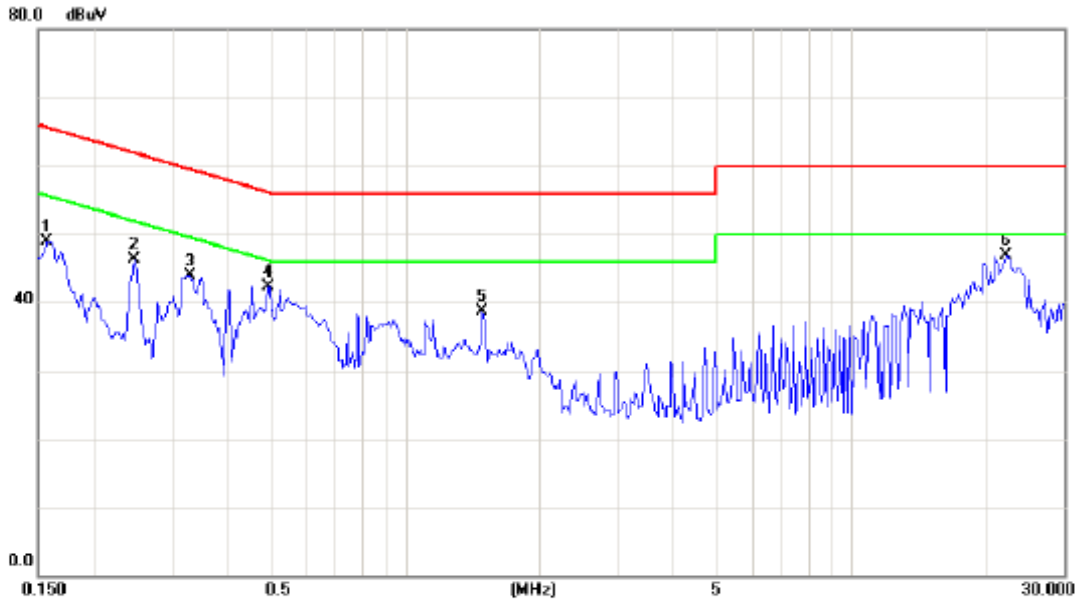

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1572	39.21	9.78	48.99	65.61	-16.62	peak	
2	0.2467	36.62	9.74	46.36	61.87	-15.51	peak	
3	0.3285	34.22	9.73	43.95	59.49	-15.54	peak	
4	0.4914	32.69	9.70	42.39	56.14	-13.75	peak	
5	1.4795	29.09	9.69	38.78	56.00	-17.22	peak	
6 *	22.1800	37.11	9.89	47.00	60.00	-13.00	peak	



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Notes

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBµV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27	68.3
	-17	78.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{100000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Apr. 25, 2014
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Apr. 25, 2014
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014
7	Spectrum	Agilent	E4408B	US39240143	Nov. 16, 2013
8	Test Cable	HUBER+SUHNER	C-45	N/A	Apr. 30, 2014
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 22, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 1.5m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP


Radiated Emission Test Set-Up Frequency 30 - 1000MHz

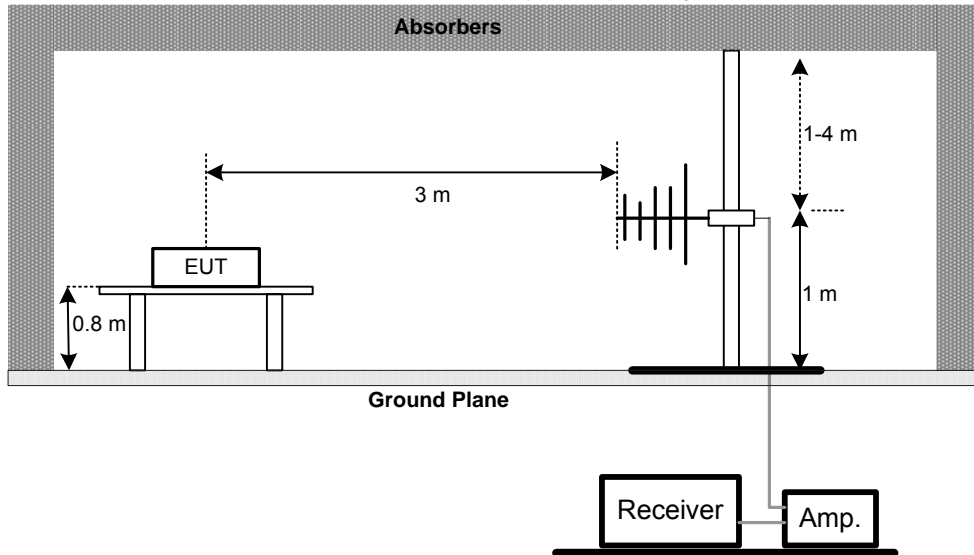

Radiated Emission Test Set-Up Frequency Above 1 GHz

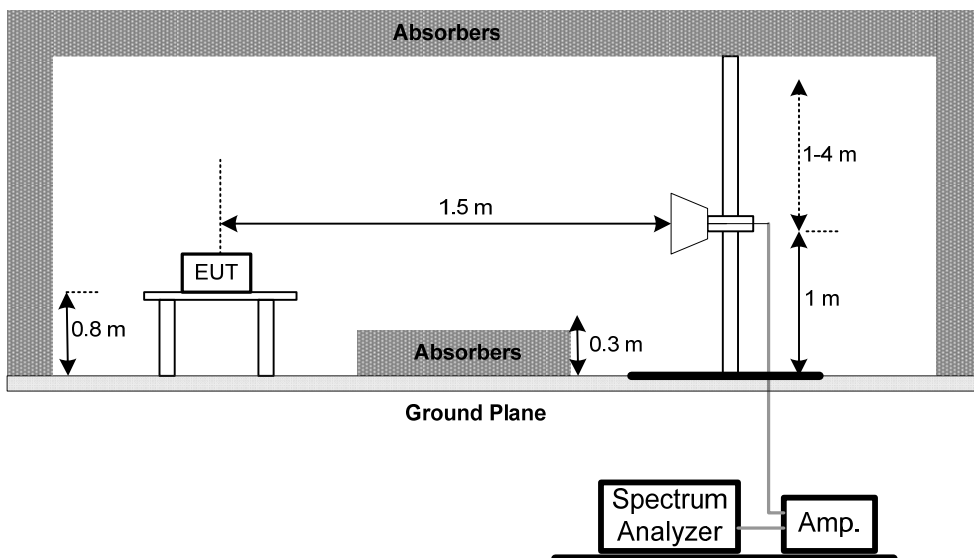

Radiated emissions below 30MHz

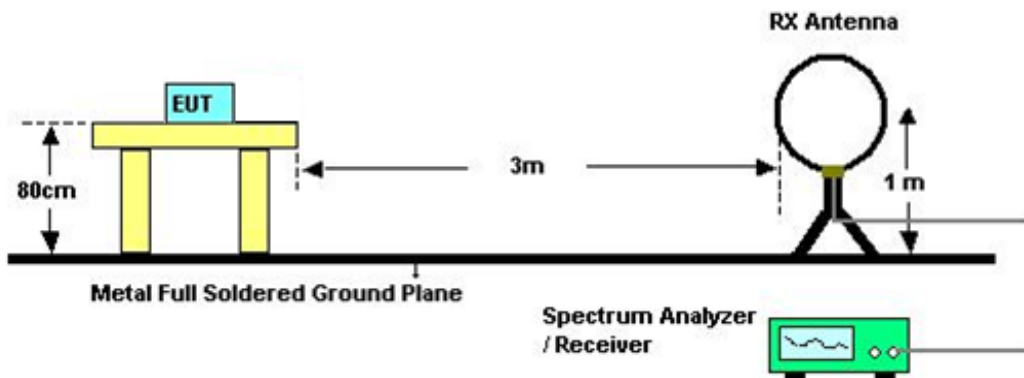

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz		
Phase:	Vertical		

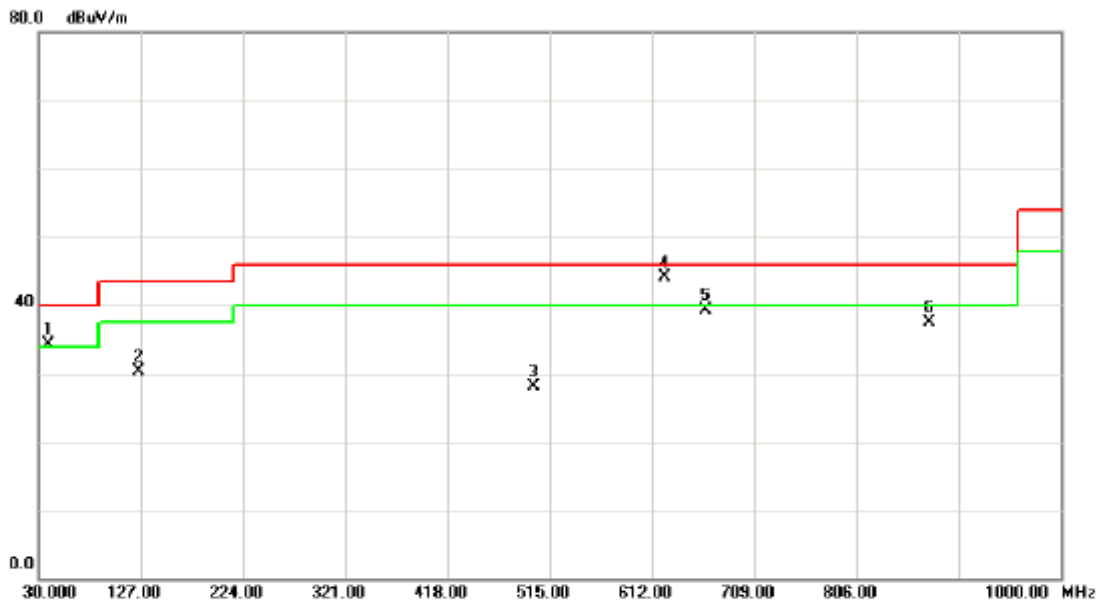

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	39.7000	48.89	-14.66	34.23	40.00	-5.77	peak	
2		125.0600	43.91	-13.61	30.30	43.50	-13.20	peak	
3		500.4500	38.50	-10.31	28.19	46.00	-17.81	peak	
4	*	624.6100	51.01	-6.86	44.15	46.00	-1.85	peak	
5		662.4400	44.78	-5.38	39.40	46.00	-6.60	peak	
6		874.8700	39.95	-2.48	37.47	46.00	-8.53	peak	




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz		
Phase:	Horizontal		

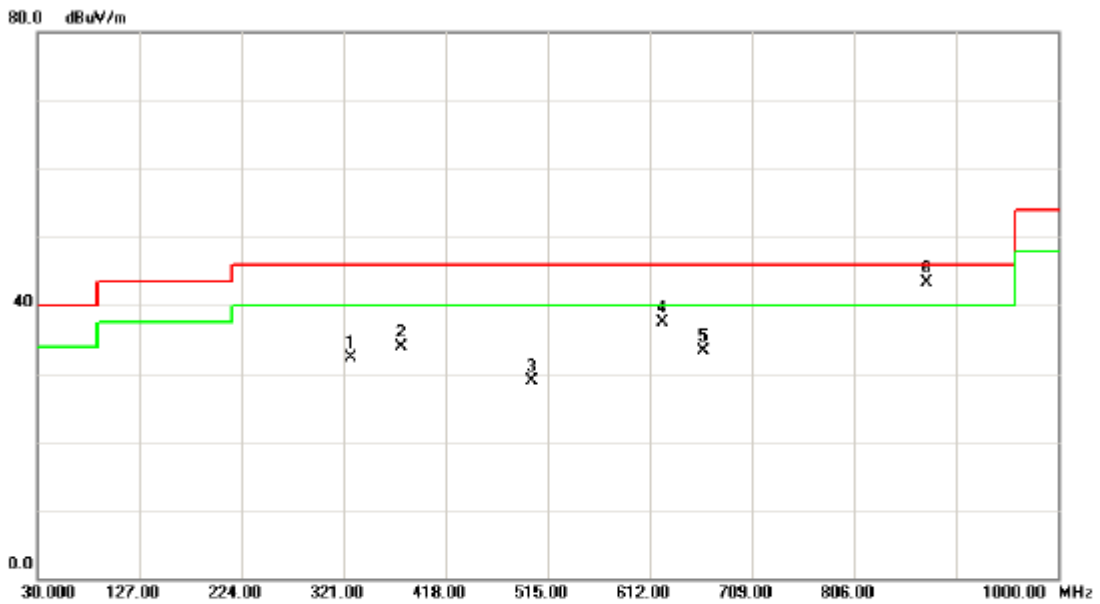

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	327.7900	43.76	-11.37	32.39	46.00	-13.61	peak	
2	375.3200	44.55	-10.66	33.89	46.00	-12.11	peak	
3	500.4500	39.27	-10.31	28.96	46.00	-17.04	peak	
4	624.6100	44.35	-6.86	37.49	46.00	-8.51	peak	
5	662.4400	38.68	-5.38	33.30	46.00	-12.70	peak	
6 *	874.8700	45.86	-2.48	43.38	46.00	-2.62	peak	




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz		
Phase:	Vertical		

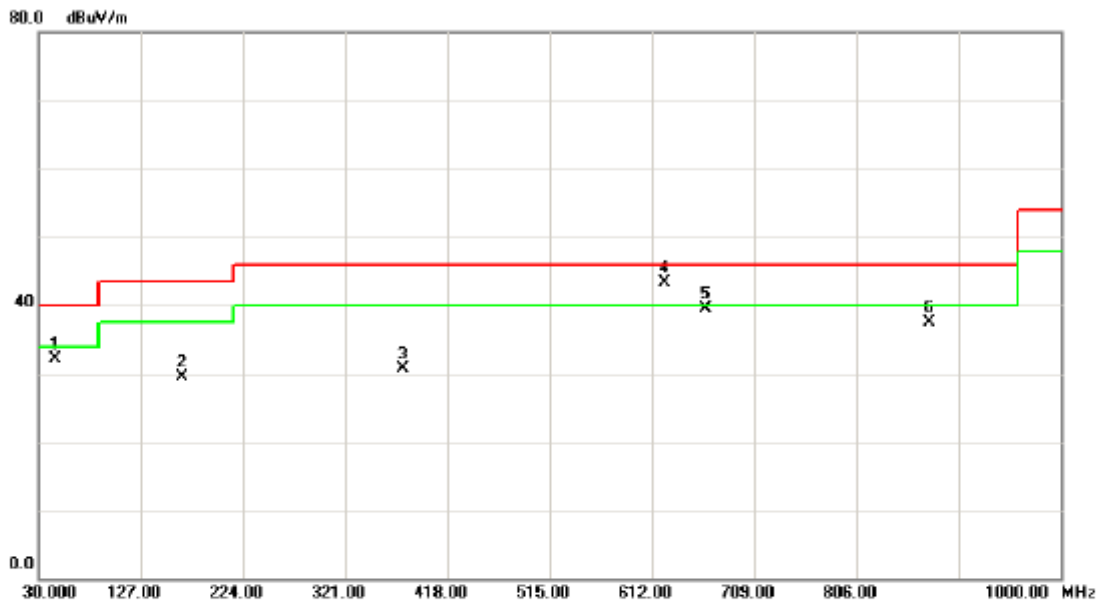

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	46.4900	46.27	-14.22	32.05	40.00	-7.95	peak	
2	165.8000	42.67	-13.11	29.56	43.50	-13.94	peak	
3	375.3200	41.28	-10.66	30.62	46.00	-15.38	peak	
4 *	624.6100	50.10	-6.86	43.24	46.00	-2.76	peak	
5	662.4400	44.81	-5.38	39.43	46.00	-6.57	peak	
6	874.8700	40.02	-2.48	37.54	46.00	-8.46	peak	




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz		
Phase:	Horizontal		

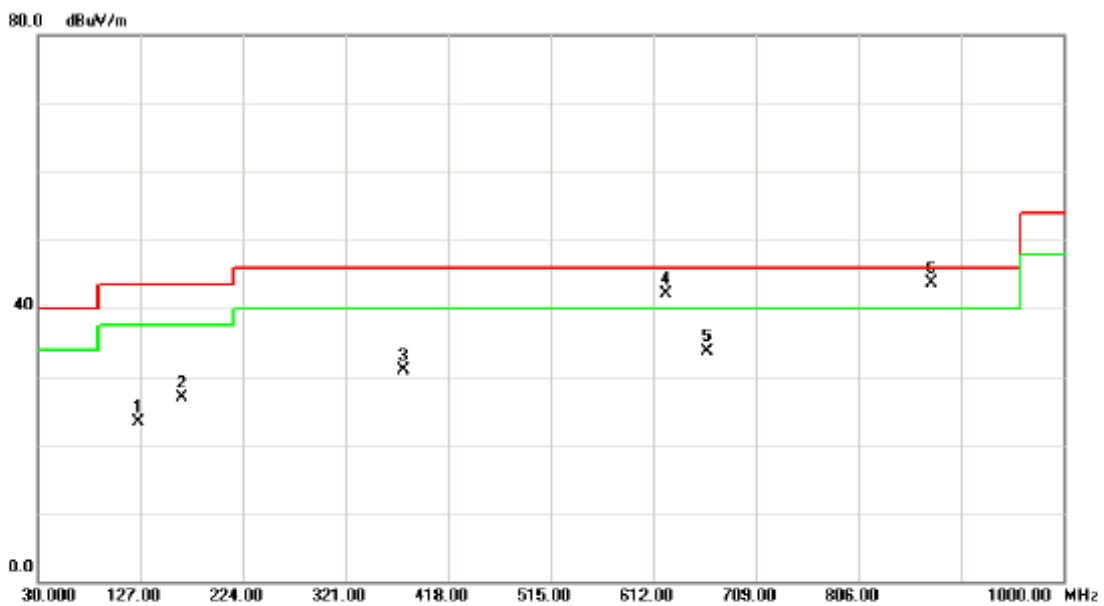

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	125.0600	36.87	-13.61	23.26	43.50	-20.24	peak	
2	165.8000	40.09	-13.11	26.98	43.50	-16.52	peak	
3	375.3200	41.52	-10.66	30.86	46.00	-15.14	peak	
4 !	624.6100	48.90	-6.86	42.04	46.00	-3.96	peak	
5	662.4400	39.10	-5.38	33.72	46.00	-12.28	peak	
6 *	874.8700	46.13	-2.48	43.65	46.00	-2.35	peak	




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz		
Phase:	Vertical		

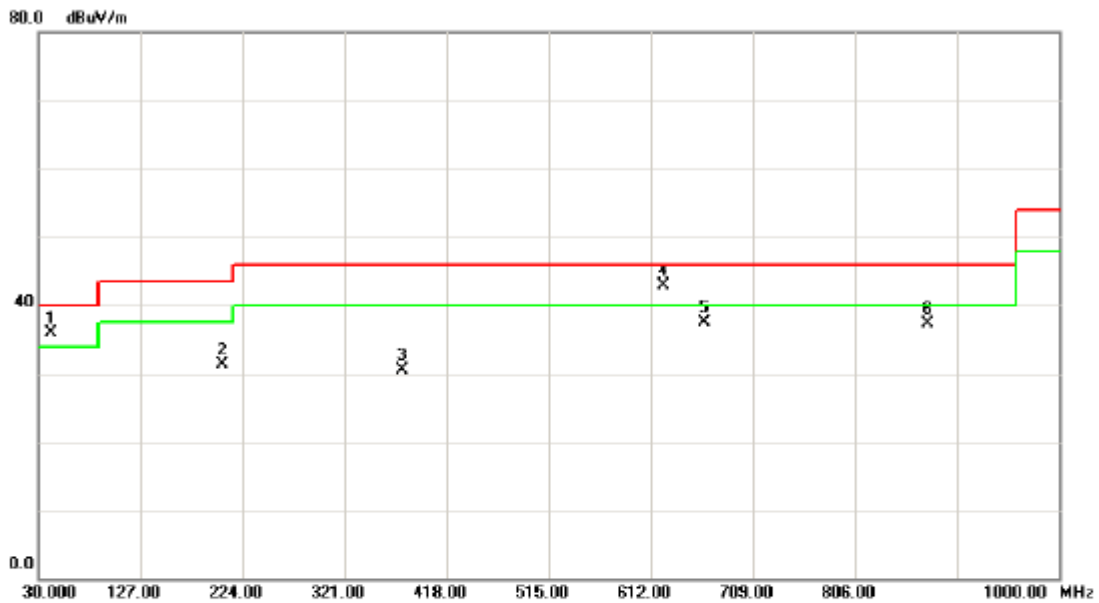

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	41.6400	50.47	-14.51	35.96	40.00	-4.04	peak	
2		204.6000	46.53	-15.23	31.30	43.50	-12.20	peak	
3		375.3200	41.24	-10.66	30.58	46.00	-15.42	peak	
4	*	624.6100	49.82	-6.86	42.96	46.00	-3.04	peak	
5		662.4400	42.81	-5.38	37.43	46.00	-8.57	peak	
6		874.8700	39.81	-2.48	37.33	46.00	-8.67	peak	



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz		
Phase:	Horizontal		

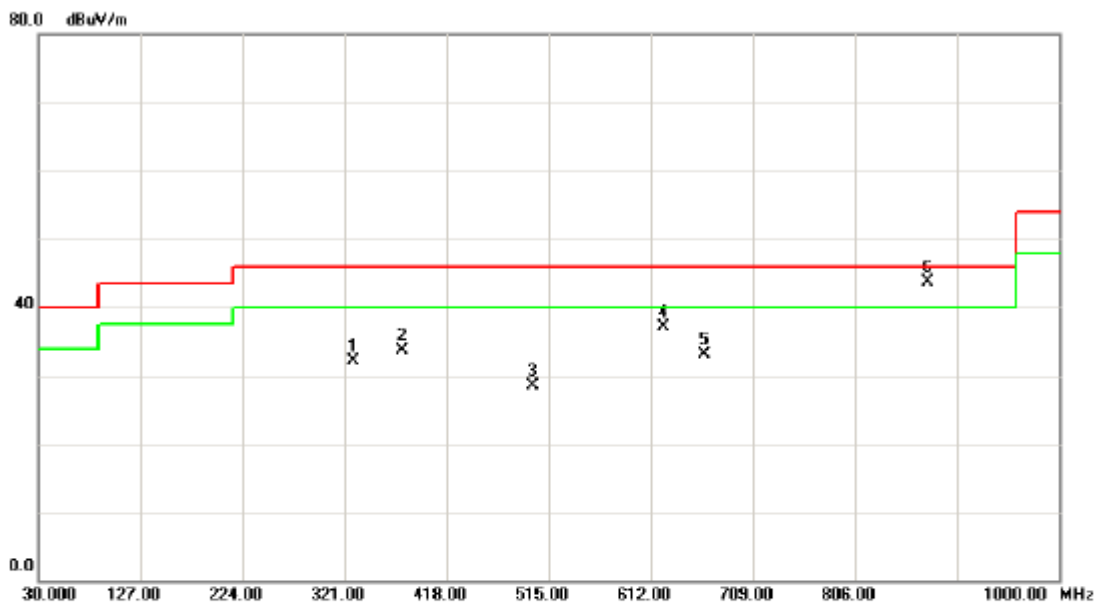

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		328.7600	43.55	-11.37	32.18	46.00	-13.82	peak	
2		375.3200	44.43	-10.66	33.77	46.00	-12.23	peak	
3		500.4500	38.87	-10.31	28.56	46.00	-17.44	peak	
4		624.6100	44.02	-6.86	37.16	46.00	-8.84	peak	
5		662.4400	38.40	-5.38	33.02	46.00	-12.98	peak	
6	*	874.8700	46.12	-2.48	43.64	46.00	-2.36	peak	



4.2.8 TEST RESULTS - ABOVE 1000MHZ

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	9.48	0.21	42.72	52.20	42.93	-52.57	-61.84	68.30	54.00	-27.00	-41.30	X/E
5176.80	V	57.68	48.67	42.78	100.46	91.45	-4.31	-13.32					X/F
10365.35	V	37.03	29.48	16.02	53.05	45.50	-51.72	-59.27	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency.“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)

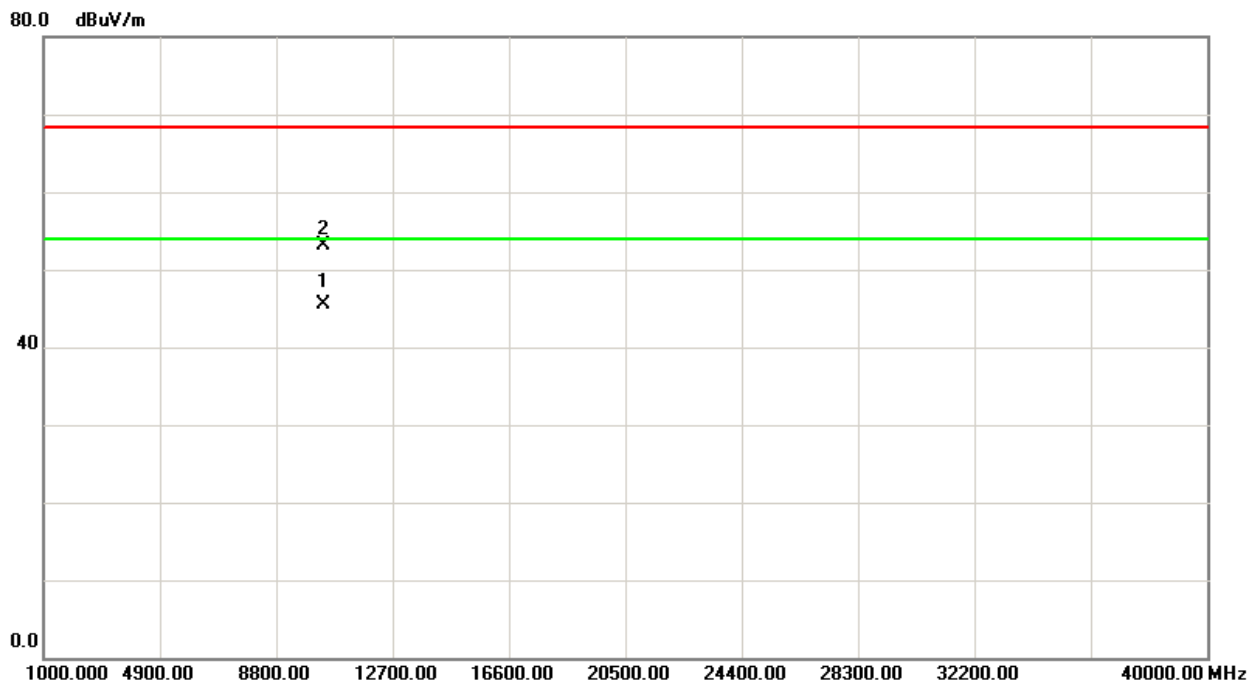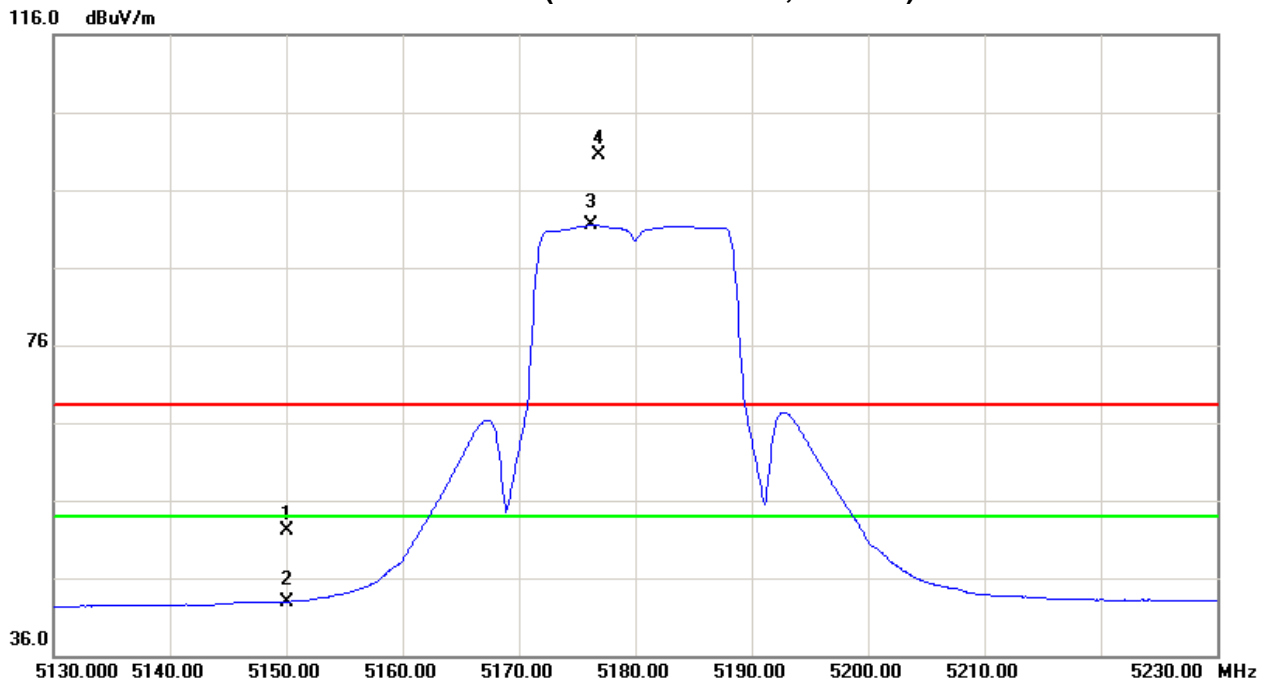



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	7.99	-1.02	42.72	50.71	41.70	-54.06	-63.07	68.30	54.00	-27.00	-41.30	X/E
5176.20	H	45.71	37.14	42.78	88.49	79.92	-16.28	-24.85					X/F
10361.50	H	36.35	29.45	16.02	52.37	45.47	-52.40	-59.30	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency.“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

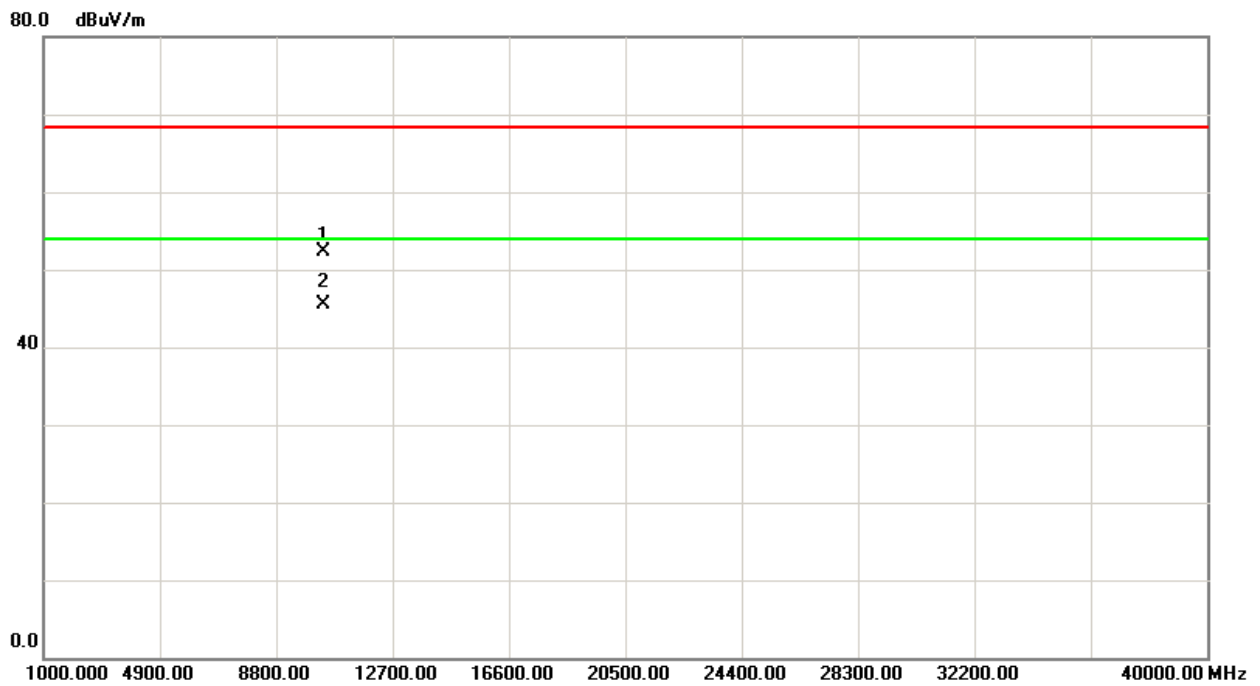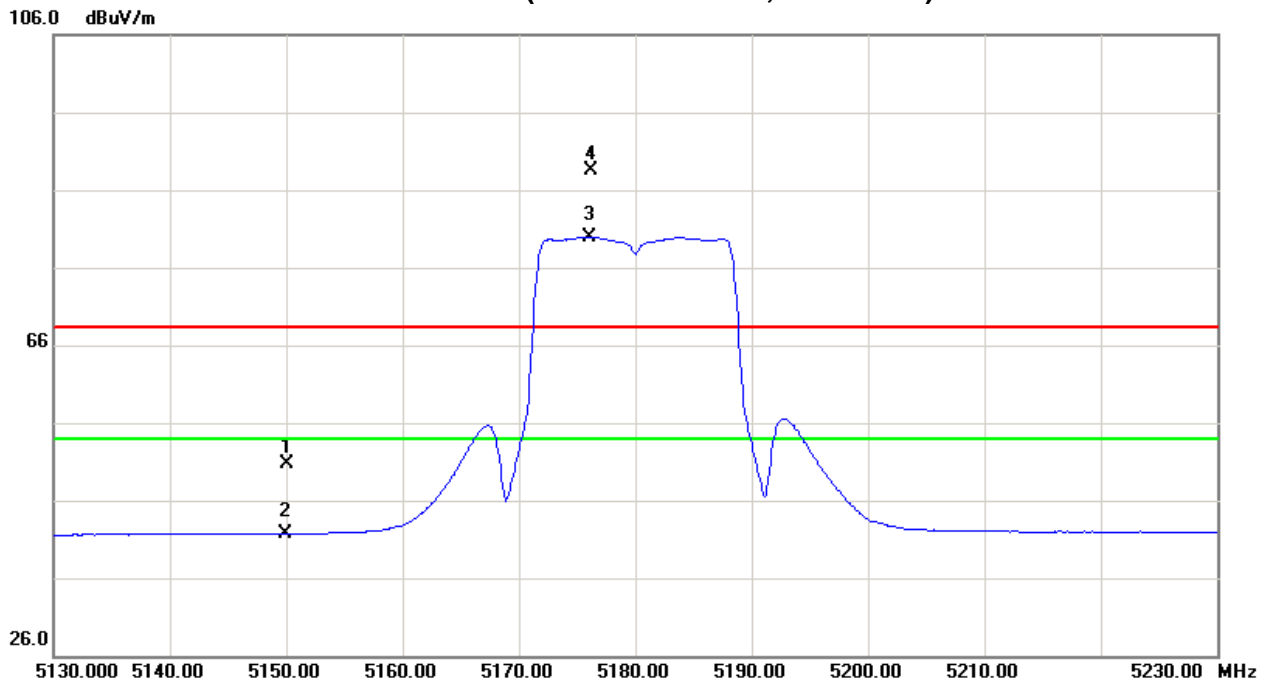



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz		



Freq. (MHz)	Ant. Pol. H/V	Reading (dBuV)		Ant./CF (dB)	Act. (dBuV/m)		Act. (dBm)		Limit (dBuV/m)		Limit (dBm)		Note
		Peak	AV		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5202.80	V	57.02	48.86	42.84	99.86	91.70	-4.91	-13.07					X/F
10400.29	V	37.56	30.11	15.97	53.53	46.08	-51.24	-58.69	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

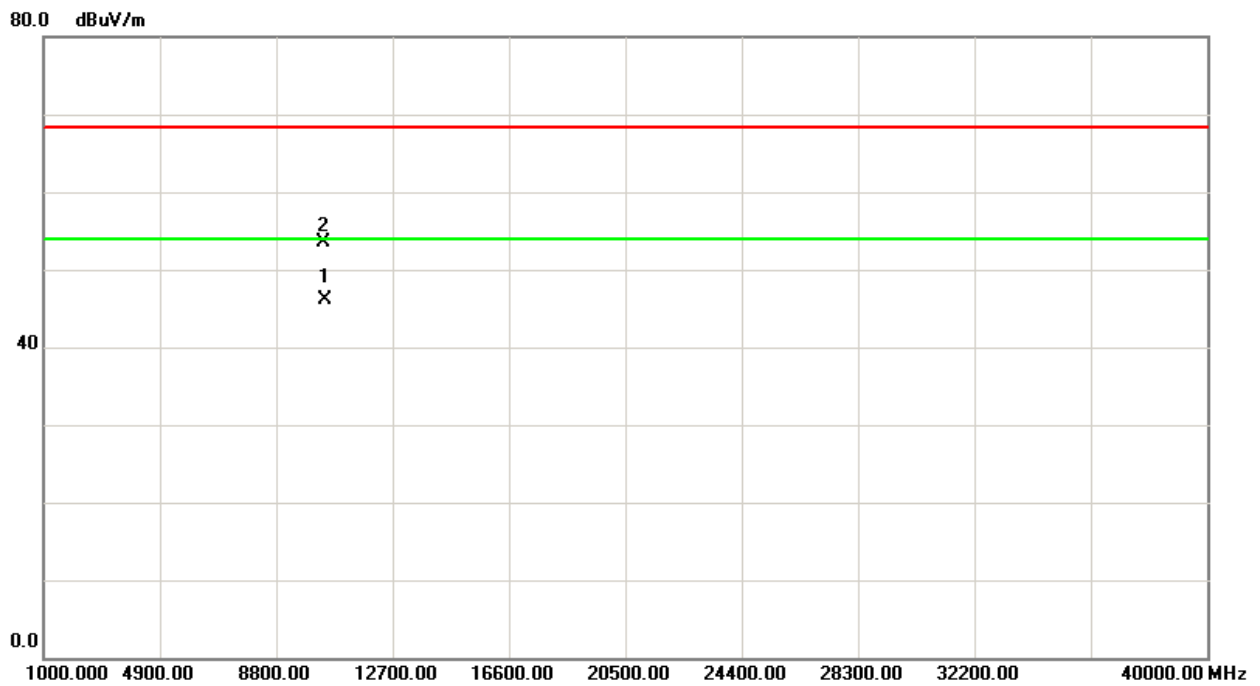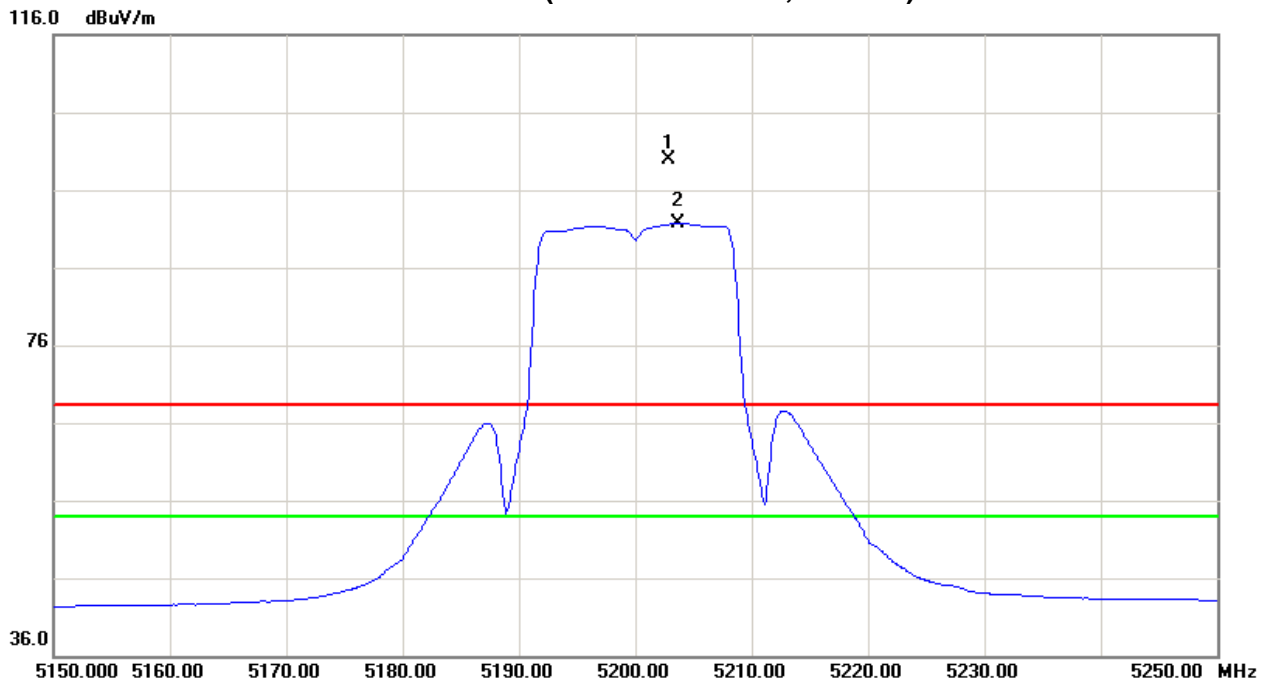



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act. (dBuV/m)		Act. (dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5203.30	H	46.01	38.14	42.85	88.86	80.99	-15.91	-23.78					X/F
10400.26	H	37.06	30.58	15.97	53.03	46.55	-51.74	-58.22	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)

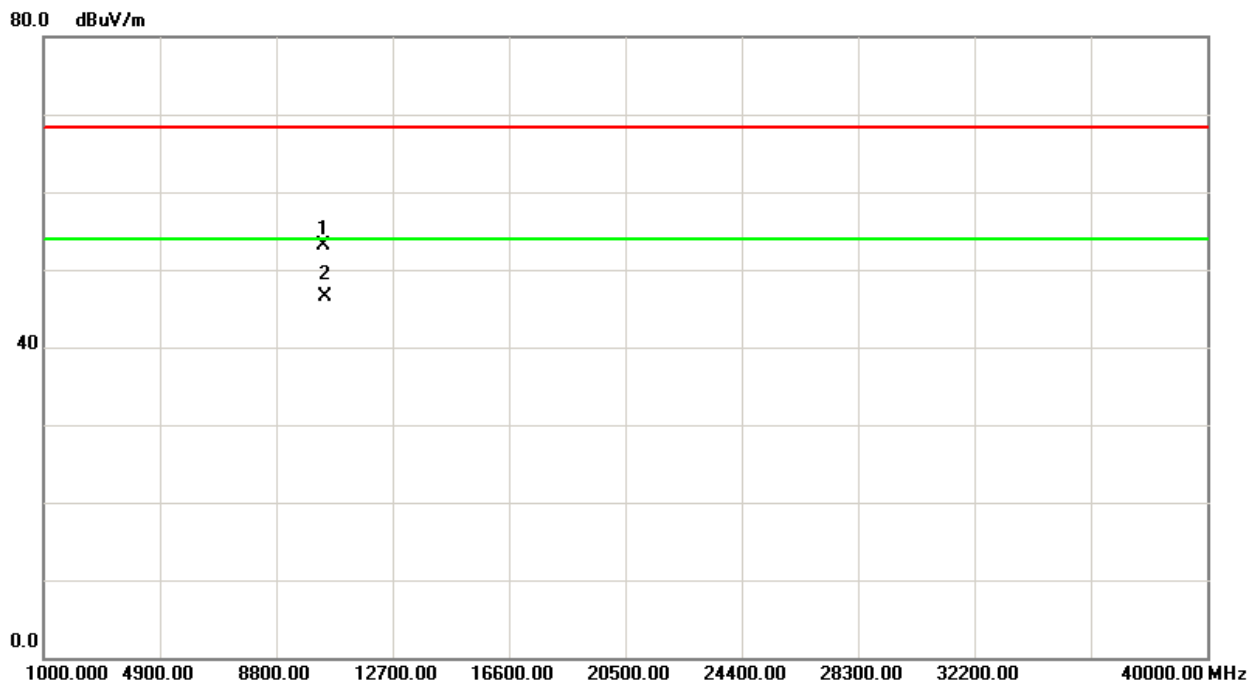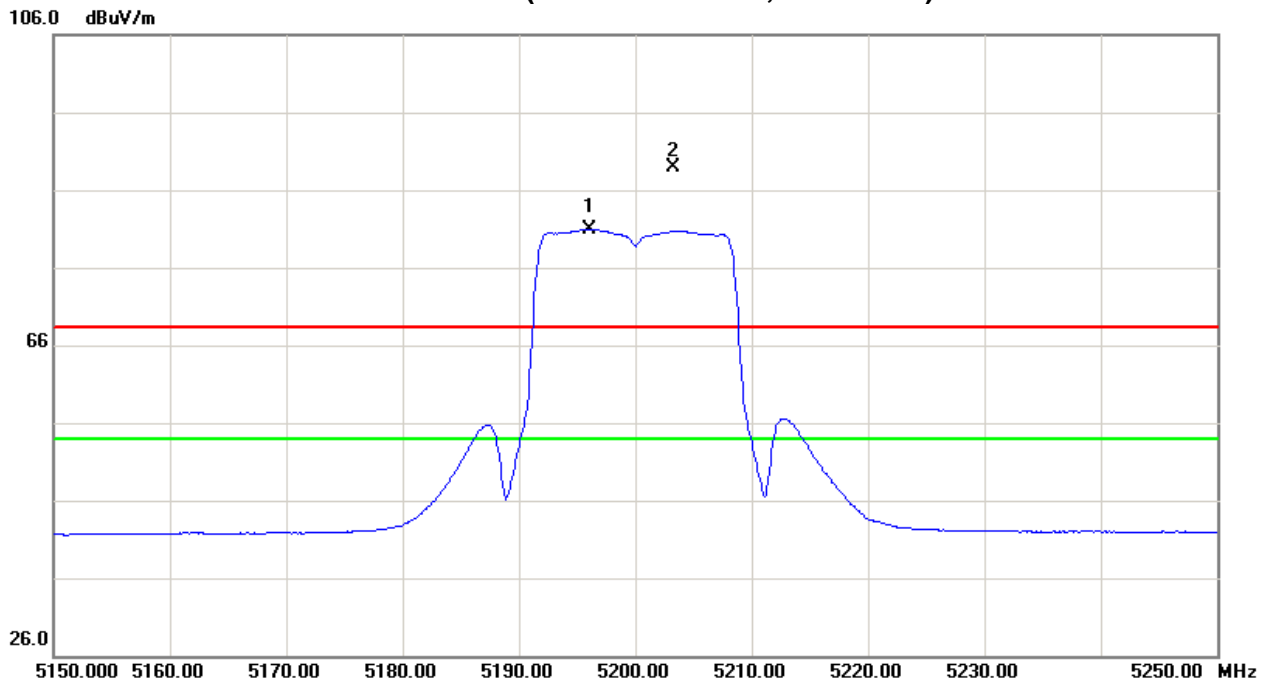



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5235.50	V	59.23	50.70	42.93	102.16	93.63	-2.61	-11.14					X/F
10480.18	V	37.05	29.58	15.85	52.90	45.43	-51.87	-59.34	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

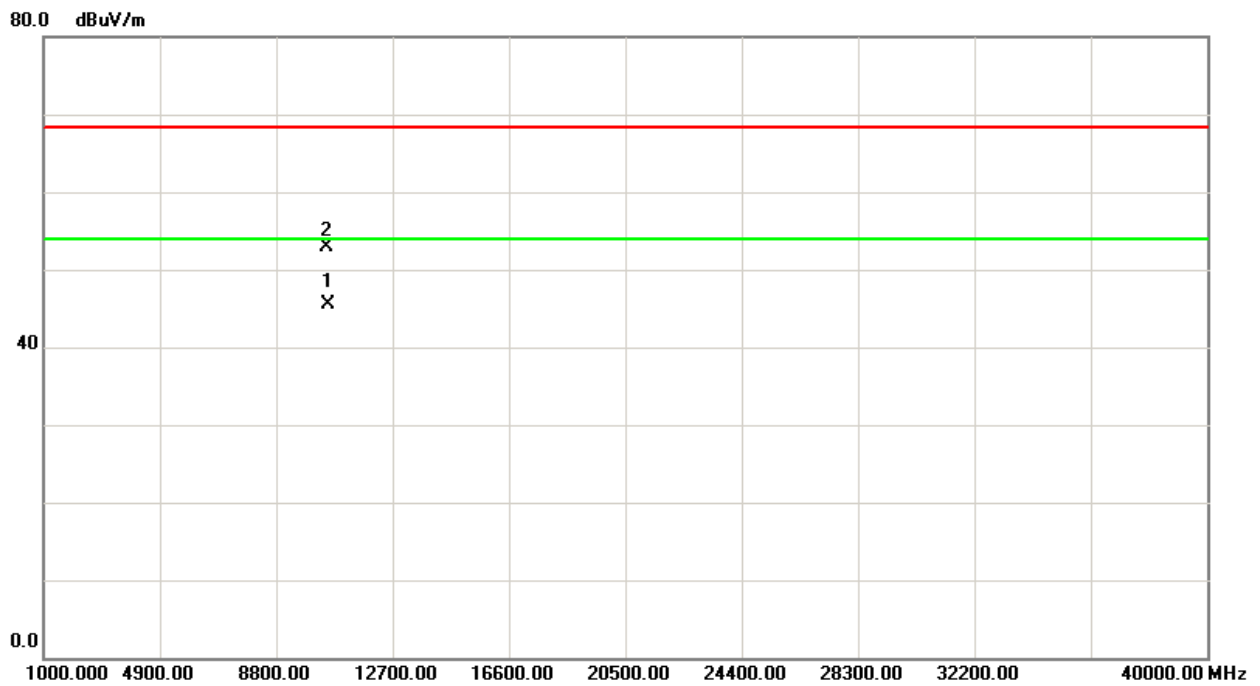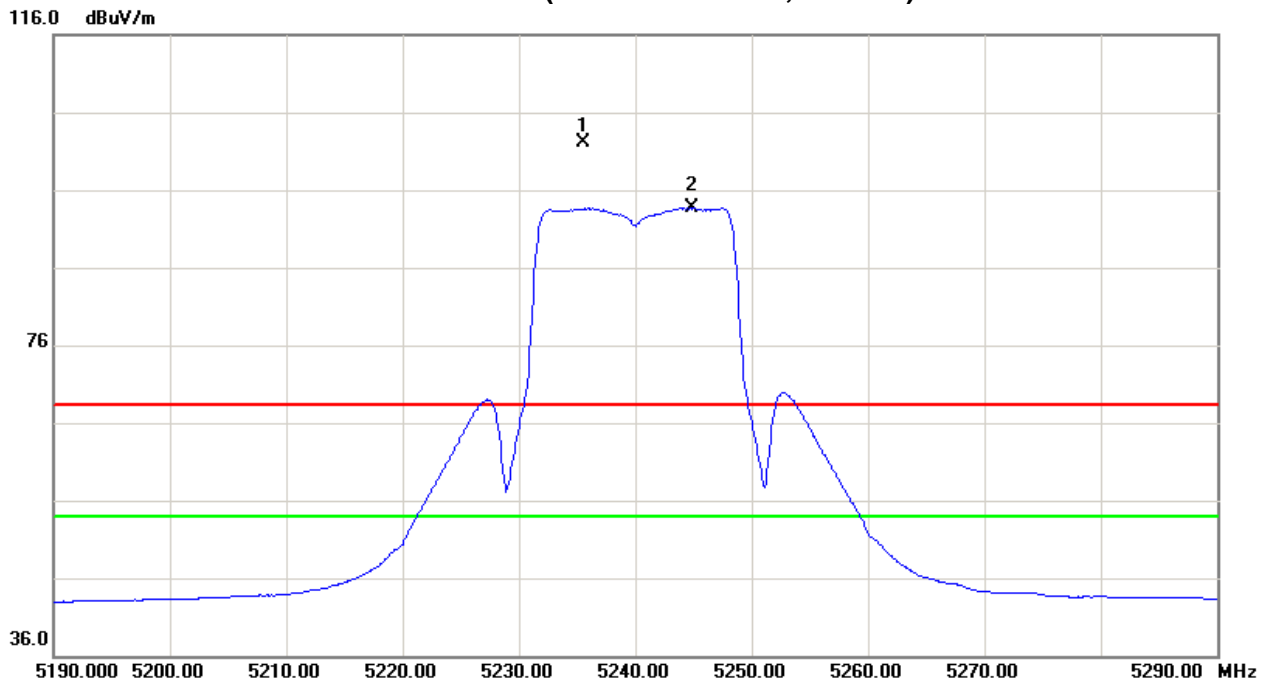



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5237.10	H	49.54	40.41	42.93	92.47	83.34	-12.30	-21.43					X/F
10480.25	H	36.67	30.21	15.85	52.52	46.06	-52.25	-58.71	72.47	63.34	-22.83	-31.96	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

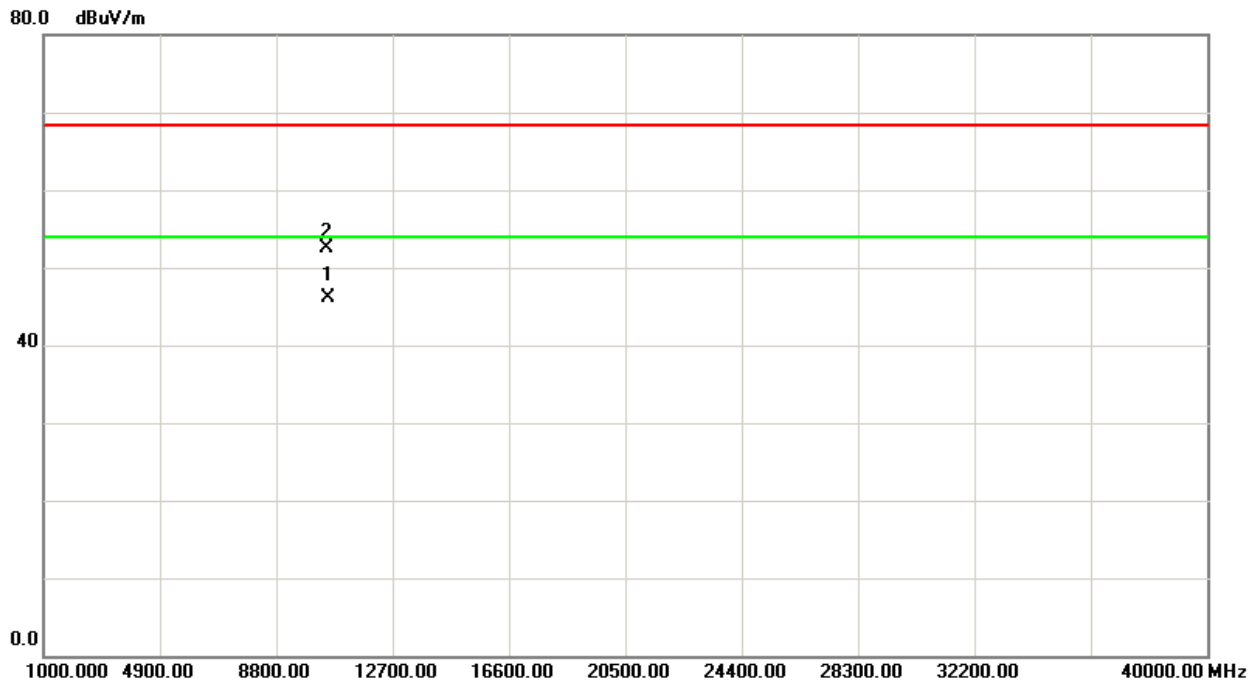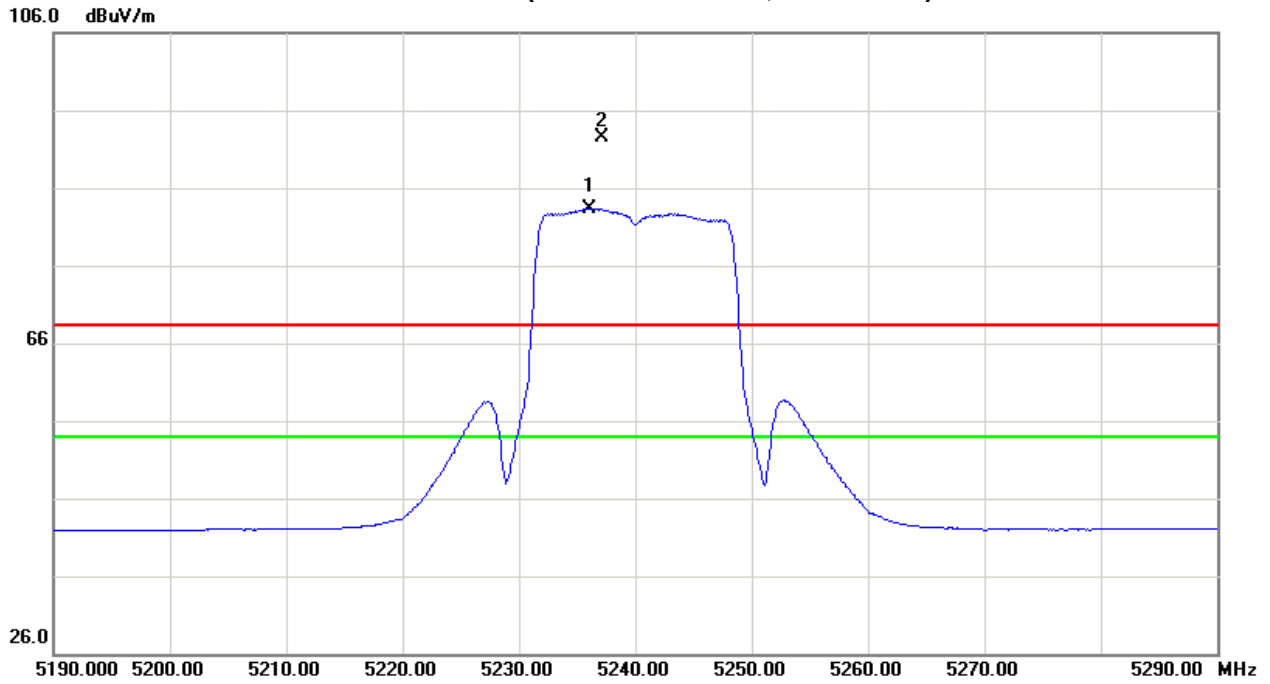



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act. (dBuV/m)		Act. (dBm)		Limit (dBuV/m)		Limit (dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	8.27	0.54	42.72	50.99	43.26	-53.78	-61.51	68.30	54.00	-27.00	-41.30	X/E
5174.20	V	58.75	48.72	42.78	101.53	91.50	-3.24	-13.27					X/F
10365.22	V	36.84	29.16	16.02	52.86	45.18	-51.91	-59.59	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis: X
Band 1/CH36(Above 1000 MHz, Vertical)

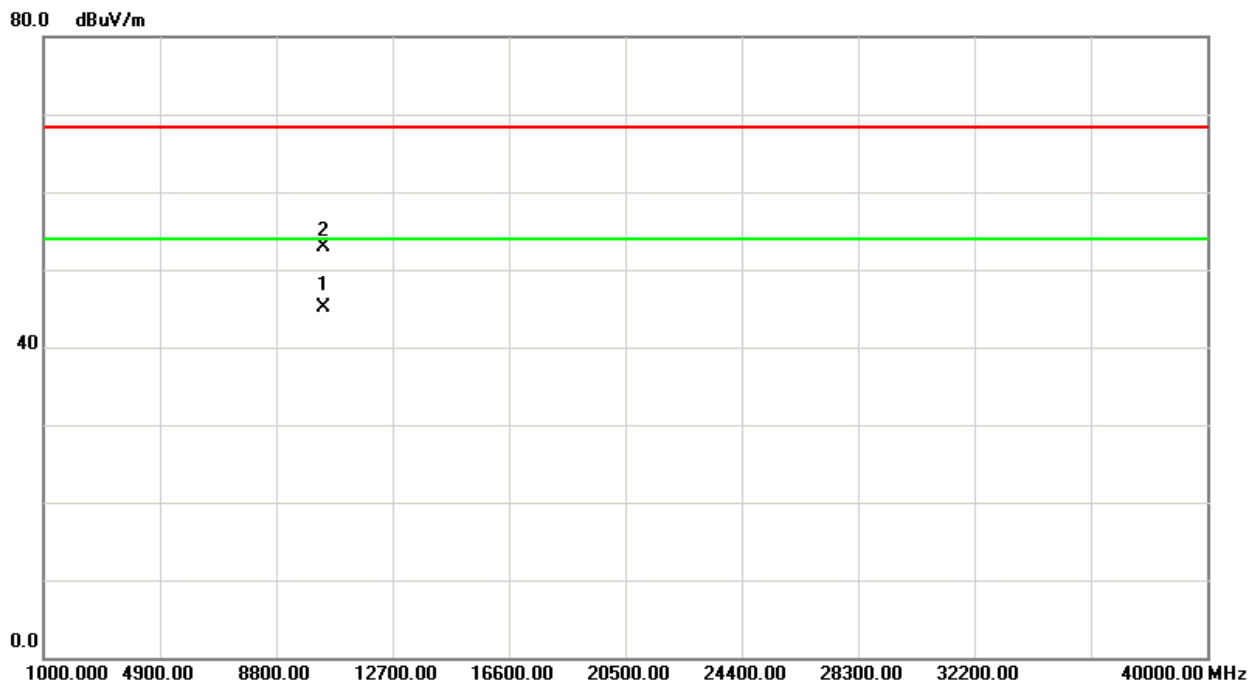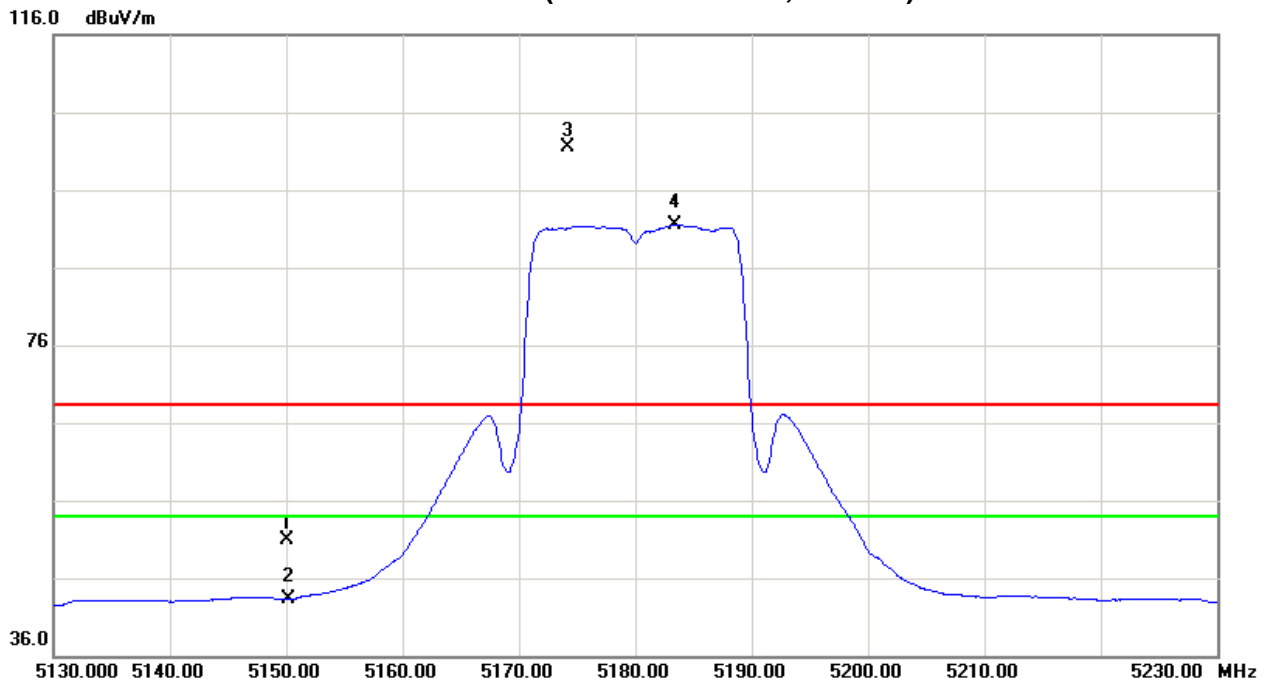



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	8.34	-0.97	42.72	51.06	41.75	-53.71	-63.02	68.30	54.00	-27.00	-41.30	X/E
5185.70	H	47.30	37.72	42.81	90.11	80.53	-14.66	-24.24					X/F
10360.15	H	36.25	29.06	16.03	52.28	45.09	-52.49	-59.68	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

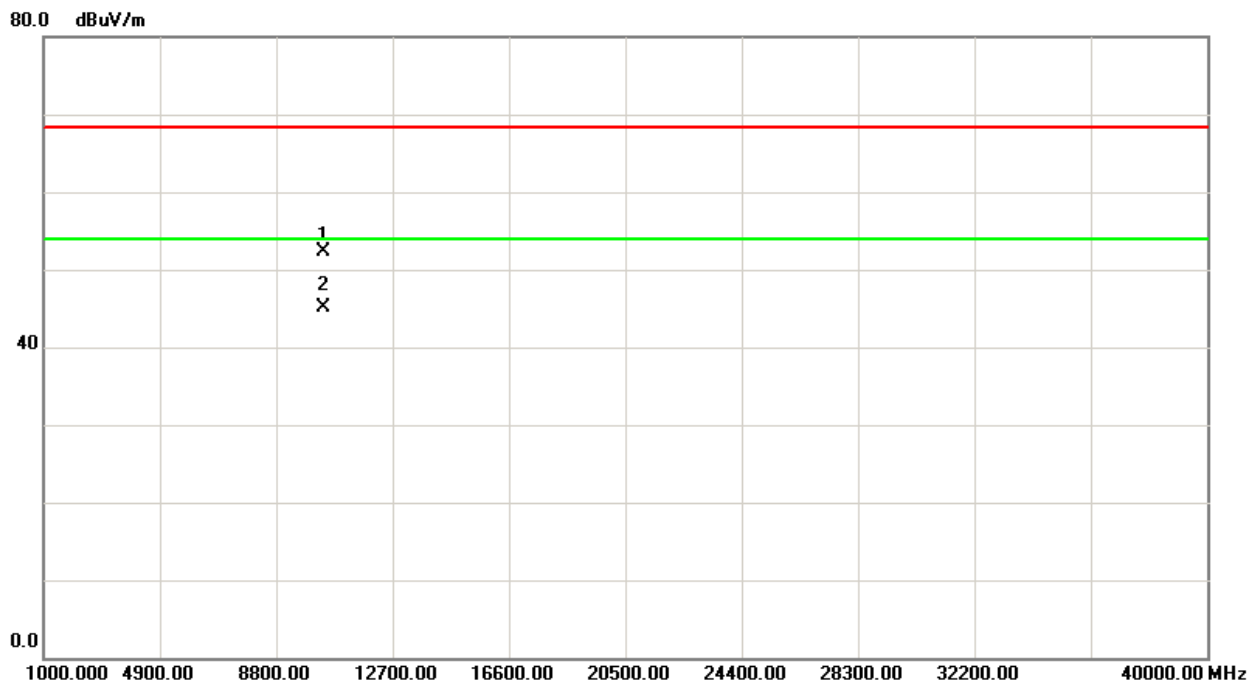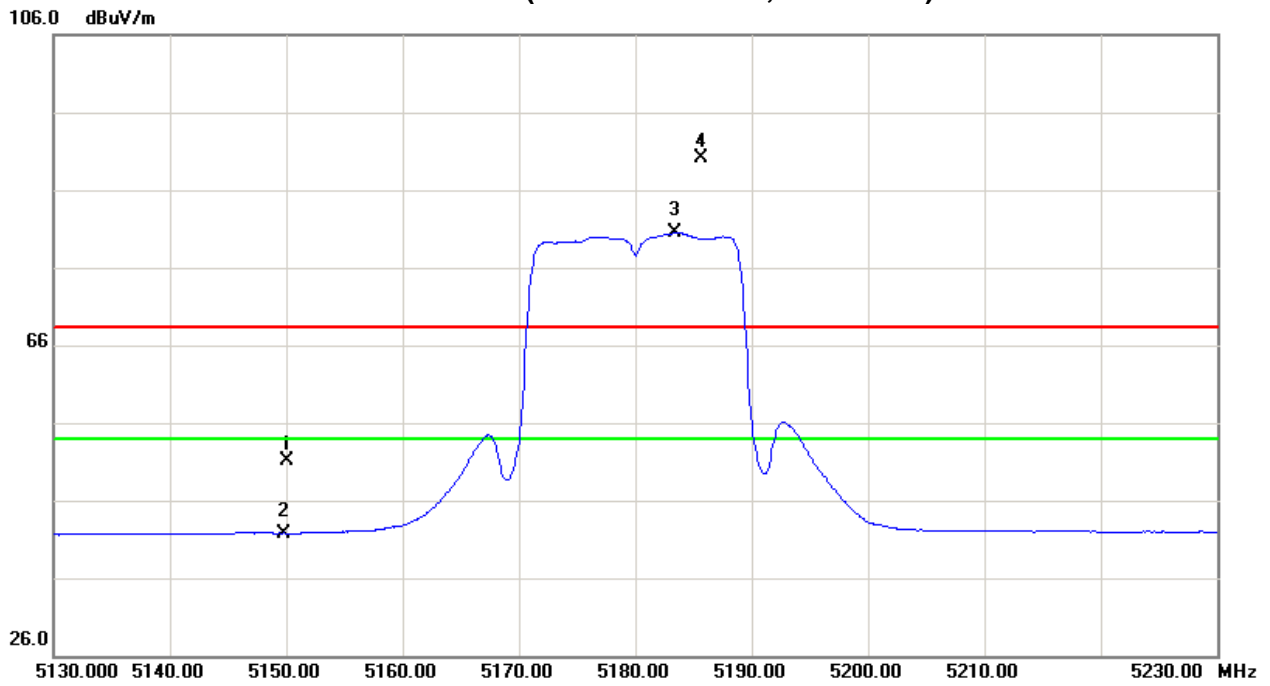



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5206.50	V	58.79	48.42	42.86	101.65	91.28	-3.12	-13.49					X/F
10400.23	V	36.96	29.65	15.97	52.93	45.62	-51.84	-59.15	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency.“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

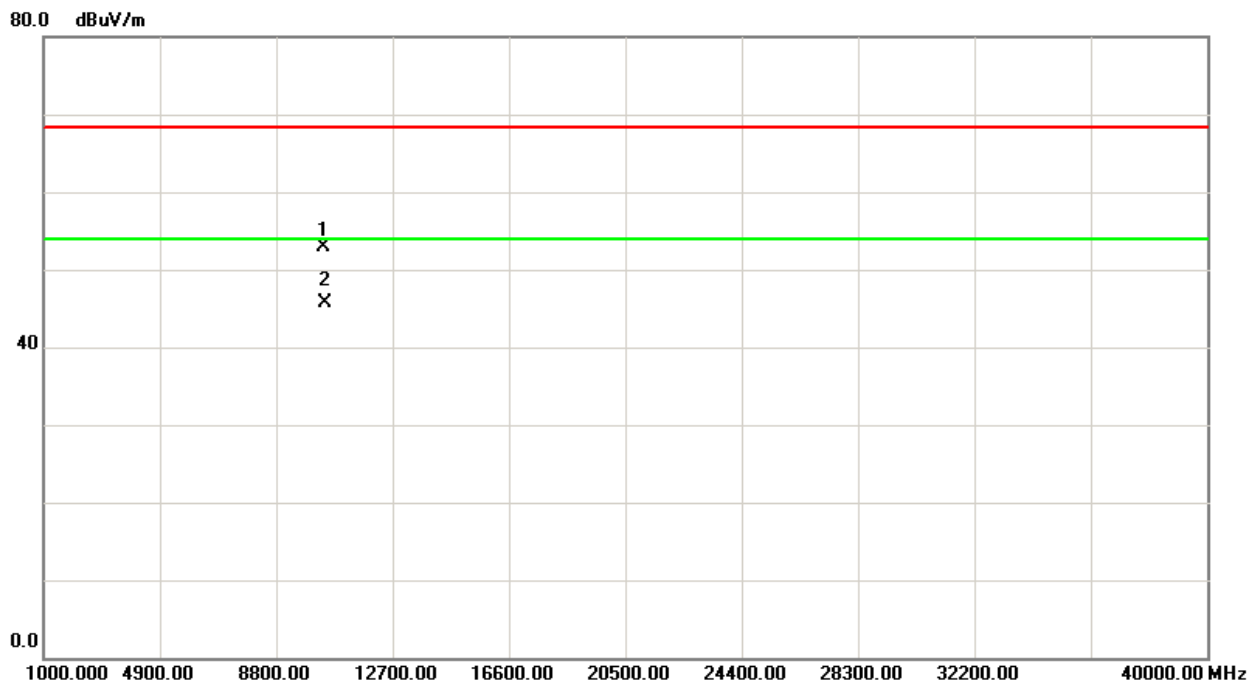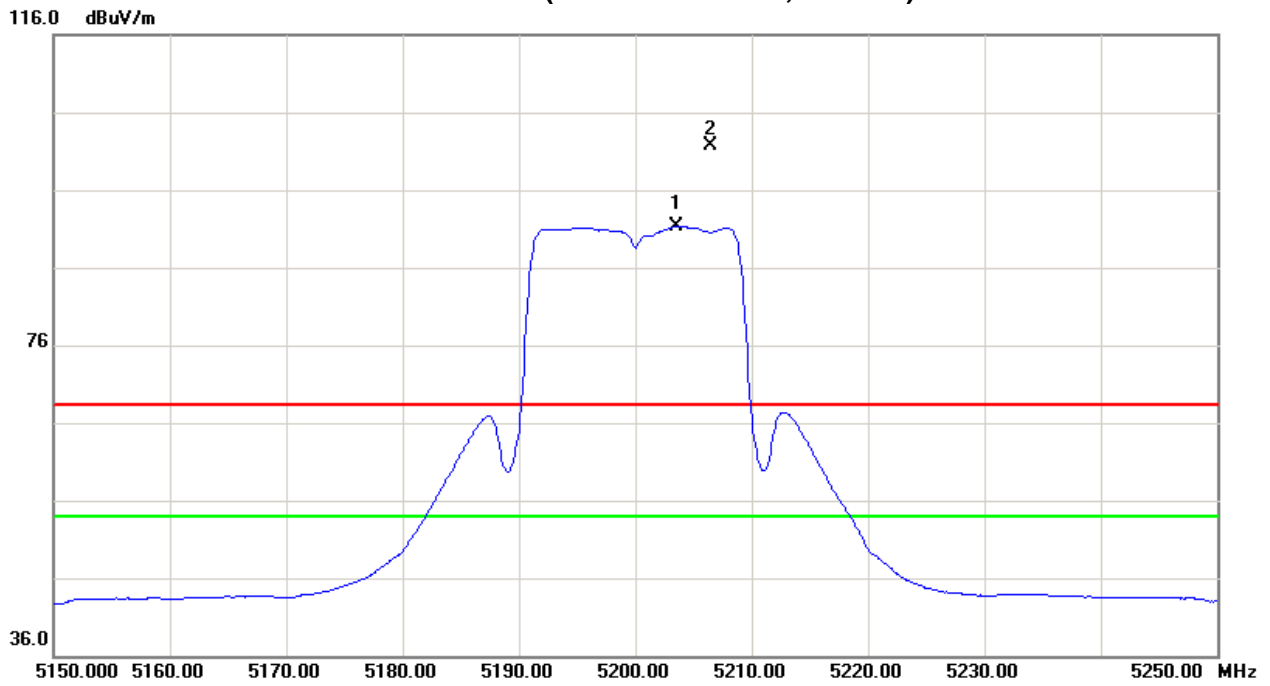



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz		



Freq. (MHz)	Ant. Pol. H/V	Reading (dBuV)		Ant./CF (dB)	Act. (dBuV/m)		Act. (dBm)		Limit (dBuV/m)		Limit (dBm)		Note
		Peak	AV		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5195.50	H	47.41	36.92	42.83	90.24	79.75	-14.53	-25.02					X/F
10400.15	H	36.57	30.02	15.97	52.54	45.99	-52.23	-58.78	70.24	59.75	-25.06	-35.55	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis: X
Band 1/CH40(Above 1000 MHz, Horizontal)

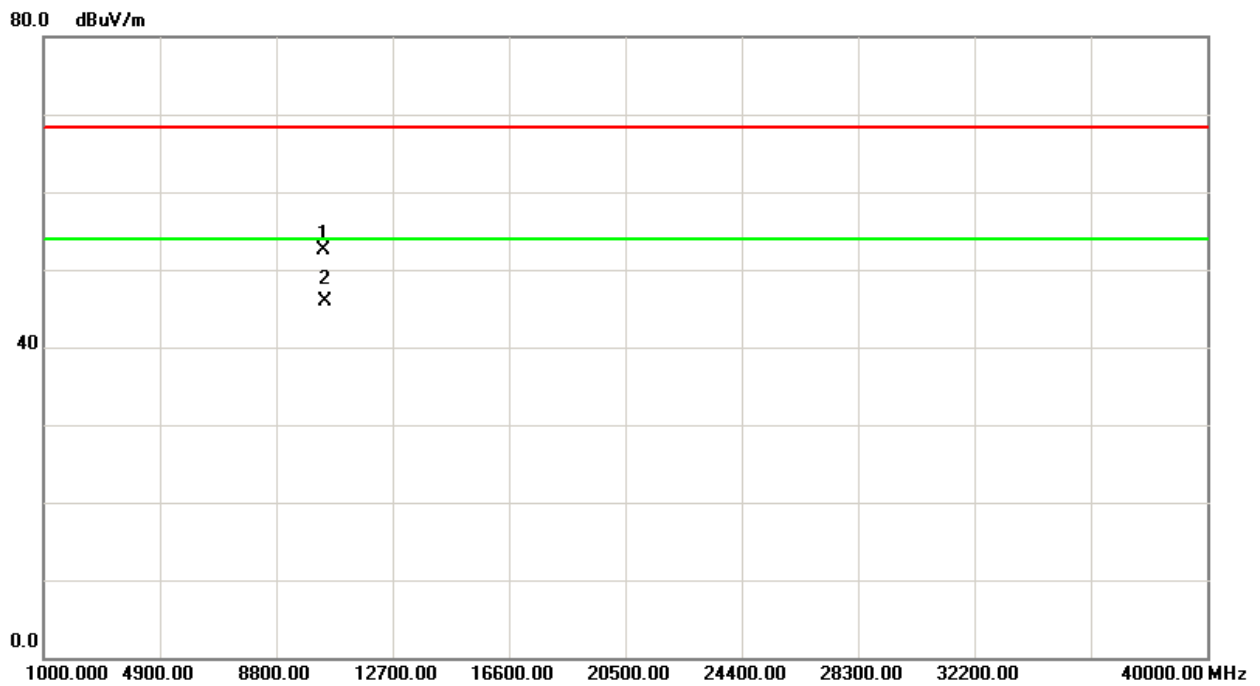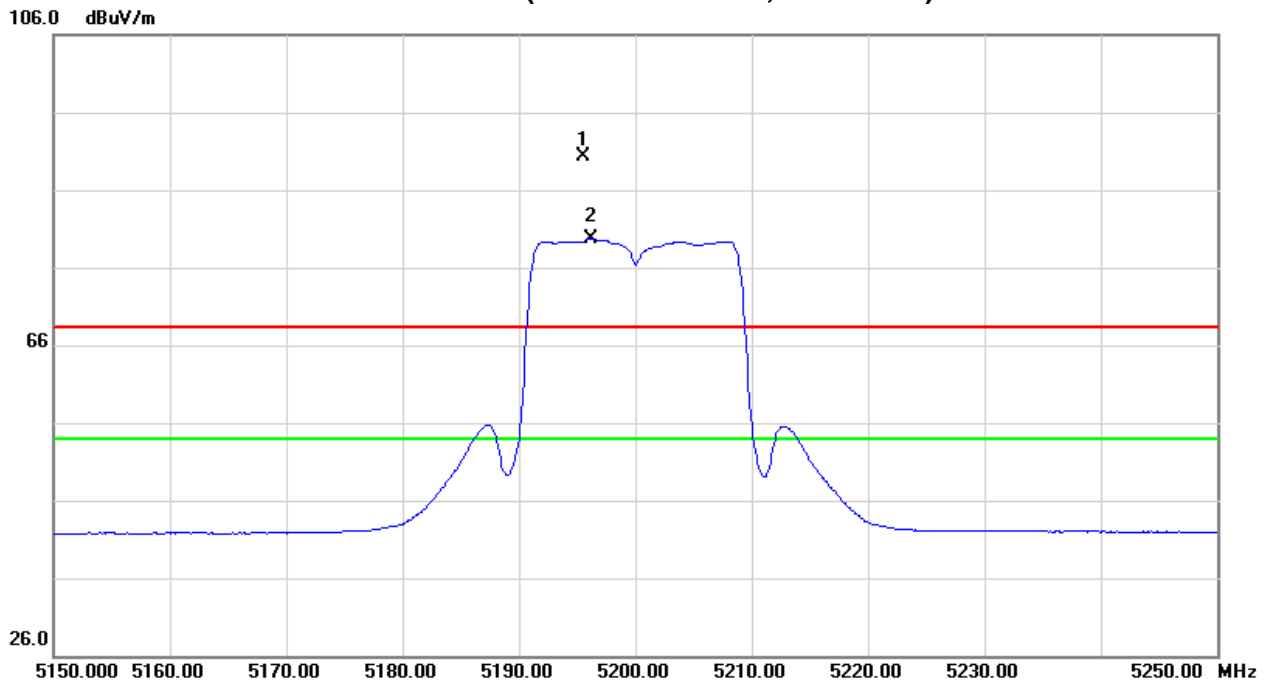



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5243.60	V	59.15	49.18	42.95	102.10	92.13	-2.67	-12.64					X/F
10480.26	V	36.54	29.05	15.85	52.39	44.90	-52.38	-59.87	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

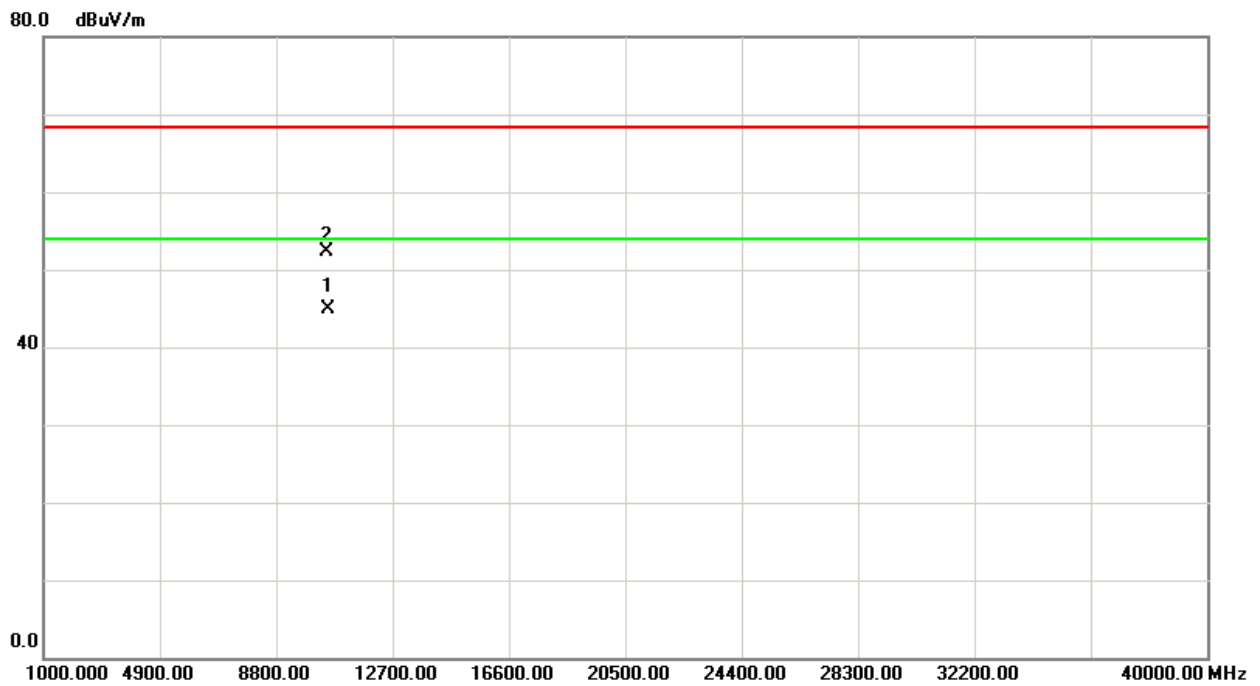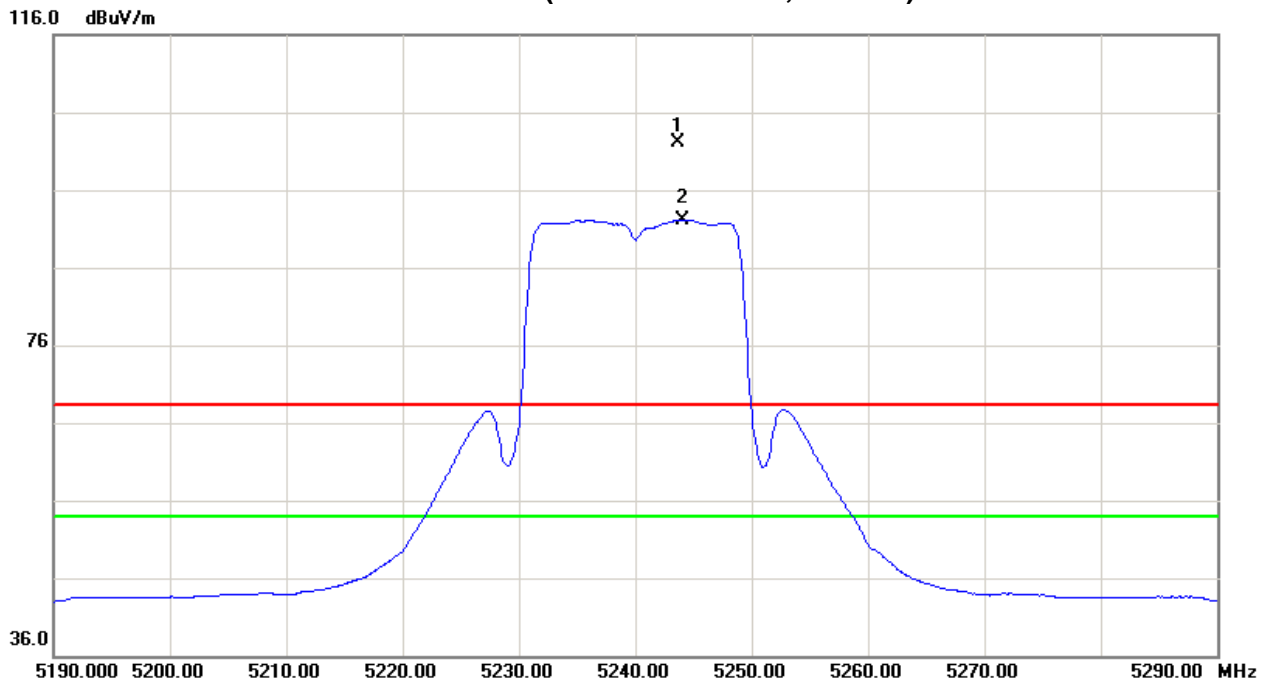



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5237.20	H	46.18	35.85	42.93	89.11	78.78	-15.66	-25.99					X/F
10480.23	H	36.25	29.68	15.85	52.10	45.53	-52.67	-59.24	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

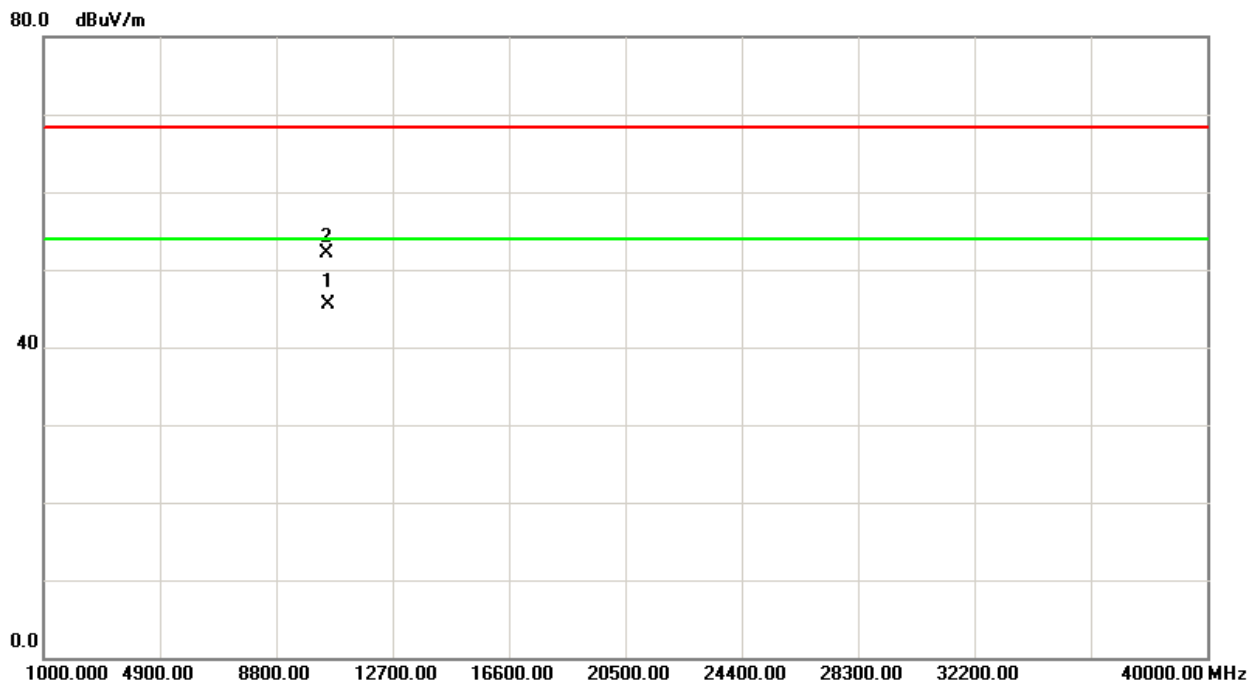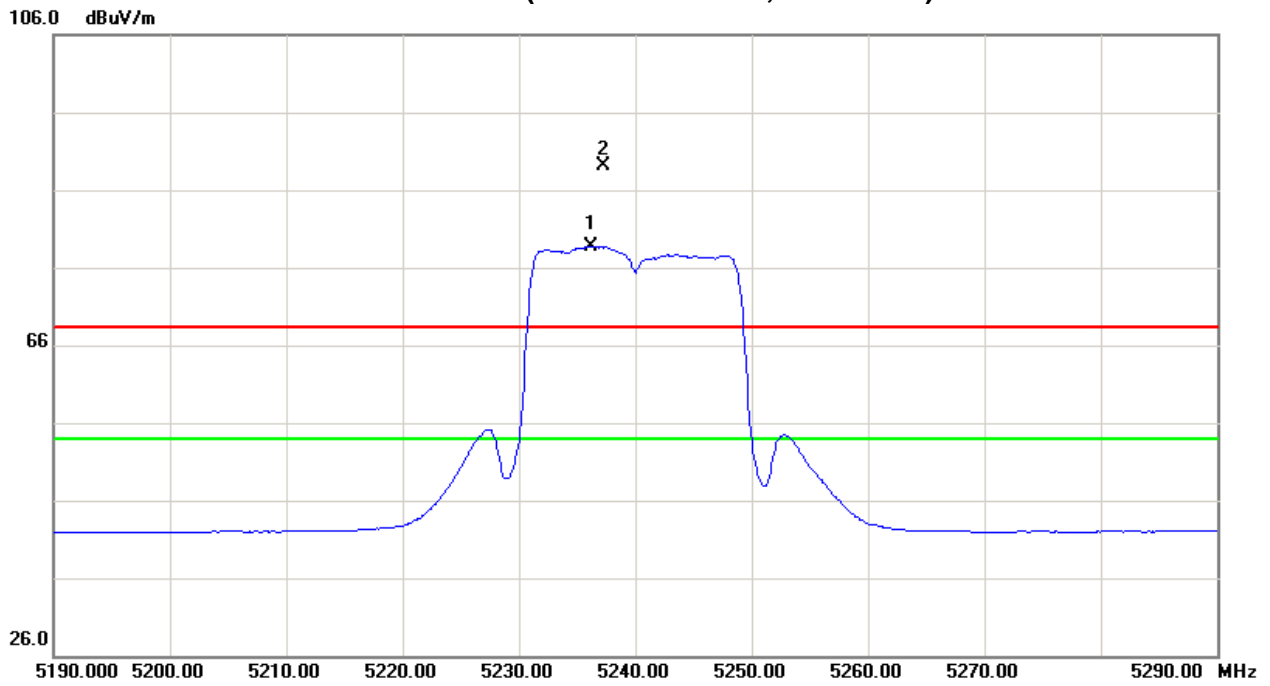



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act. (dBuV/m)		Act. (dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	15.33	5.25	42.72	58.05	47.97	-46.72	-56.80	68.30	54.00	-27.00	-41.30	X/E
5178.80	V	56.31	44.46	42.79	99.10	87.25	-5.67	-17.52					X/F
10384.50	V	36.14	28.67	15.98	52.12	44.65	-52.65	-60.12	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Vertical)

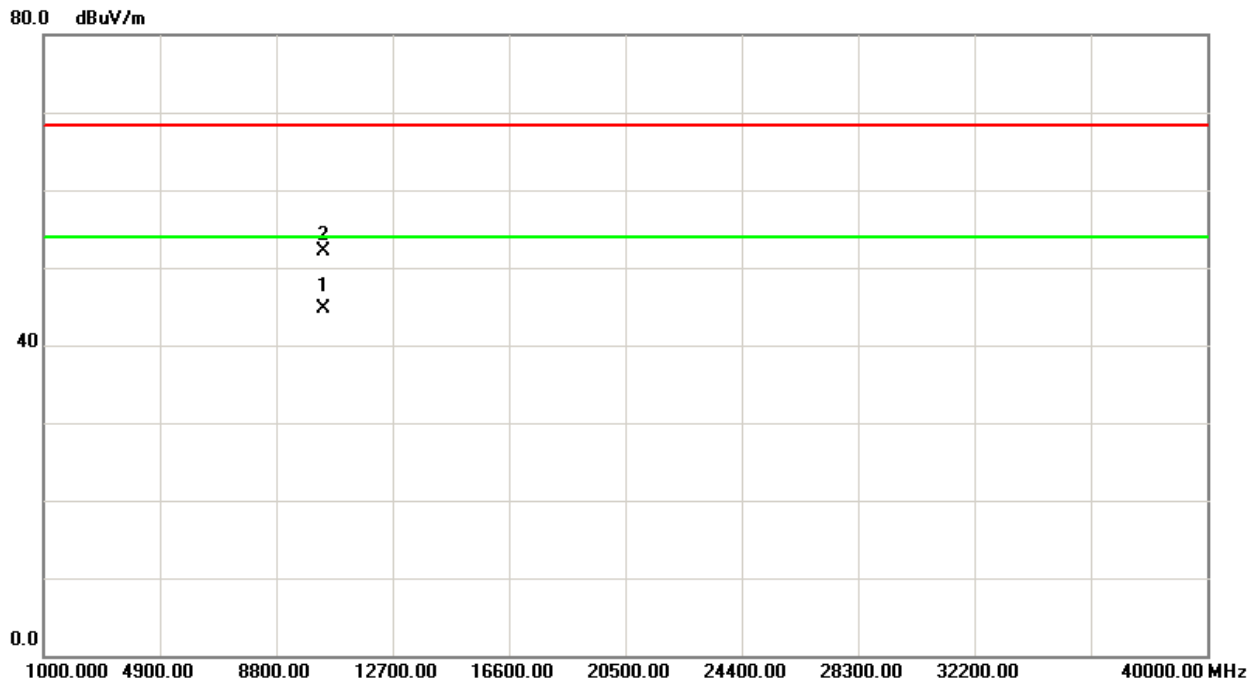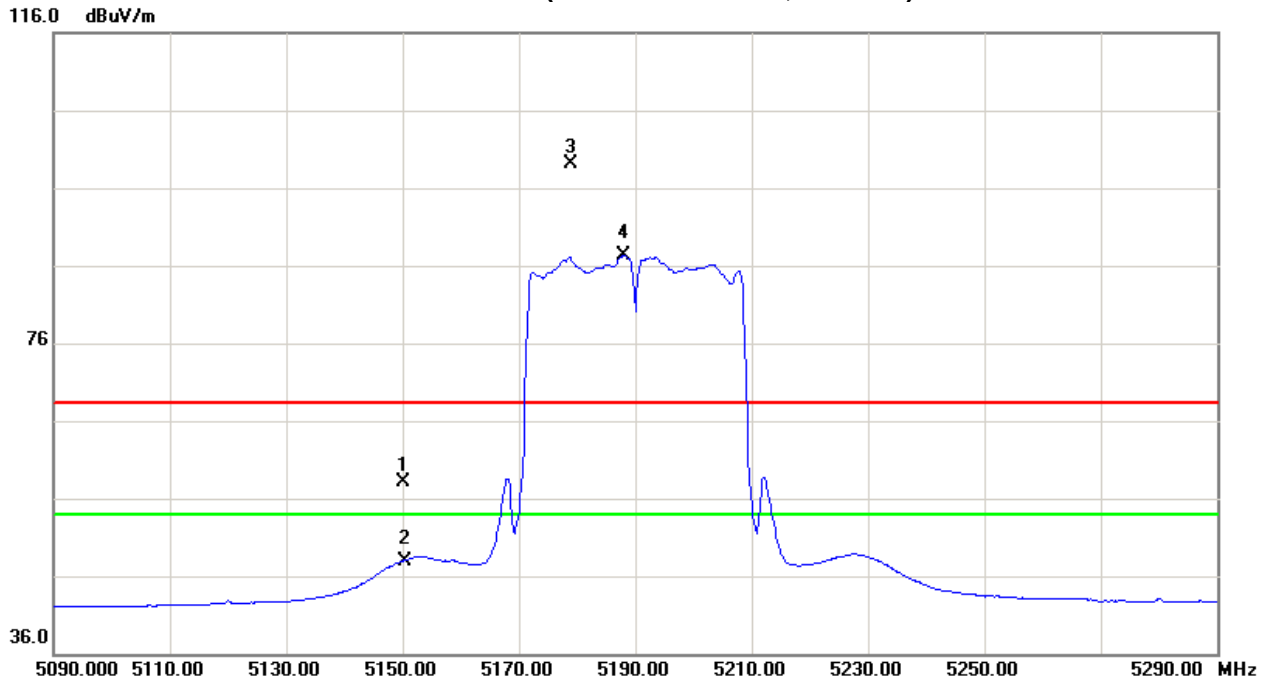



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	8.89	-0.02	42.72	51.61	42.70	-53.16	-62.07	68.30	54.00	-27.00	-41.30	X/E
5187.60	H	45.52	33.97	42.81	88.33	76.78	-16.44	-27.99					X/F
10382.45	H	35.74	28.68	15.99	51.73	44.67	-53.04	-60.10	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency."F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Horizontal)

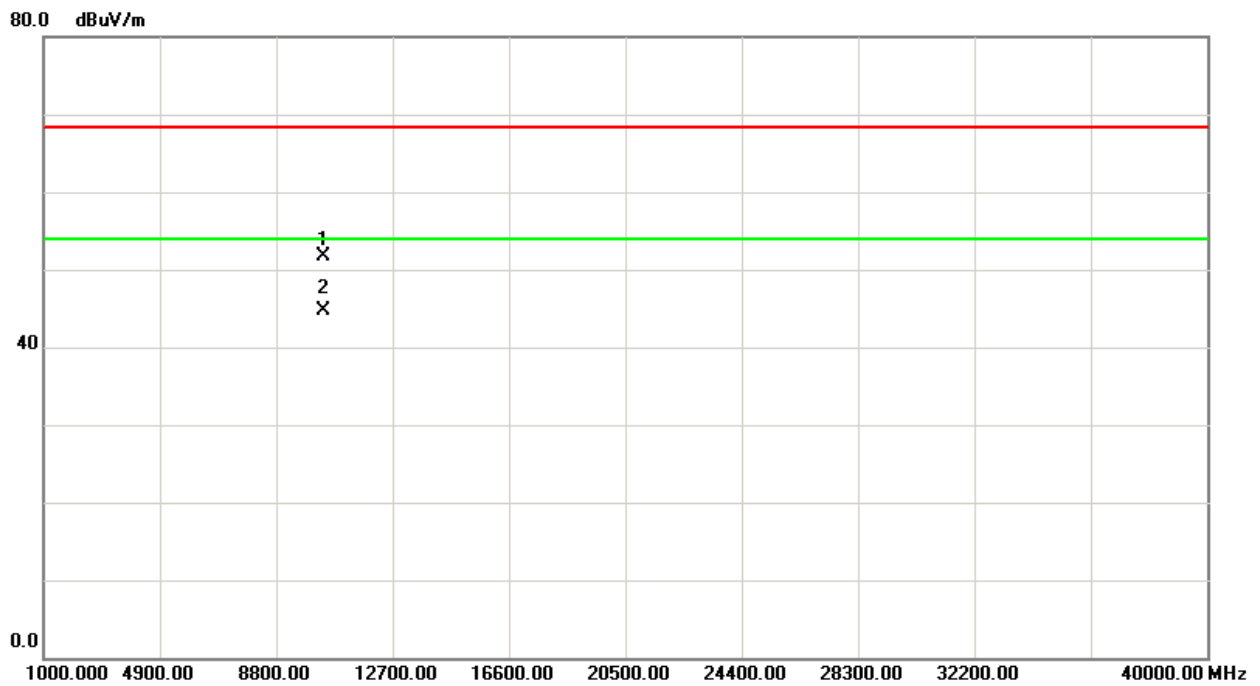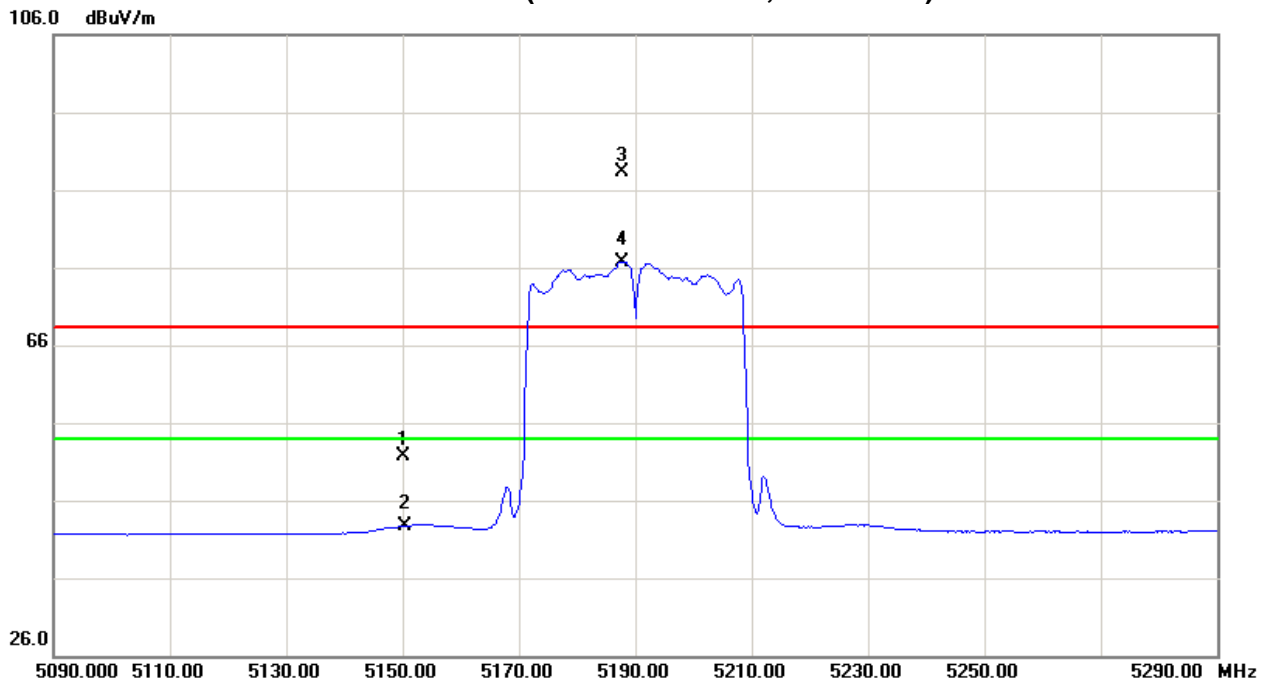



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBUV/m)		Act.(dBm)		Limit(dBUV/m)		Limit(dBm)		Note
		Peak (dBUV)	AV (dBUV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5228.80	V	56.86	45.22	42.92	99.78	88.14	-4.99	-16.63					X/F
10460.20	V	36.74	29.26	15.88	52.62	45.14	-52.15	-59.63	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency.“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Vertical)

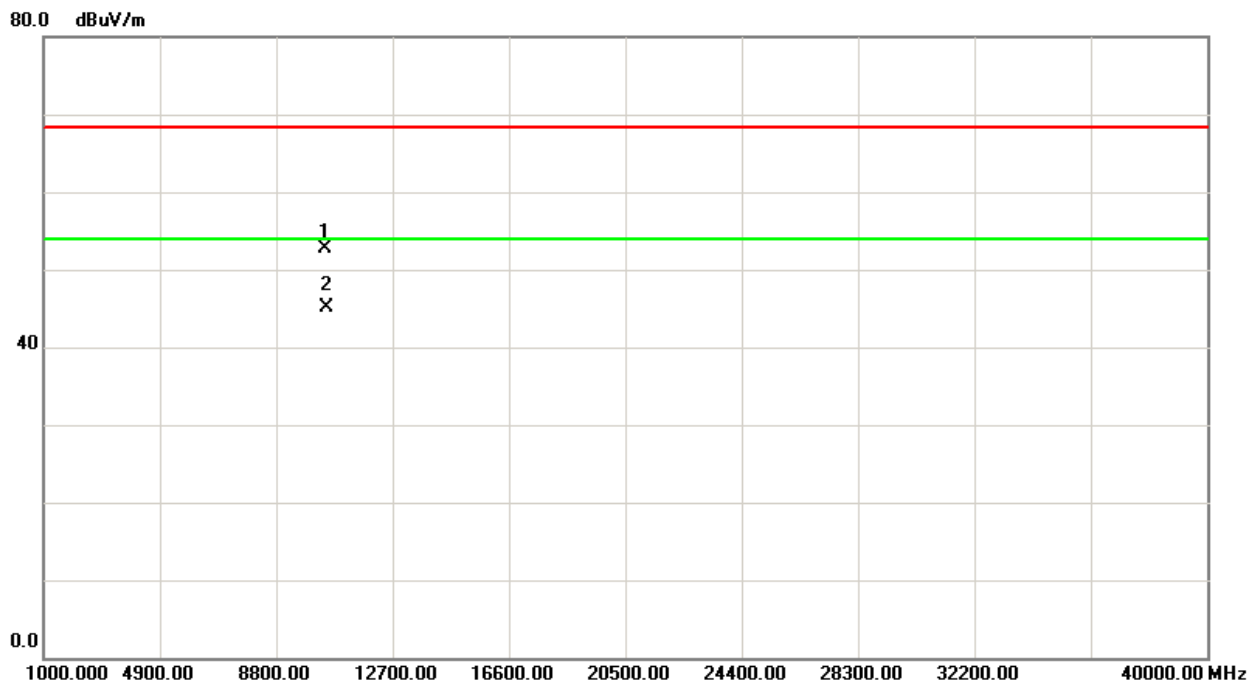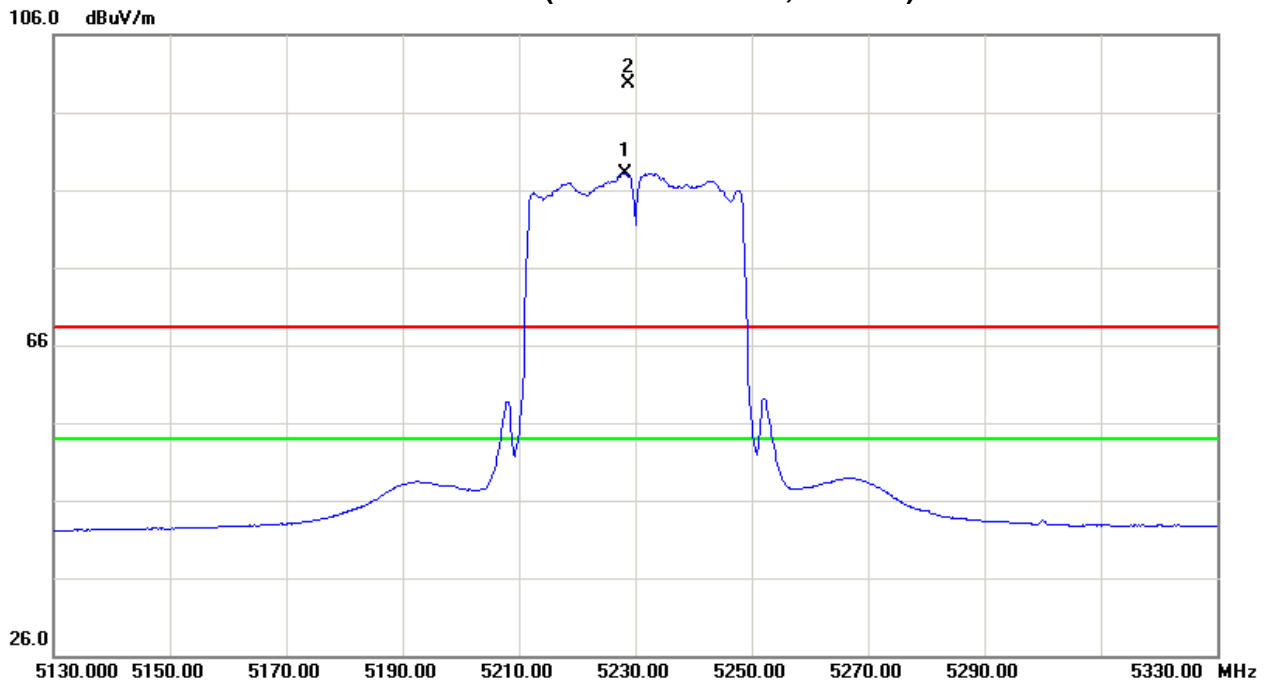



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5233.00	H	43.68	33.24	42.92	86.60	76.16	-18.17	-28.61					X/F
10462.17	H	36.12	29.85	15.88	52.00	45.73	-52.77	-59.04	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency.“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Horizontal)

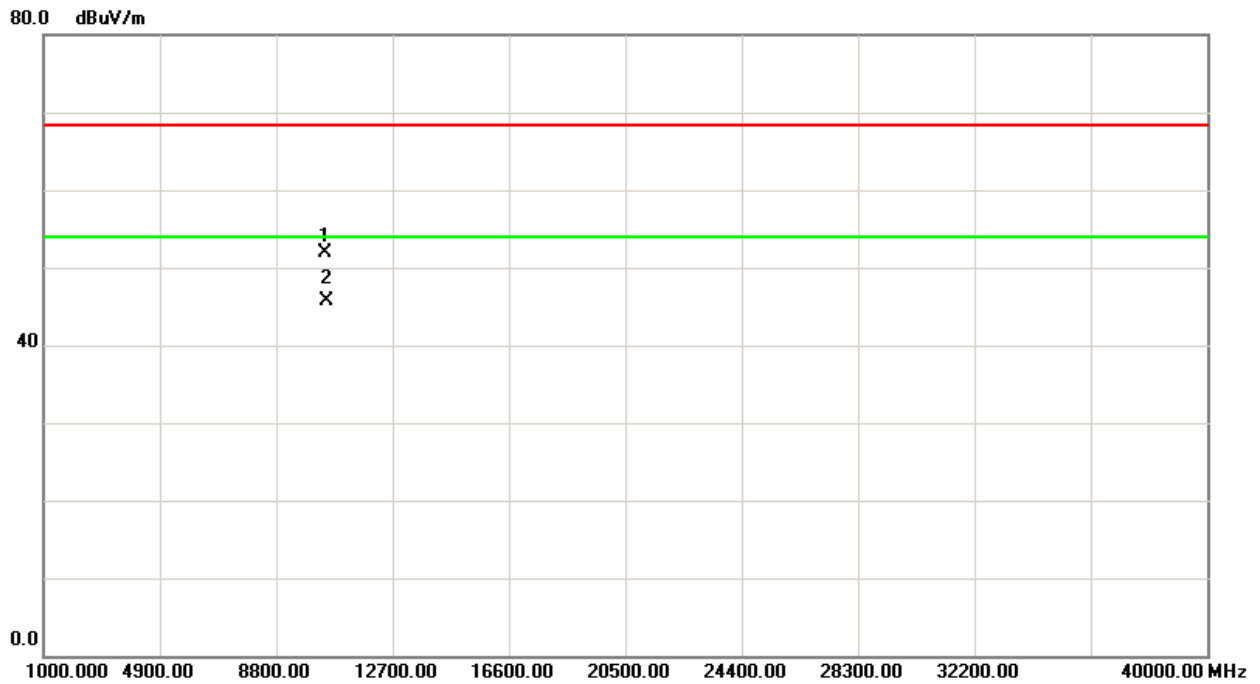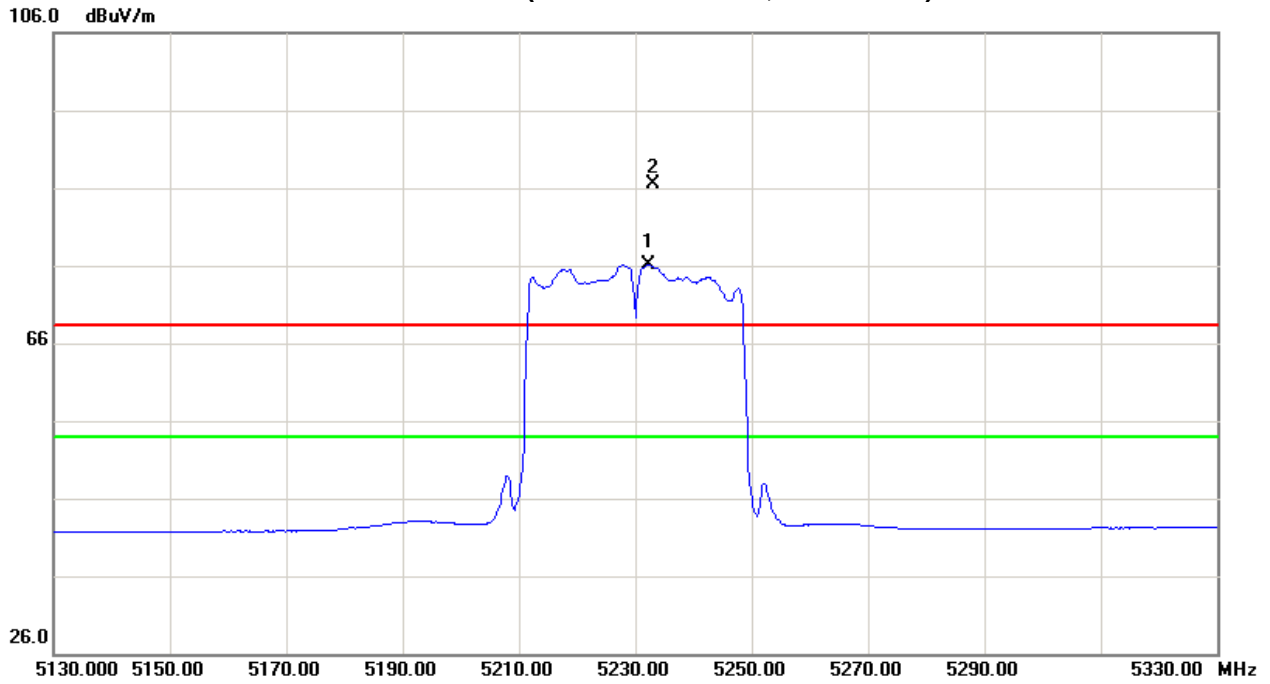



5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
26 dB Bandwidth	-----	5150MHz~5250	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

5.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP



5.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.6 TEST RESULTS

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode /CH36, CH40, CH48		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	27.30	17.40
CH40	5200	27.10	17.40
CH48	5240	27.20	17.40

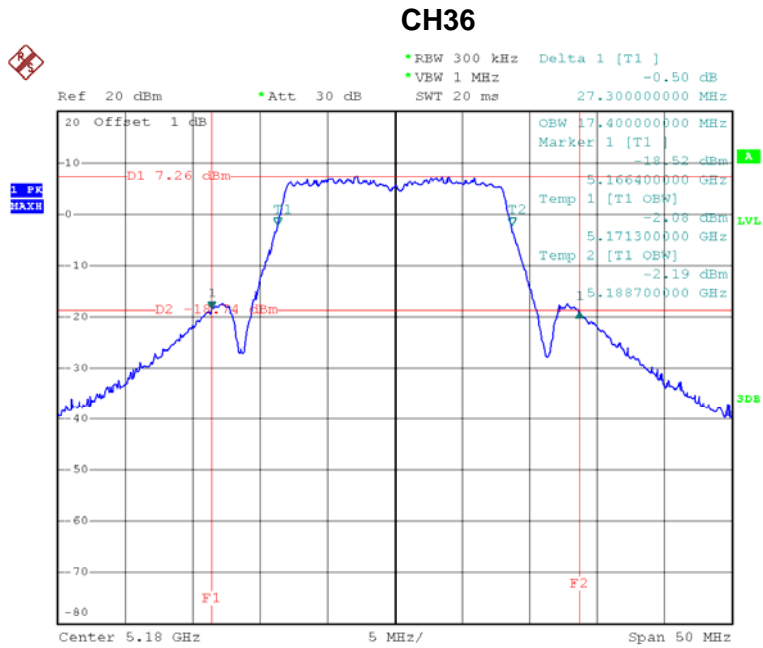

Date: 1.NOV.2013 13:44:31




CH40

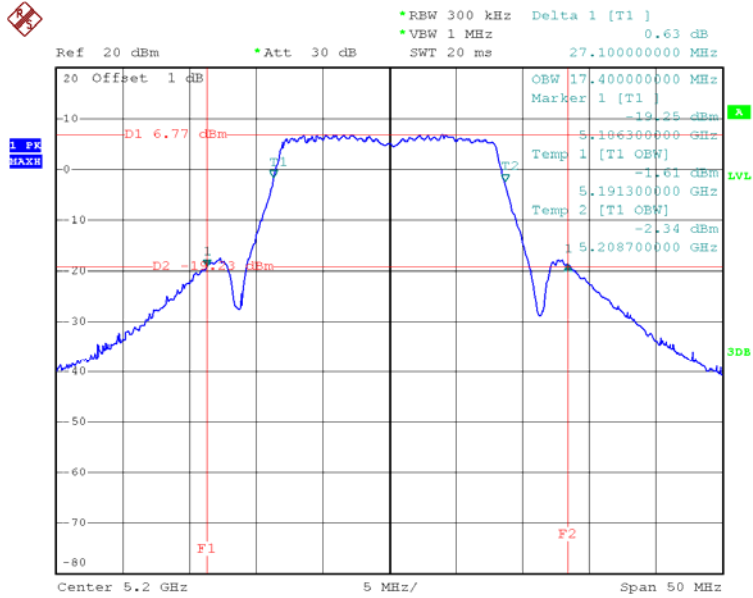

Date: 1.NOV.2013 13:49:07

CH48

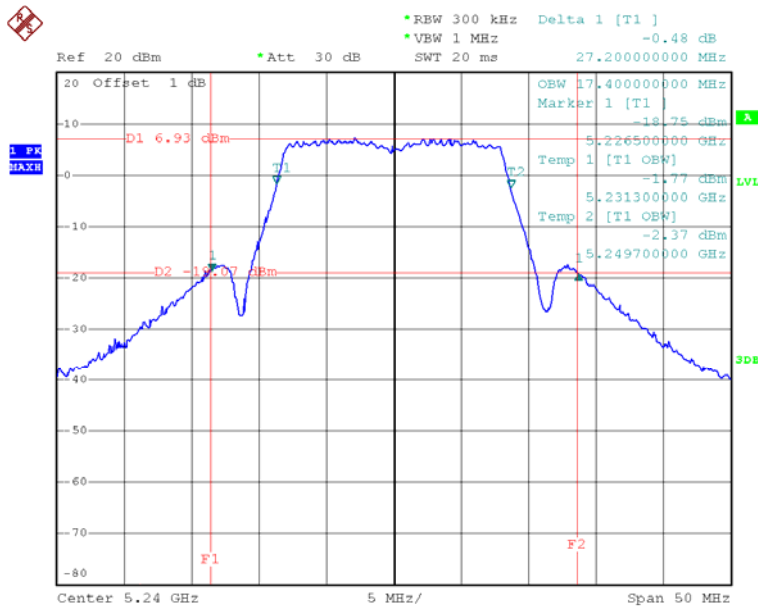


Date: 1.NOV.2013 13:51:47



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode /CH36, CH40, CH48		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	27.20	18.30
CH40	5200	27.40	18.40
CH48	5240	27.20	18.30

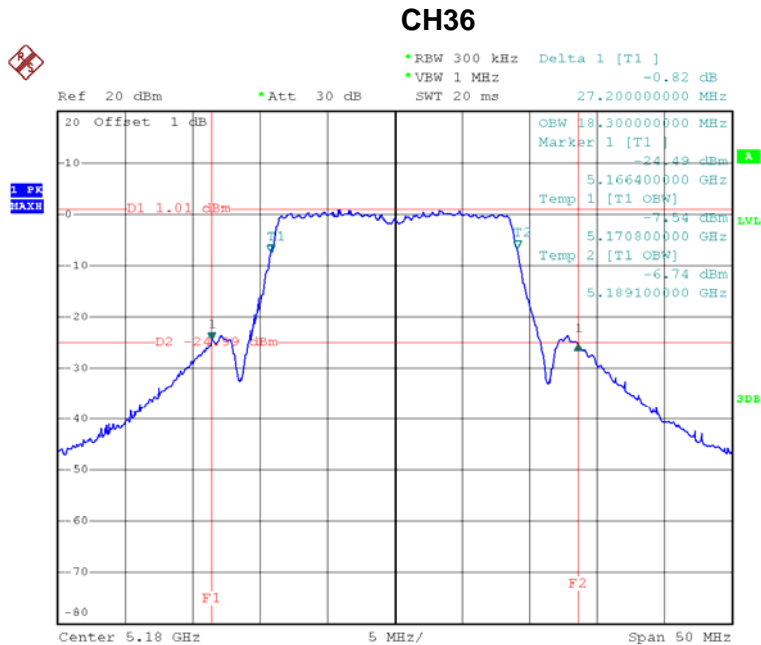

Date: 2.NOV.2013 10:24:57




CH40

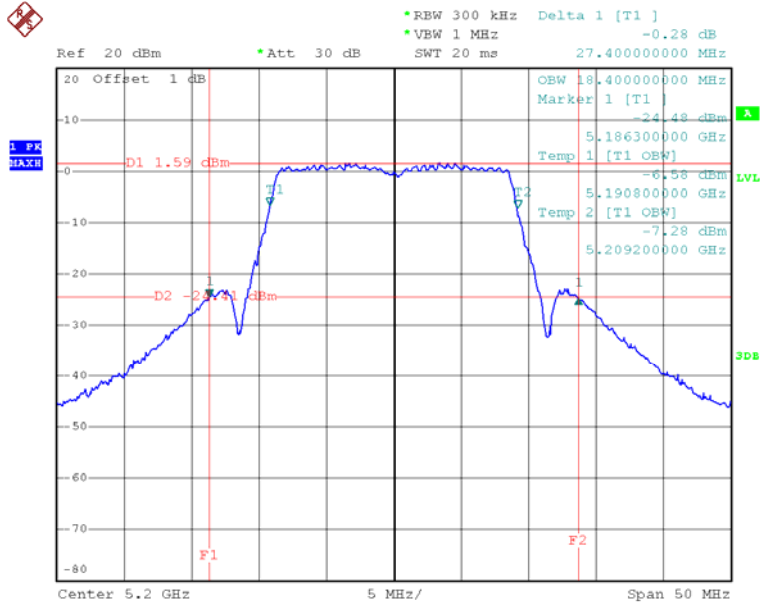

Date: 2.NOV.2013 10:27:12

CH48

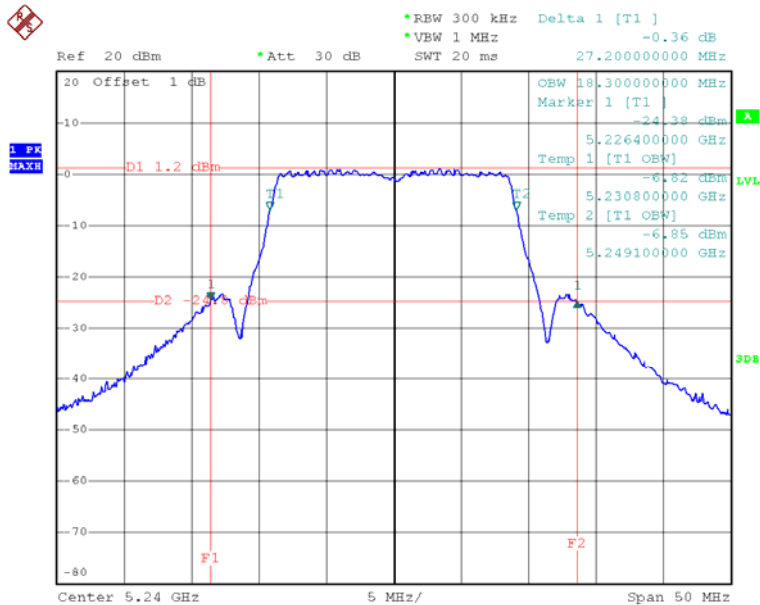


Date: 2.NOV.2013 10:29:00



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode /CH38, CH46		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.00	36.40
CH46	5230	39.80	36.40

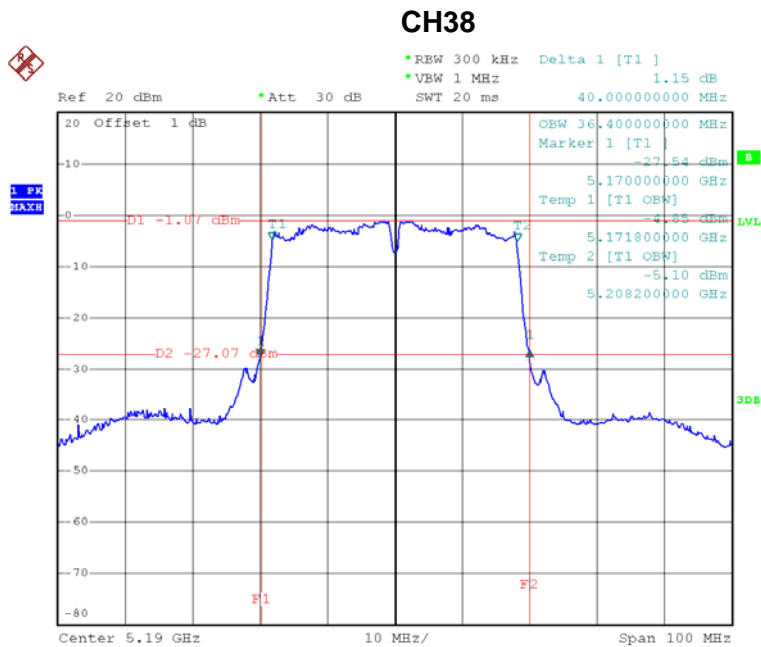

Date: 2.NOV.2013 11:00:06



CH46

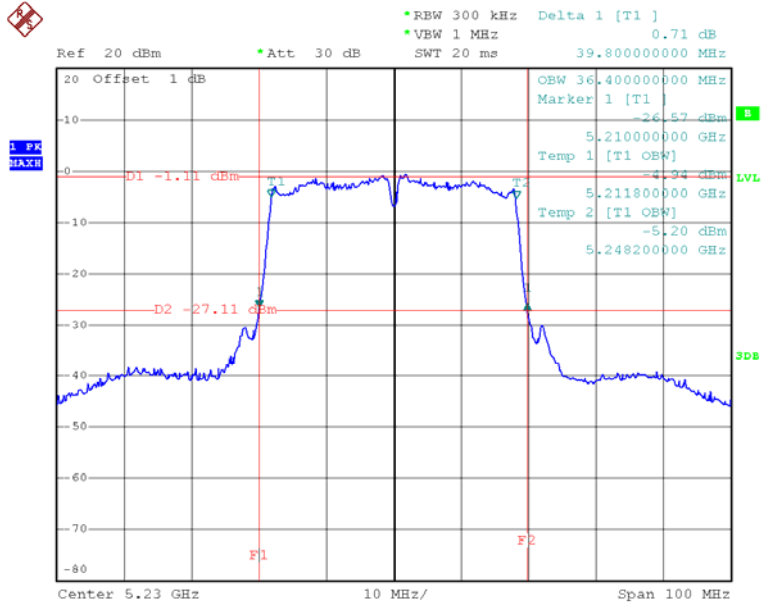

Date: 2.NOV.2013 11:01:07



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Frequency Range (MHz)	Limit	Result
Conducted Output Power	5150 - 5250	not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B,	PASS

Note: where “B” is the 26 dB emissions bandwidth in MHz.

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2013

Remark: “N/A” denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

6.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto


- b. Test was performed in accordance with method of KDB 789033 D01.



6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP



6.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.6 TEST RESULTS

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		


Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	14.66	17.00	0.0501
CH40	5200	14.85	17.00	0.0501
CH48	5240	15.04	17.00	0.0501

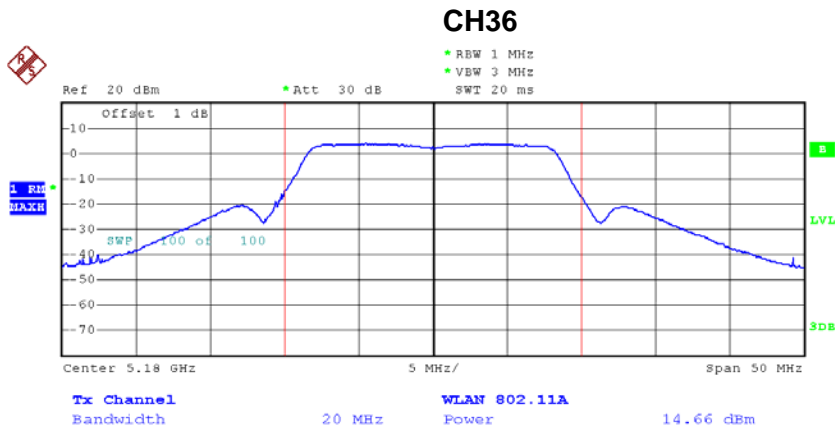

Date: 30.OCT.2013 23:33:43




CH40

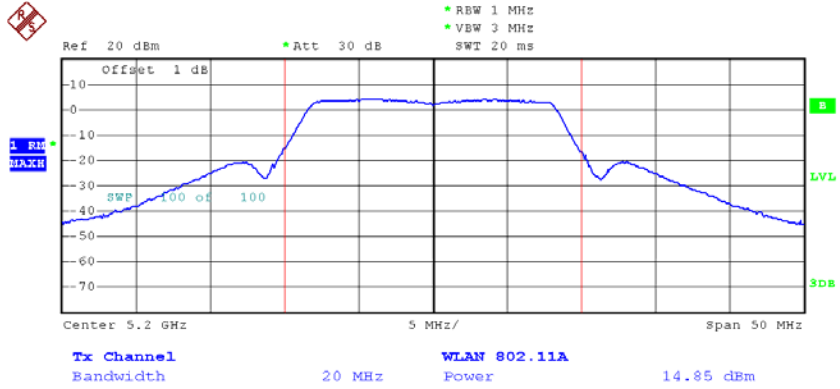

Date: 30.OCT.2013 23:33:59

CH48

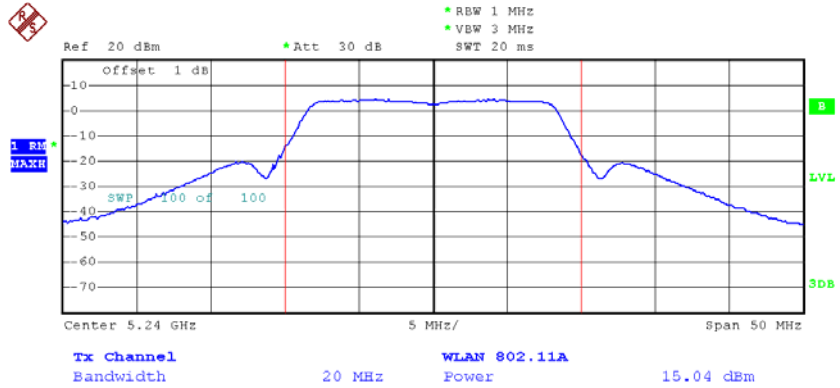


Date: 30.OCT.2013 23:34:24



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48 / ANT 0		


Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	8.72	17.00	0.0501
CH40	5200	8.64	17.00	0.0501
CH48	5240	8.54	17.00	0.0501

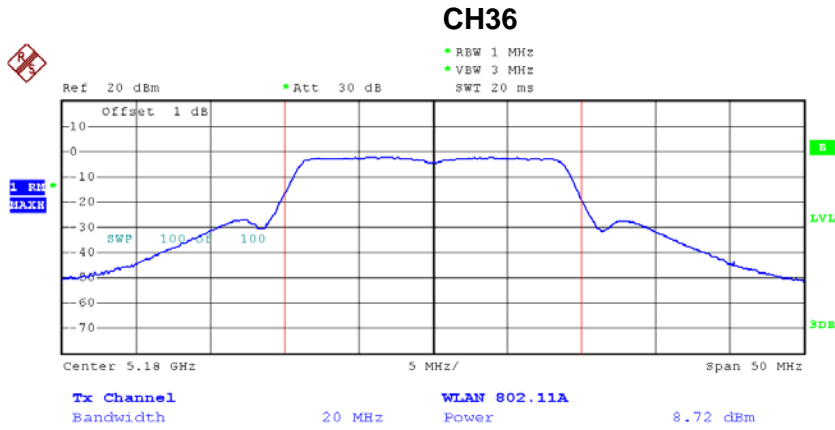

Date: 30.OCT.2013 23:36:13




CH40

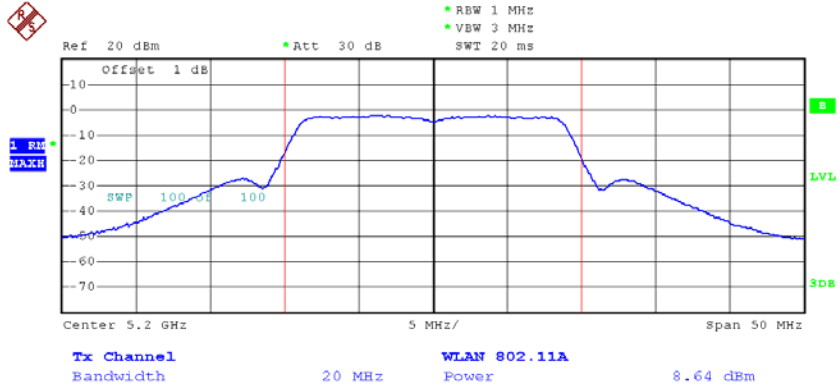

Date: 30.OCT.2013 23:36:28

CH48

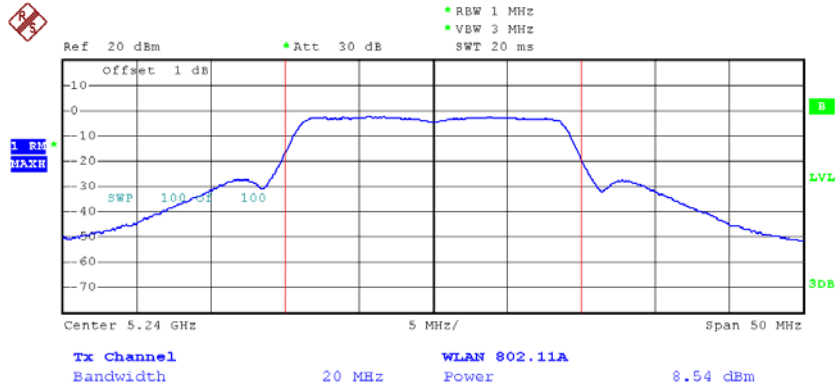


Date: 30.OCT.2013 23:36:44



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48 / ANT 1		


Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	9.26	17.00	0.0501
CH40	5200	9.39	17.00	0.0501
CH48	5240	9.41	17.00	0.0501

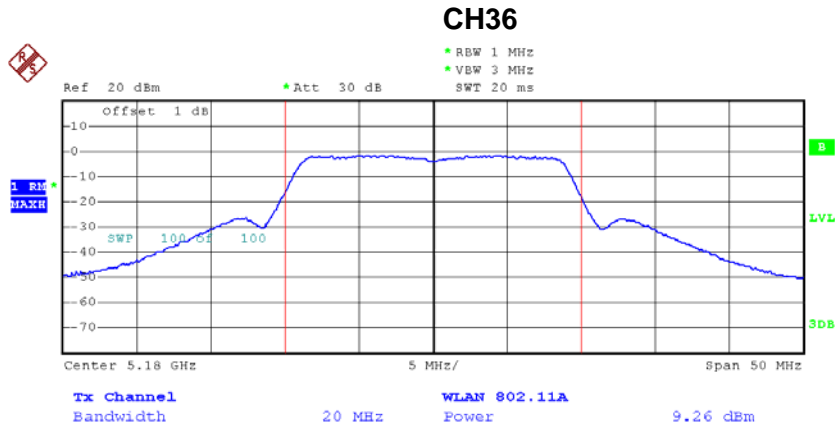

Date: 30.OCT.2013 23:35:40




CH40

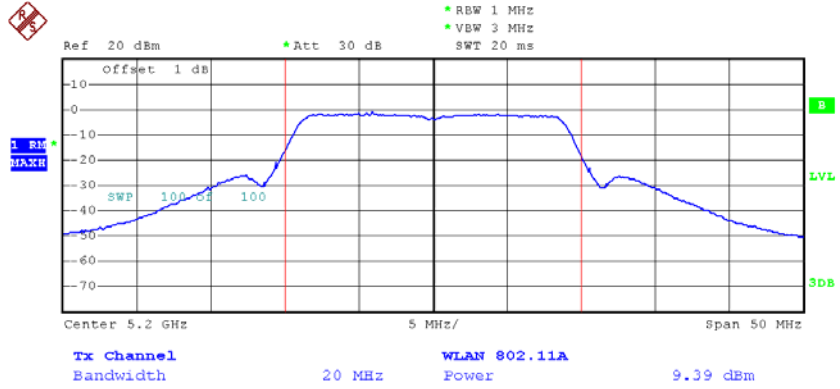

Date: 30.OCT.2013 23:35:22

CH48

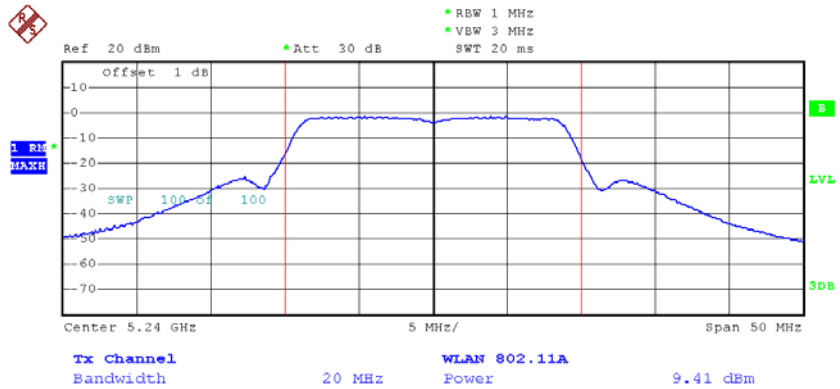


Date: 30.OCT.2013 23:35:06



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48 / ANT 2		


Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	9.26	17.00	0.0501
CH40	5200	9.42	17.00	0.0501
CH48	5240	9.47	17.00	0.0501

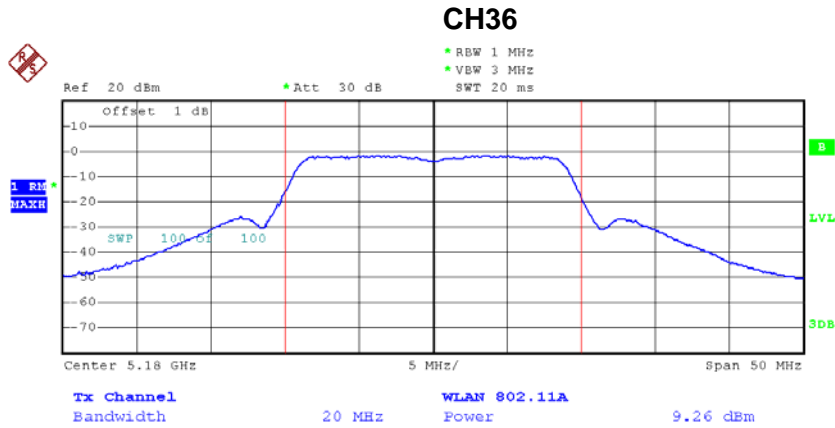

Date: 30.OCT.2013 23:37:50




CH40

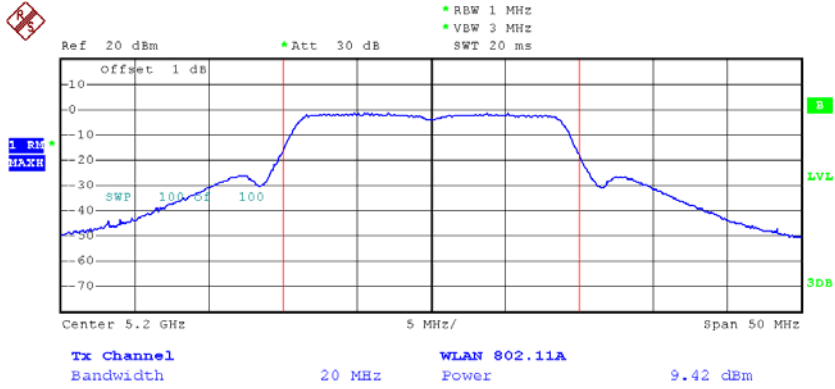

Date: 30.OCT.2013 23:37:33

CH48

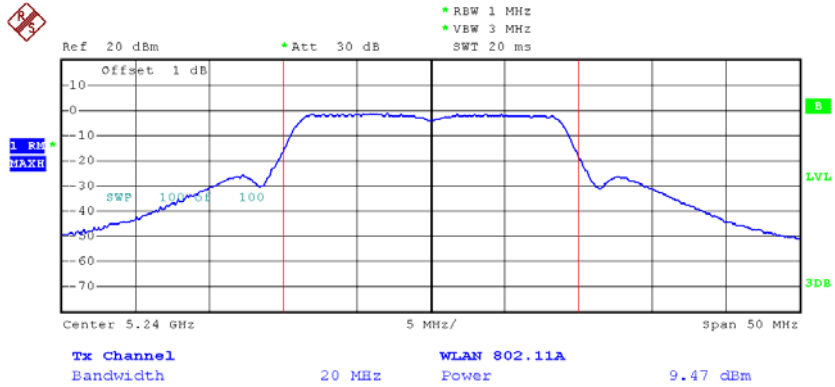

Date: 30.OCT.2013 23:37:10



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48 / ANT 0+ANT 1+ANT 2		


Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH36	5180	13.86	17.00	0.0501
CH40	5200	13.94	17.00	0.0501
CH48	5240	13.93	17.00	0.0501

Note: The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers (3T3R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}** , that is Directional gain=5dBi.




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46 / ANT 0		

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	7.84	17.00	0.0501
CH46	5230	7.89	17.00	0.0501

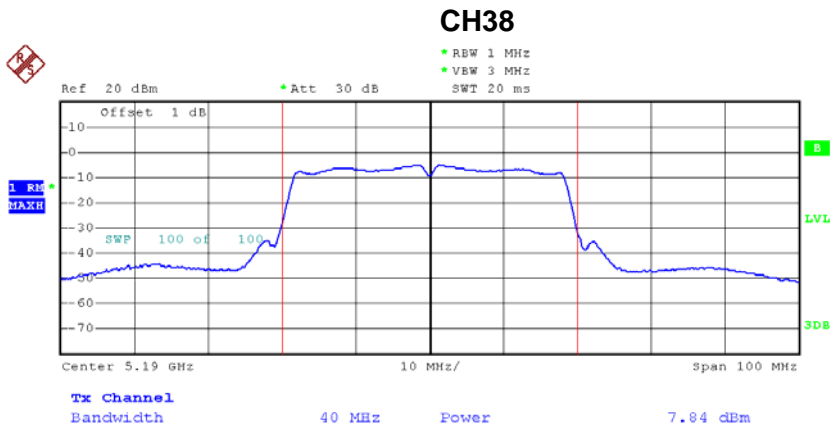

Date: 30.OCT.2013 23:28:20

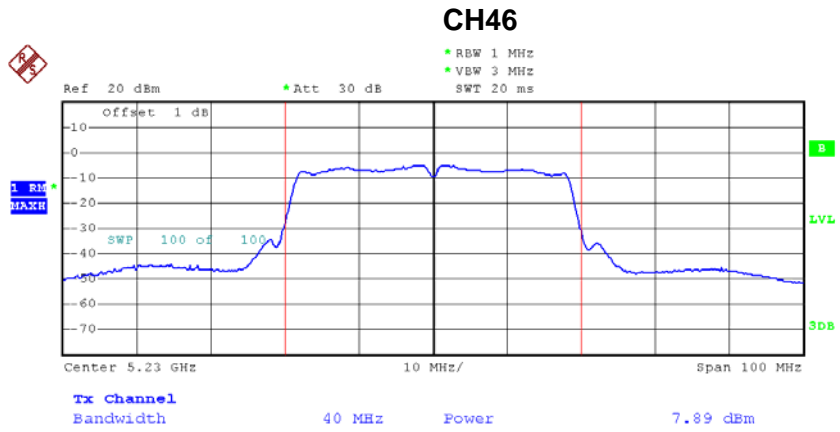


Date: 30.OCT.2013 23:29:31




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46 / ANT 1		

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	8.49	17.00	0.0501
CH46	5230	9.15	17.00	0.0501

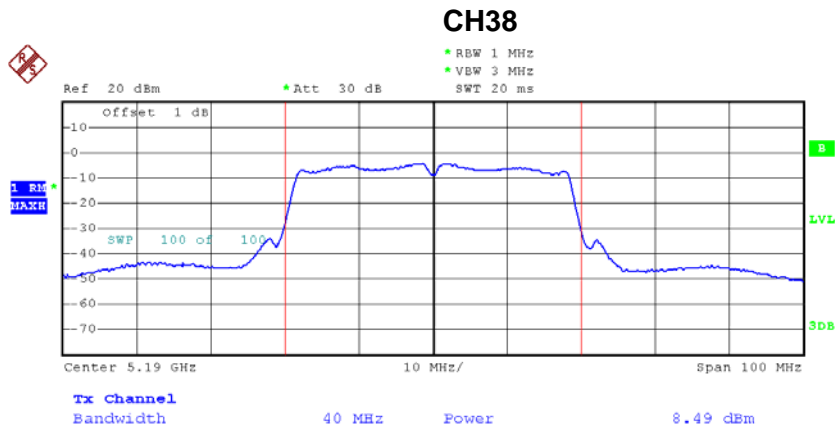

Date: 30.OCT.2013 23:31:04

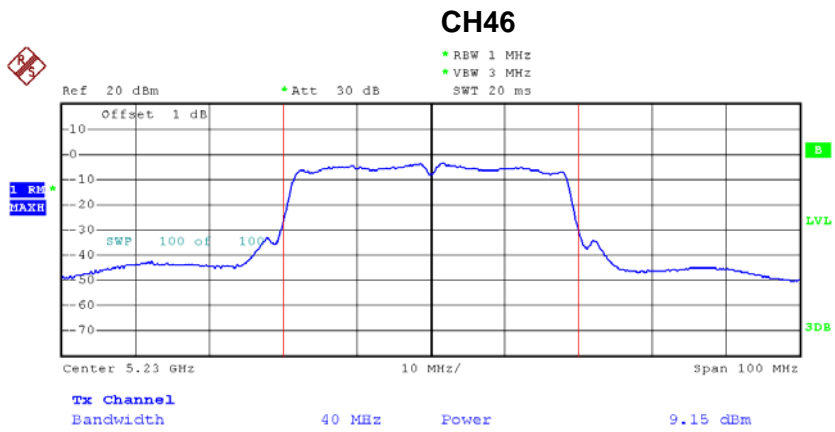


Date: 30.OCT.2013 23:30:25



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46 / ANT 2		


Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	9.13	17.00	0.0501
CH46	5230	9.18	17.00	0.0501

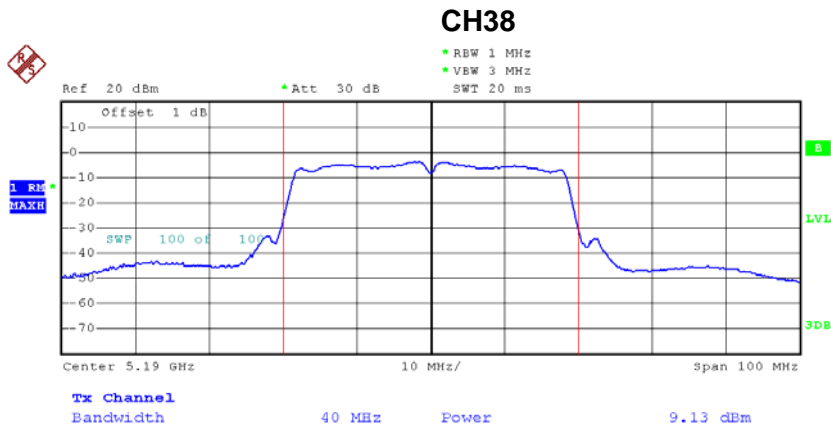

Date: 30.OCT.2013 23:27:04



CH46

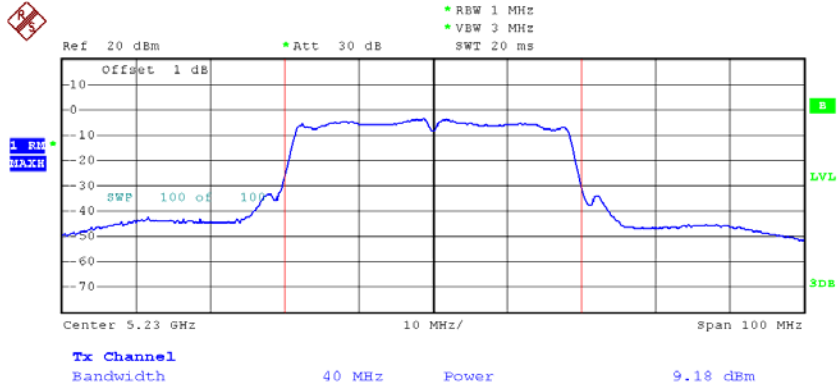

Date: 30.OCT.2013 23:26:25



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46 / ANT 0+ANT 1+ANT 2		

Test Channel	Frequency (MHz)	Conducted Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH38	5190	13.29	17.00	0.0501
CH46	5230	13.55	17.00	0.0501

Note: The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers (3T3R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}** , that is Directional gain=5dBi.



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27 dBm/1MHz	5150 – 5250	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

7.1.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b.

Spectrum Parameter	Setting
Attenuation	Auto
RB	1000 kHz
VB	1000 kHz
Trace	Max Hold
Sweep Time	Auto

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




7.1.6 TEST RESULTS

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode/ CH36, CH40, CH48		

Channel of Worst Data: CH36			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5149.60	-30.36	5350.00	-38.98
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH36

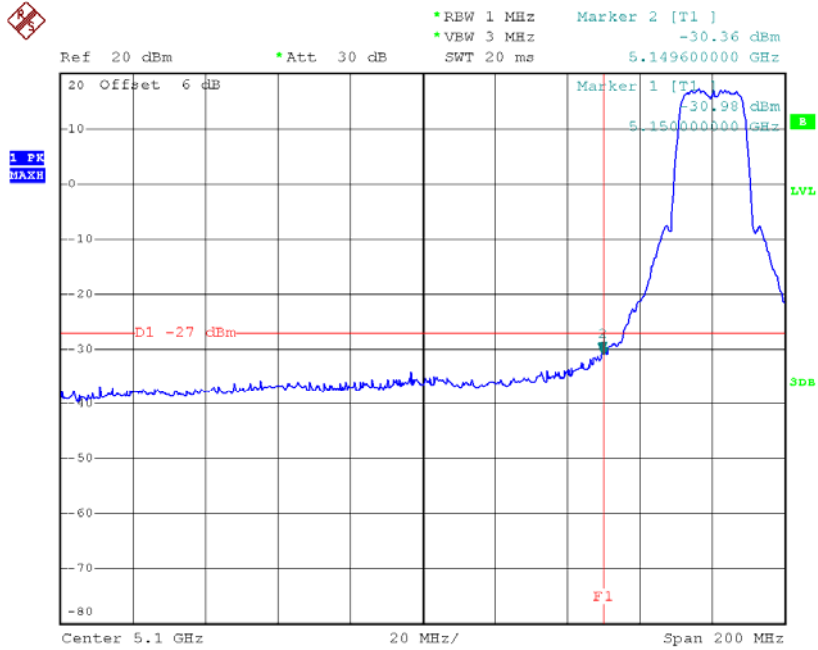

Date: 1.NOV.2013 13:25:49

TX mode CH48

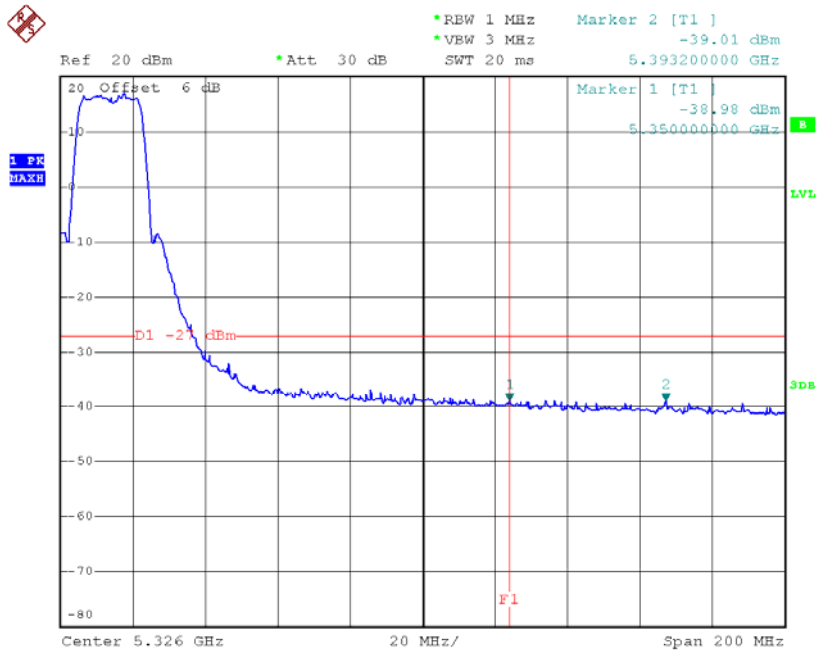

Date: 1.NOV.2013 13:27:52




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/ CH36, CH40 , CH48/ANT 0		

Channel of Worst Data: CH36			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5139.60	-36.28	5367.20	-39.81
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH36

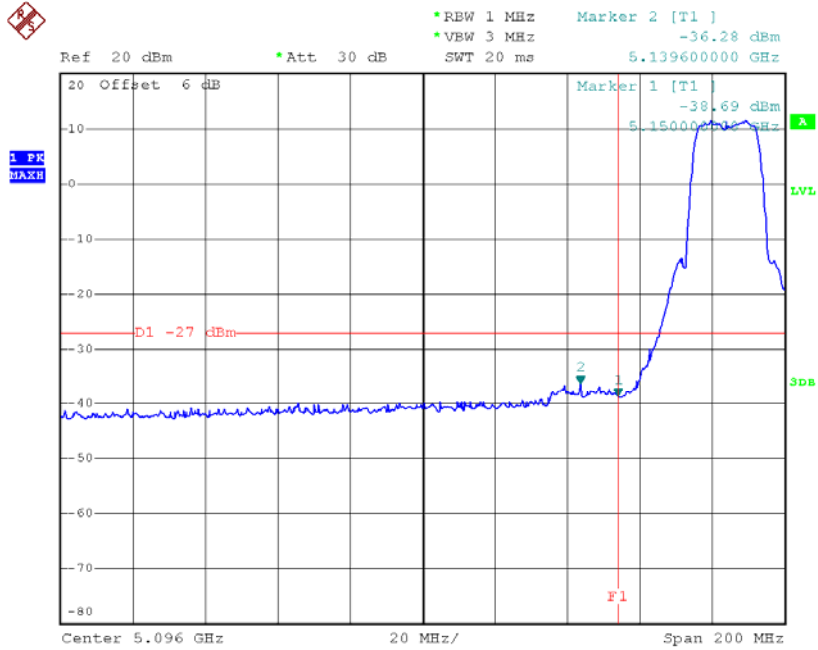

Date: 2.NOV.2013 10:41:24

TX mode CH48

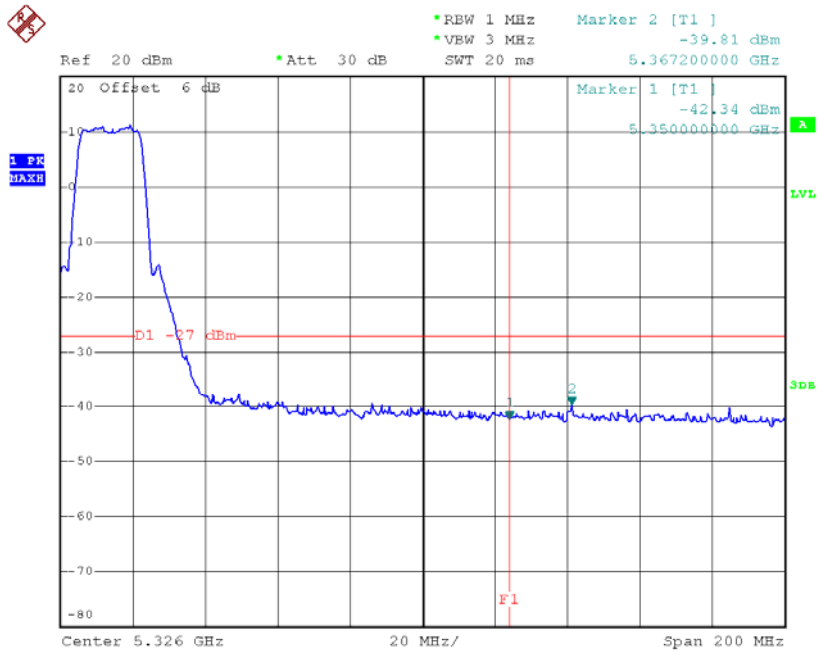

Date: 2.NOV.2013 10:42:00




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/ CH36, CH40 , CH48/ANT 1		

Channel of Worst Data: CH36			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5144.40	-37.78	5354.40	-40.64
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH36

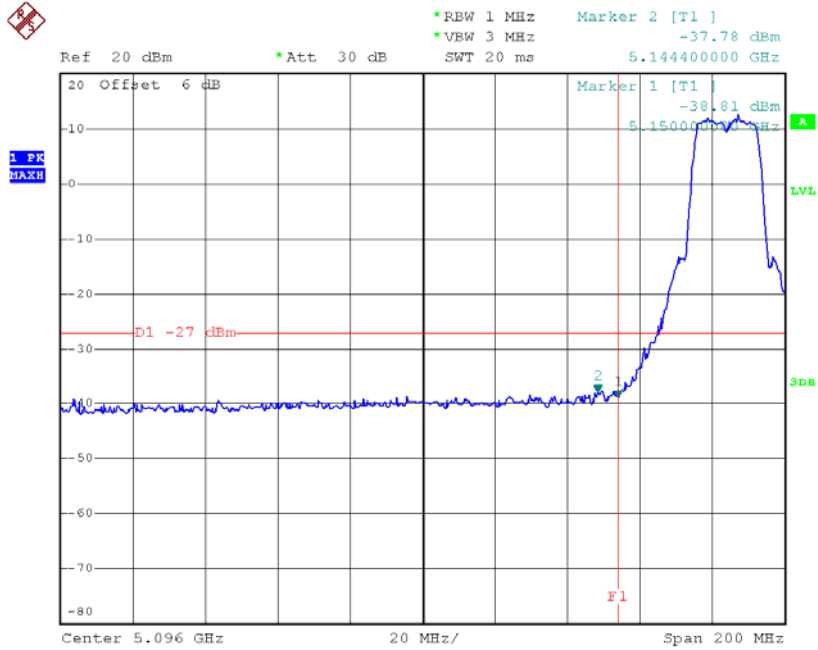

Date: 2.NOV.2013 10:43:39

TX mode CH48

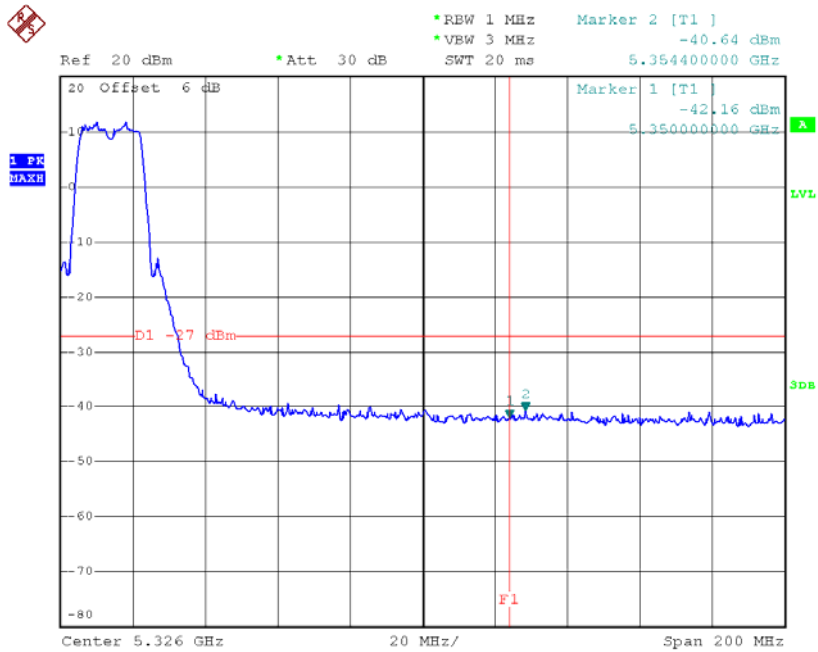

Date: 2.NOV.2013 10:43:08




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/ CH36, CH40 , CH48/ANT 2		

Channel of Worst Data: CH36			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-37.23	5392.80	-39.70
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH36

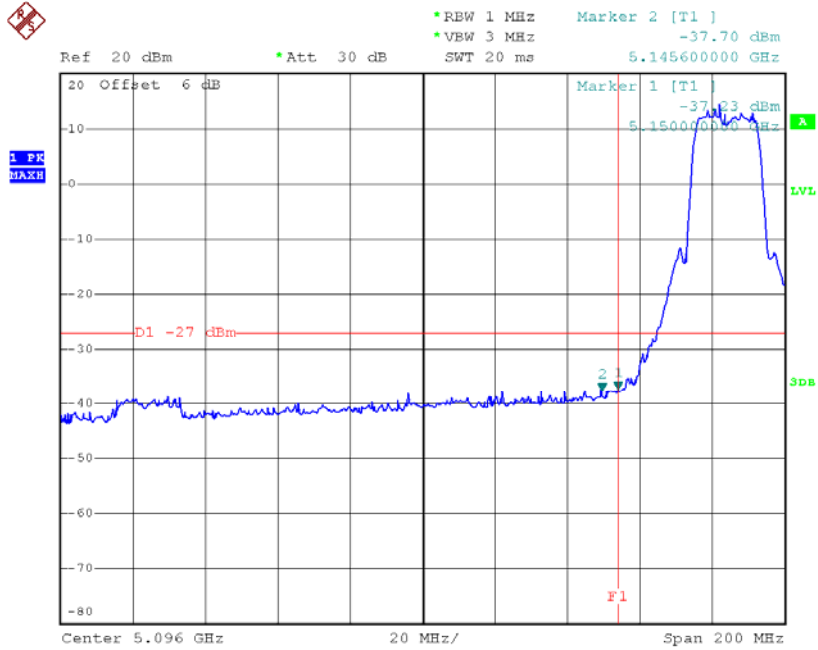

Date: 2.NOV.2013 10:44:48

TX mode CH48

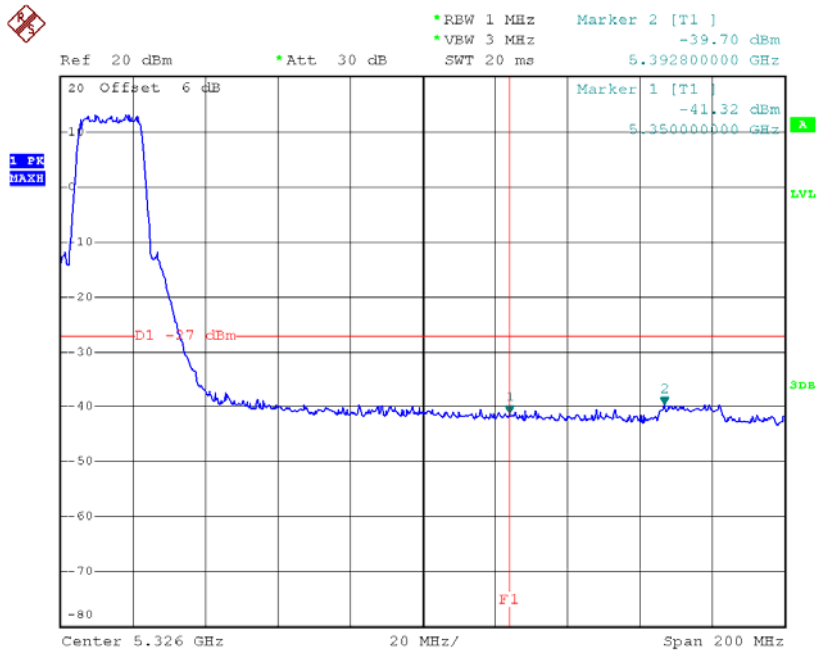

Date: 2.NOV.2013 10:46:55




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/ CH38, CH46/ANT 0		

Channel of Worst Data: CH38			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5147.60	-29.96	5382.80	-39.65
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH38

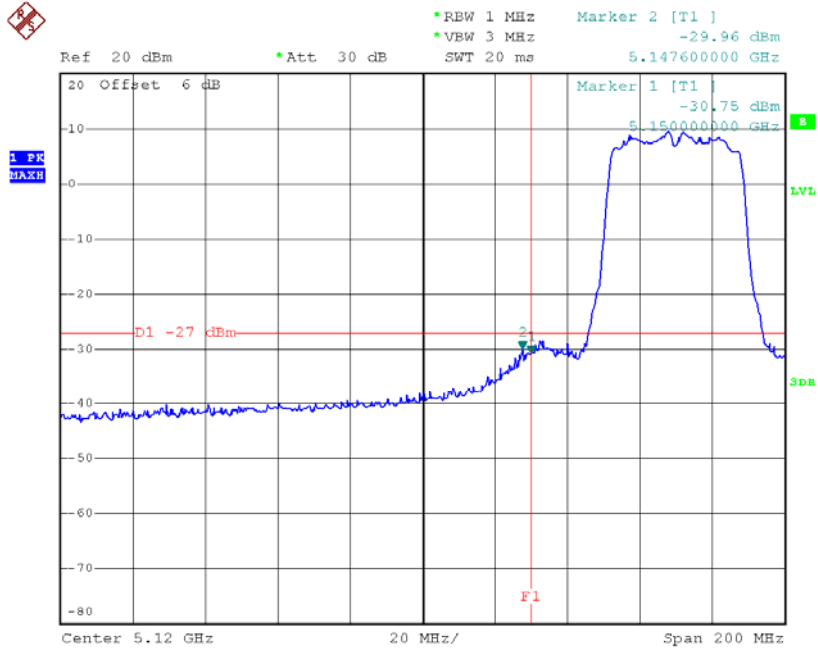

Date: 2.NOV.2013 11:05:21

TX mode CH46

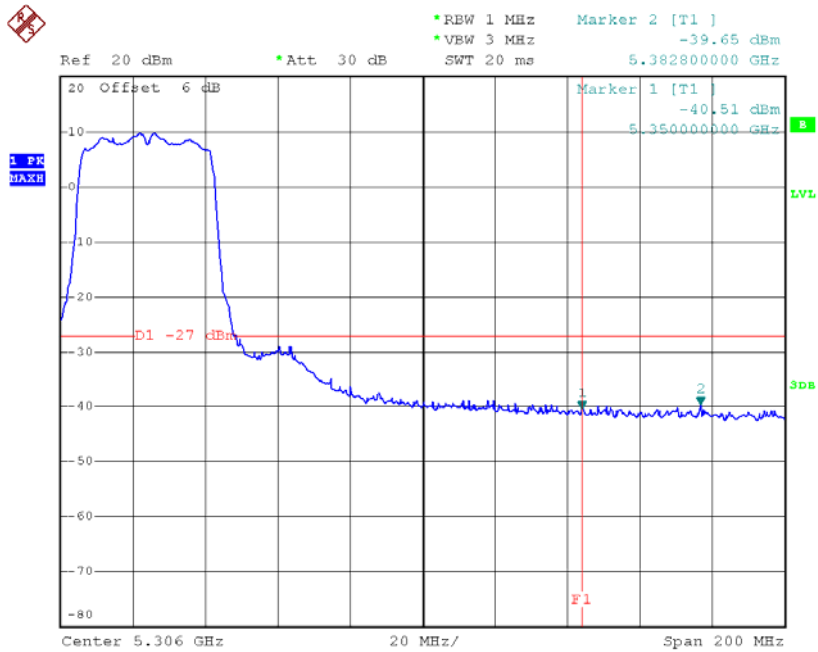

Date: 2.NOV.2013 11:04:14




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/ CH38, CH46/ANT 1		

Channel of Worst Data: CH38			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-29.68	5370.80	-40.19
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH38

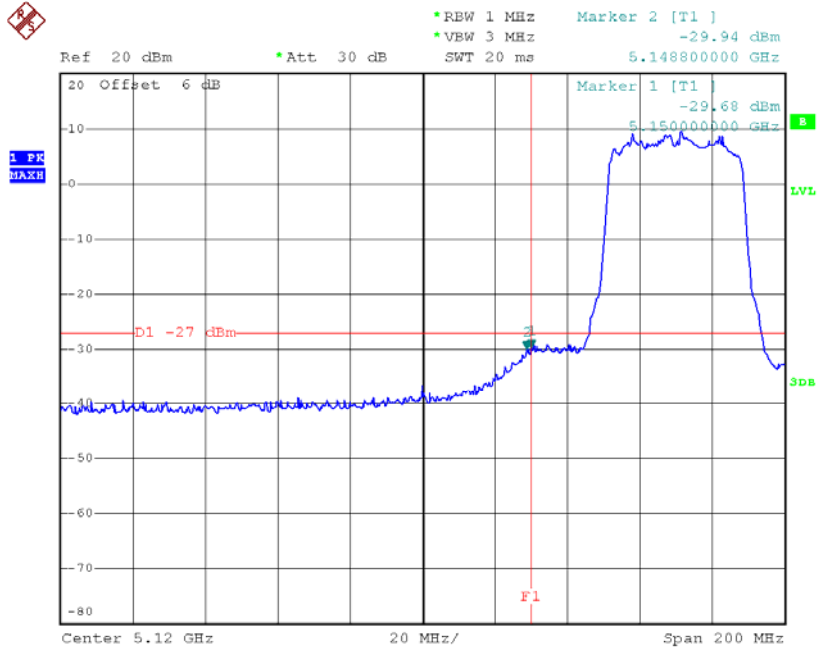

Date: 2.NOV.2013 11:10:48

TX mode CH46

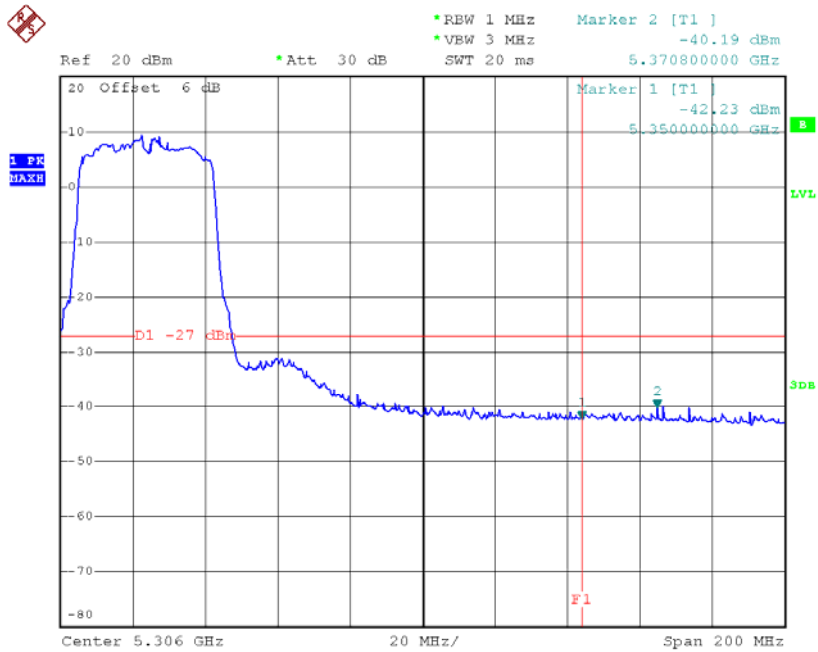

Date: 2.NOV.2013 11:12:34




EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/ CH38, CH46/ANT 2		

Channel of Worst Data: CH38			
The max. radio frequency power in any 1000kHz bandwidth outside the frequency band		The max. radio frequency power in any 1000kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-29.56	5387.20	-40.22
Limit: -27 dBm/1MHz		Result:PASS	
Measurement method: S.A Read value+Ant gain+cable loss			




TX mode CH38

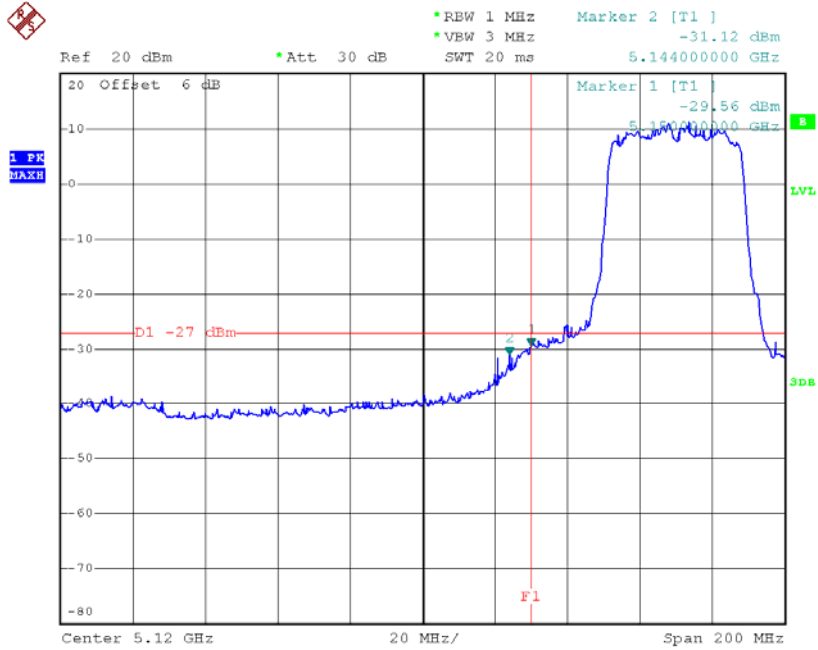

Date: 2.NOV.2013 11:14:21

TX mode CH46

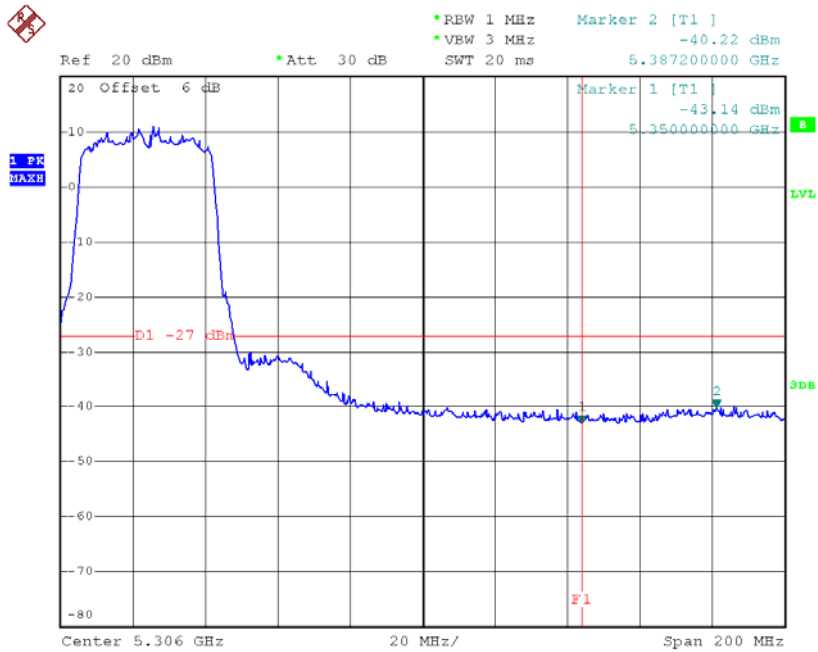

Date: 2.NOV.2013 11:13:21



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	4 dBm	5150 - 5250	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

8.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	= 1 MHz.
VB	≥ 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP



8.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.1.6 TEST RESULTS

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	3.49	4.00
CH40	5200	3.54	4.00
CH48	5240	3.45	4.00

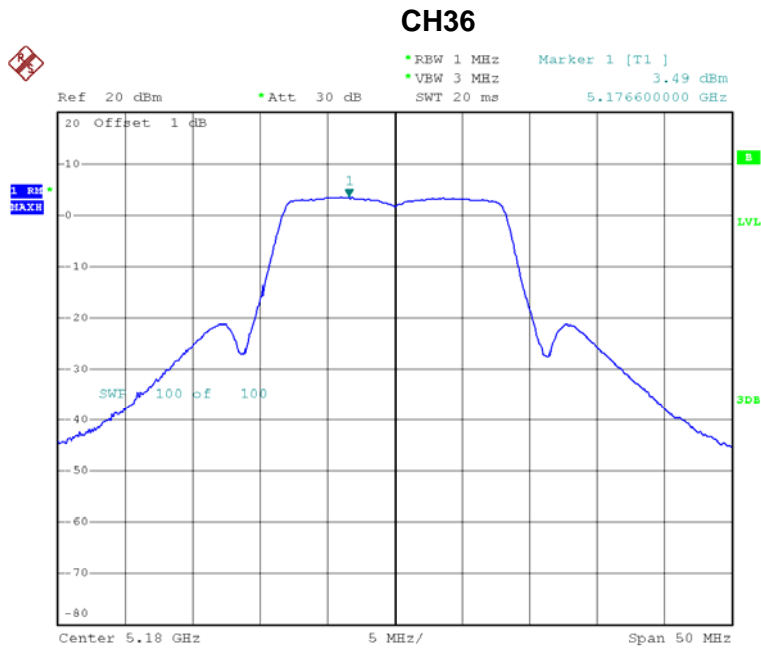

Date: 1.NOV.2013 13:46:00




CH40

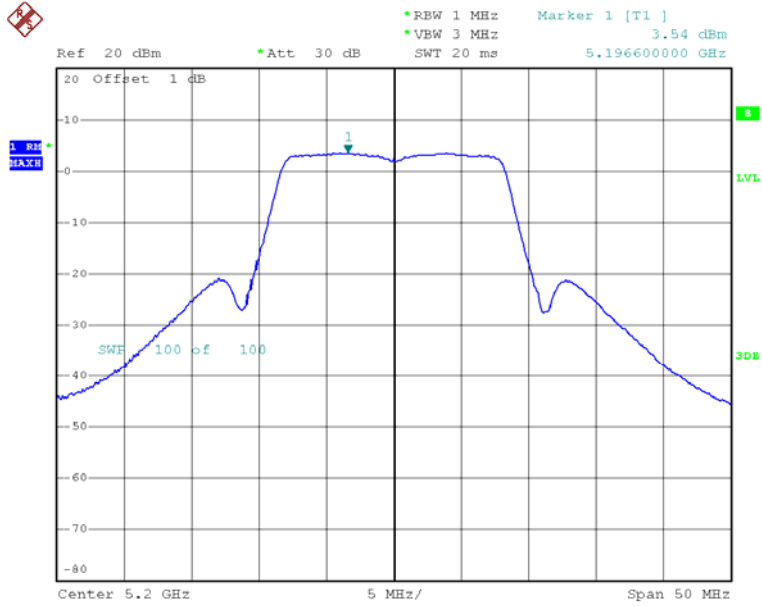

Date: 1.NOV.2013 13:49:46

CH48

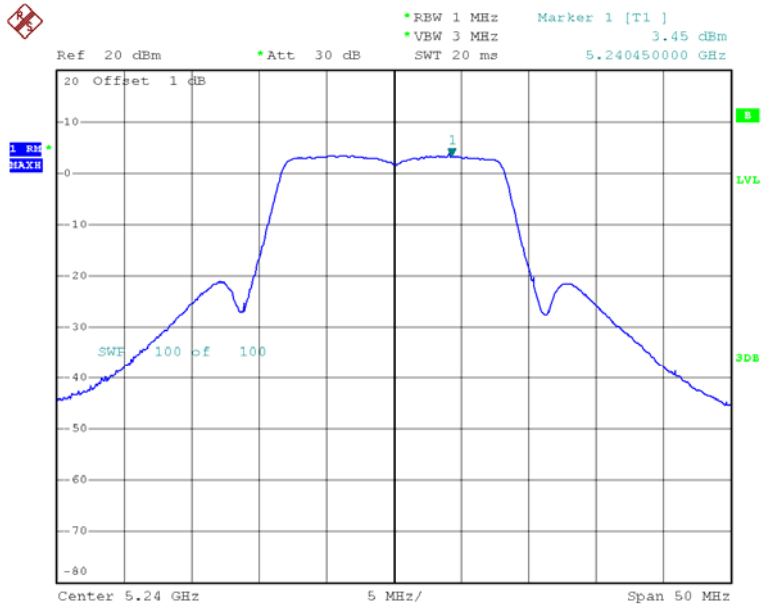


Date: 1.NOV.2013 13:52:13



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48/ ANT 0		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	-2.23	4.00
CH40	5200	-1.60	4.00
CH48	5240	-1.83	4.00

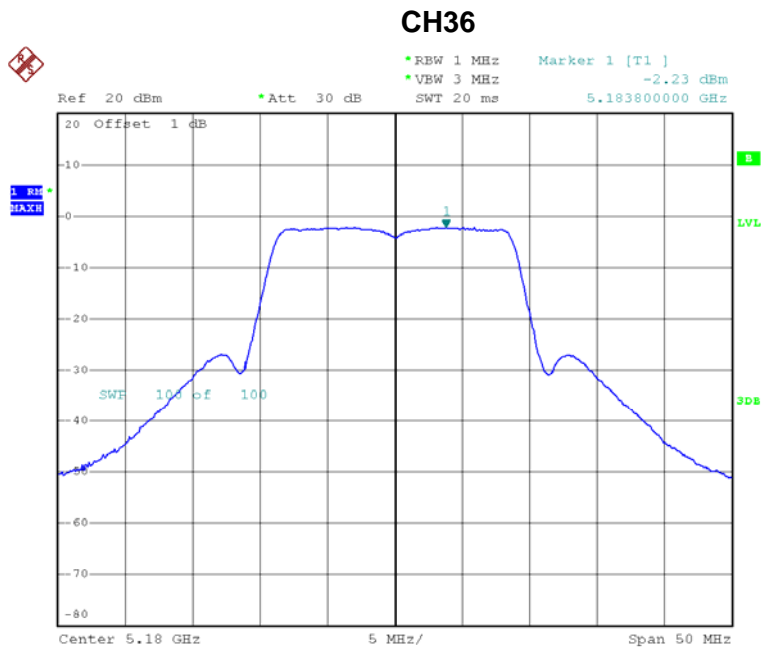

Date: 2.NOV.2013 10:25:07




CH40

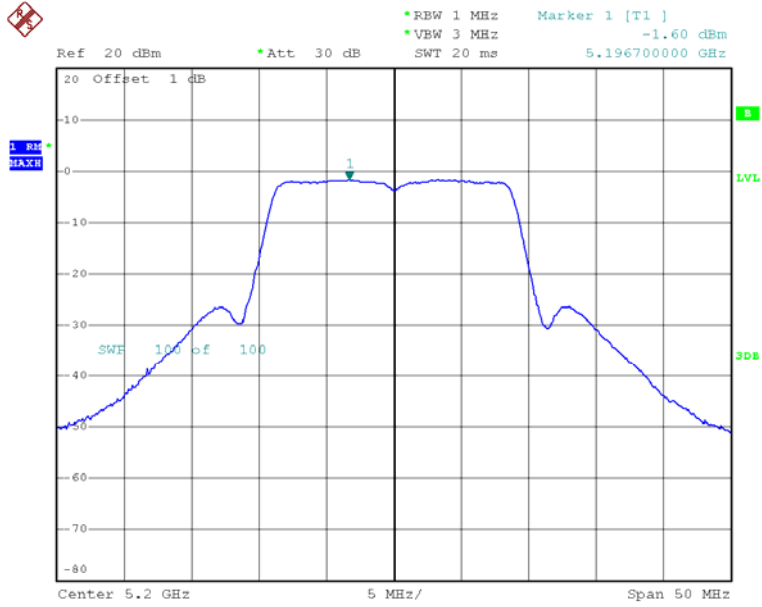

Date: 2.NOV.2013 10:27:25

CH48

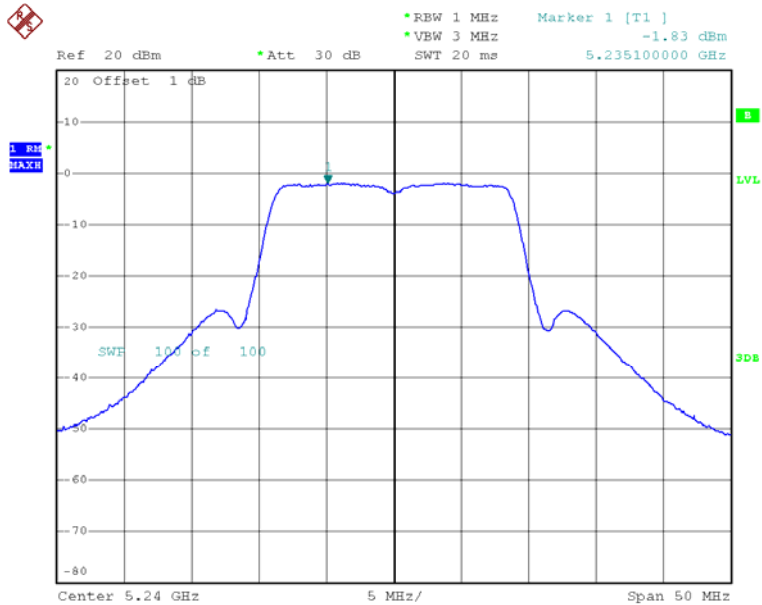


Date: 2.NOV.2013 10:29:14



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48/ ANT 1		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	-1.26	4.00
CH40	5200	-1.03	4.00
CH48	5240	-1.51	4.00

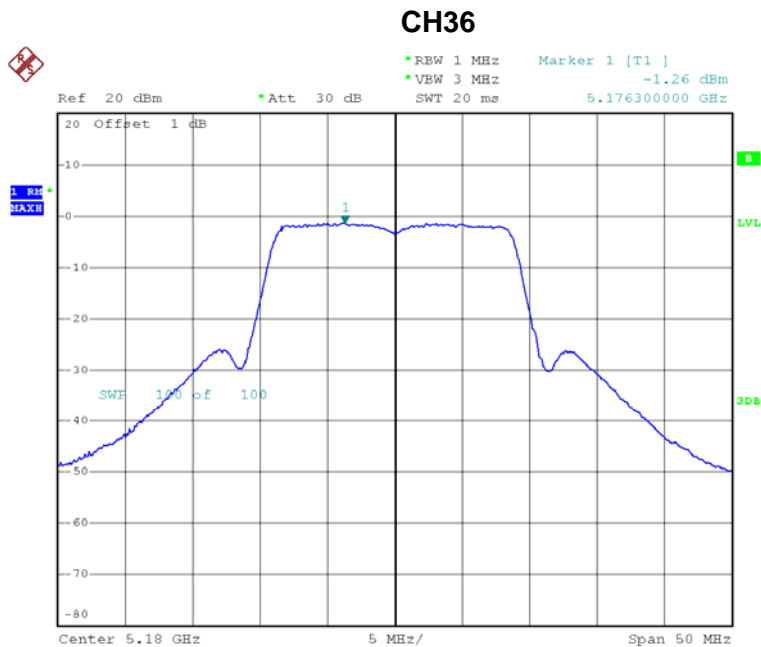

Date: 2.NOV.2013 10:10:11




CH40

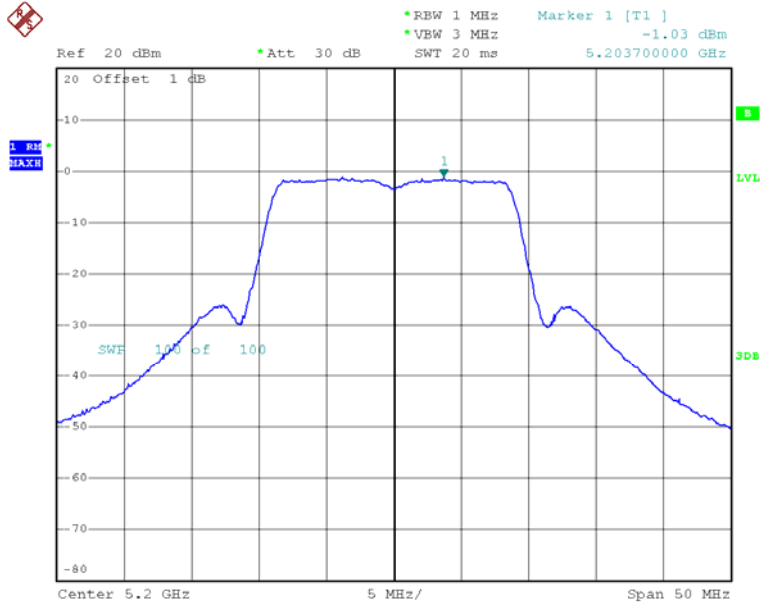

Date: 2.NOV.2013 10:12:41

CH48

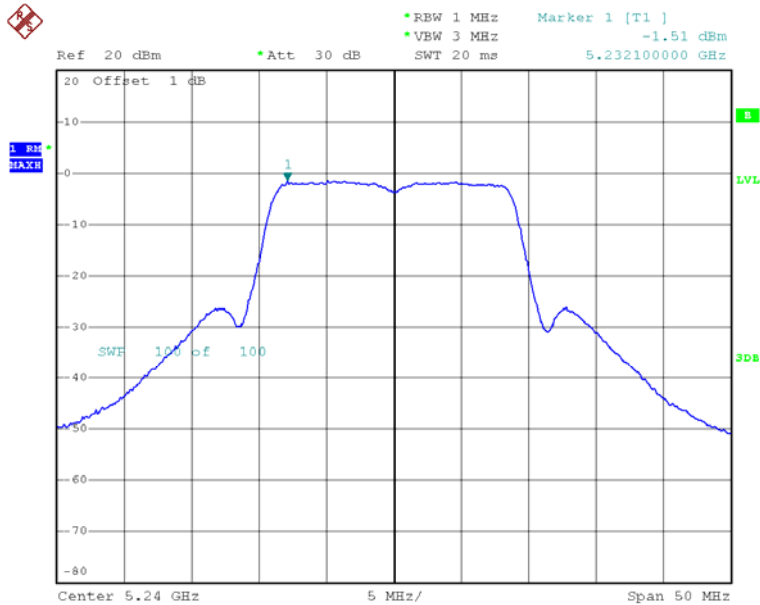


Date: 2.NOV.2013 10:14:57



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48/ ANT 2		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	-0.45	4.00
CH40	5200	-0.33	4.00
CH48	5240	-0.64	4.00

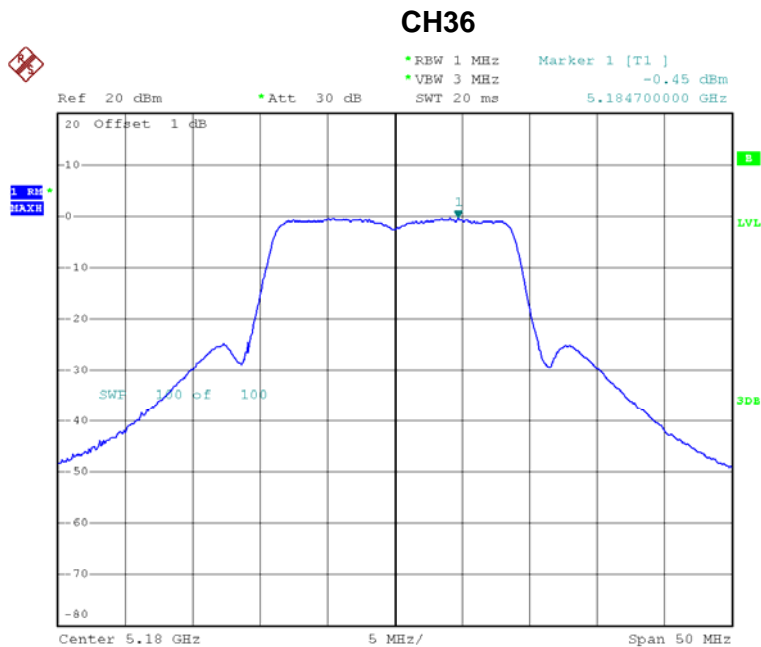

Date: 2.NOV.2013 10:21:29




CH40

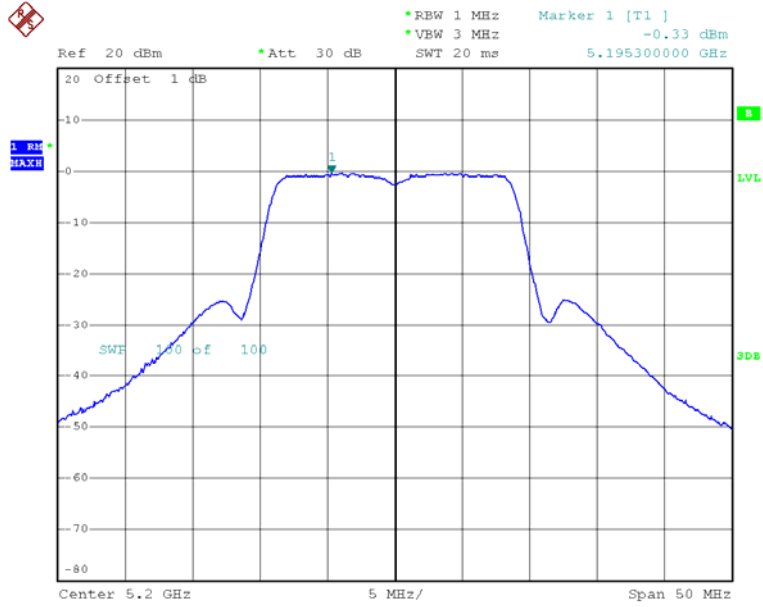

Date: 2.NOV.2013 10:20:28

CH48

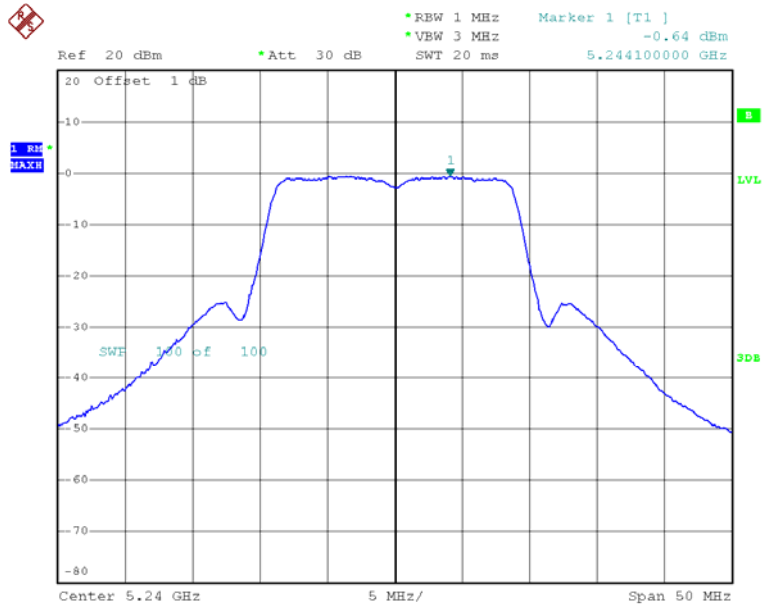

Date: 2.NOV.2013 10:19:09



Neutron Engineering Inc.

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48/ ANT 0+ANT 1+ANT 2		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH36	5180	3.52	4.00
CH40	5200	3.82	4.00
CH48	5240	3.47	4.00

Note: The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers (3T3R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}** , that is Directional gain=5dBi.



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46/ ANT 0		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH38	5190	-3.43	4.00
CH46	5230	-3.34	4.00

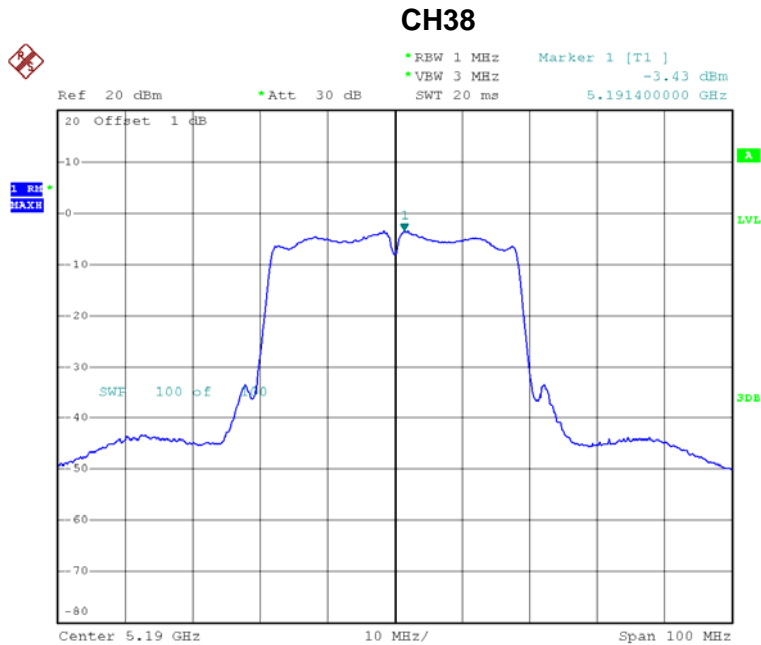

Date: 2.NOV.2013 11:00:15



CH46

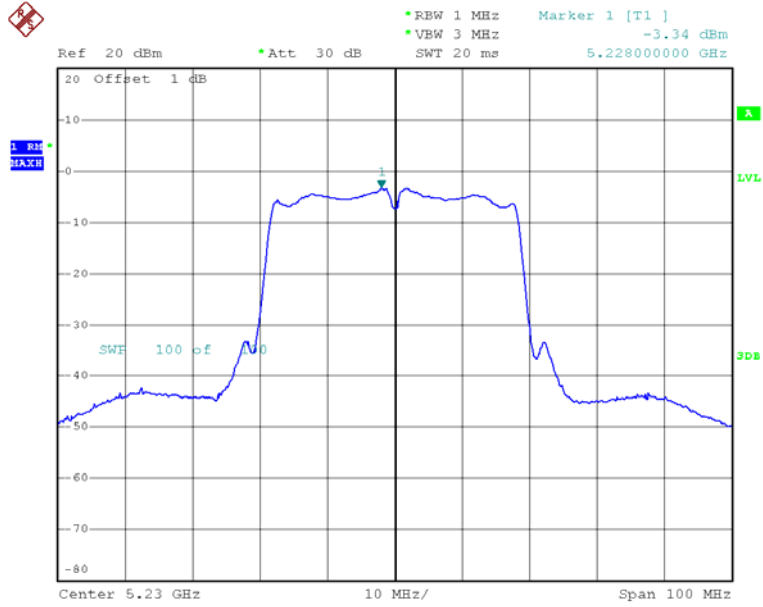


Date: 2.NOV.2013 11:01:22



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46/ ANT 1		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH38	5190	-4.68	4.00
CH46	5230	-4.74	4.00

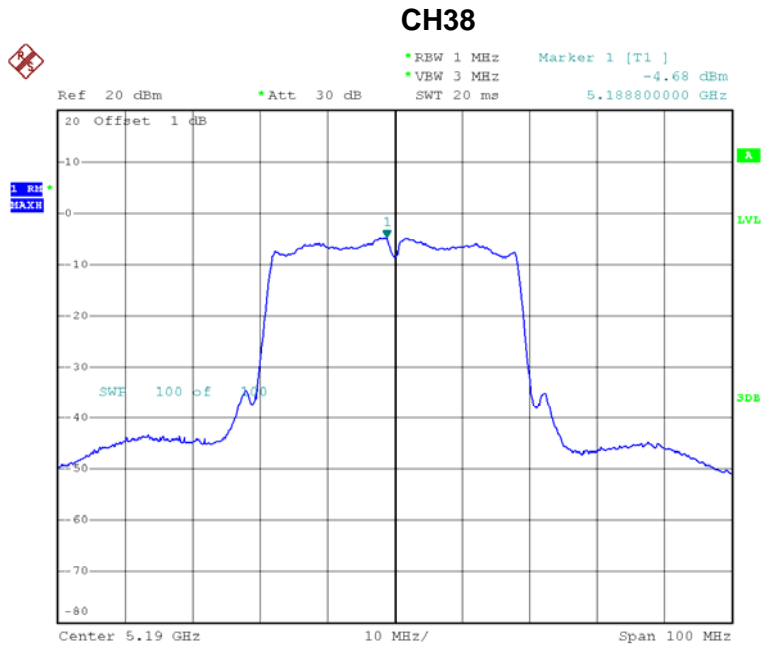

Date: 2.NOV.2013 10:54:52



CH46

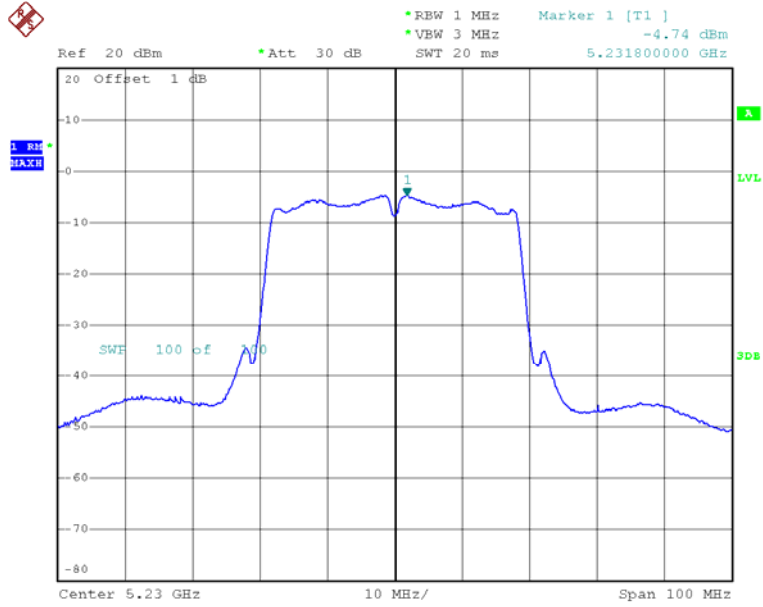


Date: 2.NOV.2013 10:54:36



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46/ ANT 2		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH38	5190	-3.33	4.00
CH46	5230	-3.40	4.00

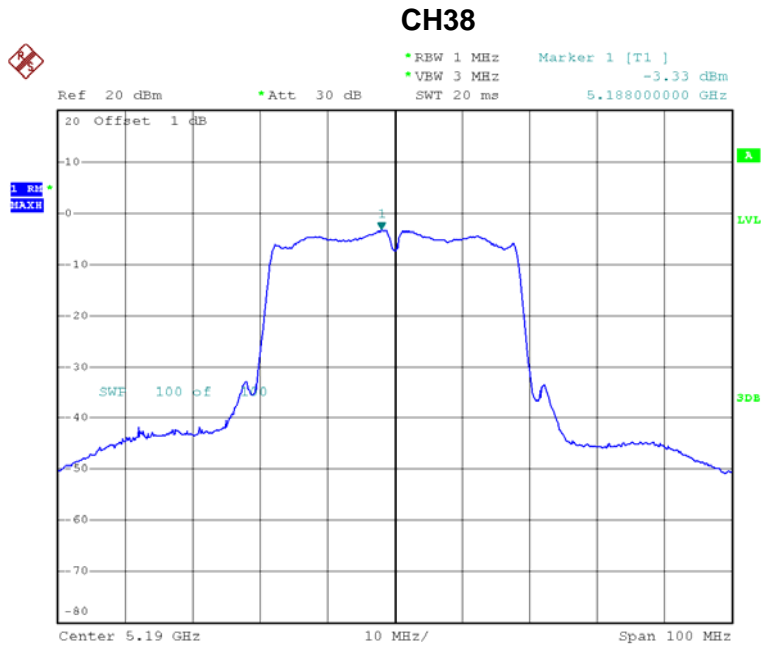

Date: 2.NOV.2013 10:51:24



CH46

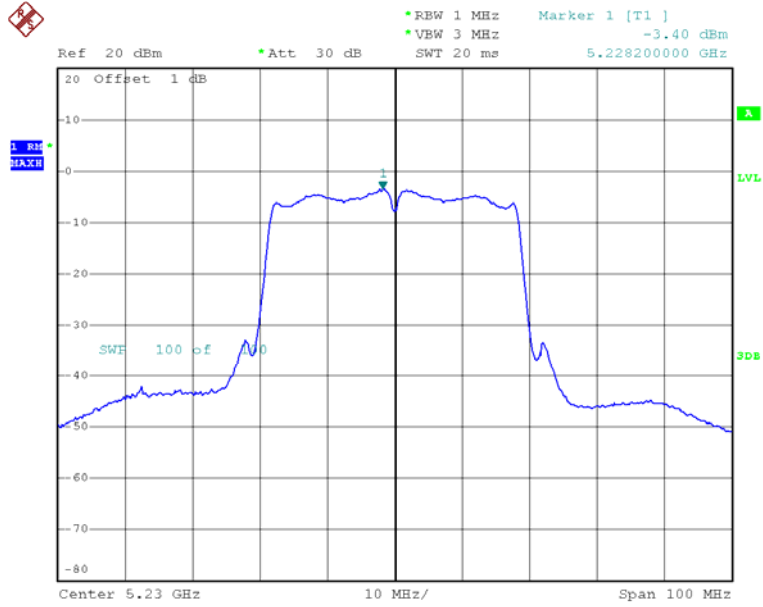

Date: 2.NOV.2013 10:52:25



Neutron Engineering Inc.

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 ° C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46/ ANT 0+ANT 1+ANT 2		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH38	5190	0.95	4.00
CH46	5230	0.96	4.00

Note: The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers (3T3R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}** , that is Directional gain=5dBi.



9. PEAK EXCURSION MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Excursion Measurement	13 dB	5150 - 5250	PASS

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

9.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 3000 kHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Max Hold
Sweep Time	60s

c. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and maxhold settings.

d. Average Trace: set RBW = 1 MHz, VBW = 3 MHz with RMS detector and trace average across 100 traces in power averaging mode.

9.1.3 DEVIATION FROM STANDARD

No deviation.



9.1.4 TEST SETUP



9.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.1.6 TEST RESULTS

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode/CH36, CH40, CH48		


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH36	5180	8.78	13
CH40	5200	8.54	13
CH48	5240	8.21	13

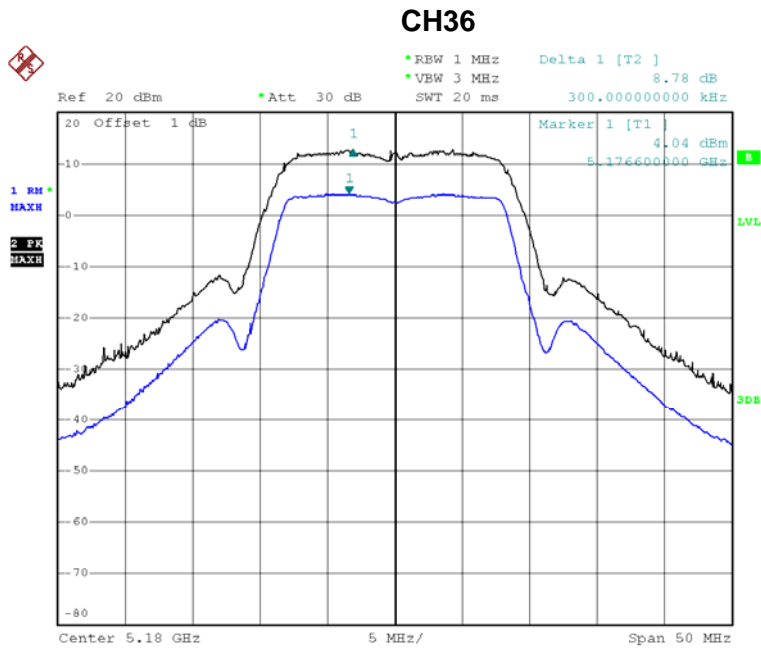

Date: 1.NOV.2013 13:39:42




CH40

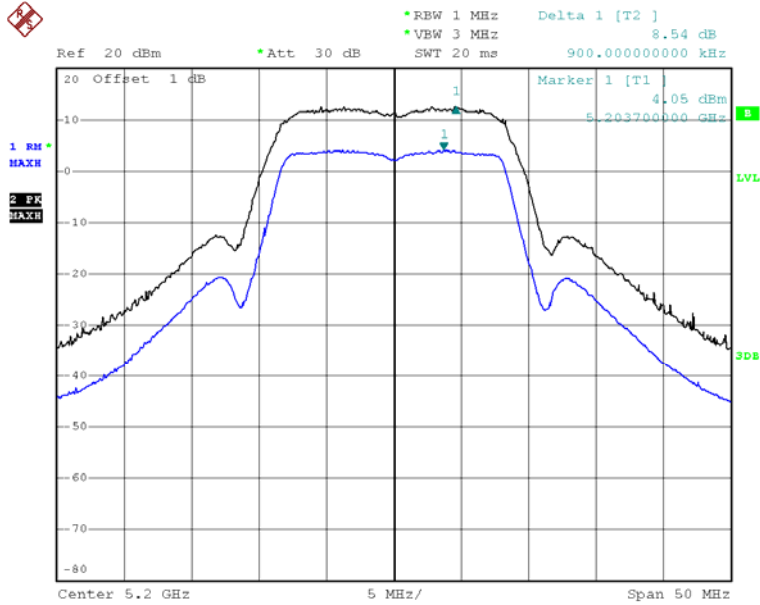

Date: 1.NOV.2013 13:38:57

CH48

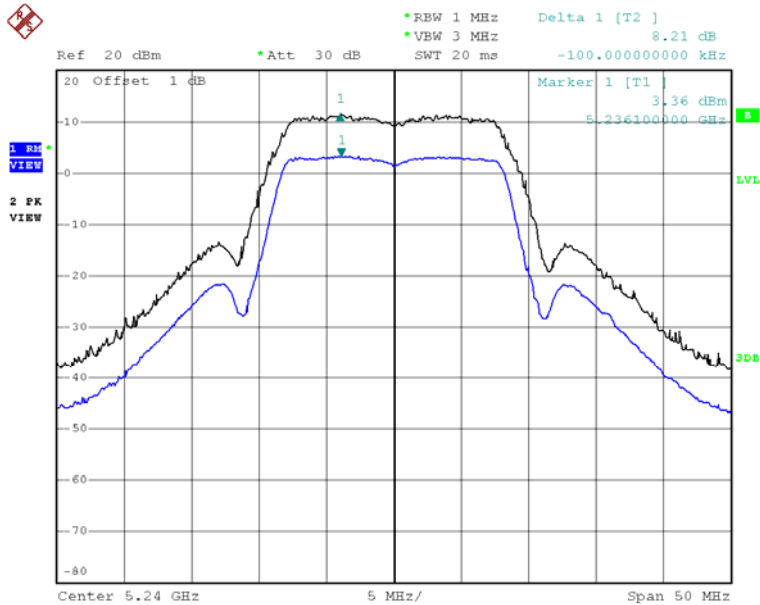


Date: 1.NOV.2013 13:36:14



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48/ANT 0		


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH36	5180	8.46	13
CH40	5200	8.60	13
CH48	5240	8.62	13

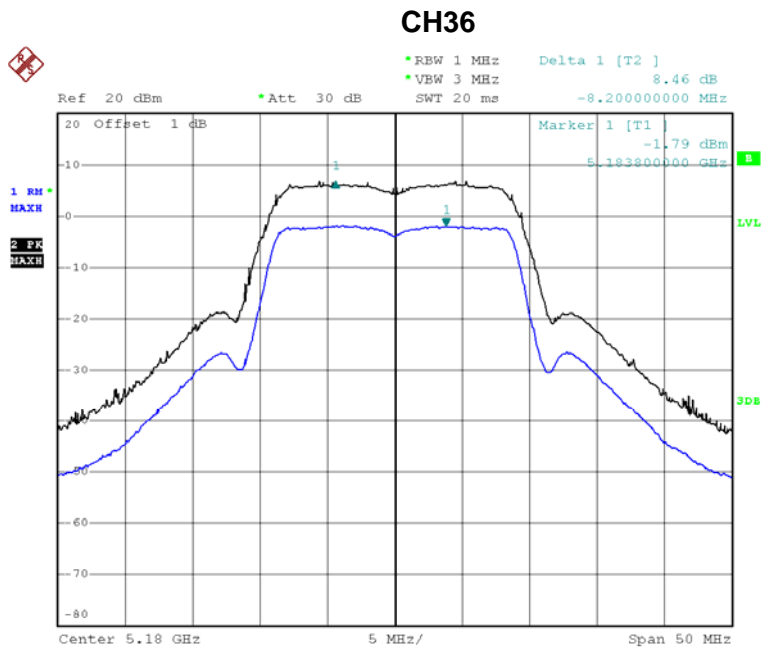

Date: 2.NOV.2013 10:32:18




CH40

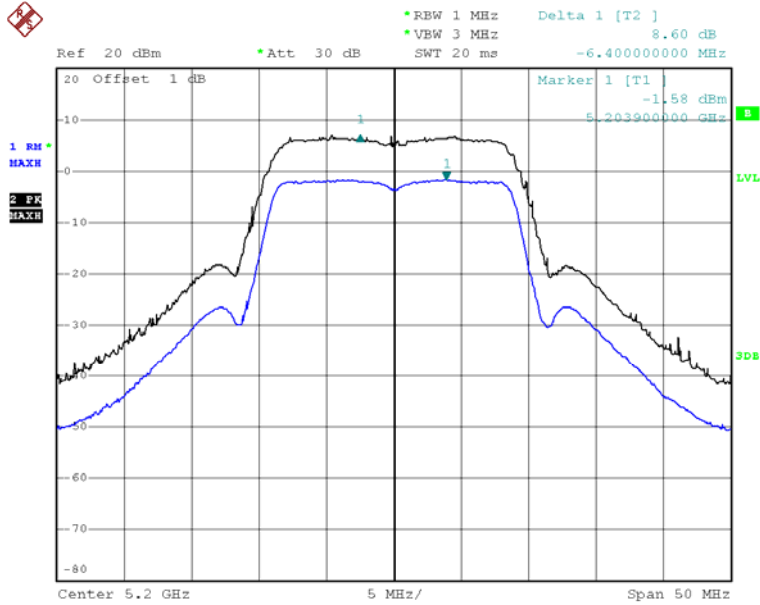

Date: 2.NOV.2013 10:31:49

CH48

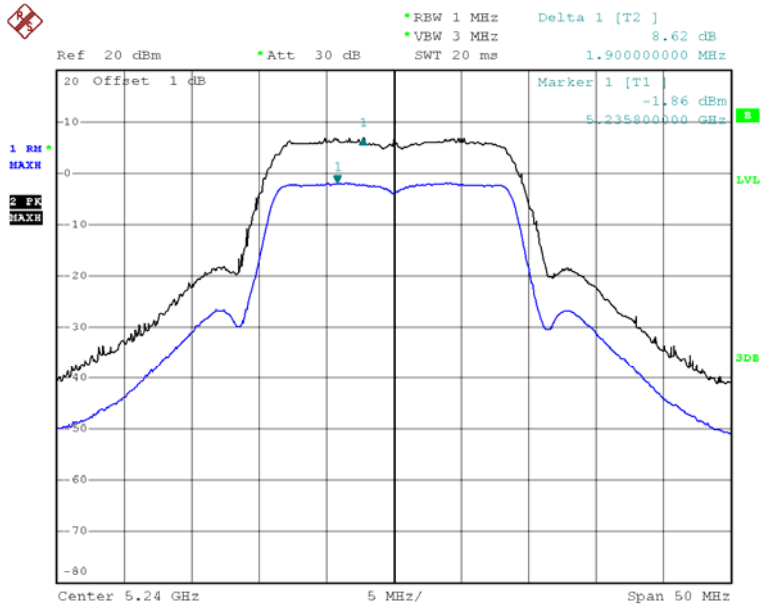


Date: 2.NOV.2013 10:31:08



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48/ANT 1		


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH36	5180	8.77	13
CH40	5200	9.28	13
CH48	5240	8.82	13

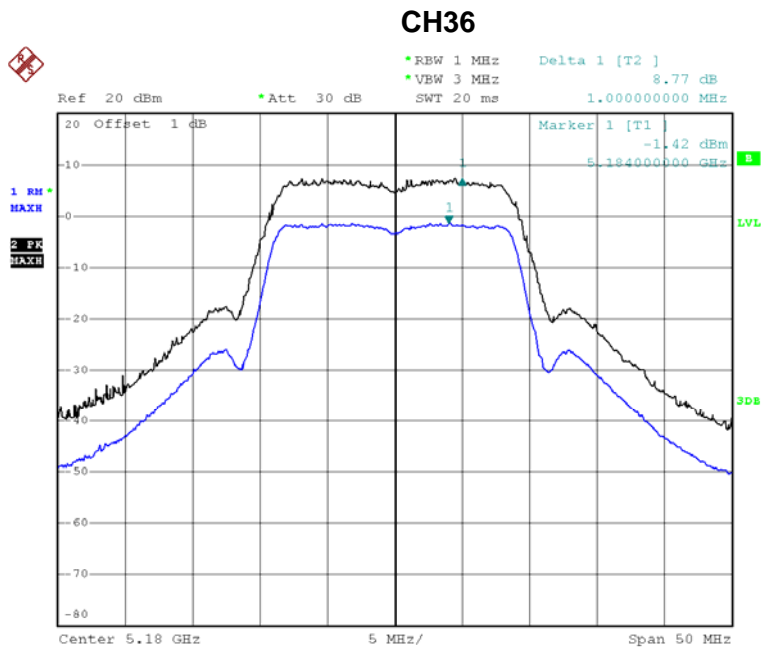

Date: 2.NOV.2013 10:37:29




CH40

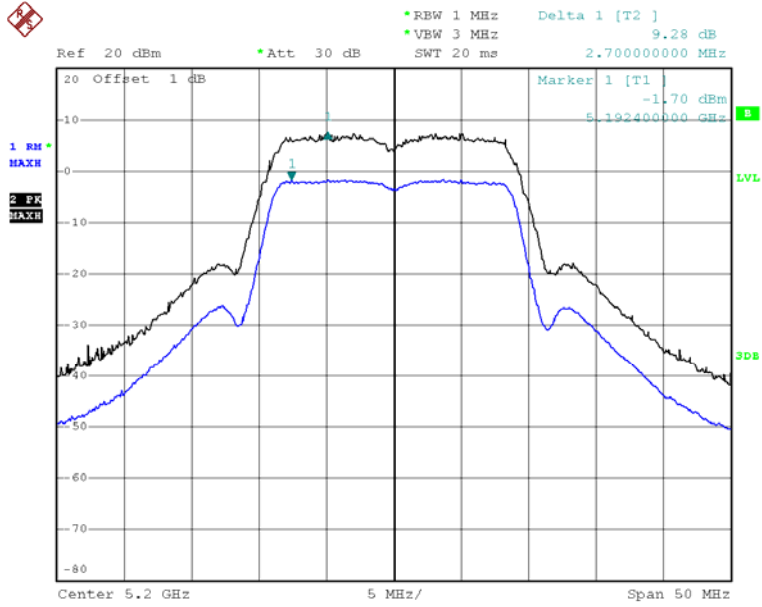

Date: 2.NOV.2013 10:37:12

CH48

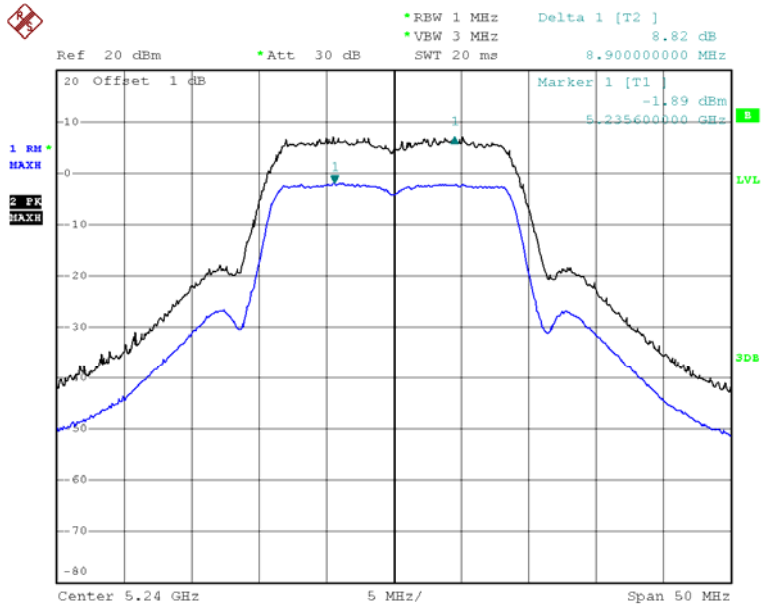


Date: 2.NOV.2013 10:36:49



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/CH36, CH40, CH48/ANT 2		


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH36	5180	8.47	13
CH40	5200	8.89	13
CH48	5240	8.78	13

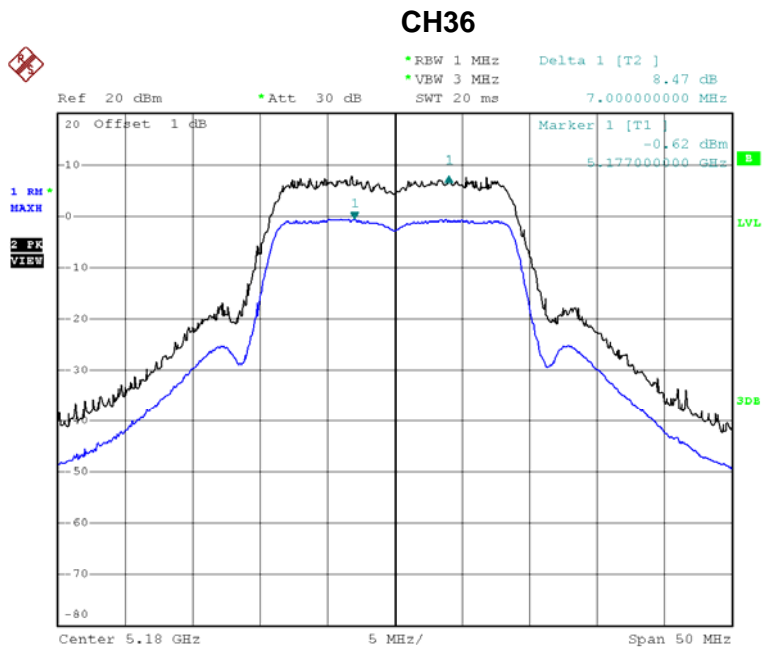

Date: 2.NOV.2013 10:45:31




CH40

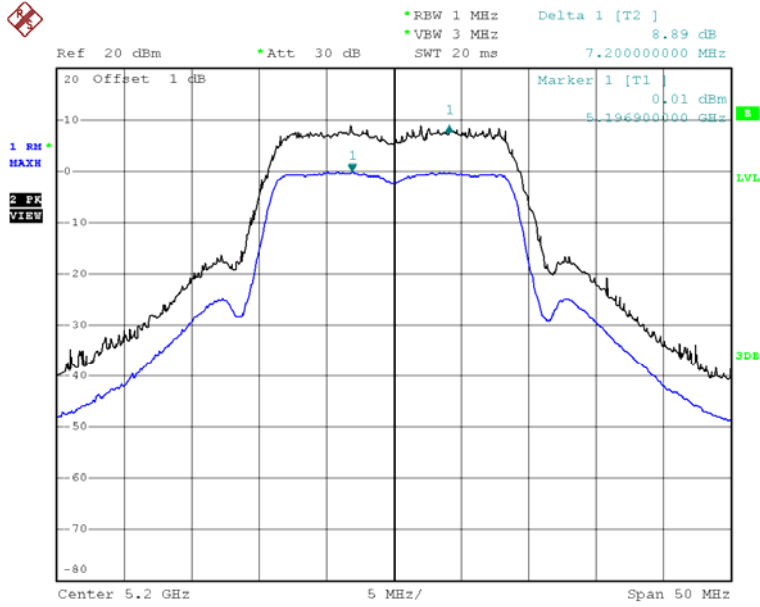

Date: 2.NOV.2013 10:45:55

CH48

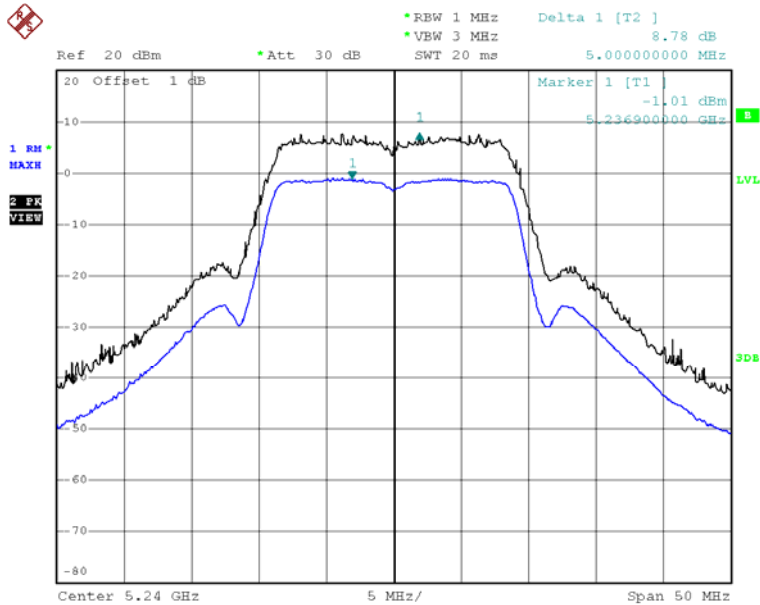


Date: 2.NOV.2013 10:46:14



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46/ANT 0		


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH38	5190	8.34	13
CH46	5230	8.29	13

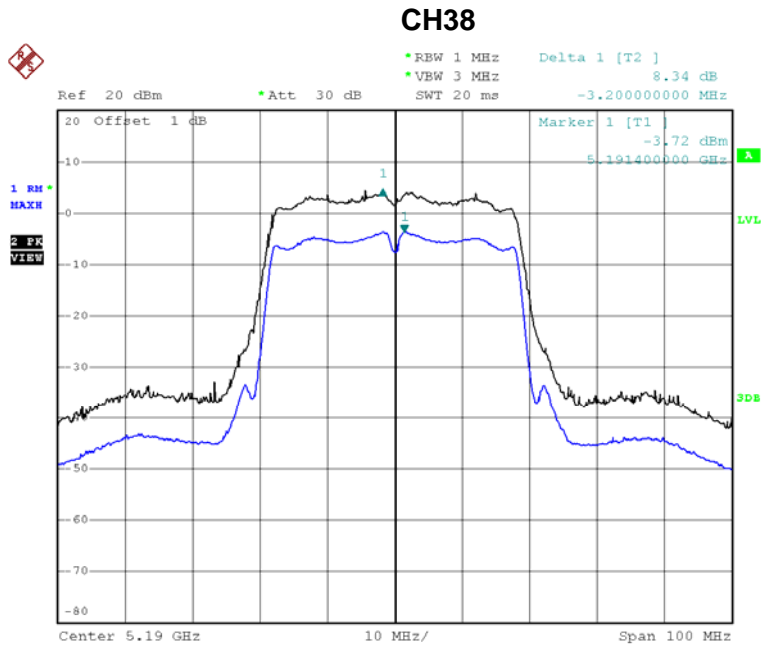

Date: 2.NOV.2013 11:04:48



CH46

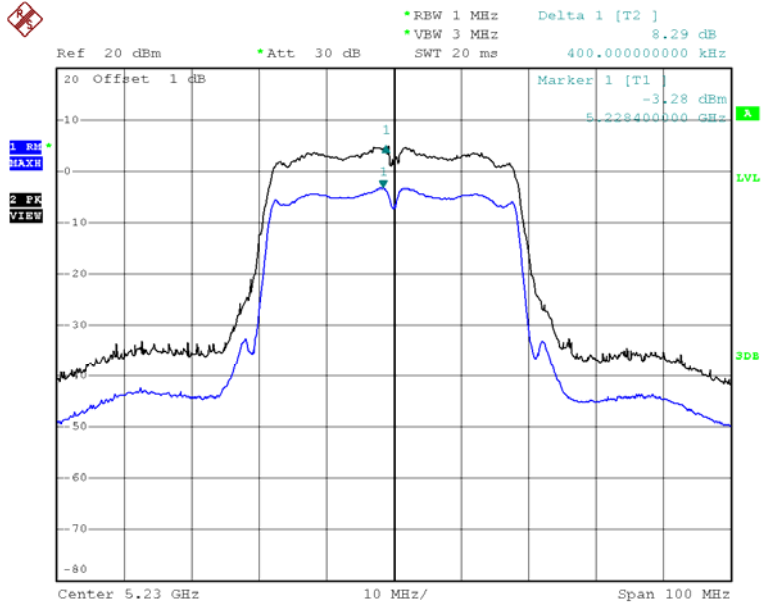


Date: 2.NOV.2013 11:02:55



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46/ANT 1		


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH38	5190	8.15	13
CH46	5230	8.93	13

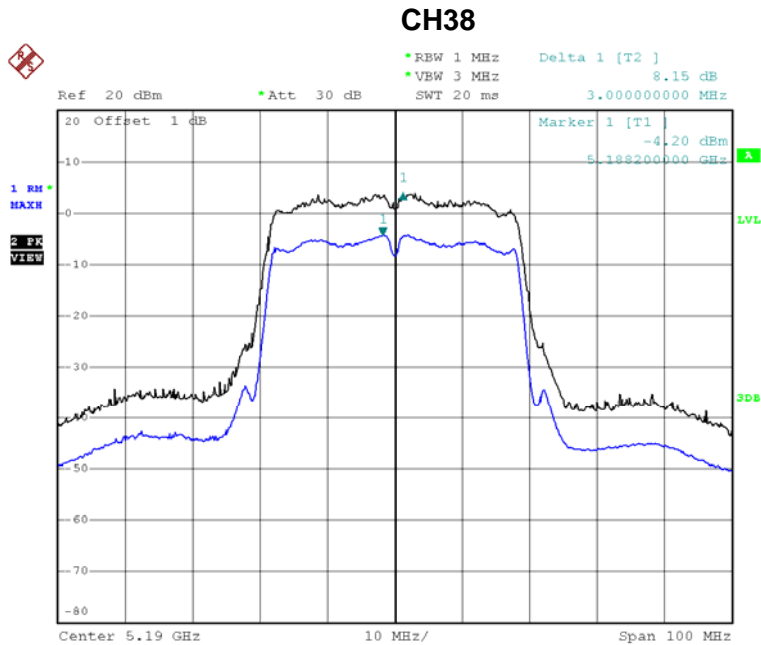

Date: 2.NOV.2013 11:11:42



CH46

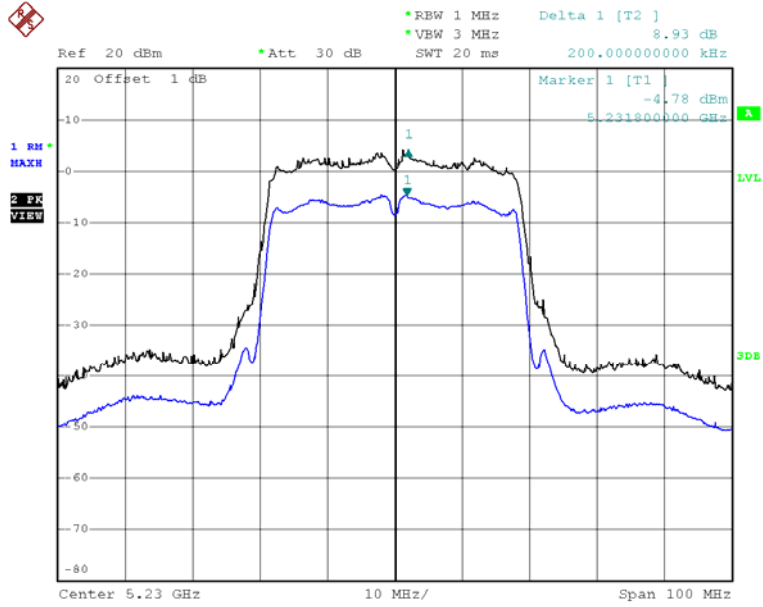


Date: 2.NOV.2013 11:12:01



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/CH38, CH46/ANT 2		


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH38	5190	8.73	13
CH46	5230	8.73	13

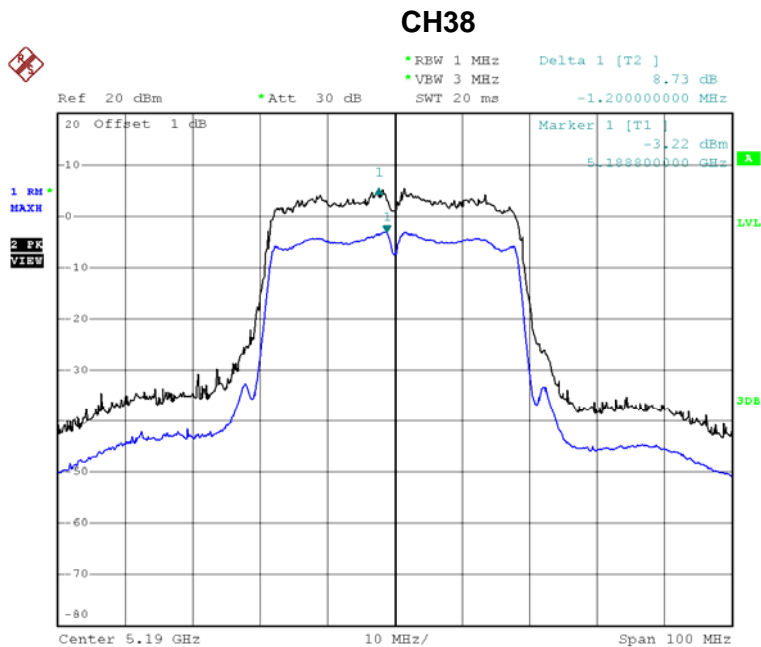

Date: 2.NOV.2013 11:13:52



CH46

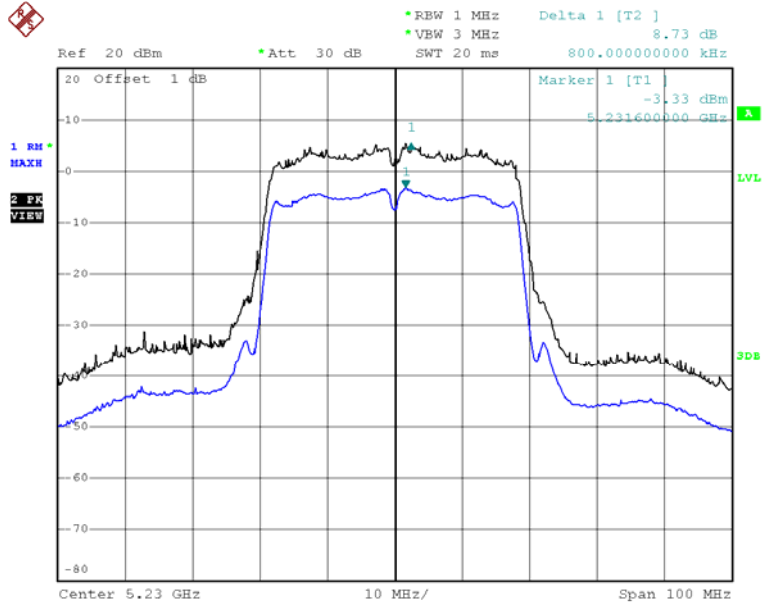

Date: 2.NOV.2013 11:13:32



10. FREQUENCY STABILITY MEASUREMENT

10.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E 15.407(g)			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	specified in the user's manual	5150 – 5250	PASS

10.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov. 26.2013
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May.25.2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

10.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. user manual temperature is 0°C~45°C.

10.1.3 DEVIATION FROM STANDARD

No deviation.



10.1.4 TEST SETUP



10.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



10.1.6 TEST RESULTS

EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180
132	5180.00789
120	5180.006850
118	5180.007650
Max. Deviation (MHz)	0.007890
Max. Deviation (ppm)	1.52

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180
0	5180.0076
10	5180.0069
20	5180.0056
30	5180.0045
40	5180.0066
Max. Deviation (MHz)	0.007600
Max. Deviation (ppm)	1.47



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/ANT 0		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180
132	5180.00789
120	5180.006850
118	5180.007650
Max. Deviation (MHz)	0.007890
Max. Deviation (ppm)	1.52

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180
0	5180.0076
10	5180.0069
20	5180.0056
30	5180.0045
40	5180.0066
Max. Deviation (MHz)	0.007600
Max. Deviation (ppm)	1.47



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/ANT 1		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180
132	5180.0079
120	5180.008000
118	5180.008100
Max. Deviation (MHz)	0.008100
Max. Deviation (ppm)	1.56

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180
0	5180.0078
10	5180.0079
20	5180.0081
30	5180.0078
40	5180.0077
Max. Deviation (MHz)	0.008100
Max. Deviation (ppm)	1.56



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N20 Mode/ANT 2		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180
132	5180.0092
120	5180.009100
118	5180.008800
Max. Deviation (MHz)	0.009200
Max. Deviation (ppm)	1.78

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180
0	5180.0070
10	5180.0076
20	5180.0077
30	5180.0081
40	5180.0082
Max. Deviation (MHz)	0.008200
Max. Deviation (ppm)	1.58



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/ANT 0		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5190
132	5190.002600
120	5190.002700
118	5190.003100
Max. Deviation (MHz)	0.003100
Max. Deviation (ppm)	0.60

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5190
0	5190.002600
10	5190.003100
20	5190.003200
30	5190.003200
40	5190.002600
Max. Deviation (MHz)	0.003200
Max. Deviation (ppm)	0.62



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/ANT 1		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5190
132	5190.002700
120	5190.003000
118	5190.002900
Max. Deviation (MHz)	0.003000
Max. Deviation (ppm)	0.58

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5190
0	5190.002700
10	5190.002900
20	5190.003000
30	5190.003100
40	5190.002700
Max. Deviation (MHz)	0.003100
Max. Deviation (ppm)	0.60



EUT:	High Power Dual Band Wireless 900N Low Profile Access Point	Model Name :	XAP-1500
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX N40 Mode/ANT 2		

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5190
132	5190.003000
120	5190.003100
118	5190.002900
Max. Deviation (MHz)	0.003100
Max. Deviation (ppm)	0.60

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5190
0	5190.002900
10	5190.003000
20	5190.003100
30	5190.003200
40	5190.002900
Max. Deviation (MHz)	0.003200
Max. Deviation (ppm)	0.62




11. EUT TEST PHOTO

Conducted Measurement Photos





**Radiated Measurement Photos
300MHz~1000MHz**

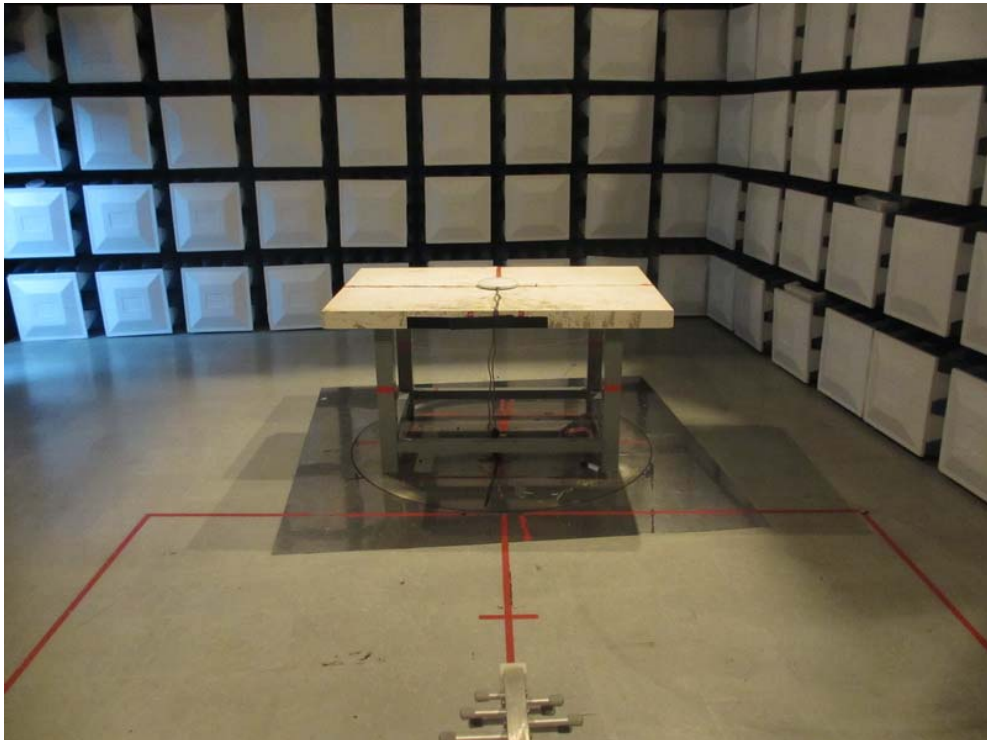



**Radiated Measurement Photos
Above 1000MHz**

