

# TTE Technology, Inc.

## TEST REPORT

### SCOPE OF WORK

FCC TESTING—49S517, 49S511, 49S513, 49S515, 49S515-MX, 49S517-MX, 49S515-CA, 49S517-CA, 49S51\*, 49S51\*-MX, 49S51\*-CA ("\*"=ANY NUMBER, ALPHABET OR CHARACTER PRESENTS DIFFERENT APPEARANCE INCLUDING COLOR, SILK-SCREEN OR DECORATIVE PART.)

### REPORT NUMBER

171115004SZN-001

### ISSUE DATE

December 08, 2017

### [REVISED DATE]

[-----]

### PAGES

37

### DOCUMENT CONTROL NUMBER

FCC ID JBP\_B

© 2017 INTERTEK



**TTE Technology, Inc.**

Application  
For  
Certification  
**FCC ID: W8U49S517**

**LED TV****Model: 49S517**

**Additional Models: 49S511, 49S513, 49S515, 49S515-MX, 49S517-MX, 49S515-CA, 49S517-CA, 49S51\*, 49S51\*-MX, 49S51\*-CA ("\*"=any number, alphabet or character presents different appearance including color, silk-screen or decorative part.)**

**Brand Name: TCL**

Computer Peripheral

Report No.: 171115004SZN-001

Prepared and Checked by:

Approved by:

Sign on file

Leo Li  
Engineer

---

Kidd Yang  
Senior Project Engineer  
Date: December 08, 2017

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Service Shenzhen Ltd. Longhua Branch**

1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China.  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labeling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Test Equipment List

## MEASUREMENT / TECHNICAL REPORT

TTE Technology, Inc.

MODEL: 49S517

Additional Models: 49S511, 49S513, 49S515, 49S515-MX, 49S517-MX, 49S515-CA, 49S517-CA, 49S51\*, 49S51\*-MX, 49S51\*-CA ("\*"=any number, alphabet or character presents different appearance including color, silk-screen or decorative part.)

FCC ID: W8U49S517

This report concerns (check one:)      Original Grant       Class I Change

Equipment Type: JBP-Class B Computing Device Peripheral

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes       No

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes       No

If no, assumed Part 15, Subpart B for unintentional radiator – the new 47 CFR [10-01-16 Edition] provision.

Report prepared by:

Leo Li  
Intertek Testing Services Shenzhen Ltd.  
Longhua Branch  
1F/2F, Building B, QiaoAn Scientific  
Technology Park, Shangkeng Community,  
Guanhu Subdistrict, Longhua District,  
Shenzhen, P.R. China  
Phone: 86-20-8213 9688  
Fax: 86-20-3205 7538

## Table of Contents

1.0	General Description.....	7
1.1	Product Description.....	7
1.2	Related Submittal(s) Grants.....	7
1.3	Test Methodology.....	8
1.4	Test Facility.....	8
2.0	System Test Configuration.....	10
2.1	Justification.....	10
2.2	EUT Exercising Software.....	10
2.3	Special Accessories.....	10
2.4	Equipment Modification.....	10
2.5	Measurement Uncertainty.....	11
2.6	Support Equipment List and Description.....	11
3.0	Emission Results.....	13
3.1	Field Strength Calculation.....	14
3.2	Field Strength Calculation (cont'd).....	15
3.3	Radiated Emission Configuration Photograph.....	16
3.4	Radiated Emission Data.....	17
3.5	Conducted Emission at Mains Terminal.....	20
3.6	Conducted Emission Data.....	21
4.0	Equipment Photographs.....	25
5.0	Product Labelling.....	27
6.0	Technical Specifications.....	29
7.0	Instruction Manual.....	31
8.0	Miscellaneous Information.....	33
8.1	Emissions Test Procedures.....	34
8.2	Emissions Test Procedures (cont'd).....	35
9.0	Technical Specifications.....	37

## List of attached file

Exhibit Type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated photos	radiated photos.pdf
Test Setup Photo	Conducted photos	conducted photos.pdf
External Photo	External Photos	external photos.pdf
Internal Photo	Internal Photos	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
ID Label / Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidential Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

**EXHIBIT 1**

**GENERAL DESCRIPTION**

## 1.0 General Description

### 1.1 Product Description

The Equipment Under Test (EUT) is a LED TV. The device can be used to connect PC by HDMI port. The EUT is powered by AC 120V, 60Hz.

The EUT contains a module which can be operated in the frequency band of 2412MHz to 2462MHz in 802.11b, 802.11g and 802.11n-HT20 modes, 2422MHz to 2452MHz in 802.11n-HT40 mode, and 5180MHz to 5240MHz, 5745MHz to 5825MHz in 802.11a, 802.11n (20MHz, 40MHz) and 11ac (80MHz) modes.

The Model: 49S511, 49S513, 49S515, 49S515-MX, 49S517-MX, 49S515-CA, 49S517-CA, 49S51\*, 49S51\*-MX, 49S51\*-CA ("\*"=any number, alphabet or character presents different appearance including color, silk-screen or decorative part.) are the same as the Model: 49S517 in hardware aspect. The models are difference in packaging and marketing purpose only.

The power board of EUT has two versions, the different of both version is version 2 has increased area of the heat sink H1, add heat sink H3, change thermistor RN1 to horizontal, both version 1 and version 2 of the power board have been tested, but only worst case was reported.

### 1.2 Related Submittal(s) Grants

This is an application for certification of a computer peripheral. Other digital functions were reported in the verification report: 171115005SZN-001.

The host contains a WIFI module, which has been granted under the FCC ID: 2AC23-WC0HR2601.



### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2014). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

### 1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

**EXHIBIT 2**

**SYSTEM TEST CONFIGURATION**

## 2.0 System Test Configuration

### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2014).

The device was powered by AC 120V/60Hz during the test. The host device contains a WiFi module which was installed and operating during the test. Both version 1 and version 2 of the power board have been tested, but only worst case was reported.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The frequency range from 30MHz to 29.125GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

### 2.2 EUT Exercising Software

N/A

### 2.3 Special Accessories

N/A

### 2.4 Equipment Modification

Any modifications installed previous to testing by TTE Technology, Inc. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

## 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

## 2.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
Laptop	Lenovo	T420
Hard Disk	Smart.drive	HD-003
RJ45 Cable	N/A	Unshielded, Length 450cm
USB Cable	Smart.drive	Unshielded, Length 155cm
USB Memory	SanDisk	SDCZ36-002G-P36
Dummy Load	N/A	N/A
HDMI Cable*3	N/A	UnShielded, Length 180cm
AV Cable*3	N/A	Unshielded, Length 120cm
Tuner Resister	N/A	75ohm
Remote controller	TCL	N/A
Headphone	Sony	Unshielded, Length 110cm
Coaxial cable	/	Shielded, Length 500cm
Optical cable	/	Unshielded, Length 130cm

**EXHIBIT 3**

**EMISSION RESULTS**

## 3.0 Emission Results

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

### 3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG$$

where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m

AG = Amplifier Gain in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG$$

### 3.2 Field Strength Calculation (cont'd)

#### Example

Assume a receiver reading of 62.0dB $\mu$ V is obtained. The antenna factor of 7.4dB/m and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The net field strength for comparison to the appropriate emission limit is 42dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0\text{dB}\mu\text{V}$$

$$AF = 7.4\text{dB/m}$$

$$CF = 1.6\text{dB}$$

$$AG = 29.0\text{dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 = 42\text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(42\text{dB}\mu\text{V/m})/20] = 125.9\mu\text{V/m}$$



## 3.3 Radiated Emission Configuration Photograph

Worst Case Radiated Emission  
At  
890.994MHz (HDMI In (4K) Mode)

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.pdf.

### 3.4 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 3.3dB margin (HDMI In (4K) Mode)

#### **TEST PERSONNEL:**

*Sign on file*

Leo Li, Engineer  
*Typed/Printed Name*

December 07, 2017  
*Date*

Applicant: TTE Technology, Inc.  
 Date of Test: December 07, 2017  
 Worst Case Operating Mode:

Model: 49S517  
 HDMI In (4K)

**Table 1**

**Radiated Emissions**

**Below 1G**

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	296.750	42.9	20.0	15.4	38.3	46.0	-7.7
Horizontal	594.055	35.6	20.0	22.2	37.8	46.0	-8.2
Horizontal	890.994	36.6	20.0	26.1	42.7	46.0	-3.3
Vertical	297.000	43.2	20.0	15.4	38.6	46.0	-7.4
Vertical	594.000	34.6	20.0	22.2	36.8	46.0	-9.2
Vertical	891.000	36.5	20.0	26.1	42.6	46.0	-3.4

**Above 1G**

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)	Detector
Horizontal	1169.000	69.3	36.8	25.8	58.3	74.0	-15.7	PK
Horizontal	1781.848	65.9	36.3	26.7	56.3	74.0	-17.7	PK
Horizontal	2977.000	59.7	36.5	31.9	55.1	74.0	-18.9	PK
Horizontal	1169.000	59.3	36.8	25.8	48.3	54.0	-5.7	AV
Horizontal	1781.848	59.9	36.3	26.7	50.3	54.0	-3.7	AV
Horizontal	2977.000	51.5	36.5	31.9	46.9	54.0	-7.1	AV
Vertical	2061.000	57.8	36.3	28.6	50.1	74.0	-23.9	PK
Vertical	2975.000	55.8	36.3	31.9	51.4	74.0	-22.6	PK
Vertical	4455.271	54.3	36.4	35.3	53.2	74.0	-20.8	PK
Vertical	2061.000	50.5	36.3	28.6	42.8	54.0	-11.2	AV
Vertical	2975.000	46.4	36.3	31.9	42.0	54.0	-12.0	AV
Vertical	4455.271	51.1	36.4	35.3	50.0	54.0	-4.0	AV

NOTES:

1. Quasi-Peak detector is used for frequency up to 1GHz, Peak detector and Average detector are used for frequency from 1G to 29.125GHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. All other emissions were at least 20 dB below the applicable limits.

Test Engineer: Leo Li

## 3.5 Conducted Emission at Mains Terminal

### 3.5.1 Conducted Emission Configuration Photograph

Worst Case Conducted Configuration  
at  
2.954 MHz (HDMI In Mode)

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.6 Conducted Emission Data

Judgement: Passed by 13.1 dB margin(HDMI In Mode)

**TEST PERSONNEL:**

*Sign on file*

Leo Li, Engineer  
*Typed/Printed Name*

December 07, 2017  
*Date*

Company: TTE Technology, Inc.


Date of Test: December 07, 2017

Model: 49S517

Operating Mode: HDMI in with antenna grounded

Phase: Live

## Conducted Emission Test - FCC

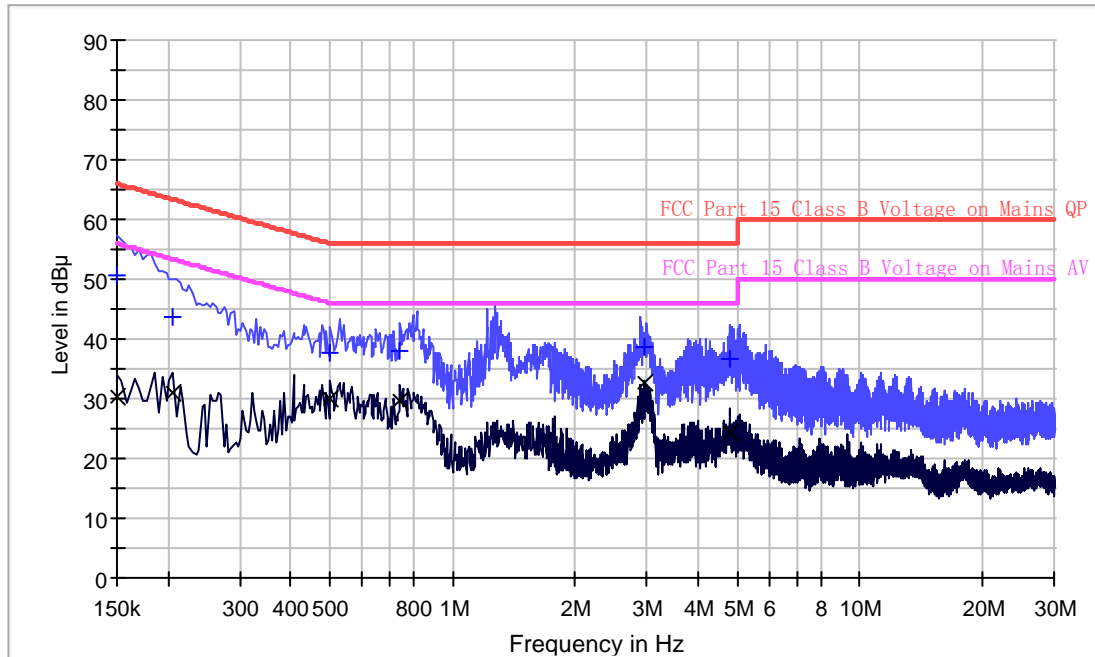

### Result Table QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	50.7	L1	9.6	15.3	66.0
0.206000	43.6	L1	9.7	19.8	63.4
0.502000	37.7	L1	9.7	18.3	56.0
0.742000	37.9	L1	9.7	18.1	56.0
2.954000	38.7	L1	9.7	17.3	56.0
4.814000	36.7	L1	9.8	19.3	56.0

### Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	30.5	L1	9.6	25.5	56.0
0.206000	31.0	L1	9.7	22.4	53.4
0.502000	30.0	L1	9.7	16.0	46.0
0.742000	29.5	L1	9.7	16.5	46.0
2.954000	32.6	L1	9.7	13.4	46.0
4.814000	24.2	L1	9.8	21.8	46.0

Test Engineer: Leo Li

Company: TTE Technology, Inc.


Date of Test: December 07, 2017

Model: 49S517

Operating Mode: HDMI In with antenna grounded

Phase: Neutral

## Conducted Emission Test - FCC

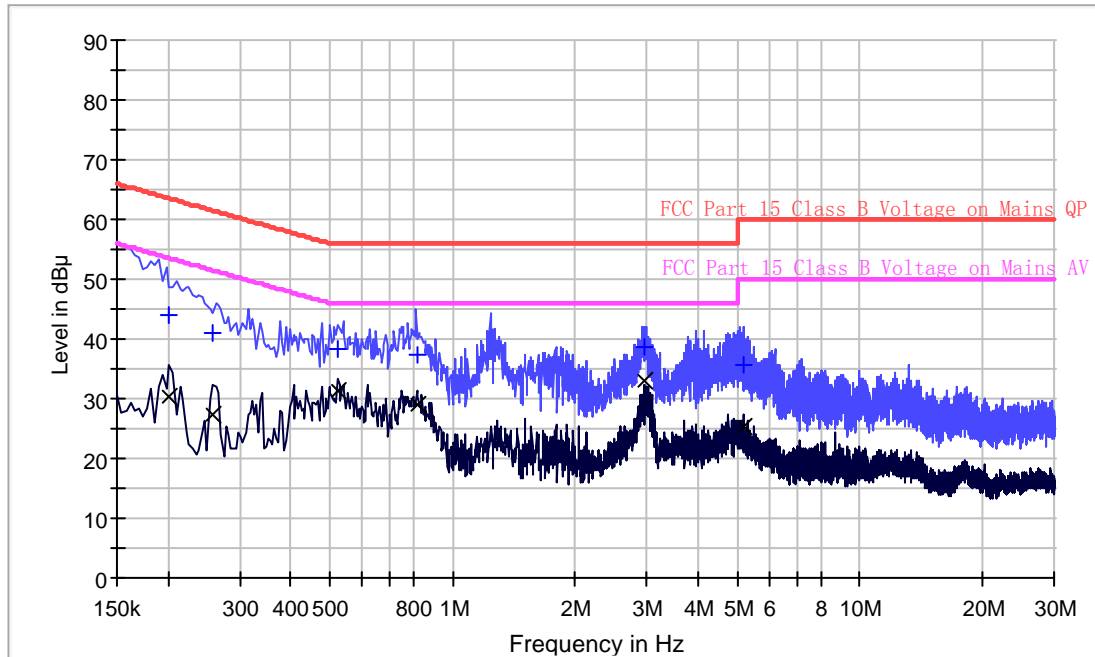

### Result Table QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.202000	44.0	N	9.7	19.5	63.5
0.258000	41.1	N	9.7	20.4	61.5
0.522000	38.5	N	9.7	17.5	56.0
0.818000	37.3	N	9.7	18.7	56.0
2.954000	38.6	N	9.8	17.4	56.0
5.210000	35.5	N	9.8	24.5	60.0

### Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.202000	30.2	N	9.7	23.3	53.5
0.258000	27.3	N	9.7	24.2	51.5
0.522000	31.5	N	9.7	14.5	46.0
0.818000	28.9	N	9.7	17.1	46.0
2.954000	32.9	N	9.8	13.1	46.0
5.210000	25.2	N	9.8	24.8	50.0

Test Engineer: Leo Li



**EXHIBIT 4**

**EQUIPMENT PHOTOGRAPHS**

## 4.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: external photos.pdf and internal photos.pdf.

**EXHIBIT 5**

**PRODUCT LABELLING**

## 5.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

**EXHIBIT 6**

**TECHNICAL SPECIFICATIONS**

## 6.0 Technical Specifications

For electronic filing, the block diagram of the tested EUT is saved with filename: block.pdf.

**EXHIBIT 7**

**INSTRUCTION MANUAL**

## 7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold / leased in the United States.



**EXHIBIT 8**

**MISCELLANEOUS INFORMATION**

## 8.0 Miscellaneous Information

This miscellaneous information includes emission measuring procedure.

## 8.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of computer peripheral operating under Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 – 2014.

The computer peripheral equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions are in QP mode from the frequency band 30MHz to 1GHz with RBW setting 120kHz and in PK & AV mode from frequency band 1GHz to 29.125GHz with RBW setting 1MHz. Detector function for conducted emissions are in QP & AV mode and IFBW setting is 9kHz from the frequency band 150kHz to 30MHz.

For radiated emission, the frequency range scanned is 30MHz to 29.125GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz with RBW setting 9KHz.

## 8.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

Conducted measurements are made as described in ANSI C63.4 – 2014.

**EXHIBIT 9**

**TEST EQUIPMENT LIST**

## 9.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-04	Biconilog Antenna	ETS	3142C	00078828	17-Oct-2017	17-Oct-2018
SZ061-08	Horn Antenna	ETS	3115	00092346	20-Sep-2017	20-Sep-2018
SZ056-03	Spectrum Analyzer	R&S	FSP30	101148	1-Jun-2017	1-Jun-2018
SZ185-01	EMI Receiver	R & S	ESCI	100547	9-Feb-2017	9-Feb-2018
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIALL	RG 213U	--	10-Jul-2017	10-Jan-2018
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	11-Sep-2017	11-Mar-2018
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	11-Sep-2017	11-Mar-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	30-Oct-2017	30-Oct-2018
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	30-Oct-2017	30-Oct-2018
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	12-Jul-2017	12-Jul-2018
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019