

FCC SAR

TEST REPORT

of

EDGE Quadband with full QWERTY Keypad Mobile Phone/i720

Model Name: I720
Trade Name: Verykool
Report No.: SZ09110088S01
FCC ID: WA6I720

prepared for

Verykool USA Inc.

4350 Executive Dr. #100, San Diego, CA 92121, USA

prepared by

Shenzhen Electronic Product Quality Testing Center

Morlab Laboratory

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



LAB CODE 20081223-00

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant, it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

Contents

1. GENERAL INFORMATION.....	3
1.1. Notes	3
1.2. Organization item.....	3
1.3. Conclusion.....	3
2. TESTING LABORATORY	4
2.1. Identification of the Responsible Testing Laboratory.....	4
2.2. Identification of the Responsible Testing Location	4
2.3. Accreditation Certificate	4
2.4. List of Test Equipments	4
3. TECHNICAL INFORMATION	5
3.1. Identification of Applicant.....	5
3.2. Identification of Manufacturer	5
3.3. Equipment Under Test (EUT)	5
3.3.1. Photographs of the EUT	6
3.3.2. Identification of all used EUTs	6
4. TEST RESULTS.....	6
4.1. Applied Reference Documents	6
4.2. Test Environment/Conditions	7
4.3. Operational Conditions During Test	7
4.3.1. Informations On The Testing	8
4.3.2. The Measurement System	10
4.3.3. Uncertainty Assessment	12
4.4. MEASUREMENT PROCEDURES	13
4.4.1. Procedures Used To Establish Test Signal.....	14
4.5. Items used in the Test Results List.....	16
4.6. Test Results List.....	17
ANNEX A ACCREDITATION CERTIFICATE.....	19
ANNEX B PHOTOGRAPHS OF THE EUT	21
ANNEX C GRAPH TEST RESULTS	24

General Information

1.1. Notes


The test results of this test report relate exclusively to the information specified in section 3.3. Shenzhen Electronic Product Quality Testing Center Morlab Laboratory does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the identification. The test report may only be reproduced or published in full. Reproduction or publications of extracts from the test report requires the prior written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test report shall be invalid without all the signatures of testing the Project Manager, the Deputy Project Manager and the Test Lab Manager. Any objections must be raised to Morlab within 30 days since the date when the report is received. It will not be taken into consideration beyond this limit.

1.2. Organization item

Report No.:	SZ09110088S01
Date of Issue:	Feb 7, 2010
Date of Tests:	Jan 11, 2010 –Jan 11, 2010
Responsible for Accreditation:	Shu Luan
Project Manager:	Li Lei
Deputy Project Manager:	Chen Chao

1.3. Conclusion

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory has verified that all tests as listed in the section 4.5 of this report haven been performed succ essfully with the tested equipment.

 Chen Chao Tested by (Responsible for the Test Report)		 Li Lei Reviewed by (Verification of the Test Report)
 Shu Luan Approved by (Responsible Test Lab Manager)		

2. Testing Laboratory

2.1. Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Electronic Product Quality Testing Center
Department: Morlab Laboratory
Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China
Responsible Test Lab Manager: Mr. Shu Luan
Telephone: +86 755 86130268
Facsimile: +86 755 86130218

2.2. Identification of the Responsible Testing Location

Name: Shenzhen Electronic Product Quality Testing Center Morlab Laboratory
Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China

2.3. Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L1659 (see 0)

2.4. List of Test Equipments

No.	Instrument	Type
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)
2	Network Emulator	Rohde&Schwarz (CMU200, SN:105894)
3	Voltmeter	Keithley (2000, SN:1000572)
4	Synthesizer	Rohde&Schwarz (SML_03, SN:101868)
5	Amplifier	Nuclides (ALB216, SN:10800)
6	Power Meter	Rohde&Schwarz (NRVD, SN:101066)
7	Probe	Antennessa (SN:SN_3708_EP80)
8	Phantom	Antennessa (SN:SN_36_08_SAM62)
9	Liquid	Antennessa (Last Calibration:21 08 04)

3. Technical Information

Note: the following data is based on the information by the applicant.

3.1. Identification of Applicant

Company Name: Verykool USA Inc.
Address: 4350 Executive Dr. #100, San Diego, CA 92121, USA

3.2. Identification of Manufacturer

Company Name: Verykool USA Inc.
Address: 4350 Executive Dr. #100, San Diego, CA 92121, USA

3.3. Equipment Under Test (EUT)

Brand Name: Verykool
Type Name: Verykool
Marking Name: I720
Hardware Version: W34ms00b1
Software Version: T081105
Frequency Bands: GSM 850MHz: 848.2 MHz to 848.8 MHz
PCS 1900MHz: 1850.2 MHz to 1909.80 MHz
WIFI 802.11b/g
Modulation Mode: GMSK
Antenna type: Build inside
Development Stage: Identical prototype
Battery Model: A0381
Battery specification: 1030mAh 3.7V
Multislot Class: GPRS: Multislot Class 12; EDGE: Multislot Class 12

3.3.1. Photographs of the EUT

Please see for photographs of the EUT.

3.3.2. Identification of all used EUTs

The EUT Identity consists of numerical and letter characters (see the table below), the first five numerical characters indicates the Type of the EUT defined by Morlab, the next letter character indicates the test sample, and the following two numerical characters indicates the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	W34ms00b1	T081105

4. Test Results

4.1. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR § 2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
3	ANSI C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz
4	IEEE 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

4.2. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Details of Power Supply:	100~240V/50~60Hz AC
Extreme Temperature:	Low Temperature (LT) = -10°C
	High Temperature (HT) = 55°C
Extreme Voltage of the EUT:	Normal Voltage (NV) = 3.70V
	Low Voltage (LV) = 3.60V
	High Voltage (HV) = 4.20V
Test frequency:	GSM 850MHz
	PCS 1900MHz
	802.11 b/g
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5)
	PCS 1900 MHz Maximum output power(level 0)
	Maximum output power

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz, The EUT, The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

4.3.Operational Conditions During Test

4.3.1. Informations On The Testing

I. INFORMATIONS ON THE TESTING


I.1. Normative reference

IEEE 1528: Recommended Practice for determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques. Institute of Electrical and Electronics Engineers, INC., 2003.

I.3. Positions and test conditions of the mobile phone under test

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

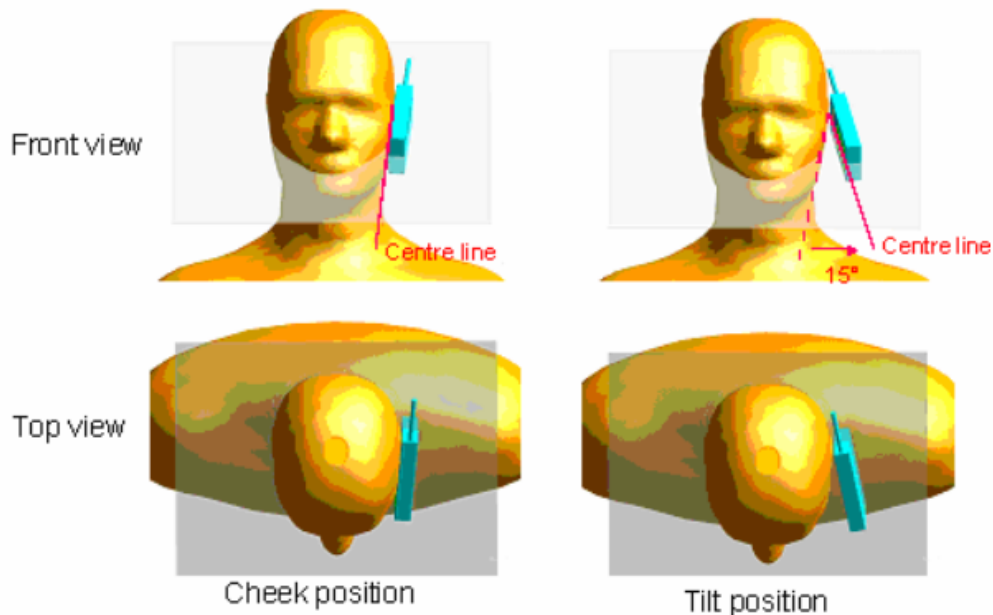

Description of the « cheek » position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the « tilted » position:

The mobile phone is well place in the “cheek” position as described above. Then the mobile phone is moved outward away from the mouth by an angle of 15 degrees or until contact with the ear lost.

4.3.2. The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



COMOSAR bench

The mobile phone under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10 g mass.

II.1. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2 mm +/- 0,2 mm. It enables the dosimetric evaluation of left and right hand phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

II.2. Probe

For the measurements the Specific Dosimetric E-Field Probe SSE5 with following specifications is used.

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 5 mm

- Distance between probe tip and sensor center : 2.5 mm
- Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm).
- Probe linearity : <0.25 dB
- Axial Isotropy : <0.25 dB
- Spherical Isotropy : <0.50 dB
- Calibration range : 835 to 2500 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line : less than 30°

II.3. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

II.4 Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

4.3.3. Uncertainty Assessment

The following table includes the uncertainty table of the IEEE 1528.

The values are determined by Antennessa.

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1 C_p)^{1/2}$	$(1 C_p)^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test sample Related									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	6.6.2	4.76	R	$\sqrt{3}$	1	1	2.75	2.75	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	0.57	R	$\sqrt{3}$	0.64	0.43	0.21	0.14	∞

Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.66	R	$\sqrt{3}$	0.6	0.49	1.27	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.28	10.78	
Expanded Uncertainty (95% Confidence interval)			k				21.99	21.03	

4.3.4. Equipments and results of validation testing

Equipments :

name	Type and specification
Signal generator	E4433B
Directional coupler	450MHz-3GHz
Amplifier	3W 502(10-2500MHz)
Reference dipole	835MHz:SN 36/08 DIPC 99 1800MHz:SN 36/08 DIPF 101 2450MHz:SN 36/08 DIPJ 103

Results:

Frequency	835MHz	1900MHz	2450 MHz
Target value (1g)	10.8 W/Kg (body)	39.7 W/Kg	52.4 W/Kg (body)
250 mW input power	2.709 W/Kg (head) 2.701 W/Kg (body)	9.843 W/Kg (head) 10.22 W/Kg (body)	12.988 W/Kg (body)
Test value (1g)	10.836 W/Kg (head) 10.804 W/Kg (body)	39.372 W/Kg (head) 40.880 W/Kg (body)	51.952 W/Kg (body)

Note:Please refer to check the system performance data, the first 168-182 page. 250 mW input power

4.3.5. Dielectric Performance

The measured 1-gram averaged SAR values of the device against the head and the body are provided in Tables 1 and 2 respectively. The humidity and ambient temperature of test facility were 54% ~60% and 23.0 °C ~23.8°C respectively. The SAM head phantom (SN 0381 SH) were full of the head tissue simulating liquid. The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm (taking into account of the IEEE 1528 and the place of the antenna). A base station simulator was used to control the device during the SAR measurement. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested at the lowest, middle and highest frequencies in the transmit band.

Table 1: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.0~23.8°C, humidity: 54~60%.			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	835 MHZ	41. 5	0. 90
Validation value (Jan 11)	835 MHZ	41. 675999	0. 894409
Target value	1900 MHZ	40	1. 40
Validation value (Jan 11)	1900 MHZ	39. 481223	1. 395758

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put on in the belt holder.

Table 2: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.0~23.8°C, humidity: 54~60%.			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	835 MHz	55. 2	0.97
Validation value (Jan 11)	835 MHz	55. 709999	1. 009033
Target value	1900 MHz	53. 3	1. 52

Validation value (Jan 11)	1900 MHz	52.548876	1.573978
Target value	2450 MHz	52.70	1.52
Validation value (Jan 11)	2450 MHz	54.548876	1.541411

4.3.6. Simulant liquids

Simulant liquids that are used for testing at frequencies of GSM 850MHz and GSM 1900MHz, which are made mainly of sugar, salt and water solutions may be left in the phantoms.

Approximately 20litres are needed for an upright head compared to about 20litres for a horizontal bath phantom.

Ingredients (% by weight)	Frequency Band		Frequency Band		Frequency Band
	835MHz		1900MHz		2450MHz
Tissue Type	Head	Body	Body	Head	Body
Water	41.45	52.4	52.4	55.36	40.4
Salt(NaCl)	1.45	1.4	1.4	0.35	0.5
Sugar	56.0	45.0	45.0	30.45	58.0
HEC	1.0	1.0	1.0	0.0	1.0
Bactericide	0.1	0.1	0.1	0.0	0.1
Triton	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	0.0	13.84	0.0
Acticide SPX	0.0	0.0	0.0	0.0	0.0
Dielectric Constant	42.45	56.1	52.7	41.00	54.0
Conductivity (S/m)	0.91	0.95	1.95	1.38	1.45

4.4. Items used in the Test Results List

Terms in the column “Verdict” for the test results list of the section 4.5:

Verdict	Description
PASS	EUT passed this test case
FAIL	EUT failed this test case
INC.	EUT did not pass and did not fail this test case, therefore the verdict is inconclusive
Decl.	“Declaration”: Morlab has received documents from the applicant and/or manufacturer which show conformity to the applied standards for this test case.
N/A	Test case not applicable for the EUT, see the column “Note” for detailed

4.5. Test Results List

Summary of Measurement Results (GSM 850MHz Band)

SAR Values (GSM 850MHz Band), Measured against the head.

Temperature: 23.0~23.8°C, humidity: 54~60%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Left head, Touch cheek, Channel Low	0.098	30.48
Left head, Touch cheek, Channel Middle	0.096	30.31
Left head, Touch cheek, Channel High	0.099	30.34
Left head, Tilt 15 Degree, Channel Low	0.072	30.48
Left head, Tilt 15 Degree, Channel Middle	0.072	30.31
Left head, Tilt 15 Degree, Channel High	0.074	30.34
Right head, Touch cheek, Channel Low	0.106	30.48
Right head, Touch cheek, Channel Middle	0.103	30.31
Right head, Touch cheek, Channel High	0.109	30.34
Right head, Tilt 15 Degree, Channel Low	0.073	30.48
Right head, Tilt 15 Degree, Channel Middle	0.072	30.31
Right head, Tilt 15 Degree, Channel High	0.075	30.34
Right head, Touch cheek, Channel Low (with WIFI)	0.132	30.48

Summary of Measurement Results (GSM 1900MHz Band)

SAR Values (GSM 1900MHz Band), Measured against the head.

Temperature: 23.0~23.8°C, humidity: 54~60%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Left head, Touch cheek, Channel Low	0.246	27.98
Left head, Touch cheek, Channel Middle	0.240	27.87
Left head, Touch cheek, Channel High	0.164	27.18
Left head, Tilt 15 Degree, Channel Low	0.113	27.98
Left head, Tilt 15 Degree, Channel Middle	0.086	27.87
Left head, Tilt 15 Degree, Channel High	0.068	27.18

Right head, Touch cheek, Channel Low	0.282	27.98
Right head, Touch cheek, Channel Middle	0.267	27.87
Right head, Touch cheek, Channel High	0.178	27.18
Right head, Tilt 15 Degree, Channel Low	0.159	27.98
Right head, Tilt 15 Degree, Channel Middle	0.105	27.87
Right head, Tilt 15 Degree, Channel High	0.103	27.18
Right head, Touch cheek, Channel Low (with WIFI)	0.289	27.98

SAR Values (GSM 850MHz Band), Measured against the body.

Temperature: 23.0~23.8°C, humidity: 54~60%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Low frequency	0.288	30.48
Side, Middle frequency	0.248	30.31
Side, High frequency	0.158	30.34
Side, Low frequency (back)	0.245	30.48
Side, Low frequency (with GPRS)	1.080	30.43
Side, Low frequency (with EDGE)	0.994	30.43
Side, Low frequency (with earphone)	0.244	30.48
Side, Low frequency (slide Up)	0.211	30.48
Side, Low frequency (with WIFI)	0.363	30.48

SAR Values (GSM 1900MHz Band), Measured against the body.

Temperature: 23.0~23.8°C, humidity: 54~60%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Low frequency	0.306	27.98
Side, Middle frequency	0.311	27.87
Side, High frequency	0.182	27.18
Side, Middle frequency (back)	0.151	27.87
Side, Middle frequency (with GPRS)	1.140	27.57
Side, Middle frequency (with EDGE)	1.119	27.87

Side, Middle frequency (with earphone)	0.262	27.87
Side, Middle frequency (slide Up)	0.284	27.87
Side, Middle frequency (with WIFI)	0.317	27.87

SAR Values (WIFI 2450MHz Band), Measured against the body.

Temperature: 23.0~23.8°C, humidity: 54~60%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Low frequency	0.172	22.28
Side, Middle frequency	0.145	22.25
Side, High frequency	0.141	22.23
Side, Low frequency (back)	0.111	22.28
Side, Low frequency (slide Up)	0.138	22.28

Note: 1.The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm(taking into account of the IEEE 1528 and the place of the antenna)

- 2.WIFI some of the test are done under the maximum output power.
3. Simultaneous transmitter testing to comply with FCC KDB 648474 File Description
4. SUM SAR values $1.140 \text{ W/kg} + 0.172 \text{ W/kg} = 1.312 \text{ W/kg}$ lower than 1.6 W/kg .



5. GSM antenna and Bluetooth antenna distance is 7 cm

Annex A Accreditation Certificate


 China National Accreditation Service for Conformity Assessment LABORATORY ACCREDITATION CERTIFICATE (No. CNAS L1659) <i>China National Accreditation Service for Conformity Assessment has accredited</i> Shenzhen Electronic Product Quality Testing Center <u>Electronic Testing Building, Shahe Road, Xili, Nanshan District,</u> <u>Shenzhen, Guangdong, China</u> <i>to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.</i> <i>The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.</i> Date of Issue: 2009-09-29 Date of Expiry: 2012-09-28 Date of Initial Accreditation: 1999-08-03  Signed on behalf of China National Accreditation Service for Conformity Assessment China National Accreditation Service for Conformity Assessment(CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation systems for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA), and the signatory to Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).
--

Annex B Photographs of the EUT


1 EUT Left Head Touch Cheek Position



2 EUT Left Head Tilt15 Position

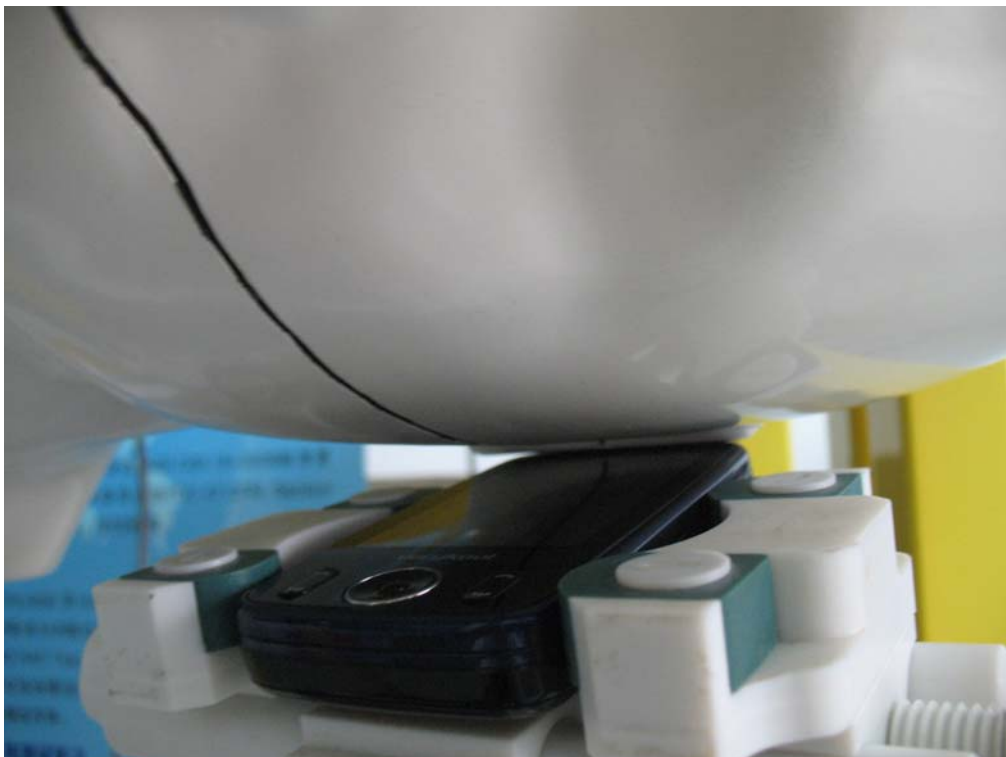

3 EUT Right Head Touch Cheek Position

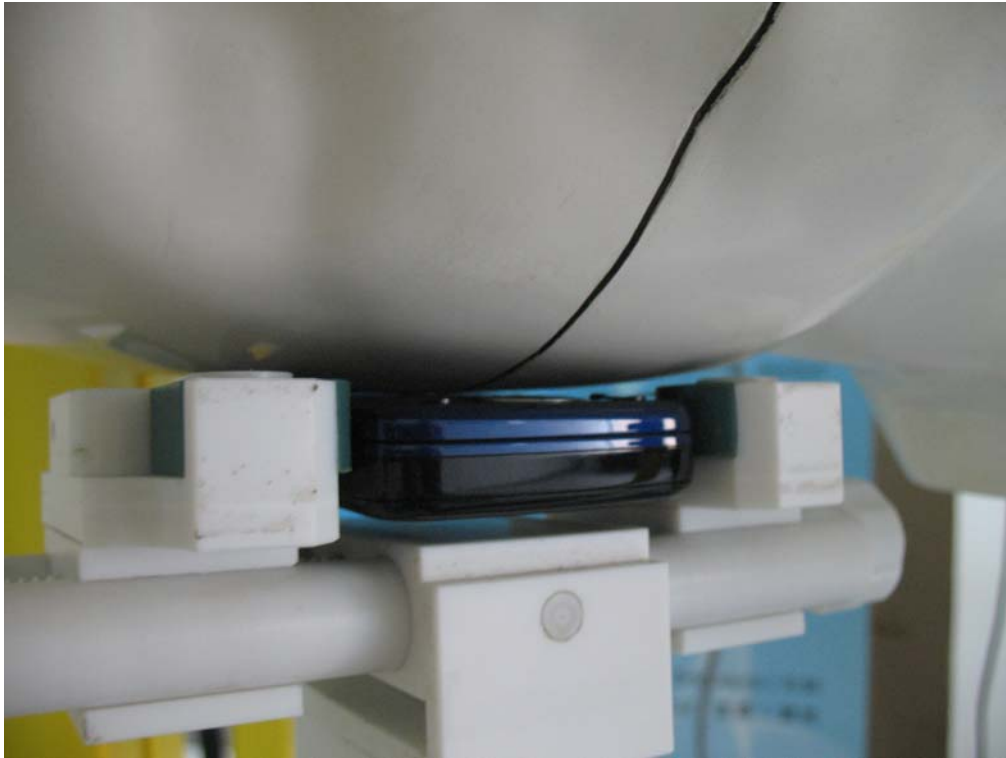

4 EUT Right Head Tilt15 Position



5 Side Position



6 With Headphone



Annex C Graph Test Results

<u>TYPE</u>	BAND	<u>PARAMETERS</u>
	<u>GSM850</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in GSM mode <u>Measurement 2:</u> Right Head with Cheek device position on Middle Channel in GSM mode <u>Measurement 3:</u> Right Head with Cheek device position on High Channel in GSM mode <u>Measurement 4:</u> Right Head with Tilt device position on Low Channel in GSM mode <u>Measurement 5:</u> Right Head with Tilt device position on Middle Channel in GSM mode <u>Measurement 6:</u> Right Head with Tilt device position on High Channel in GSM mode <u>Measurement 7:</u> Left Head with Cheek device position on Low Channel in GSM mode <u>Measurement 8:</u> Left Head with Cheek device position on Middle Channel in GSM mode <u>Measurement 9:</u> Left Head with Cheek device position on High Channel in GSM mode <u>Measurement 10:</u> Left Head with Tilt device position on Low Channel in GSM mode <u>Measurement 11:</u> Left Head with Tilt device position on Middle Channel in GSM mode <u>Measurement 12:</u> Left Head with Tilt device position on High Channel in GSM mode <u>Measurement 13:</u> Right Head with Cheek device position on Low Channel in GSM mode (with WIFI) <u>Measurement 14:</u> Validation Plane with Body device position on Low Channel in GSM mode <u>Measurement 15:</u> Validation Plane with Body device position on Middle Channel in GSM mode <u>Measurement 16:</u> Validation Plane with Body device position on High Channel in GSM mode <u>Measurement 17:</u> Validation Plane with Body device position on High Channel in GSM mode (back) <u>Measurement 18:</u> Validation Plane with Body device position on High Channel in GSM mode(with GPRS) <u>Measurement 19:</u> Validation Plane with Body device

		position on High Channel in GSM mode(with EDGE) <u>Measurement 20:</u> Validation Plane with Body device position on High Channel in GSM mode(with earphone) <u>Measurement 21:</u> Validation Plane with Body device position on High Channel in GSM mode(Slide Up) <u>Measurement 22:</u> Validation Plane with Body device position on High Channel in GSM mode(with WIFI)
	<u>GSM</u> <u>1900</u>	<u>Measurement 23:</u> Right Head with Cheek device position on Low Channel in GSM mode <u>Measurement 24:</u> Right Head with Cheek device position on Middle Channel in GSM mode <u>Measurement 25:</u> Right Head with Cheek device position on High Channel in GSM mode <u>Measurement 26:</u> Right Head with Tilt device position on Low Channel in GSM mode <u>Measurement 27:</u> Right Head with Tilt device position on Middle Channel in GSM mode <u>Measurement 28:</u> Right Head with Tilt device position on High Channel in GSM mode <u>Measurement 29:</u> Left Head with Cheek device position on Low Channel in GSM mode <u>Measurement 30:</u> Left Head with Cheek device position on Middle Channel in GSM mode <u>Measurement 31:</u> Left Head with Cheek device position on High Channel in GSM mode <u>Measurement 32:</u> Left Head with Tilt device position on Low Channel in GSM mode <u>Measurement 33:</u> Left Head with Tilt device position on Middle Channel in GSM mode <u>Measurement 34:</u> Left Head with Tilt device position on High Channel in GSM mode <u>Measurement 35:</u> Right Head with Cheek device position on Low Channel in GSM mode (with WIFI) <u>Measurement 36:</u> Validation Plane with Body device position on Low Channel in GSM mode <u>Measurement 37:</u> Validation Plane with Body device position on Middle Channel in GSM mode <u>Measurement 38:</u> Validation Plane with Body device position on High Channel in GSM mode <u>Measurement 39:</u> Validation Plane with Body device position on High Channel in GSM mode (back)

		<u>Measurement 40:</u> Validation Plane with Body device position on High Channel in GSM mode(with GPRS) <u>Measurement 41:</u> Validation Plane with Body device position on High Channel in GSM mode(with EDGE) <u>Measurement 42:</u> Validation Plane with Body device position on High Channel in GSM mode(with earphone) <u>Measurement 43:</u> Validation Plane with Body device position on High Channel in GSM mode(Slide Up) <u>Measurement 44:</u> Validation Plane with Body device position on High Channel in GSM mode(with WIFI)
	<u>WIFI</u> <u>2450MHz</u>	<u>Measurement 45:</u> Validation Plane with Body device position on Low Channel in WIFI mode <u>Measurement 46:</u> Validation Plane with Body device position on Middle Channel in WIFI mode <u>Measurement 47:</u> Validation Plane with Body device position on High Channel in WIFI mode <u>Measurement 48:</u> Validation Plane with Body device position on Low Channel in WIFI mode (back) <u>Measurement 49:</u> Validation Plane with Body device position on Low Channel in WIFI mode (Slide Up)

MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 52 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	41.790001
Relative permittivity	18.926250

Conductivity (S/m)	0.866612
Variation (%)	-0.980000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8


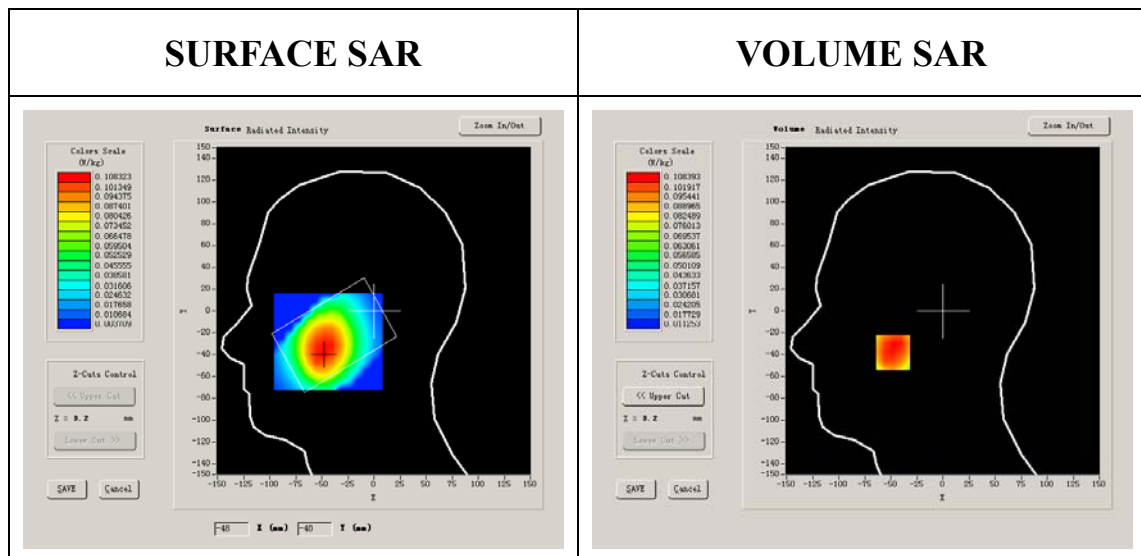


Maximum location: X=-48.00, Y=-38.00

SAR 10g (W/Kg)	0.078721
SAR 1g (W/Kg)	0.105754

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1073	0.0876	0.0682	0.0524	0.0406	0.0298

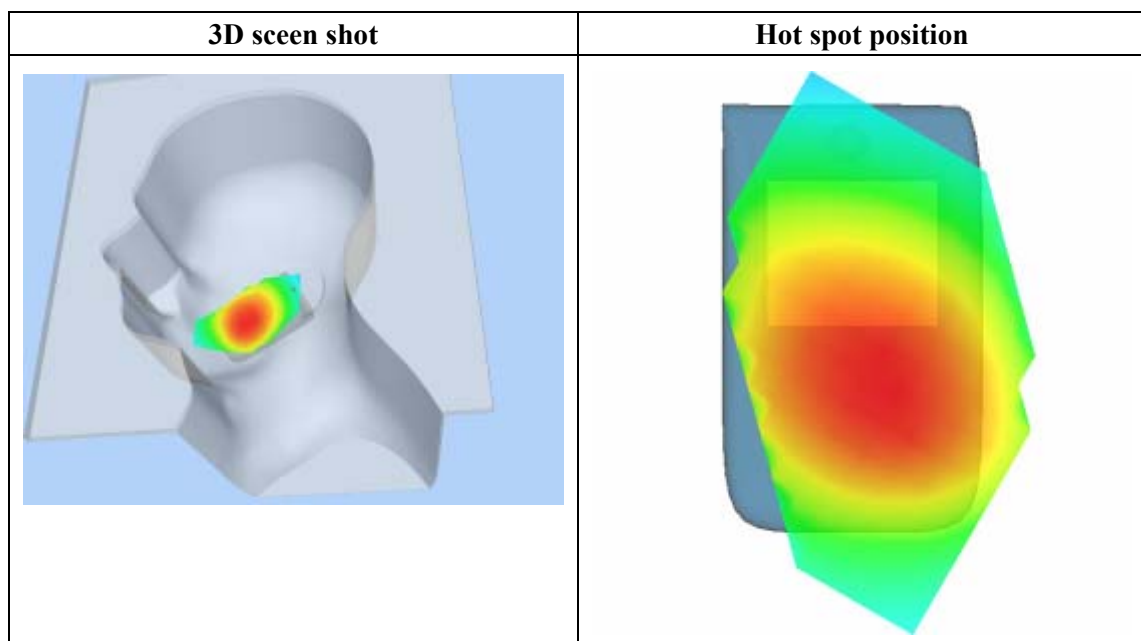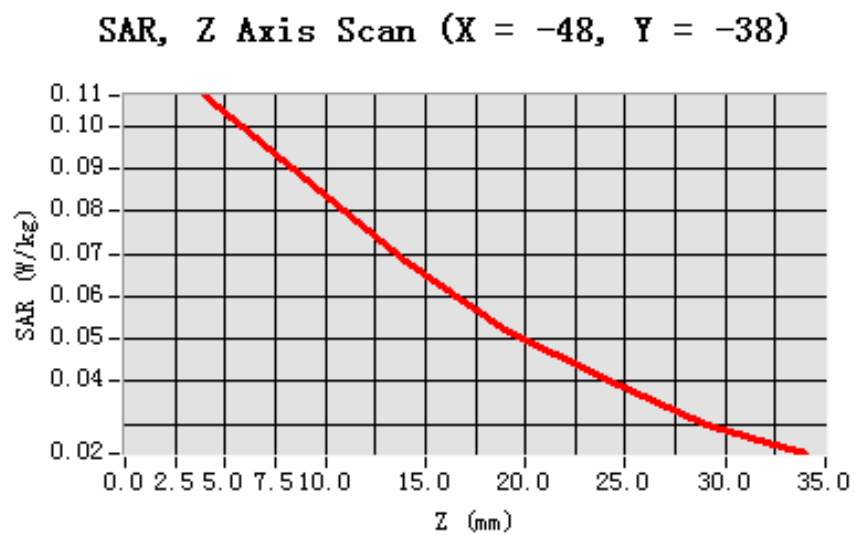

MEASUREMENT 2

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 42 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.599976
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001

Conductivity (S/m)	0.888655
Variation (%)	0.800000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8


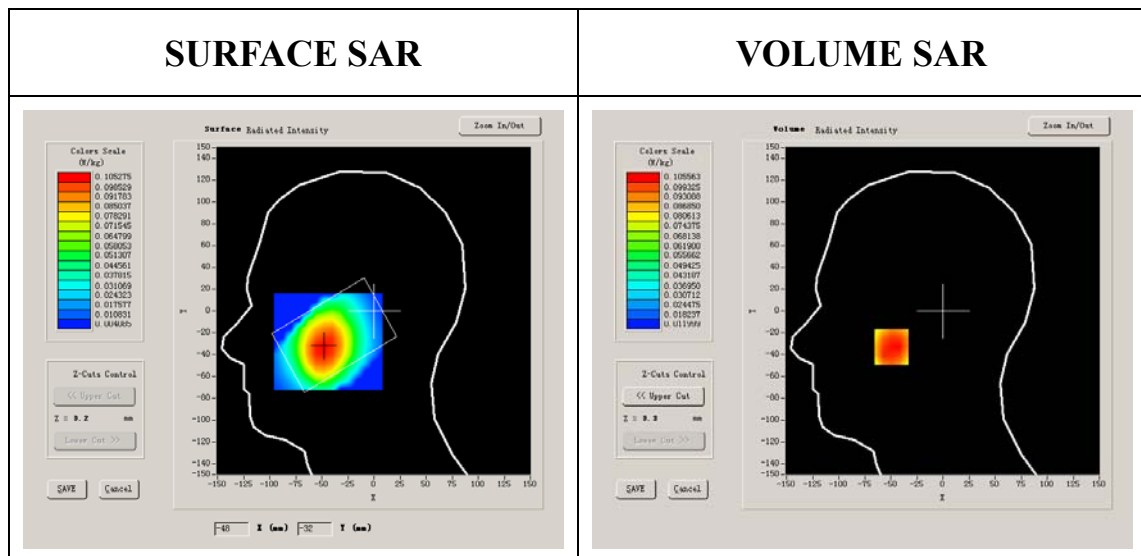


Maximum location: X=-49.00, Y=-33.00

SAR 10g (W/Kg)	0.076031
SAR 1g (W/Kg)	0.102703

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1047	0.0853	0.0662	0.0501	0.0375	0.0298

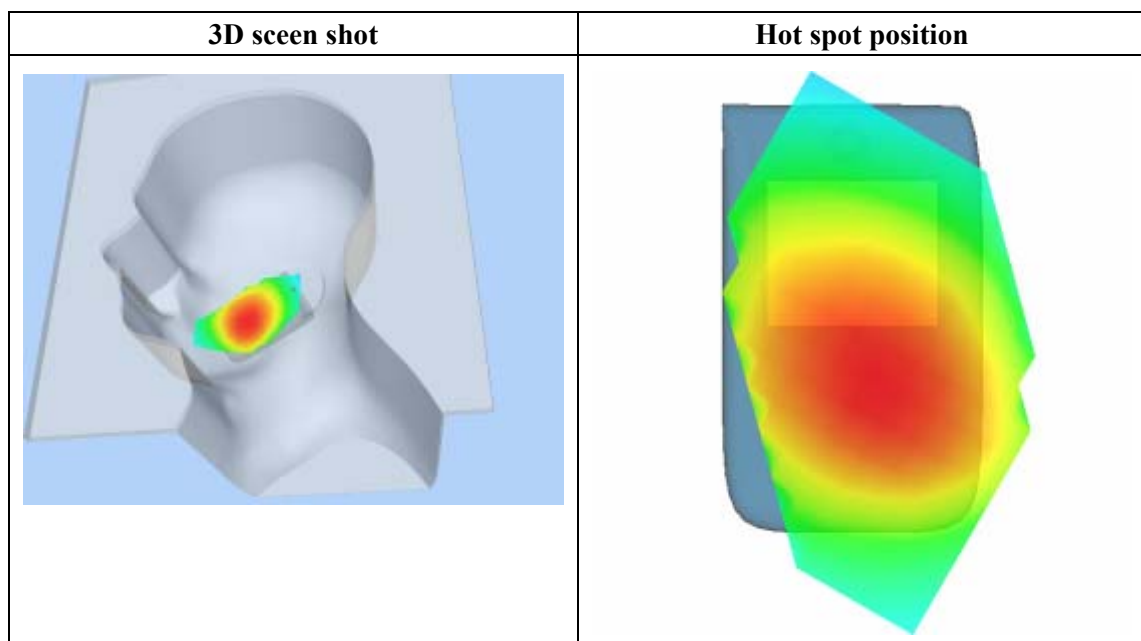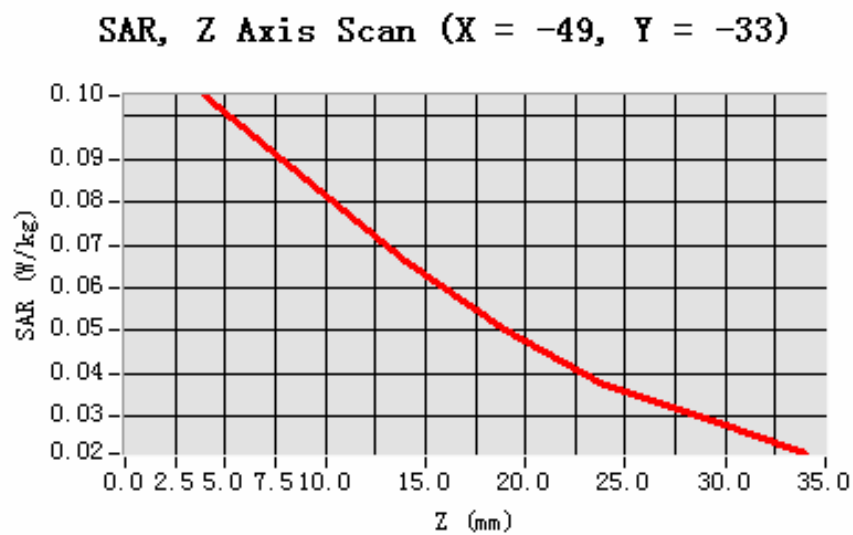

MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 42 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.799988
Relative permittivity (real part)	41.675999
Relative permittivity	18.967199

Conductivity (S/m)	0.894409
Variation (%)	-0.520000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

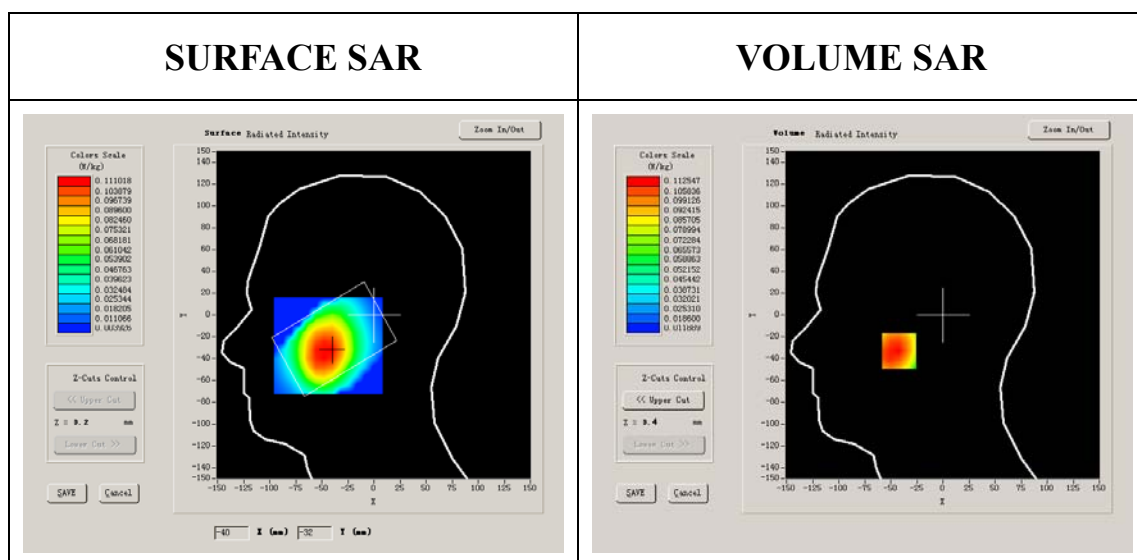


Maximum location: X=-42.00, Y=-33.00


SAR 10g (W/Kg)	0.080474
SAR 1g (W/Kg)	0.108815

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1125	0.0888	0.0692	0.0551	0.0408	0.0310

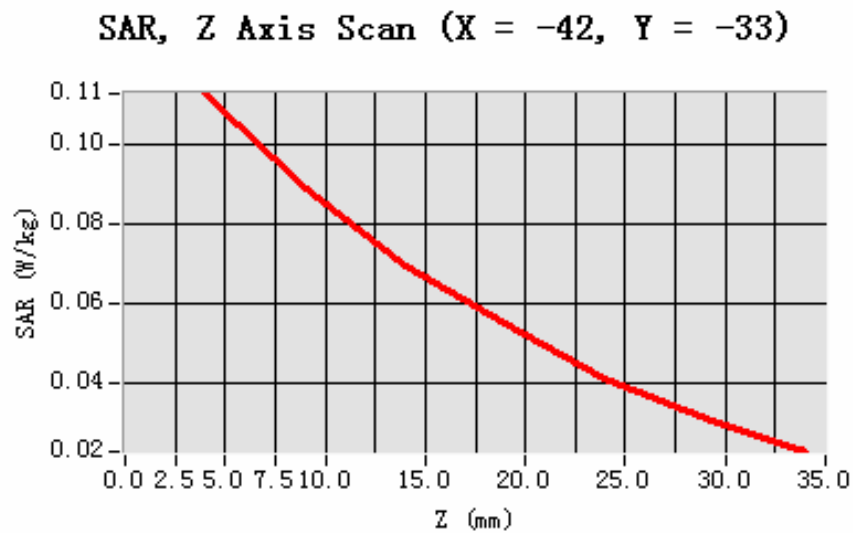

3D scene shot

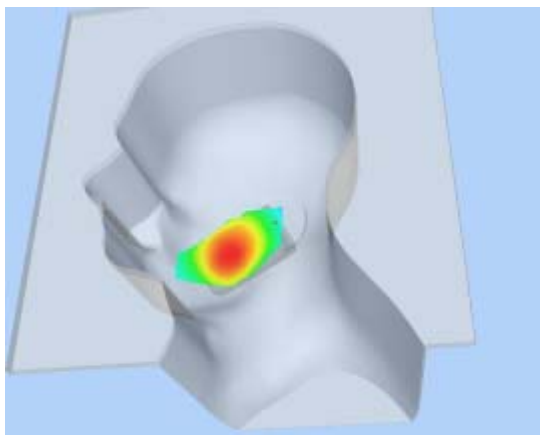

Hot spot position

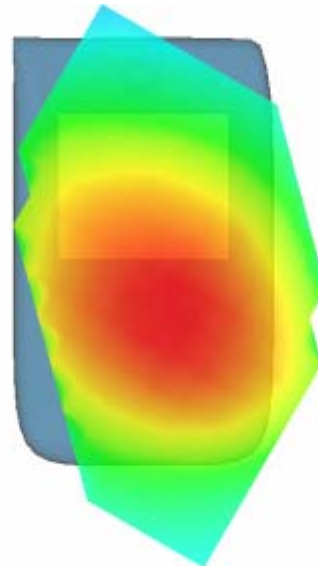

MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 33 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	41.790001
Relative permittivity	18.926250

Conductivity (S/m)	0.866612
Variation (%)	-2.010000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8


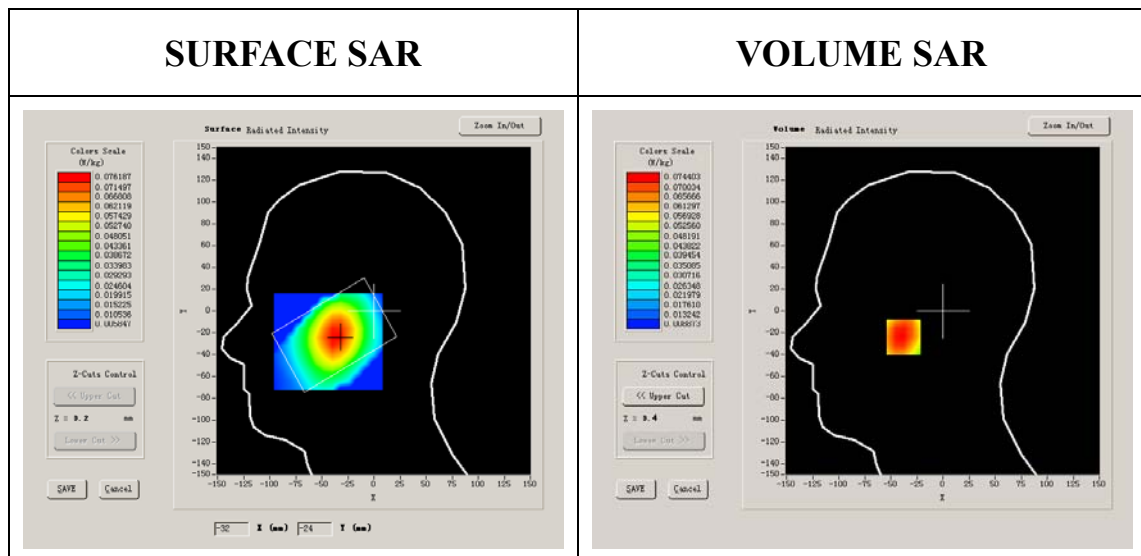


Maximum location: X=-34.00, Y=-24.00

SAR 10g (W/Kg)	0.052690
SAR 1g (W/Kg)	0.072562

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0744	0.0567	0.0426	0.0341	0.0263	0.0202

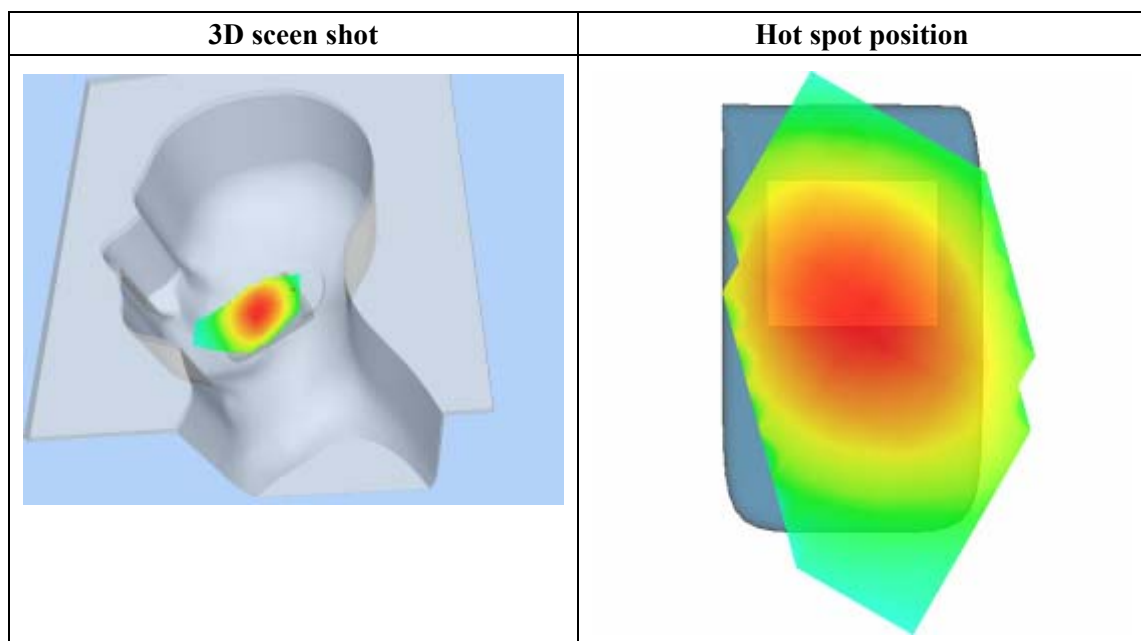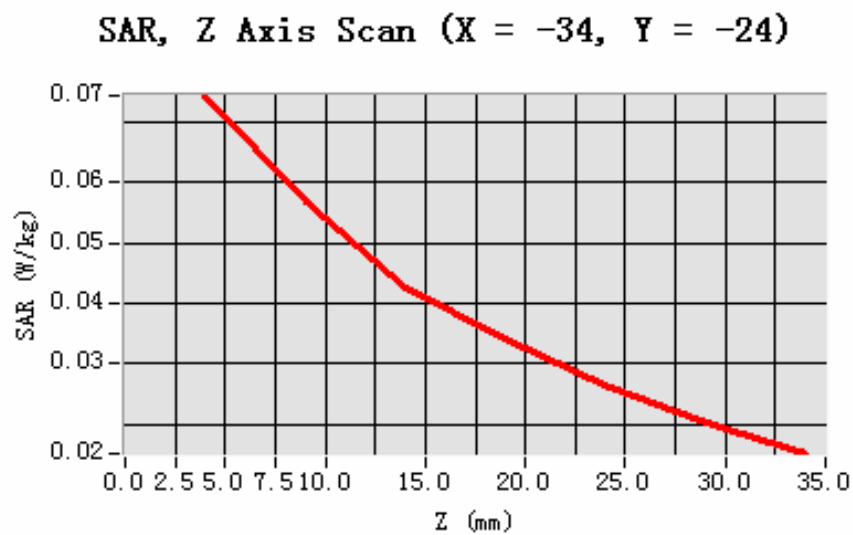

MEASUREMENT 5

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 39 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.599976
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001

Conductivity (S/m)	0.888655
Variation (%)	-2.530000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

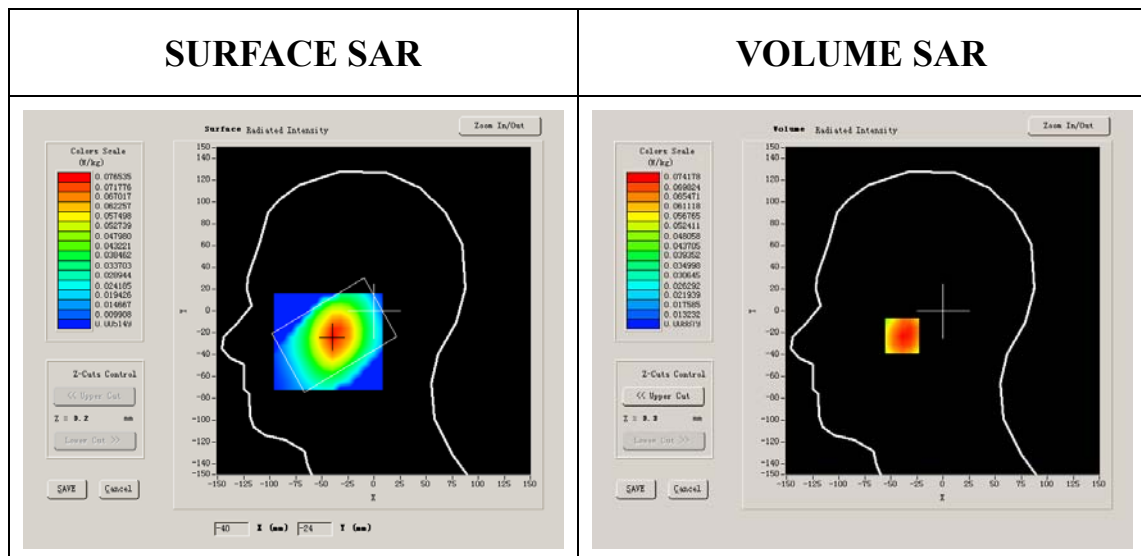


Maximum location: X=-39.00, Y=-23.00


SAR 10g (W/Kg)	0.052397
SAR 1g (W/Kg)	0.071842

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0742	0.0571	0.0438	0.0346	0.0260	0.0194

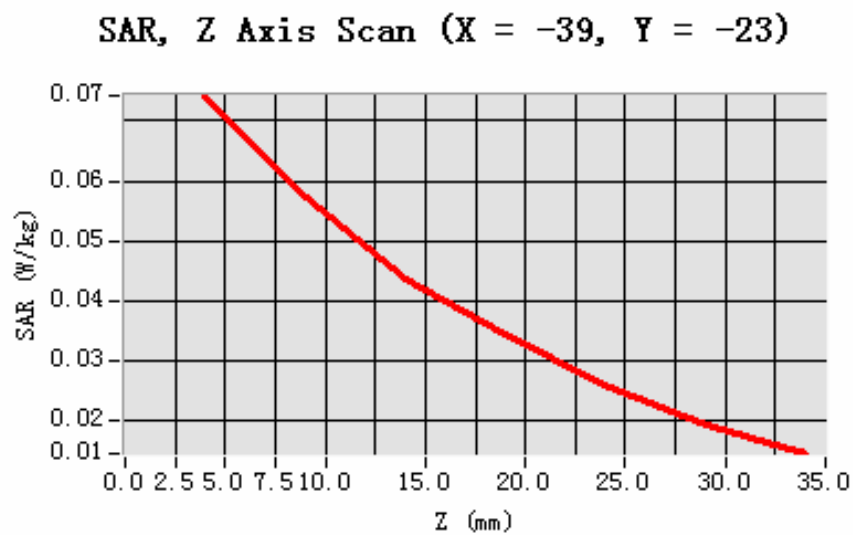

3D scene shot

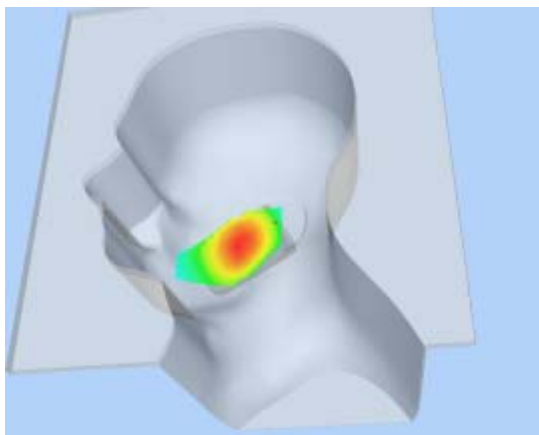

Hot spot position

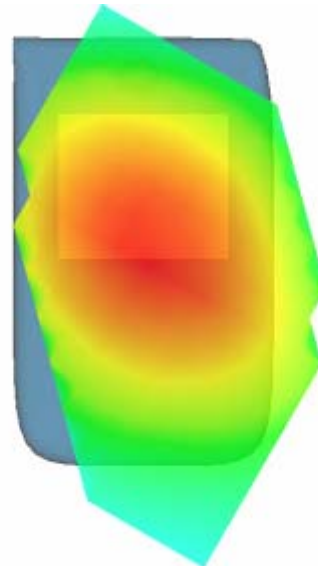

MEASUREMENT 6

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 39 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.799988
Relative permittivity (real part)	41.675999
Relative permittivity	18.967199

Conductivity (S/m)	0.894409
Variation (%)	-2.230000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8


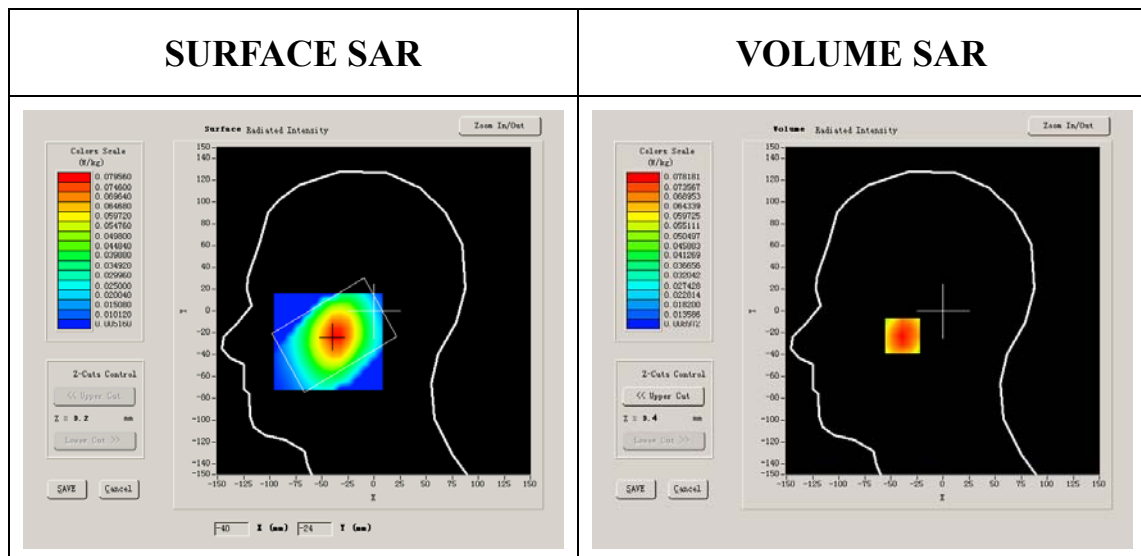


Maximum location: X=-37.00, Y=-23.00

SAR 10g (W/Kg)	0.054009
SAR 1g (W/Kg)	0.074979

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0782	0.0582	0.0458	0.0337	0.0266	0.0197

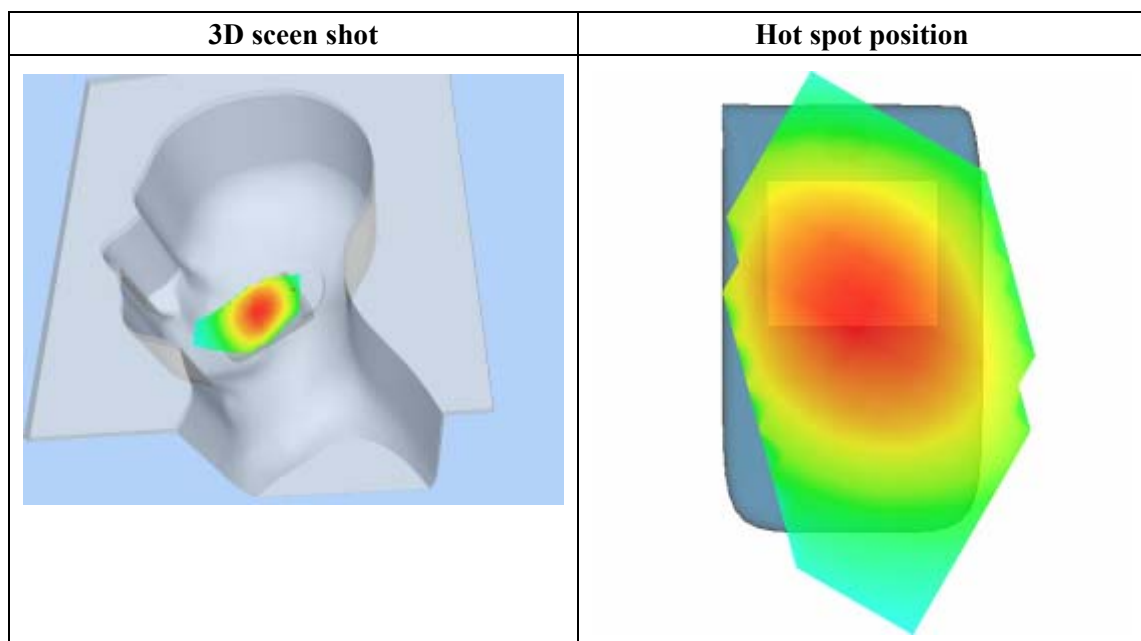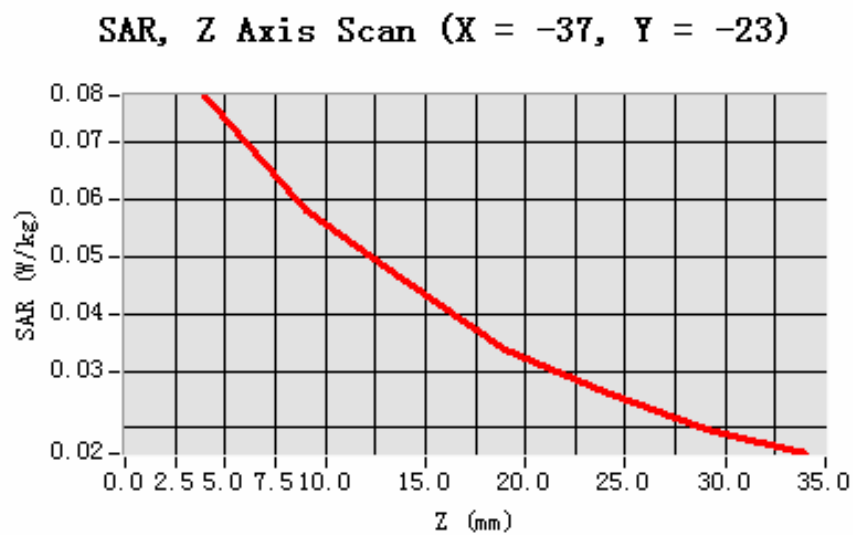

MEASUREMENT 7

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 44 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	41.790001
Relative permittivity	18.926250

Conductivity (S/m)	0.866612
Variation (%)	-0.960000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8


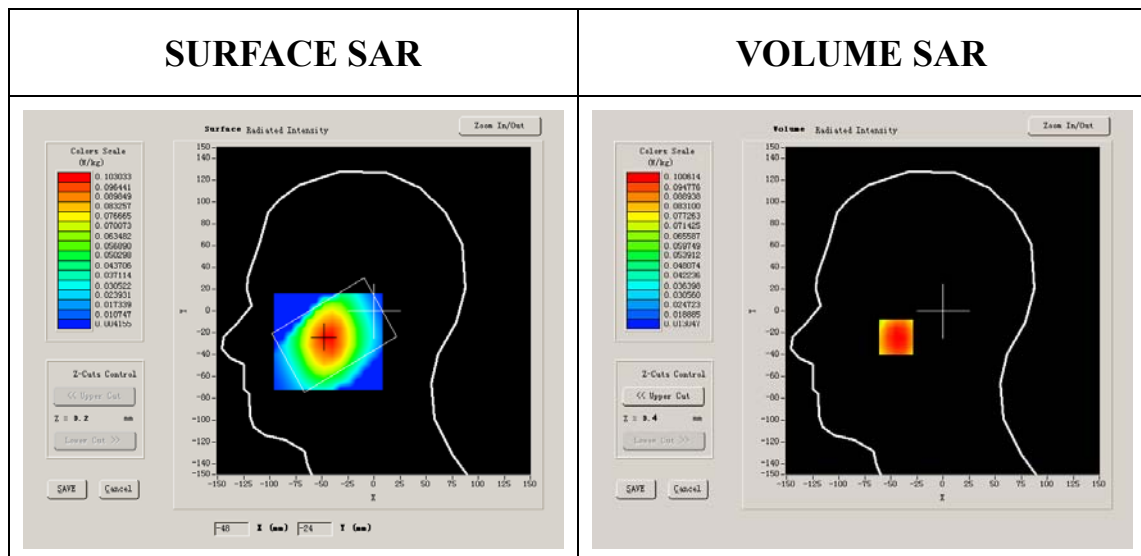


Maximum location: X=-45.00, Y=-24.00

SAR 10g (W/Kg)	0.072694
SAR 1g (W/Kg)	0.098286

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1006	0.0790	0.0623	0.0482	0.0370	0.0273

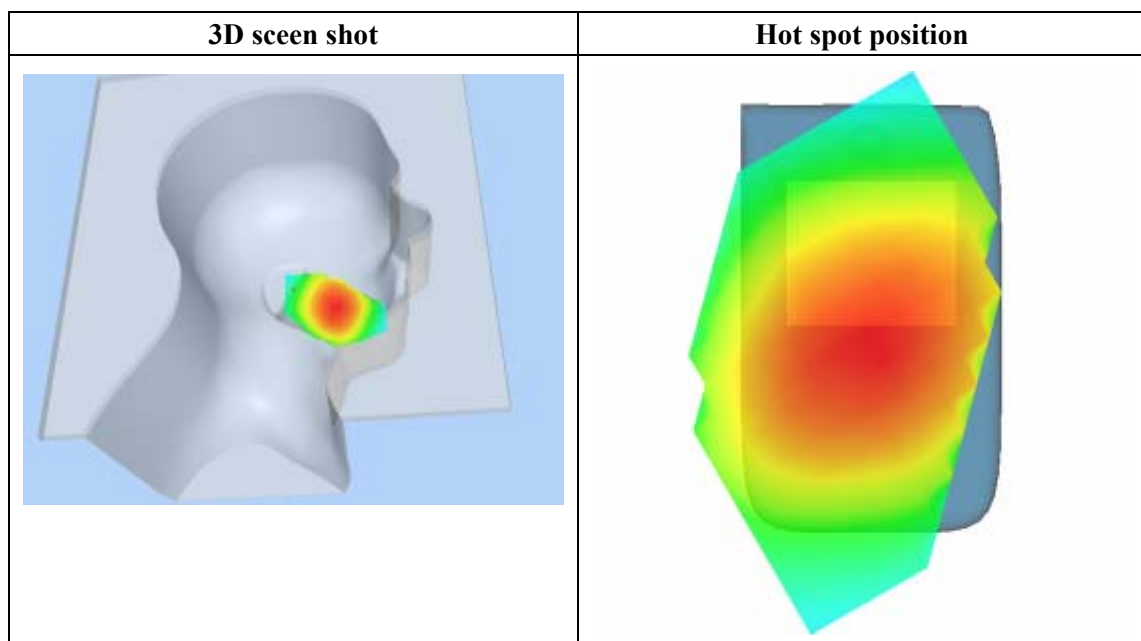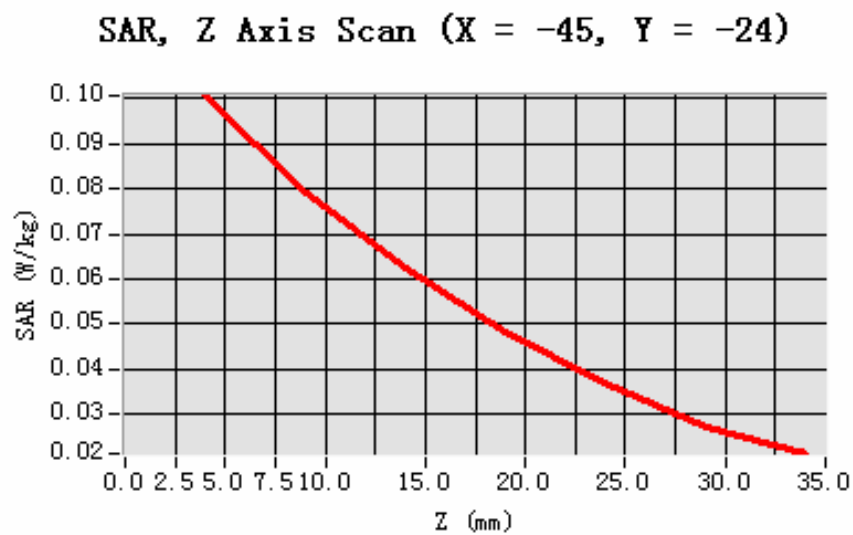

MEASUREMENT 8

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 46 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.599976
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001

Conductivity (S/m)	0.888655
Variation (%)	-0.540000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8


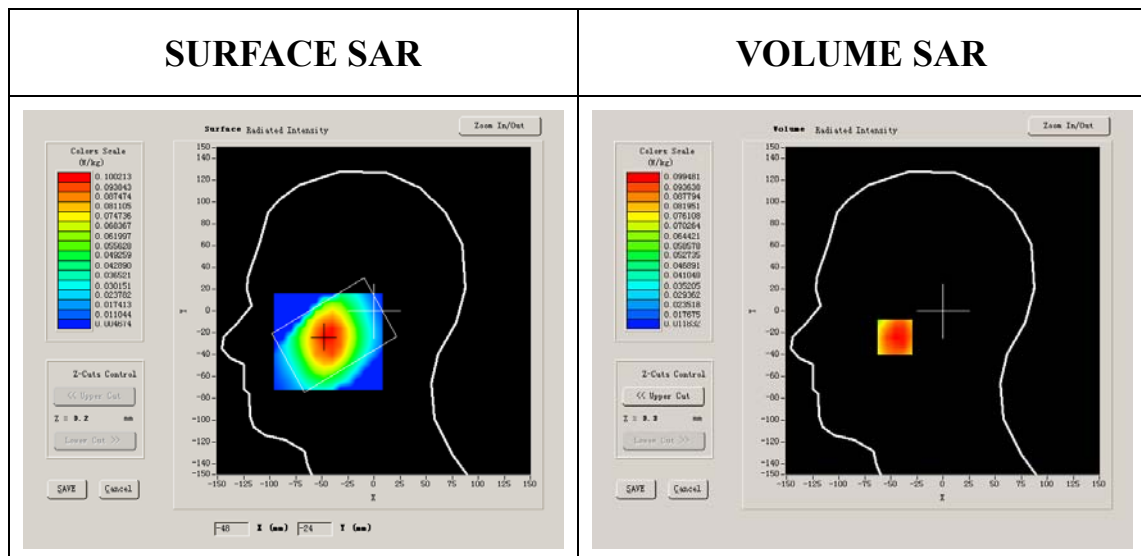


Maximum location: X=-46.00, Y=-24.00

SAR 10g (W/Kg)	0.071111
SAR 1g (W/Kg)	0.096423

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0995	0.0785	0.0593	0.0467	0.0342	0.0253

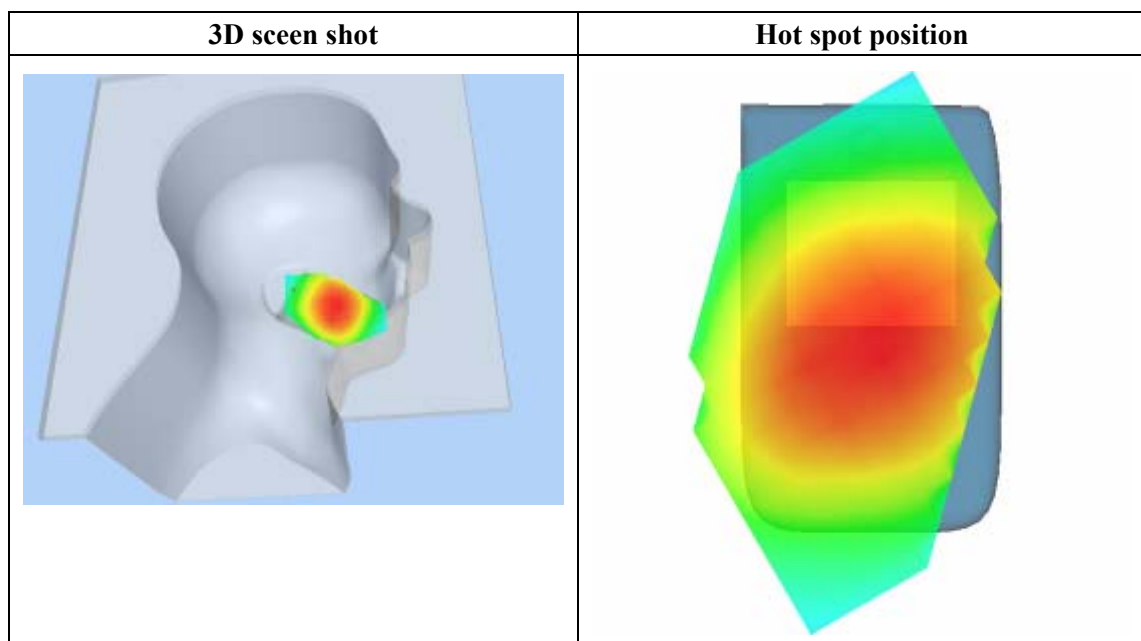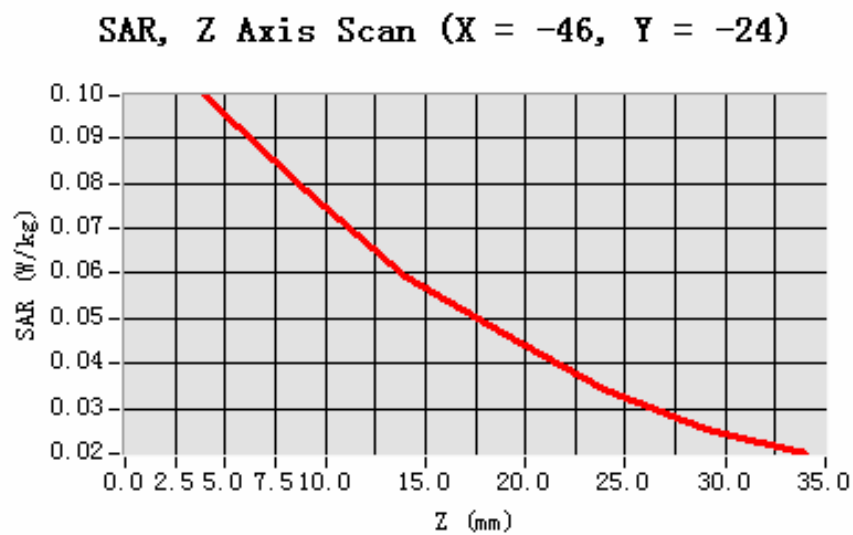

MEASUREMENT 9

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 34 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.799988
Relative permittivity (real part)	41.675999
Relative permittivity	18.967199

Conductivity (S/m)	0.894409
Variation (%)	1.570000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8


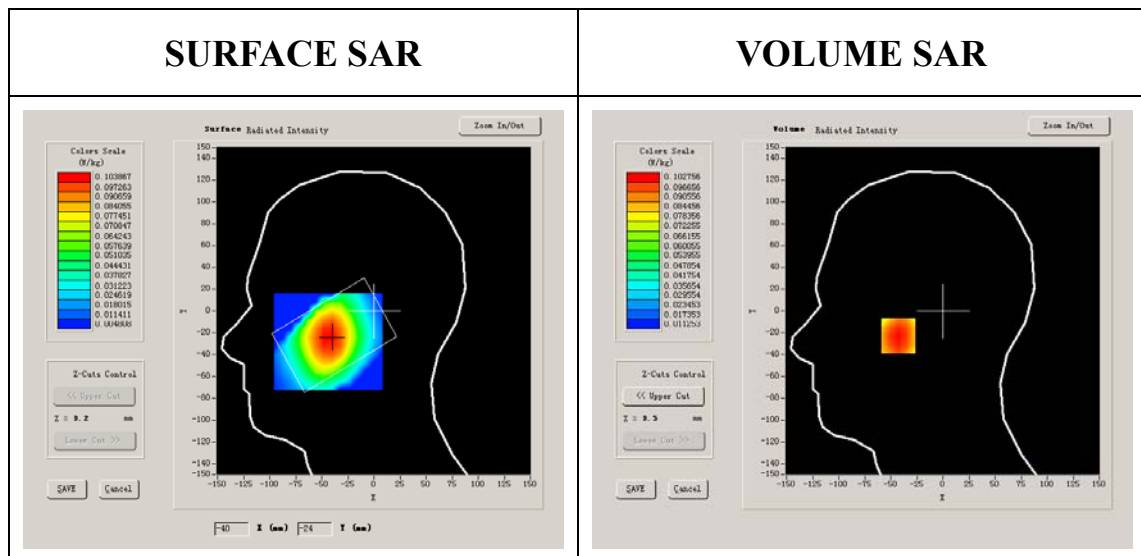


Maximum location: X=-43.00, Y=-23.00

SAR 10g (W/Kg)	0.073014
SAR 1g (W/Kg)	0.098590

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1028	0.0821	0.0635	0.0472	0.0357	0.0265

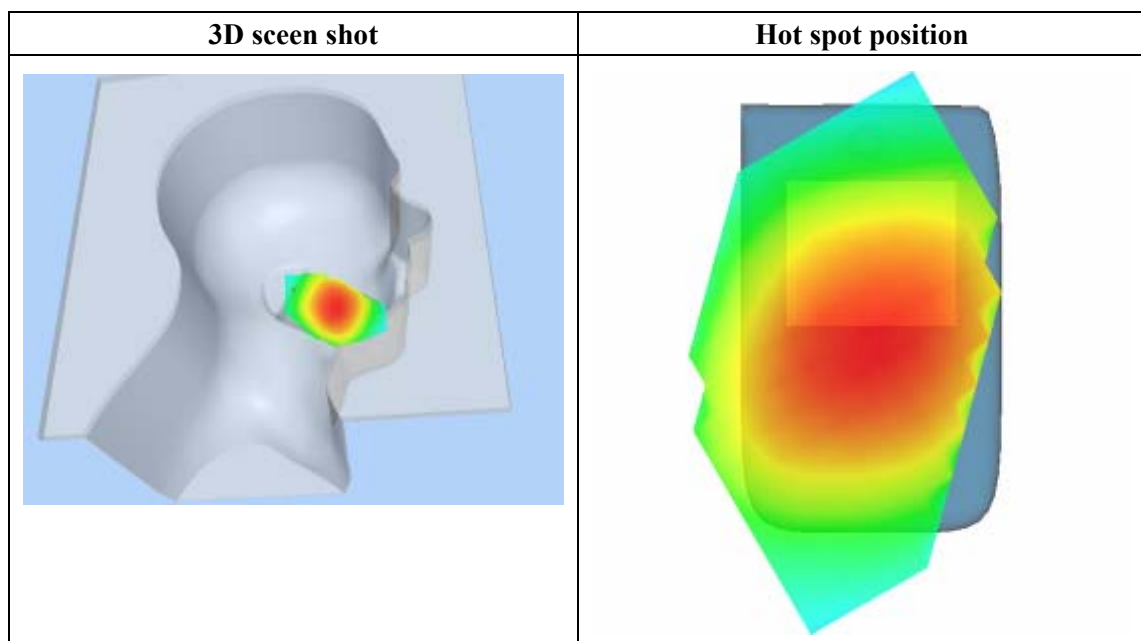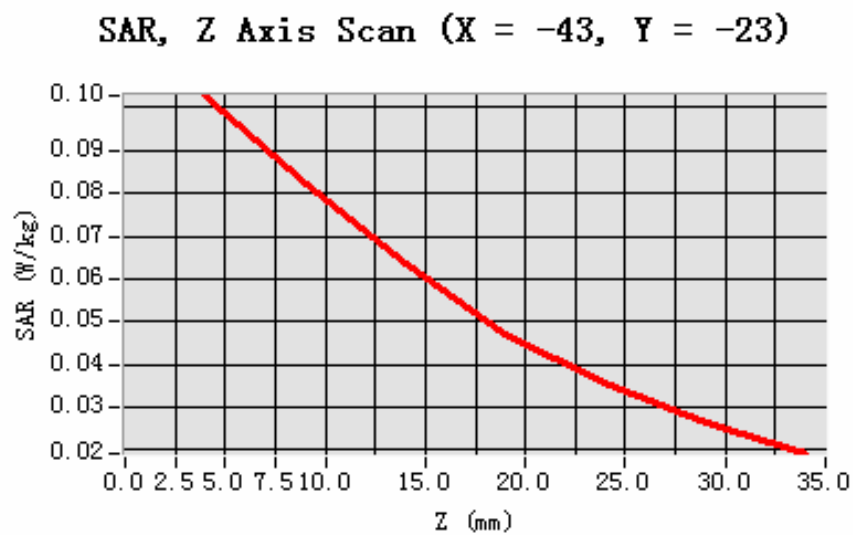

MEASUREMENT 10

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 33 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	41.790001
Relative permittivity	18.926250

Conductivity (S/m)	0.866612
Variation (%)	-1.120000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8


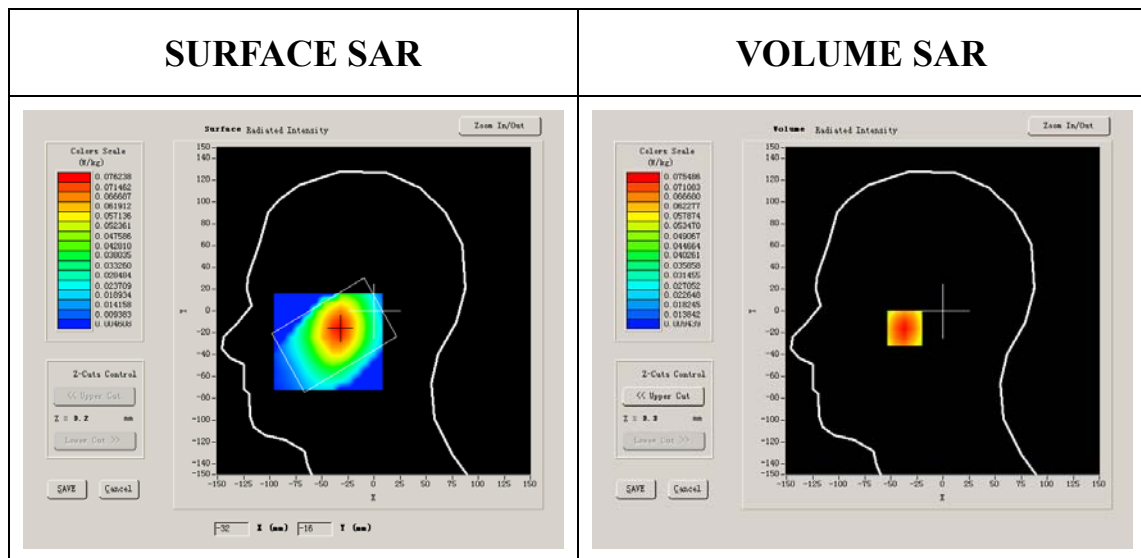


Maximum location: X=-33.00, Y=-16.00

SAR 10g (W/Kg)	0.052052
SAR 1g (W/Kg)	0.072269

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0755	0.0562	0.0433	0.0332	0.0271	0.0209

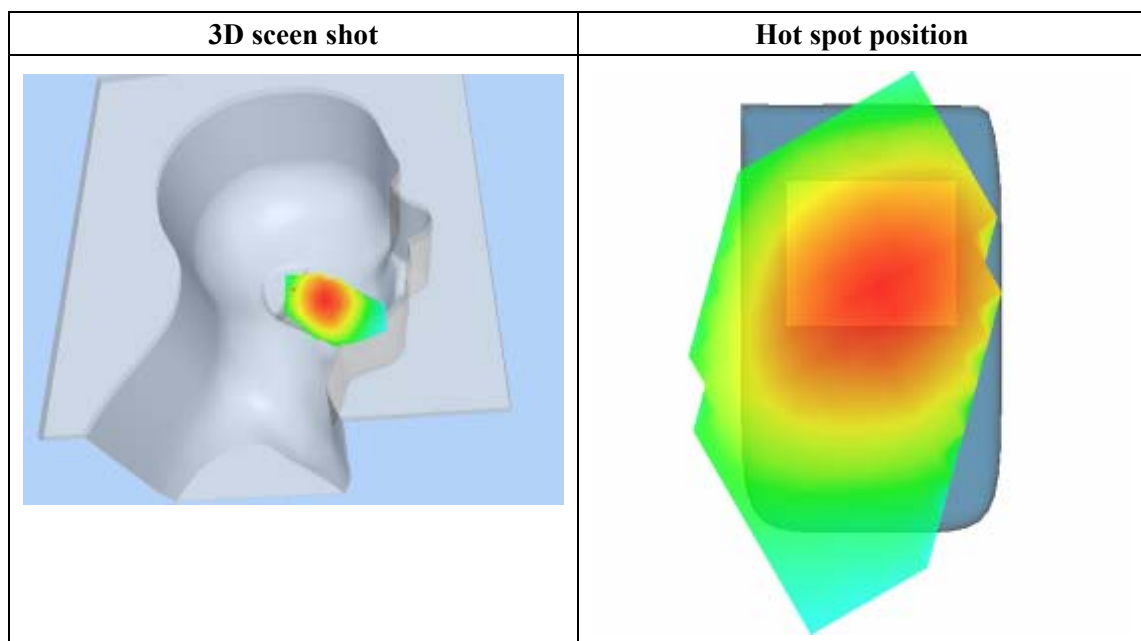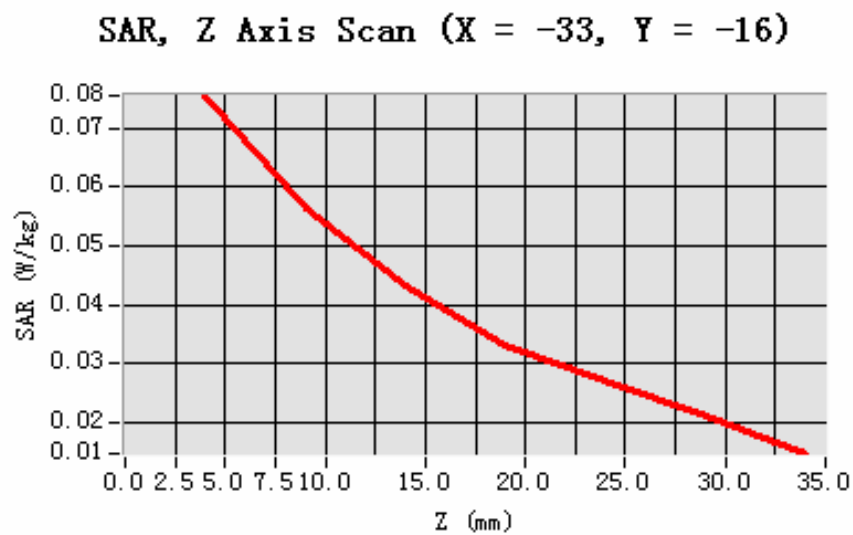

MEASUREMENT 11

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 31 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.599976
Relative permittivity (real part)	40.669998
Relative permittivity	19.120001

Conductivity (S/m)	0.888655
Variation (%)	-1.020000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

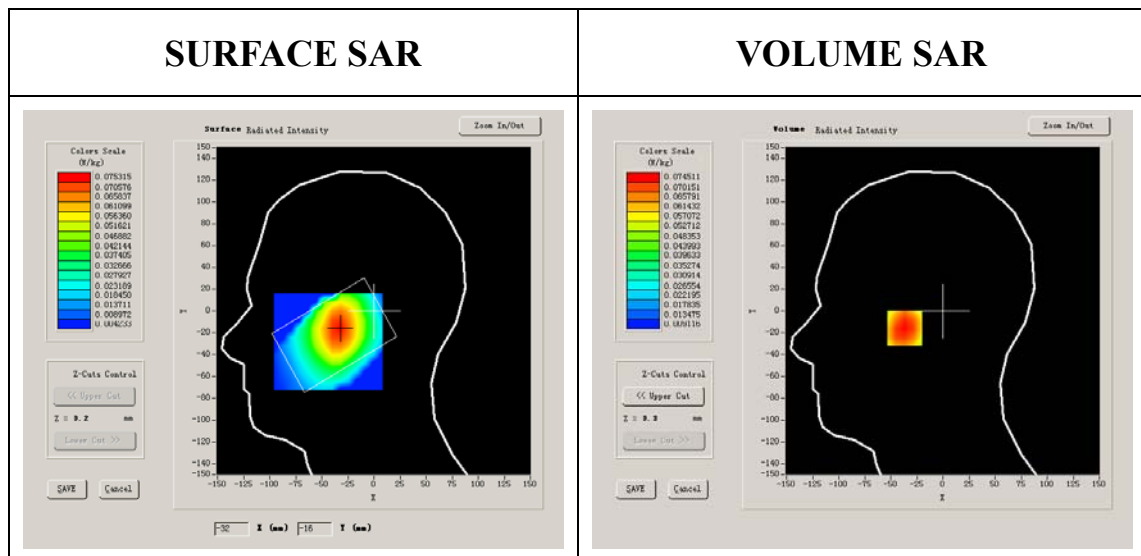


Maximum location: X=-33.00, Y=-16.00


SAR 10g (W/Kg)	0.051880
SAR 1g (W/Kg)	0.071510

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0745	0.0569	0.0432	0.0326	0.0253	0.0199

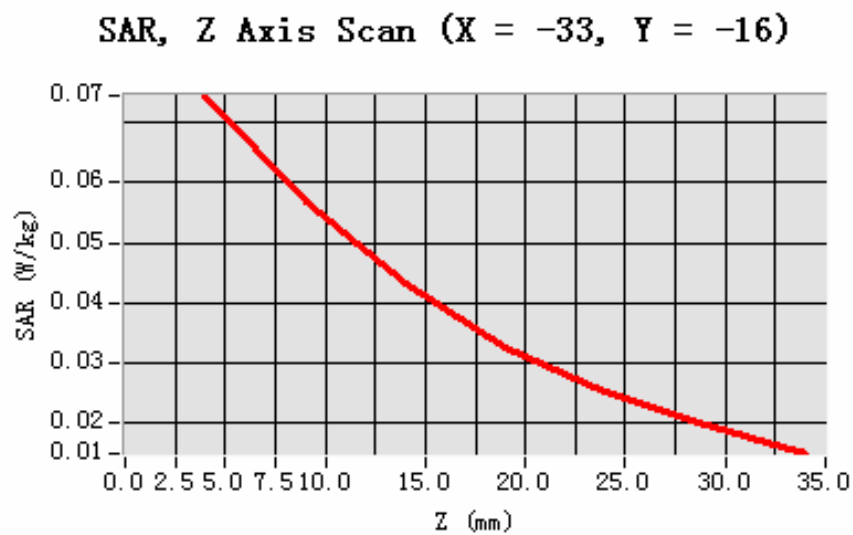

3D scene shot

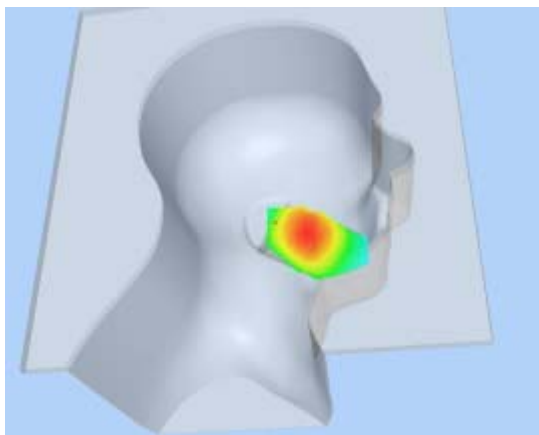

Hot spot position

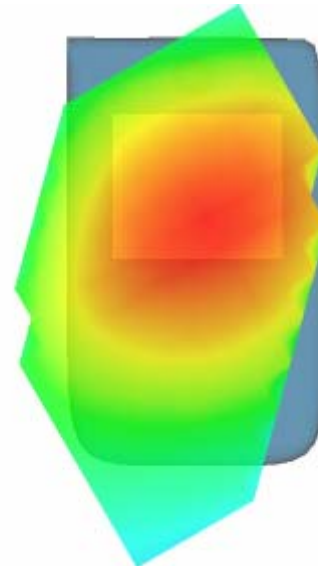

MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 37 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.799988
Relative permittivity (real part)	41.675999
Relative permittivity	18.967199

Conductivity (S/m)	0.894409
Variation (%)	-2.040000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

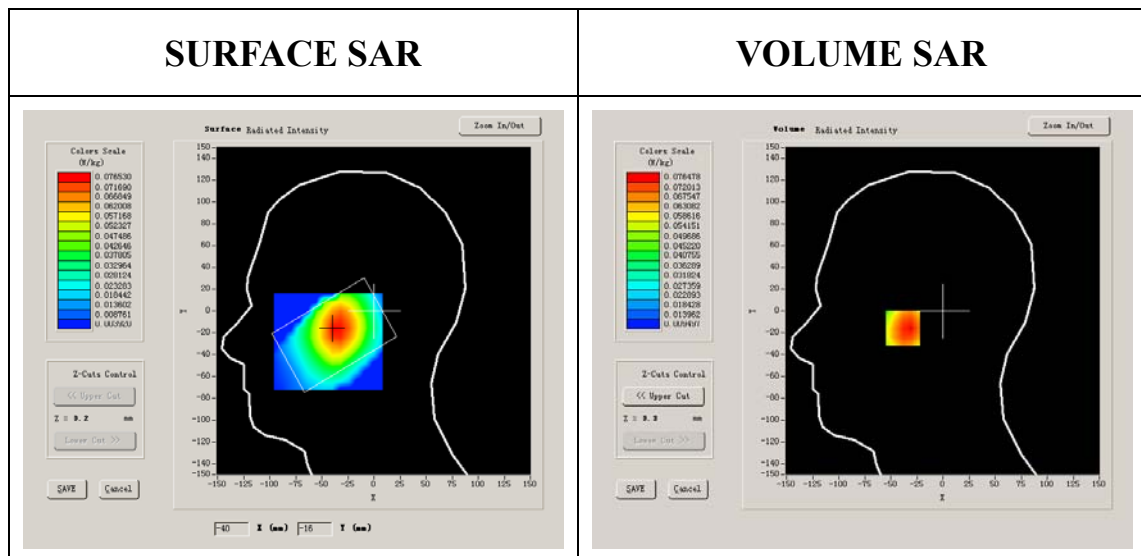


Maximum location: X=-38.00, Y=-16.00

SAR 10g (W/Kg)	0.053191
SAR 1g (W/Kg)	0.074020


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0742	0.0572	0.0442	0.0343	0.0255	0.0193


SAR, Z Axis Scan (X = -38, Y = -16)

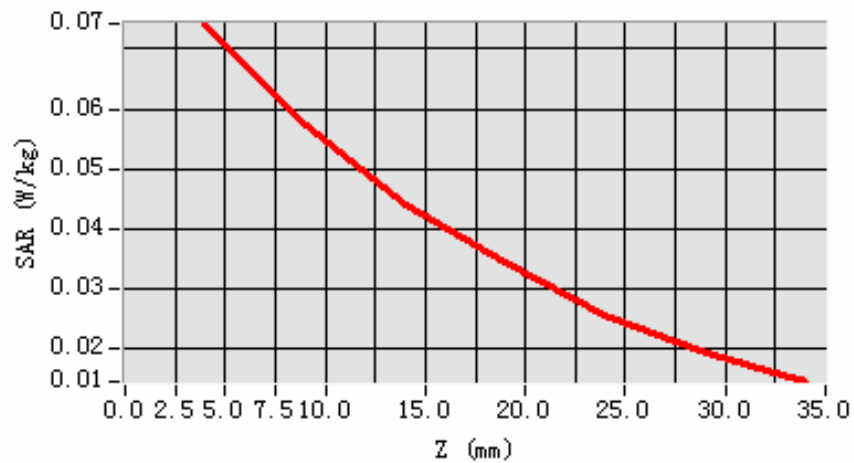

3D scene shot

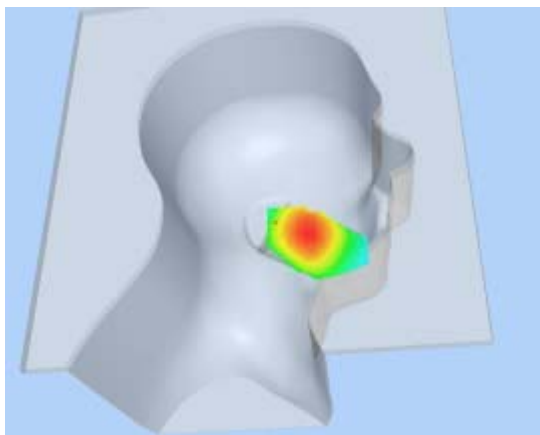

Hot spot position

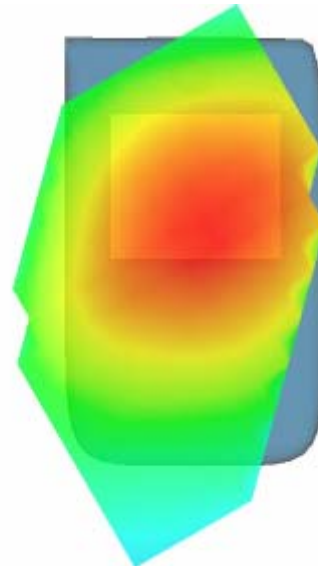

MEASUREMENT 13

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 42 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.799988
Relative permittivity (real part)	41.675999
Relative permittivity	18.967199

Conductivity (S/m)	0.894409
Variation (%)	-0.520000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:8

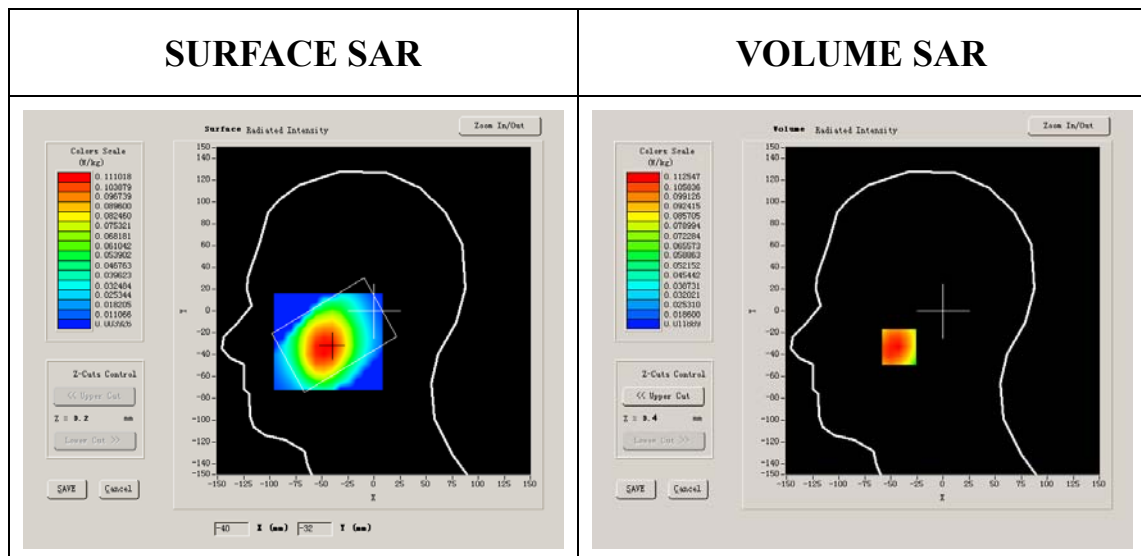


Maximum location: X=-42.00, Y=-33.00


SAR 10g (W/Kg)	0.088489
SAR 1g (W/Kg)	0.132662

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1125	0.0888	0.0692	0.0551	0.0408	0.0310

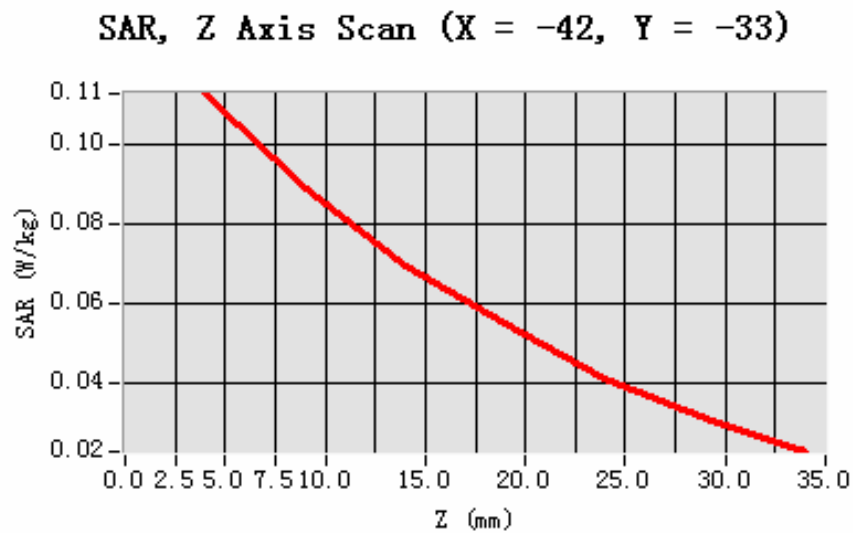

3D scene shot

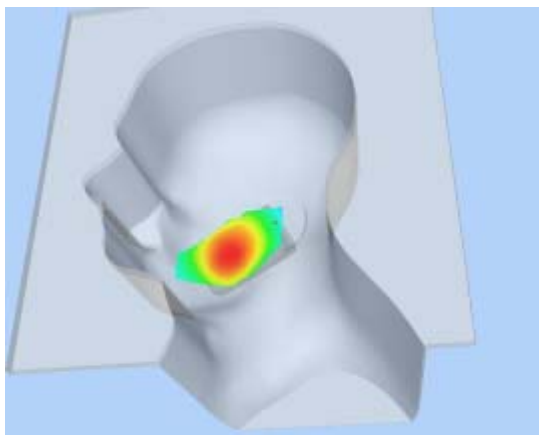

Hot spot position

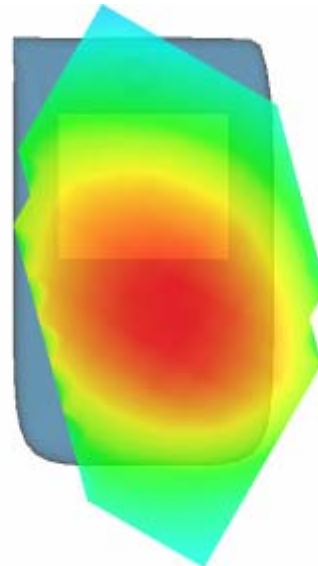

MEASUREMENT 14

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550

Conductivity (S/m)	0.974596
Variation (%)	-1.820000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

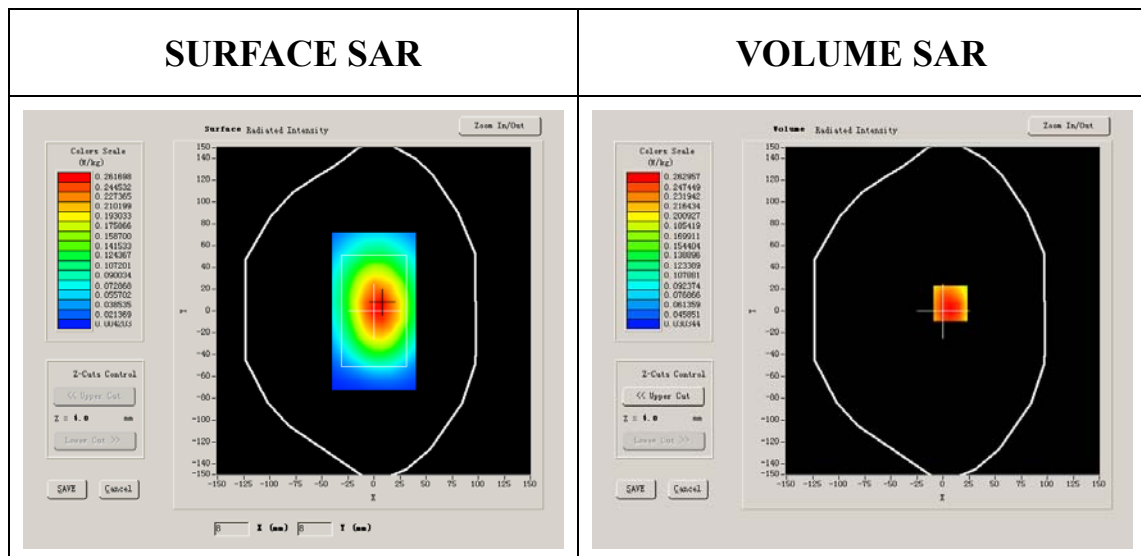


Maximum location: X=7.00, Y=7.00

SAR 10g (W/Kg)	0.201613
SAR 1g (W/Kg)	0.288367


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2929	0.2139	0.1563	0.1151	0.0847	0.0629


SAR, Z Axis Scan (X = 7, Y = 7)

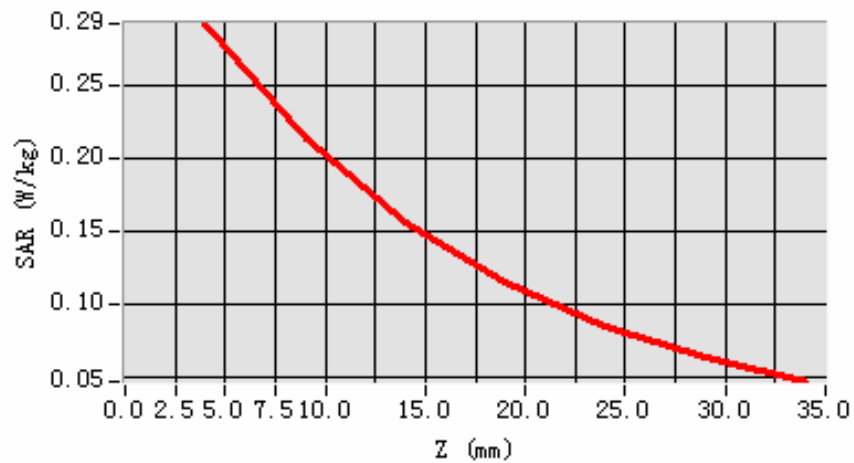

3D scene shot

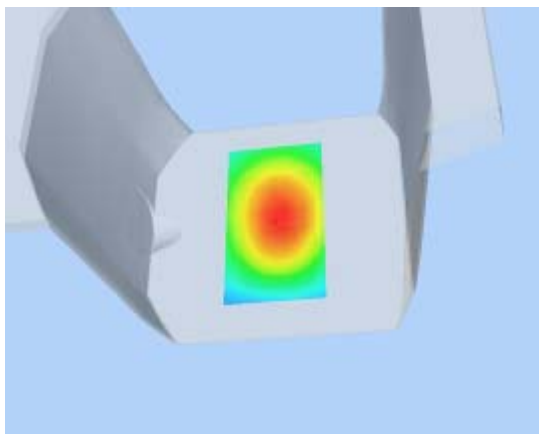

Hot spot position

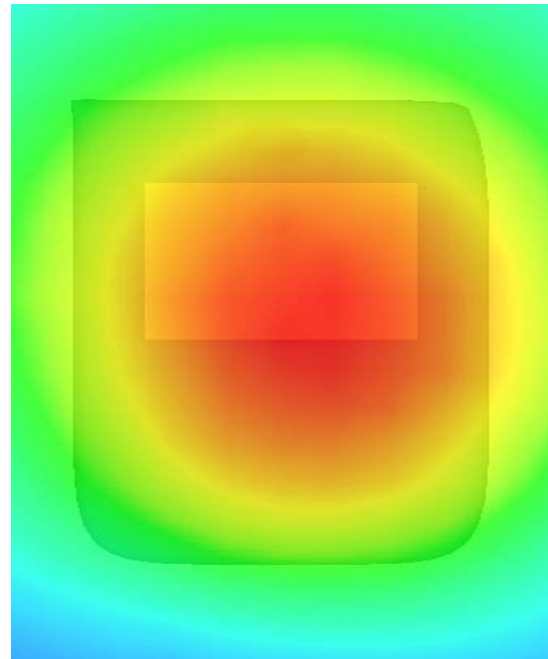

MEASUREMENT 15

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.599976
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999

Conductivity (S/m)	1.009033
Variation (%)	-2.630000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

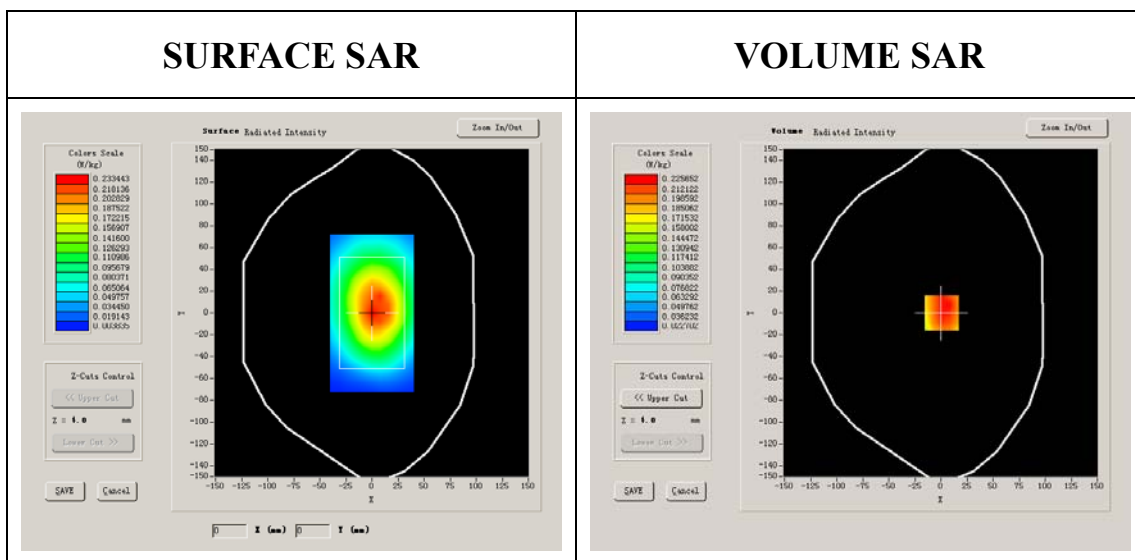


Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	0.174852
SAR 1g (W/Kg)	0.247659


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2544	0.1826	0.1361	0.1009	0.0708	0.0527


SAR, Z Axis Scan (X = 1, Y = 0)

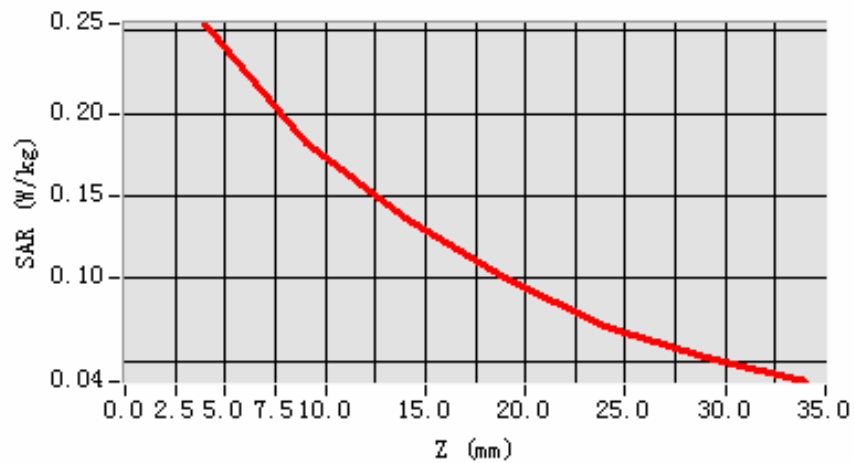

3D scene shot

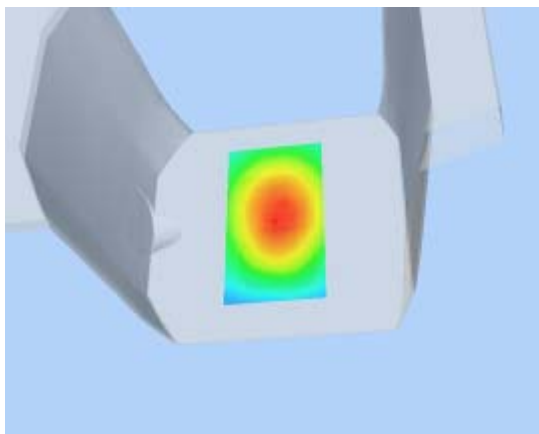

Hot spot position

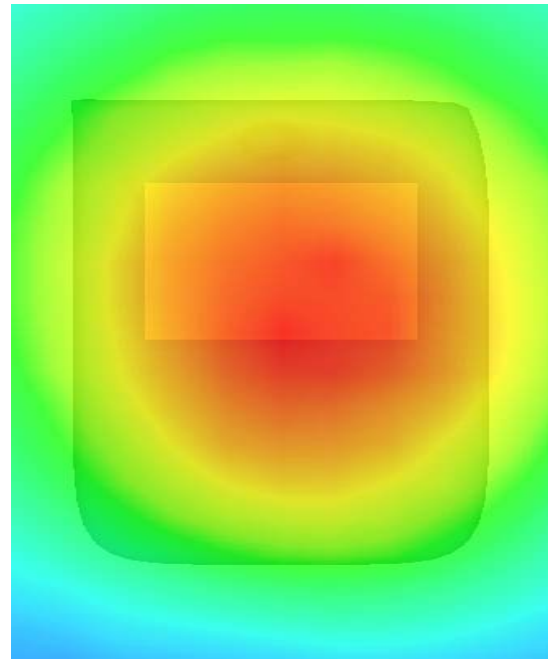

MEASUREMENT 16

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.799988
Relative permittivity (real part)	54.014999
Relative permittivity	21.332850

Conductivity (S/m)	1.005962
Variation (%)	-0.700000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

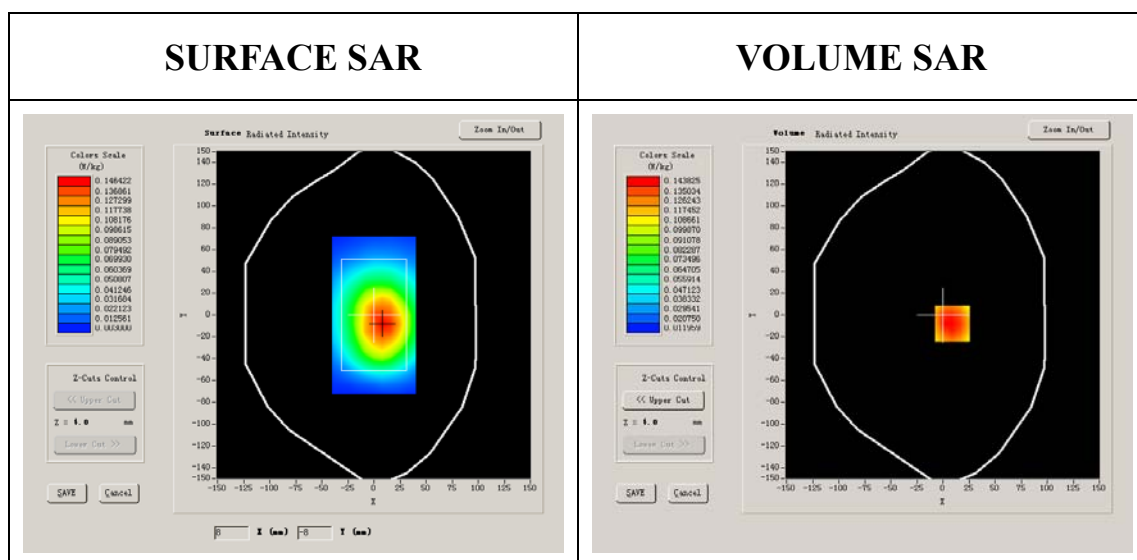


Maximum location: X=9.00, Y=-8.00

SAR 10g (W/Kg)	0.108586
SAR 1g (W/Kg)	0.158004


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1618	0.1164	0.0847	0.0600	0.0413	0.0299


SAR, Z Axis Scan (X = 9, Y = -8)

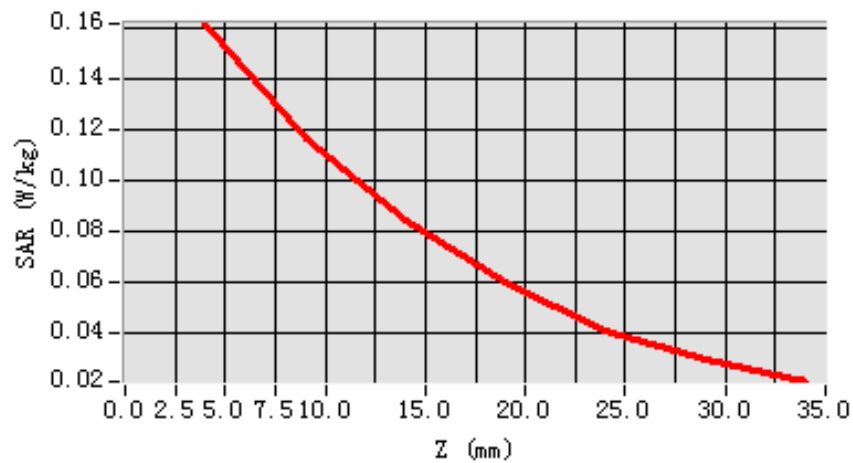

3D scene shot

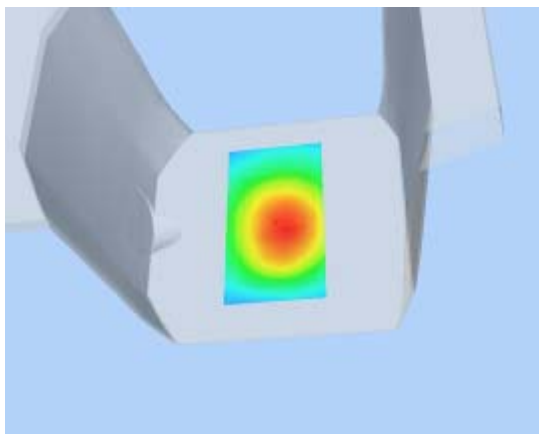

Hot spot position

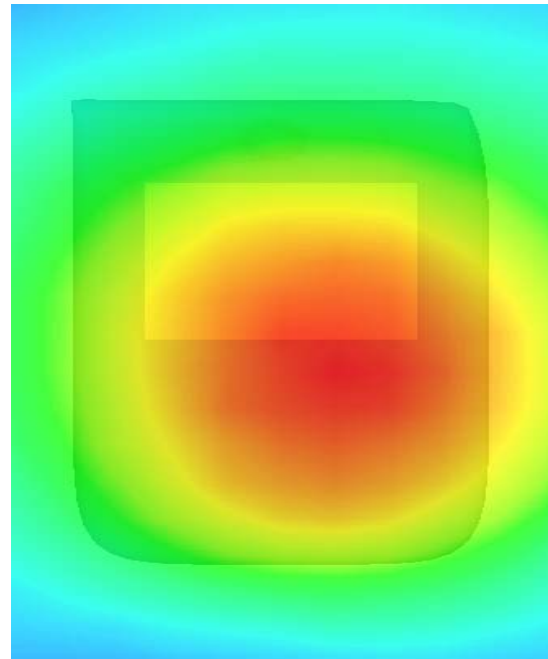

MEASUREMENT 17

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550

Conductivity (S/m)	0.974596
Variation (%)	0.040000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

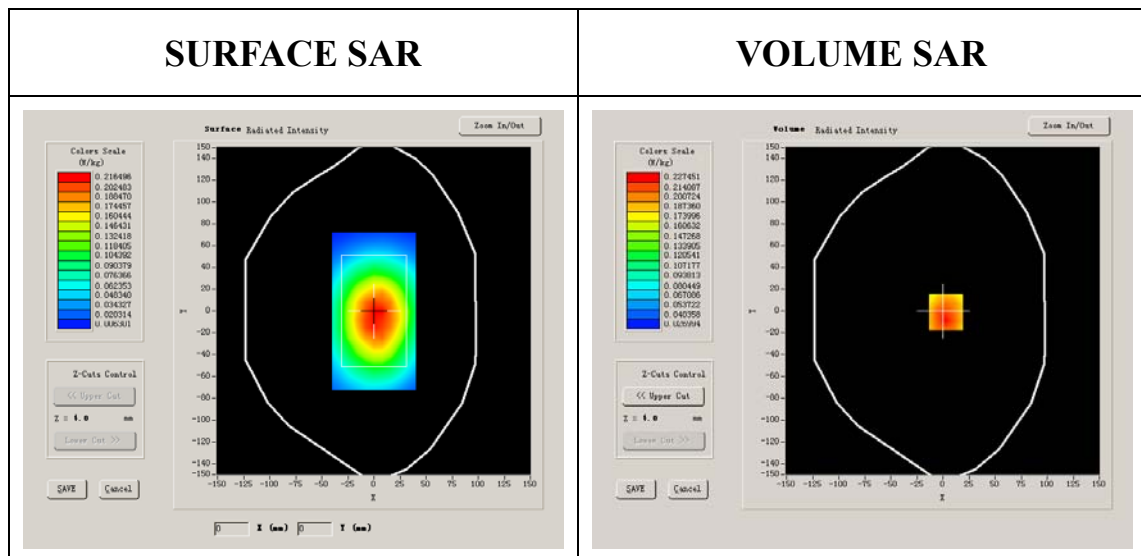


Maximum location: X=3.00, Y=-1.00

SAR 10g (W/Kg)	0.171856
SAR 1g (W/Kg)	0.244969


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2423	0.1826	0.1380	0.1043	0.0755	0.0545


SAR, Z Axis Scan (X = 3, Y = -1)

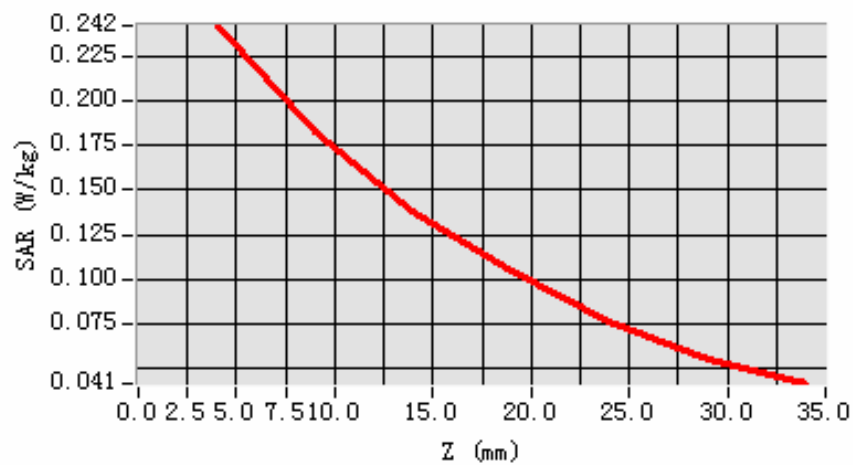

3D scene shot

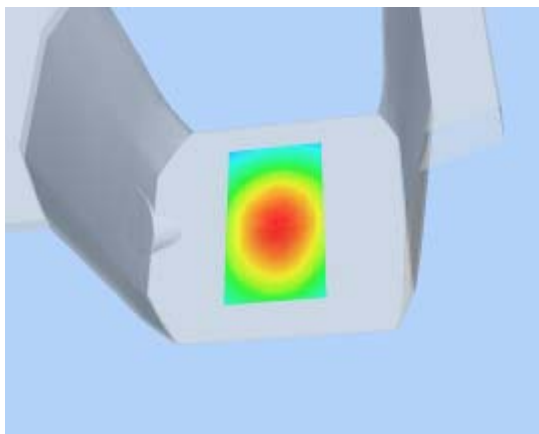

Hot spot position

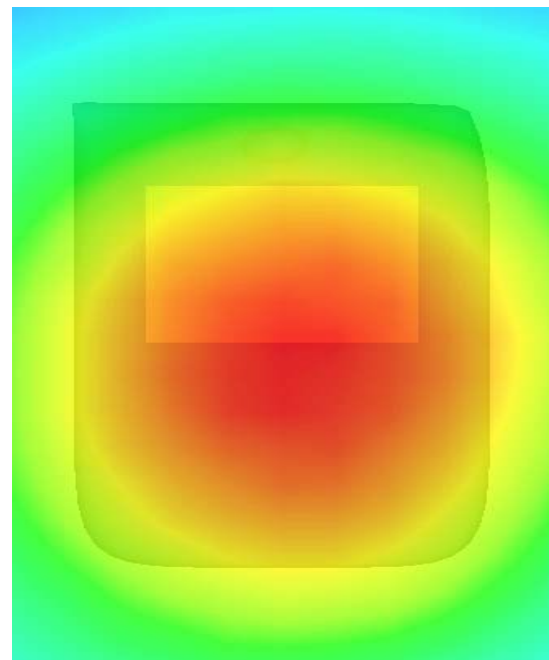

MEASUREMENT 18

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550

Conductivity (S/m)	0.974596
Variation (%)	0.310000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

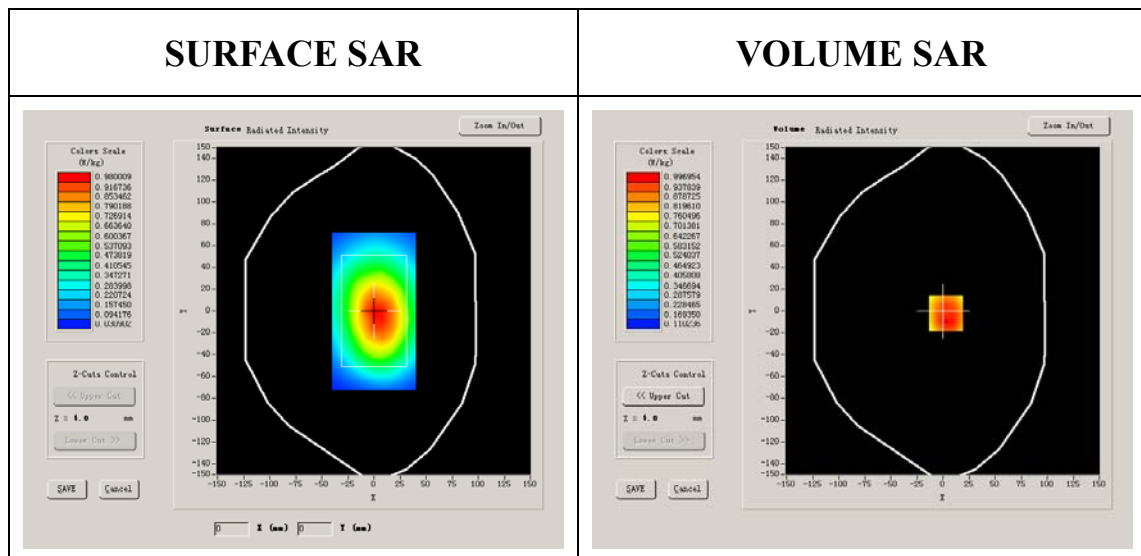


Maximum location: X=3.00, Y=-2.00

SAR 10g (W/Kg)	0.762363
SAR 1g (W/Kg)	1.079616


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0765	0.8297	0.5885	0.4239	0.3244	0.2407


SAR, Z Axis Scan (X = 3, Y = -2)

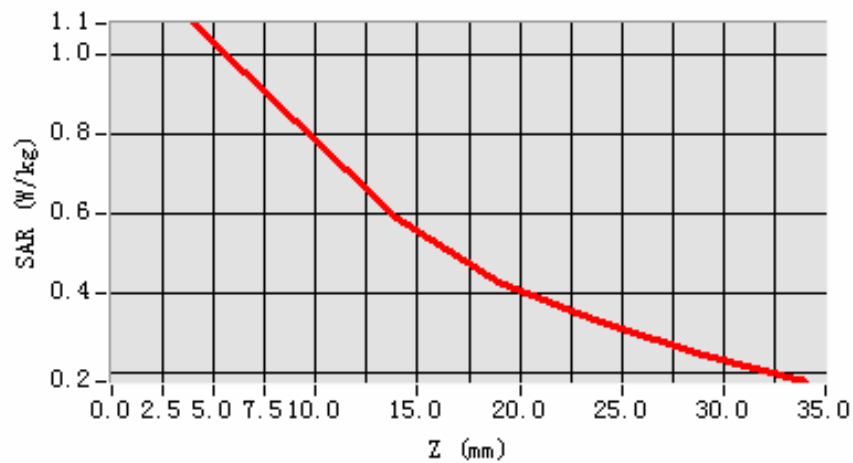

3D scene shot

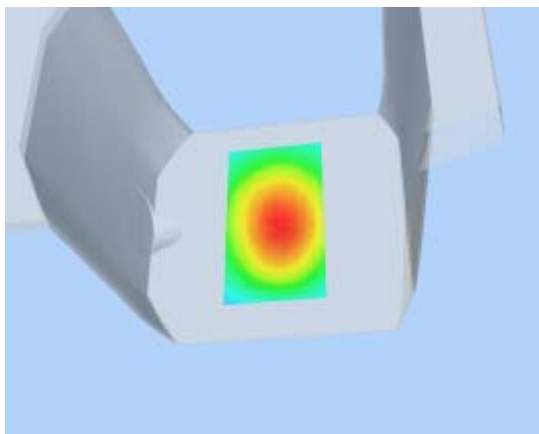

Hot spot position

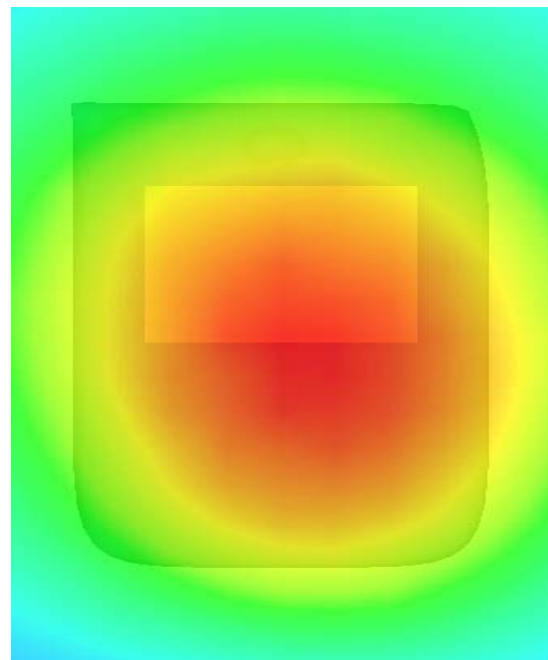

MEASUREMENT 19

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	EDGE

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550

Conductivity (S/m)	0.974596
Variation (%)	0.310000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

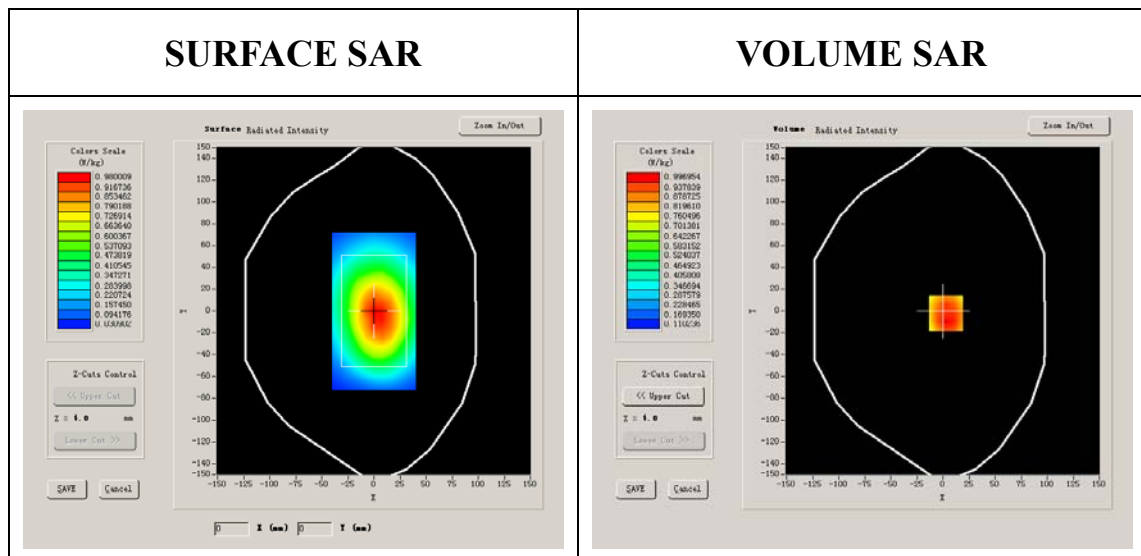


Maximum location: X=3.00, Y=-2.00

SAR 10g (W/Kg)	0.573117
SAR 1g (W/Kg)	0.994637


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0765	0.8297	0.5885	0.4239	0.3244	0.2407


SAR, Z Axis Scan (X = 3, Y = -2)

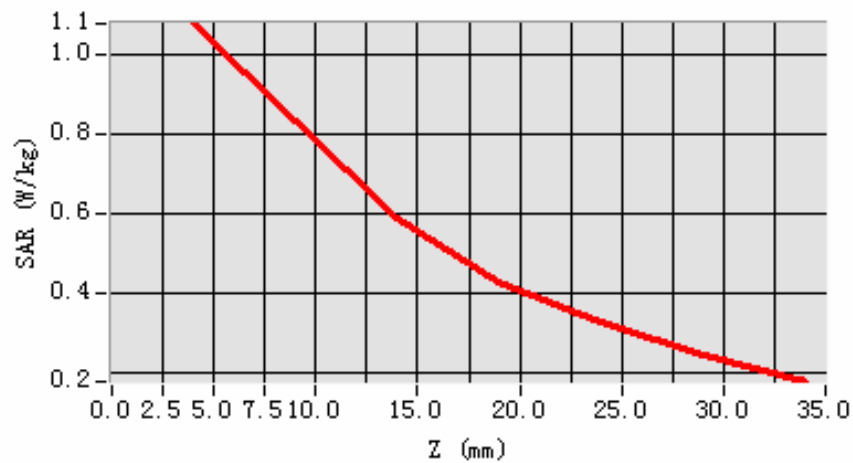

3D scene shot

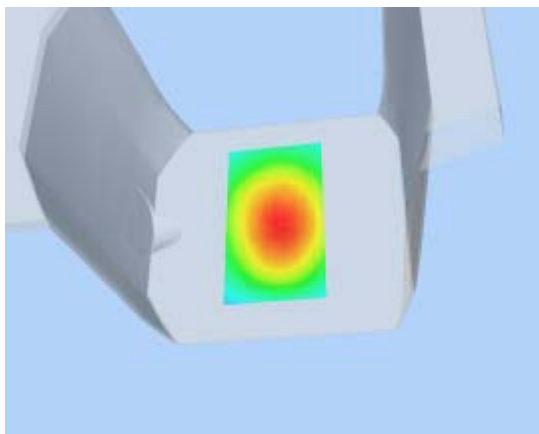

Hot spot position

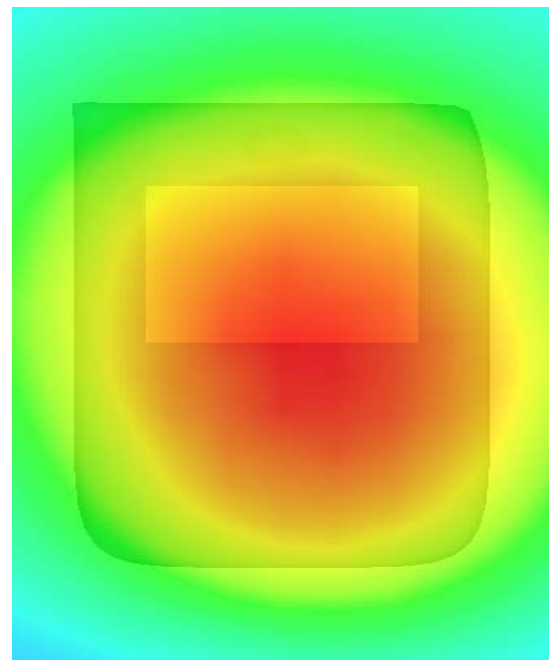

MEASUREMENT 20

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550

Conductivity (S/m)	0.974596
Variation (%)	0.040000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

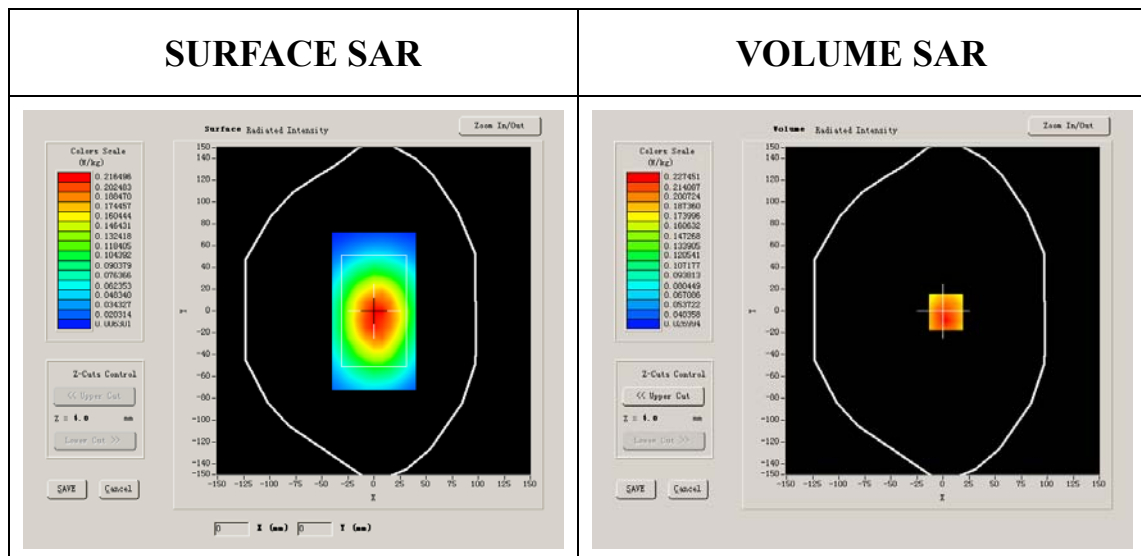


Maximum location: X=3.00, Y=-1.00

SAR 10g (W/Kg)	0.171856
SAR 1g (W/Kg)	0.244969


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2423	0.1826	0.1380	0.1043	0.0755	0.0545


SAR, Z Axis Scan (X = 3, Y = -1)

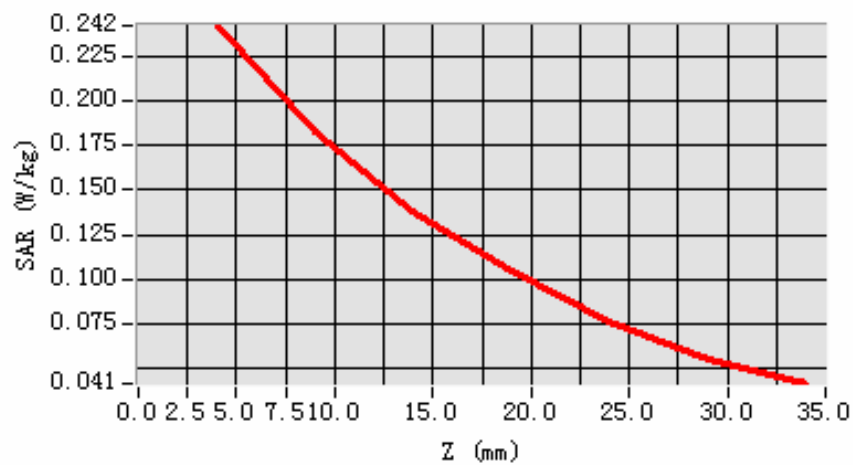

3D scene shot

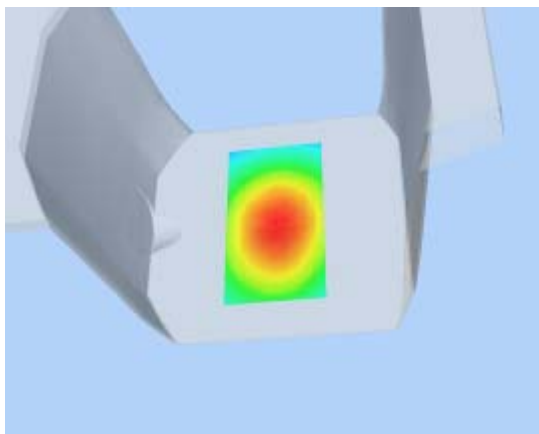

Hot spot position

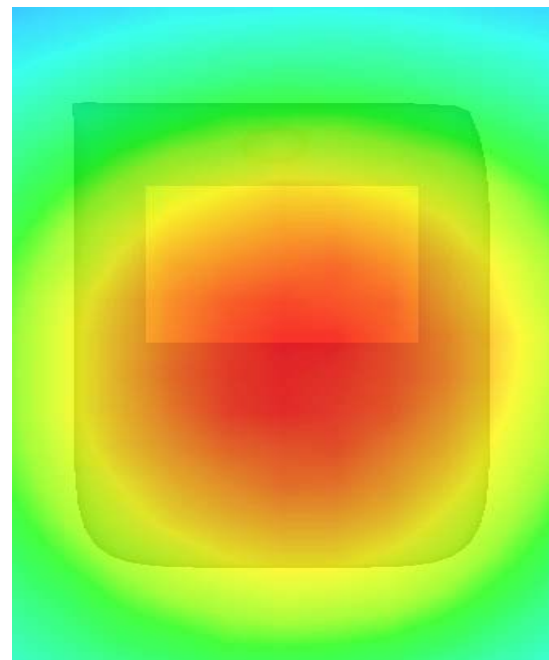

MEASUREMENT 21

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550

Conductivity (S/m)	0.974596
Variation (%)	0.040000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

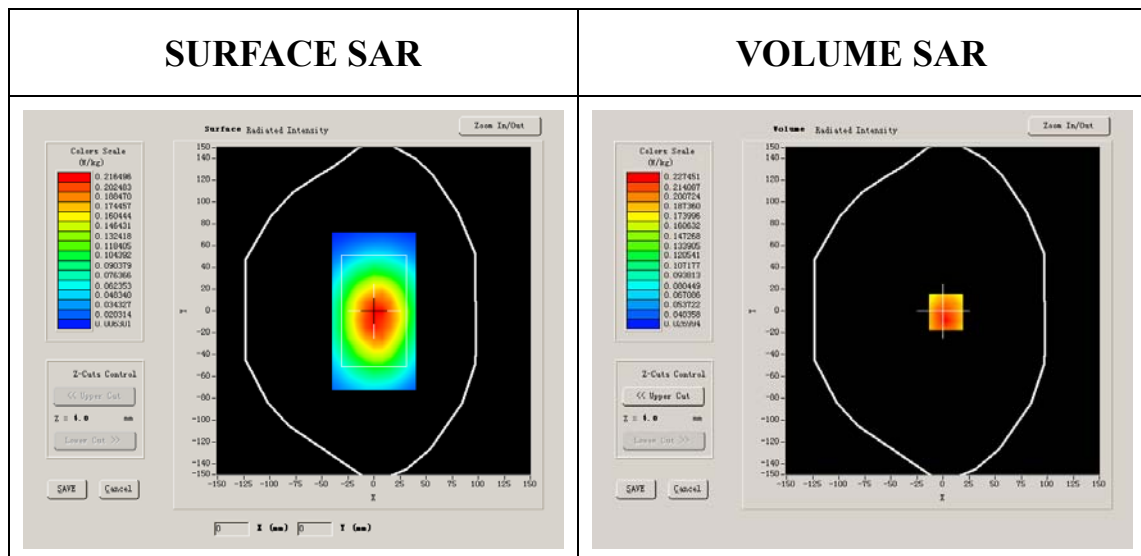


Maximum location: X=3.00, Y=-1.00

SAR 10g (W/Kg)	0.177333
SAR 1g (W/Kg)	0.273522


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2423	0.1826	0.1380	0.1043	0.0755	0.0545


SAR, Z Axis Scan (X = 3, Y = -1)

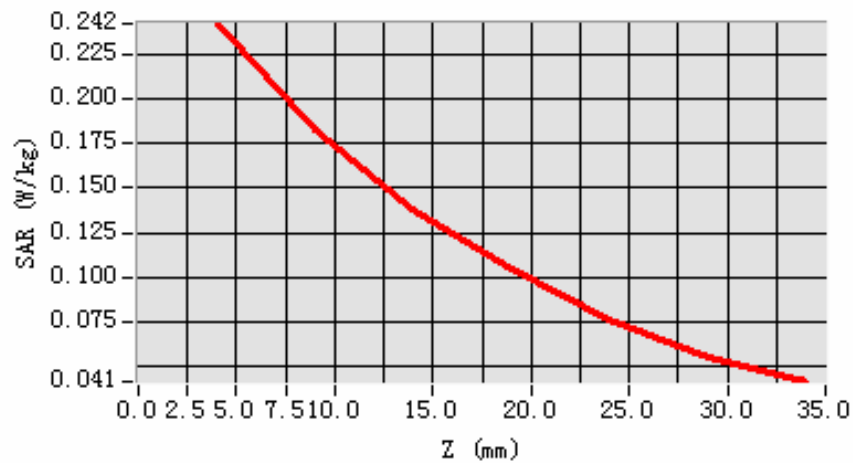

3D scene shot

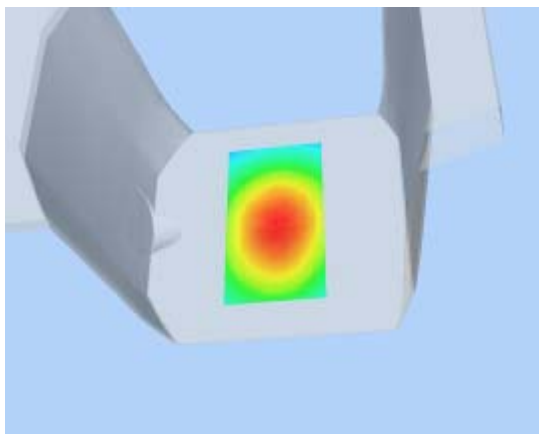

Hot spot position

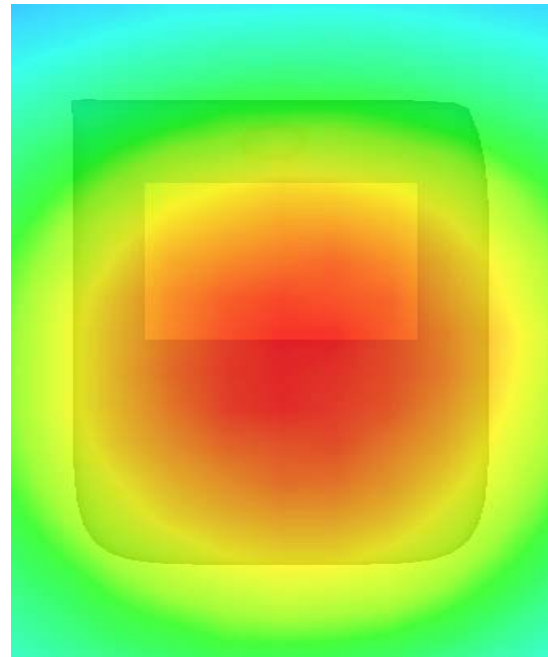

MEASUREMENT 22

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200012
Relative permittivity (real part)	54.116001
Relative permittivity	21.284550

Conductivity (S/m)	0.974596
Variation (%)	0.040000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

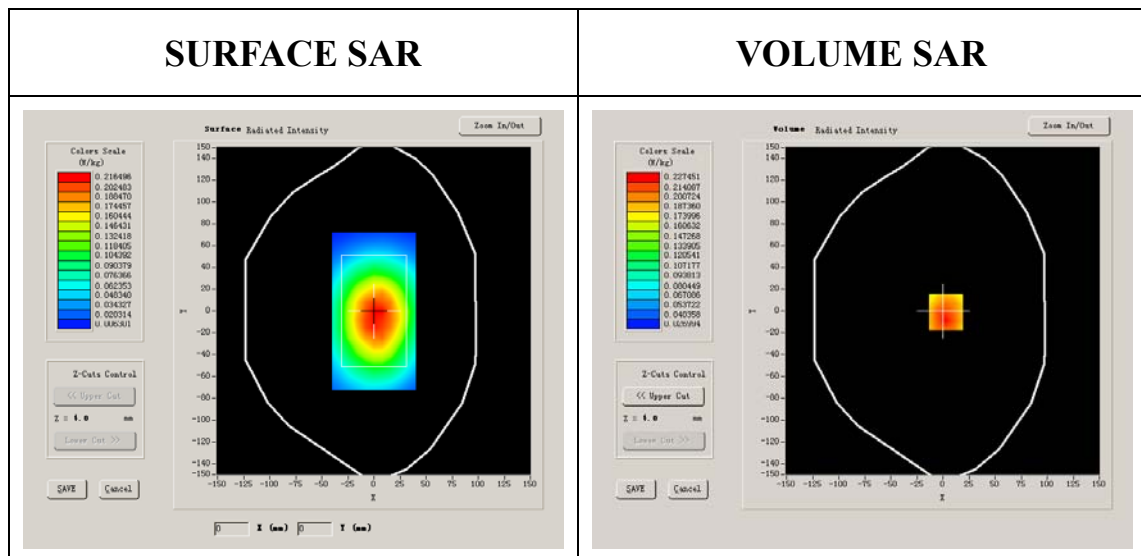


Maximum location: X=3.00, Y=-1.00

SAR 10g (W/Kg)	0.218643
SAR 1g (W/Kg)	0.363881


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2423	0.1826	0.1380	0.1043	0.0755	0.0545


SAR, Z Axis Scan (X = 3, Y = -1)

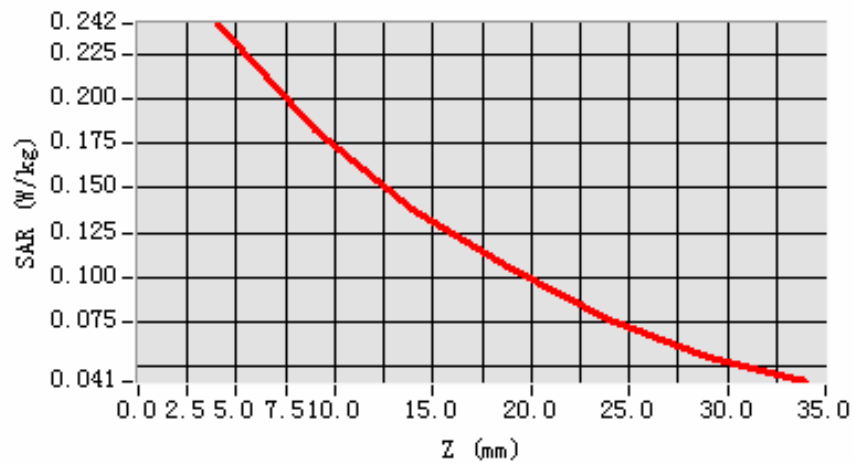

3D scene shot

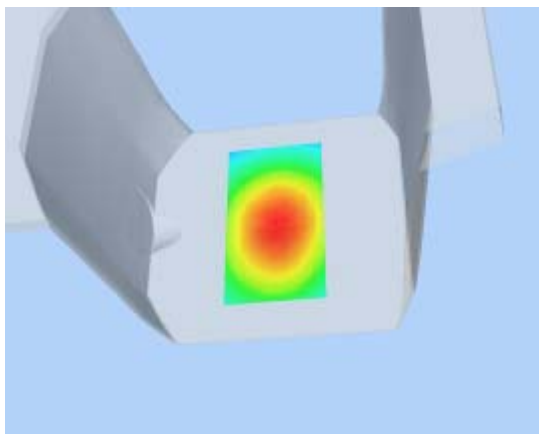

Hot spot position

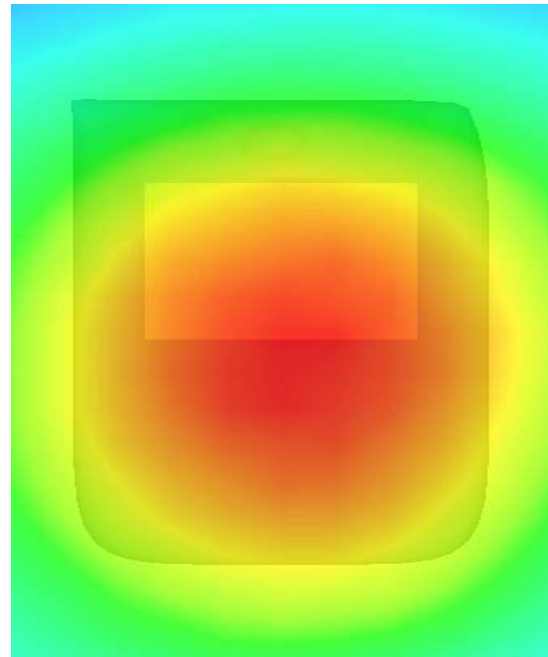

MEASUREMENT 23

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 8 minutes 23 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.199951
Relative permittivity (real part)	39.993999
Relative permittivity	12.991650

Conductivity (S/m)	1.335397
Variation (%)	0.250000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

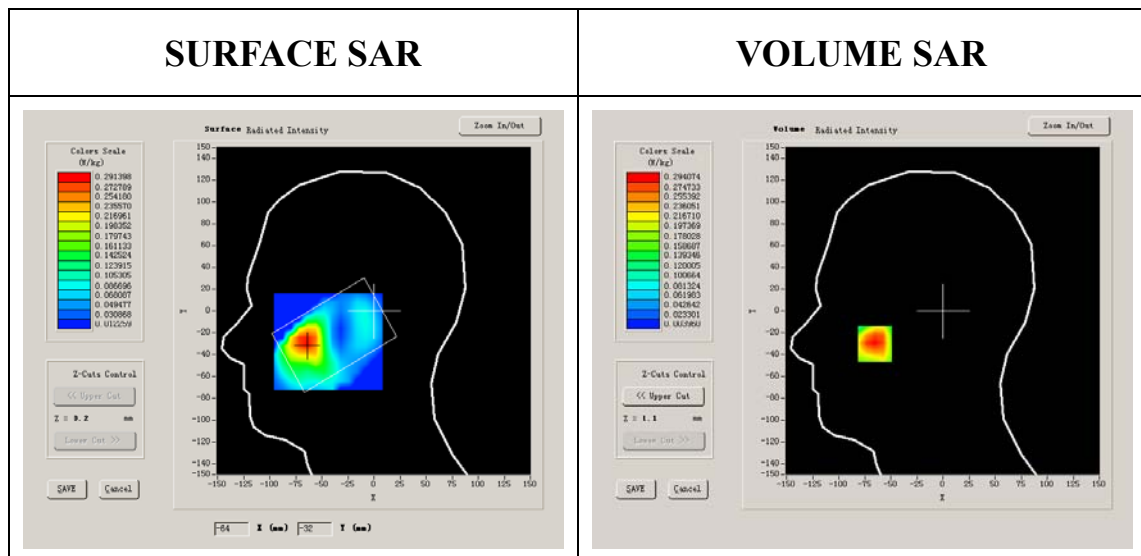


Maximum location: X=-65.00, Y=-30.00


SAR 10g (W/Kg)	0.152722
SAR 1g (W/Kg)	0.282772

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2941	0.1810	0.1160	0.0714	0.0447	0.0271

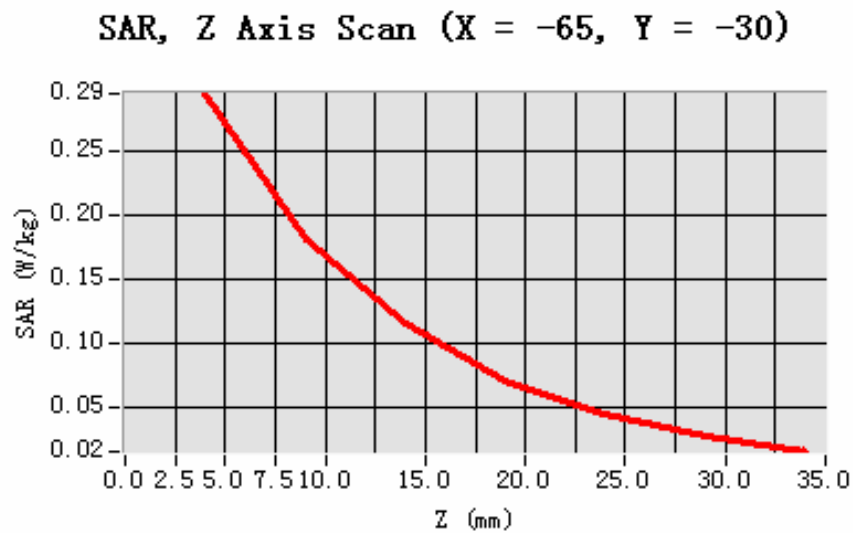

3D scene shot

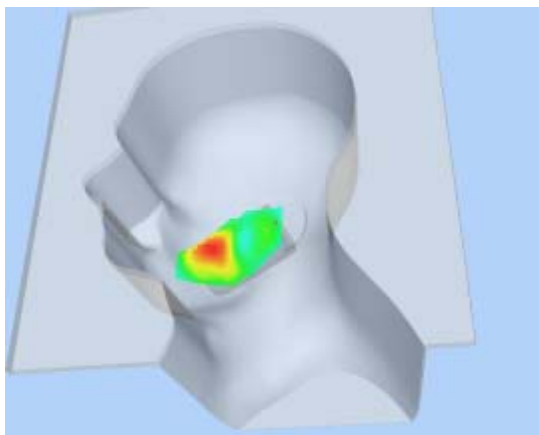

Hot spot position

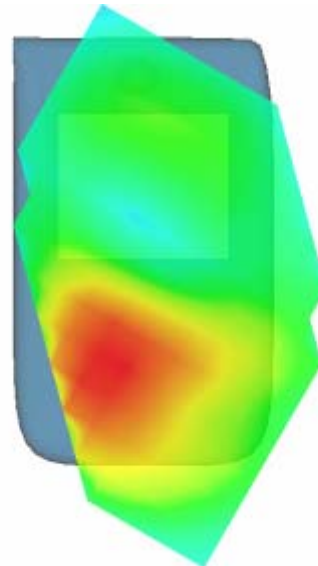

MEASUREMENT 24

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 8 minutes 23 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000

Conductivity (S/m)	1.436111
Variation (%)	0.120000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

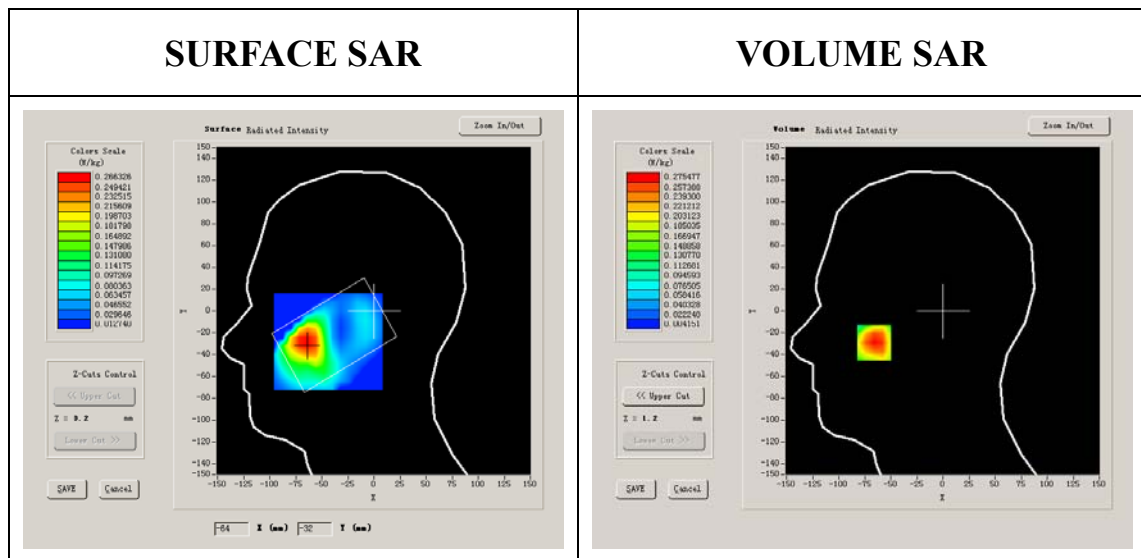


Maximum location: X=-66.00, Y=-29.00


SAR 10g (W/Kg)	0.158082
SAR 1g (W/Kg)	0.266912

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2755	0.1709	0.1094	0.0702	0.0430	0.0227

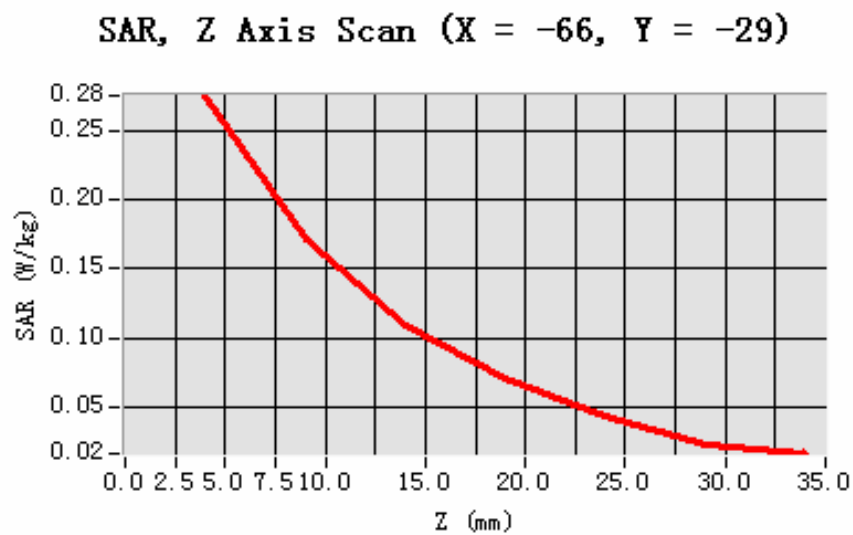

3D scene shot

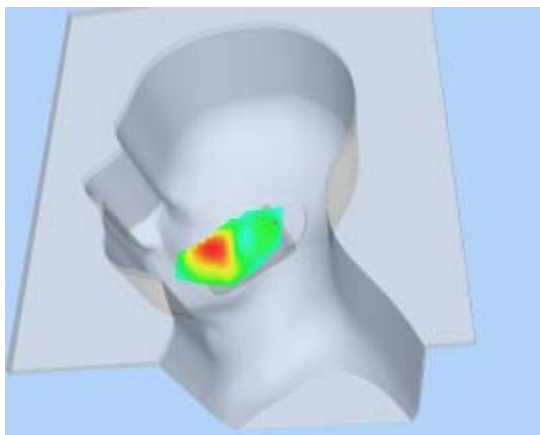

Hot spot position

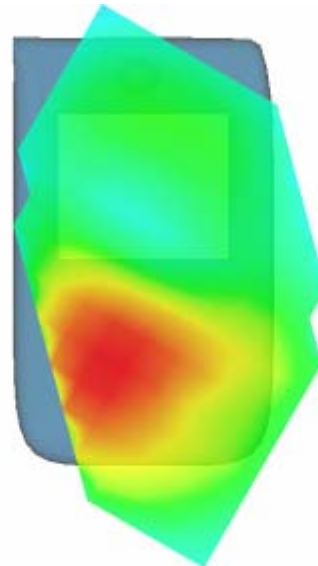

MEASUREMENT 25

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 29 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800049
Relative permittivity (real part)	39.929001
Relative permittivity	13.156500

Conductivity (S/m)	1.395905
Variation (%)	0.920000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

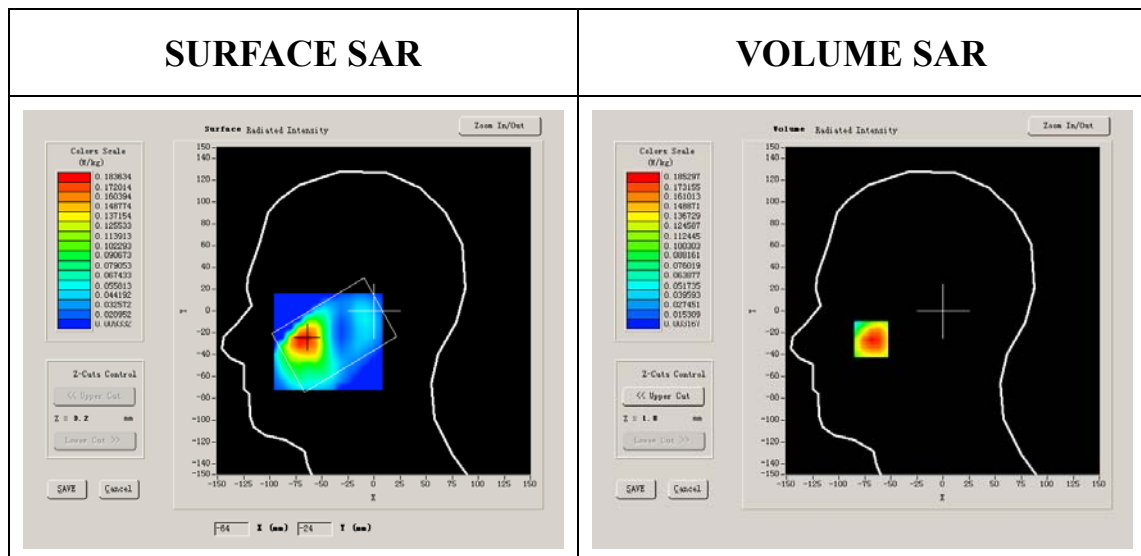




Maximum location: X=-69.00, Y=-26.00

SAR 10g (W/Kg)	0.103091
SAR 1g (W/Kg)	0.178443

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1853	0.1080	0.0654	0.0403	0.0249	0.0155

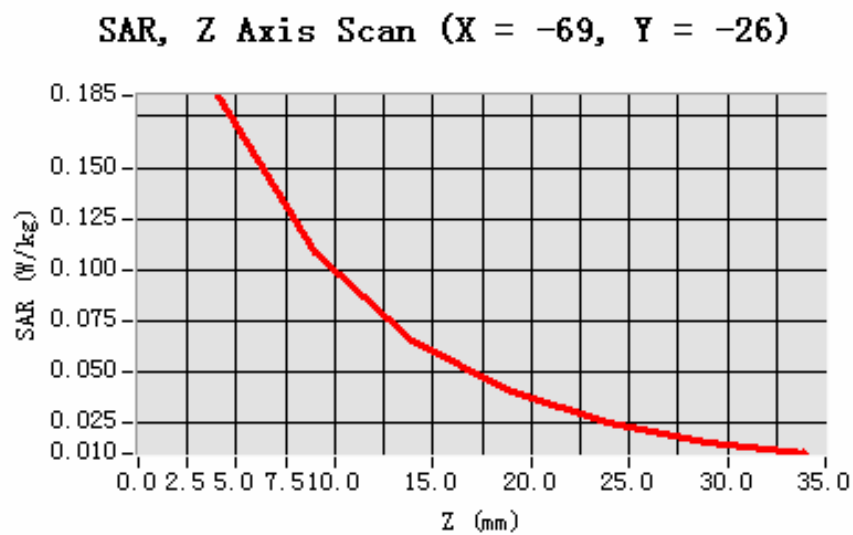

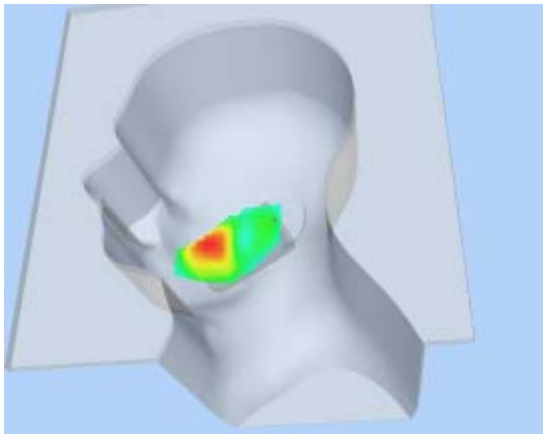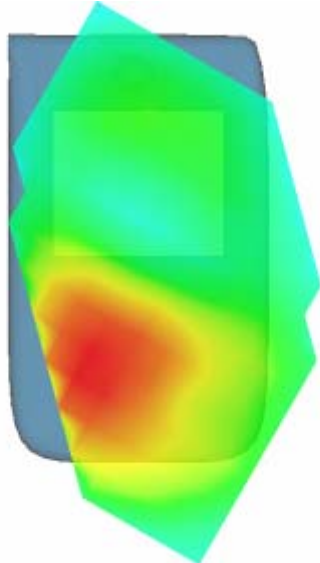3D scene shot	Hot spot position
	

MEASUREMENT 26

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 23 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.199951
Relative permittivity (real part)	39.993999
Relative permittivity	12.991650

Conductivity (S/m)	1.335397
Variation (%)	-0.640000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

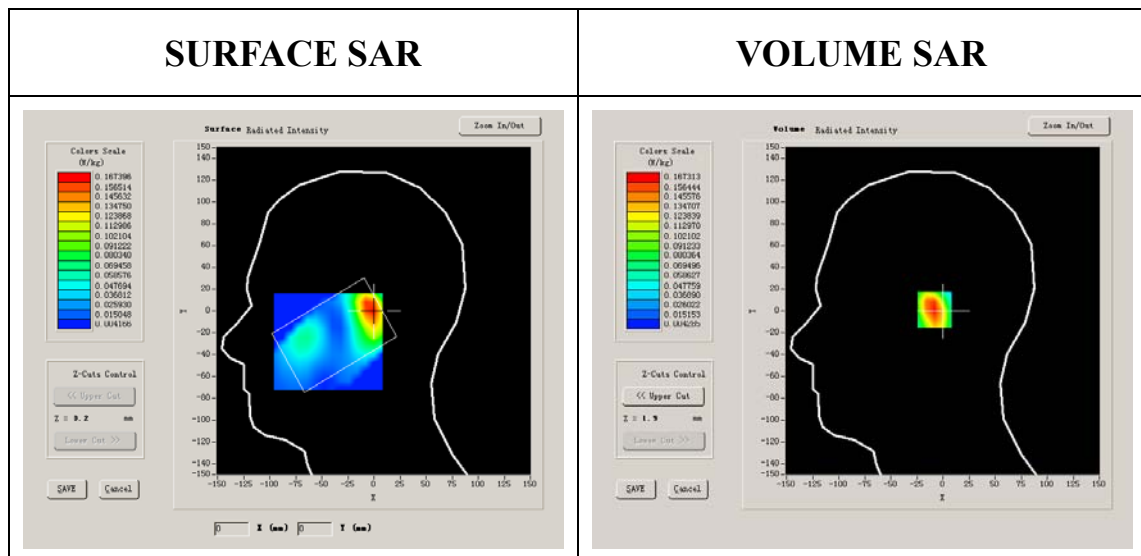


Maximum location: X=-2.00, Y=1.00

SAR 10g (W/Kg)	0.092307
SAR 1g (W/Kg)	0.158611


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1673	0.1087	0.0708	0.0444	0.0283	0.0178


SAR, Z Axis Scan (X = -2, Y = 1)

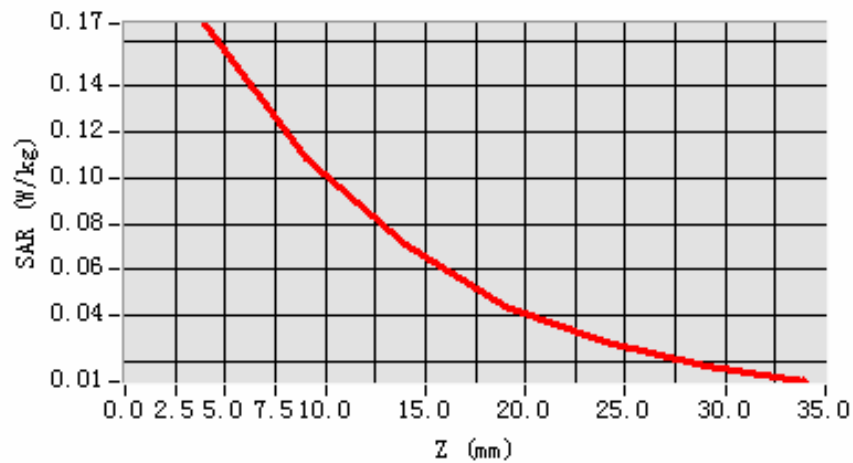

3D scene shot

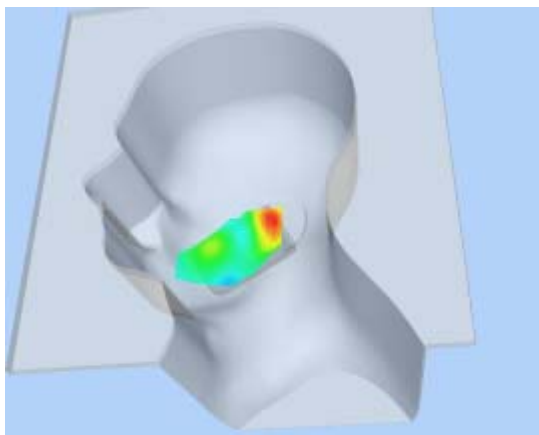

Hot spot position

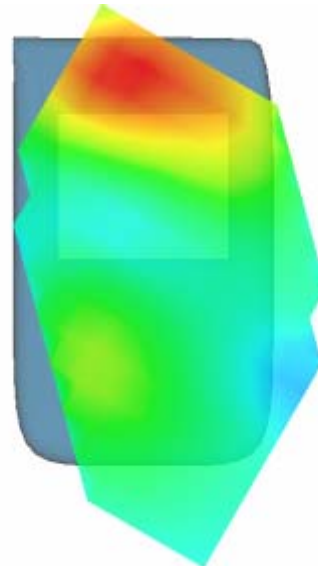

MEASUREMENT 27

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 22 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000

Conductivity (S/m)	1.436111
Variation (%)	-0.160000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

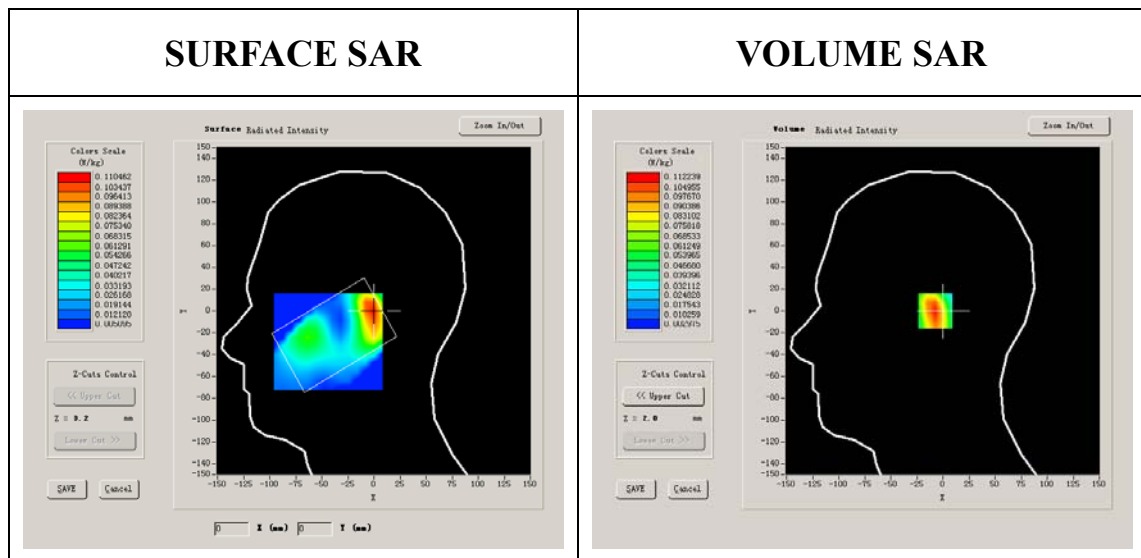


Maximum location: X=-1.00, Y=0.00

SAR 10g (W/Kg)	0.061116
SAR 1g (W/Kg)	0.104855


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1122	0.0688	0.0453	0.0290	0.0175	0.0113


SAR, Z Axis Scan (X = -1, Y = 0)

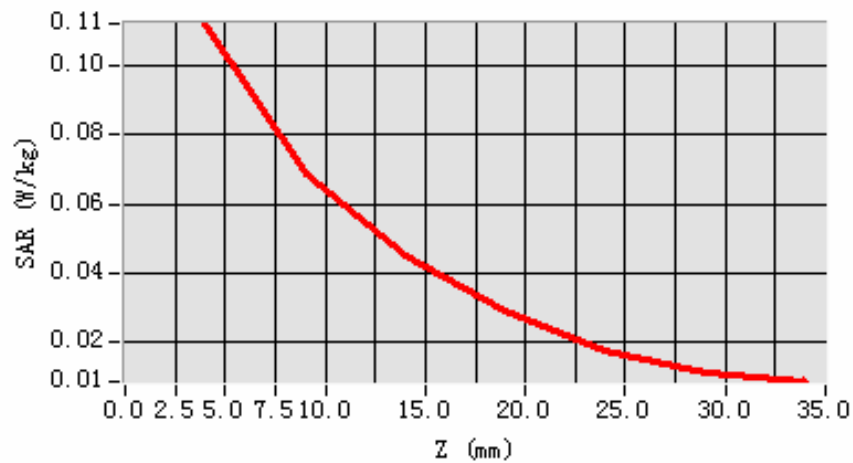

3D scene shot

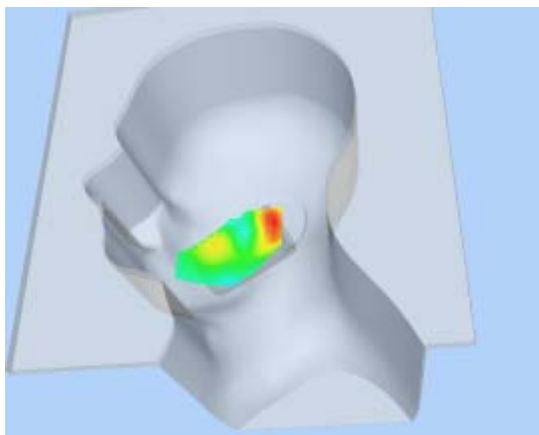

Hot spot position

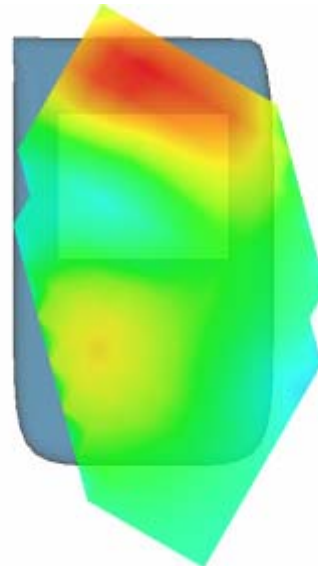

MEASUREMENT 28

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 24 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800049
Relative permittivity (real part)	39.929001
Relative permittivity	13.156500

Conductivity (S/m)	1.395905
Variation (%)	-0.840000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

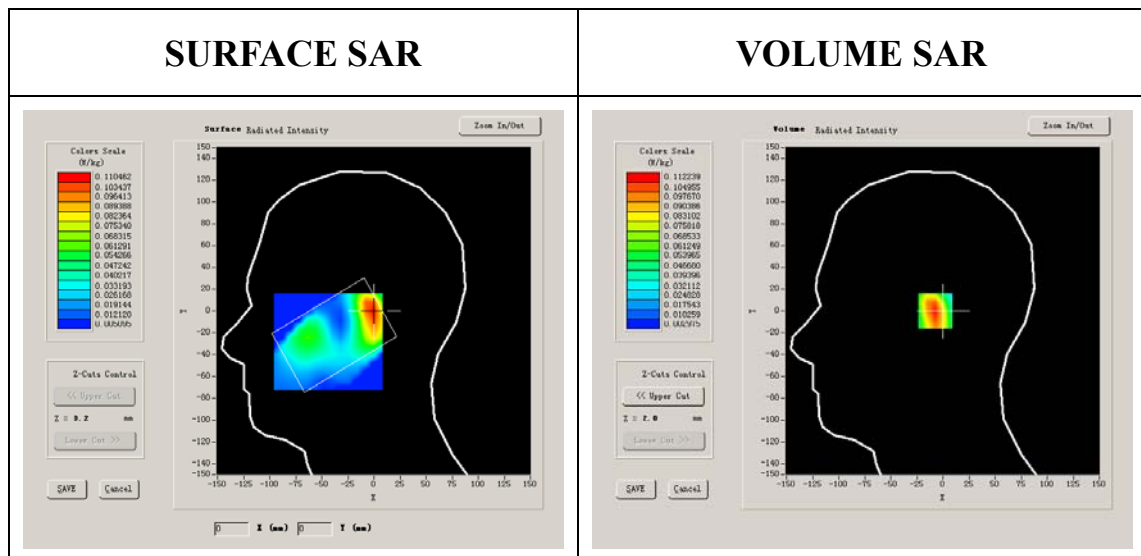


Maximum location: X=-1.00, Y=0.00

SAR 10g (W/Kg)	0.060057
SAR 1g (W/Kg)	0.103144


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1122	0.0688	0.0453	0.0290	0.0175	0.0113


SAR, Z Axis Scan (X = -1, Y = 0)

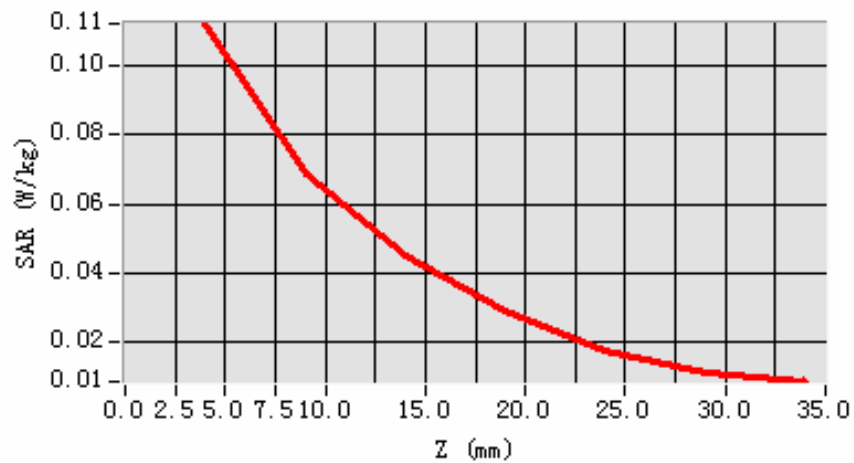

3D scene shot

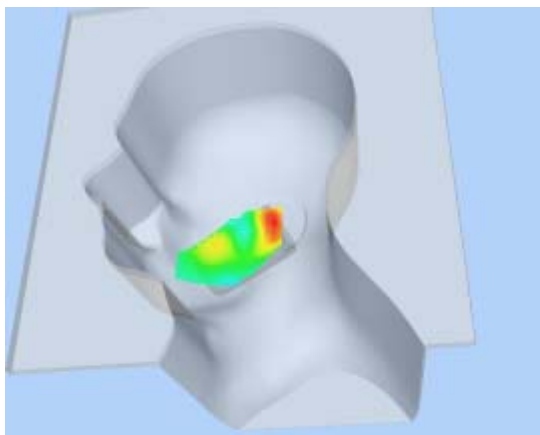

Hot spot position

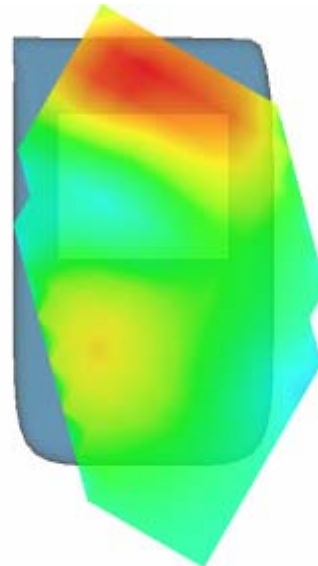

MEASUREMENT 29

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 8 minutes 6 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.199951
Relative permittivity (real part)	39.993999
Relative permittivity	12.991650

Conductivity (S/m)	1.335397
Variation (%)	0.550000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

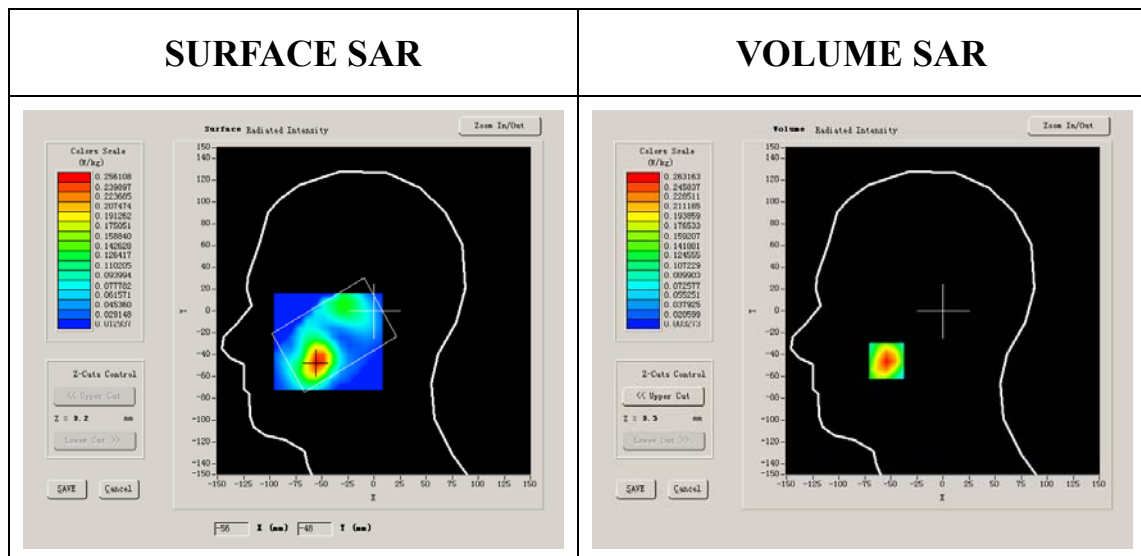


Maximum location: X=-54.00, Y=-46.00


SAR 10g (W/Kg)	0.136515
SAR 1g (W/Kg)	0.246098

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2632	0.1595	0.0975	0.0574	0.0341	0.0214

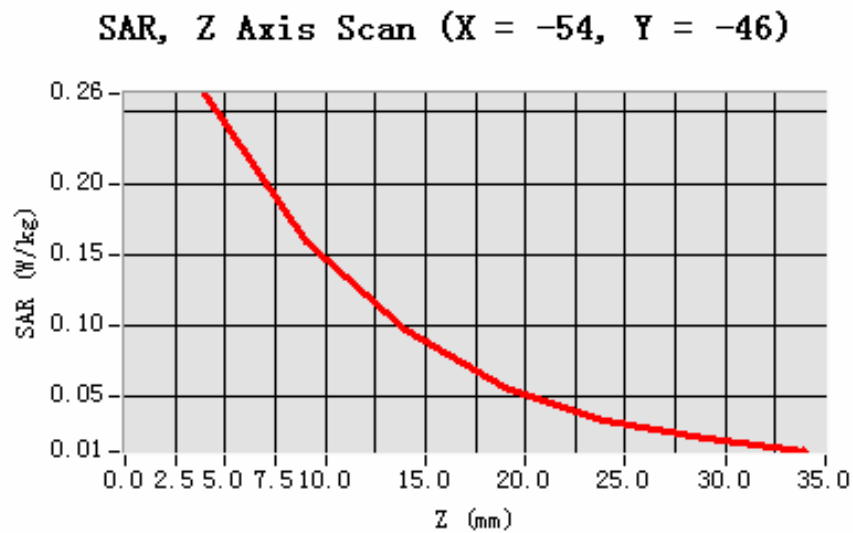

3D scene shot

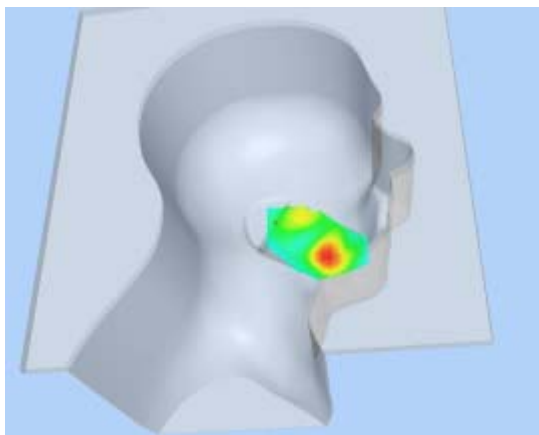

Hot spot position

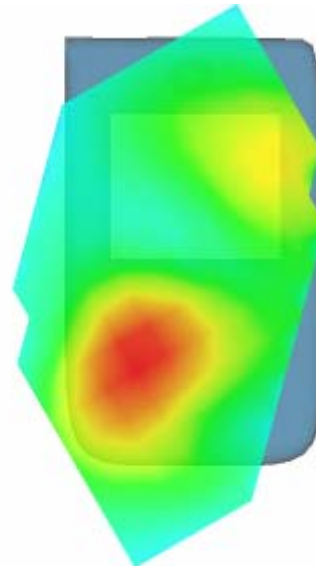

MEASUREMENT 30

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 8 minutes 5 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000

Conductivity (S/m)	1.436111
Variation (%)	-0.700000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

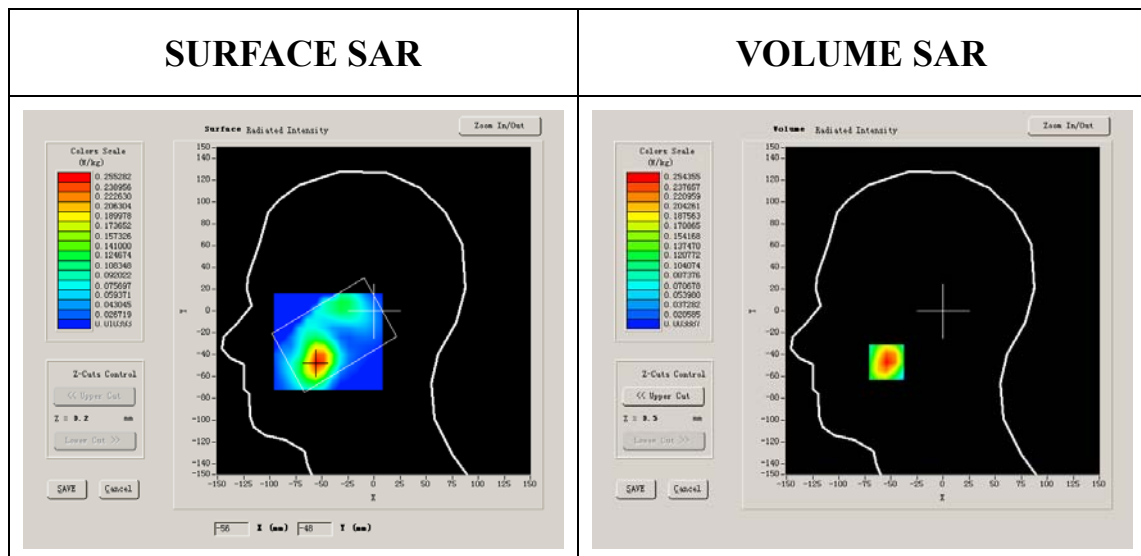


Maximum location: X=-54.00, Y=-47.00


SAR 10g (W/Kg)	0.133398
SAR 1g (W/Kg)	0.239679

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2544	0.1561	0.0927	0.0562	0.0337	0.0203

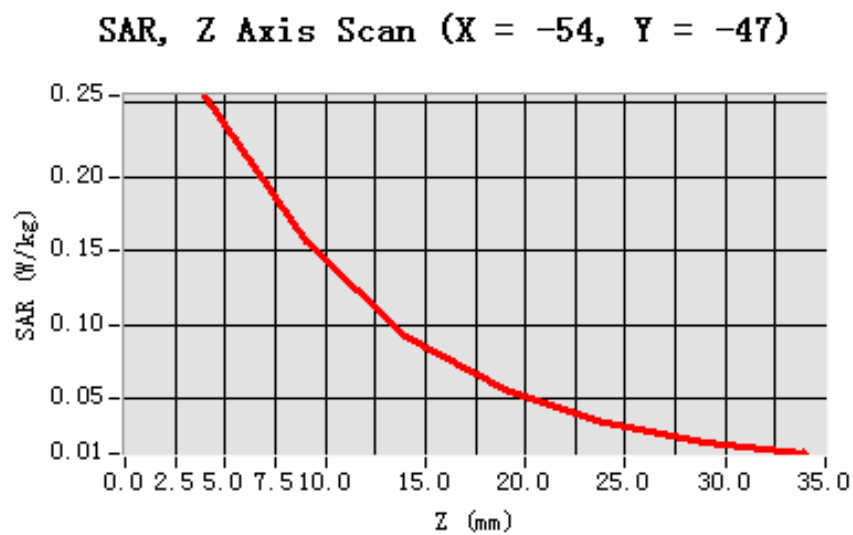

3D scene shot

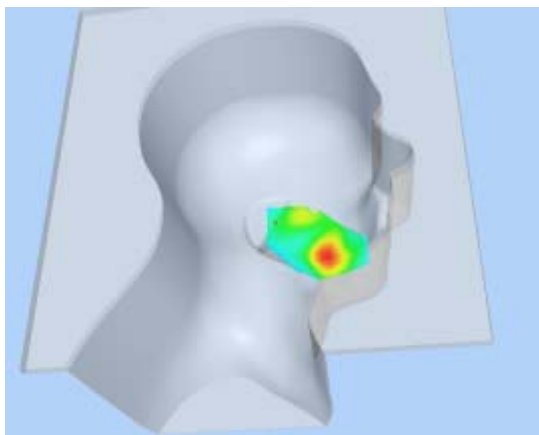

Hot spot position

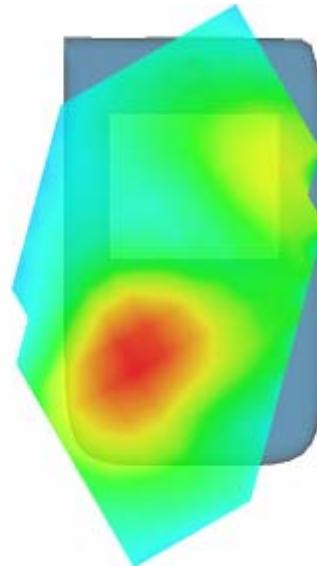

MEASUREMENT 31

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 47 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800049
Relative permittivity (real part)	39.929001
Relative permittivity	13.156500

Conductivity (S/m)	1.395905
Variation (%)	0.770000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

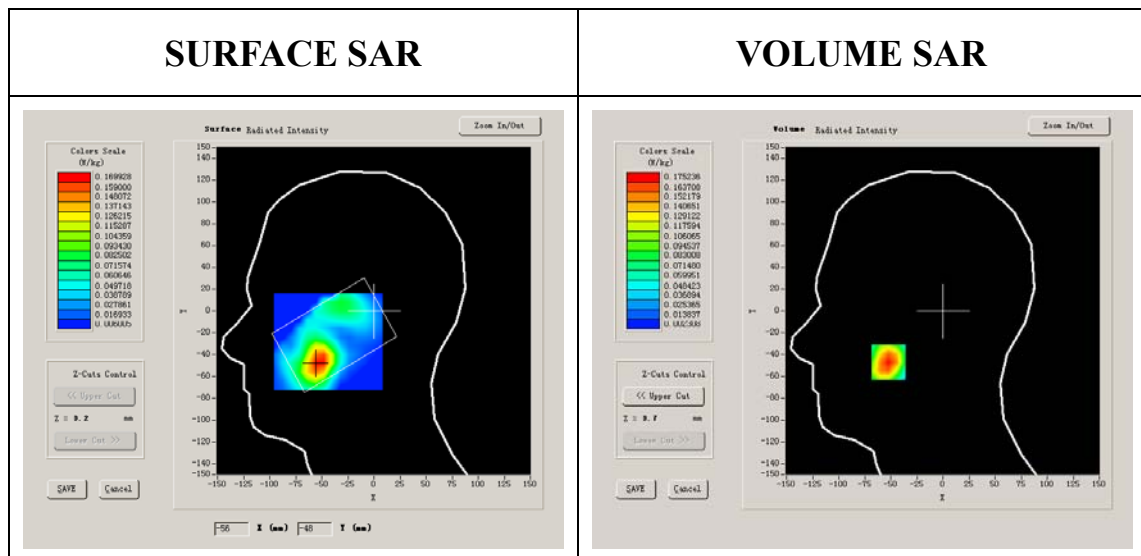


Maximum location: X=-52.00, Y=-47.00

SAR 10g (W/Kg)	0.092727
SAR 1g (W/Kg)	0.163976


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1752	0.1063	0.0666	0.0375	0.0221	0.0150


SAR, Z Axis Scan (X = -52, Y = -47)

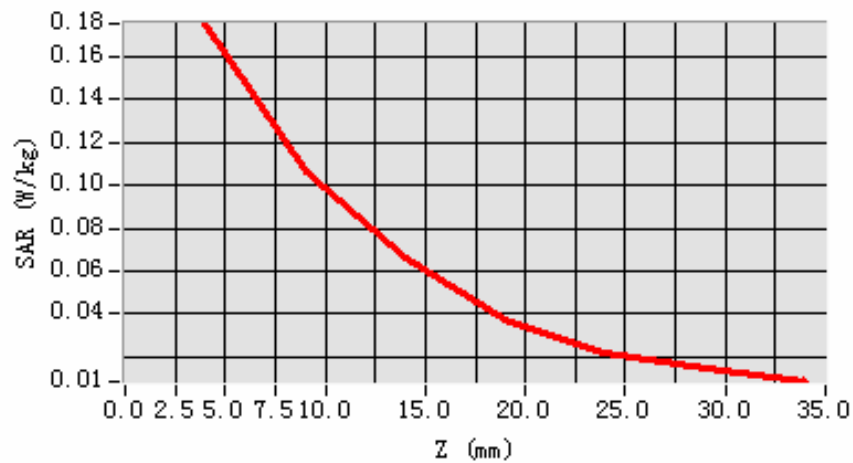

3D scene shot

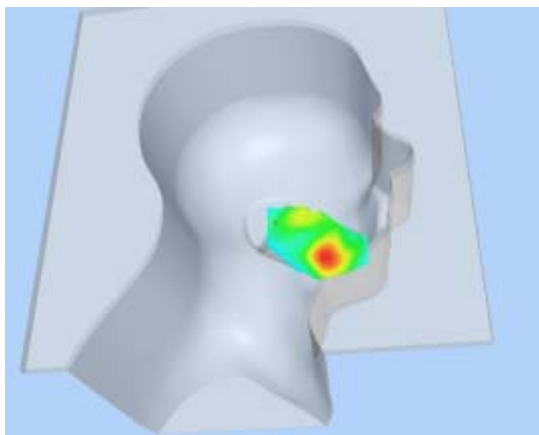

Hot spot position

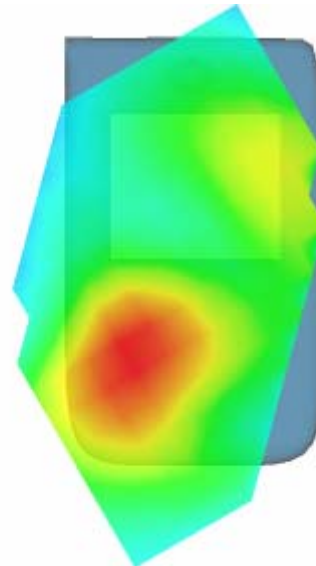

MEASUREMENT 32

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 21 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.199951
Relative permittivity (real part)	39.993999
Relative permittivity	12.991650

Conductivity (S/m)	1.335397
Variation (%)	-1.280000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

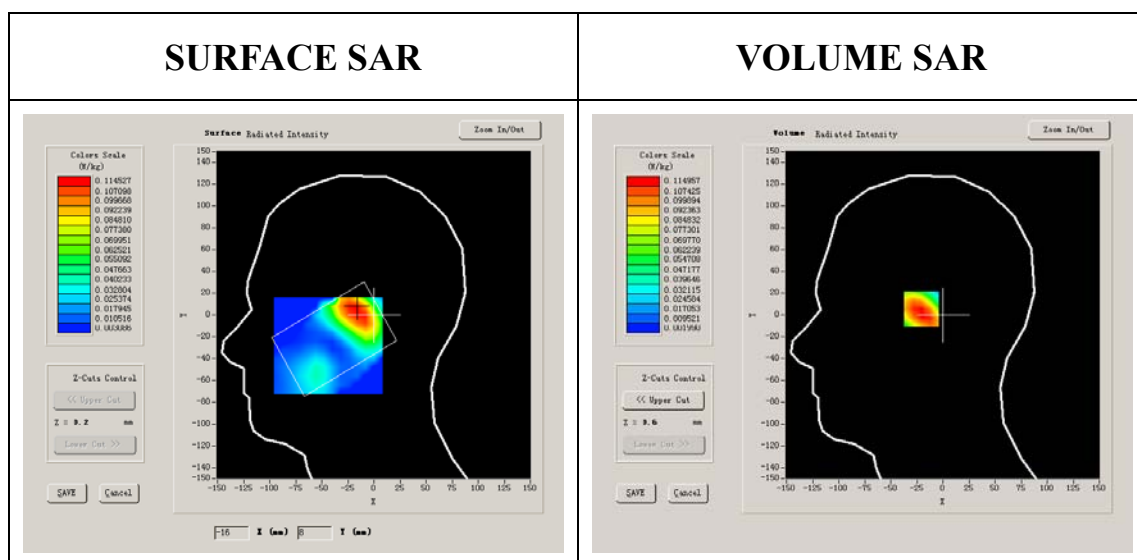


Maximum location: X=-17.00, Y=6.00

SAR 10g (W/Kg)	0.069325
SAR 1g (W/Kg)	0.112585


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1150	0.0770	0.0492	0.0319	0.0214	0.0134


SAR, Z Axis Scan (X = -17, Y = 6)

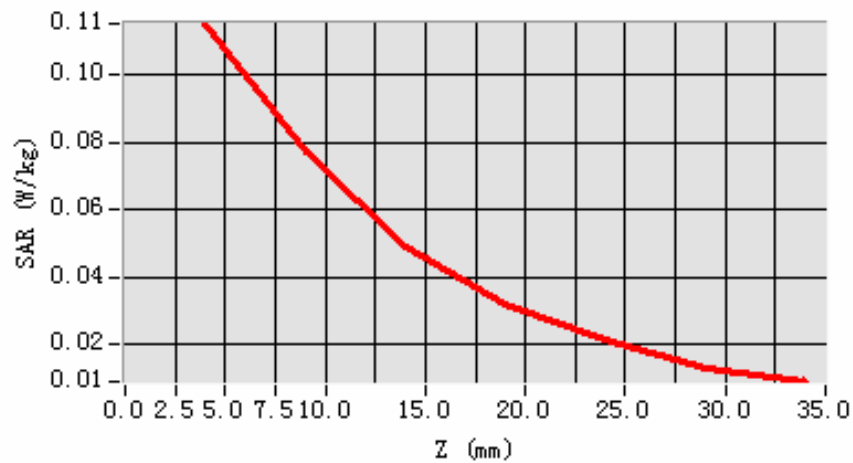

3D scene shot

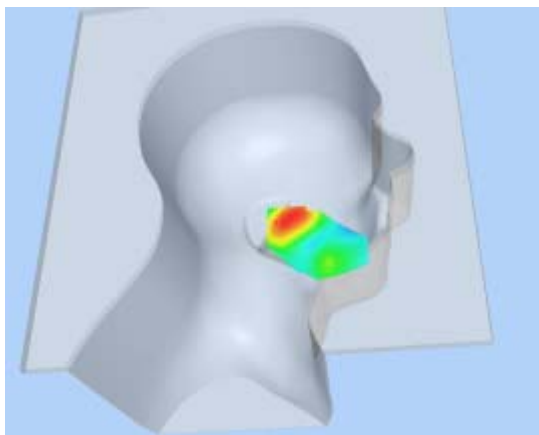

Hot spot position

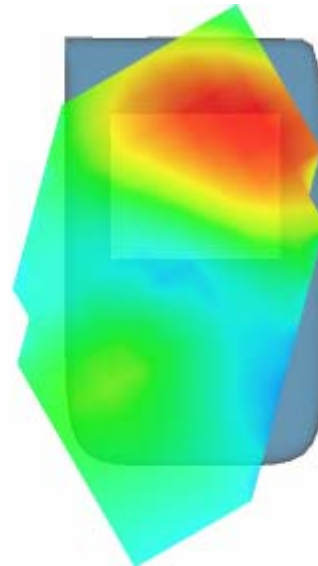

MEASUREMENT 33

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 25 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.509998
Relative permittivity	13.750000

Conductivity (S/m)	1.436111
Variation (%)	0.490000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

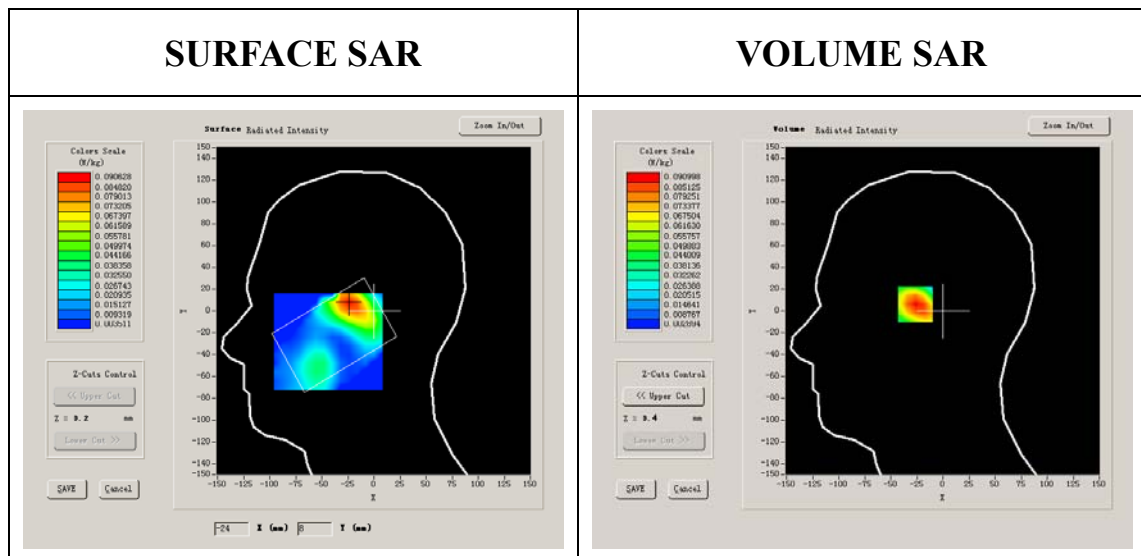


Maximum location: X=-24.00, Y=8.00

SAR 10g (W/Kg)	0.052391
SAR 1g (W/Kg)	0.086488


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0910	0.0603	0.0378	0.0250	0.0154	0.0098


SAR, Z Axis Scan (X = -24, Y = 8)

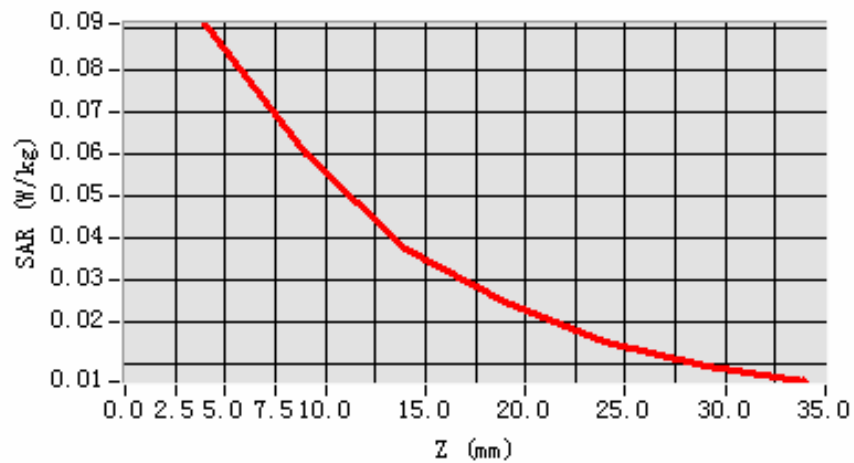

3D scene shot

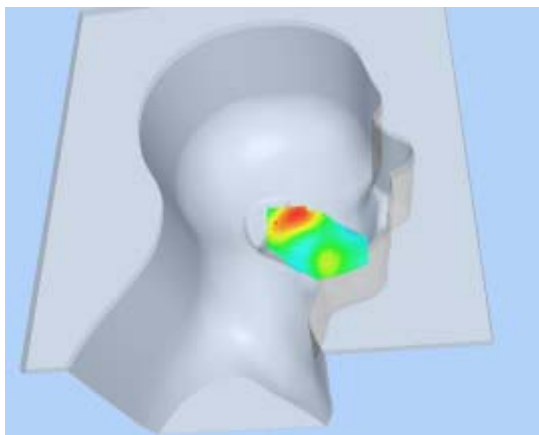

Hot spot position

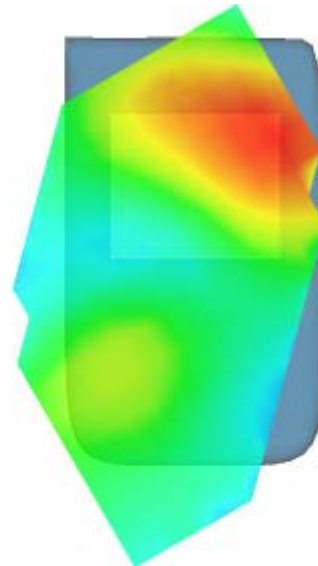

MEASUREMENT 34

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 7 minutes 20 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800049
Relative permittivity (real part)	39.929001
Relative permittivity	13.156500

Conductivity (S/m)	1.395905
Variation (%)	-0.540000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

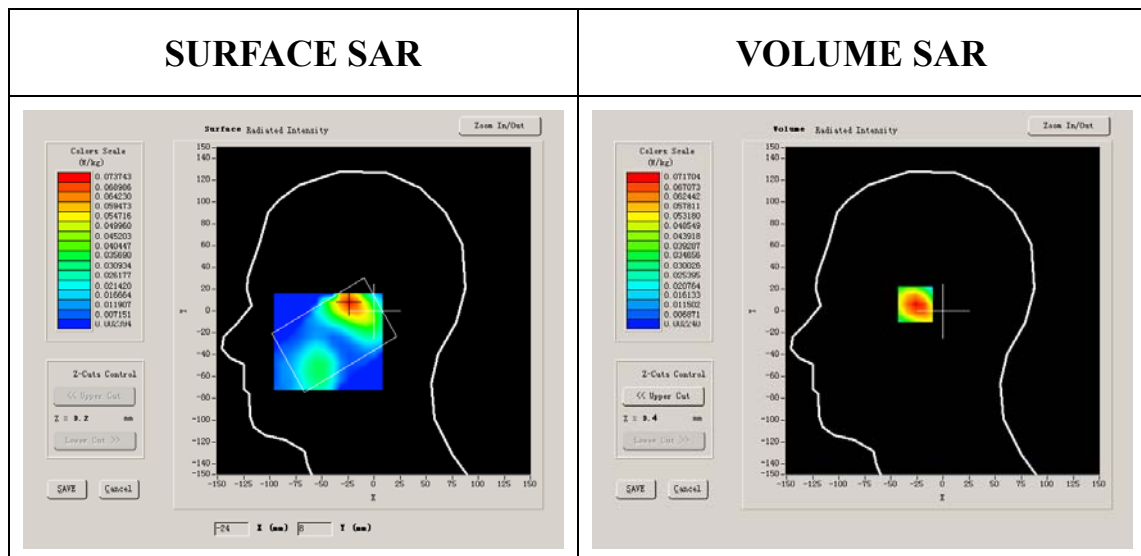


Maximum location: X=-24.00, Y=8.00

SAR 10g (W/Kg)	0.041526
SAR 1g (W/Kg)	0.068405


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0717	0.0463	0.0307	0.0192	0.0127	0.0077


SAR, Z Axis Scan (X = -24, Y = 8)

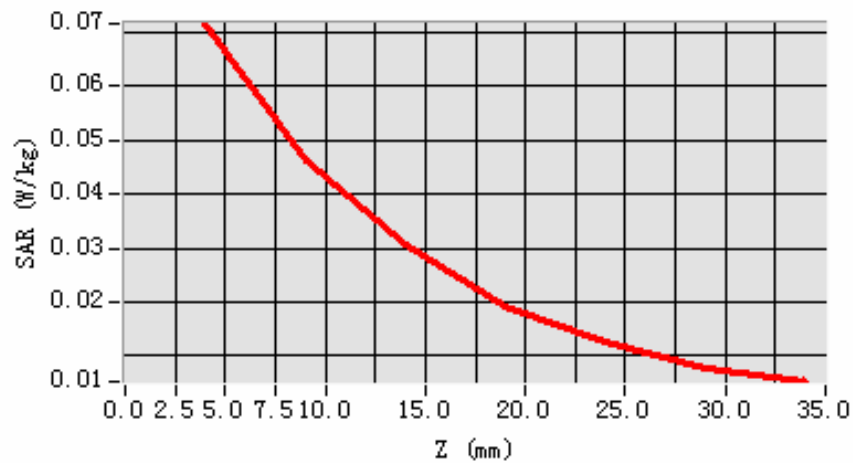

3D scene shot

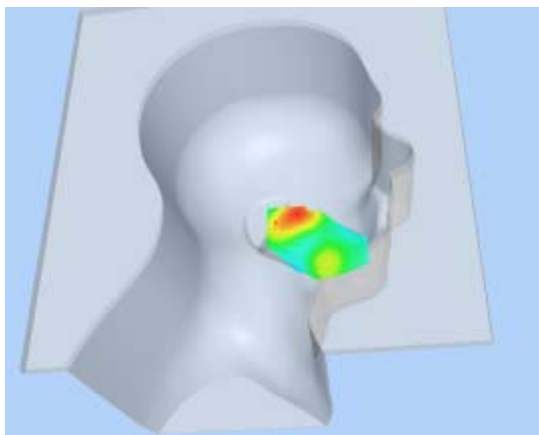

Hot spot position

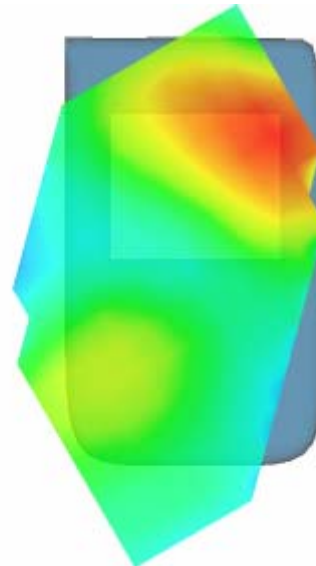

MEASUREMENT 35

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 8 minutes 23 seconds

A. Experimental conditions.


Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.199951
Relative permittivity (real part)	39.993999
Relative permittivity	12.991650

Conductivity (S/m)	1.335397
Variation (%)	0.250000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:8

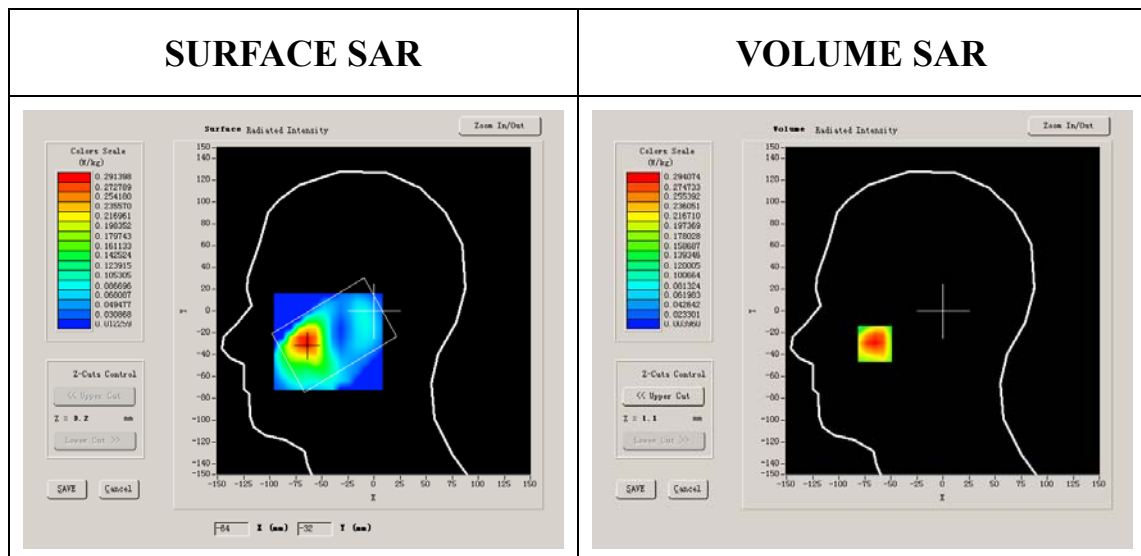




Maximum location: X=-65.00, Y=-30.00

SAR 10g (W/Kg)	0.160046
SAR 1g (W/Kg)	0.289466

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2941	0.1810	0.1160	0.0714	0.0447	0.0271

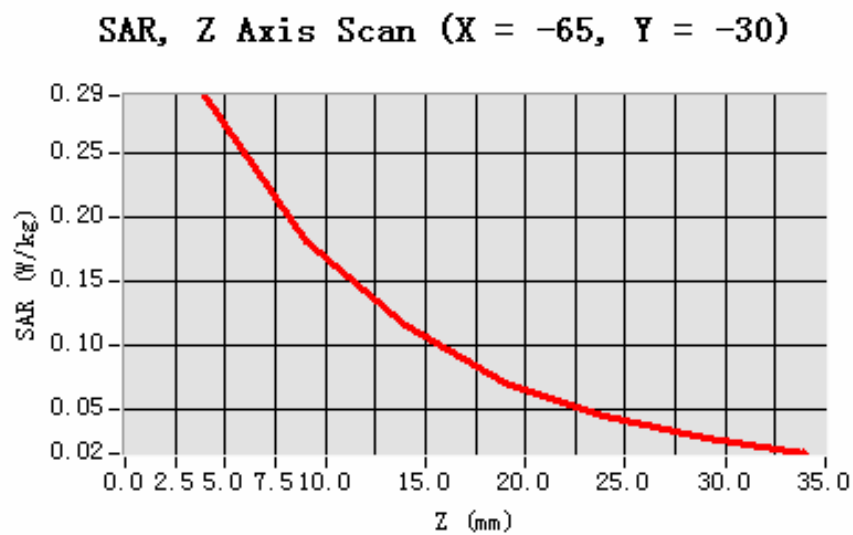

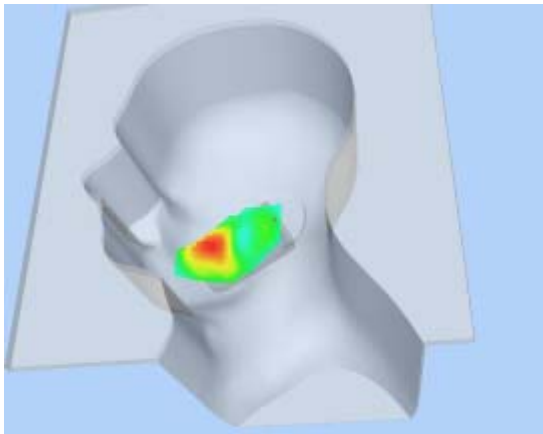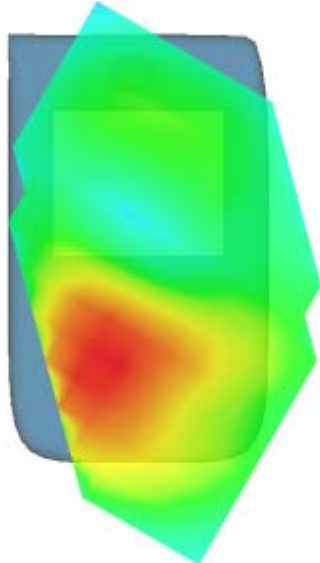3D scene shot	Hot spot position
	

MEASUREMENT 36

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 5 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GSM

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.199951
Relative permittivity (real part)	51.540001
Relative permittivity	12.000000

Conductivity (S/m)	1.233467
Variation (%)	-0.920000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

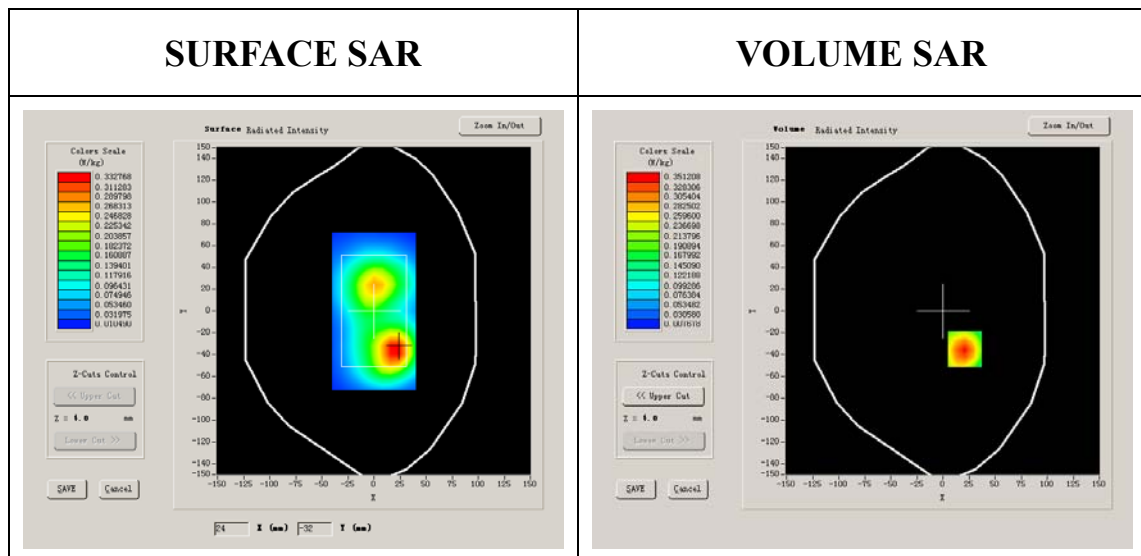


Maximum location: X=21.00, Y=-35.00

SAR 10g (W/Kg)	0.174333
SAR 1g (W/Kg)	0.306149


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3244	0.1839	0.1097	0.0622	0.0366	0.0219


SAR, Z Axis Scan (X = 21, Y = -35)

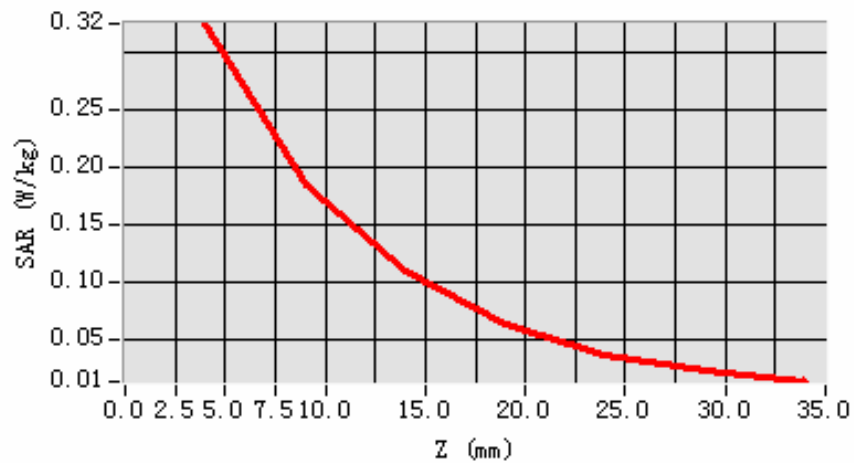

3D scene shot

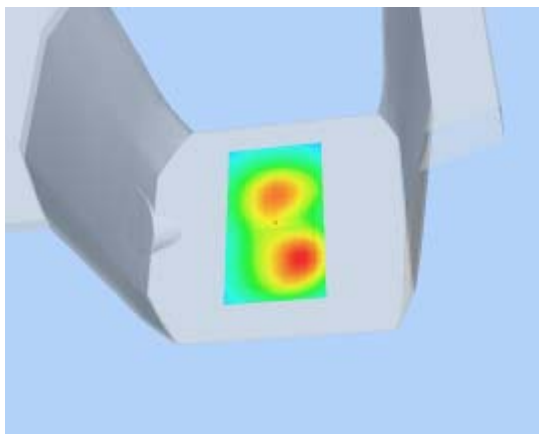

Hot spot position

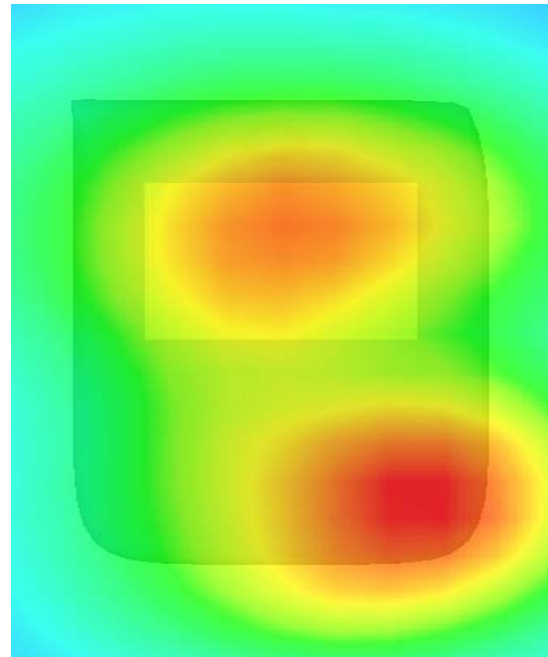

MEASUREMENT 37

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.540001
Relative permittivity	15.070000

Conductivity (S/m)	1.573978
Variation (%)	-1.750000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

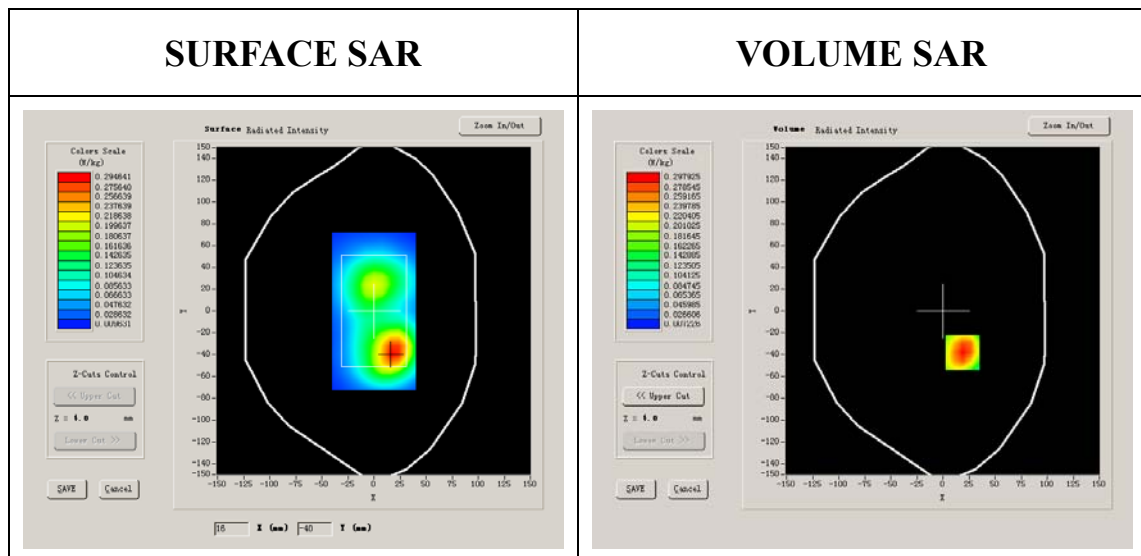


Maximum location: X=19.00, Y=-38.00

SAR 10g (W/Kg)	0.178319
SAR 1g (W/Kg)	0.311202


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3265	0.1860	0.1105	0.0640	0.0389	0.0220


SAR, Z Axis Scan (X = 19, Y = -38)

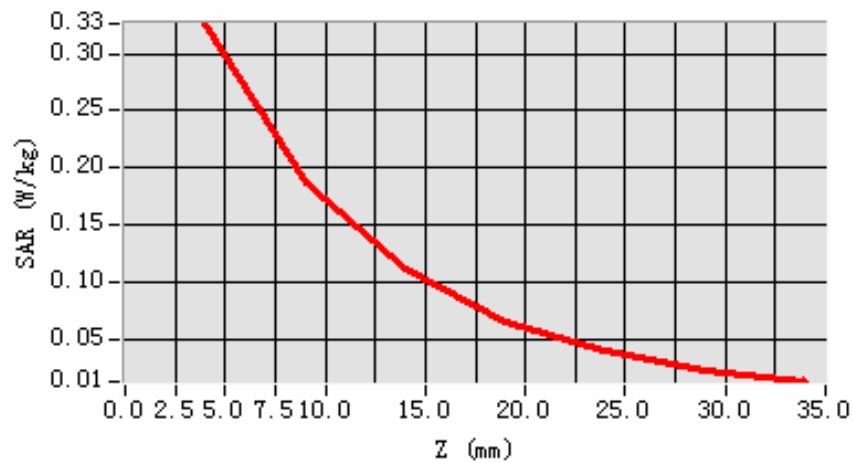

3D scene shot

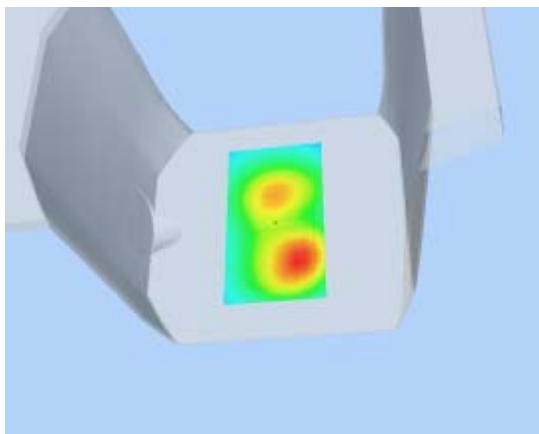

Hot spot position

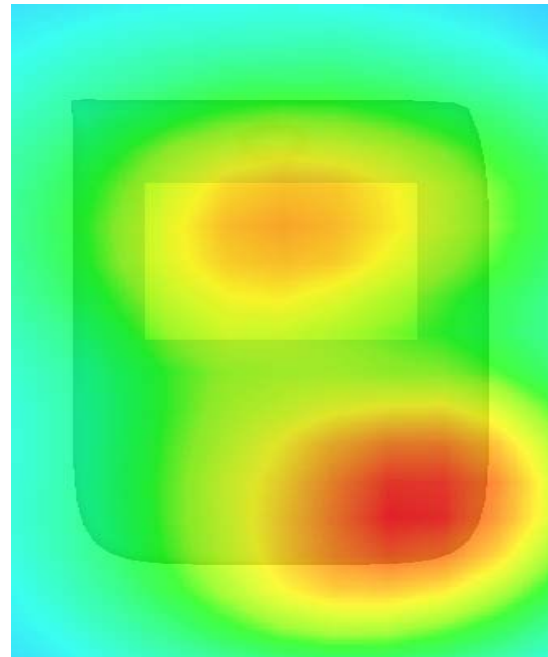

MEASUREMENT 38

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	High
Signal	GSM

B. SAR Measurement Results

Higher Band SAR (Channel 810):

Frequency (MHz)	1909.800049
Relative permittivity (real part)	51.540001
Relative permittivity	12.000000

Conductivity (S/m)	1.273200
Variation (%)	0.880000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

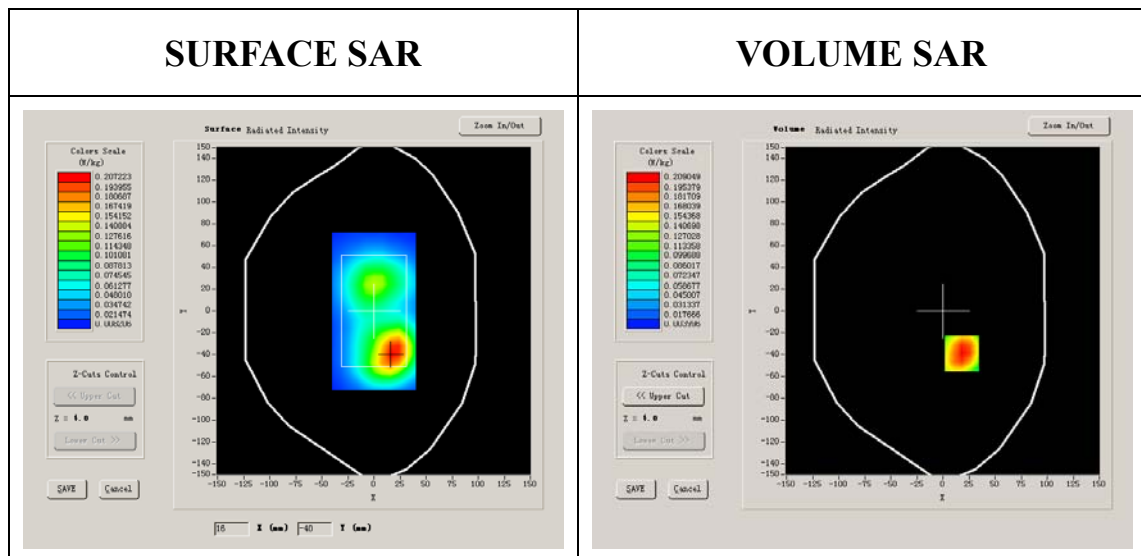


Maximum location: X=18.00, Y=-39.00

SAR 10g (W/Kg)	0.105154
SAR 1g (W/Kg)	0.181636


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1907	0.1111	0.0666	0.0360	0.0209	0.0129


SAR, Z Axis Scan (X = 18, Y = -39)

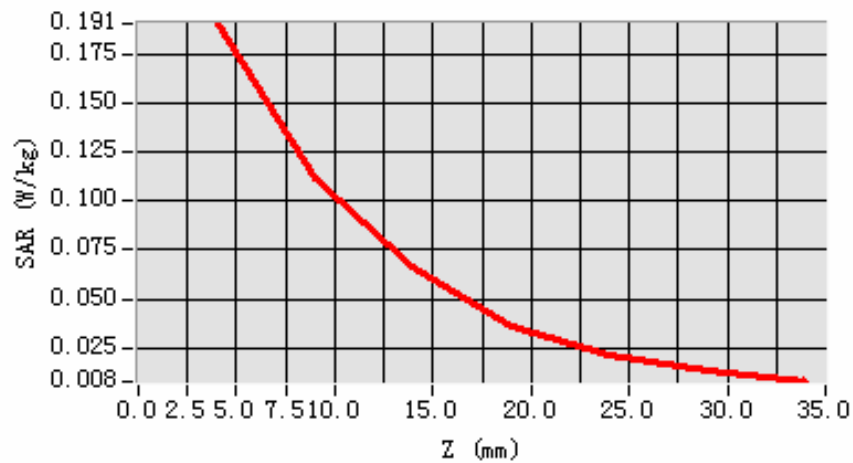

3D scene shot

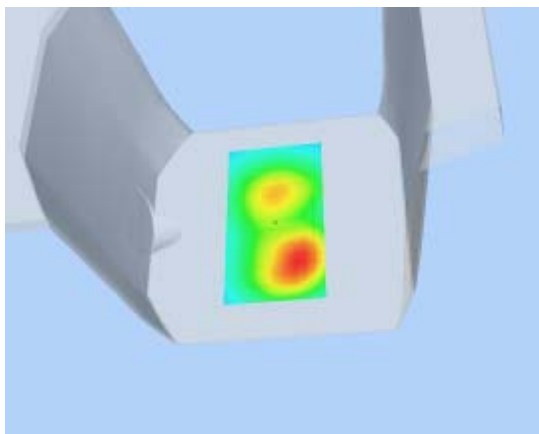

Hot spot position

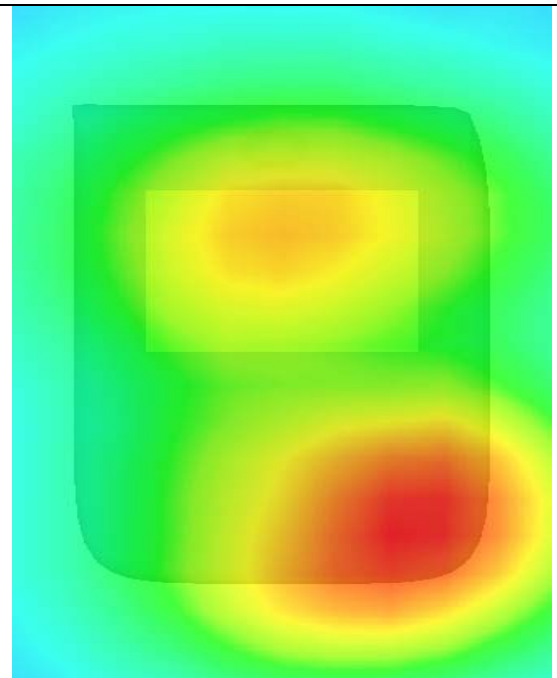

MEASUREMENT 39

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.540001
Relative permittivity	15.070000

Conductivity (S/m)	1.573978
Variation (%)	-0.380000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

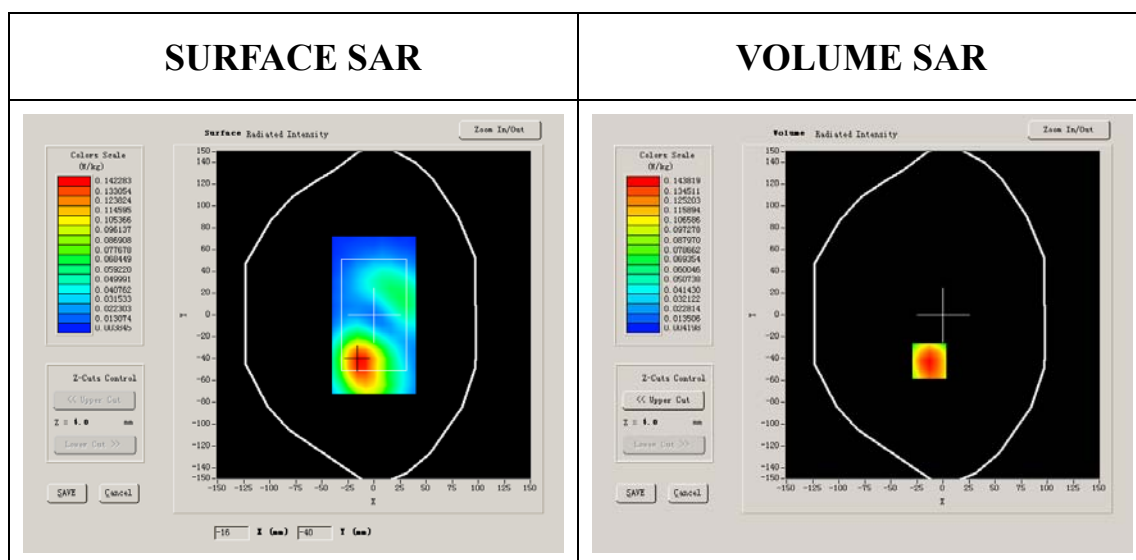


Maximum location: X=-13.00, Y=-42.00


SAR 10g (W/Kg)	0.089754
SAR 1g (W/Kg)	0.151163

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1576	0.0951	0.0560	0.0338	0.0210	0.0133

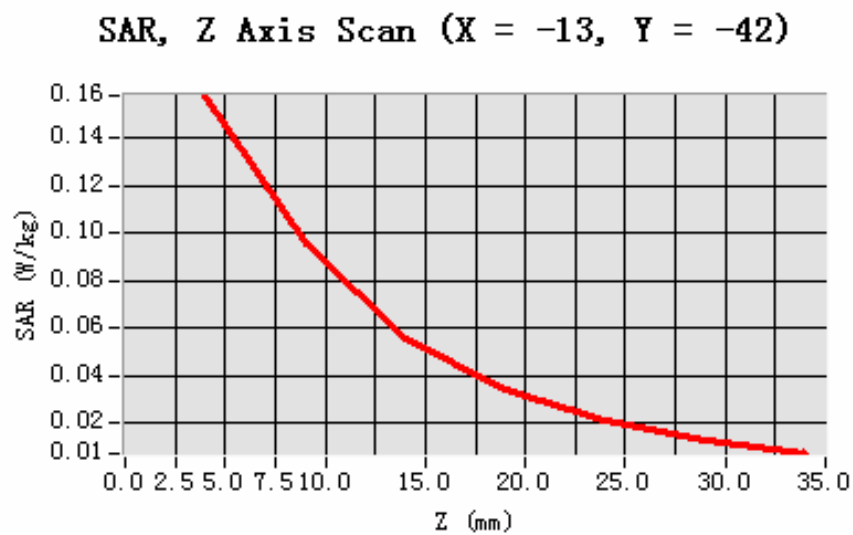

3D scene shot

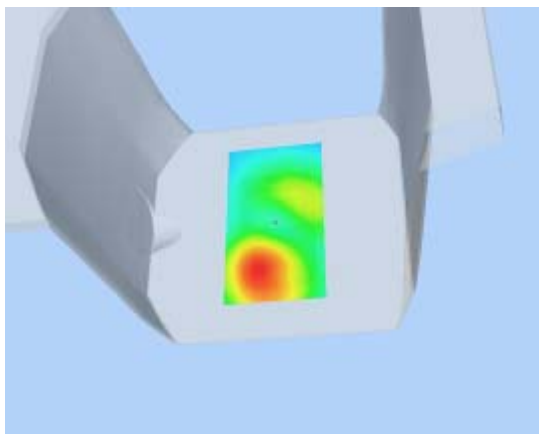

Hot spot position

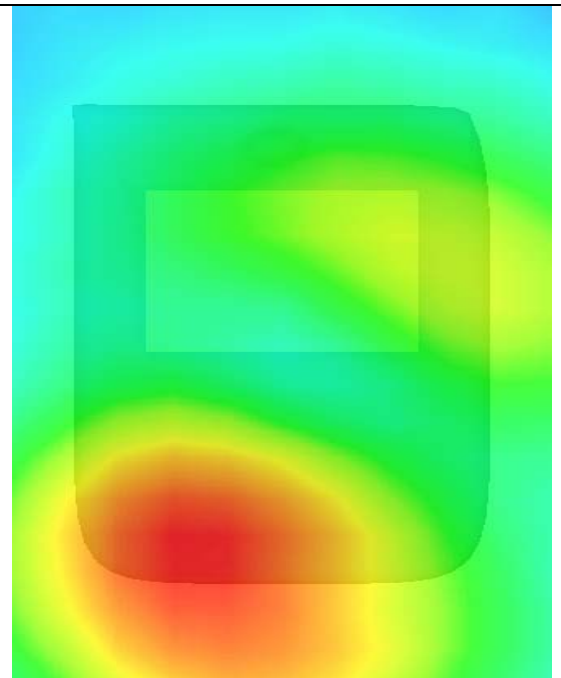

MEASUREMENT 40

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:11/1/2010

Measurement duration: 9 minutes 5 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.540001
Relative permittivity	15.070000

Conductivity (S/m)	1.573978
Variation (%)	1.000000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

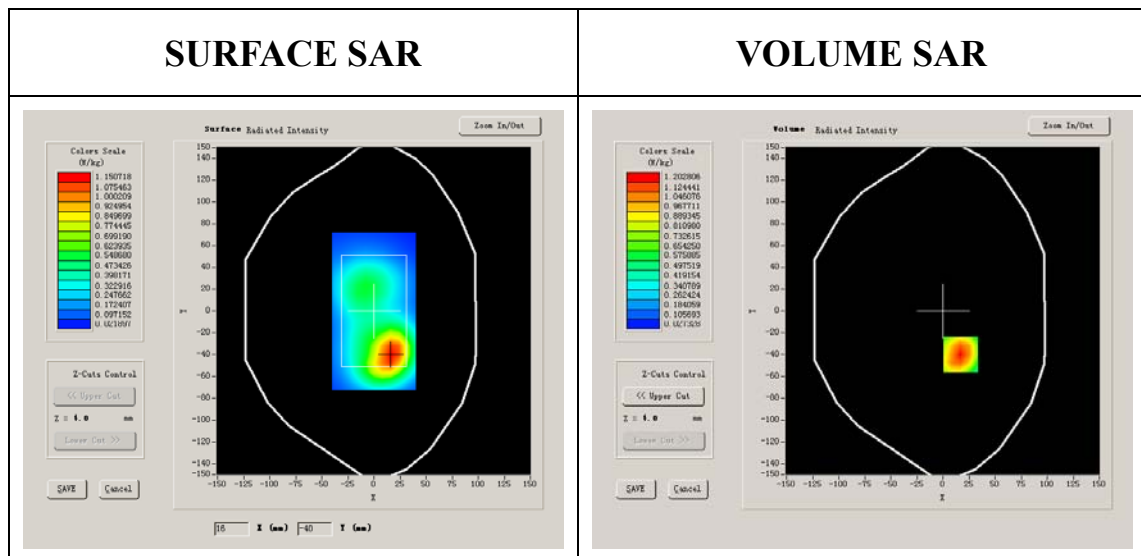


Maximum location: X=17.00, Y=-40.00

SAR 10g (W/Kg)	0.708835
SAR 1g (W/Kg)	1.139669


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.3183	0.7479	0.4426	0.2545	0.1484	0.0892


SAR, Z Axis Scan (X = 17, Y = -40)

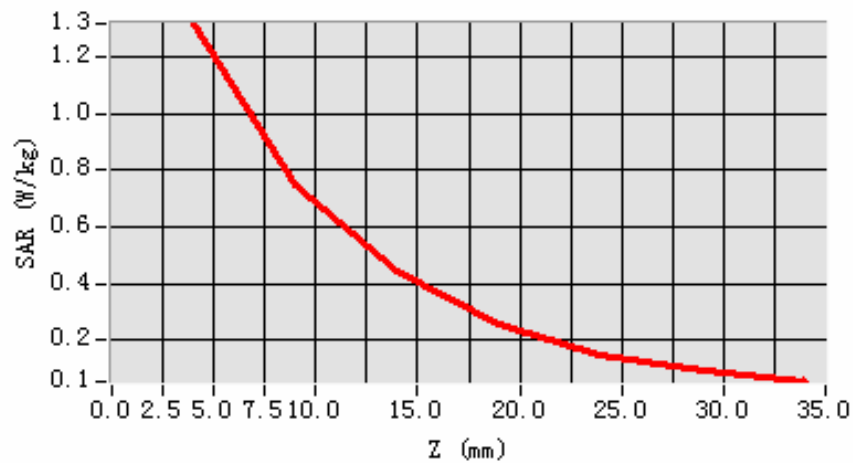

3D scene shot

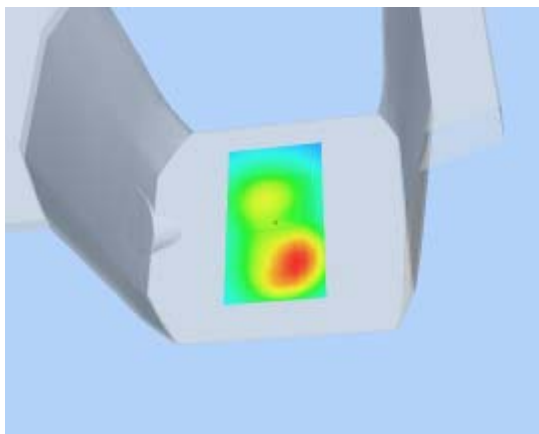

Hot spot position

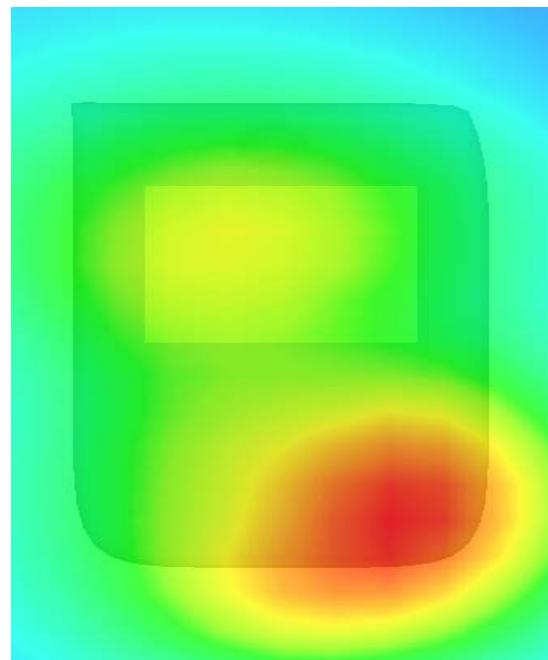

MEASUREMENT 41

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:11/1/2010

Measurement duration: 9 minutes 5 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	EDGE

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.540001
Relative permittivity	15.070000

Conductivity (S/m)	1.573978
Variation (%)	1.000000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

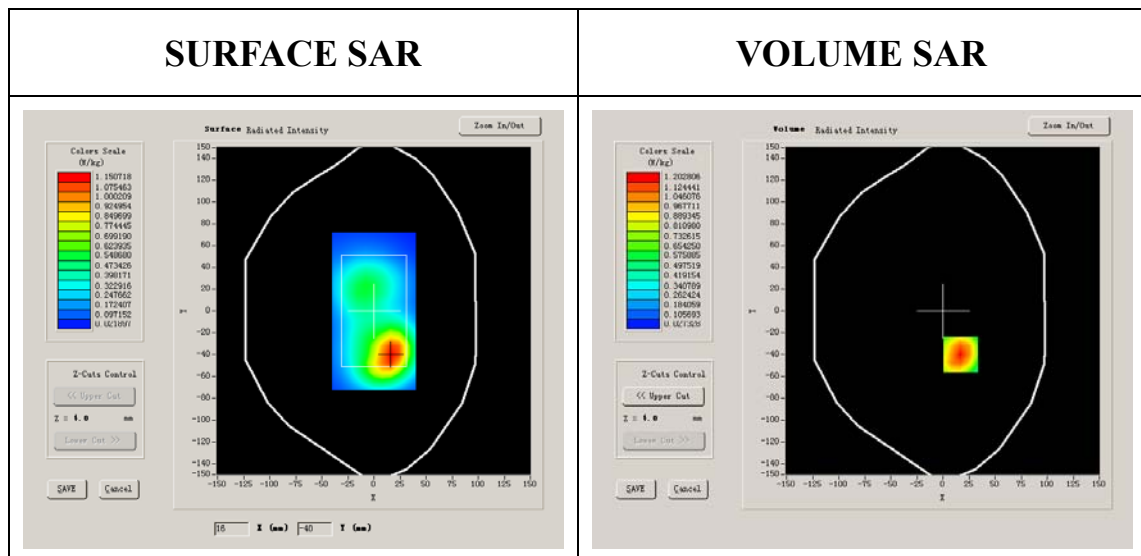


Maximum location: X=17.00, Y=-40.00

SAR 10g (W/Kg)	0.700573
SAR 1g (W/Kg)	1.118849


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.3183	0.7479	0.4426	0.2545	0.1484	0.0892


SAR, Z Axis Scan (X = 17, Y = -40)

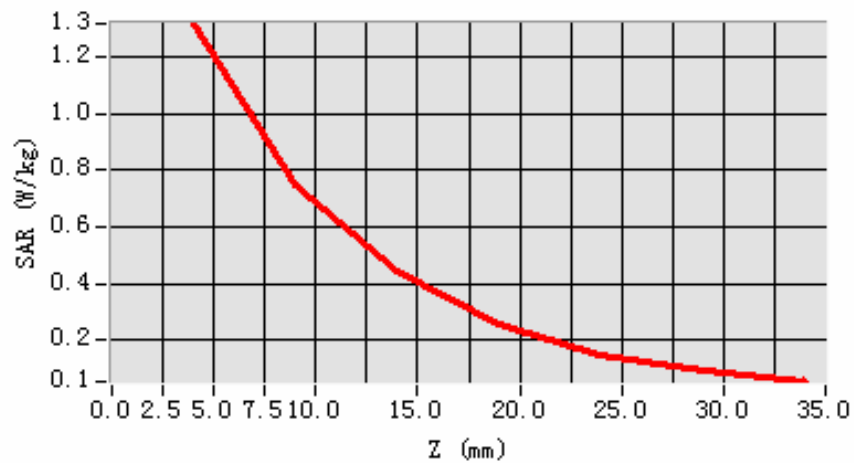

3D scene shot

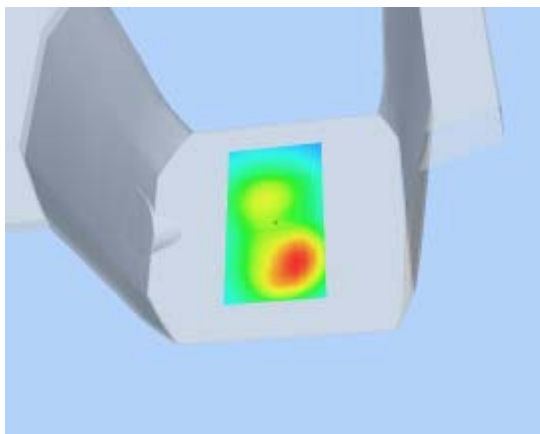

Hot spot position

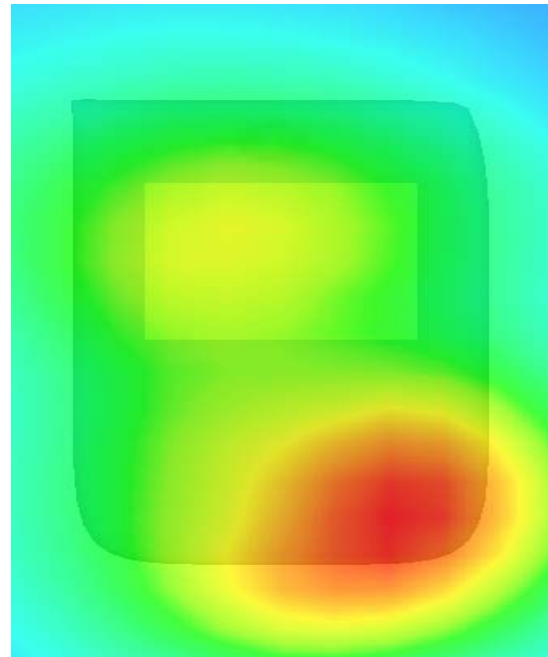

MEASUREMENT 42

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:11/1/2010

Measurement duration: 9 minutes 5 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.540001
Relative permittivity	15.070000

Conductivity (S/m)	1.573978
Variation (%)	0.230000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

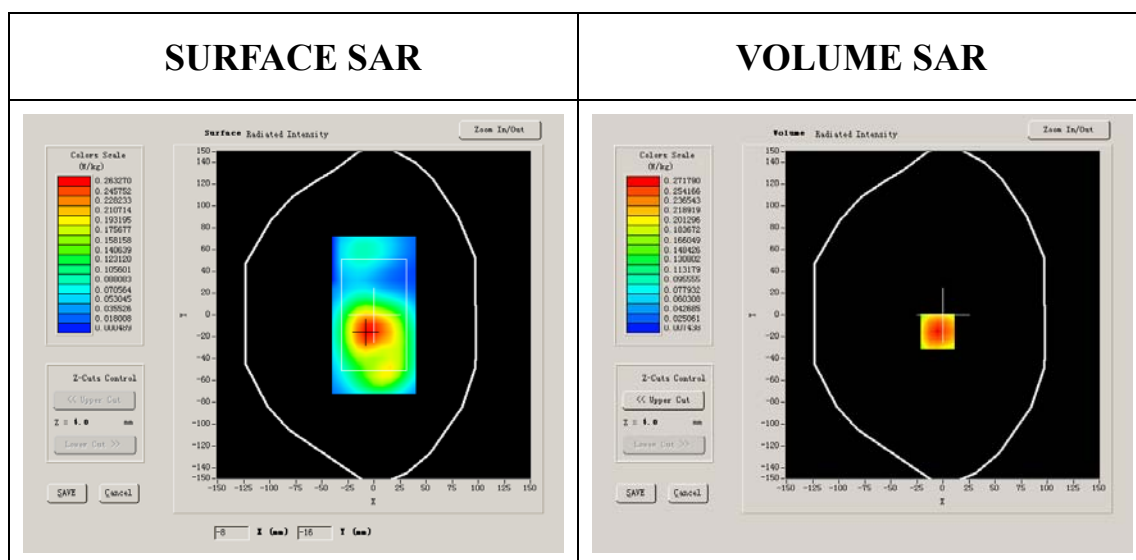


Maximum location: X=-5.00, Y=-15.00

SAR 10g (W/Kg)	0.162883
SAR 1g (W/Kg)	0.262772


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2979	0.1836	0.1142	0.0718	0.0441	0.0282


SAR, Z Axis Scan (X = -5, Y = -15)

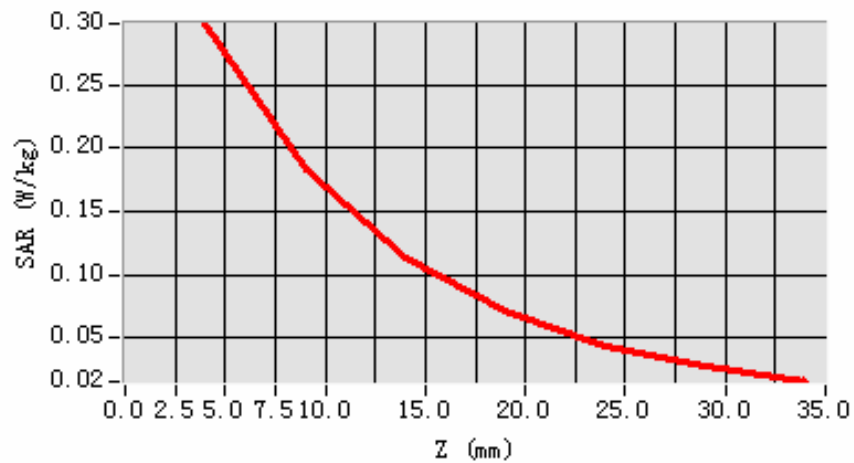

3D scene shot

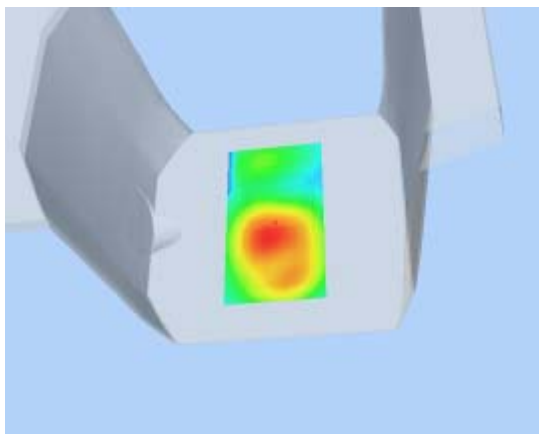

Hot spot position

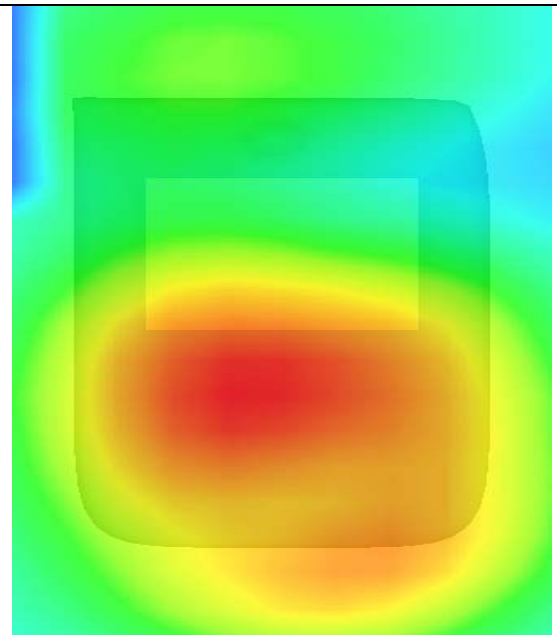

MEASUREMENT 43

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:11/1/2010

Measurement duration: 9 minutes 5 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.540001
Relative permittivity	15.070000

Conductivity (S/m)	1.573978
Variation (%)	0.230000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

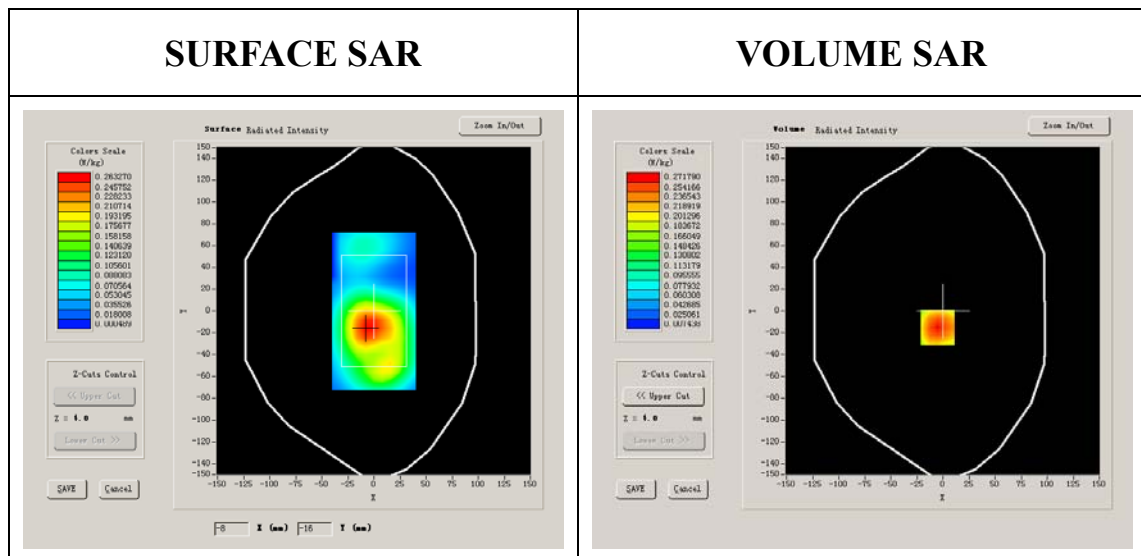


Maximum location: X=-5.00, Y=-15.00

SAR 10g (W/Kg)	0.173300
SAR 1g (W/Kg)	0.283815


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2979	0.1836	0.1142	0.0718	0.0441	0.0282


SAR, Z Axis Scan (X = -5, Y = -15)

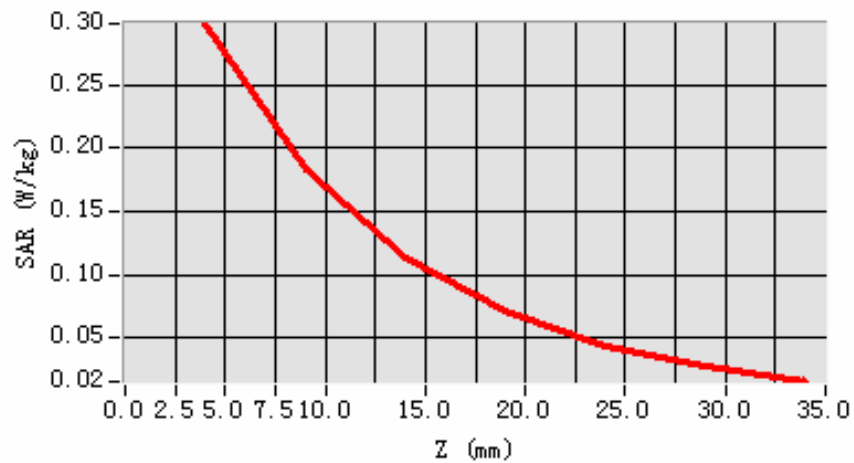

3D scene shot

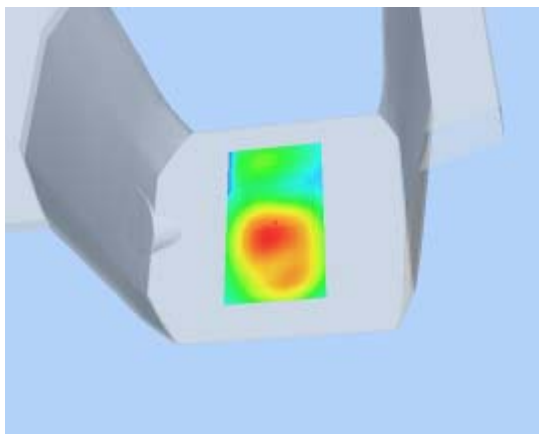

Hot spot position

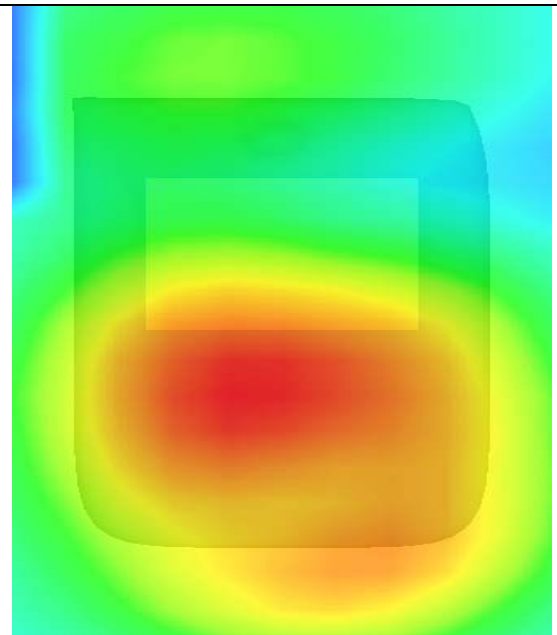

MEASUREMENT 44

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:11/1/2010

Measurement duration: 9 minutes 5 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.540001
Relative permittivity	15.070000

Conductivity (S/m)	1.573978
Variation (%)	0.230000
Ambient Temperature:	21.4°C
Liquid Temperature:	21.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

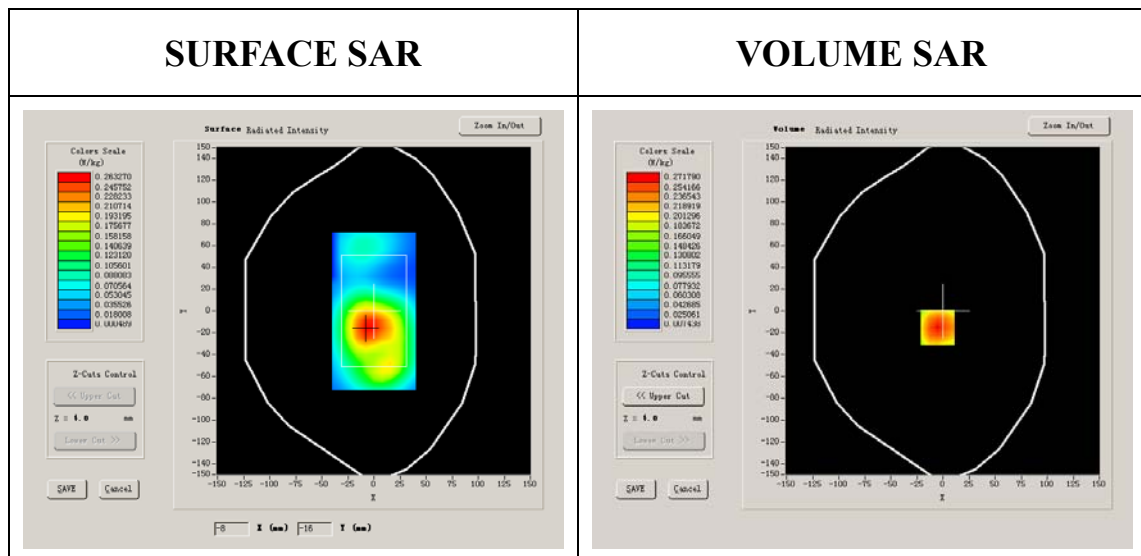


Maximum location: X=-5.00, Y=-15.00

SAR 10g (W/Kg)	0.194633
SAR 1g (W/Kg)	0.317733


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2979	0.1836	0.1142	0.0718	0.0441	0.0282


SAR, Z Axis Scan (X = -5, Y = -15)

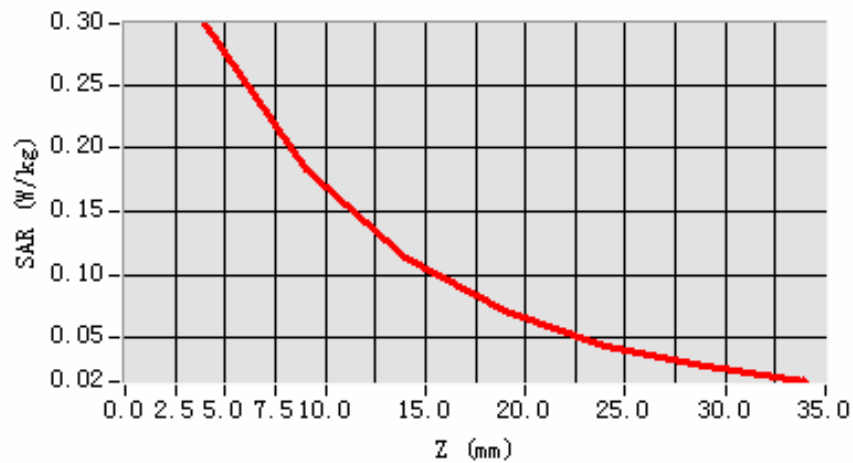

3D scene shot

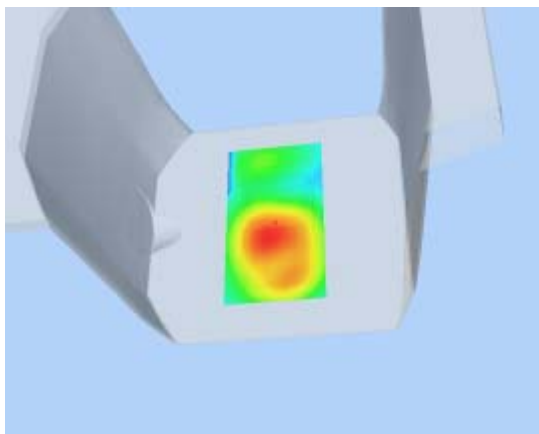

Hot spot position

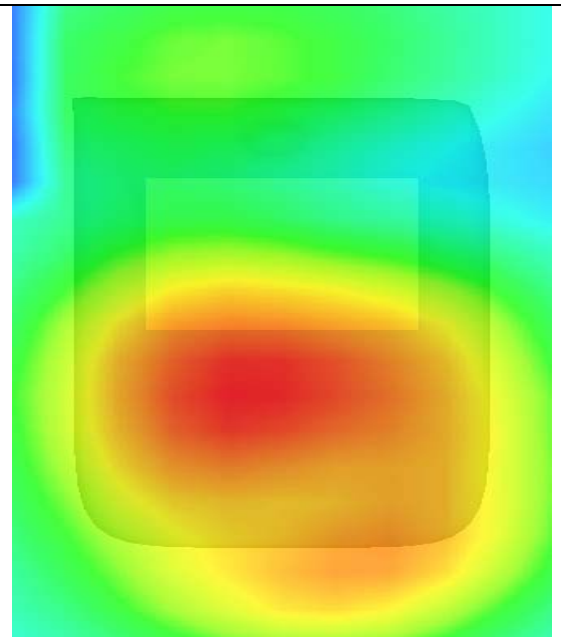

MEASUREMENT 45

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11 b
Channels	Low
Signal	CW

B. SAR Measurement Results

Lower Band SAR:

Frequency (MHz)	2412.000000
Relative permittivity (real part)	54.341000
Relative permittivity	18.926250

Conductivity (S/m)	1.541411
Variation (%)	-0.560000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

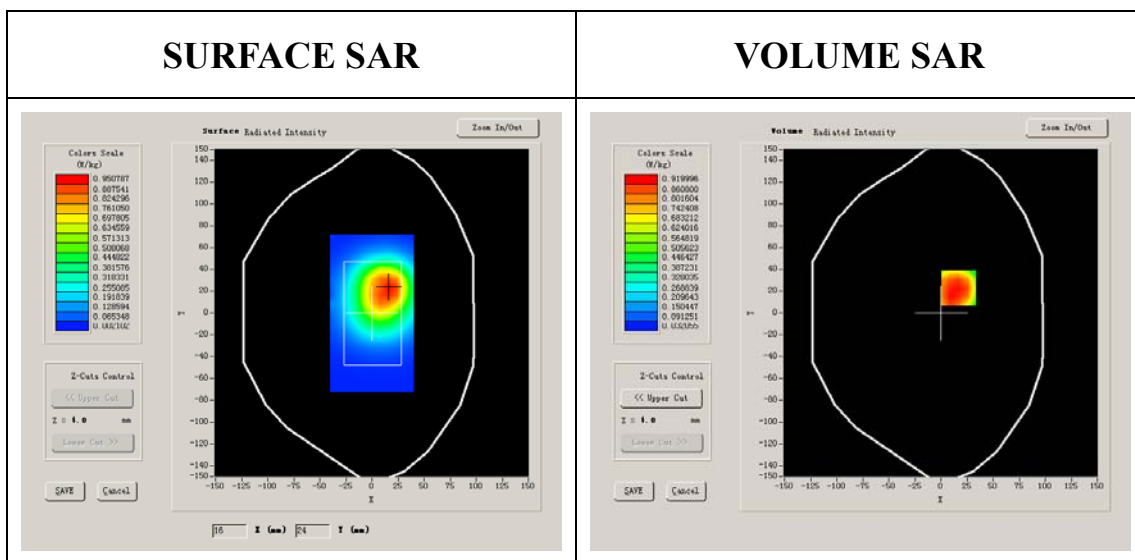


Maximum location: X=17.00, Y=23.00

SAR 10g (W/Kg)	0.093422
SAR 1g (W/Kg)	0.172884


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.9112	0.5812	0.3841	0.2467	0.1619	0.1087


SAR, Z Axis Scan (X = 17, Y = 23)

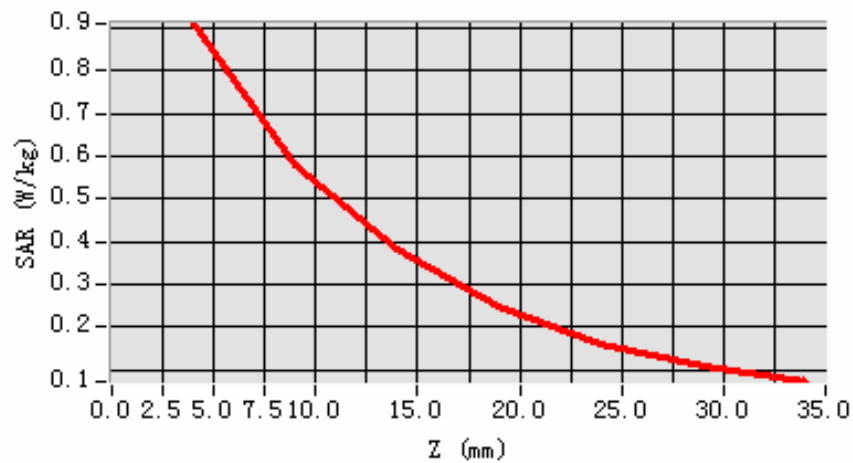

3D scene shot

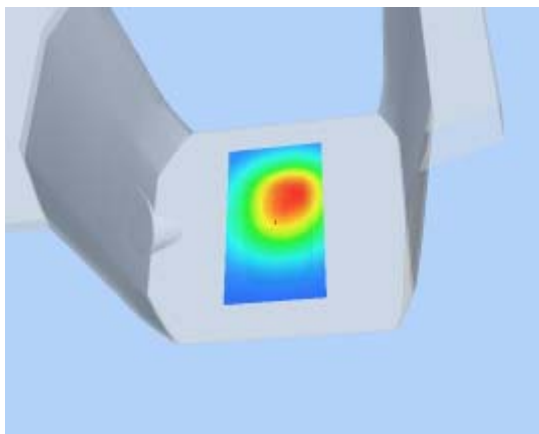

Hot spot position

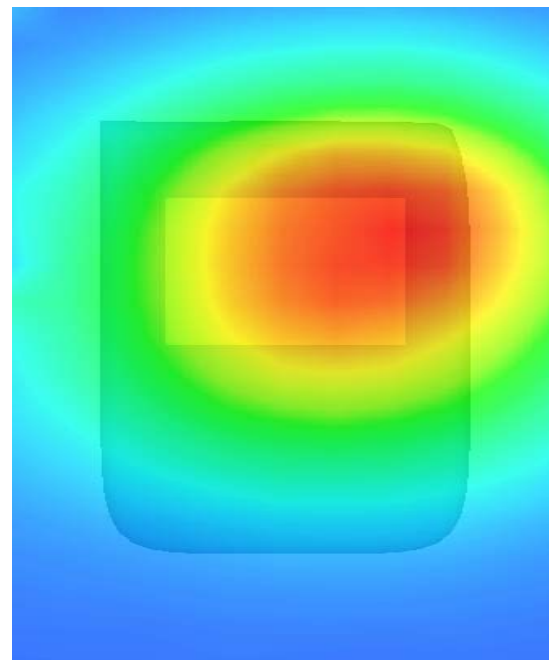

MEASUREMENT 46

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11 b
Channels	Middle
Signal	CW

B. SAR Measurement Results

Middle Band SAR:

Frequency (MHz)	2437.000000
Relative permittivity (real part)	54.341000
Relative permittivity	19.120001

Conductivity (S/m)	1.541411
Variation (%)	-2.180000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

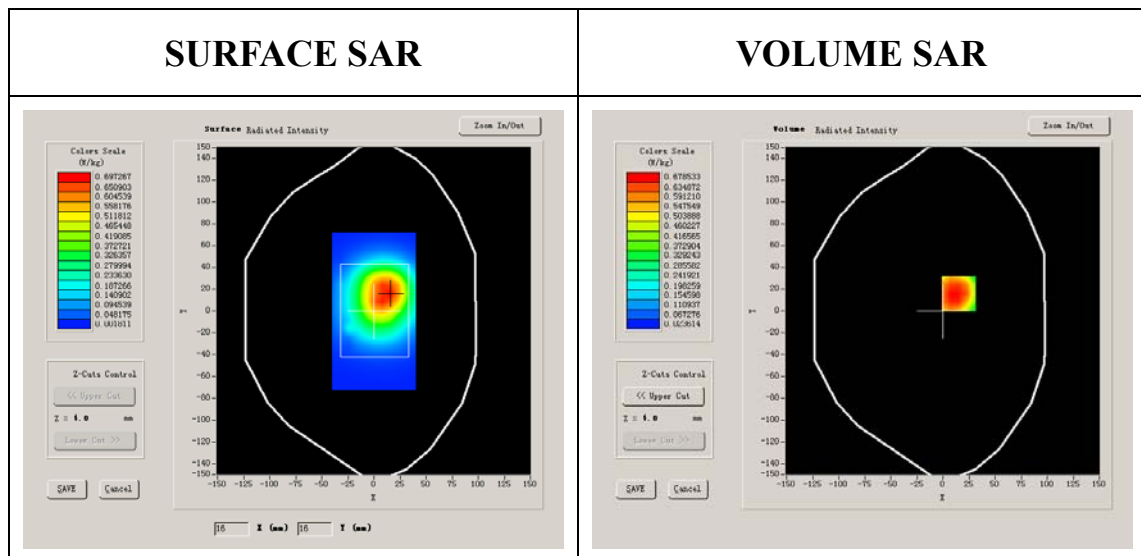


Maximum location: X=15.00, Y=16.00

SAR 10g (W/Kg)	0.077831
SAR 1g (W/Kg)	0.145832


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6732	0.4257	0.2657	0.1826	0.1143	0.0778


SAR, Z Axis Scan (X = 15, Y = 16)

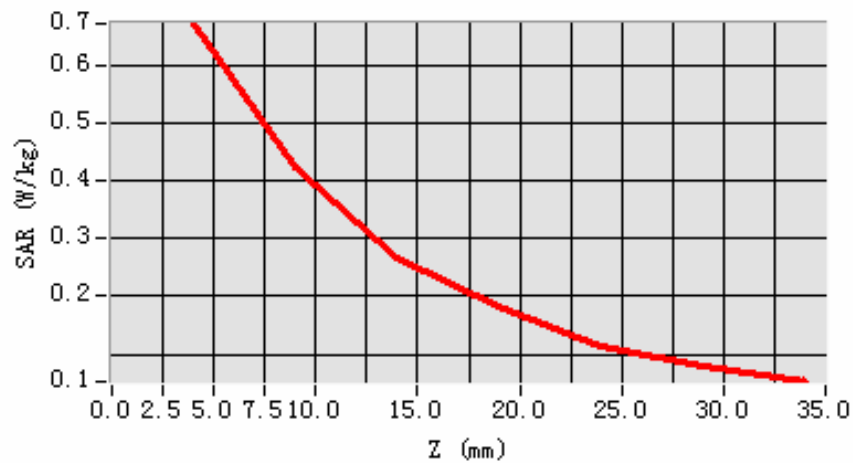

3D scene shot

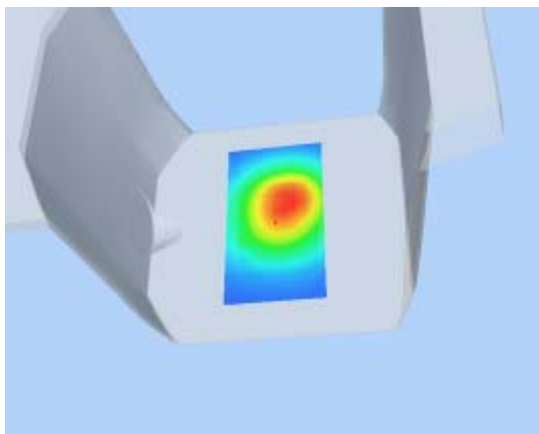

Hot spot position

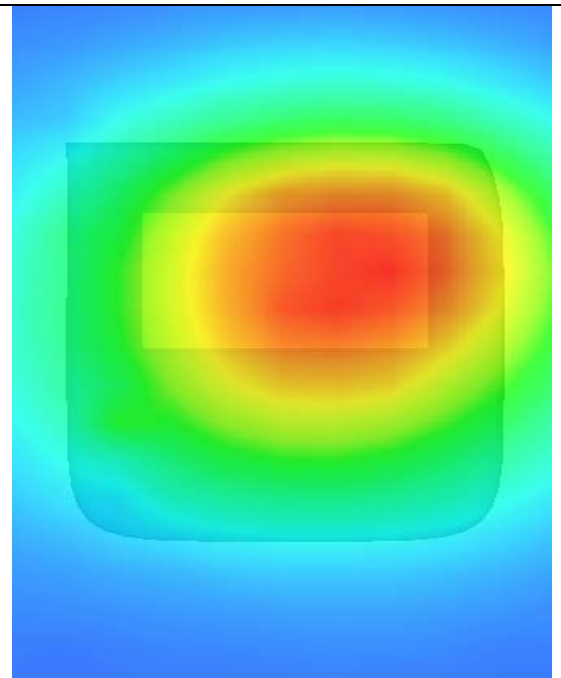

MEASUREMENT 47

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11 b
Channels	High
Signal	CW

B. SAR Measurement Results

Higher Band SAR:

Frequency (MHz)	2462.000000
Relative permittivity (real part)	54.341000
Relative permittivity	18.967199

Conductivity (S/m)	1.541411
Variation (%)	-1.440000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

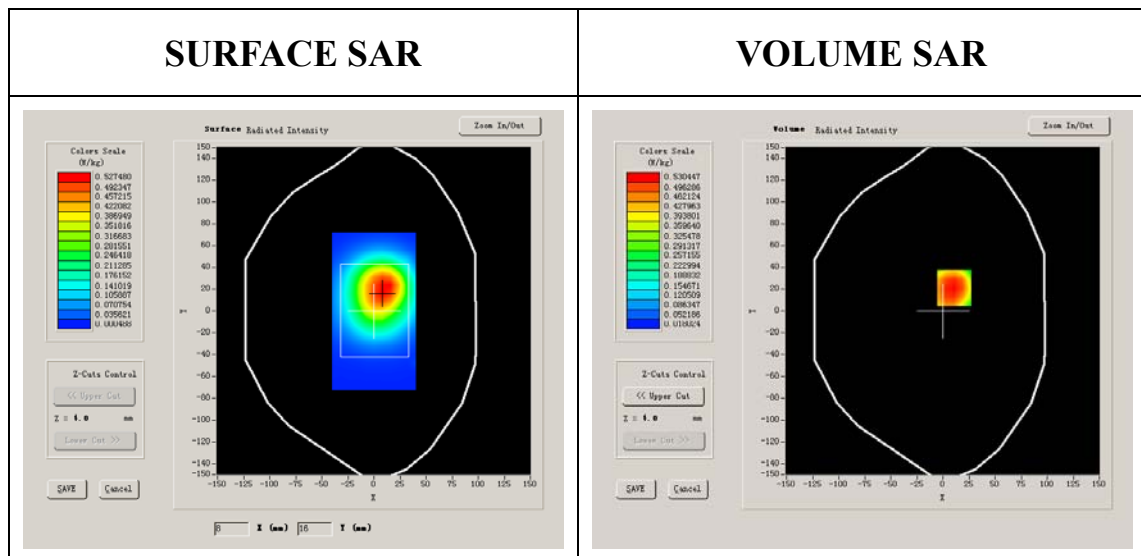


Maximum location: X=11.00, Y=21.00

SAR 10g (W/Kg)	0.072477
SAR 1g (W/Kg)	0.141735


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5304	0.3381	0.2129	0.1357	0.0870	0.0521


SAR, Z Axis Scan (X = 11, Y = 21)

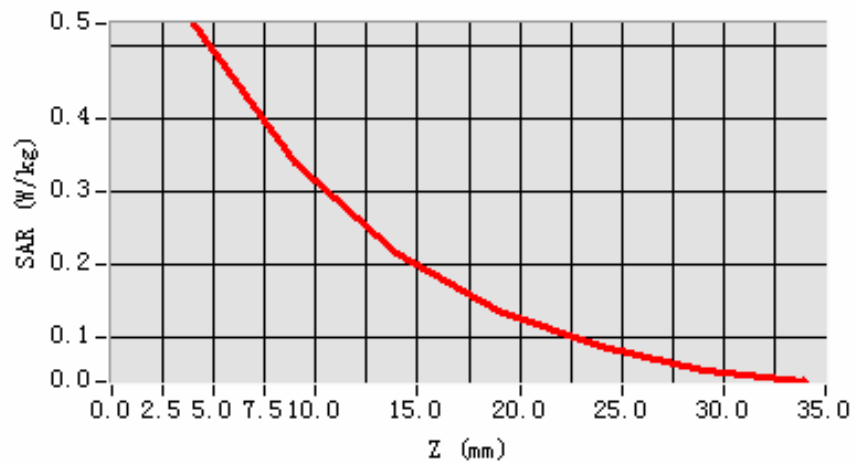

3D scene shot

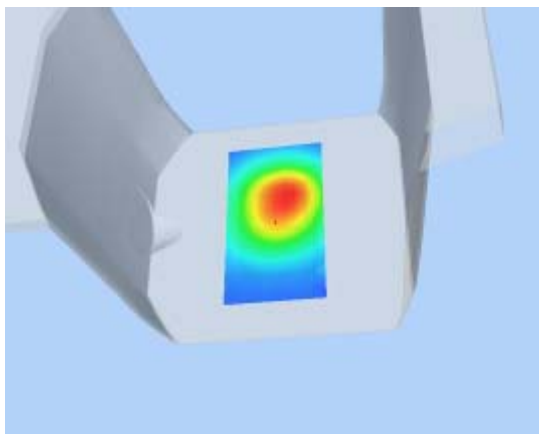

Hot spot position

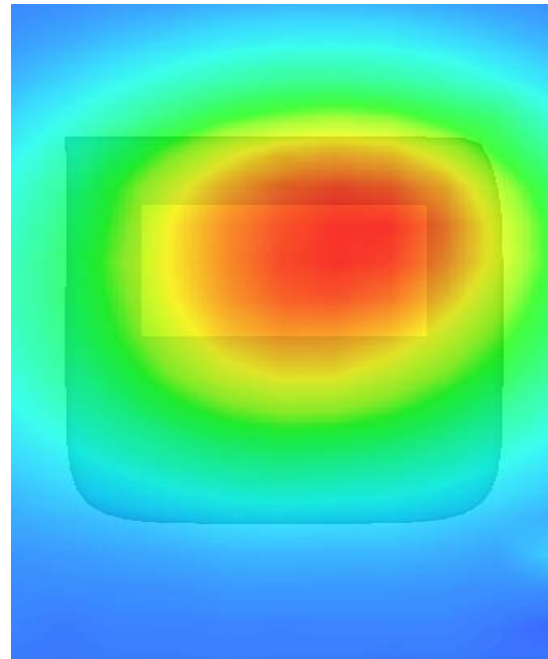

MEASUREMENT 48

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11 b
Channels	Low
Signal	CW

B. SAR Measurement Results

Lower Band SAR:

Frequency (MHz)	2450.000000
Relative permittivity (real part)	54.341000
Relative permittivity	18.926250

Conductivity (S/m)	1.541411
Variation (%)	-0.560000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

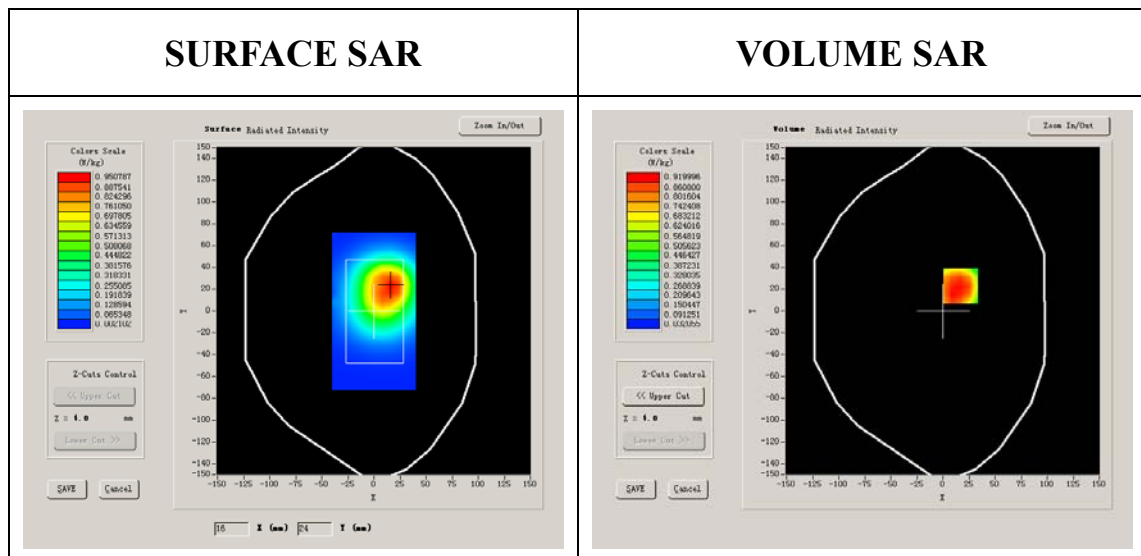


Maximum location: X=17.00, Y=23.00

SAR 10g (W/Kg)	0.056722
SAR 1g (W/Kg)	0.111773


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.9112	0.5812	0.3841	0.2467	0.1619	0.1087


SAR, Z Axis Scan (X = 17, Y = 23)

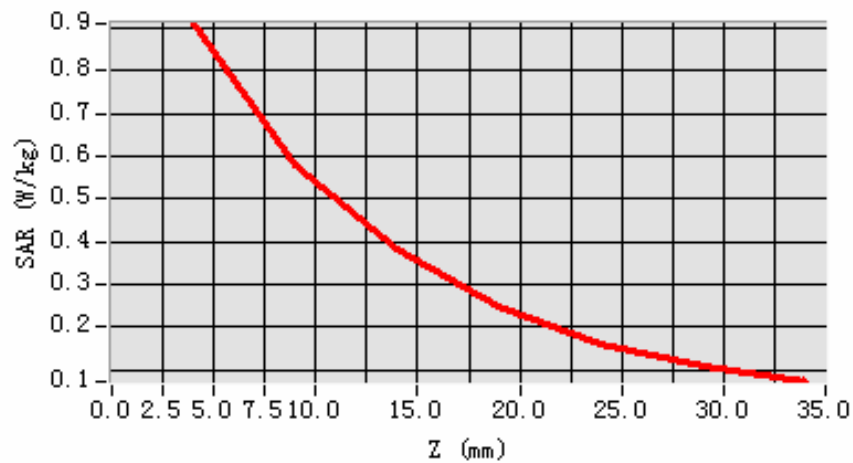

3D scene shot

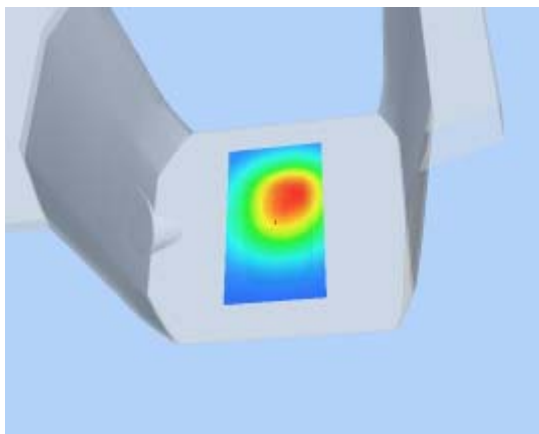

Hot spot position

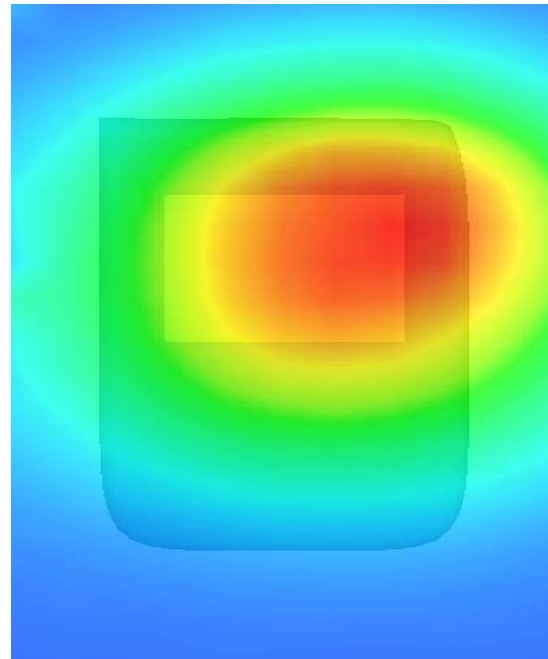

MEASUREMENT 49

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11 b
Channels	Low
Signal	CW

B. SAR Measurement Results

Lower Band SAR:

Frequency (MHz)	2450.000000
Relative permittivity (real part)	54.341000
Relative permittivity	18.926250

Conductivity (S/m)	1.541411
Variation (%)	-0.560000
Ambient Temperature:	22.5°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

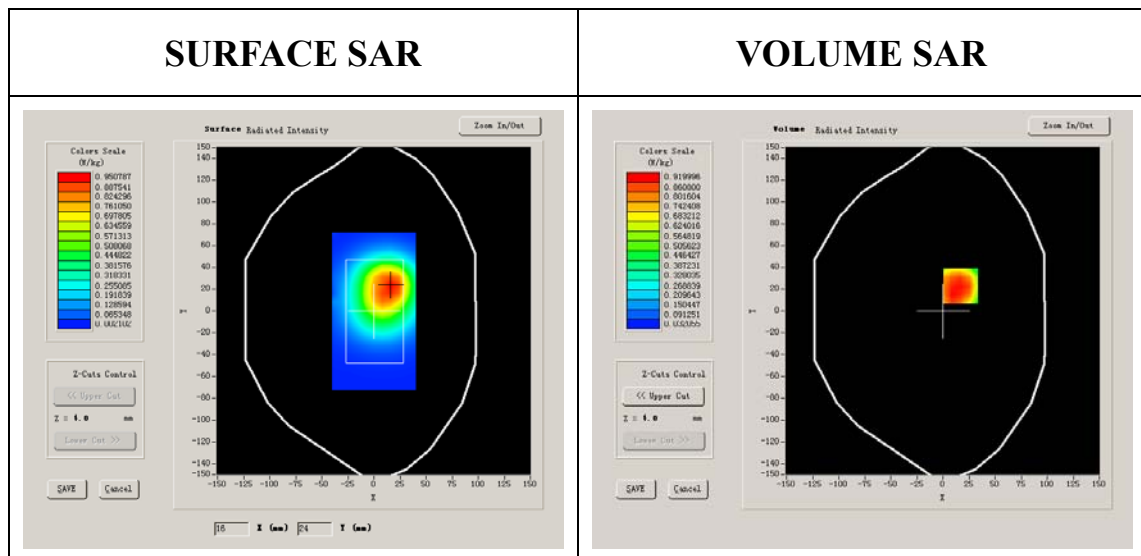


Maximum location: X=17.00, Y=23.00

SAR 10g (W/Kg)	0.064822
SAR 1g (W/Kg)	0.138384


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.9112	0.5812	0.3841	0.2467	0.1619	0.1087


SAR, Z Axis Scan (X = 17, Y = 23)

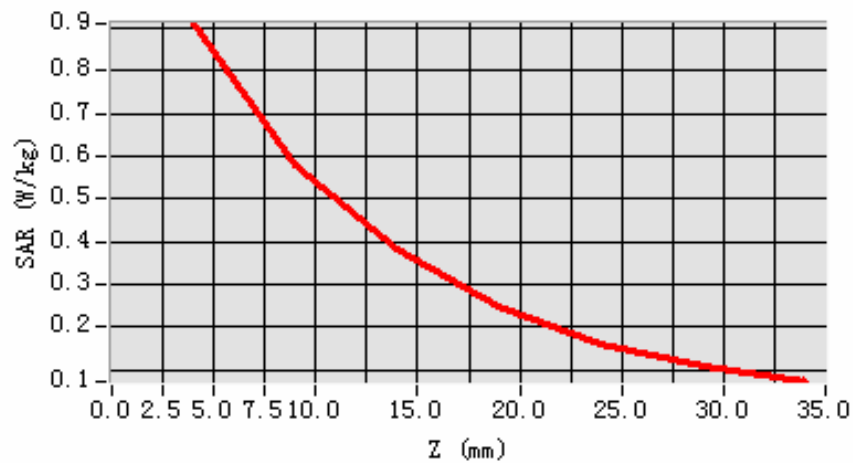

3D scene shot

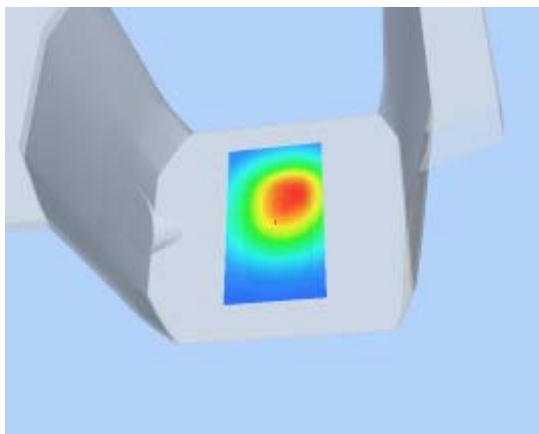

Hot spot position

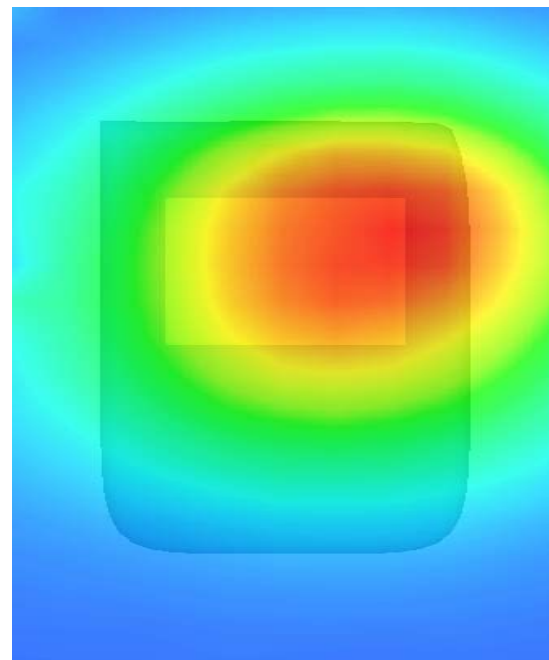

System Performance Check Data(835MHz Head)

Type: Phone measurement (Complete)

Date of measurement: 11/1/2010

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM 835MHz
Channels	
Signal	CW


B. SAR Measurement Results

Middle Band SAR:

Frequency (MHz)	835.00000
Relative permittivity (real part)	41.675999
Relative permittivity	18.926250
Conductivity (S/m)	0.894409

Variation (%)	-0.050000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:1

SURFACE SAR

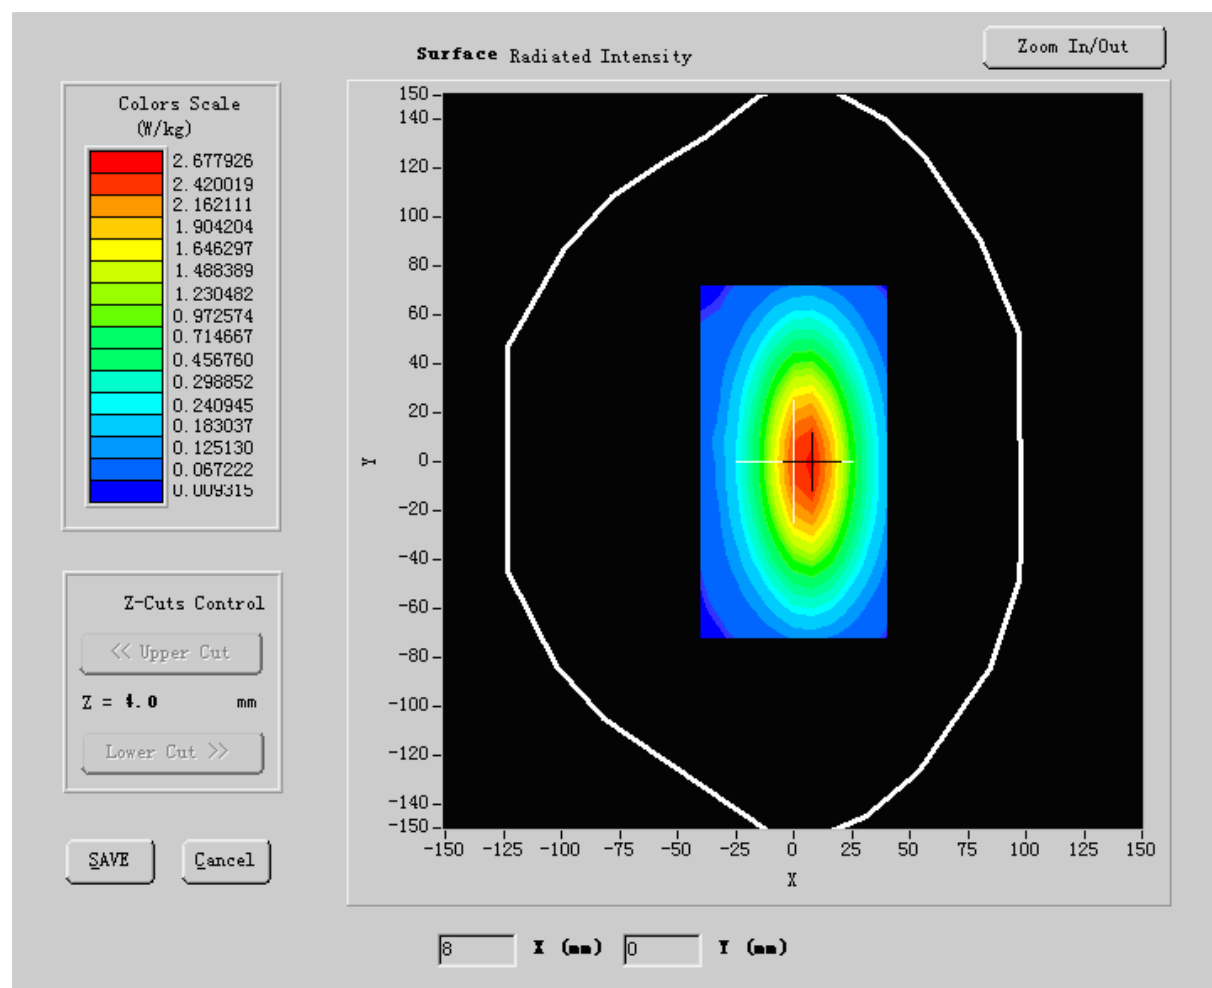


Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	1.875252
SAR 1g (W/Kg)	2.709422

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	2.6486	1.2069	0.5583	0.3002

SAR, Z Axis Scan (X = 5, Y = 1)

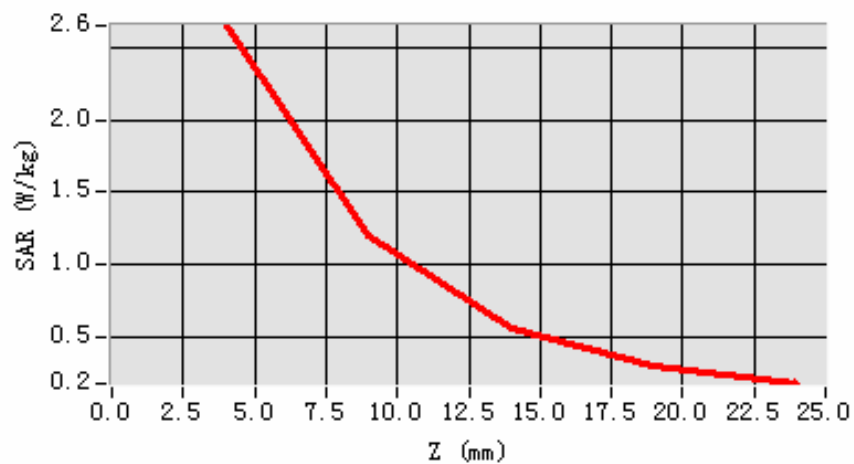

System Performance Check Data(835MHz Body)

Type: Phone measurement (Complete)

Date of measurement: 11/1/2010

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM 835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Middle Band SAR:

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	15.070000
Conductivity (S/m)	1.009033

Variation (%)	-0.140000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	28.479,25.214,27.196
Crest factor:	1:1

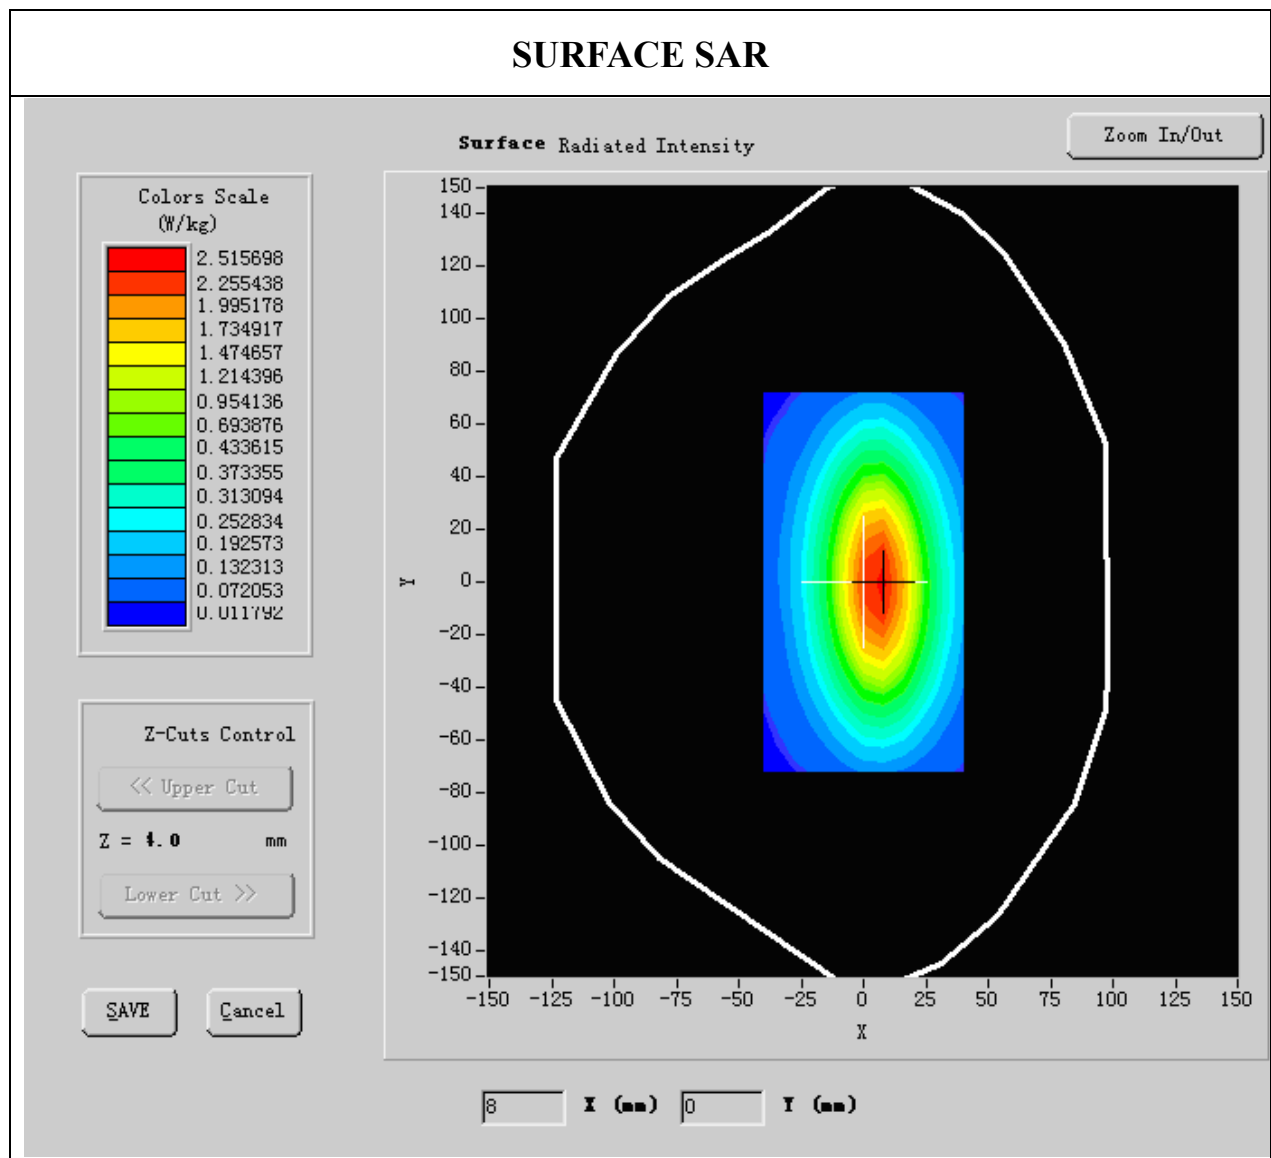


Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	1.652852
SAR 1g (W/Kg)	2.701584

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	2.8536	1.3061	0.6041	0.3211

SAR, Z Axis Scan (X = 5, Y = 1)

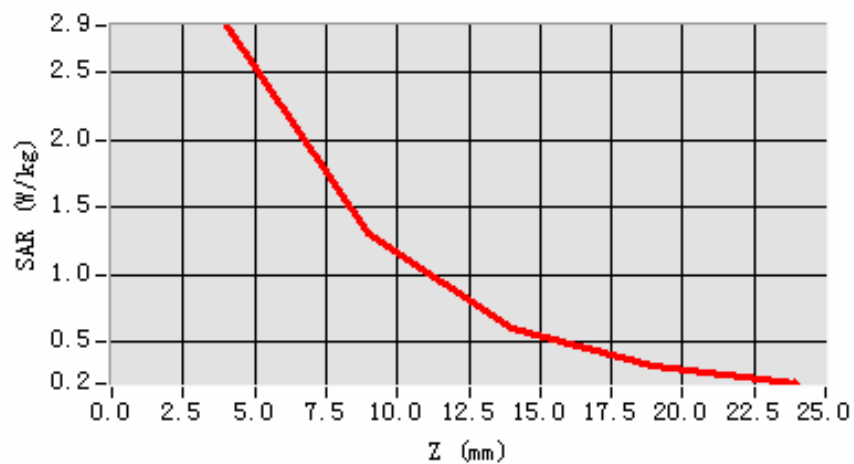

System Performance Check Data(1900MHz Head)

Type: Phone measurement (Complete)

Date of measurement: 11/1/2010

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	
Signal	CW


B. SAR Measurement Results

Lower Band SAR:

Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.481223
Relative permittivity	12.991650
Conductivity (S/m)	1.395758

Variation (%)	0.570000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR

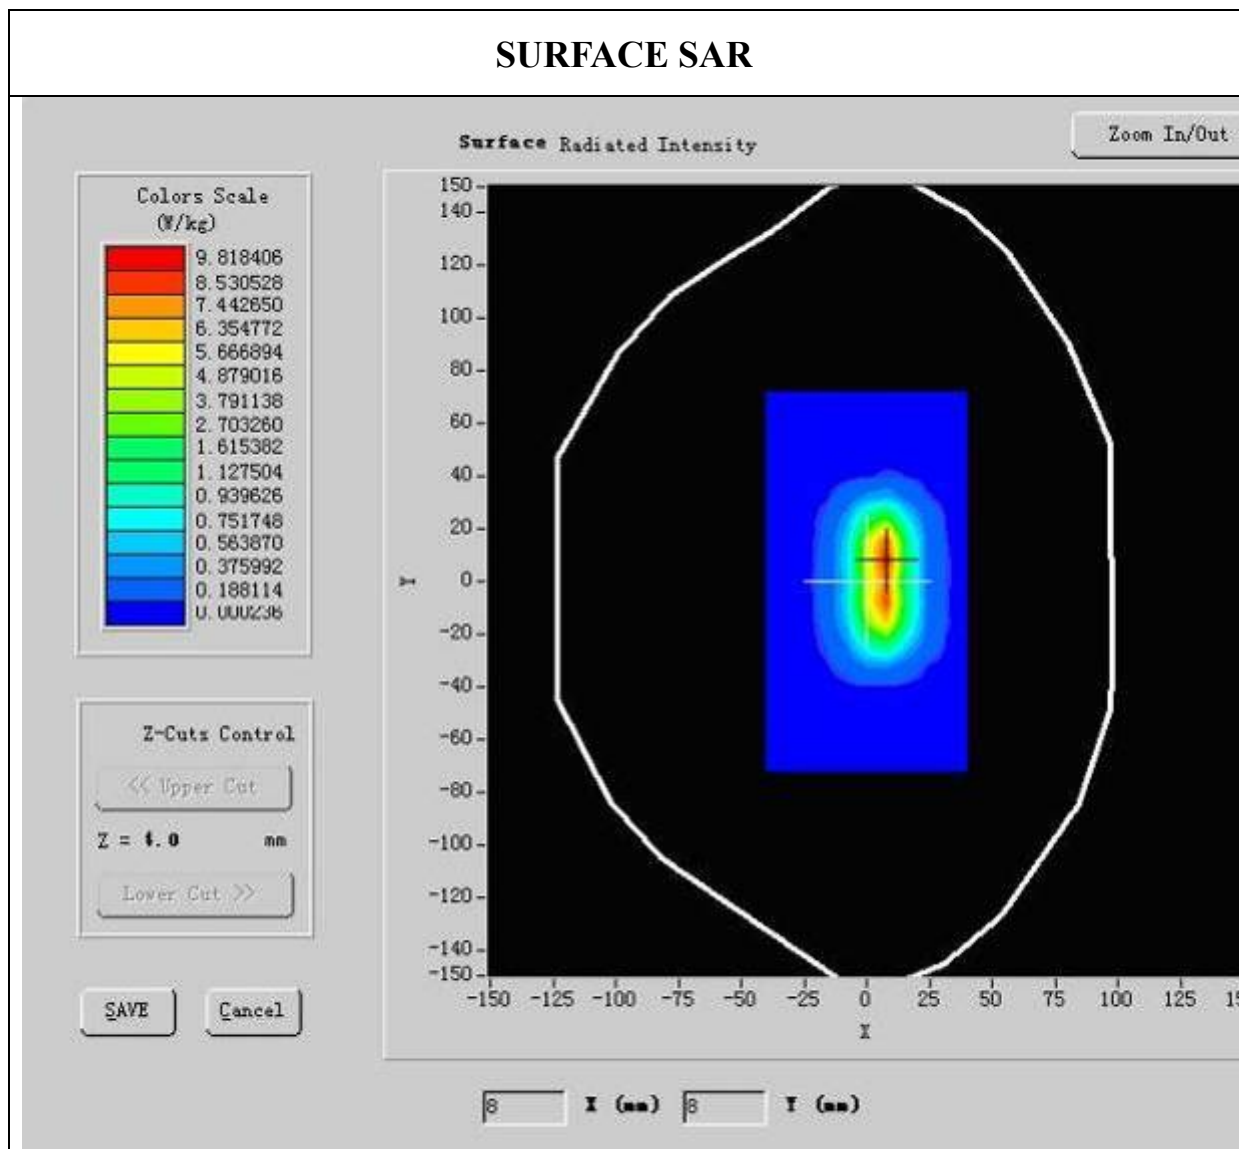


Maximum location: X=7.00, Y=8.00

SAR 10g (W/Kg)	5.873331
SAR 1g (W/Kg)	9.843651

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	1.3503	0.3791	0.0904	0.0338

SAR, Z Axis Scan (X = 7, Y = 8)

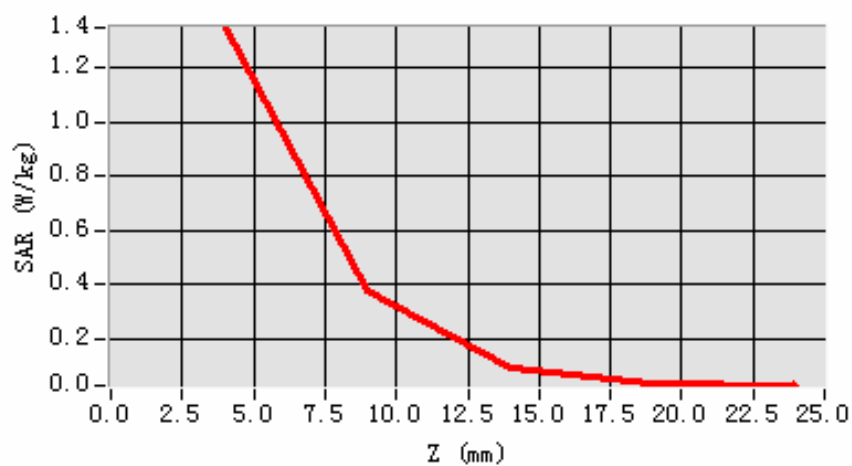

System Performance Check Data(1900MHz Body)

Type: Phone measurement (Complete)

Date of measurement: 11/1/2010

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	
Signal	CW


B. SAR Measurement Results

Lower Band SAR:

Frequency (MHz)	1900.000000
Relative permittivity (real part)	52.548876
Relative permittivity (imaginary part)	12.991650

Conductivity (S/m)	1.573978
Variation (%)	0.570000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	40.136,34.843,38.721
Crest factor:	1:1

SURFACE SAR

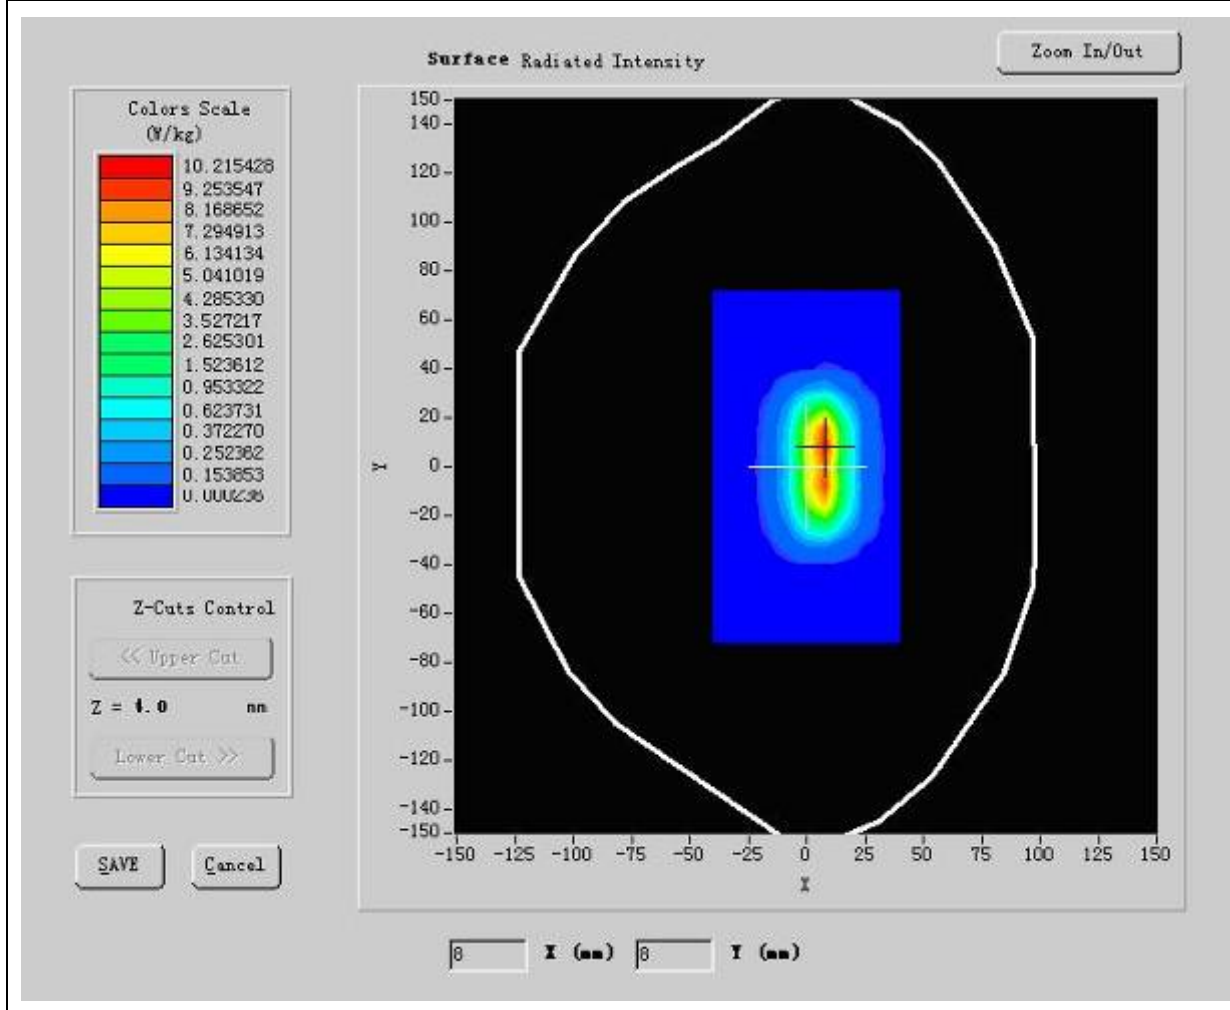


Maximum location: X=7.00, Y=8.00

SAR 10g (W/Kg)	5.487222
SAR 1g (W/Kg)	10.225723

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	1.3503	0.3791	0.0904	0.0338

SAR, Z Axis Scan (X = 7, Y = 8)

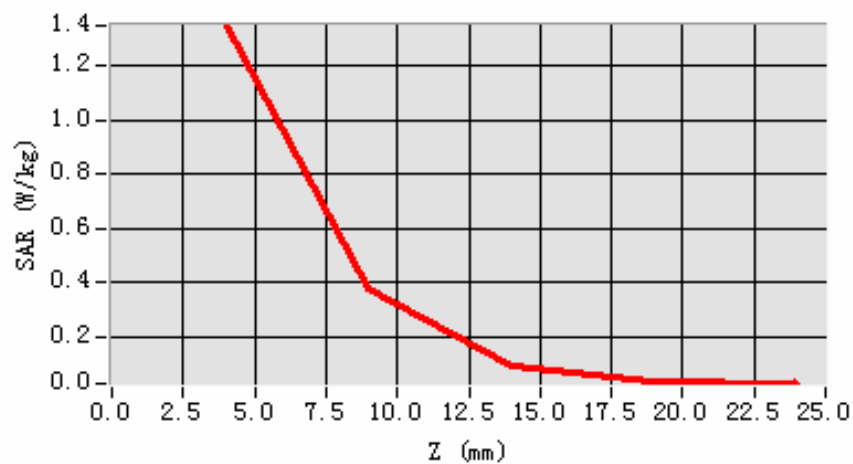

System Performance Check Data(2450MHz Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 11/1/2010

Measurement duration: 9 minutes 27 seconds

A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW


B. SAR Measurement Results

Lower Band SAR:

Frequency (MHz)	2450.000000
Relative permittivity (real part)	54.548876
Relative permittivity	12.991650

Conductivity (S/m)	1.541411
Variation (%)	0.570000
Ambient Temperature:	23.5°C
Liquid Temperature:	22.8°C
ConvF:	39.563,33.614,37.677
Crest factor:	1:1

SURFACE SAR

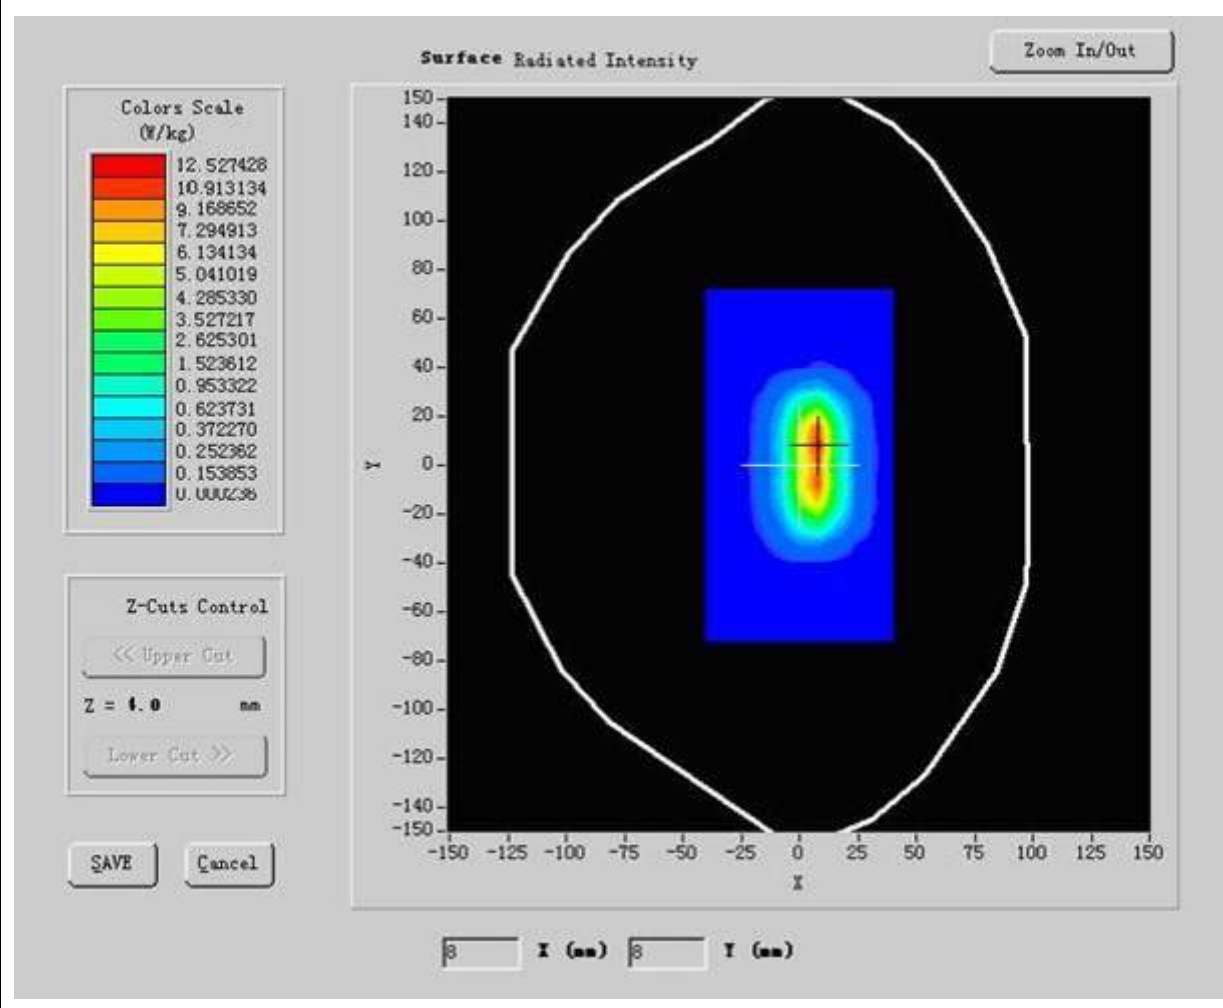

Maximum location: X=7.00, Y=8.00

SAR 10g (W/Kg)	7.077634
SAR 1g (W/Kg)	12.988772

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	1.3503	0.3791	0.0904	0.0338

SAR, Z Axis Scan (X = 7, Y = 8)

