

# RF TEST REPORT



Report No.: 17070263-FCC-R2

Supersede Report No.: N/A

Applicant	Verykool USA Inc	
Product Name	Mobile Phone	
Model No.	s5528	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	April 07 to April 21, 2017	
Issue Date	April 22, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Loren Luo</i>	<i>David Huang</i>	
Loren Luo Test Engineer	David Huang Checked By	
<p>This test report may be reproduced in full only</p> <p>Test result presented in this test report is applicable to the tested sample only</p>		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070263-FCC-R2
Page	3 of 66

This page has been left blank intentionally.

# CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION .....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	9
6.1 ANTENNA REQUIREMENT .....	9
6.2 CHANNEL SEPARATION.....	10
6.3 20DB BANDWIDTH .....	14
6.4 PEAK OUTPUT POWER .....	18
6.5 NUMBER OF HOPPING CHANNEL .....	22
6.6 TIME OF OCCUPANCY (DWELL TIME).....	24
6.7 BAND EDGE & RESTRICTED BAND .....	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED EMISSIONS & RESTRICTED BAND.....	42
ANNEX A. TEST INSTRUMENT.....	48
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	49
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	61
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	65
ANNEX E. DECLARATION OF SIMILARITY .....	66

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070263-FCC-R2	NONE	Original	April 22, 2017

## 2. Customer information

Applicant Name	Verykool USA Inc
Applicant Add	3636 Nobel Drive, Suite 325, San Diego, California 92122 United States
Manufacturer	FortuneShip International Industrial Ltd
Manufacturer Add	6/F, Kanghesheng Building, No.1 Chuangsheng Road, Nanshan District, Shenzhen, Guangdong, China

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software of Radiated Emission	Radiated Emission Program-To Shenzhen v2.0
Test Software of Conducted Emission	EZ-EMC(ver.lcp-03A1)

## 4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	s5528
Serial Model:	N/A
Date EUT received:	April 06, 2017
Test Date(s):	April 07 to April 21, 2017
Equipment Category :	DSS
Antenna Gain:	GSM850: 0.5dBi PCS1900:1.3dBi UMTS-FDD Band V: 0.5dBi UMTS-FDD Band IV: 0.5dBi UMTS-FDD Band II: 0.5dBi WIFI: -0.3dBi Bluetooth/BLE:0.5dBi GPS: 0.2dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz

WIFI: 802.11b/g/n(20M): 2412-2462 MHz  
 WIFI: 802.11n(40M): 2422-2452 MHz  
 Bluetooth& BLE: 2402-2480 MHz  
 GPS: 1575.42 MHz

Max. Output Power: 2.094dBm

Number of Channels: GSM 850: 124CH  
 PCS1900: 299CH  
 UMTS-FDD Band V: 102CH  
 UMTS-FDD Band IV: 202CH  
 UMTS-FDD Band II: 277CH  
 WIFI :802.11b/g/n(20M): 11CH  
 WIFI :802.11n(40M): 7CH  
 Bluetooth: 79CH  
 BLE: 40CH  
 GPS:1CH

Port: USB Port, Earphone Port

Input Power: Adapter:  
 Model: TPA-46D050100UU  
 Input: AC100-240V~50/60Hz,0.2A  
 Output: DC 5.0V,1.0A  
 Battery:  
 Model: RS628  
 Spec : 3.8V,3000mAh,11.4Wh  
 voltage: 4.35V

Trade Name : verykool

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: WA6S5528

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-



## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 2 antennas:

A permanently attached PIFA antenna for GSM/PCS/UMTS-FDD Band V/UMTS-FDD Band IV /UMTS-FDD Band II, the gain is 0.5dBi for GSM/UMTS-FDD Band V/UMTS-FDD Band IV /UMTS-FDD Band II, the gain is 1.3dBi for PCS.

A permanently attached PIFA antenna for Bluetooth/WIFI/BLE/GPS, the gain is 0.5dBi for Bluetooth/BLE, the gain is -0.3dBi for WIFI, the gain is 0.2dBi for GPS.


**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 Channel Separation

Temperature	24 °C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	April 19, 2017
Tested By :	Loren Luo

### Requirement(s):

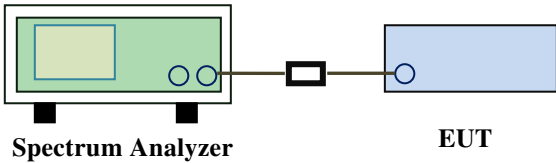Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.</li> </ul>		

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

### Channel Separation measurement result


Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.693	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.689	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.684	Pass
	Adjacency Channel	2479			
CH Separation $\pi$ / 4 DQPSK	Low Channel	2402	1.005	0.860	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.859	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.873	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.858	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.857	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.858	Pass
	Adjacency Channel	2479			

## Test Plots


### Channel Separation measurement result

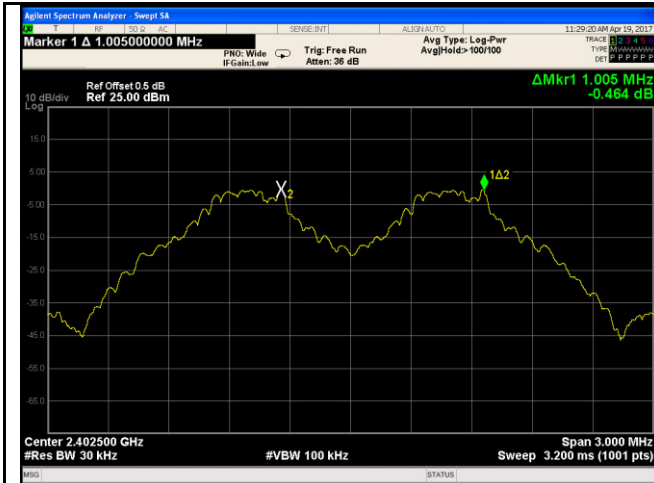


GFSK - Low Channel

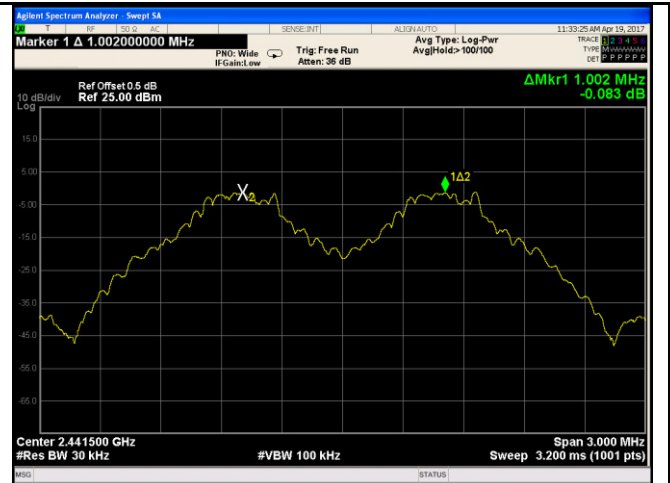


GFSK - Middle Channel

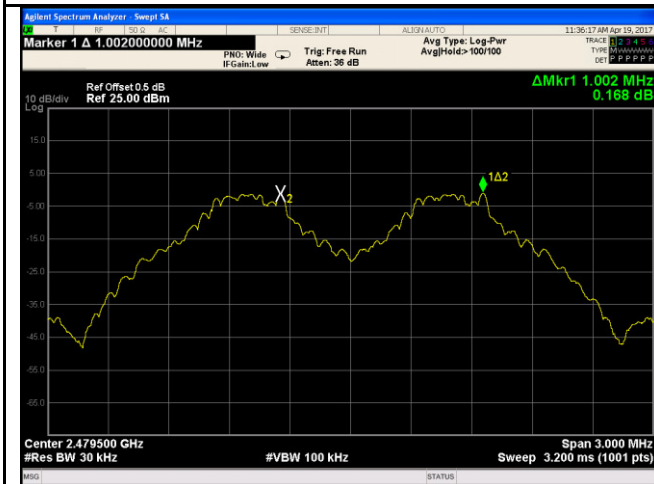


GFSK - High Channel

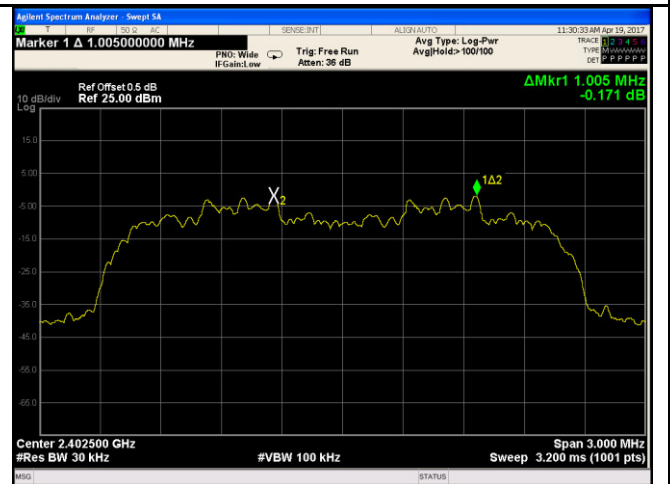

$\pi/4$  DPSK - Low Channel

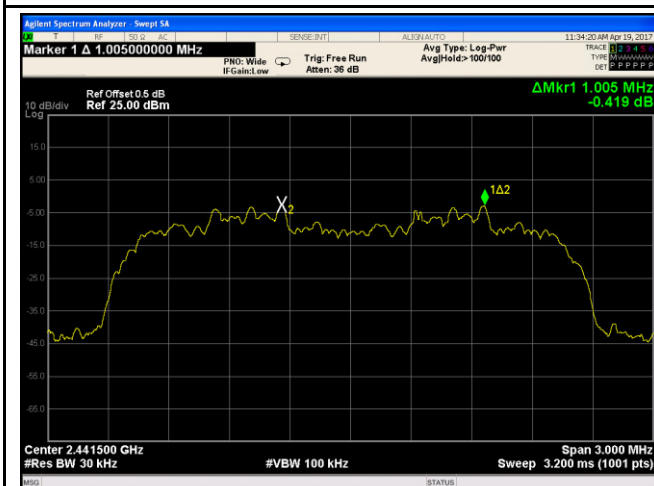


$\pi/4$  DQPSK - Middle Channel

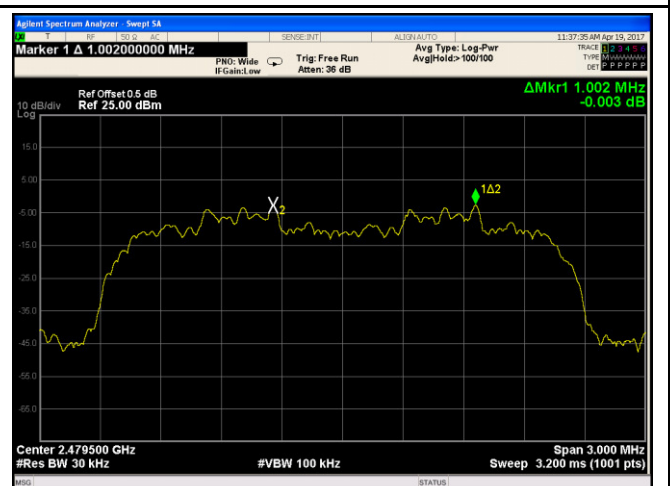

$\pi/4$  DQPSK - High Channel




8DPSK - Low Channel

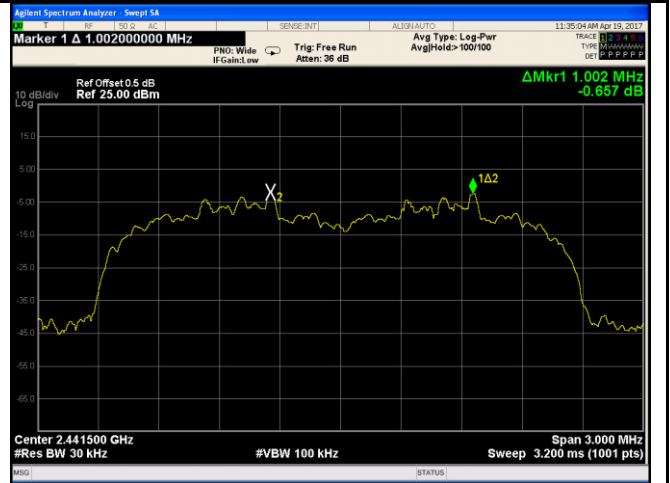

8DPSK - Middle Channel



8DPSK - High Channel




### 6.3 20dB Bandwidth

Temperature	24 °C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	April 19, 2017
Tested By :	Loren Luo

#### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

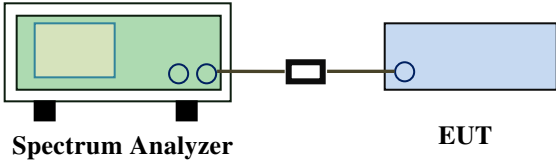Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW <math>\geq</math> 1% of the 20 dB bandwidth</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold.</li> <li>- The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference</li> </ul>
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

#### Measurement result


Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.040	0.9020
	Mid	2441	1.034	0.8985
	High	2480	1.026	0.8937
$\pi$ /4 DQPSK	Low	2402	1.290	1.1703
	Mid	2441	1.289	1.1686
	High	2480	1.309	1.1689
8-DPSK	Low	2402	1.287	1.1721
	Mid	2441	1.286	1.1691
	High	2480	1.287	1.1661

## Test Plots


### 20dB Bandwidth measurement result

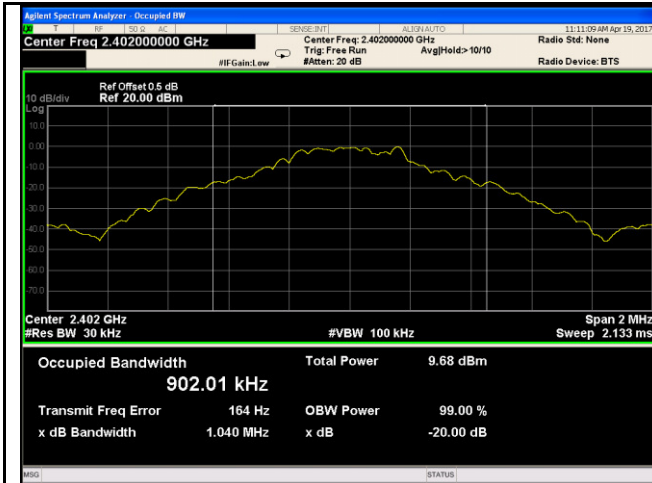


GFSK - Low Channel

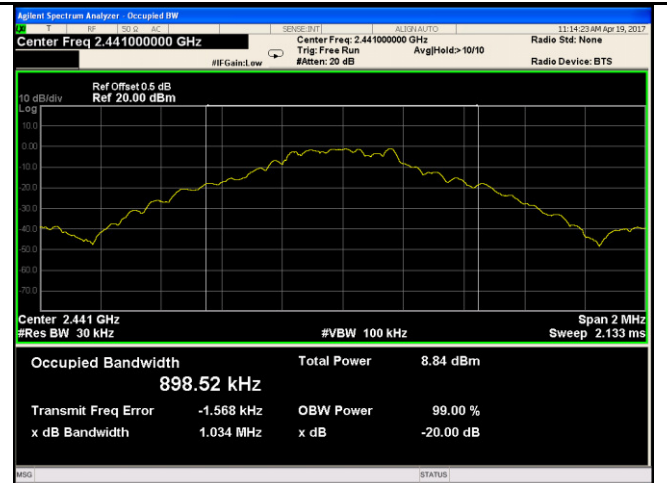


GFSK - Middle Channel

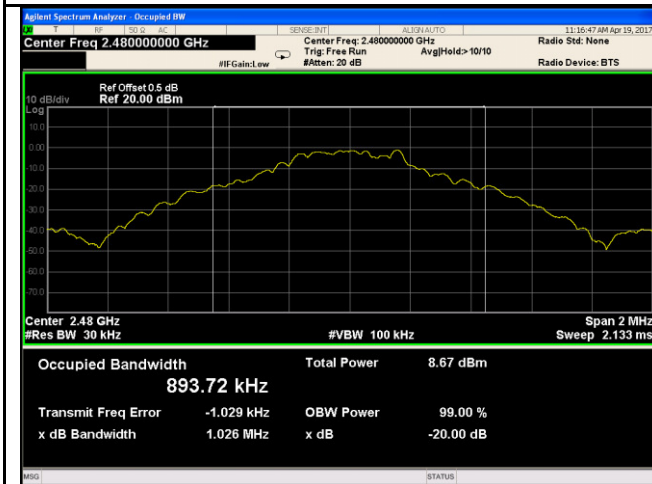


GFSK - High Channel

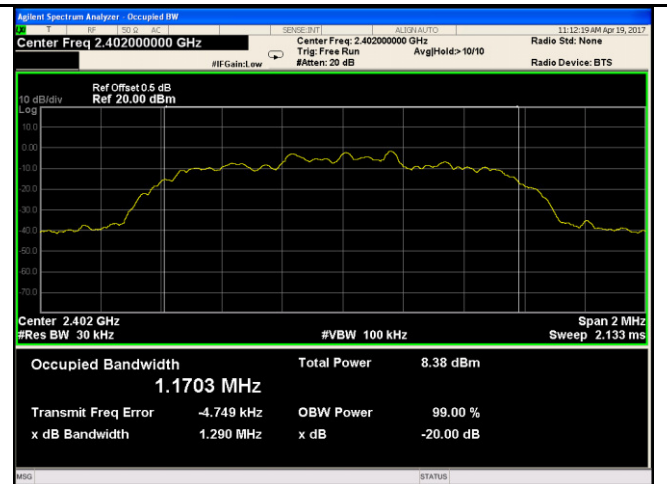

$\pi/4$  DPSK - Low Channel

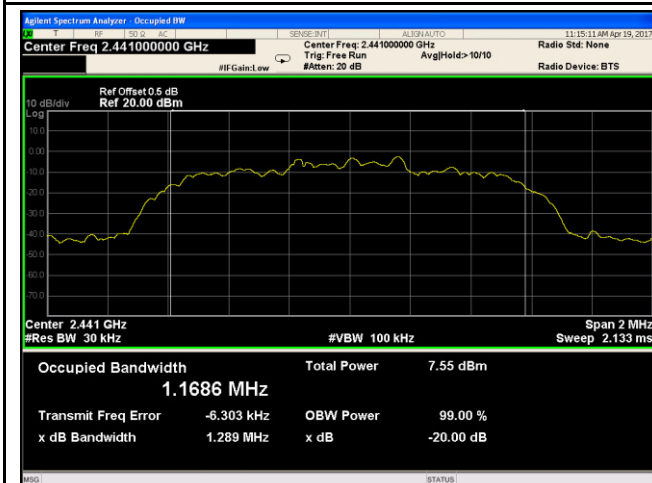


$\pi/4$  DQPSK - Middle Channel

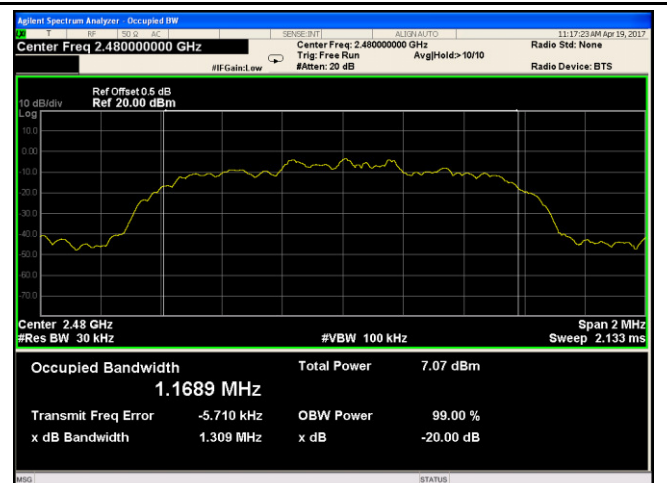


$\pi/4$  DQPSK - High Channel




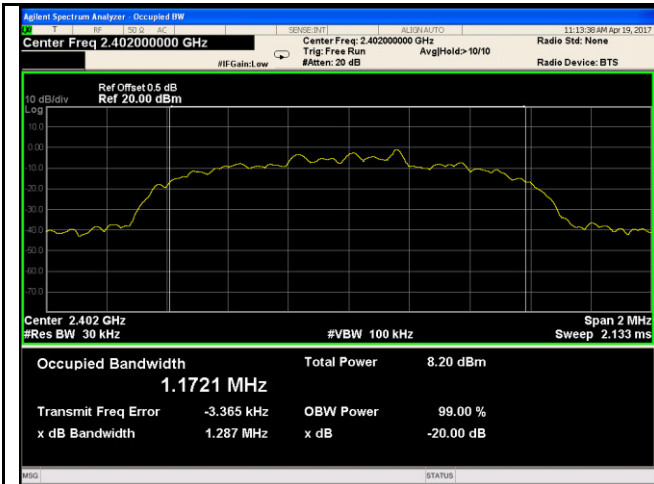

8DPSK - Low Channel

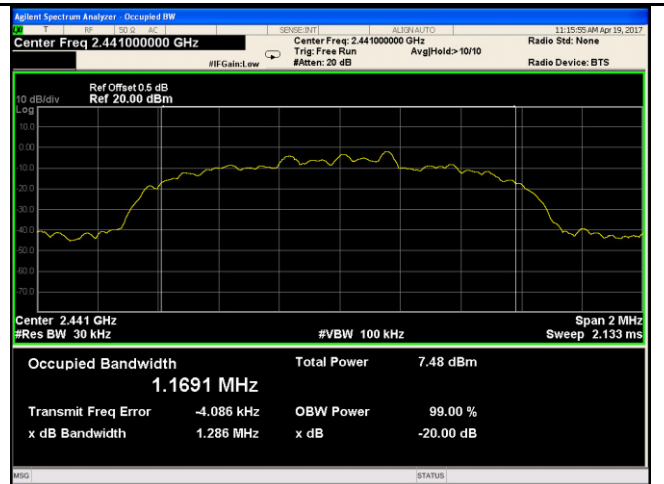

8DPSK - Middle Channel

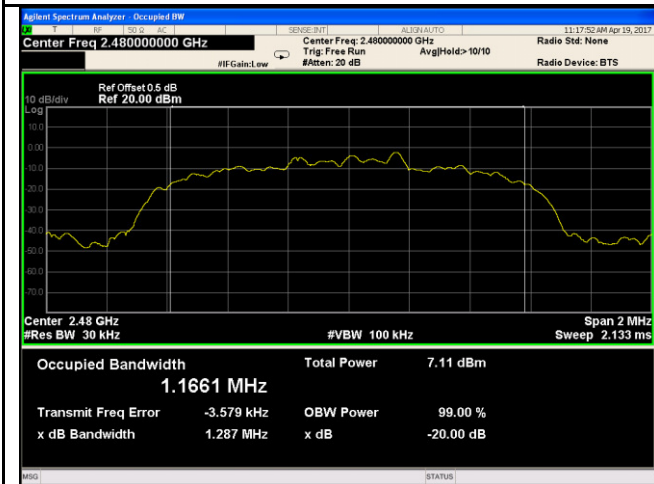


8DPSK - High Channel

## 6.4 Peak Output Power

Temperature	24 °C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	April 19, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq 25$ & $< 50$ channels: $\leq 0.25$ Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: $\leq 1$ Watt	<input type="checkbox"/>

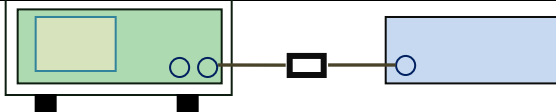Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW &gt; the 20 dB bandwidth of the emission being measured</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize.</li> </ul>
----------------	--

	<ul style="list-style-type: none"> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

**Peak Output Power measurement result**


Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	<b>2.094</b>	125	Pass
		Mid	2441	1.375	125	Pass
		High	2480	1.379	125	Pass
	$\pi/4$ DQPSK	Low	2402	1.956	125	Pass
		Mid	2441	1.247	125	Pass
		High	2480	1.216	125	Pass
	8-DPSK	Low	2402	1.988	125	Pass
		Mid	2441	1.310	125	Pass
		High	2480	1.252	125	Pass

## Test Plots


### Output Power measurement result

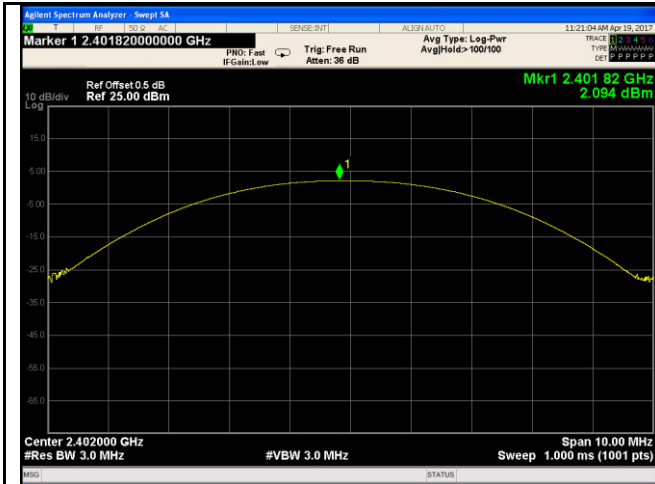


GFSK Output power - Low CH 2402

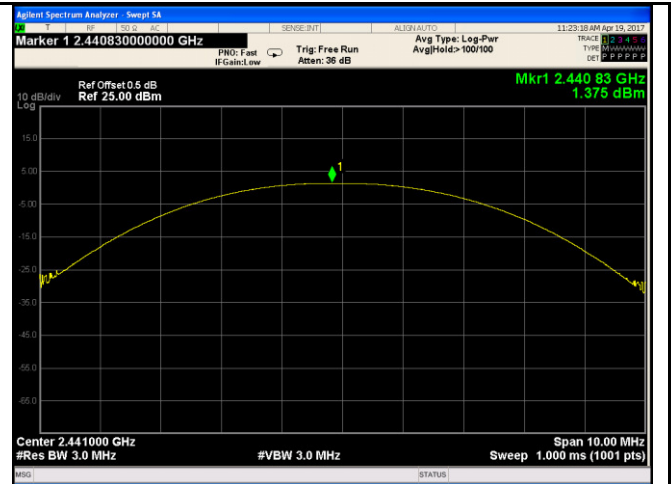


GFSK Output power - Mid CH 2441

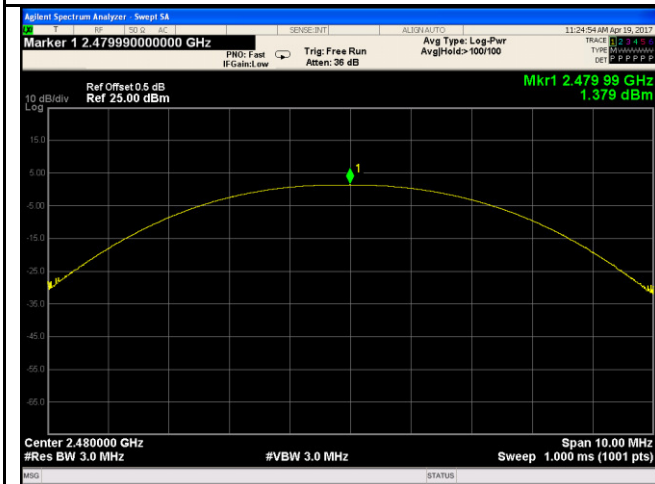


GFSK Output power - High CH 2480

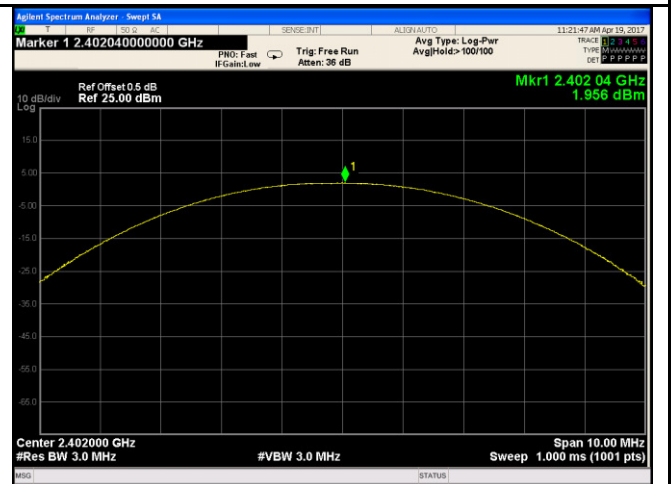


$\pi/4$  DQPSK Output power - Low CH 2402

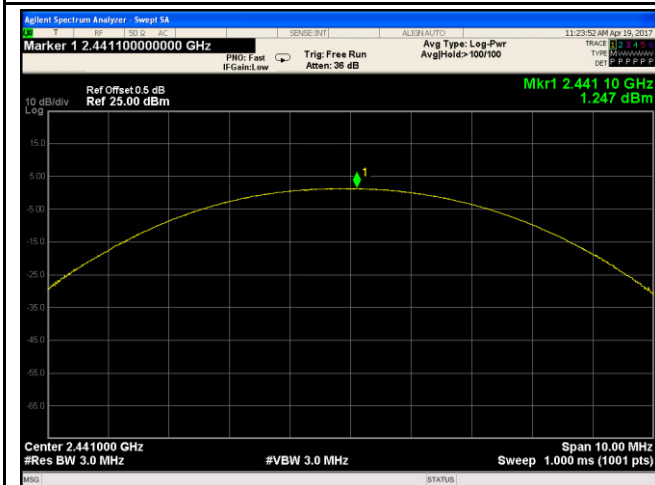


$\pi/4$  DQPSK Output power - Mid CH 2441

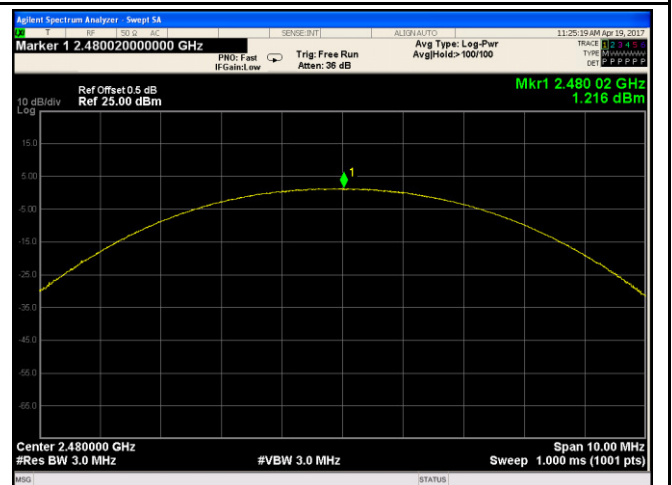


$\pi/4$  DQPSK Output power - High CH 2480

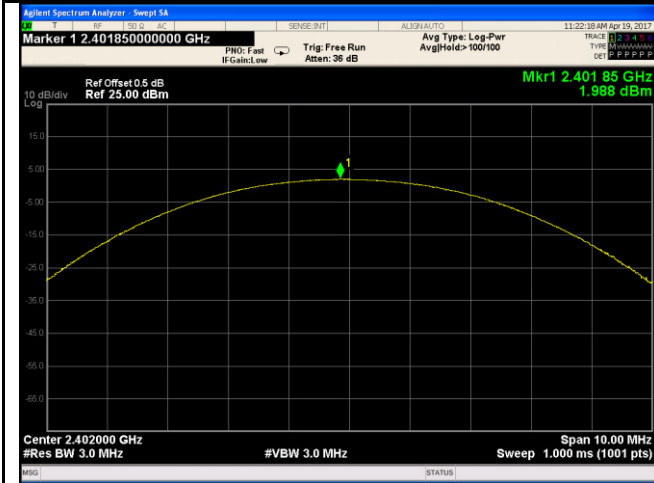


8DPSK Output power - Low CH 2402

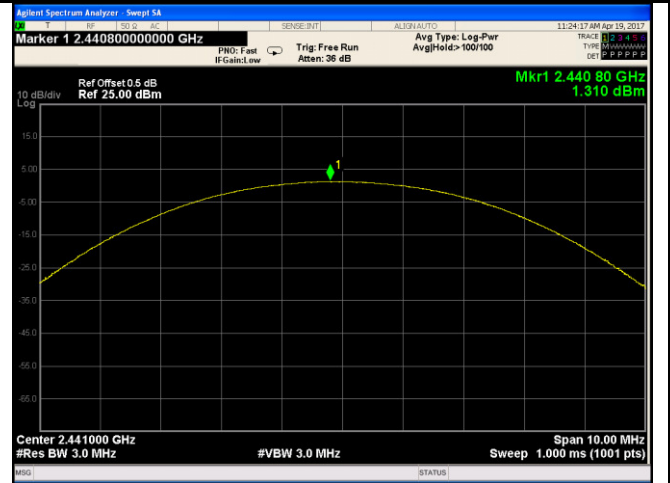

8DPSK Output power - Mid CH 2441

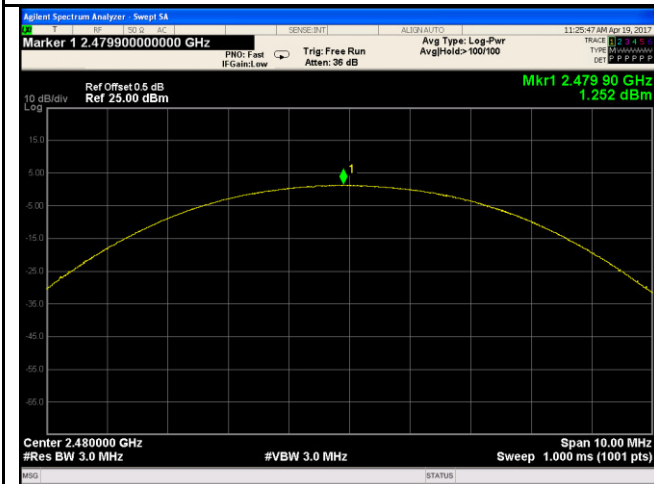


8DPSK Output power - High CH 2480



## 6.5 Number of Hopping Channel

Temperature	24 °C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	April 19, 2017
Tested By :	Loren Luo

### Requirement(s):

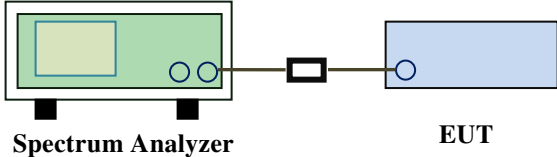Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.  <u>Use the following spectrum analyzer settings:</u>            The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> <li>- Span = the frequency band of operation</li> <li>- RBW ≥ 1% of the span</li> <li>- VBW ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow trace to fully stabilize.</li> <li>- It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A  
 Test Plot     Yes (See below)                       N/A

### Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

### Test Plots


#### Number of Hopping Channels measurement result



## 6.6 Time of Occupancy (Dwell Time)

Temperature	24 °C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	April 19, 2017
Tested By :	Loren Luo

### Requirement(s):

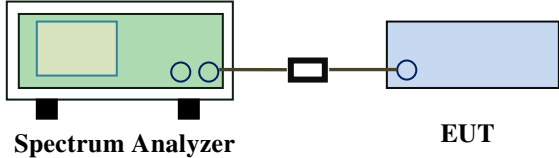Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.  <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> <li>- Span = zero span, centered on a hopping channel</li> <li>- RBW = 1 MHz</li> <li>- VBW ≥ RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- use the marker-delta function to determine the dwell time</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A

Test Plot     Yes (See below)                       N/A




**Dwell Time measurement result**


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.920	311.467	400	Pass
		Mid	2.900	309.333	400	Pass
		High	2.920	311.467	400	Pass
	π /4 DQPSK	Low	2.920	311.467	400	Pass
		Mid	2.910	310.400	400	Pass
		High	2.920	311.467	400	Pass
	8-DPSK	Low	2.930	312.533	400	Pass
		Mid	2.920	311.467	400	Pass
		High	2.920	311.467	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots


Dwell Time measurement result

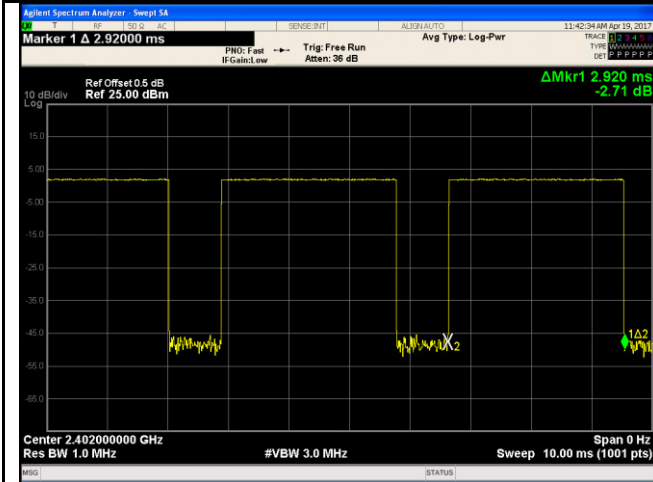


GFSK - Low CH 2402

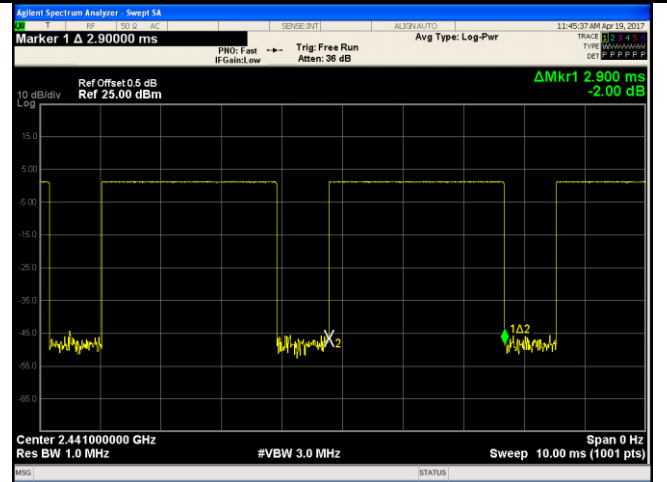


GFSK - Mid CH 2441

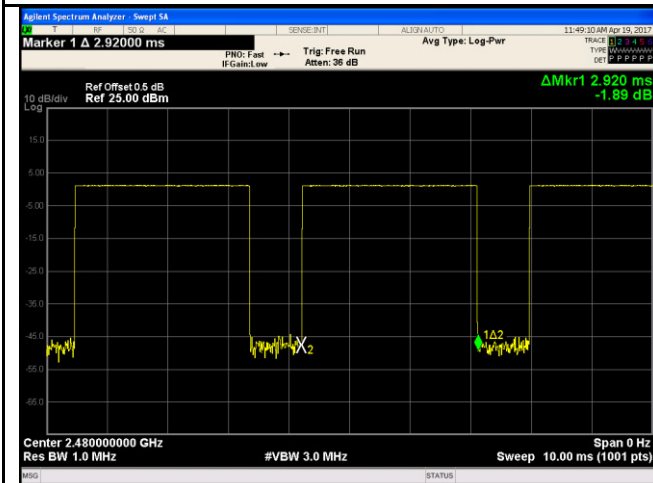


GFDK - High CH 2480

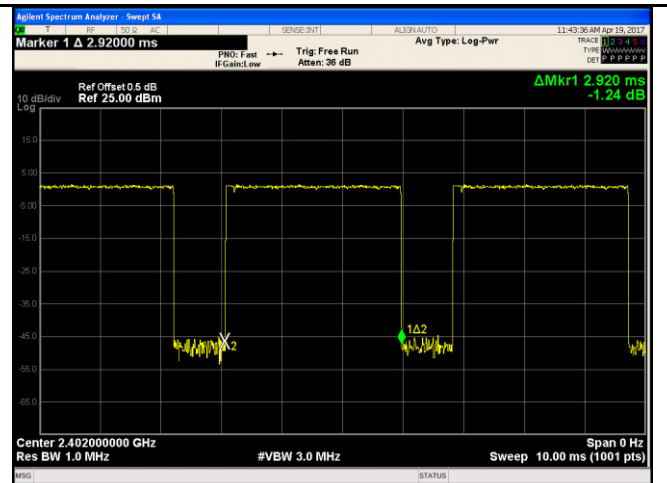


$\pi/4$  DQPSK - Low CH 2402

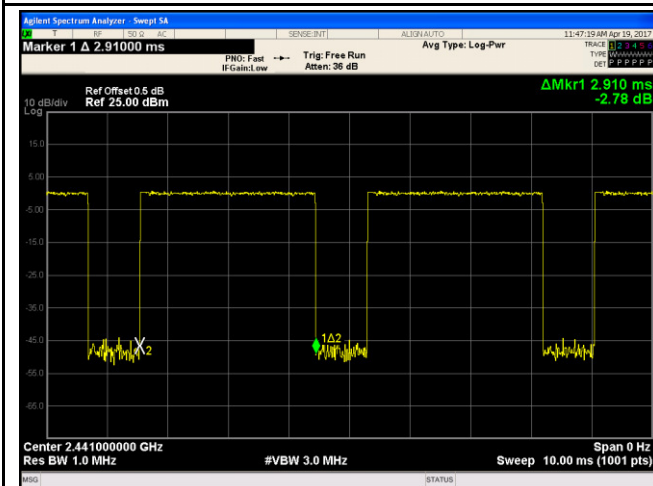


$\pi/4$  DQPSK - Mid CH 2441

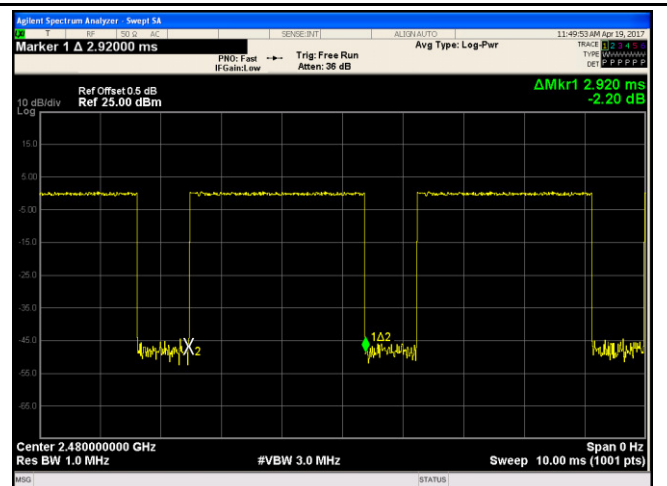


$\pi/4$  DQPSK - High CH 2480

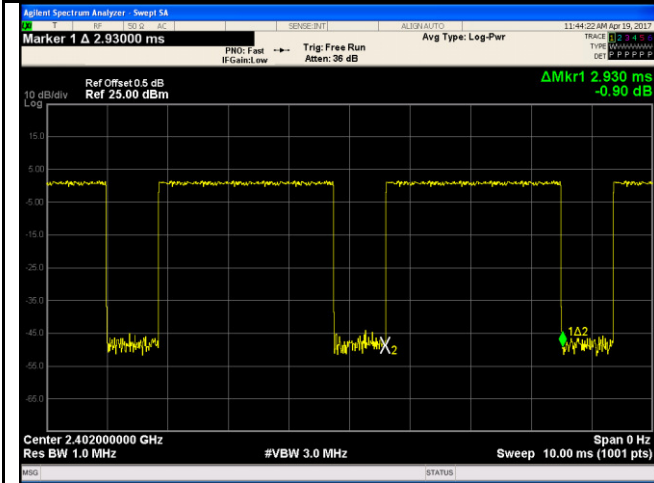


8DPSK - Low CH 2402

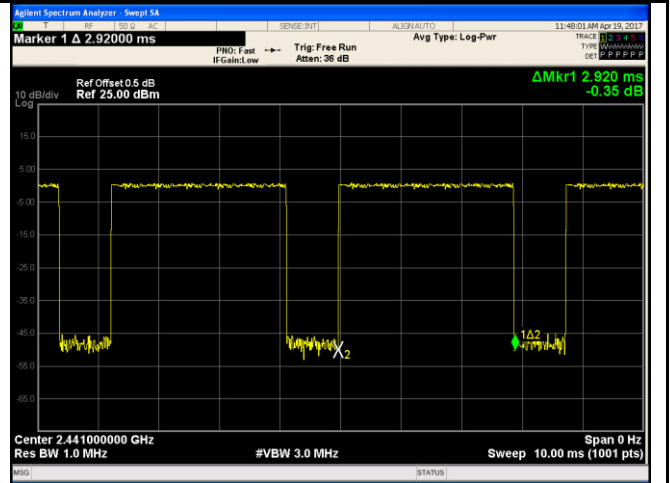

8DPSK - Mid CH 2441

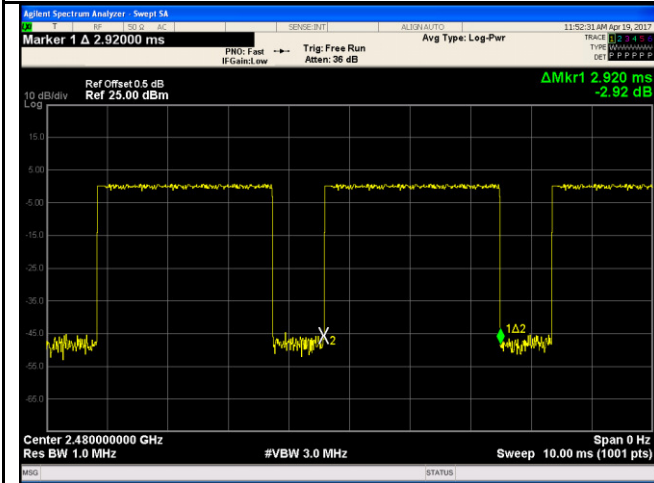

8DPSK - High CH 2480




## 6.7 Band Edge & Restricted Band

Temperature	23 °C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	April 14, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. □	<input checked="" type="checkbox"/>

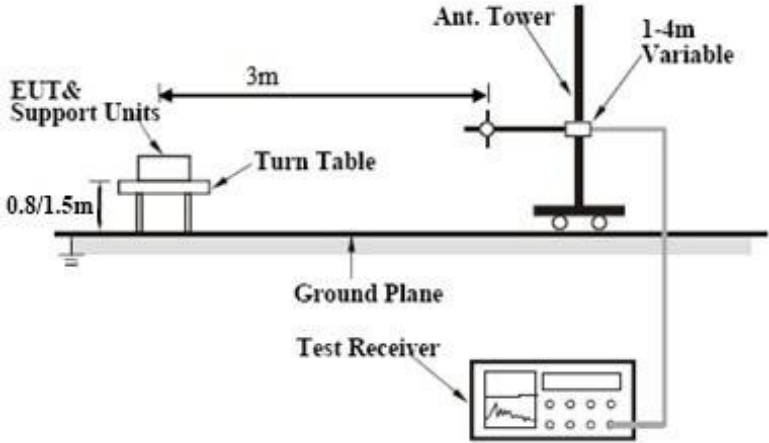Test Setup	
------------	--


Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,</li> </ul>
----------------	--


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**Test Data**     Yes                       N/A  
**Test Plot**     Yes (See below)       N/A


### Test Plots

#### GFSK Mode:

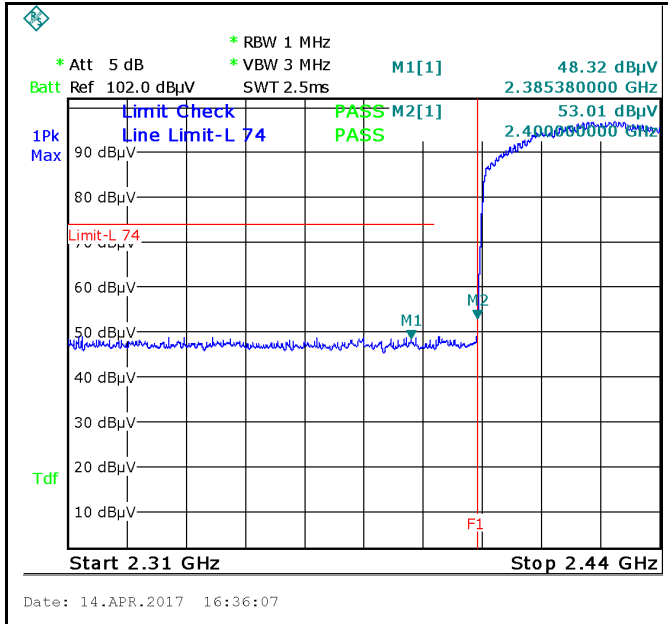 <p>           * RBW 1 MHz            * Att 5 dB            * VBW 3 MHz            Batt Ref 102.0 dBμV            SWT 2.5ms            M1[1] 48.32 dBμV            2.385380000 GHz            M2[1] 53.01 dBμV            2.400000000 GHz            Limit Check Line Limit-L 74            PASS            PASS            1Pk Max            90 dBμV            80 dBμV            70 dBμV            60 dBμV            50 dBμV            40 dBμV            30 dBμV            20 dBμV            10 dBμV            Tdf            Start 2.31 GHz Stop 2.44 GHz            Date: 14.APR.2017 16:36:07         </p>	 <p>           * RBW 1 MHz            * Att 5 dB            * VBW 3 MHz            Batt Ref 102.0 dBμV            SWT 2.5ms            M1[1] 48.91 dBμV            2.491080000 GHz            Limit Check Line Limit-R 74            PASS            PASS            1Pk Max            90 dBμV            80 dBμV            70 dBμV            60 dBμV            50 dBμV            40 dBμV            30 dBμV            20 dBμV            10 dBμV            Tdf            Start 2.44 GHz Stop 2.5 GHz            Date: 14.APR.2017 16:41:03         </p>
<p align="center">GFSK-Hopping Left Side-PK Note: F1 is frequency 2400MHz</p>	<p align="center">GFSK-Hopping Right Side-PK Note: F1 is frequency 2483.5MHz</p>
<p align="center">Note: (no need if PK value less than the AV limit)</p>	<p align="center">Note: (no need if PK value less than the AV limit)</p>
<p align="center">GFSK-Hopping Left Side-AV</p>	<p align="center">GFSK-Hopping Right Side-AV</p>

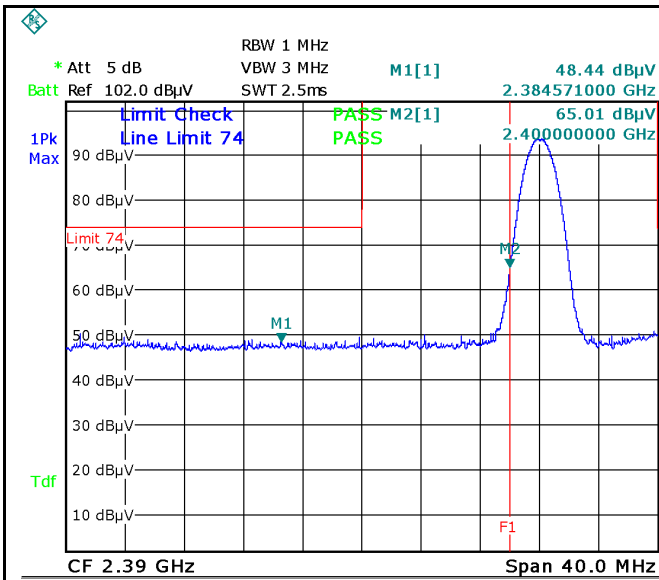

Date: 14.APR.2017 16:21:49

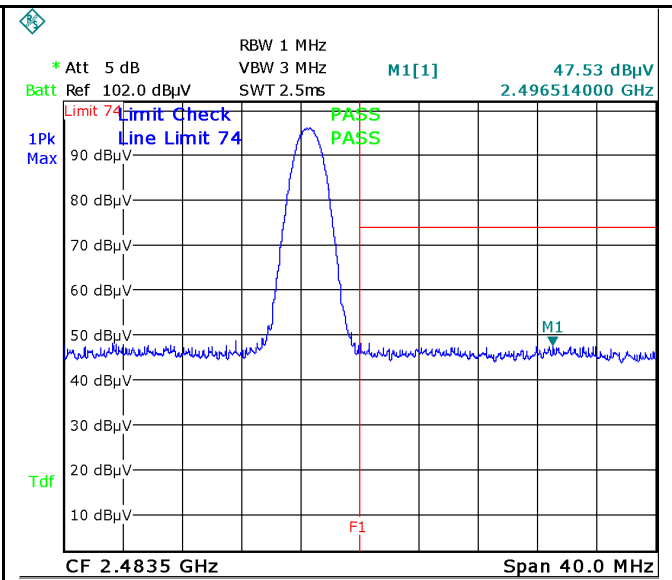


Date: 14.APR.2017 16:27:03

GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

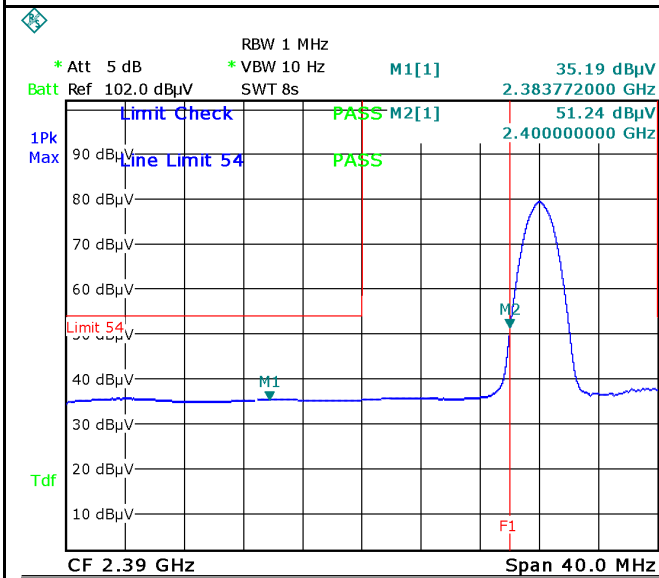



Date: 14.APR.2017 16:23:34

Note: (no need if PK value less than the AV limit)

GFSK-Left Side-AV

GFSK-Right Side-AV

$\pi/4$  DQPSK Mode:

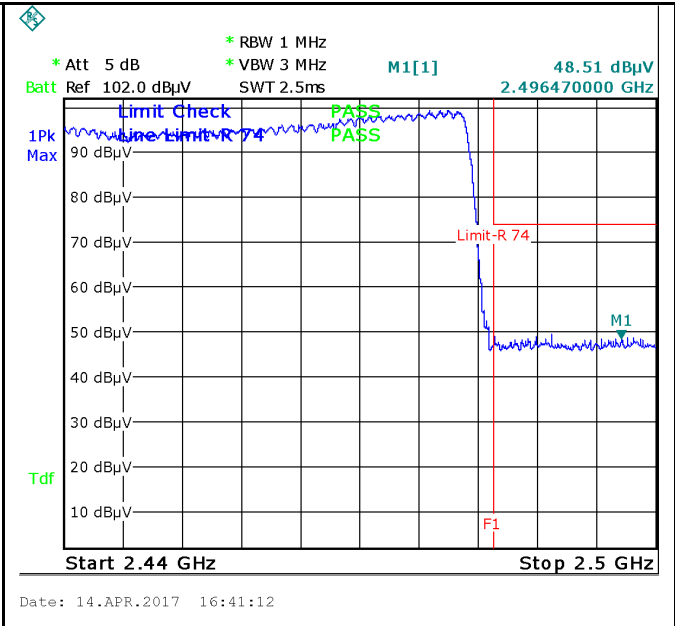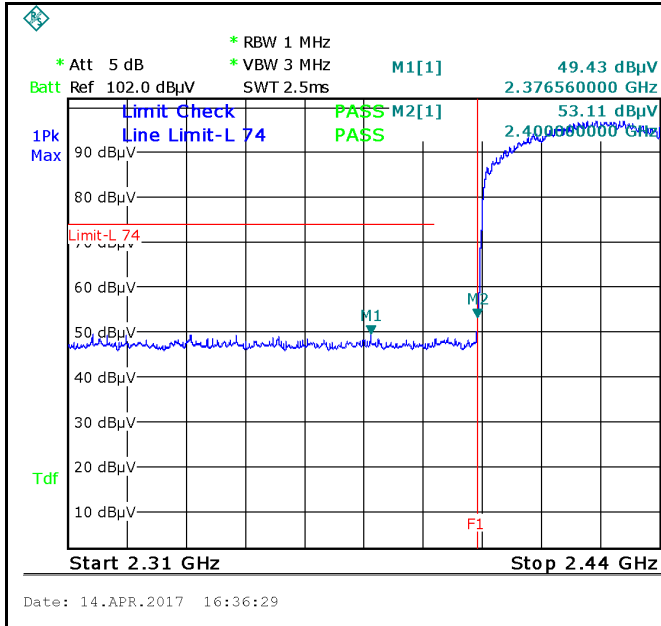

$\pi/4$  DQPSK-Hopping Left Side-PK  
 Note: F1 is frequency 2400MHz

$\pi/4$  DQPSK-Hopping Right Side-PK  
 Note: F1 is frequency 2483.5MHz


Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)


$\pi/4$  DQPSK-Hopping Left-AV

$\pi/4$  DQPSK-Hopping Right-AV



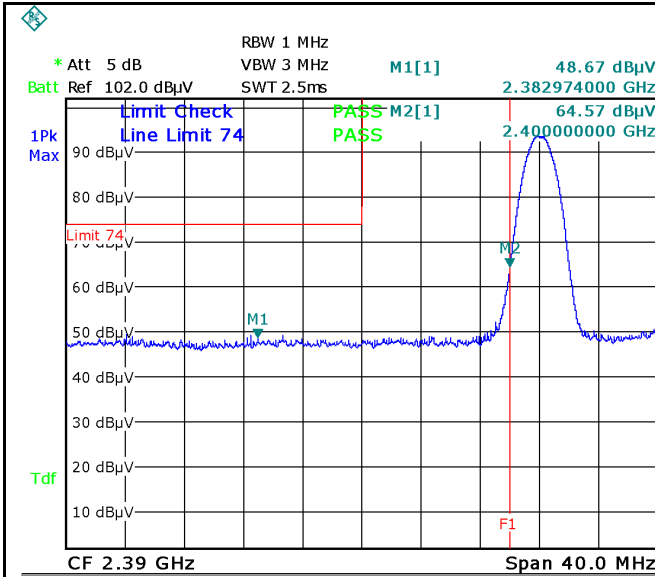

Date: 14.APR.2017 16:21:57

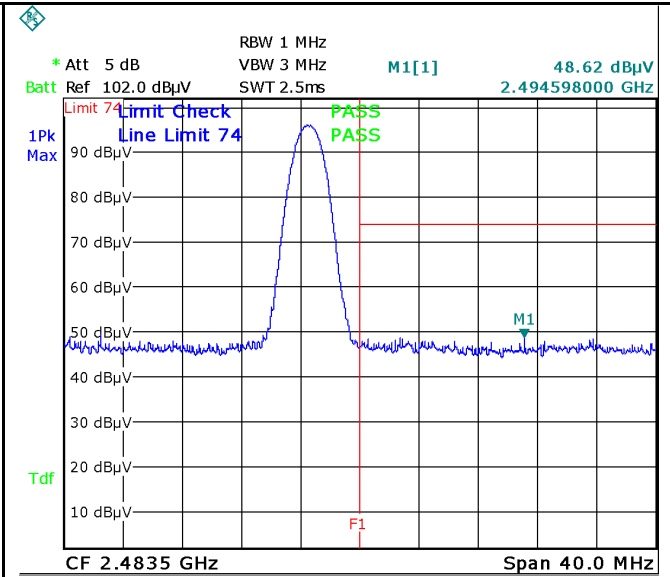


Date: 14.APR.2017 16:26:56

$\pi$  / 4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

$\pi$  / 4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

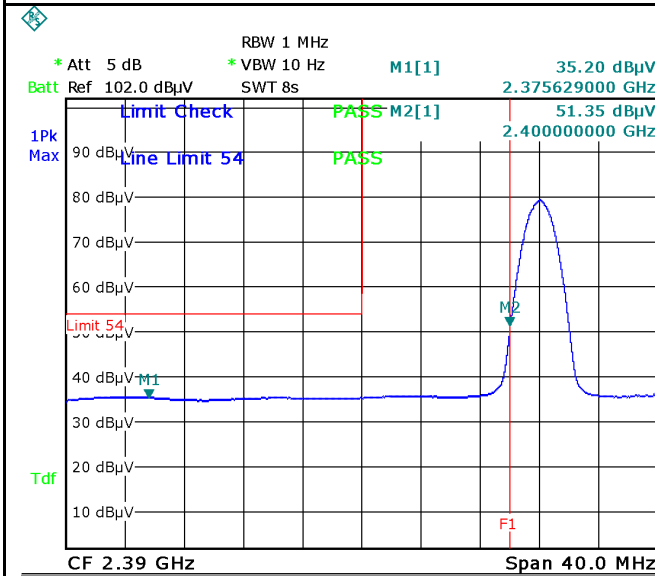



Date: 14.APR.2017 16:23:43

Note: (no need if PK value less than the AV limit)

$\pi$  / 4 DQPSK-Left Side-AV

$\pi$  / 4 DQPSK-Right Side-AV

**8-DPSK Mode:**

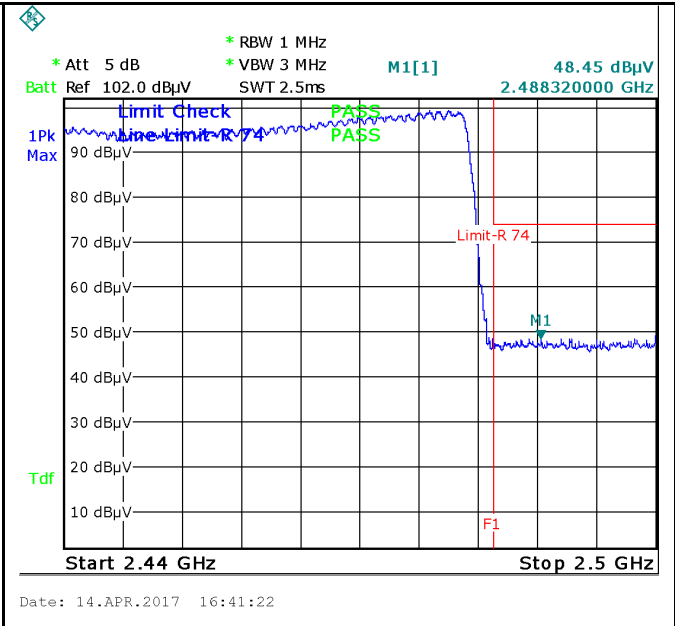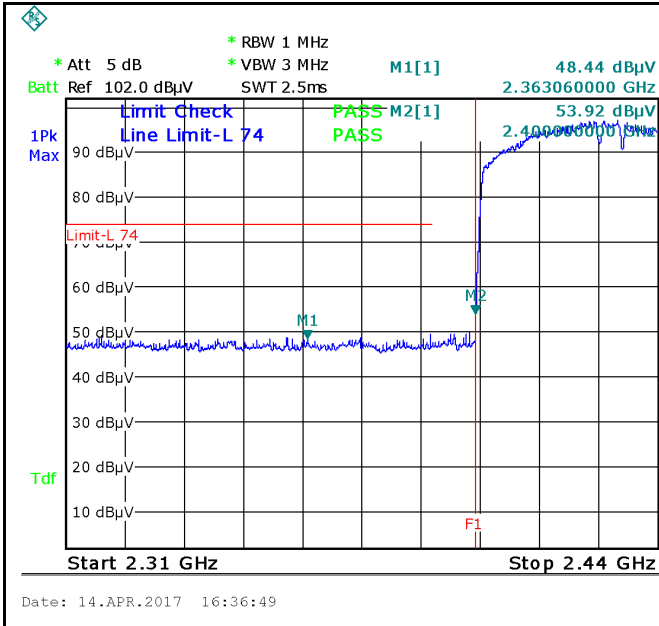

**8DPSK-Hopping Left Side-PK**  
**Note: F1 is frequency 2400MHz**


**8DPSK-Hopping Right Side-PK**  
**Note: F1 is frequency 2483.5MHz**

Note: (no need if PK value less than the AV limit)


Note: (no need if PK value less than the AV limit)

**8DPSK-Hopping Left-AV**

**8DPSK-Hopping Right-AV**

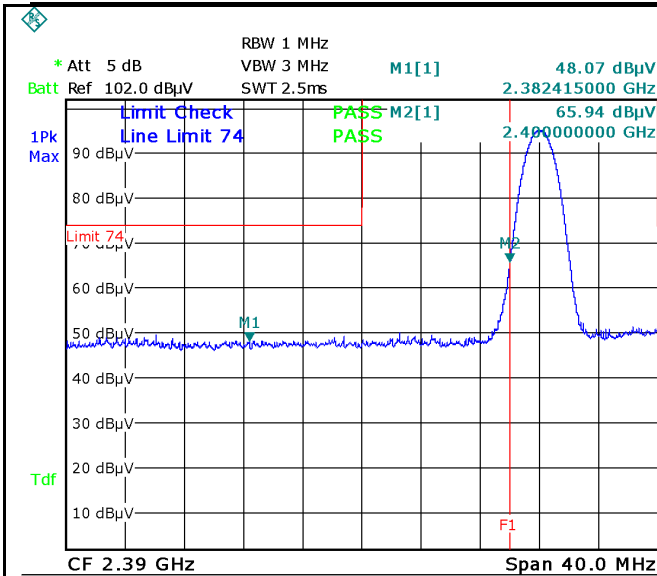

Date: 14.APR.2017 16:22:08

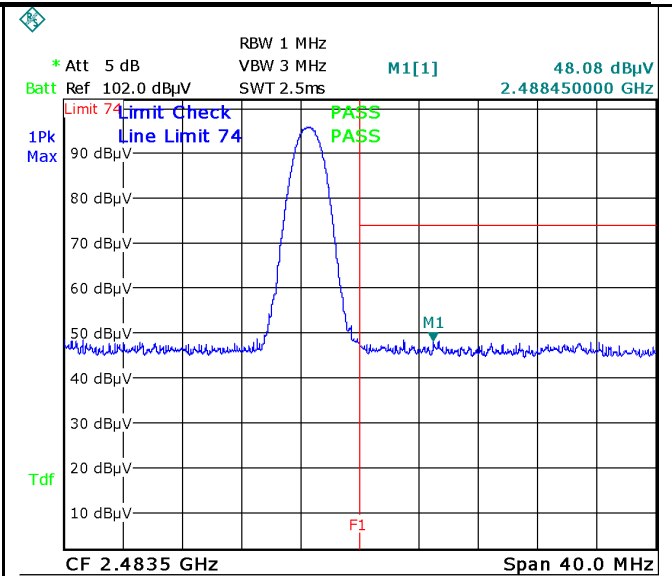


Date: 14.APR.2017 16:26:36

8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

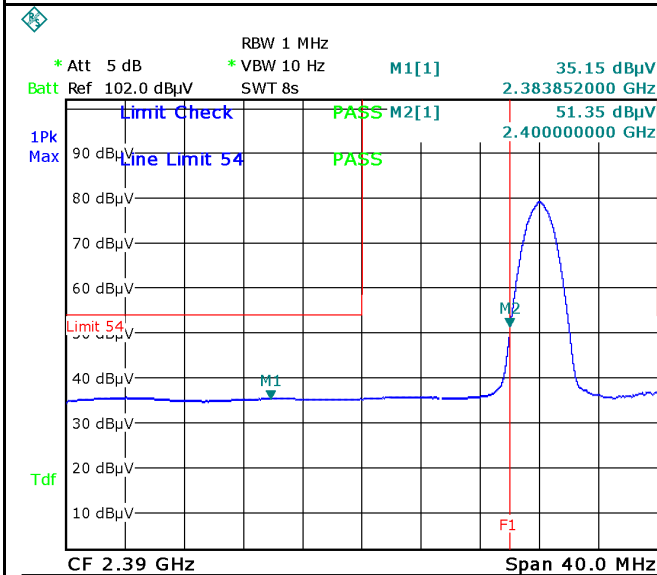

Date: 14.APR.2017 16:23:50

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV


8DPSK-Right Side-AV

## 6.8 AC Power Line Conducted Emissions

Temperature	24 °C
Relative Humidity	53%
Atmospheric Pressure	1011mbar
Test date :	April 11, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

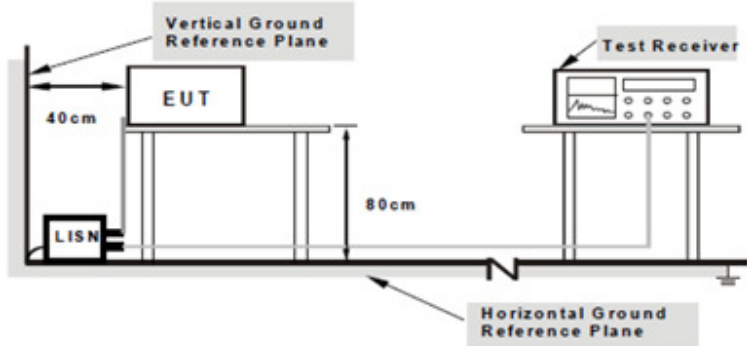Test Setup	 <p style="text-align: center;"> <b>Note: 1.Support units were connected to second LISN.                  2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</b> </p>
------------	---


Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>
-----------	---

	<p>coaxial cable.</p> <ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

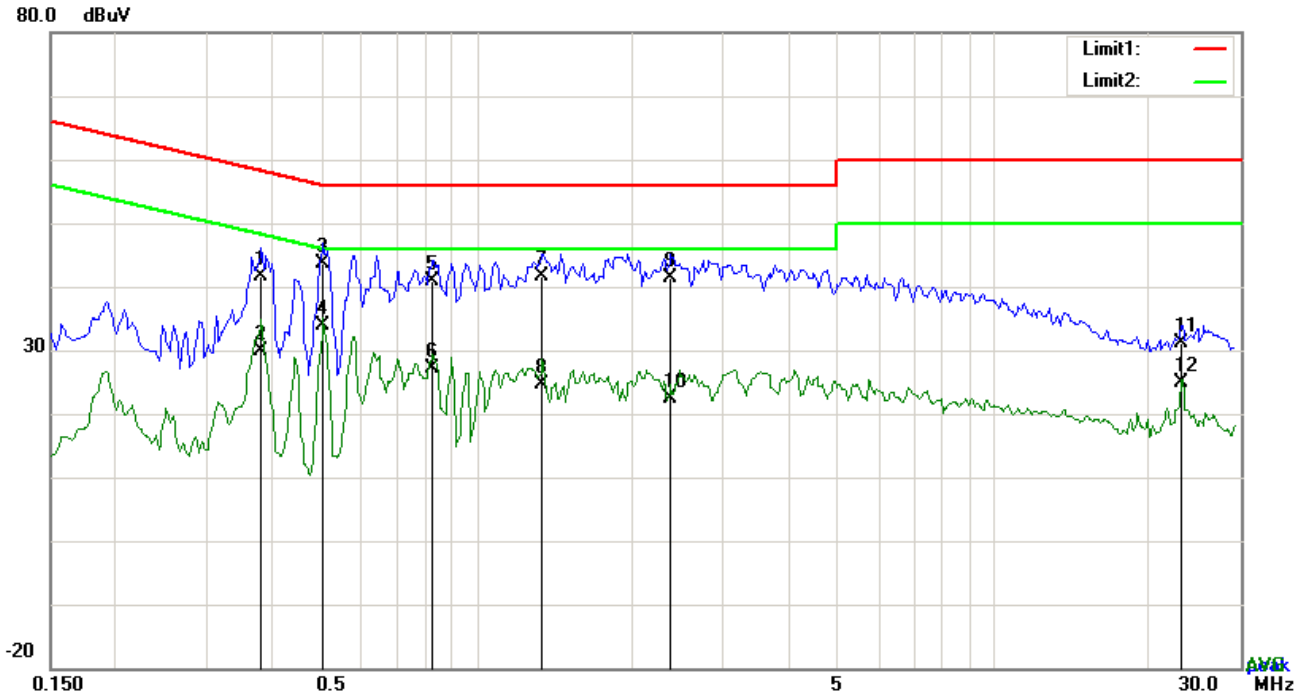


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.3840	31.51	QP	10.03	41.54	58.19	-16.65
2	L1	0.3840	19.88	AVG	10.03	29.91	48.19	-18.28
3	L1	0.5049	33.51	QP	10.03	43.54	56.00	-12.46
4	L1	0.5049	23.96	AVG	10.03	33.99	46.00	-12.01
5	L1	0.8247	30.81	QP	10.03	40.84	56.00	-15.16
6	L1	0.8247	17.14	AVG	10.03	27.17	46.00	-18.83
7	L1	1.3434	31.66	QP	10.03	41.69	56.00	-14.31
8	L1	1.3434	14.60	AVG	10.03	24.63	46.00	-21.37
9	L1	2.3808	31.23	QP	10.05	41.28	56.00	-14.72
10	L1	2.3808	12.36	AVG	10.05	22.41	46.00	-23.59
11	L1	23.1318	20.67	QP	10.36	31.03	60.00	-28.97
12	L1	23.1318	14.60	AVG	10.36	24.96	50.00	-25.04

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

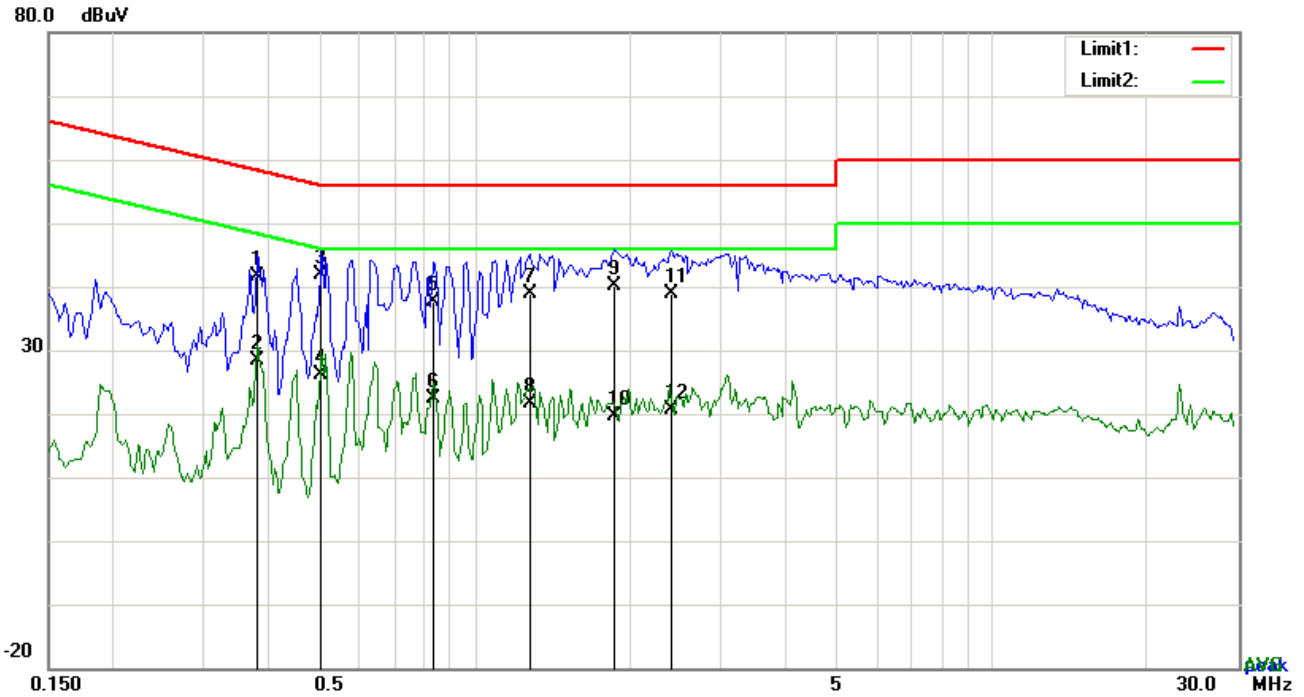


**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.3801	31.63	QP	10.02	41.65	58.28	-16.63
2	N	0.3801	18.34	AVG	10.02	28.36	48.28	-19.92
3	N	0.5049	31.80	QP	10.02	41.82	56.00	-14.18
4	N	0.5049	16.15	AVG	10.02	26.17	46.00	-19.83
5	N	0.8325	27.71	QP	10.03	37.74	56.00	-18.26
6	N	0.8325	12.30	AVG	10.03	22.33	46.00	-23.67
7	N	1.2771	28.89	QP	10.03	38.92	56.00	-17.08
8	N	1.2771	11.55	AVG	10.03	21.58	46.00	-24.42
9	N	1.8621	30.02	QP	10.04	40.06	56.00	-15.94
10	N	1.8621	9.63	AVG	10.04	19.67	46.00	-26.33
11	N	2.3964	28.79	QP	10.04	38.83	56.00	-17.17
12	N	2.3964	10.58	AVG	10.04	20.62	46.00	-25.38

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

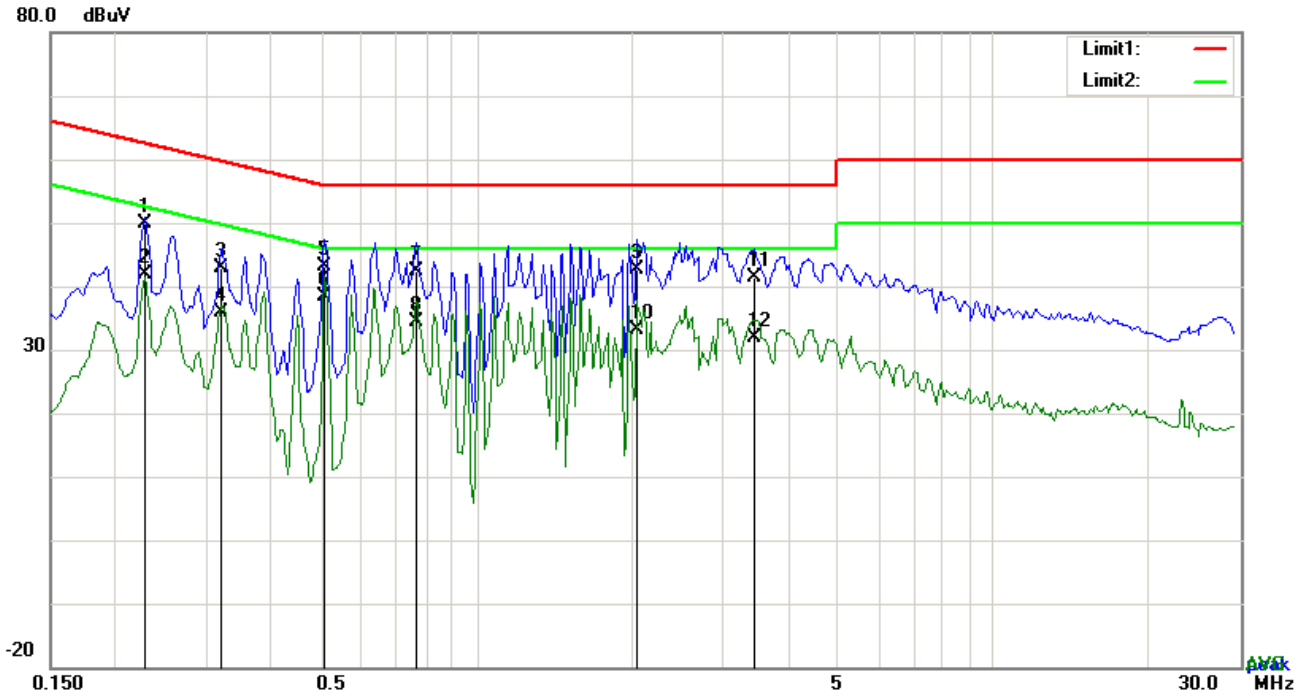


**Test Data**

**Phase Line Plot at 240Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2280	39.76	QP	10.03	49.79	62.52	-12.73
2	L1	0.2280	31.73	AVG	10.03	41.76	52.52	-10.76
3	L1	0.3216	32.80	QP	10.03	42.83	59.67	-16.84
4	L1	0.3216	25.93	AVG	10.03	35.96	49.67	-13.71
5	L1	0.5088	33.06	QP	10.03	43.09	56.00	-12.91
6	L1	0.5088	28.43	AVG	10.03	38.46	46.00	-7.54
7	L1	0.7662	32.38	QP	10.03	42.41	56.00	-13.59
8	L1	0.7662	24.29	AVG	10.03	34.32	46.00	-11.68
9	L1	2.0376	32.50	QP	10.04	42.54	56.00	-13.46
10	L1	2.0376	23.18	AVG	10.04	33.22	46.00	-12.78
11	L1	3.4368	31.38	QP	10.06	41.44	56.00	-14.56
12	L1	3.4368	21.87	AVG	10.06	31.93	46.00	-14.07



<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

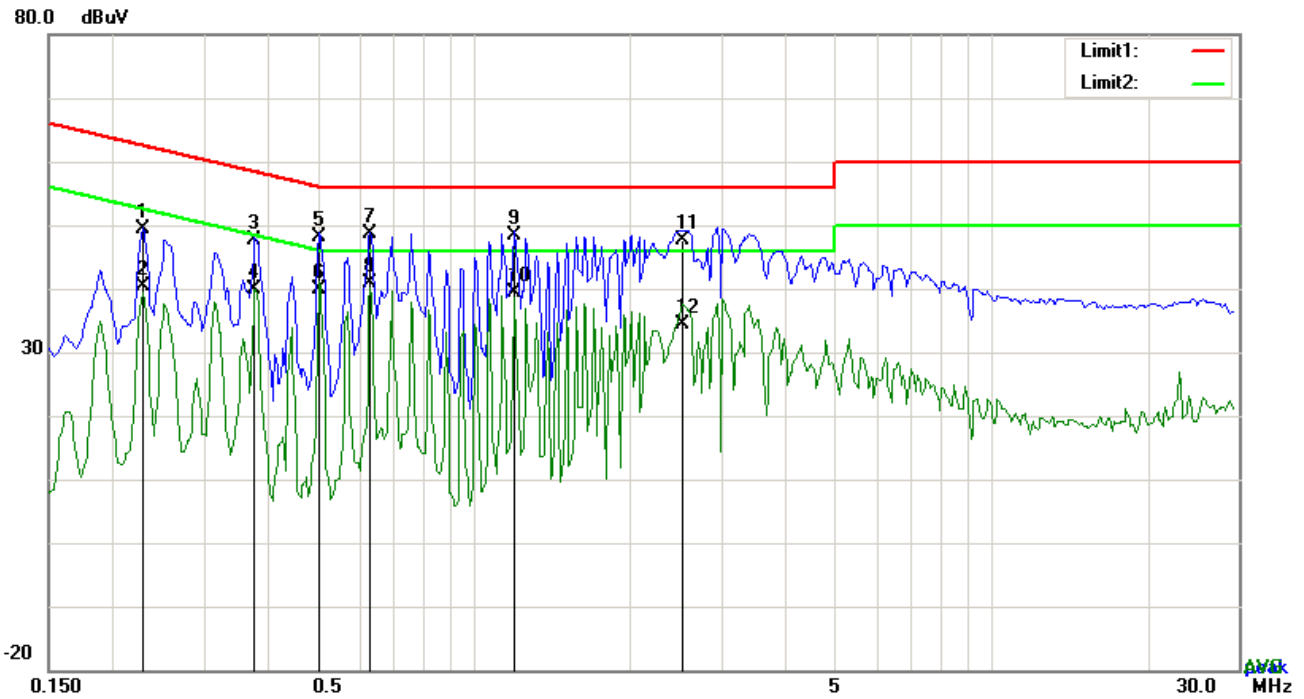

**Test Data**

**Phase Neutral Plot at 240Vac, 60Hz**


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.2280	39.38	QP	10.02	49.40	62.52	-13.12
2	N	0.2280	30.24	AVG	10.02	40.26	52.52	-12.26
3	N	0.3762	37.49	QP	10.02	47.51	58.36	-10.85
4	N	0.3762	29.79	AVG	10.02	39.81	48.36	-8.55
5	N	0.5010	38.07	QP	10.02	48.09	56.00	-7.91
6	N	0.5010	29.94	AVG	10.02	39.96	46.00	-6.04
7	N	0.6297	38.60	QP	10.02	48.62	56.00	-7.38
8	N	0.6297	30.94	AVG	10.02	40.96	46.00	-5.04
9	N	1.1952	38.25	QP	10.03	48.28	56.00	-7.72
10	N	1.1952	29.41	AVG	10.03	39.44	46.00	-6.56
11	N	2.5212	37.47	QP	10.05	47.52	56.00	-8.48
12	N	2.5212	24.38	AVG	10.05	34.43	46.00	-11.57

## 6.9 Radiated Emissions & Restricted Band

Temperature	23 °C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	April 14, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V}/\text{m}</math>)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 - 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	30 – 88	100	88 – 216	150	216 - 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )												
30 – 88	100												
88 – 216	150												
216 - 960	200												
Above 960	500												

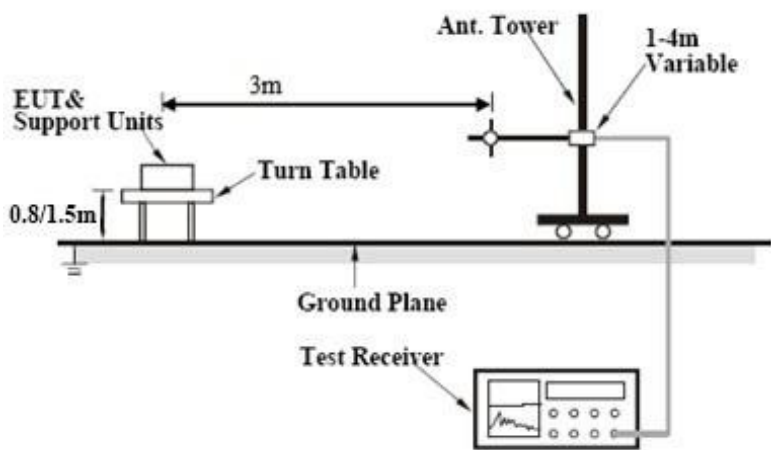Test Setup	
------------	--

Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:</li> </ol>
-----------	---


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

**Below 1GHz**

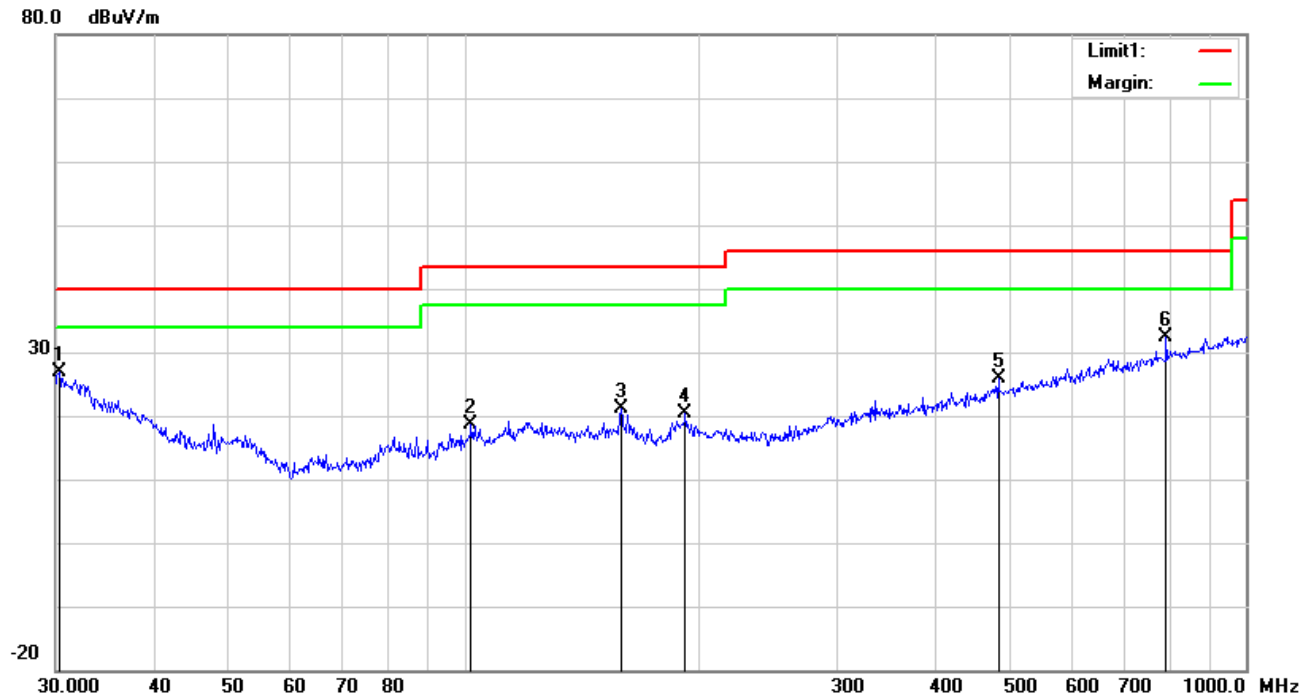


**Test Data**

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency	Reading	Detect or	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	30.3173	27.33	peak	21.16	22.28	0.63	26.84	40.00	-13.16	200	305
2	H	102.0014	28.95	peak	10.75	22.32	1.13	18.51	43.50	-24.99	100	332
3	H	158.6677	29.31	peak	12.60	22.28	1.38	21.01	43.50	-22.49	100	102
4	H	191.7450	29.57	peak	11.65	22.33	1.54	20.43	43.50	-23.07	100	124
5	H	482.2156	28.18	peak	17.34	21.85	2.32	25.99	46.00	-20.01	100	247
6	H	790.6188	29.28	peak	21.29	21.17	2.94	32.34	46.00	-13.66	100	315

**Below 1GHz**

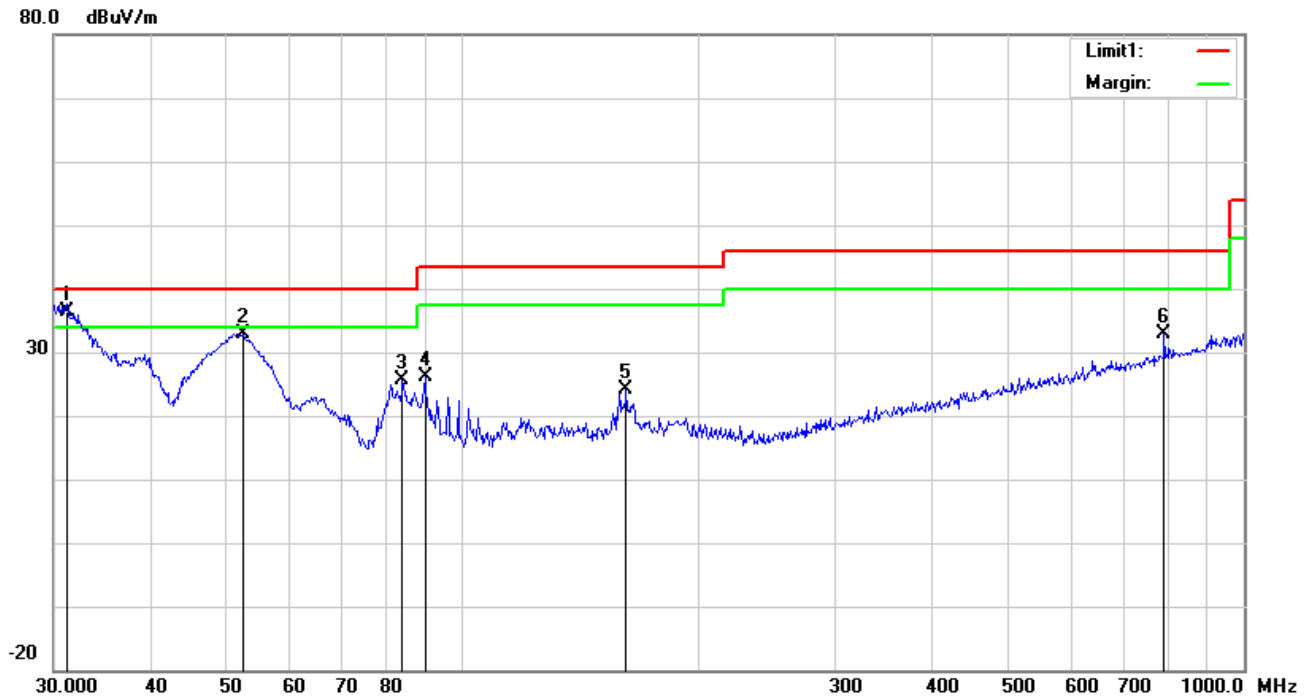

**Test Data**

**Vertical Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee (°)
1	V	31.1798	37.42	QP	20.49	22.27	0.65	36.29	40.00	-3.71	100	279
2	V	52.3913	46.42	peak	8.14	22.39	0.79	32.96	40.00	-7.04	100	357
3	V	83.8156	39.13	peak	7.75	22.38	1.07	25.57	40.00	-14.43	100	221
4	V	89.5900	39.58	peak	7.98	22.32	0.96	26.20	43.50	-17.30	100	123
5	V	162.0414	32.57	peak	12.44	22.27	1.38	24.12	43.50	-19.38	100	6
6	V	790.6188	29.75	peak	21.29	21.17	2.94	32.81	46.00	-13.19	100	140

**Above 1GHz**

<b>Test Mode:</b>	<b>Transmitting Mode</b>
-------------------	--------------------------

**Low Channel: GFSK Mode (Worst Case) (2402 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4804	39.61	AV	V	33.67	6.86	32.66	47.48	54	-6.52
4804	39.89	AV	H	33.67	6.86	32.66	47.76	54	-6.24
4804	48.13	PK	V	33.67	6.86	32.66	56	74	-18
4804	45.29	PK	H	33.67	6.86	32.66	53.16	74	-20.84
17809	23.9	AV	V	45.03	11.21	32.38	47.76	54	-6.24
17809	24.24	AV	H	45.03	11.21	32.38	48.1	54	-5.9
17809	41.01	PK	V	45.03	11.21	32.38	64.87	74	-9.13
17809	42.18	PK	H	45.03	11.21	32.38	66.04	74	-7.96

**Middle Channel: GFSK Mode (Worst Case) (2441 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4882	39.17	AV	V	33.71	6.95	32.74	47.09	54	-6.91
4882	39.25	AV	H	33.71	6.95	32.74	47.17	54	-6.83
4882	49.67	PK	V	33.71	6.95	32.74	57.59	74	-16.41
4882	46.62	PK	H	33.71	6.95	32.74	54.54	74	-19.46
17808	25.03	AV	V	45.15	11.18	32.41	48.95	54	-5.05
17808	23.82	AV	H	45.15	11.18	32.41	47.74	54	-6.26
17808	40.53	PK	V	45.15	11.18	32.41	64.45	74	-9.55
17808	41.5	PK	H	45.15	11.18	32.41	65.42	74	-8.58

**High Channel: GFSK Mode (Worst Case) (2480 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4960	38.26	AV	V	33.9	6.76	32.74	46.18	54	-7.82
4960	38.55	AV	H	33.9	6.76	32.74	46.47	54	-7.53
4960	47.33	PK	V	33.9	6.76	32.74	55.25	74	-18.75
4960	47.29	PK	H	33.9	6.76	32.74	55.21	74	-18.79
17821	23.35	AV	V	45.22	11.35	32.38	47.54	54	-6.46
17821	23.96	AV	H	45.22	11.35	32.38	48.15	54	-5.85
17821	42.63	PK	V	45.22	11.35	32.38	66.82	74	-7.18
17821	40.59	PK	H	45.22	11.35	32.38	64.78	74	-9.22

**Note:**

- 1, The testing has been conformed to  $10 \times 2480 \text{ MHz} = 24,800 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>




## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Front View

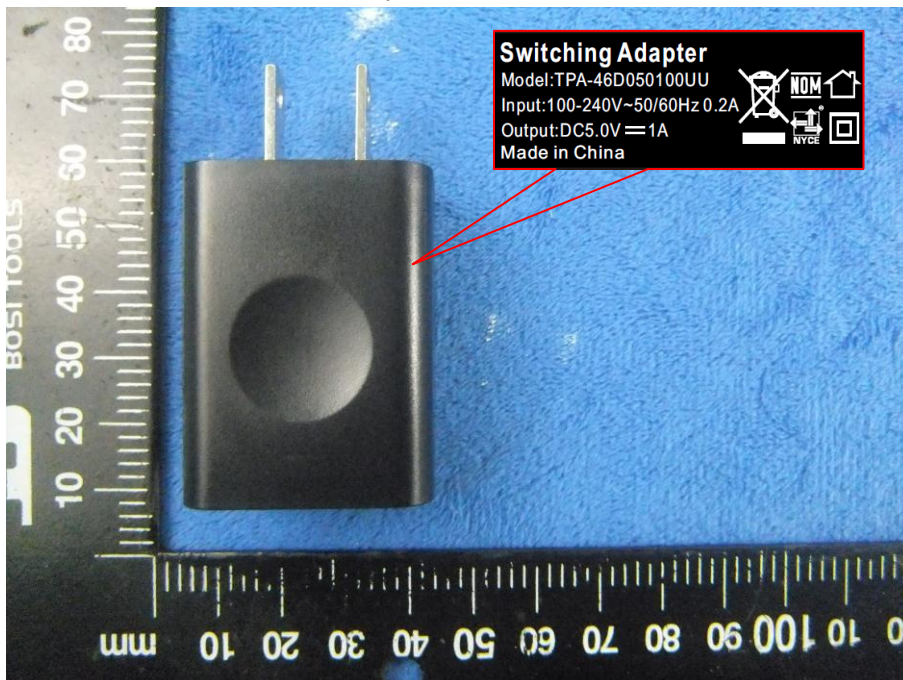

EUT - Front View




EUT - Rear View



EUT - Top View




EUT - Bottom View

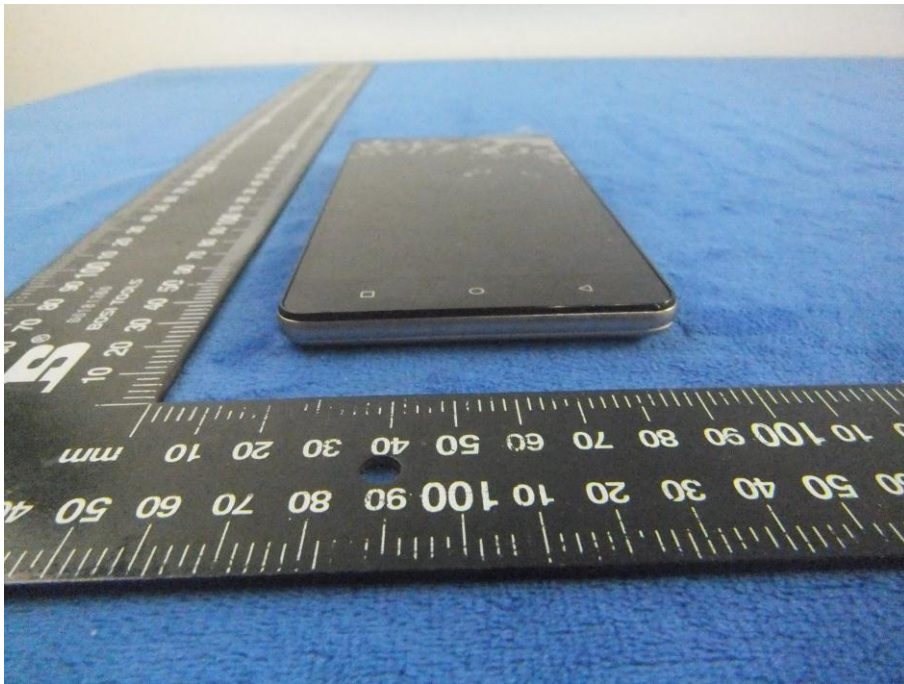

EUT - Left View



EUT - Right View

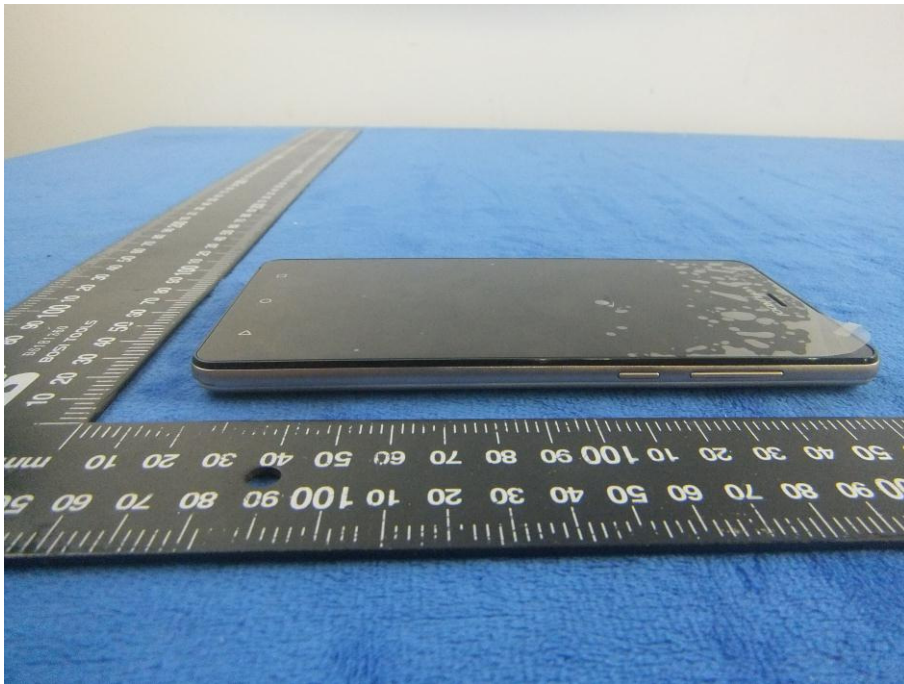

**Annex B.ii. Photograph: EUT Internal Photo**

Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View




Battery - Rear View




Mainboard – Front View

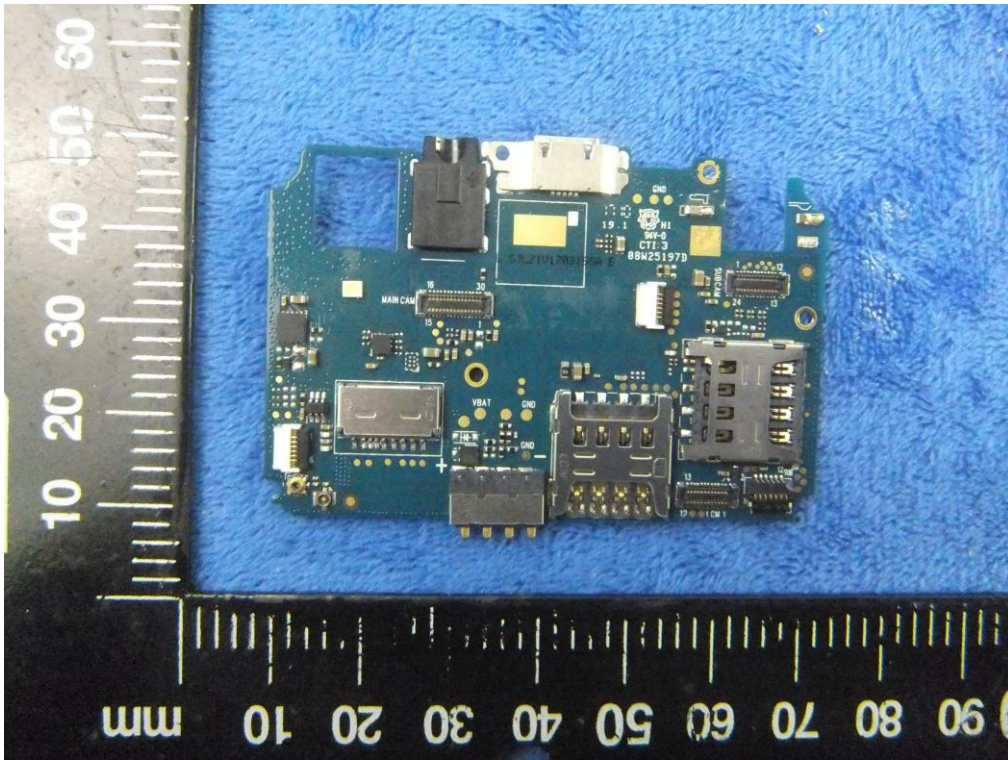


Mainboard with Shielding - Rear View

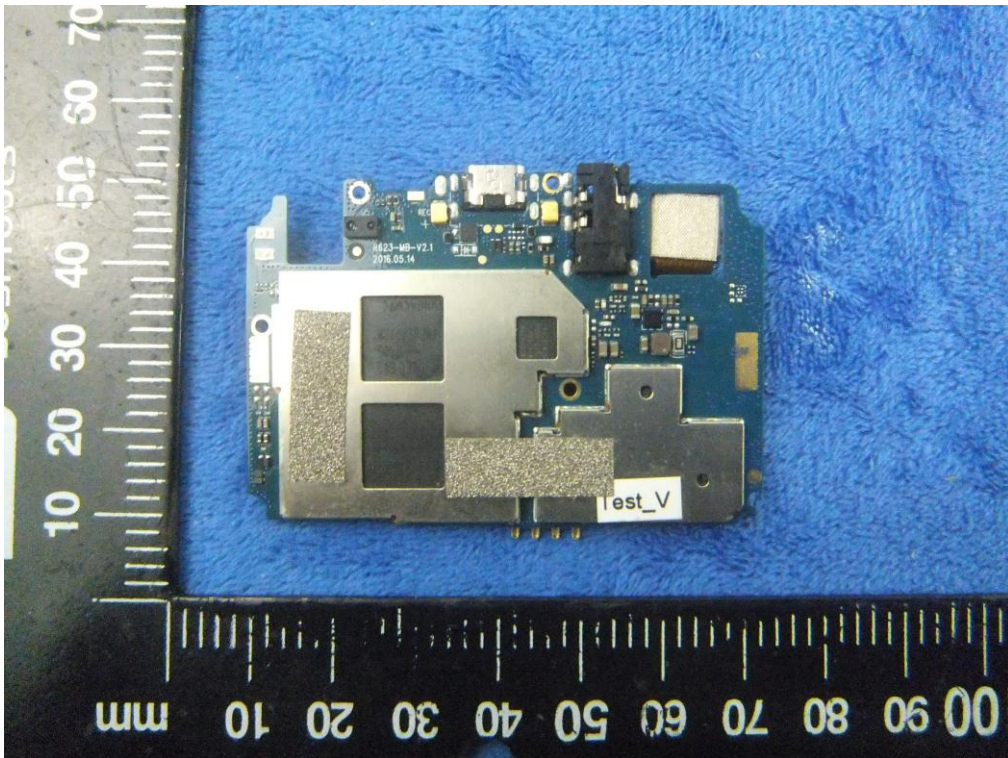

Mainboard without Shielding - Rear View

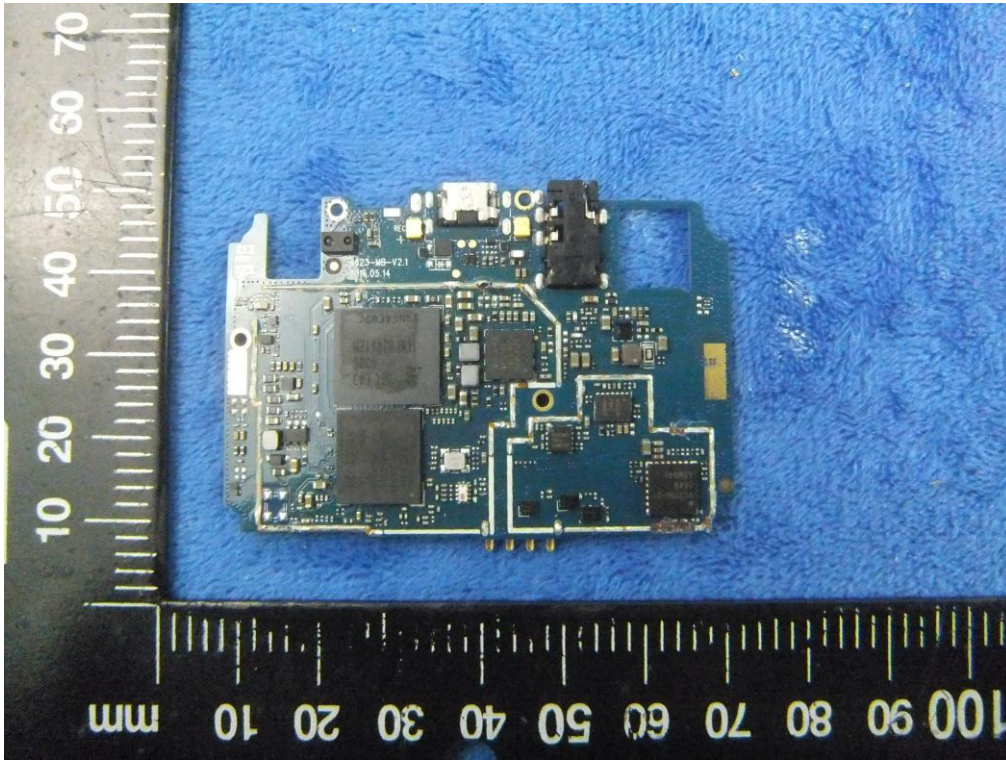


Small Mainboard - Front View

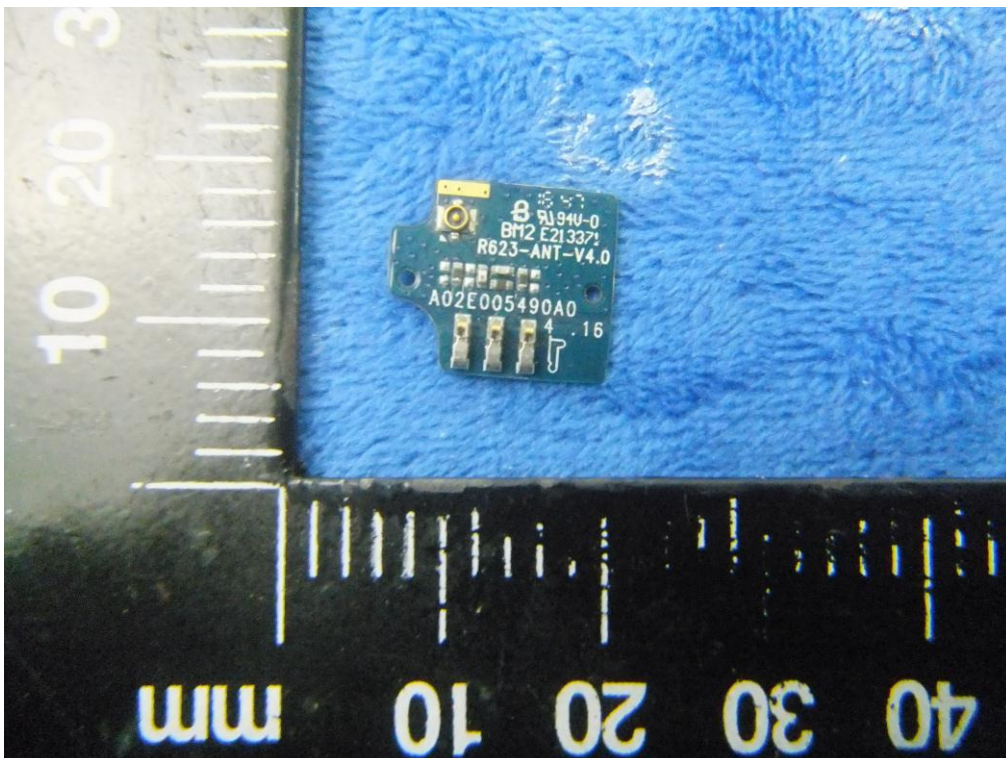




Small Mainboard - Rear View

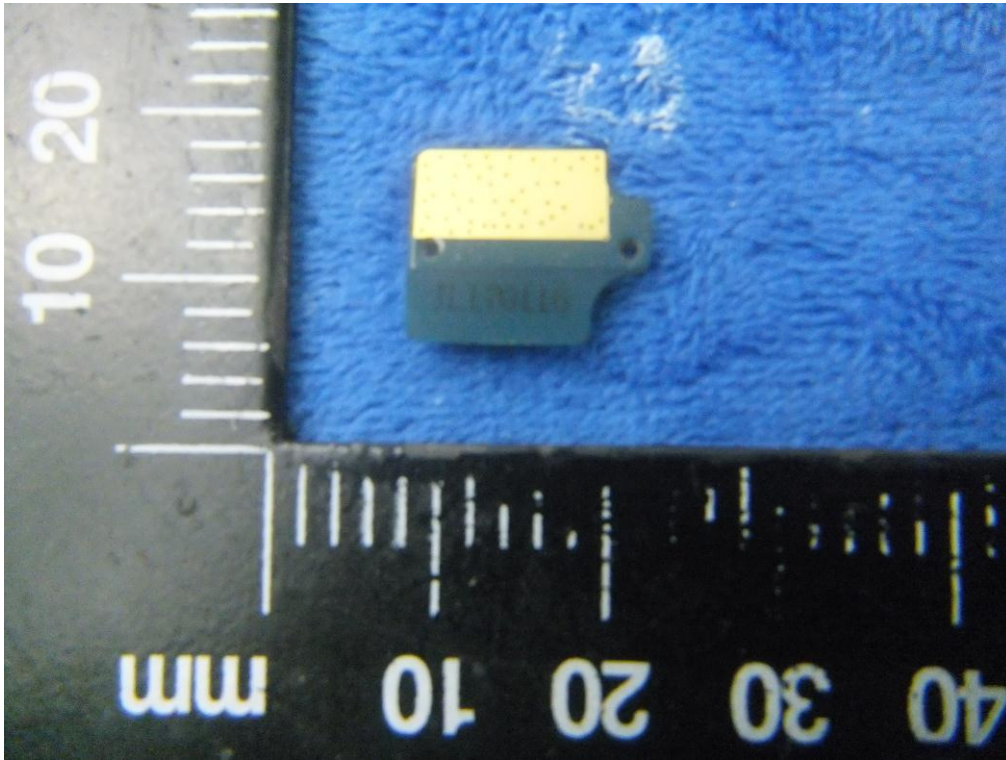

LCD - Front View




LCD – Rear View

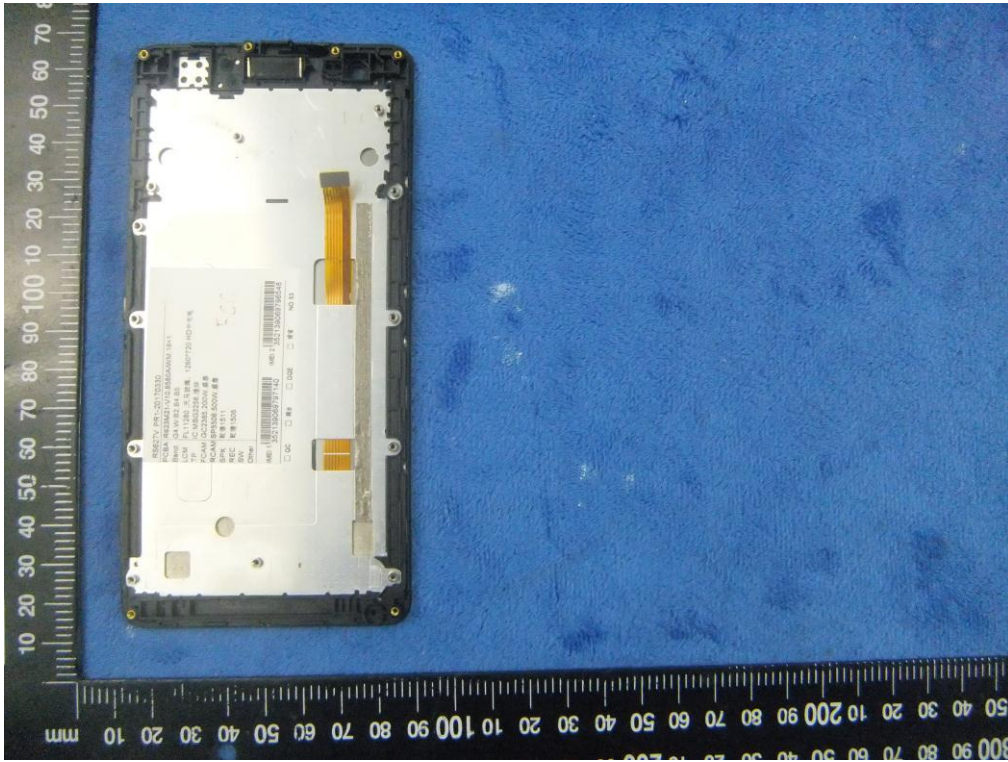

GSM/PCS/UMTS - Antenna View



WIFI/BT/BLE/GPS - Antenna View

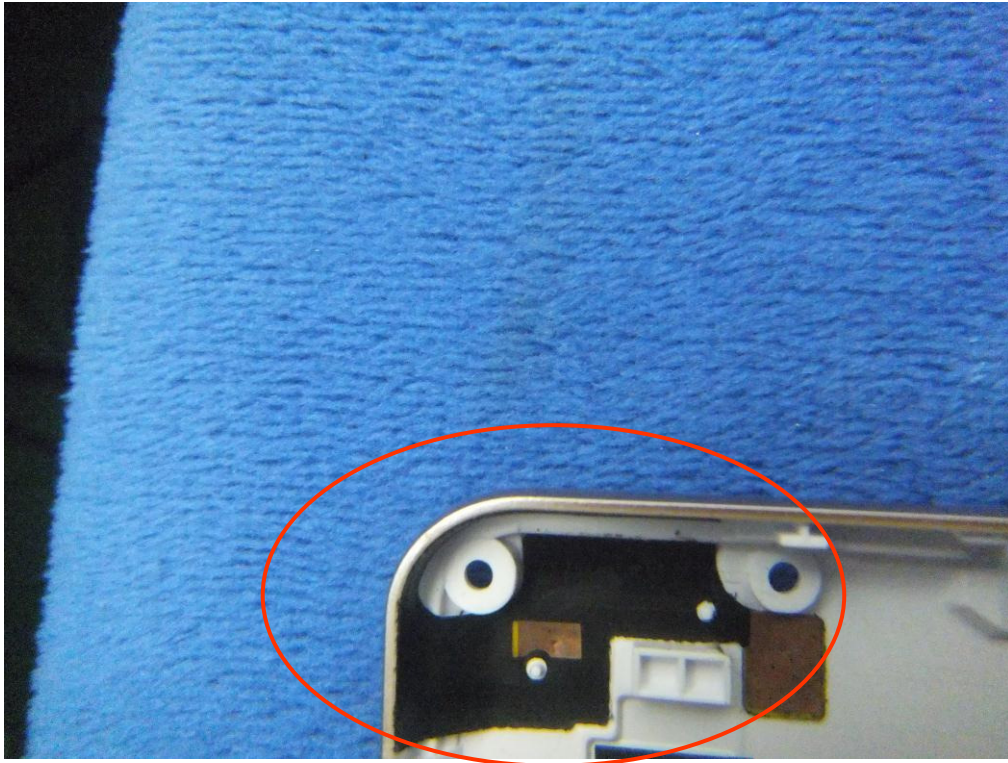


**Annex B.iii. Photograph: Test Setup Photo**




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

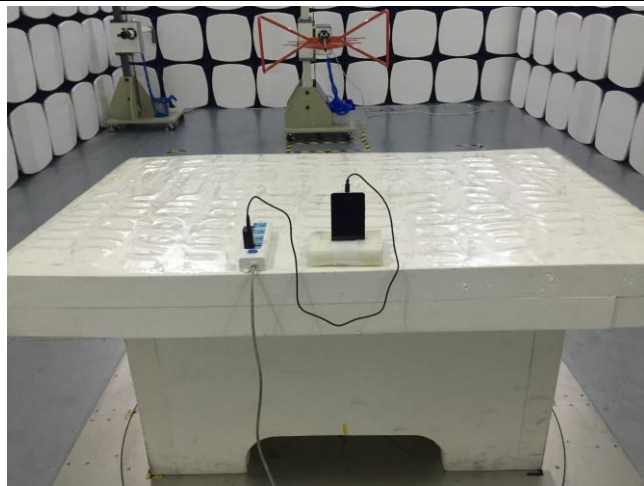

Radiated Spurious Emissions Test Setup Below 1GHz

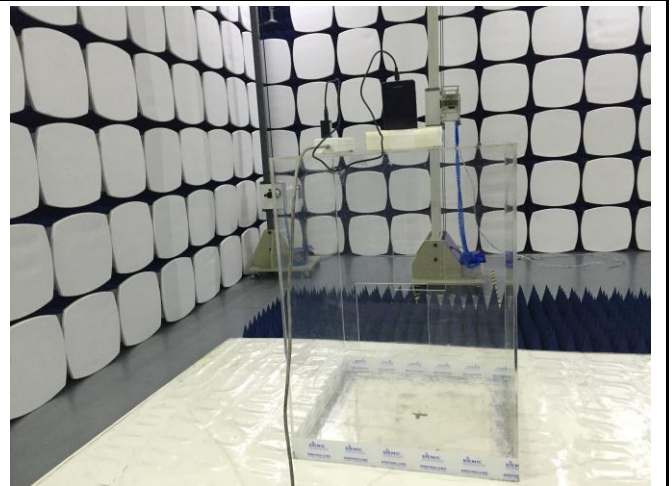


Radiated Spurious Emissions Test Setup Above  
1GHz


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK


#### Block Configuration Diagram for AC Line Conducted Emissions

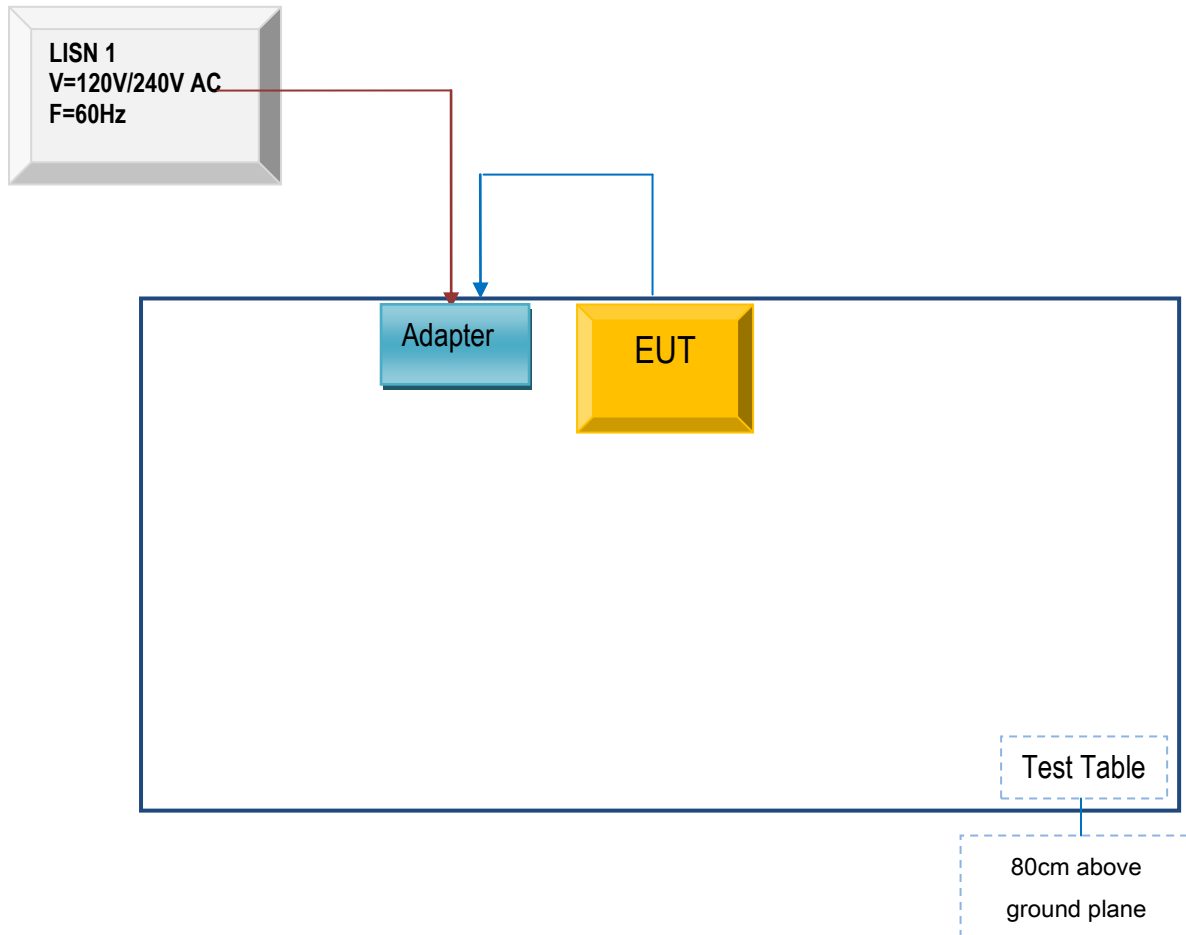

**Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .**

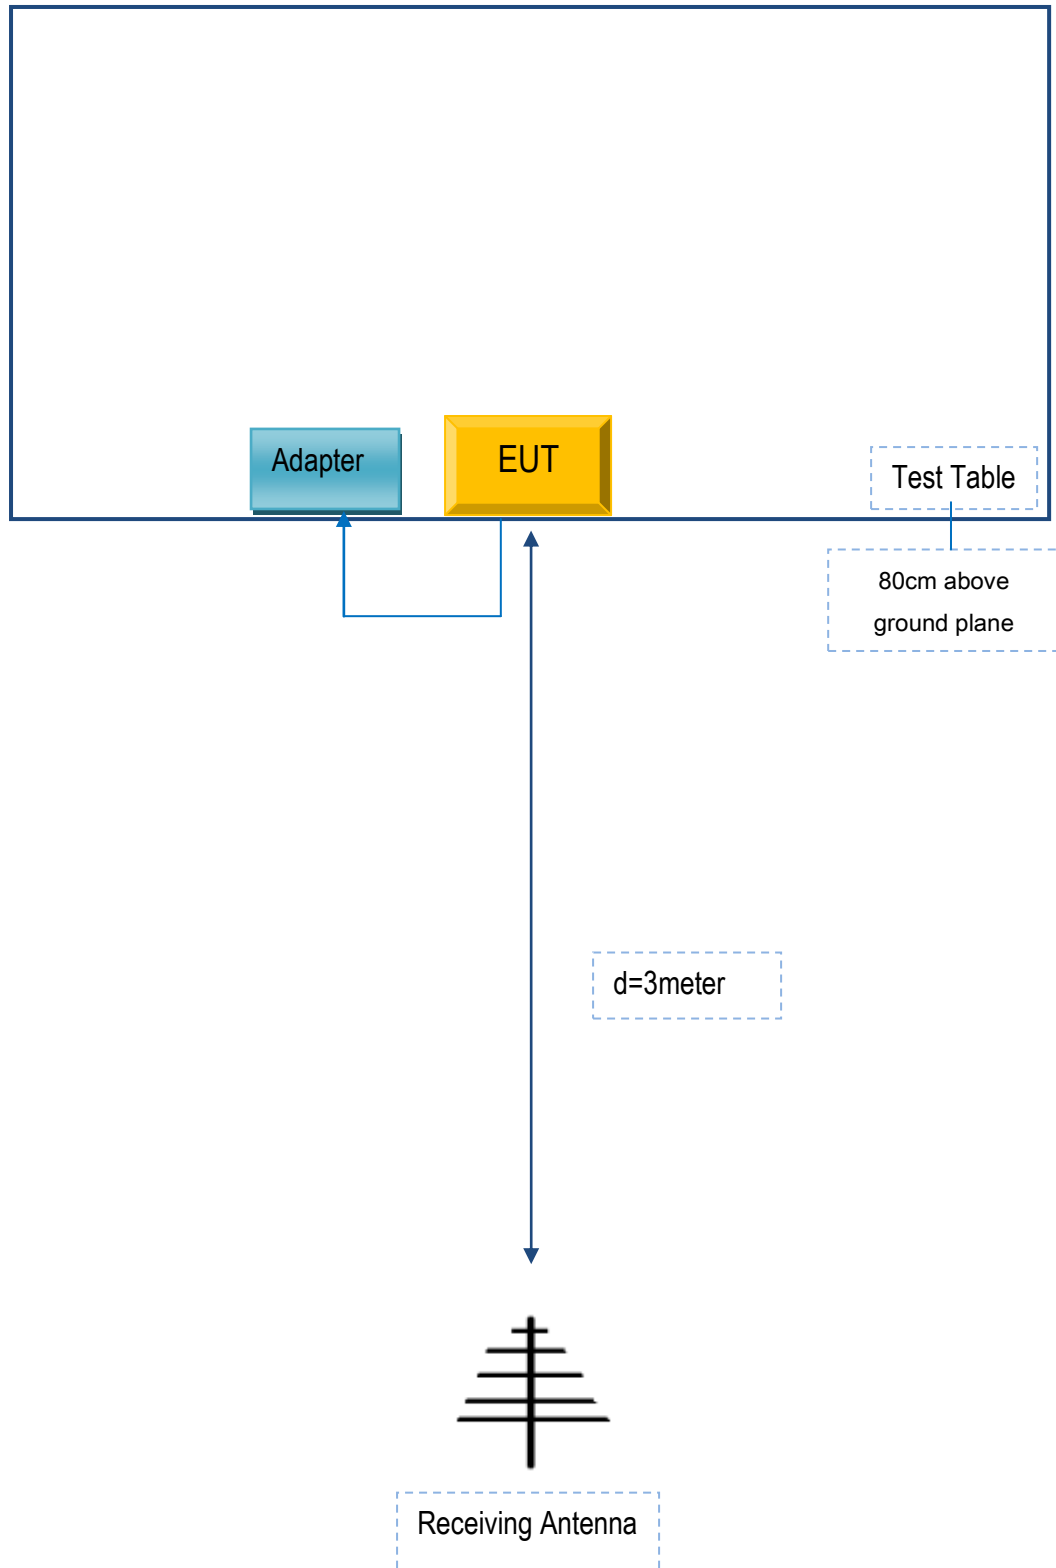

**Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .**

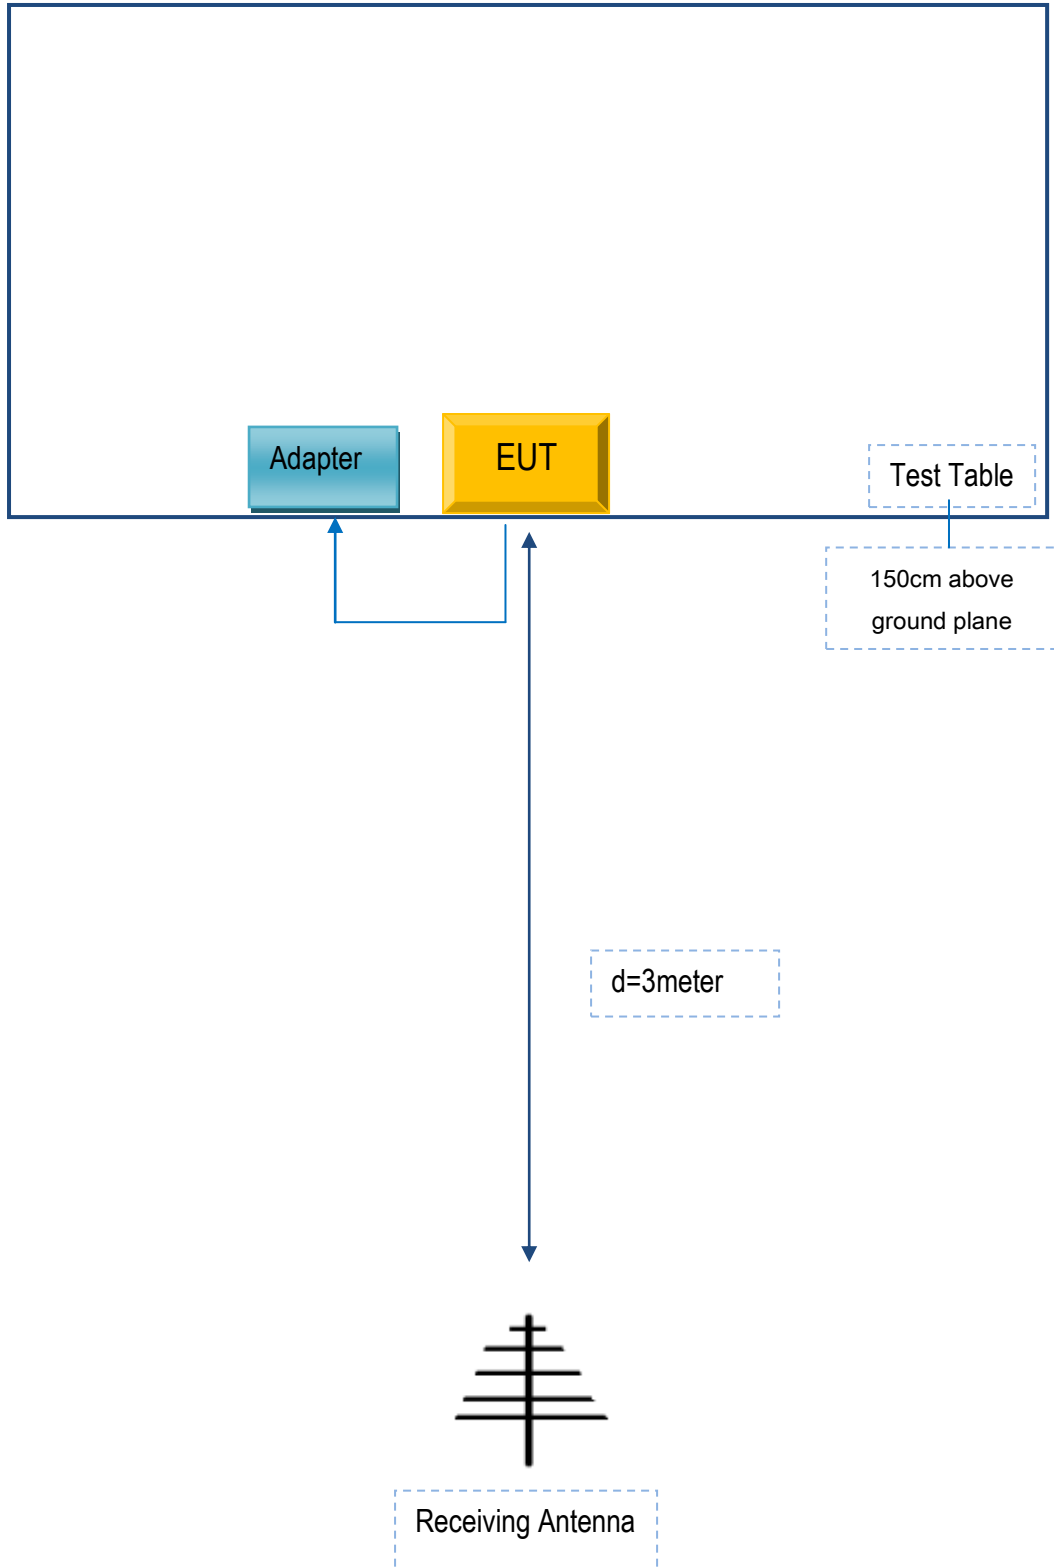

**Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

**Supporting Equipment:**

Manufacturer	Equipment Description	Model	Serial No
Verykool USA Inc	Adapter	TPA-46D050100UU	SA020

**Supporting Cable:**

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	SA020



Test Report	17070263-FCC-R2
Page	65 of 66

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Test Report	17070263-FCC-R2
Page	66 of 66

## Annex E. DECLARATION OF SIMILARITY

N/A