

# FCC PART 15.247

## TEST REPORT

For

### Zhongshan K-mate General Electronics Co.,Ltd.

NO.2 ,5th Xinsheng Street,Gangkou Town, Zhongshan City, Guangdong,China

**FCC ID: WAD-BTC015L**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Bluetooth Car Kit
<b>Test Engineer:</b> Allen Qiao	<i>Allen Qiao</i>
<b>Report Number:</b> RDG141215009-00B	
<b>Report Date:</b> 2014-12-24	
<b>Reviewed By:</b> Sula Huang RF Engineer	<i>Sula Huang</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION.....	5
EUT EXERCISE SOFTWARE.....	5
EQUIPMENT MODIFICATIONS.....	5
SUPPORT EQUIPMENT LIST AND DETAILS.....	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP.....	5
<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1093- RF EXPOSURE.....</b>	<b>8</b>
APPLICABLE STANDARD.....	8
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>9</b>
APPLICABLE STANDARD.....	9
ANTENNA CONNECTOR CONSTRUCTION.....	9
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....</b>	<b>10</b>
APPLICABLE STANDARD.....	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE.....	11
TEST EQUIPMENT LIST AND DETAILS.....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
TEST RESULTS SUMMARY.....	12
TEST RESULTS SUMMARY.....	12
TEST DATA.....	12
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>15</b>
APPLICABLE STANDARD.....	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	16
TEST PROCEDURE.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY.....	17
TEST DATA.....	17
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>	<b>21</b>
APPLICABLE STANDARD.....	21
TEST PROCEDURE.....	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA.....	21

**FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER .....24**  
    APPLICABLE STANDARD .....24  
    TEST PROCEDURE .....24  
    TEST EQUIPMENT LIST AND DETAILS.....24  
    TEST DATA .....24

**FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....27**  
    APPLICABLE STANDARD .....27  
    TEST PROCEDURE .....27  
    TEST EQUIPMENT LIST AND DETAILS.....27  
    TEST DATA .....27

**FCC §15.247(e) - POWER SPECTRAL DENSITY .....29**  
    APPLICABLE STANDARD .....29  
    TEST PROCEDURE .....29  
    TEST EQUIPMENT LIST AND DETAILS.....29  
    TEST DATA .....29

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The Zhongshan K-mate General Electronics Co.,Ltd.'s product, model number: *BTC015L* (FCC ID: *WAD-BTC015L*) (the "EUT") in this report was a *Bluetooth Car Kit*, which was measured approximately: 9.3 cm (L) x 2.8 cm (W) x 4cm (H), rated input voltage: DC 3.7V rechargeable Li-ion battery or DC5V charging from USB port.

*All measurement and test data in this report was gathered from production sample serial number: 141215009. (Assigned by BACL, Dongguan). The EUT was received on 2014-12-16.*

### Objective

This report is prepared on behalf of *Zhongshan K-mate General Electronics Co.,Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part15C DSS submissions with FCC ID: *WAD-BTC015L* for *Bluetooth BDR, EDR mode*.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

### EUT Exercise Software

The software “CSR Bluesuite 2.5.0” was used, which was provided by manufacturer. The maximum power was set by default configuration.

Mode	Test Software Version	CSR Bluesuite 2.5.0		
BLE	Test Frequency	2402MHz	2440 MHz	2480MHz
	Power level	N/A	N/A	N/A

### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DVE	Adapter	DSC-5CU-05	/
GSOU	Speaker	U131	/

### External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
AUX Cable	yes	No	1.44	AUX Port of Speaker	EUT
USB Cable	No	No	1.22	USB Port of Adapter	EUT

### Block Diagram of Test Setup

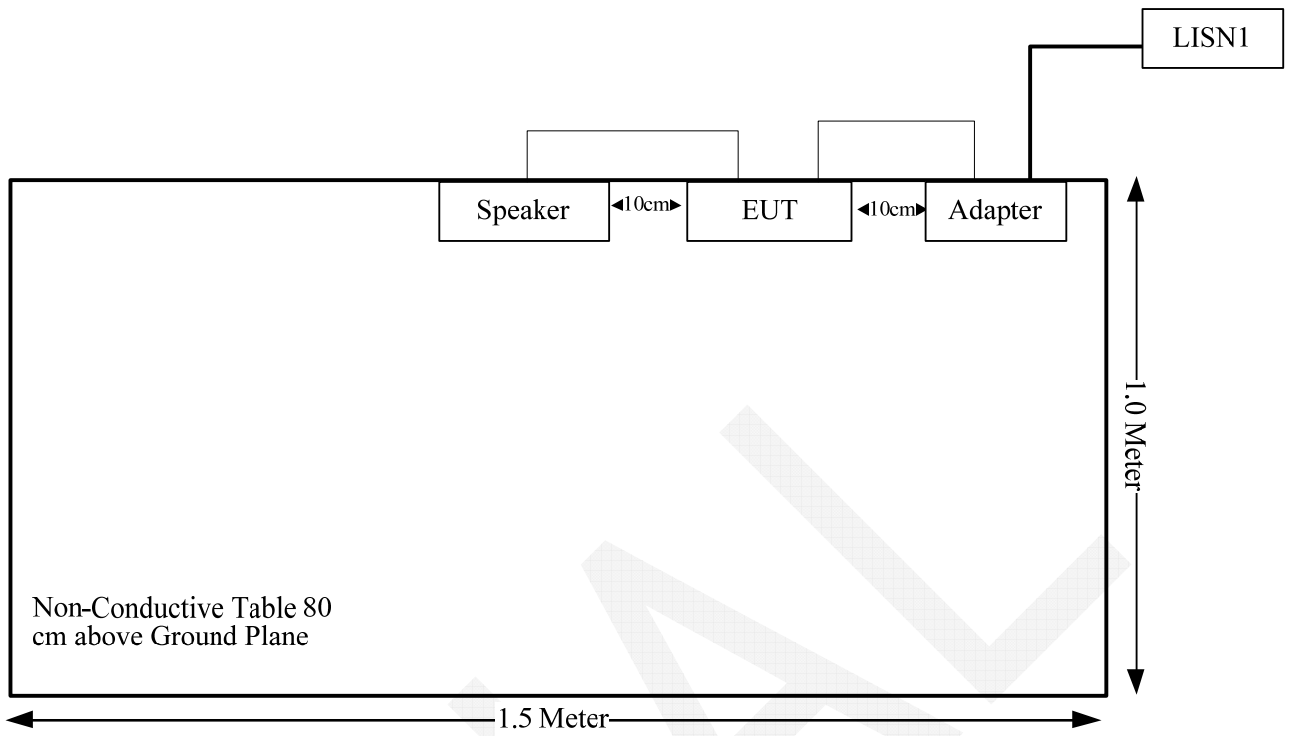

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF EXPOSURE	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

## **FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE**

### **Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

### **Measurement Result**

The maximum conducted output power = 8.48 dBm (7.05 mW) at 2480 MHz  
 $[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$   
 $= 7.05/5 \cdot (\sqrt{2.48}) = 2.22 < 3.0$

**So the stand-alone SAR evaluation is not necessary.**



## **FCC §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
  - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### **Antenna Connector Construction**

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 1.03 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

**EUT Setup**

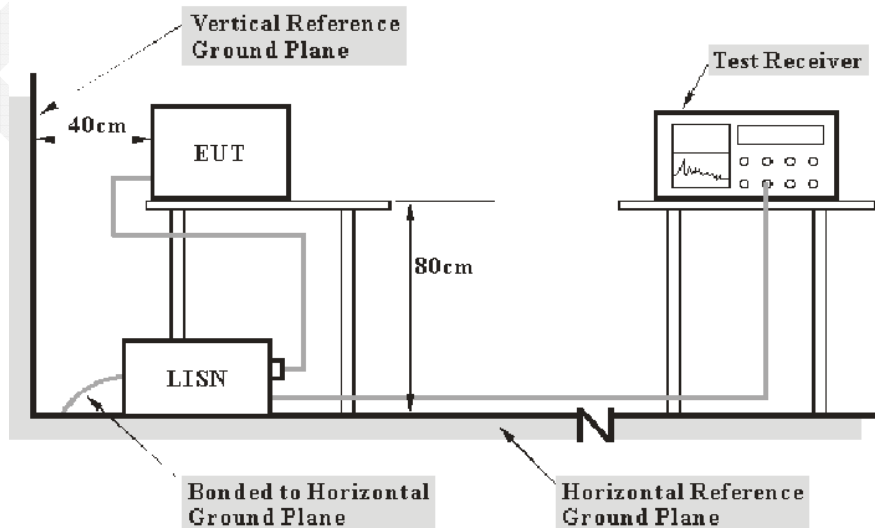

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT was with the FCC Part 15.207 limits. The certification used

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-16	2015-10-16
R&S	L.I.S.N	ESH3-Z5	843331/015	N/A	N/A
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude  
 $A_C$ : attenuation caused by cable loss  
 VDF: voltage division factor of AMN  
 $C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**9.4 dB at 1.135185 MHz** in the **Neutral** conducted mode.

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	20.3 °C
<b>Relative Humidity:</b>	29 %
<b>ATM Pressure:</b>	102.3 kPa

*The testing was performed by Allen Qiao on 2014-12-18.*

Test Mode: Charging&Transmitting


AC 120V/60 Hz, Line

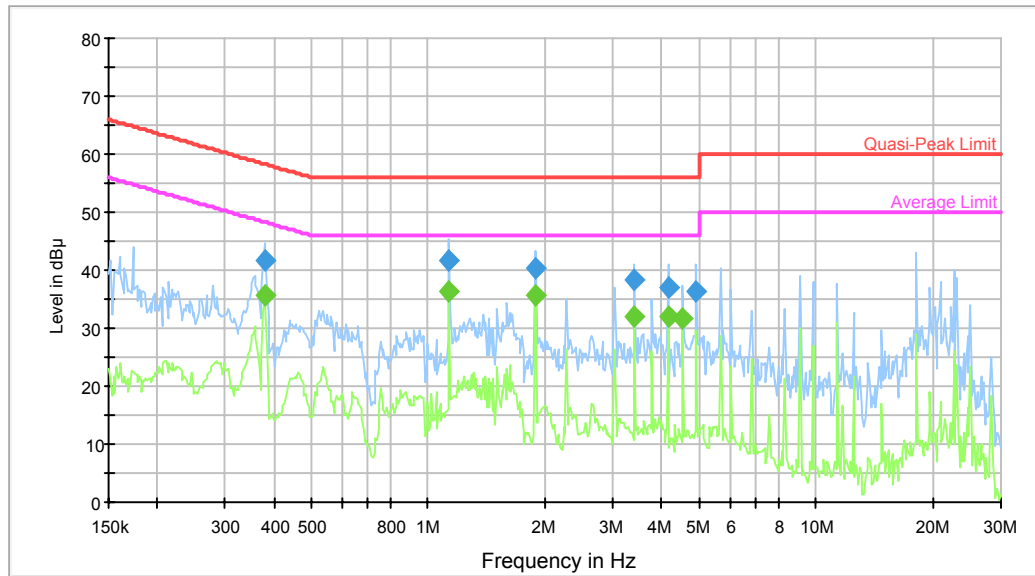

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.378019	41.6	9.000	L1	10.6	16.7	58.3	Compliance
1.135185	41.6	9.000	L1	10.4	14.4	56.0	Compliance
1.890344	40.3	9.000	L1	10.4	15.7	56.0	Compliance
3.408946	38.5	9.000	L1	10.7	17.5	56.0	Compliance
4.160384	37.1	9.000	L1	10.7	18.9	56.0	Compliance
4.918182	36.5	9.000	L1	10.7	19.5	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.378019	35.6	9.000	L1	10.6	12.7	48.3	Compliance
1.135185	36.3	9.000	L1	10.4	9.7	46.0	Compliance
1.890344	35.7	9.000	L1	10.4	10.3	46.0	Compliance
3.408946	32.0	9.000	L1	10.7	14.0	46.0	Compliance
4.160384	32.1	9.000	L1	10.7	13.9	46.0	Compliance
4.541500	31.8	9.000	L1	10.7	14.2	46.0	Compliance

**AC 120V/60 Hz, Neutral**

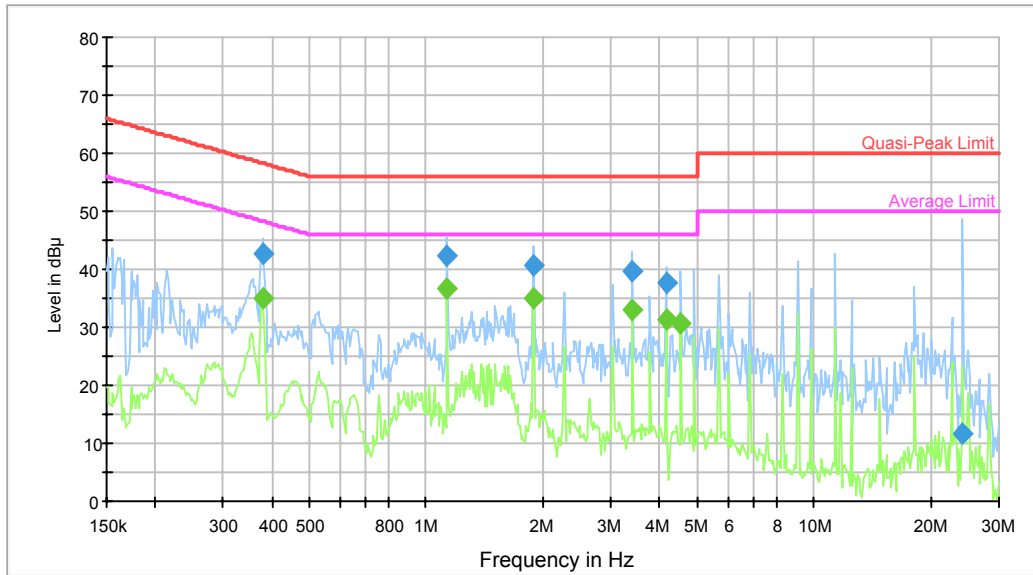

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.378019	42.5	9.000	N	10.9	15.8	58.3	Compliance
1.135185	42.5	9.000	N	10.5	13.5	56.0	Compliance
1.890344	40.7	9.000	N	10.5	15.3	56.0	Compliance
3.408946	39.8	9.000	N	10.7	16.2	56.0	Compliance
4.160384	37.5	9.000	N	10.8	18.5	56.0	Compliance
24.205331	11.7	9.000	N	10.9	48.3	60.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.378019	35.1	9.000	N	10.9	13.3	48.3	Compliance
1.135185	36.6	9.000	N	10.5	9.4	46.0	Compliance
1.890344	35.0	9.000	N	10.5	11.0	46.0	Compliance
3.408946	33.0	9.000	N	10.7	13.0	46.0	Compliance
4.160384	31.3	9.000	N	10.8	14.7	46.0	Compliance
4.541500	30.5	9.000	N	10.8	15.5	46.0	Compliance

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**

**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 2 – Values of  $U_{cispr}$


Measurement	$U_{cispr}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

**EUT Setup**

**Below 1GHz:**

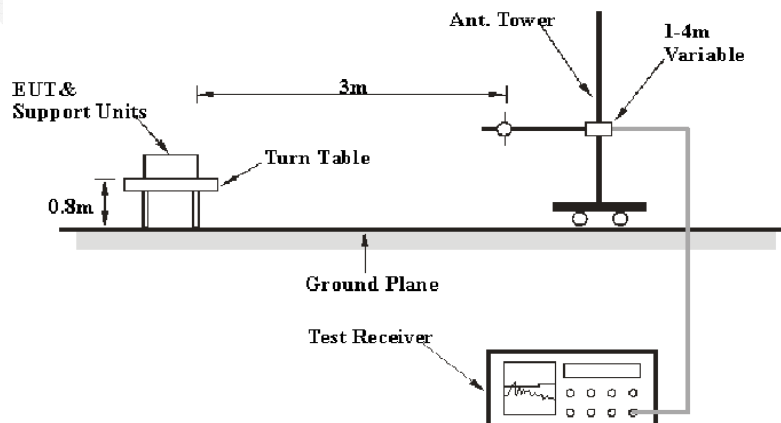

**Above 1GHz:**

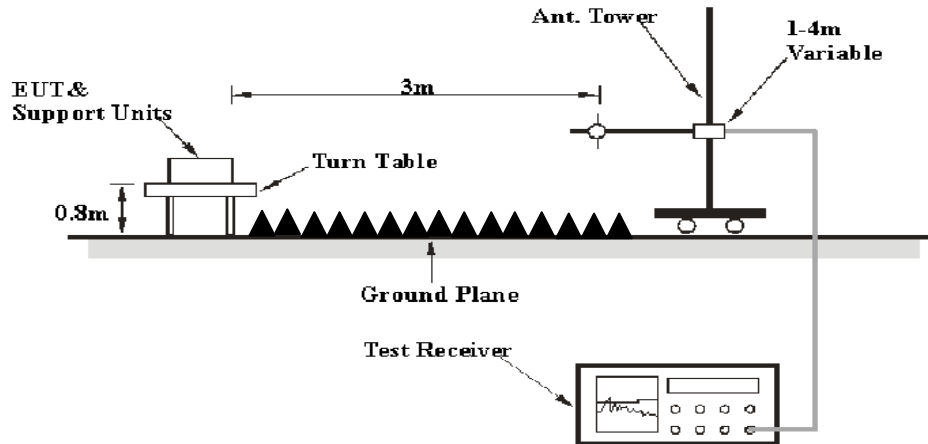

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.



## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2014-09-06	2015-09-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

**5.72 dB at 2390 MHz in the Horizontal polarization**

## Test Data

### Environmental Conditions

<b>Temperature:</b>	22.7-23.1 °C
<b>Relative Humidity:</b>	61-55 %
<b>ATM Pressure:</b>	100.8-102.1 kPa

The testing was performed by Allen Qiao on 2014-12-17 and 2014-12-21.


Test Mode: Transmitting

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	66.19	PK	H	25.65	4.42	0.00	96.26	N/A	N/A
2402	61.29	AV	H	25.65	4.42	0.00	91.36	N/A	N/A
2402	56.89	PK	V	25.65	4.42	0.00	86.96	N/A	N/A
2402	52.01	AV	V	25.65	4.42	0.00	82.08	N/A	N/A
2390	31.59	PK	H	25.61	4.39	0.00	61.59	74.00	12.41
2390	18.28	AV	H	25.61	4.39	0.00	48.28	54.00	5.72
4804	44.84	PK	H	30.59	5.98	27.41	54.00	74.00	20.00
4804	36.87	AV	H	30.59	5.98	27.41	46.03	54.00	7.97
7206	37.24	PK	H	34.09	7.45	25.91	52.87	74.00	21.13
7206	24.1	AV	H	34.09	7.45	25.91	39.73	54.00	14.27
9608	34.45	PK	H	35.96	8.80	27.55	51.66	74.00	22.34
9608	20.56	AV	H	35.96	8.80	27.55	37.77	54.00	16.23
6919	36.45	PK	H	33.39	7.26	26.41	50.69	74.00	23.31
6919	23.12	AV	H	33.39	7.26	26.41	37.36	54.00	16.64
195.3	34.84	QP	H	11.98	1.67	21.46	27.03	46.00	18.97
Middle Channel: 2440 MHz									
2440	66.58	PK	H	25.74	4.40	0.00	96.72	N/A	N/A
2440	61.69	AV	H	25.74	4.40	0.00	91.83	N/A	N/A
2440	58.12	PK	V	25.74	4.40	0.00	88.26	N/A	N/A
2440	53.21	AV	V	25.74	4.40	0.00	83.35	N/A	N/A
4880	43.6	PK	H	30.79	6.08	27.42	53.05	74.00	20.95
4880	36.12	AV	H	30.79	6.08	27.42	45.57	54.00	8.43
7320	34.16	PK	H	34.37	7.51	25.88	50.16	74.00	23.84
7320	25.59	AV	H	34.37	7.51	25.88	41.59	54.00	12.41
9760	34.22	PK	H	36.32	8.83	27.21	52.16	74.00	21.84
9760	20.98	AV	H	36.32	8.83	27.21	38.92	54.00	15.08
6919	36.82	PK	H	33.39	7.26	26.41	51.06	74.00	22.94
6919	23.46	AV	H	33.39	7.26	26.41	37.70	54.00	16.30
195.3	34.62	QP	H	11.98	1.67	21.46	26.81	46.00	19.19
High Channel: 2480 MHz									
2480	64.73	PK	H	25.85	4.48	0.00	95.06	N/A	N/A
2480	59.12	AV	H	25.85	4.48	0.00	89.45	N/A	N/A
2480	58.58	PK	V	25.85	4.48	0.00	88.91	N/A	N/A
2480	53.49	AV	V	25.85	4.48	0.00	83.82	N/A	N/A
2483.5	30.93	PK	H	25.86	4.49	0.00	61.28	74.00	12.72
2483.5	17.88	AV	H	25.86	4.49	0.00	48.23	54.00	5.77
4960	41.77	PK	H	31.00	5.90	27.43	51.24	74.00	22.76
4960	34.25	AV	H	31.00	5.90	27.43	43.72	54.00	10.28
7440	34.51	PK	H	34.66	7.58	25.97	50.78	74.00	23.22
7440	21.54	AV	H	34.66	7.58	25.97	37.81	54.00	16.19
9920	33.12	PK	H	36.71	8.87	26.66	52.04	74.00	21.96
9920	20.47	AV	H	36.71	8.87	26.66	39.39	54.00	14.61
6919	36.61	PK	H	33.39	7.26	26.41	50.85	74.00	23.15
6919	23.54	AV	H	33.39	7.26	26.41	37.78	54.00	16.22
195.3	35.21	QP	H	11.98	1.67	21.46	27.40	46.00	18.60

\*Within measurement uncertainty!


### Conducted Spurious Emissions at Antenna Port

#### Low Channel

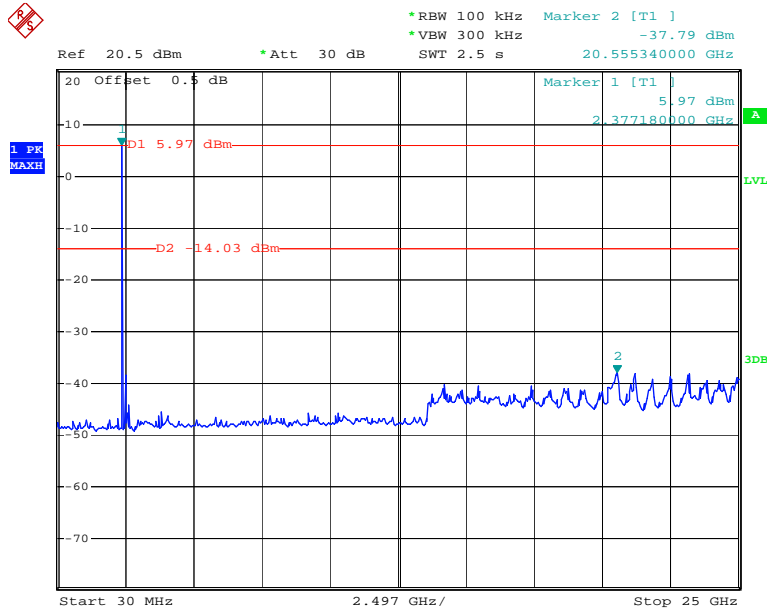


Date: 21.DEC.2014 13:48:43

#### Middle Channel

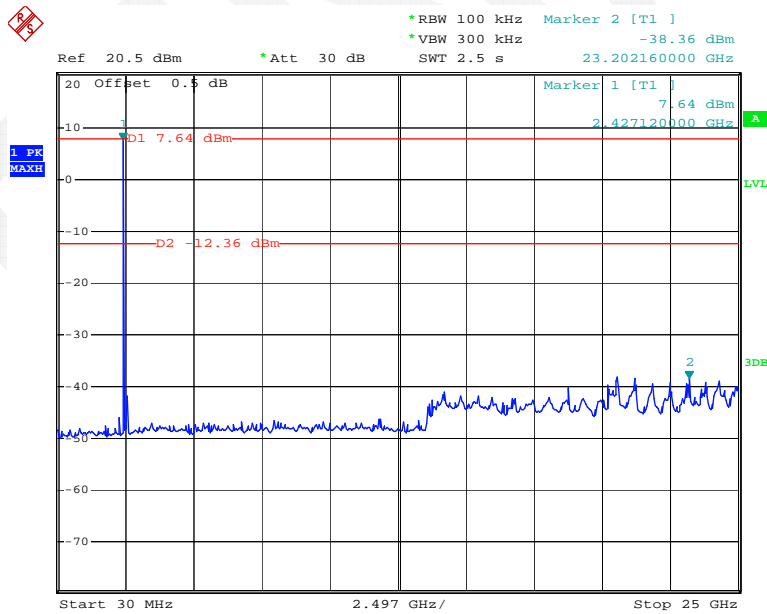

Date: 17.DEC.2014 14:08:52

### High Channel

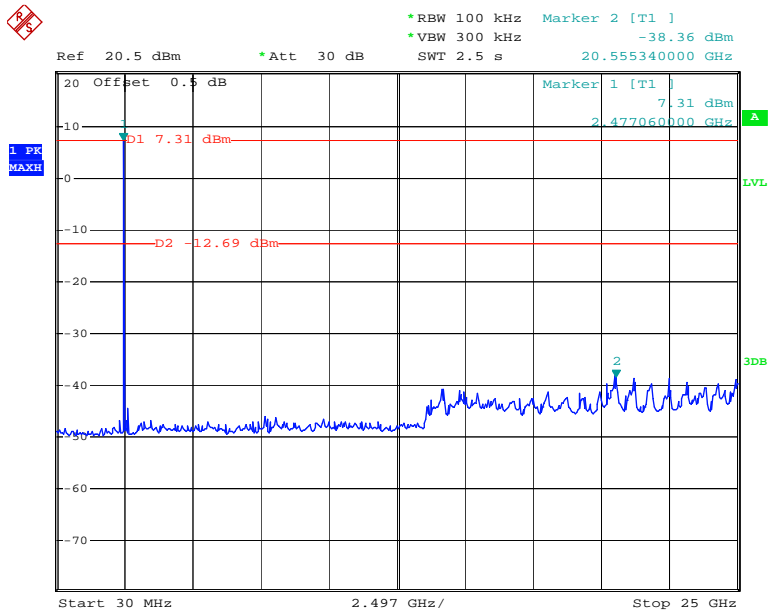

Date: 17.DEC.2014 14:06:38

## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	22 °C
Relative Humidity:	37 %
ATM Pressure:	100.8 kPa


\* The testing was performed by Allen Qiao on 2014-12-17.

**Test Result:** Pass.

Please refer to the following tables and plots.


Channel	Frequency	6 dB Bandwidth	Limit
	(MHz)	(MHz)	(kHz)
Low	2402	0.70	≥500
Middle	2440	0.69	≥500
High	2480	0.69	≥500

Low Channel

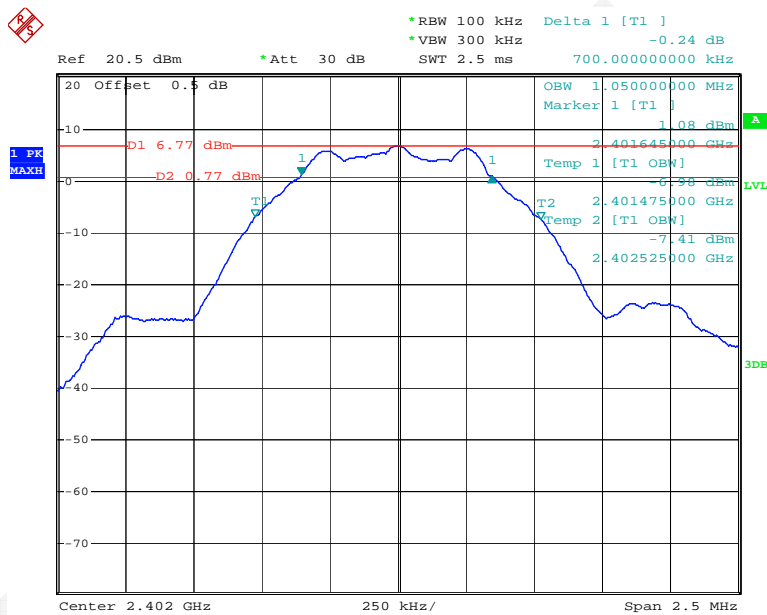


Date: 17.DEC.2014 13:54:37

### Middle Channel

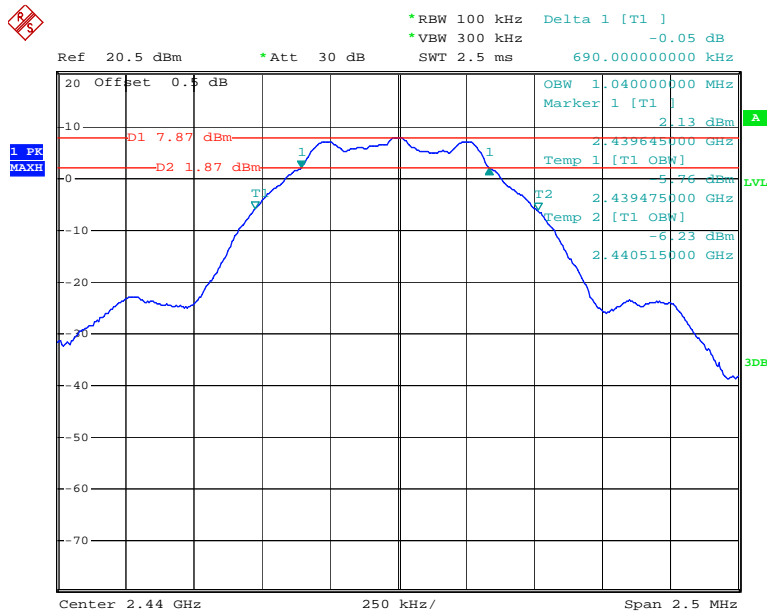

Date: 17.DEC.2014 13:53:29

### High Channel

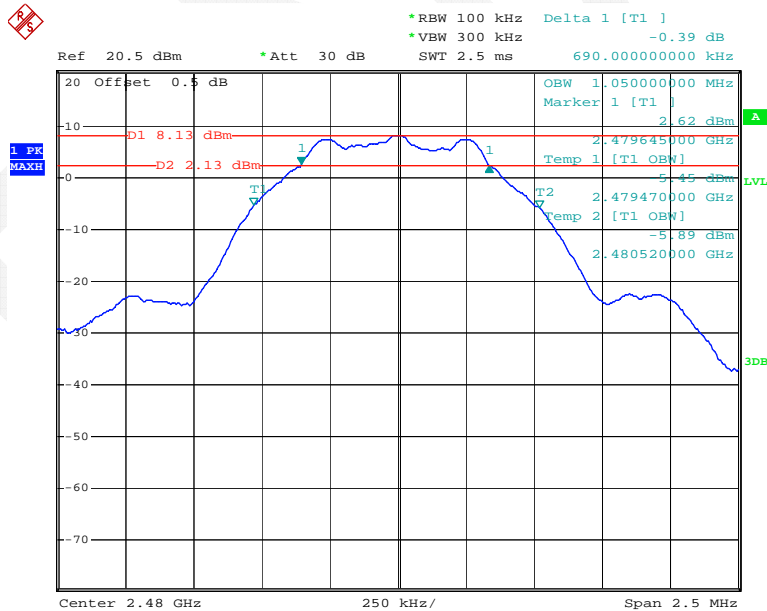

Date: 17.DEC.2014 13:52:16

## FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02:

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	22 °C
Relative Humidity:	37 %
ATM Pressure:	100.8 kPa

\* The testing was performed by Allen Qiao on 2014-12-17.




Test Mode: Transmitting

Channel	Frequency	Max Peak Conducted Output Power	Limit	Result
	(MHz)	(dBm)	(dBm)	
Low	2402	7.18	30	PASS
Middle	2440	8.21	30	PASS
High	2480	8.48	30	PASS


Please refer to the following plots

**RF Output Power, Low Channel**

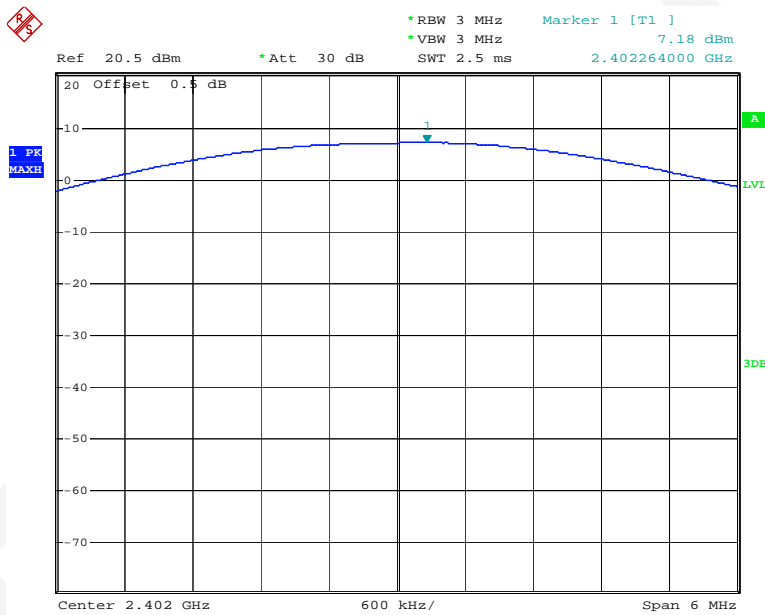


Date: 17.DEC.2014 13:34:02

### RF Output Power, Middle Channel

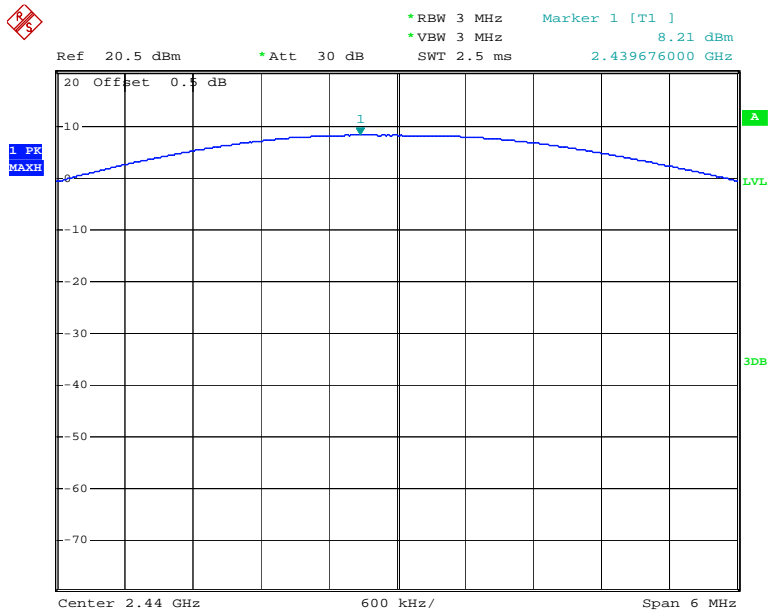

Date: 17.DEC.2014 13:34:38

### RF Output Power, High Channel

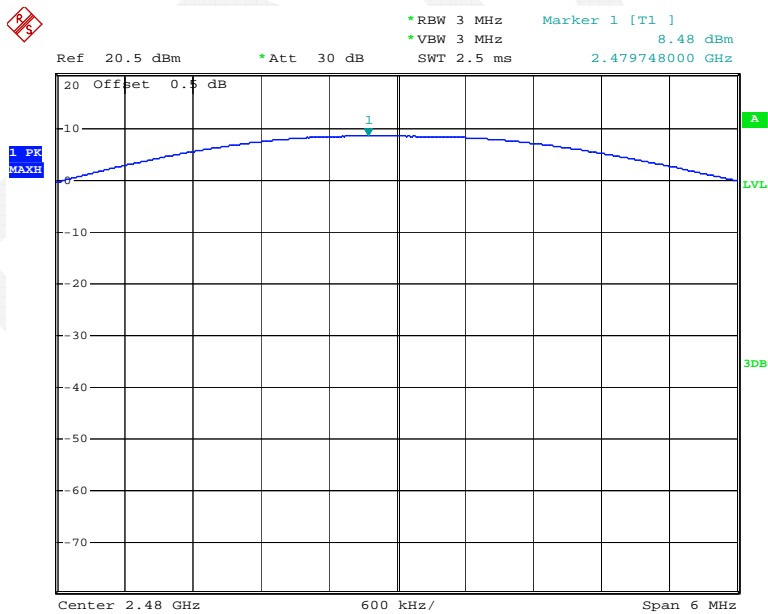

Date: 17.DEC.2014 13:35:04

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


Temperature:	22 °C
Relative Humidity:	37 %
ATM Pressure:	100.8 kPa

\* The testing was performed by Allen Qiao on 2014-12-17.

#### Test Result: Compliance


Please refer to following plots.

### Band Edge, Left Side

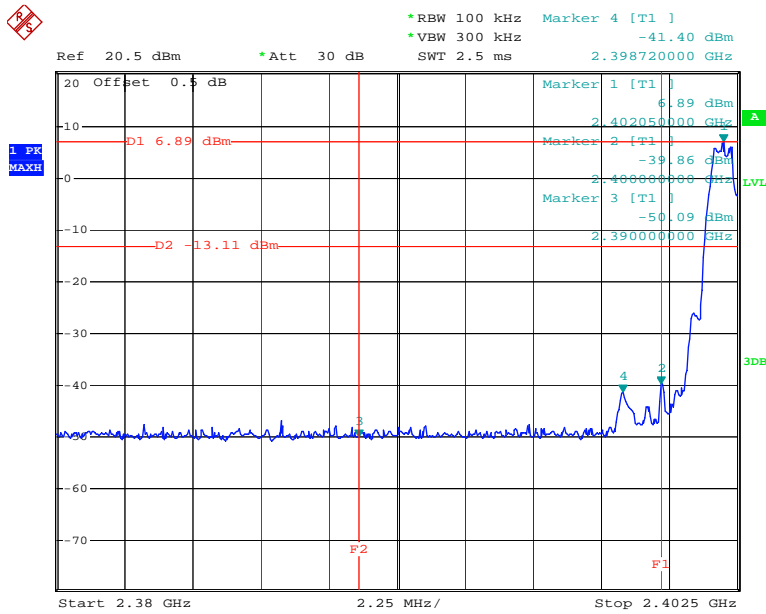

Date: 17.DEC.2014 14:00:51

### Band Edge, Right Side

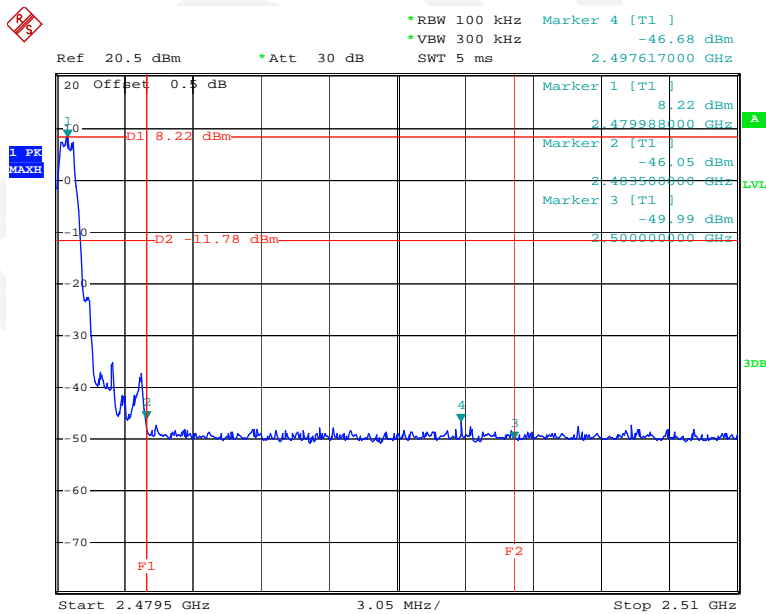

Date: 17.DEC.2014 14:02:44

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	37 %
<b>ATM Pressure:</b>	100.8 kPa

\* The testing was performed by Allen Qiao on 2014-12-17.


Test Mode: Transmitting

Test Result: Pass

Channel	Frequency	PSD	Limit	Result
	MHz	(dBm/3kHz)	(dBm/3kHz)	
Low	2402	-8.96	≤8	PASS
Middle	2440	-7.80	≤8	PASS
High	2480	-7.29	≤8	PASS


Please refer to the following plots

Power Spectral Density, Low Channel

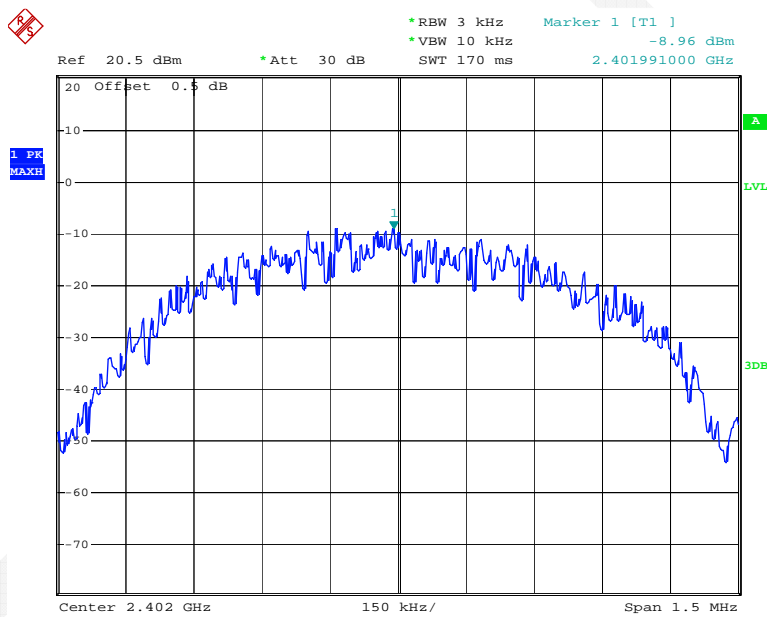


Date: 17.DEC.2014 14:25:43

### Power Spectral Density, Middle Channel

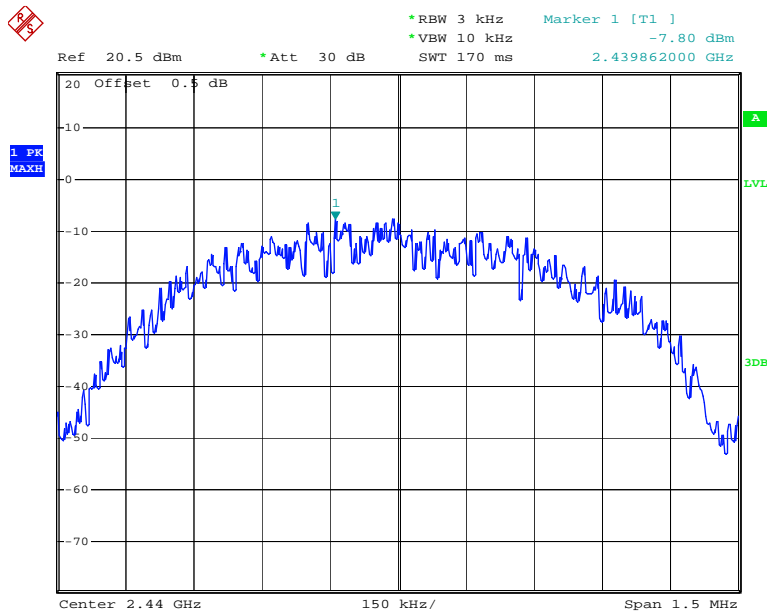

Date: 17.DEC.2014 14:25:21

### Power Spectral Density, High Channel

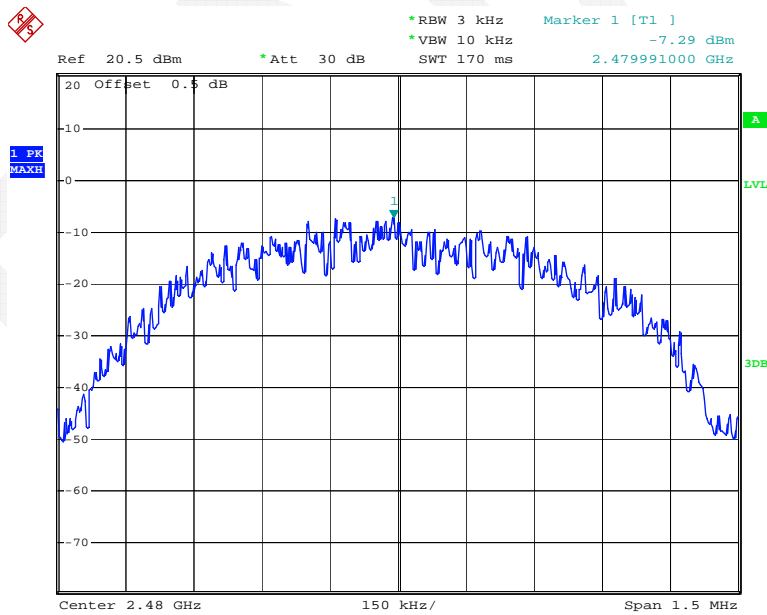

Date: 17.DEC.2014 14:24:56

\*\*\*\*\* END OF REPORT \*\*\*\*\*