



FCC PART 15.247

TEST REPORT

For

Zhongshan K-mate General Electronics Co.,Ltd.

NO.2, 5th Xinsheng Street, Gangkou Town, Zhongshan City, Guangdong, China

FCC ID: WAD-BTT025A

Report Type: Original Report	Product Type: Bluetooth audio transmitter
Test Engineer: <u>Dean Liu</u> <i>Dean Liu</i>	
Report Number: <u>RDG140910002-00A</u>	
Report Date: <u>2014-09-25</u>	
Reviewed By: <u>Sula Huang</u> RF Engineer	<i>Sula Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	28

APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	54
APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST EQUIPMENT LIST AND DETAILS.....	54
TEST DATA	54
FCC §15.247(d) - BAND EDGES TESTING	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
TEST EQUIPMENT LIST AND DETAILS.....	60
TEST DATA	60
DECLARATION LETTER	64

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Zhongshan K-mate General Electronics Co., Ltd.*'s product, model number: *BTT025A* (the "EUT") in this report is a *Bluetooth audio transmitter*, which was measured approximately: 5.2 cm (L) x 2.3 cm (W) x 1.0 cm (H), rated input voltage: DC 3.7V from lithium battery or DC 5.0V from USB port for model *BTT025A* and *BTT025*, DC 5.0V from USB port for model *BTT025N*.

Note: The series product, model BTT025A, BTT025, BTT025N are electrically identical, the differences between them are the model name ,power source and the function of support APTX, we selected BTT025A for fully testing, the details was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 140910002. (Assigned by BACL, Dongguan). The EUT was received on 2014-09-11.

Objective

This report is prepared on behalf of *Zhongshan K-mate General Electronics Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

EUT Exercise Software

The software “Bluetest 3” was used for testing, which was provided by manufacturer. The worst condition (maximum power) was setting by the software as following table:

Test Software Version		Bluetest 3		
Test Frequency		2402MHz	2441MHz	2480MHz
Power Level Setting	GFSK	63	63	63
	$\pi/4$ -DQPSK	100	100	100
	8DPSK	100	100	100

Equipment Modifications

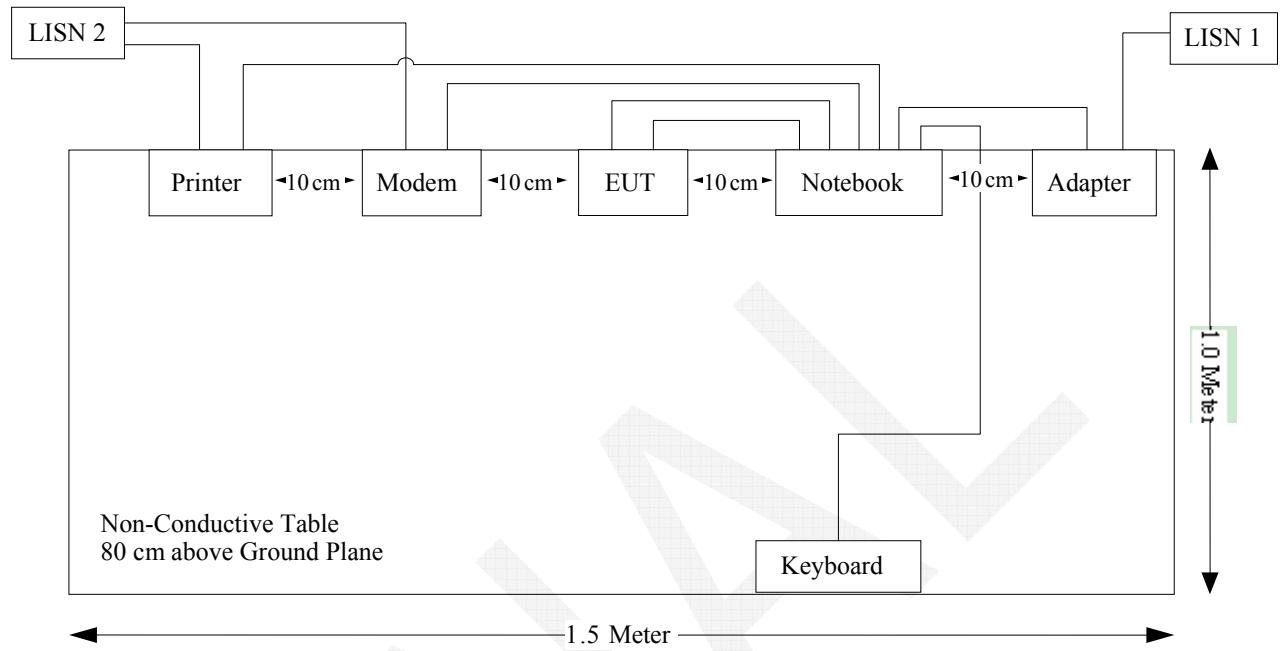
No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
GSOU	Bluetooth speaker	U910	N/A

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	Yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	Yes	Yes	1.8	USB Port of Laptop	Keyboard
USB Cable	No	No	0.85	USB Port of Laptop	EUT

Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The maximum conducted output power = 4.94 dBm (3.12mW) at 2402MHz
 $[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$
 $= 3.12 / 5 * (\sqrt{2.402}) = 0.967 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to $U_{\text{cisp}}^{\text{r}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than $U_{\text{cisp}}^{\text{r}}$ of Table 1, then:

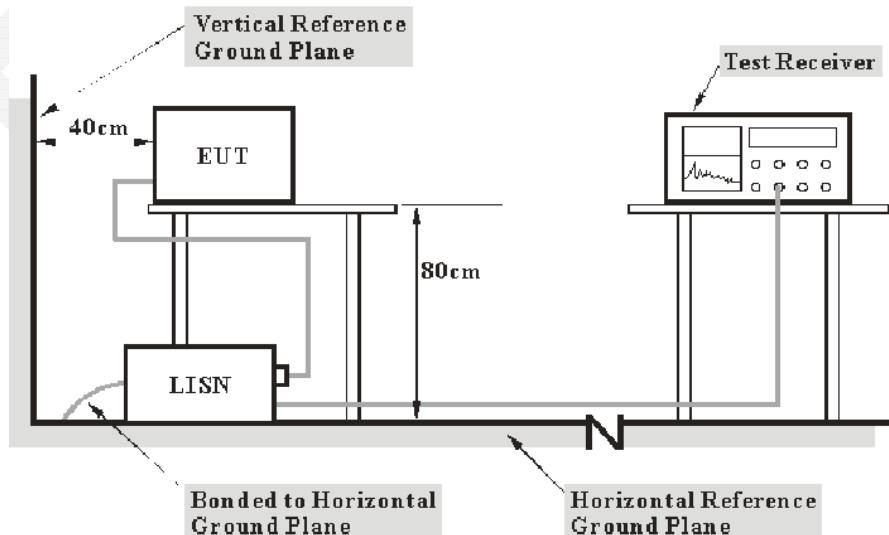
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}^{\text{r}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}^{\text{r}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of $U_{\text{cisp}}^{\text{r}}$

Measurement	$U_{\text{cisp}}^{\text{r}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter of laptop was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_c + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-20
R&S	L.I.S.N	ESH3-Z5	843331/015	2013-09-25	2014-09-25
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

9.9 dB at 0.309742 MHz in the Neutral conducted mode

Test Data

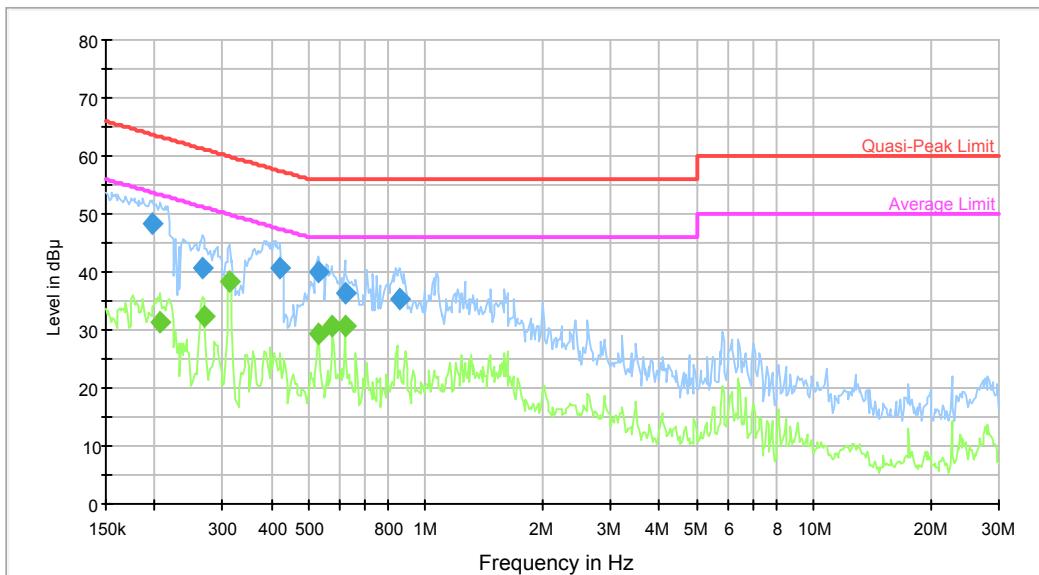
Environmental Conditions

Temperature:	27.7 °C
Relative Humidity:	67 %
ATM Pressure:	100.5 kPa

The testing was performed by Dean Liu on 2014-09-17.

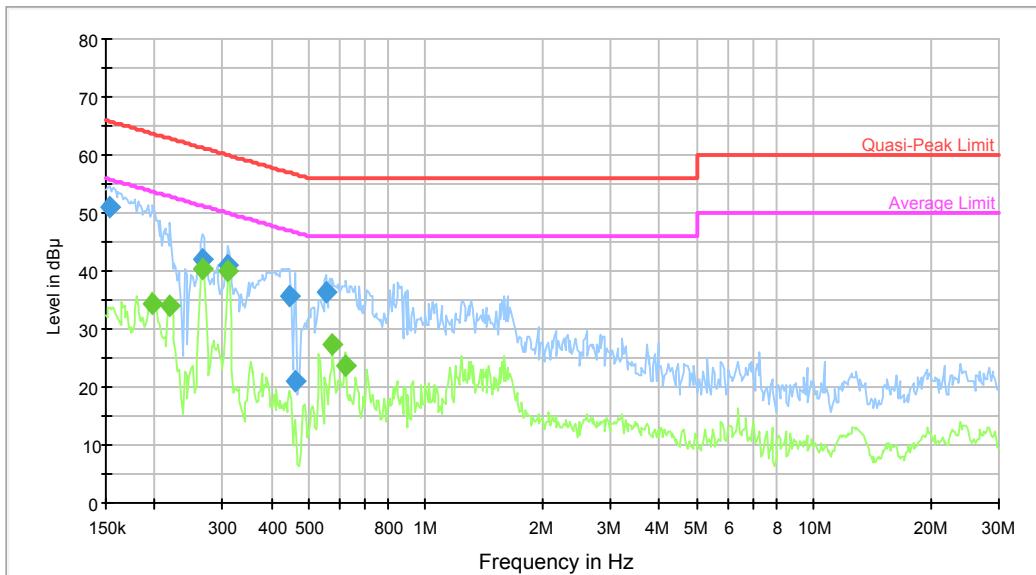
Test Mode: Charging&transmitting

AC120 V, 60 Hz, Line:



Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.198249	48.3	9.000	L1	10.7	15.4	63.7	Compliance
0.266226	40.8	9.000	L1	10.7	20.4	61.2	Compliance
0.422630	40.7	9.000	L1	10.5	16.7	57.4	Compliance
0.528270	39.9	9.000	L1	10.3	16.1	56.0	Compliance
0.619536	36.4	9.000	L1	10.5	19.6	56.0	Compliance
0.858911	35.4	9.000	L1	10.5	20.6	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.207957	31.3	9.000	L1	10.8	21.9	53.3	Compliance
0.268355	32.4	9.000	L1	10.7	18.7	51.2	Compliance
0.312220	38.4	9.000	L1	10.7	11.5	49.9	Compliance
0.532496	29.5	9.000	L1	10.3	16.5	46.0	Compliance
0.576662	30.6	9.000	L1	10.4	15.4	46.0	Compliance
0.619536	30.7	9.000	L1	10.5	15.3	46.0	Compliance

AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.153629	51.0	9.000	N	10.3	14.8	65.8	Compliance
0.266226	41.9	9.000	N	11.2	19.4	61.2	Compliance
0.309742	40.9	9.000	N	11.1	19.1	60.0	Compliance
0.446873	35.5	9.000	N	10.6	21.4	56.9	Compliance
0.461346	21.0	9.000	N	10.5	35.6	56.7	Compliance
0.554139	36.3	9.000	N	10.3	19.7	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.198249	34.3	9.000	N	11.3	19.4	53.7	Compliance
0.219886	34.2	9.000	N	11.3	18.7	52.8	Compliance
0.266226	40.5	9.000	N	11.2	10.8	51.2	Compliance
0.309742	40.1	9.000	N	11.1	9.9	50.0	Compliance
0.576662	27.4	9.000	N	10.4	18.6	46.0	Compliance
0.619536	23.6	9.000	N	10.5	22.4	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to $U_{\text{cisp}}^{\text{r}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than $U_{\text{cisp}}^{\text{r}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}^{\text{r}})$, exceeds the disturbance limit;

- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}^{\text{r}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB

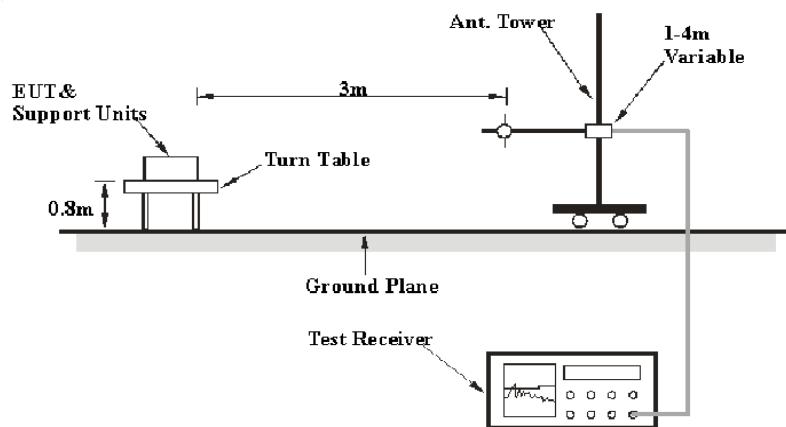
6G~18GHz: 5.23 dB

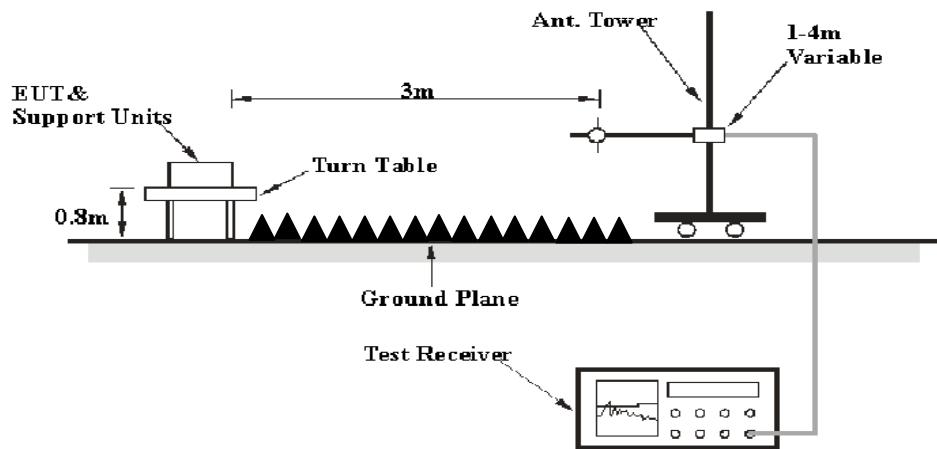
Table 1 – Values of $U_{\text{cisp}}^{\text{r}}$

Measurement	$U_{\text{cisp}}^{\text{r}}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:



Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Signal Generator	8648A	3426A00831	2013-11-06	2014-11-06
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Agilent	Signal Generator	E8247C	MY43321350	2012-10-15	2014-10-15
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

8.95 dB at 2852 MHz in the Vertical polarization of 8DPSKMode

Test Data

Environmental Conditions

Temperature:	26.9 °C
Relative Humidity:	52%
ATM Pressure:	100.1kPa

The testing was performed by Dean Liu on 2014-09-13.

*Test Mode: Transmitting
GFSK mode.*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	96.40	PK	H	25.65	4.42	27.32	99.15	N/A	N/A
2402	86.66	AV	H	25.65	4.42	27.32	89.41	N/A	N/A
2402	98.56	PK	V	25.65	4.42	27.32	101.31	N/A	N/A
2402	88.9	AV	V	25.65	4.42	27.32	91.65	N/A	N/A
2390	40.93	PK	V	25.61	4.39	27.32	43.61	74.00	30.39
2390	29.55	AV	V	25.61	4.39	27.32	32.23	54.00	21.77
4804	43.81	PK	V	30.59	5.98	27.41	52.97	74.00	21.03
4804	32.96	AV	V	30.59	5.98	27.41	42.12	54.00	11.88
7206	30.24	PK	V	34.09	7.45	25.91	45.87	74.00	28.13
7206	18.79	AV	V	34.09	7.45	25.91	34.42	54.00	19.58
9608	32.53	PK	V	35.96	8.80	27.55	49.74	74.00	24.26
9608	19.55	AV	V	35.96	8.80	27.55	36.76	54.00	17.24
2852	31.58	PK	V	26.82	5.99	27.55	36.84	46.00	9.16
2852	15.38	AV	V	26.82	5.99	27.55	20.64	54.00	33.36
472	32.90	QP	V	17.86	2.63	21.95	31.44	46.00	14.56
Middle Channel: 2441 MHz									
2441	95.01	PK	H	25.75	4.40	27.34	97.82	N/A	N/A
2441	85.13	AV	H	25.75	4.40	27.34	87.94	N/A	N/A
2441	98.39	PK	V	25.75	4.40	27.34	101.20	N/A	N/A
2441	88.49	AV	V	25.75	4.40	27.34	91.30	N/A	N/A
4882	43.41	PK	V	30.79	6.08	27.42	52.86	74.00	21.14
4882	29.22	AV	V	30.79	6.08	27.42	38.67	54.00	15.33
7323	31.23	PK	V	34.38	7.51	25.88	47.24	74.00	26.76
7323	18.72	AV	V	34.38	7.51	25.88	34.73	54.00	19.27
9764	32.11	PK	V	36.33	8.83	27.20	50.07	74.00	23.93
9764	19.63	AV	V	36.33	8.83	27.20	37.59	54.00	16.41
2852	31.44	PK	V	26.82	5.99	27.55	36.70	74.00	37.30
2852	15.27	AV	V	26.82	5.99	27.55	20.53	54.00	33.47
1704	31.44	PK	V	24.01	3.41	27.66	31.20	74.00	42.80
1704	14.21	AV	V	24.01	3.41	27.66	13.97	54.00	40.03
472	32.80	QP	V	17.86	2.63	21.95	31.34	46.00	14.66
High Channel: 2480 MHz									
2480	94.94	PK	H	25.85	4.48	27.36	97.91	N/A	N/A
2480	84.89	AV	H	25.85	4.48	27.36	87.86	N/A	N/A
2480	98.53	PK	V	25.85	4.48	27.36	101.50	N/A	N/A
2480	88.58	AV	V	25.85	4.48	27.36	91.55	N/A	N/A
2483.5	43.09	PK	V	25.86	4.49	27.36	46.08	74.00	27.92
2483.5	29.59	AV	V	25.86	4.49	27.36	32.58	54.00	21.42
4960	42.04	PK	V	31.00	5.90	27.43	51.51	74.00	22.49
4960	26.7	AV	V	31.00	5.90	27.43	36.17	54.00	17.83
7440	31.43	PK	V	34.66	7.58	25.97	47.70	74.00	26.30
7440	18.62	AV	V	34.66	7.58	25.97	34.89	54.00	19.11
9920	31.62	PK	V	36.71	8.87	26.66	50.54	74.00	23.46
9920	19.25	AV	V	36.71	8.87	26.66	38.17	54.00	15.83
2852	30.48	PK	V	26.82	5.99	27.55	35.74	46.00	10.26
2852	15.27	AV	V	26.82	5.99	27.55	20.53	54.00	33.47
472	32.58	QP	V	17.86	2.63	21.95	31.12	46.00	14.88

$\pi/4$ -DQPSK mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	94.85	PK	H	25.65	4.42	27.32	97.60	N/A	N/A
2402	84.53	AV	H	25.65	4.42	27.32	87.28	N/A	N/A
2402	96.86	PK	V	25.65	4.42	27.32	99.61	N/A	N/A
2402	86.05	AV	V	25.65	4.42	27.32	88.80	N/A	N/A
2390	40.71	PK	V	25.61	4.39	27.32	43.39	74.00	30.61
2390	29.10	AV	V	25.61	4.39	27.32	31.78	54.00	22.22
4804	38.90	PK	V	30.59	5.98	27.41	48.06	74.00	25.94
4804	25.57	AV	V	30.59	5.98	27.41	34.73	54.00	19.27
7206	30.29	PK	V	34.09	7.45	25.91	45.92	74.00	28.08
7206	18.88	AV	V	34.09	7.45	25.91	34.51	54.00	19.49
9608	32.68	PK	V	35.96	8.80	27.55	49.89	74.00	24.11
9608	19.69	AV	V	35.96	8.80	27.55	36.90	54.00	17.10
2852	31.73	PK	V	26.82	5.99	27.55	36.99	74.00	37.01
2852	15.47	AV	V	26.82	5.99	27.55	20.73	54.00	33.27
472	32.62	QP	V	17.86	2.63	21.95	31.16	46.00	14.84
Middle Channel: 2441 MHz									
2441	92.82	PK	H	25.75	4.40	27.34	95.63	N/A	N/A
2441	83.05	AV	H	25.75	4.40	27.34	85.86	N/A	N/A
2441	96.36	PK	V	25.75	4.40	27.34	99.17	N/A	N/A
2441	86.30	AV	V	25.75	4.40	27.34	89.11	N/A	N/A
4882	36.39	PK	V	30.79	6.08	27.42	45.84	74.00	28.16
4882	22.21	AV	V	30.79	6.08	27.42	31.66	54.00	22.34
7323	31.08	PK	V	34.38	7.51	25.88	47.09	74.00	26.91
7323	18.53	AV	V	34.38	7.51	25.88	34.54	54.00	19.46
9764	31.97	PK	V	36.33	8.83	27.20	49.93	74.00	24.07
9764	19.45	AV	V	36.33	8.83	27.20	37.41	54.00	16.59
2852	31.25	PK	V	26.82	5.99	27.55	36.51	74.00	37.49
2852	15.24	AV	V	26.82	5.99	27.55	20.50	54.00	33.50
1704	31.41	PK	V	24.01	3.41	27.66	31.17	74.00	42.83
1704	14.19	AV	V	24.01	3.41	27.66	13.95	54.00	40.05
472	32.50	QP	V	17.86	2.63	21.95	31.04	46.00	14.96
High Channel: 2480 MHz									
2480	93.22	PK	H	25.85	4.48	27.36	96.19	N/A	N/A
2480	84.07	AV	H	25.85	4.48	27.36	87.04	N/A	N/A
2480	96.08	PK	V	25.85	4.48	27.36	99.05	N/A	N/A
2480	84.83	AV	V	25.85	4.48	27.36	87.80	N/A	N/A
2483.5	46.58	PK	V	25.86	4.49	27.36	49.57	74.00	24.43
2483.5	30.83	AV	V	25.86	4.49	27.36	33.82	54.00	20.18
4960	38.89	PK	V	31.00	5.90	27.43	48.36	74.00	25.64
4960	25.48	AV	V	31.00	5.90	27.43	34.95	54.00	19.05
7440	30.21	PK	V	34.66	7.58	25.97	46.48	74.00	27.52
7440	18.84	AV	V	34.66	7.58	25.97	35.11	54.00	18.89
9920	32.65	PK	V	36.71	8.87	26.66	51.57	74.00	22.43
9920	19.67	AV	V	36.71	8.87	26.66	38.59	54.00	15.41
2852	31.66	PK	V	26.82	5.99	27.55	36.92	46.00	9.08
2852	15.42	AV	V	26.82	5.99	27.55	20.68	54.00	33.32
472	32.70	QP	V	17.86	2.63	21.95	31.24	46.00	14.76

8DPSK mode :

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	94.88	PK	H	25.65	4.42	27.32	97.63	N/A	N/A
2402	83.44	AV	H	25.65	4.42	27.32	86.19	N/A	N/A
2402	97.46	PK	V	25.65	4.42	27.32	100.21	N/A	N/A
2402	86.04	AV	V	25.65	4.42	27.32	88.79	N/A	N/A
2390	40.74	PK	V	25.61	4.39	27.32	43.42	74.00	30.58
2390	29.08	AV	V	25.61	4.39	27.32	31.76	54.00	22.24
4804	38.92	PK	V	30.59	5.98	27.41	48.08	74.00	25.92
4804	26.18	AV	V	30.59	5.98	27.41	35.34	54.00	18.66
7206	31.42	PK	V	34.09	7.45	25.91	47.05	74.00	26.95
7206	18.54	AV	V	34.09	7.45	25.91	34.17	54.00	19.83
9608	32.67	PK	V	35.96	8.80	27.55	49.88	74.00	24.12
9608	19.21	AV	V	35.96	8.80	27.55	36.42	54.00	17.58
2852	31.64	PK	V	26.82	5.99	27.55	36.90	46.00	9.10
2852	15.49	AV	V	26.82	5.99	27.55	20.75	54.00	33.25
472	32.30	QP	V	17.86	2.63	21.95	30.84	46.00	15.16
Middle Channel: 2441 MHz									
2441	92.92	PK	H	25.75	4.40	27.34	95.73	N/A	N/A
2441	83.09	AV	H	25.75	4.40	27.34	85.90	N/A	N/A
2441	97.04	PK	V	25.75	4.40	27.34	99.85	N/A	N/A
2441	87.03	AV	V	25.75	4.40	27.34	89.84	N/A	N/A
4882	36.41	PK	V	30.79	6.08	27.42	45.86	74.00	28.14
4882	22.3	AV	V	30.79	6.08	27.42	31.75	54.00	22.25
7323	31.1	PK	V	34.38	7.51	25.88	47.11	74.00	26.89
7323	18.24	AV	V	34.38	7.51	25.88	34.25	54.00	19.75
9764	29.73	PK	V	36.33	8.83	27.20	47.69	74.00	26.31
9764	18.53	AV	V	36.33	8.83	27.20	36.49	54.00	17.51
2852	31.57	PK	V	26.82	5.99	27.55	36.83	74.00	37.17
2852	15.32	AV	V	26.82	5.99	27.55	20.58	54.00	33.42
1704	31.57	PK	V	24.01	3.41	27.66	31.33	74.00	42.67
1704	14.24	AV	V	24.01	3.41	27.66	14.00	54.00	40.00
472	32.47	QP	V	17.86	2.63	21.95	31.01	46.00	14.99
High Channel: 2480 MHz									
2480	93.23	PK	H	25.85	4.48	27.36	96.20	N/A	N/A
2480	84.13	AV	H	25.85	4.48	27.36	87.10	N/A	N/A
2480	96.13	PK	V	25.85	4.48	27.36	99.10	N/A	N/A
2480	84.87	AV	V	25.85	4.48	27.36	87.84	N/A	N/A
2483.5	46.68	PK	V	25.86	4.49	27.36	49.67	74.00	24.33
2483.5	30.86	AV	V	25.86	4.49	27.36	33.85	54.00	20.15
4960	38.05	PK	V	31.00	5.90	27.43	47.52	74.00	26.48
4960	21.57	AV	V	31.00	5.90	27.43	31.04	54.00	22.96
7440	31.56	PK	V	34.66	7.58	25.97	47.83	74.00	26.17
7440	18.39	AV	V	34.66	7.58	25.97	34.66	54.00	19.34
9920	32.74	PK	V	36.71	8.87	26.66	51.66	74.00	22.34
9920	19.41	AV	V	36.71	8.87	26.66	38.33	54.00	15.67
2852	31.79	PK	V	26.82	5.99	27.55	37.05	46.00	8.95
2852	15.64	AV	V	26.82	5.99	27.55	20.90	54.00	33.10
472	32.55	QP	V	17.86	2.63	21.95	31.09	46.00	14.91

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	29.1 °C
Relative Humidity:	62%
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2014-09-13.

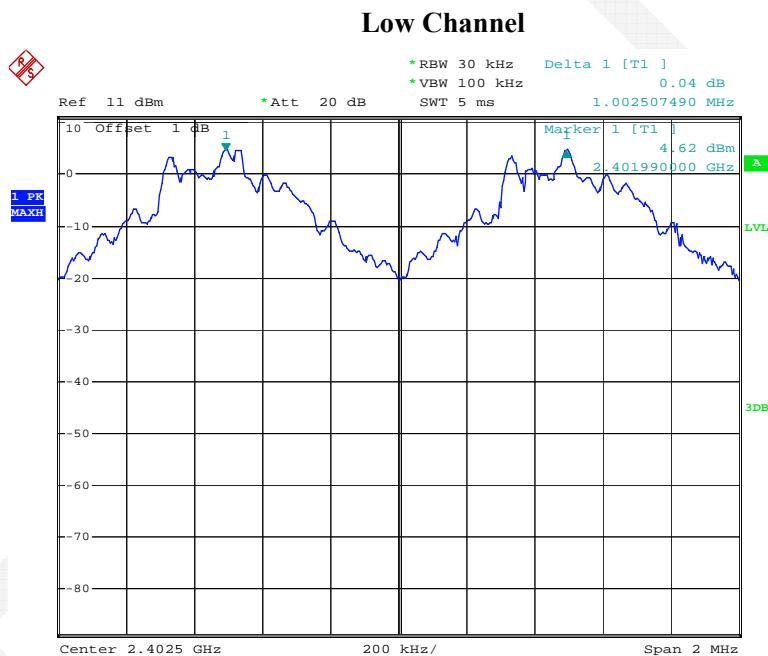
Test Result: Compliance.

Please refer to following tables and plots

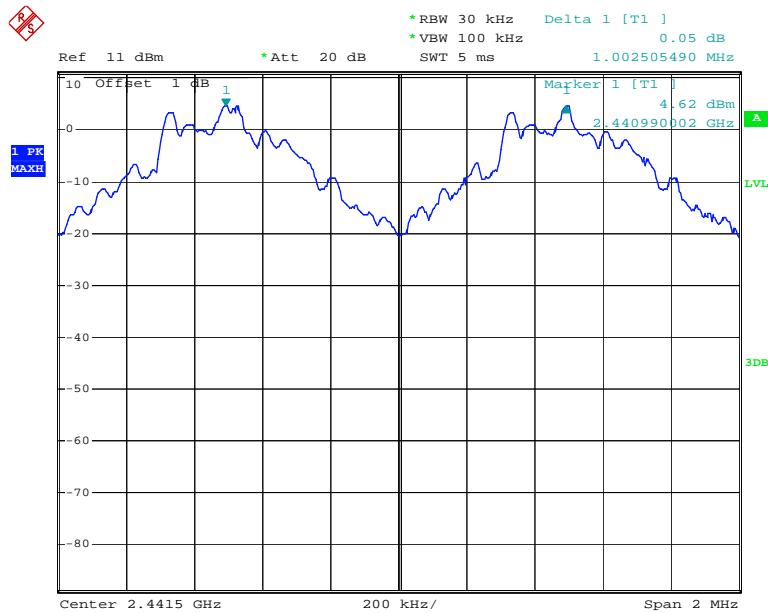
Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR Mode (GFSK)	Low	2402	1.003	0.609	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.609	Pass
	Adjacent	2442			
	High	2480	1.002	0.609	Pass
	Adjacent	2479			

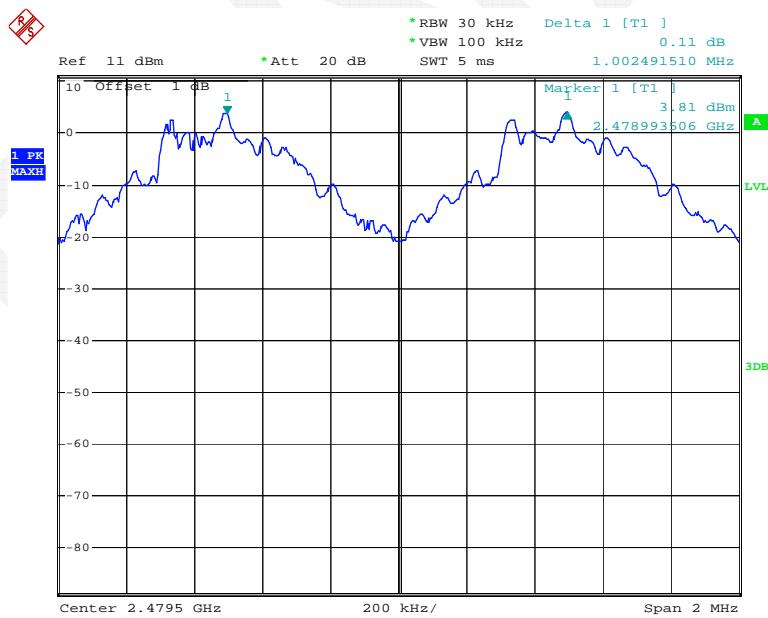
BDR Mode (GFSK):



Date: 13.SEP.2014 14:43:54

Middle Channel

Date: 13.SEP.2014 14:46:03

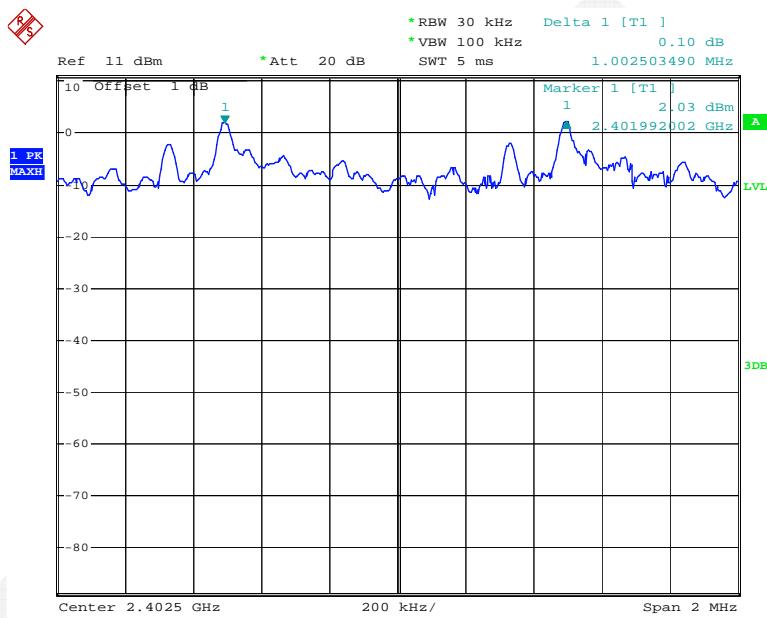
High Channel

Date: 13.SEP.2014 14:48:25

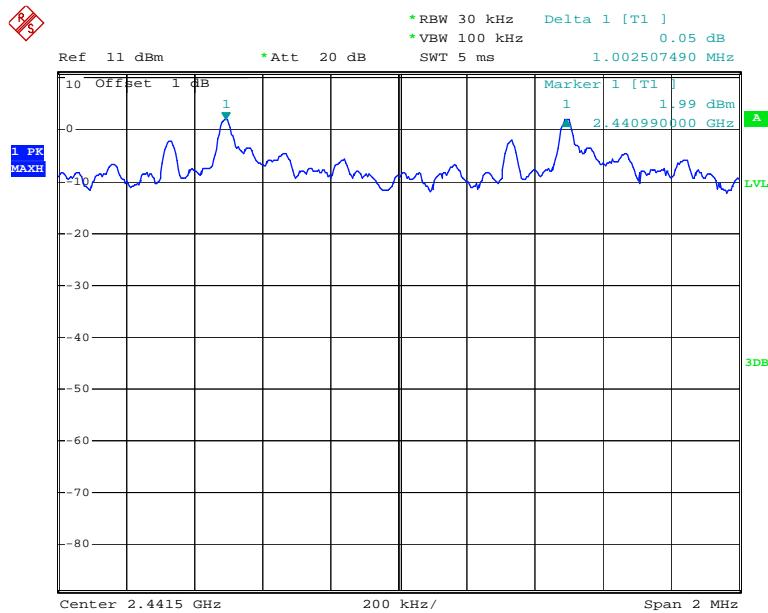
Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
EDR ($\pi/4$ -DQPSK)	Low	2402	1.003	0.803	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.803	Pass
	Adjacent	2442			
	High	2480	1.000	0.803	Pass
	Adjacent	2479			

EDR Mode ($\pi/4$ -DQPSK):

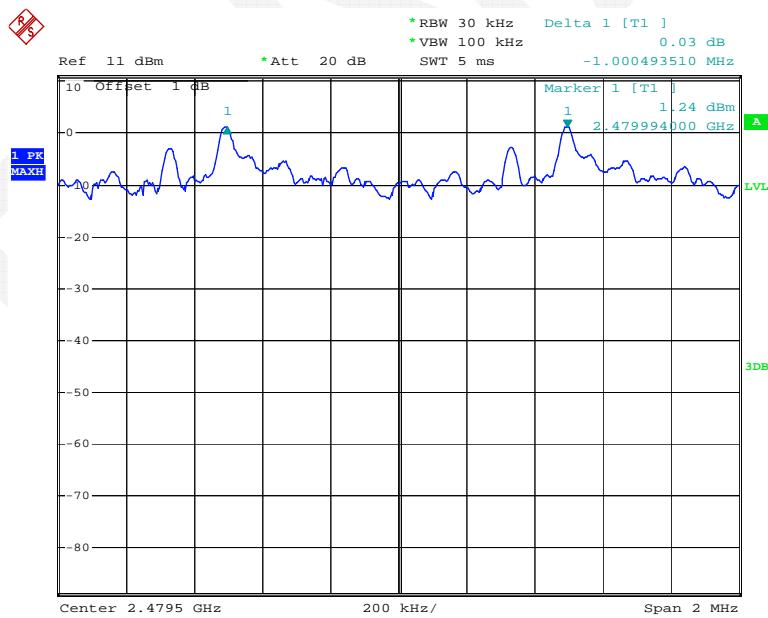
Low Channel



Date: 13.SEP.2014 14:57:37

Middle Channel

Date: 13.SEP.2014 14:54:17

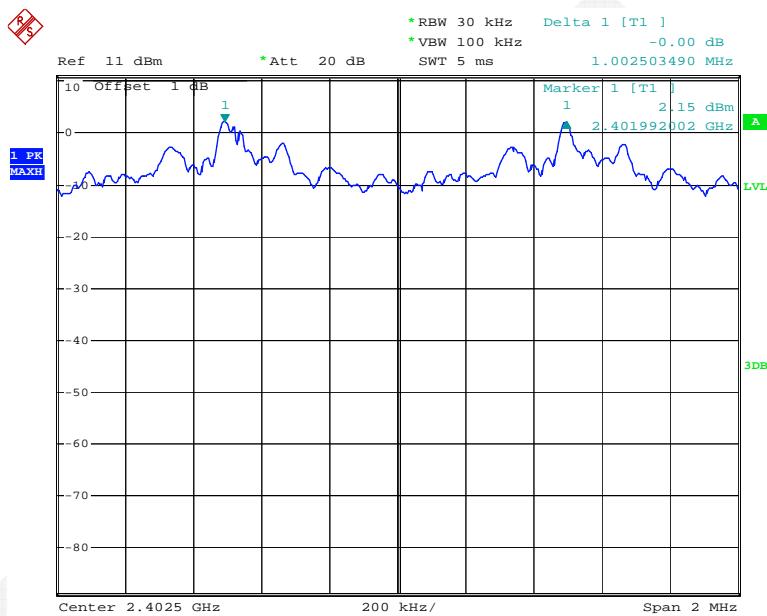
High Channel

Date: 13.SEP.2014 14:51:08

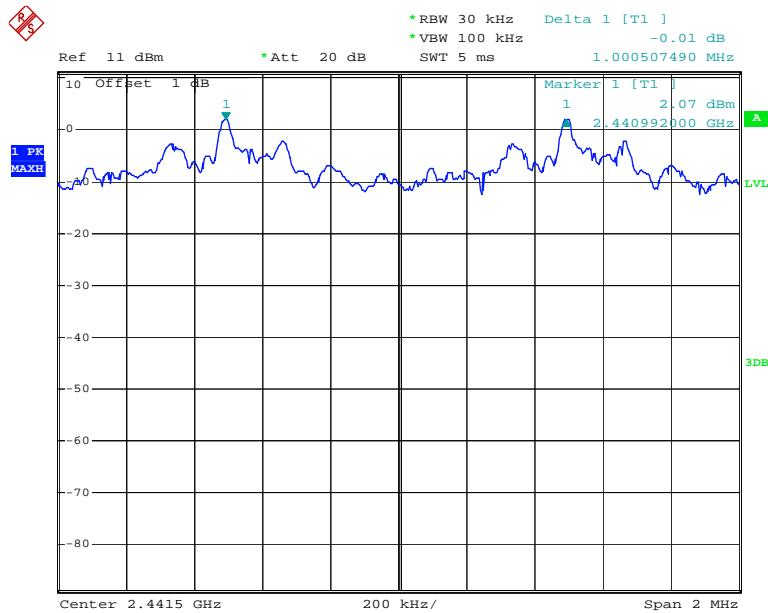
Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
EDR (8DPSK)	Low	2402	1.003	0.809	Pass
	Adjacent	2403			
	Middle	2441	1.001	0.809	Pass
	Adjacent	2442			
	High	2480	1.002	0.809	Pass
	Adjacent	2479			

EDR Mode (8DPSK):

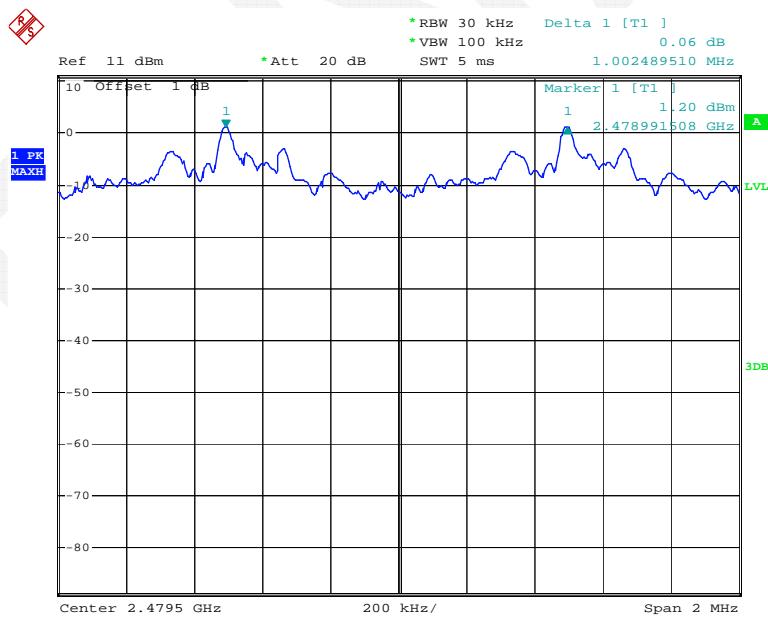
Low Channel



Date: 13.SEP.2014 15:00:57

Middle Channel

Date: 13.SEP.2014 15:03:22

High Channel

Date: 13.SEP.2014 15:06:37

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.1 °C
Relative Humidity:	62%
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2014-09-13.

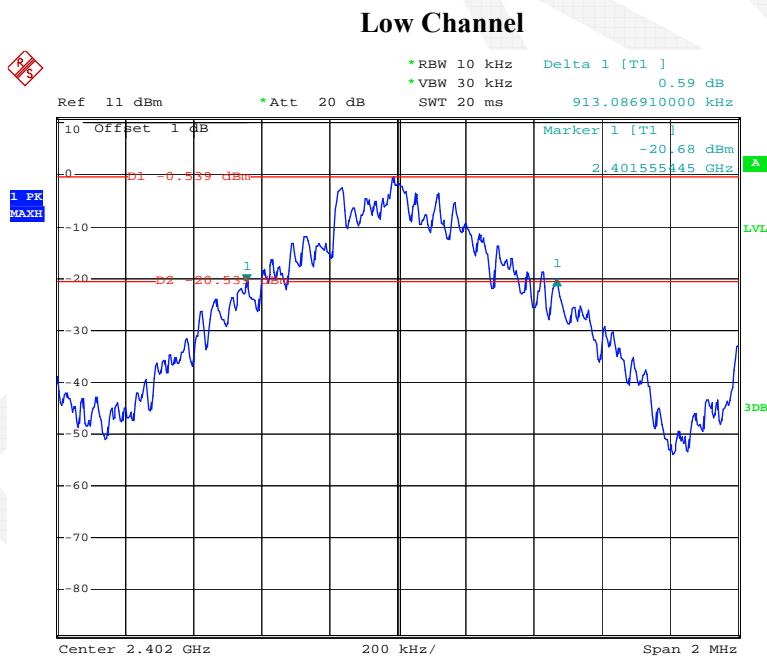
Test Result: Compliant.

Please refer to following tables and plots

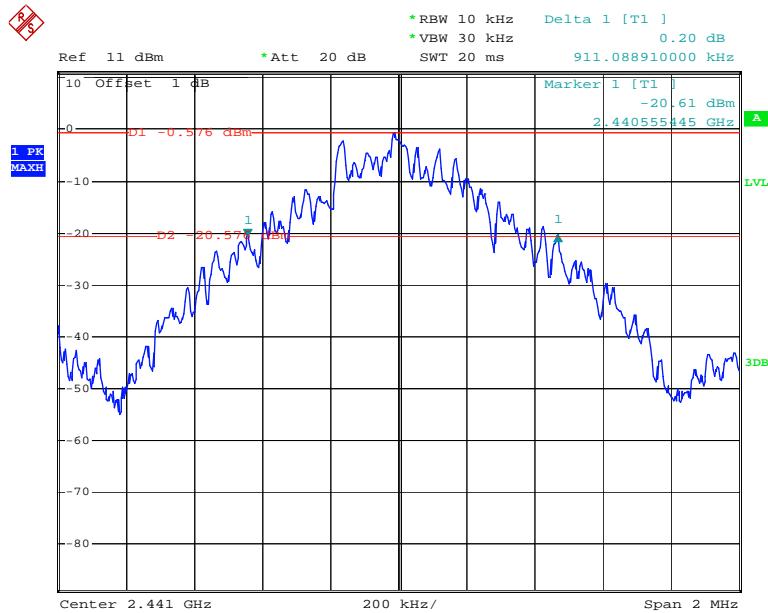
Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.913
	Middle	2441	0.911
	High	2480	0.875
EDR ($\pi/4$ -DQPSK)	Low	2402	1.197
	Middle	2441	1.205
	High	2480	1.203
EDR (8DPSK)	Low	2402	1.191
	Middle	2441	1.211
	High	2480	1.213

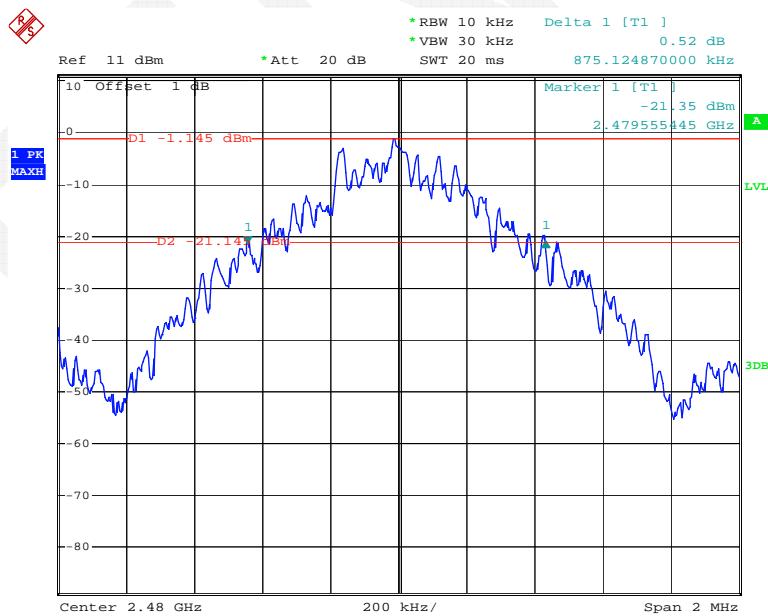
BDR Mode (GFSK):



Date: 13.SEP.2014 14:43:17

Middle Channel

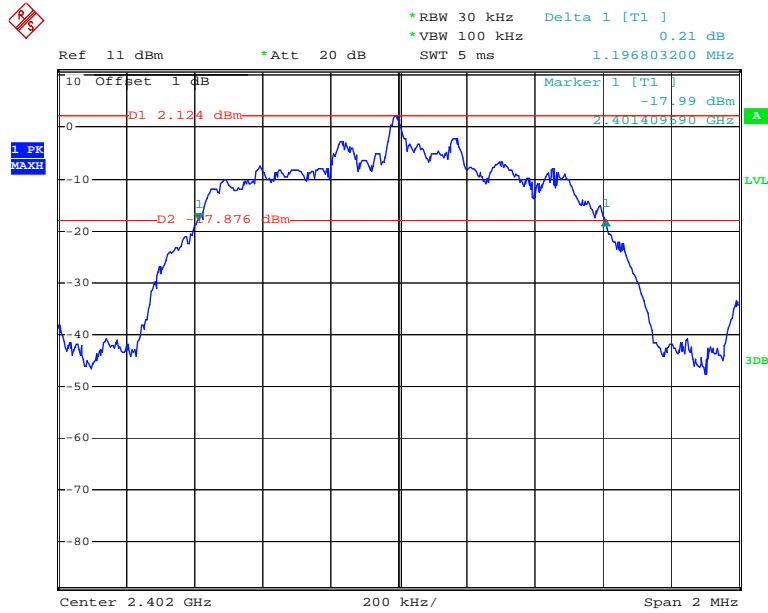
Date: 13.SEP.2014 14:45:28

High Channel

Date: 13.SEP.2014 14:47:45

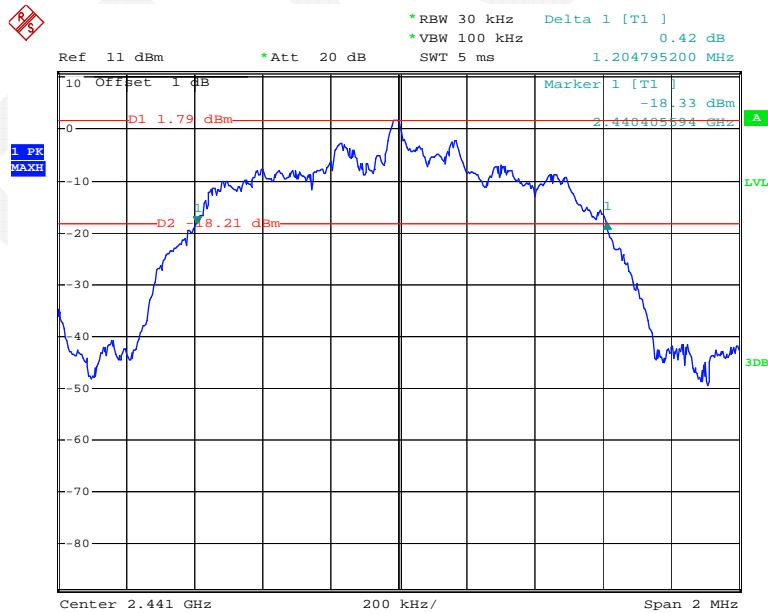
EDR Mode (π/4-DQPSK):

Low Channel

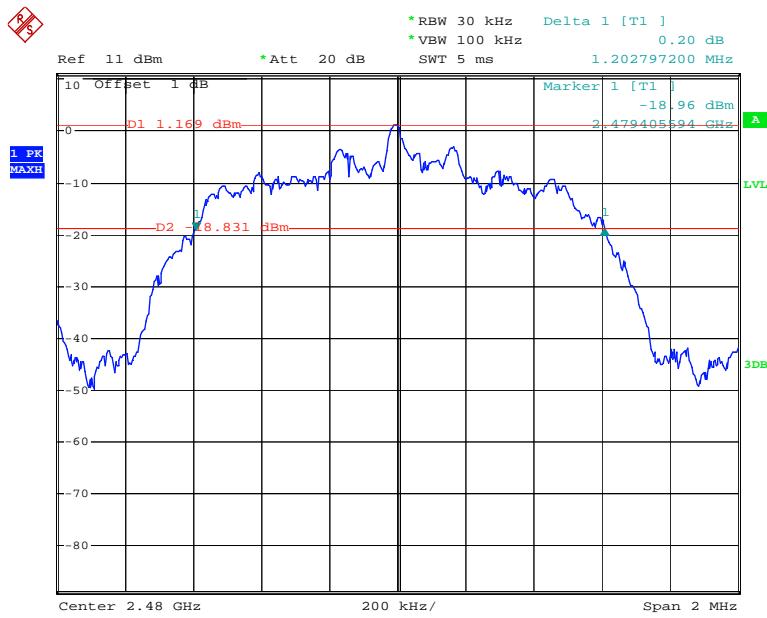


Date: 13.SEP.2014 15:00:02

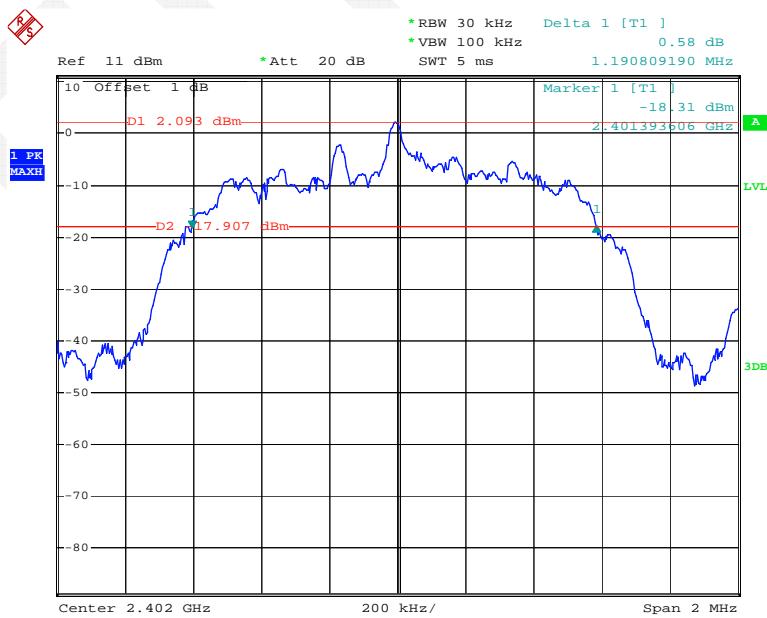
Middle Channel



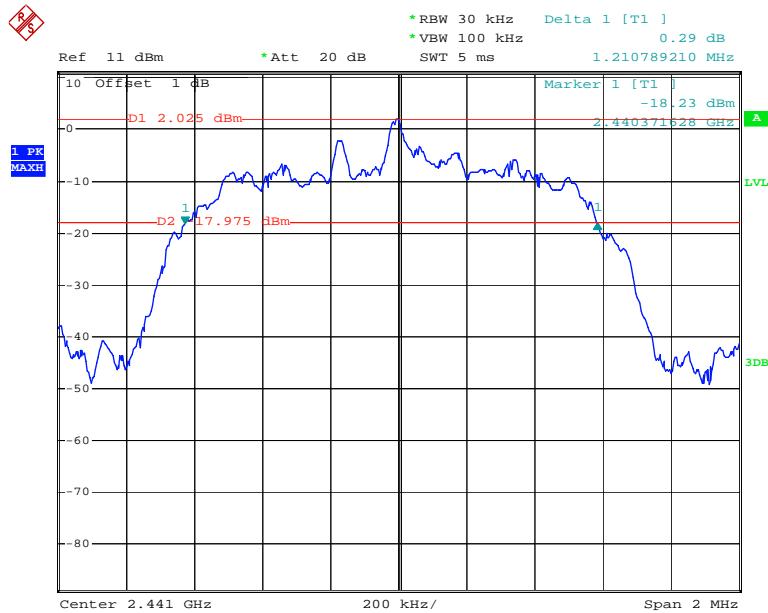
Date: 13.SEP.2014 15:02:49

High Channel

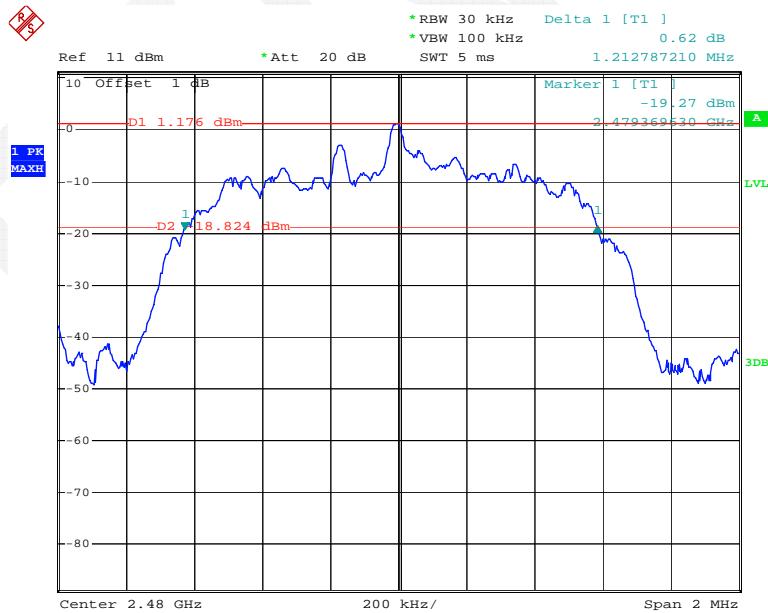
Date: 13.SEP.2014 15:05:28

*EDR Mode (8DPSK):***Low Channel**

Date: 13.SEP.2014 14:56:58

Middle Channel

Date: 13.SEP.2014 14:53:39

High Channel

Date: 13.SEP.2014 14:50:17

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.1 °C
Relative Humidity:	62%
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2014-09-13.

Test Result: Compliant.

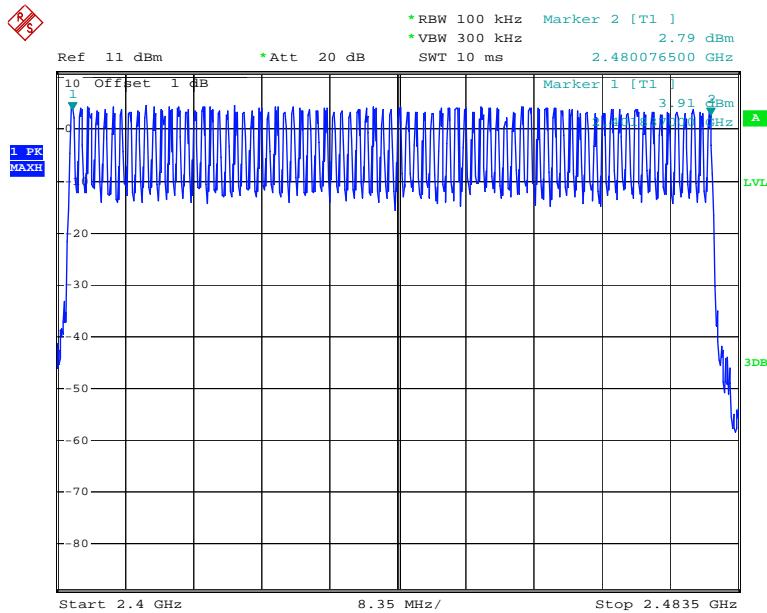
Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

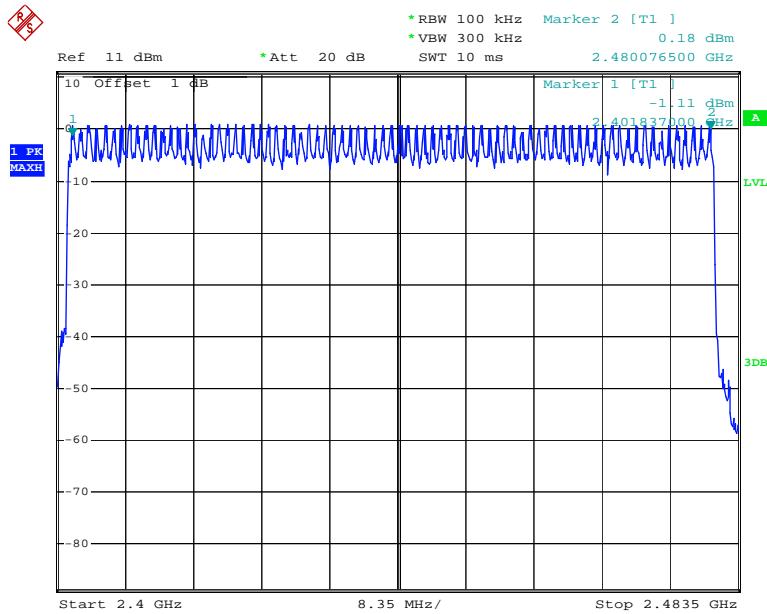


Date: 13.SEP.2014 15:25:23

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

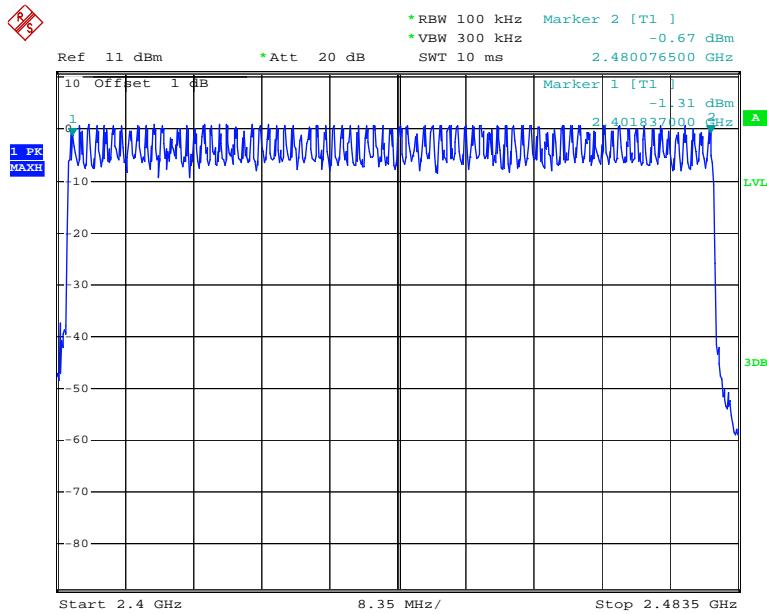


Date: 13.SEP.2014 15:29:39

EDR Mode (8DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels



Date: 13.SEP.2014 15:32:58

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	29.1 °C
Relative Humidity:	62%
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2014-09-13.

Test Result: Compliant.

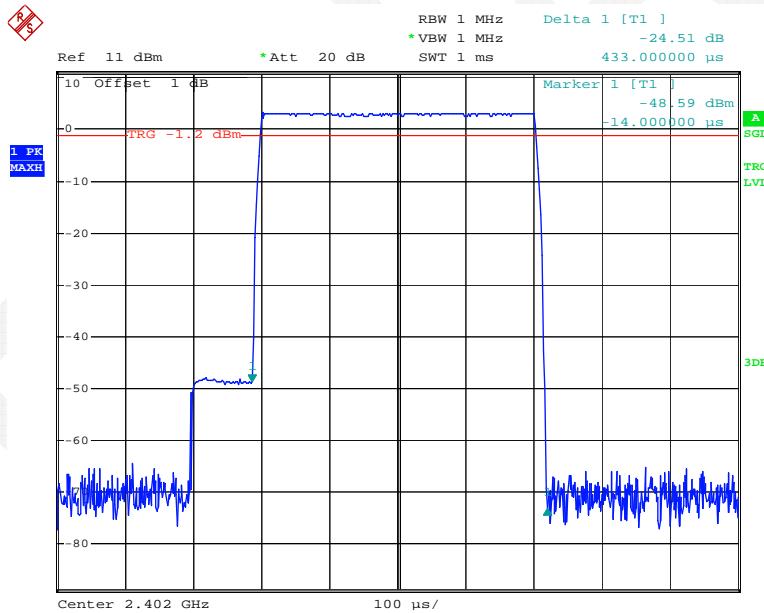
Please refer to following tables and plots

Test Mode: Transmitting

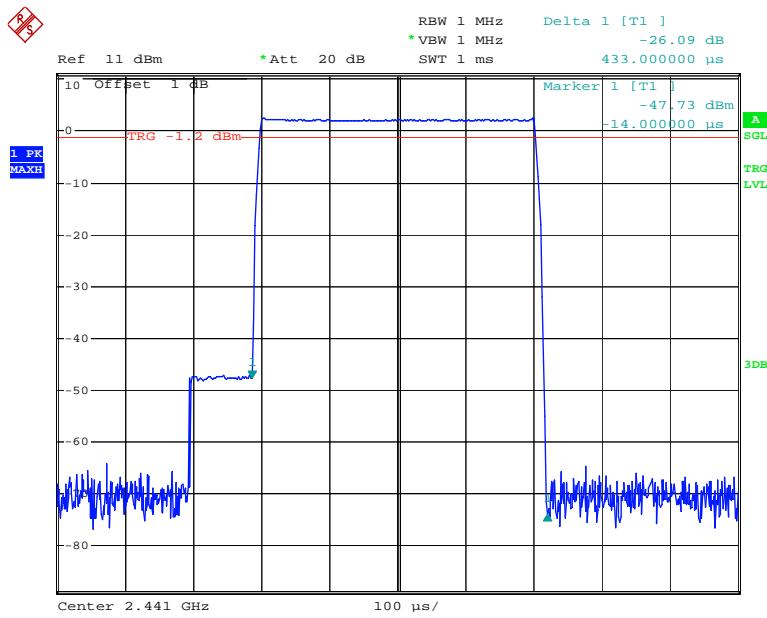
BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.433	0.139	0.4	Pass
	Middle	0.433	0.139	0.4	Pass
	High	0.433	0.139	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
DH3	Low	1.698	0.272	0.4	Pass
	Middle	1.698	0.272	0.4	Pass
	High	1.698	0.272	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
DH5	Low	2.946	0.314	0.4	Pass
	Middle	2.946	0.314	0.4	Pass
	High	2.946	0.314	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				

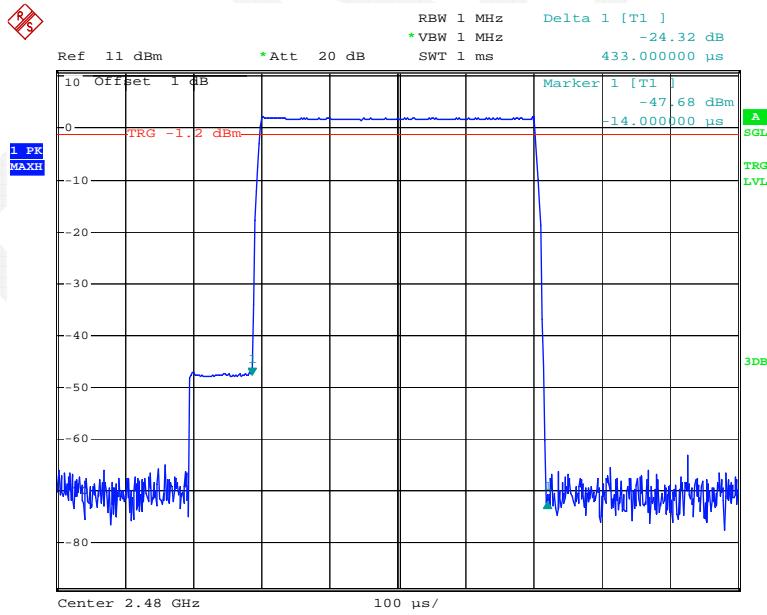
DH1: Low Channel



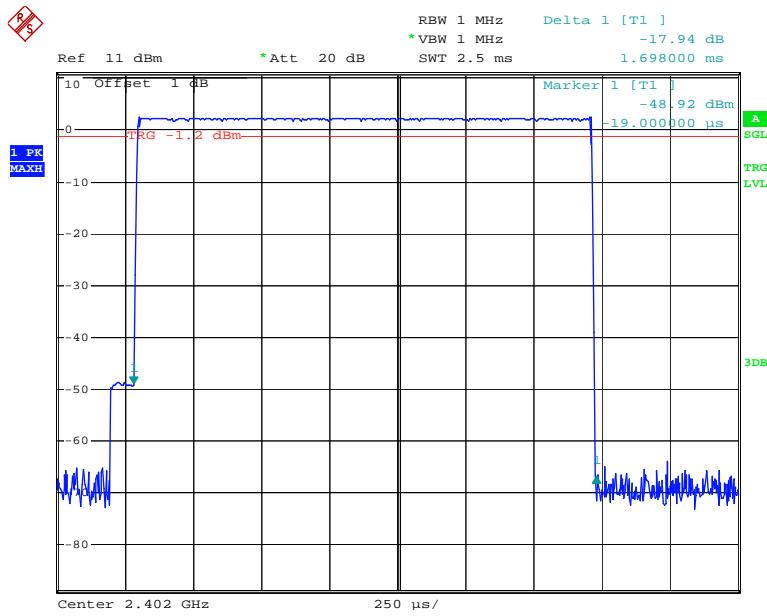
Date: 13.SEP.2014 15:35:08

DH1: Middle Channel

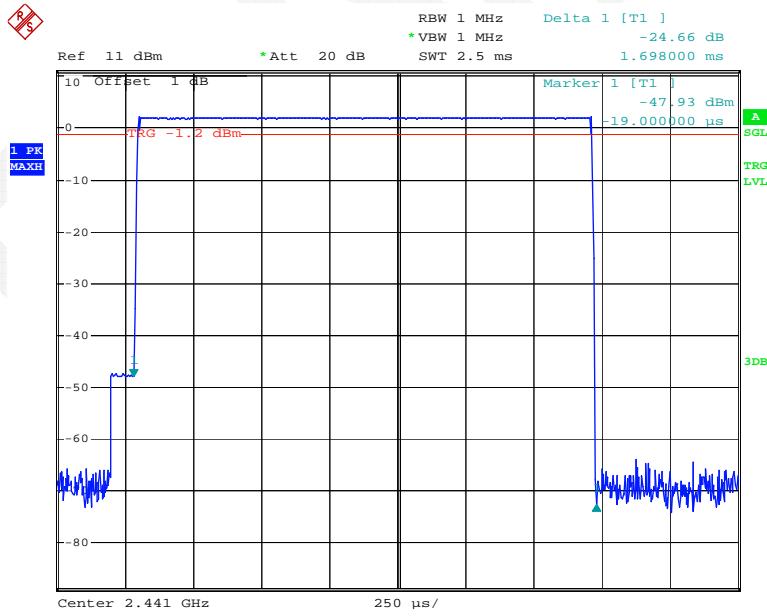
Date: 13.SEP.2014 15:35:19

DH1: High Channel

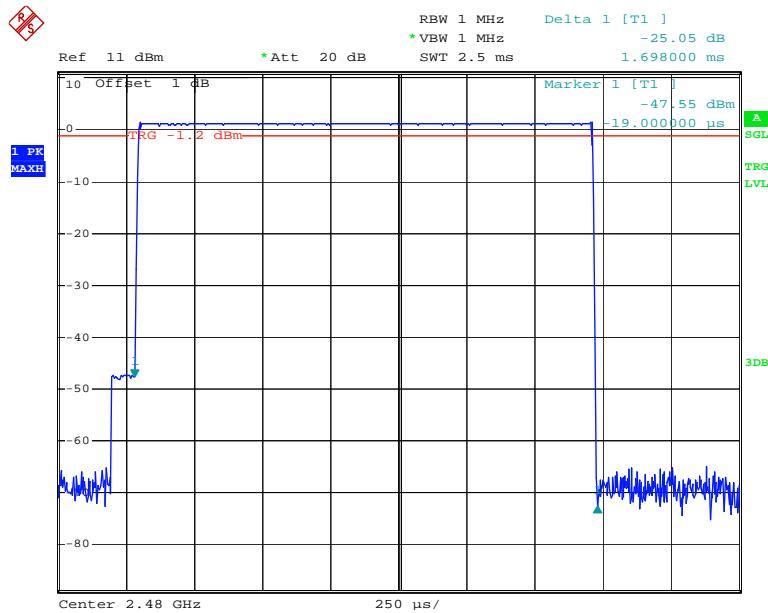
Date: 13.SEP.2014 15:35:27

DH3: Low Channel

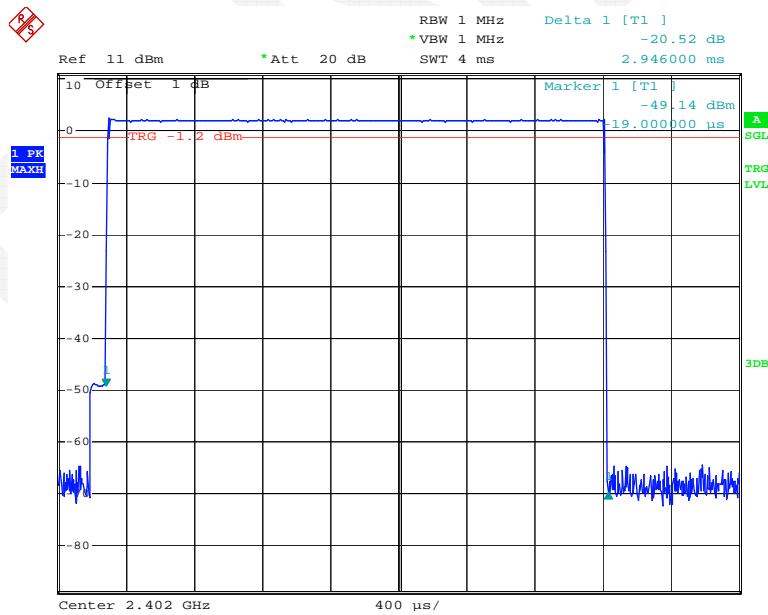
Date: 13.SEP.2014 15:39:24

DH3: Middle Channel

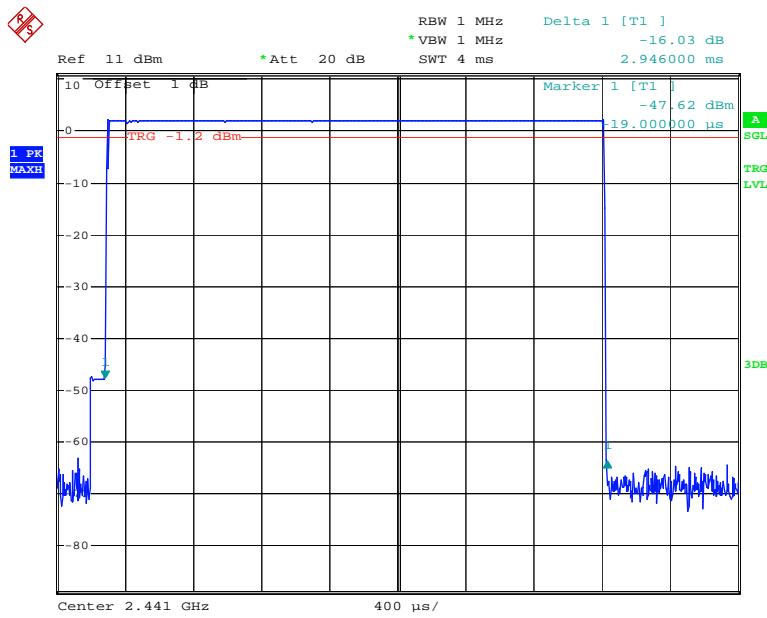
Date: 13.SEP.2014 15:39:15

DH3: High Channel

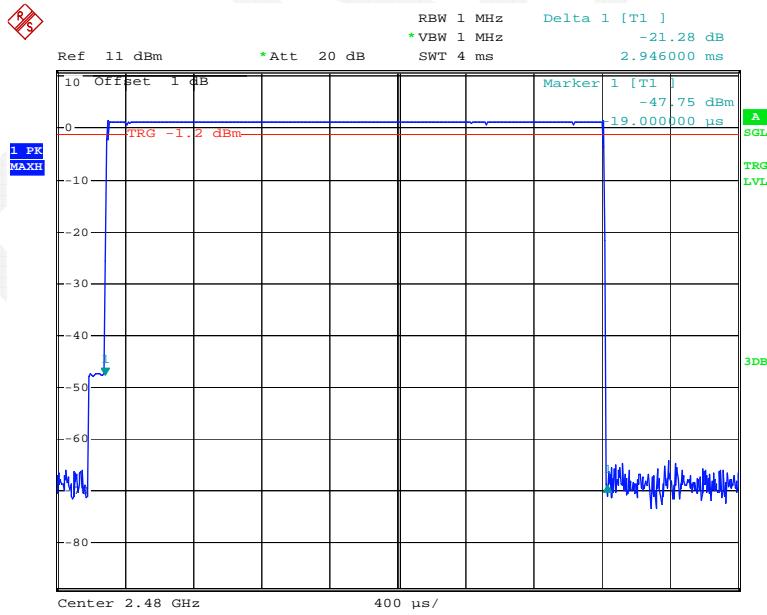
Date: 13.SEP.2014 15:39:09

DH5: Low Channel

Date: 13.SEP.2014 15:41:13

DH5: Middle Channel

Date: 13.SEP.2014 15:41:19

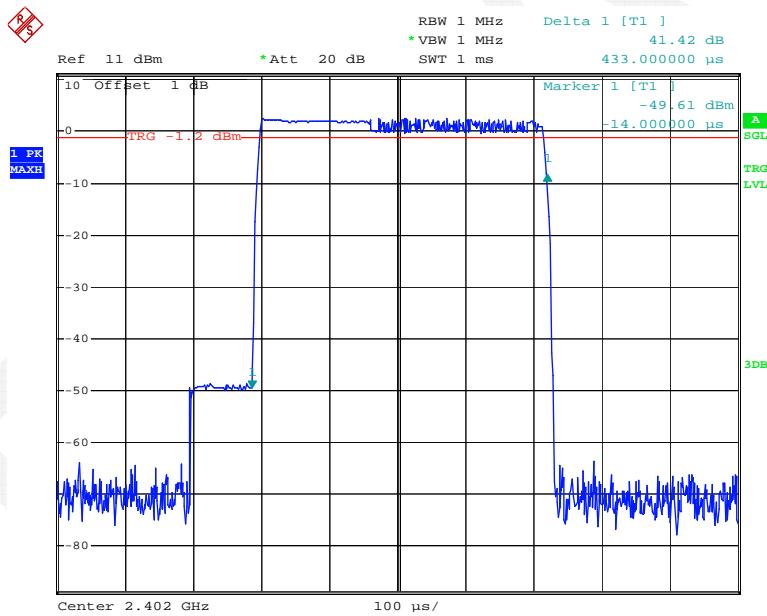
DH5: High Channel

Date: 13.SEP.2014 15:41:25

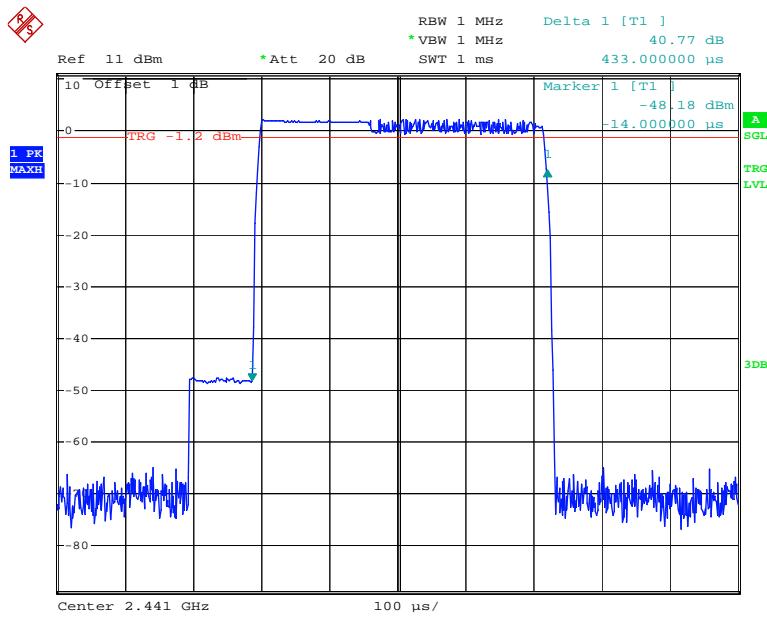
EDR Mode ($\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.433	0.139	0.4	Pass
	Middle	0.433	0.139	0.4	Pass
	High	0.433	0.139	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s				
DH3	Low	1.698	0.272	0.4	Pass
	Middle	1.698	0.272	0.4	Pass
	High	1.698	0.272	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s				
DH5	Low	2.946	0.314	0.4	Pass
	Middle	2.946	0.314	0.4	Pass
	High	2.946	0.314	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s				

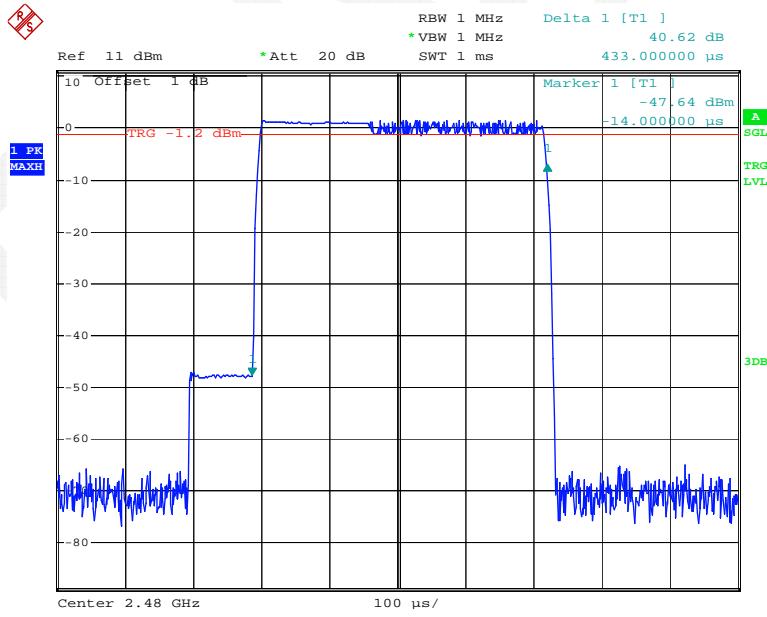
DH1: Low Channel



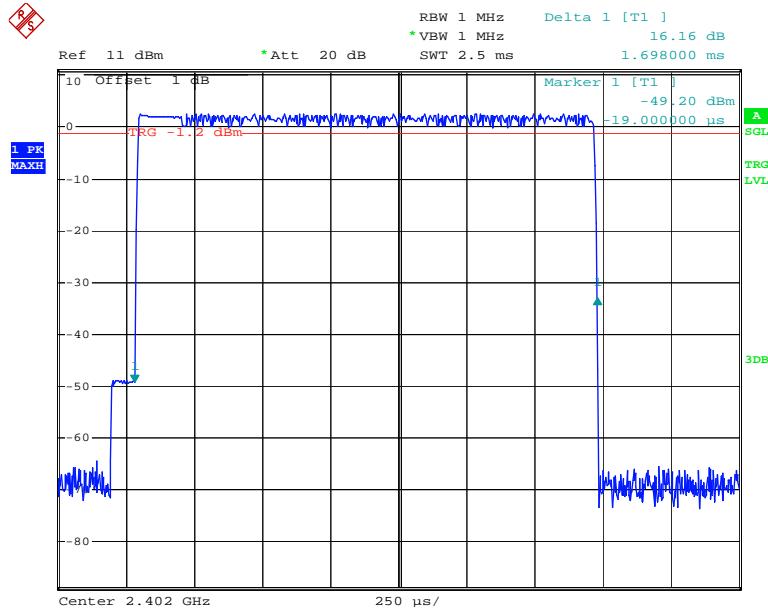
Date: 13.SEP.2014 15:36:35

DH1: Middle Channel

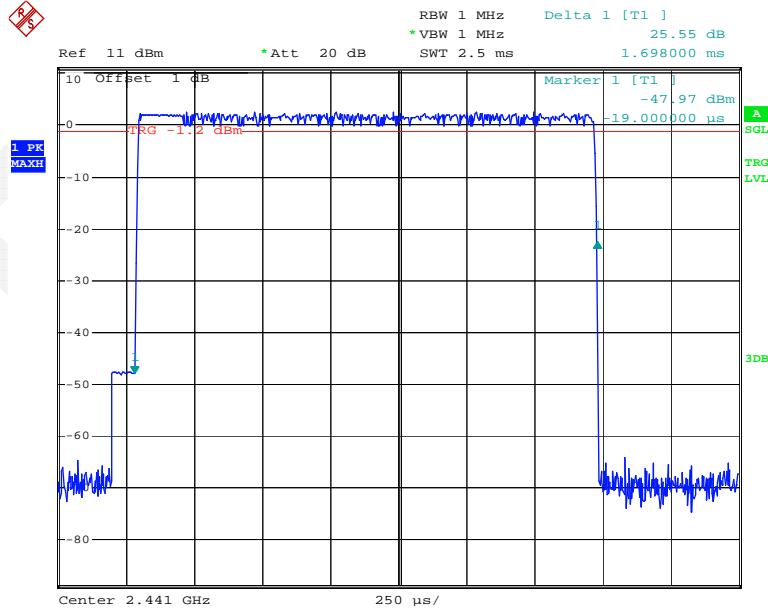
Date: 13.SEP.2014 15:36:29

DH1: High Channel

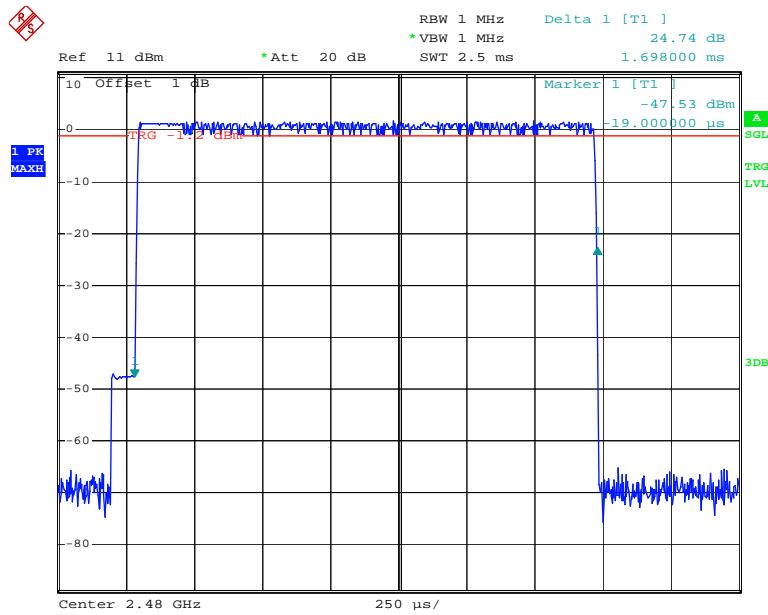
Date: 13.SEP.2014 15:36:23

DH3: Low Channel

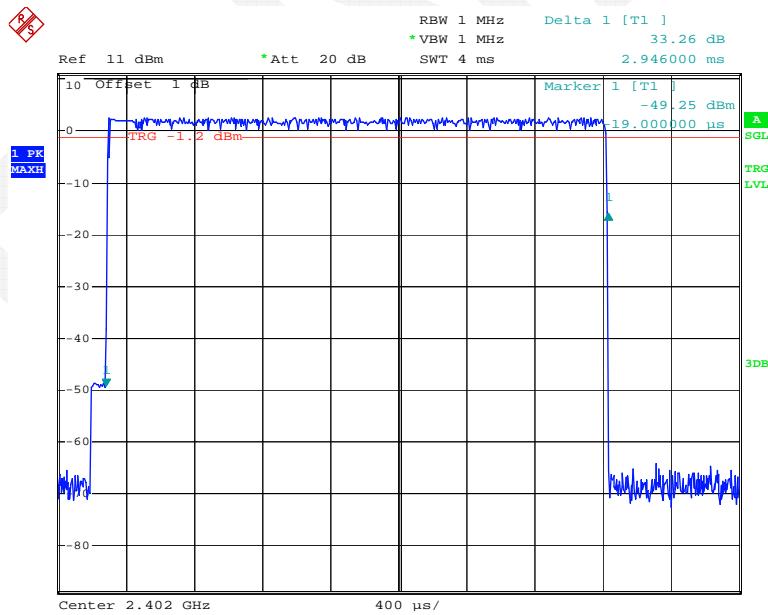
Date: 13.SEP.2014 15:39:49

DH3: Middle Channel

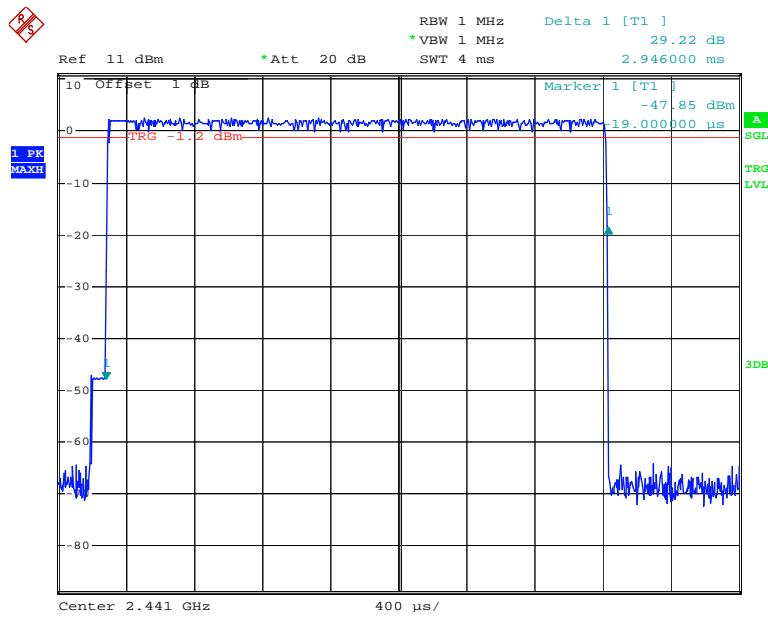
Date: 13.SEP.2014 15:39:54

DH3: High Channel

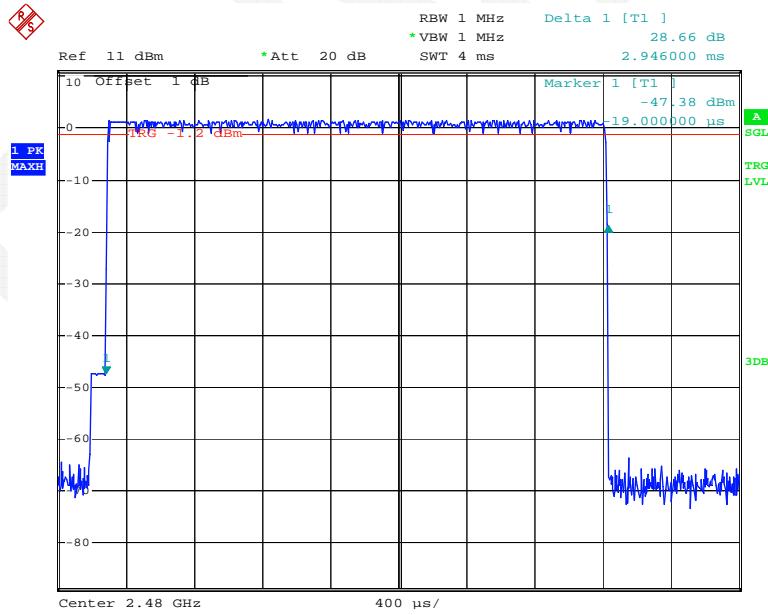
Date: 13.SEP.2014 15:40:01

DH5: Low Channel

Date: 13.SEP.2014 15:41:58

DH5: Middle Channel

Date: 13.SEP.2014 15:41:52

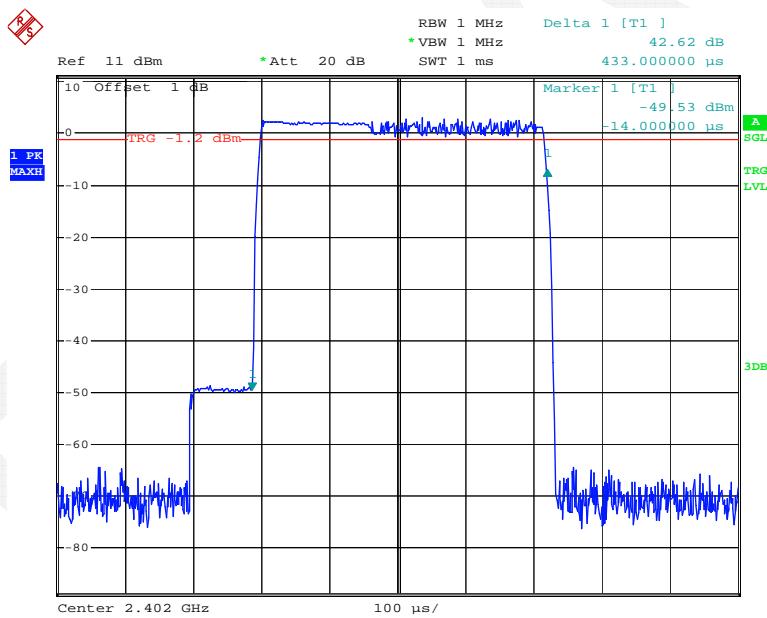
DH5: High Channel

Date: 13.SEP.2014 15:41:46

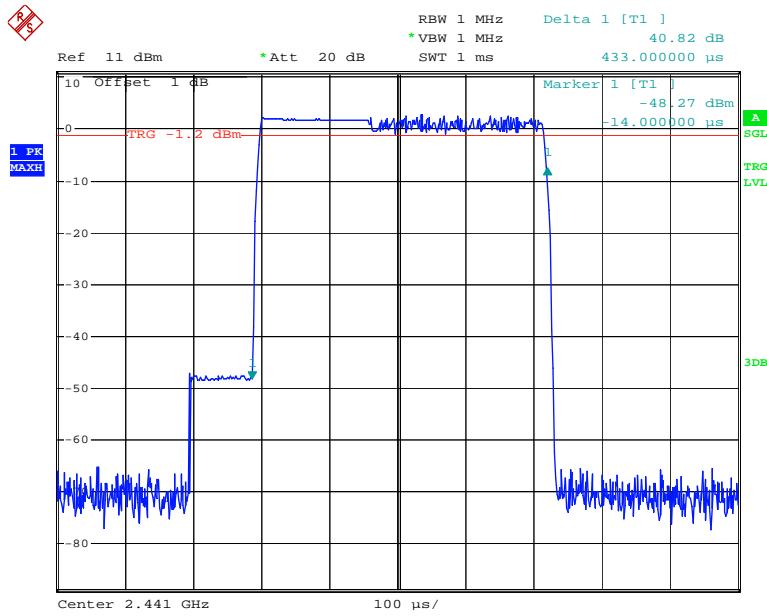
EDR Mode (8DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.433	0.139	0.4	Pass
	Middle	0.433	0.139	0.4	Pass
	High	0.433	0.139	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
DH3	Low	1.698	0.272	0.4	Pass
	Middle	1.698	0.272	0.4	Pass
	High	1.698	0.272	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
DH5	Low	2.946	0.314	0.4	Pass
	Middle	2.946	0.314	0.4	Pass
	High	2.946	0.314	0.4	Pass
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				

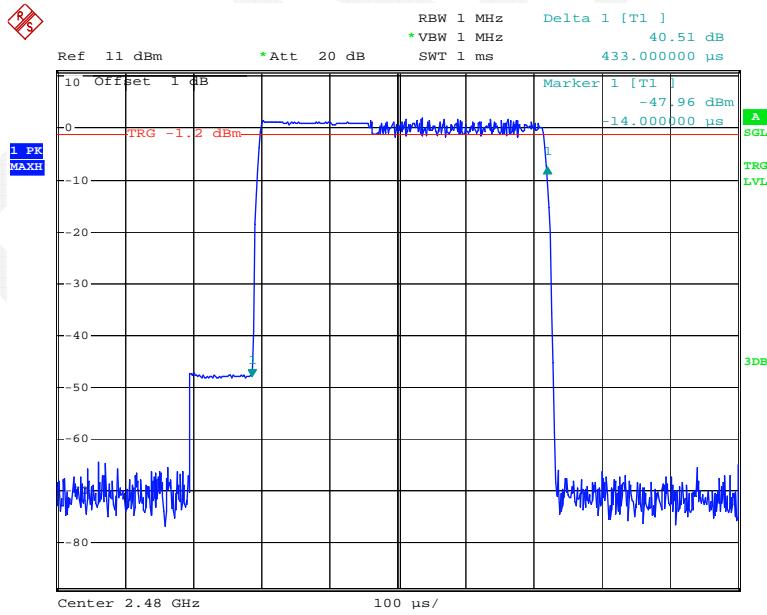
DH1: Low Channel



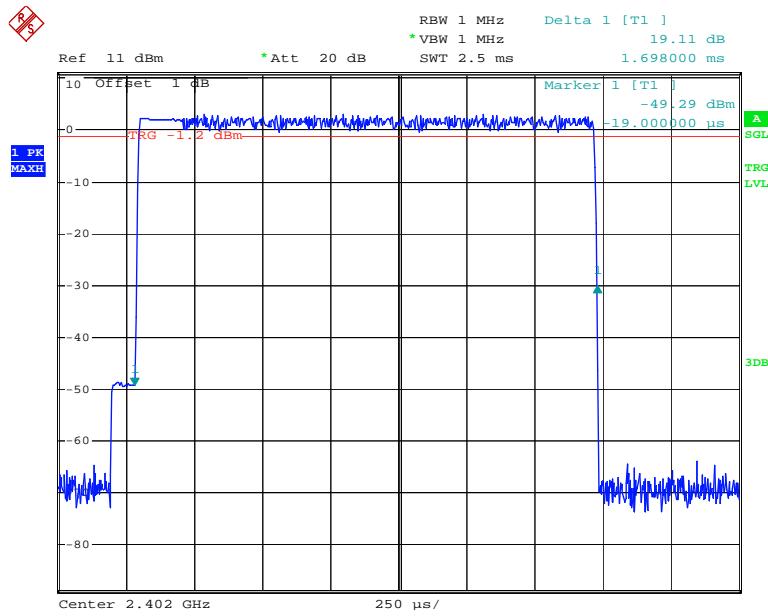
Date: 13.SEP.2014 15:36:50

DH1: Middle Channel

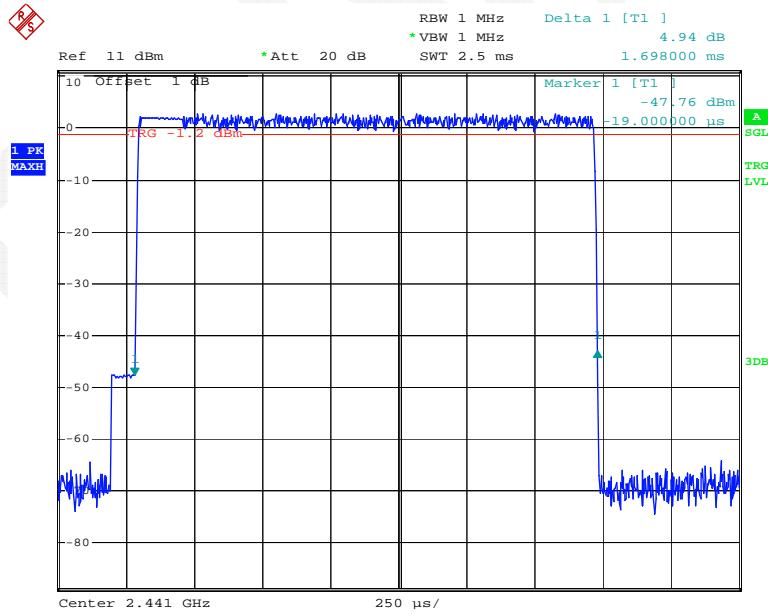
Date: 13.SEP.2014 15:36:57

DH1: High Channel

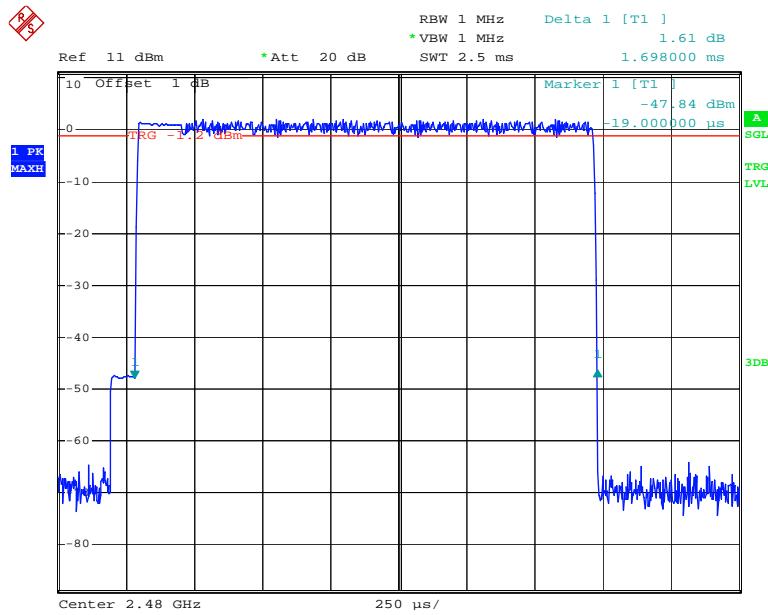
Date: 13.SEP.2014 15:37:02

DH3: Low Channel

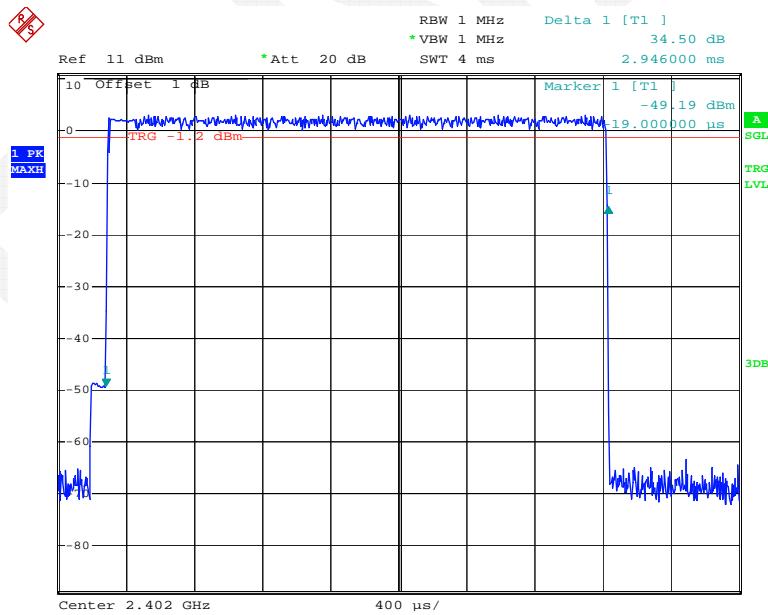
Date: 13.SEP.2014 15:40:35

DH3: Middle Channel

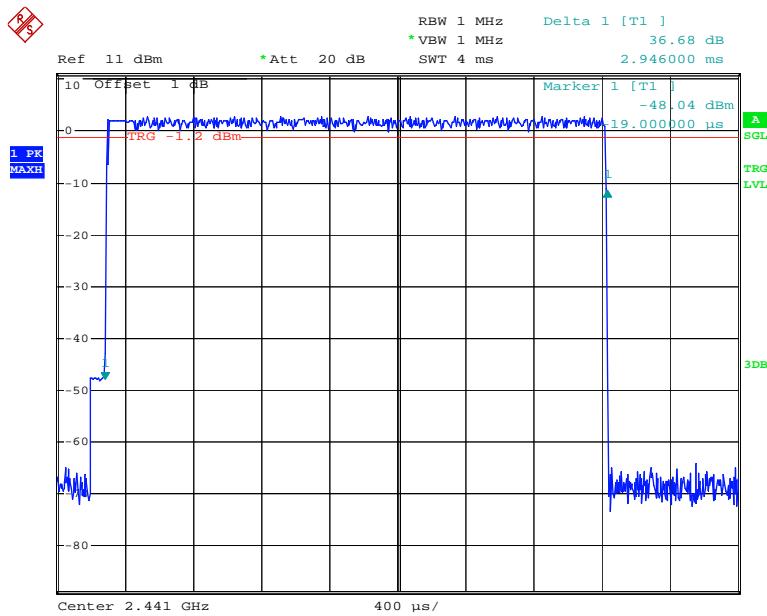
Date: 13.SEP.2014 15:40:29

DH3: High Channel

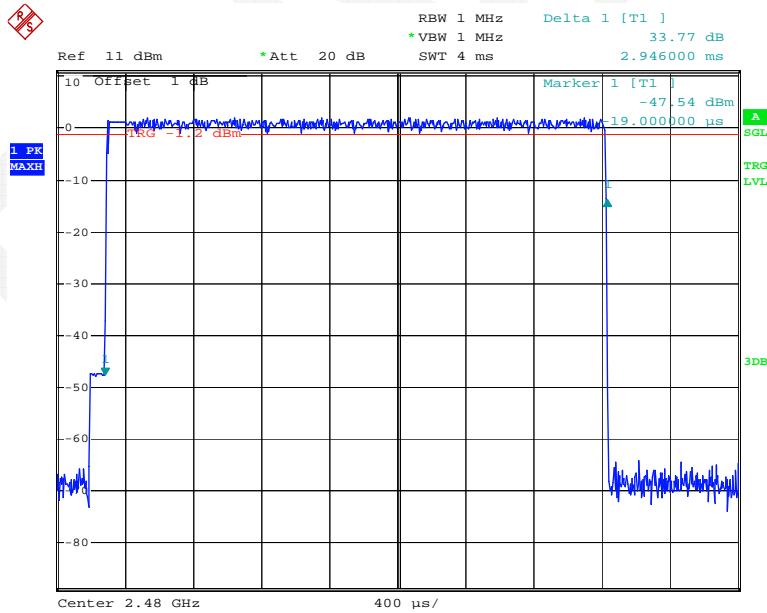
Date: 13.SEP.2014 15:40:24

DH5: Low Channel

Date: 13.SEP.2014 15:42:21

DH5: Middle Channel

Date: 13.SEP.2014 15:42:27

DH5: High Channel

Date: 13.SEP.2014 15:42:34

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	29.1 °C
Relative Humidity:	62%
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2014-09-13.

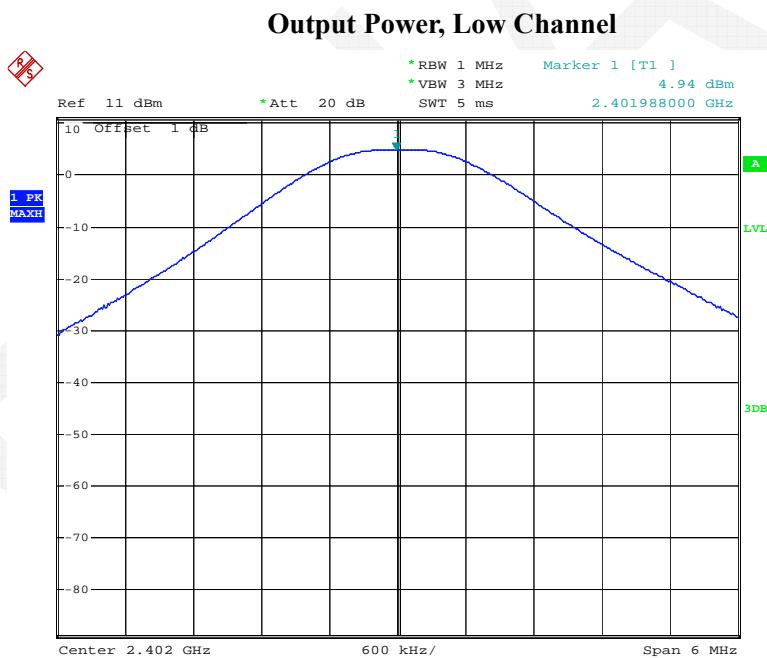
Test Result: Compliant.

Test Mode: Transmitting

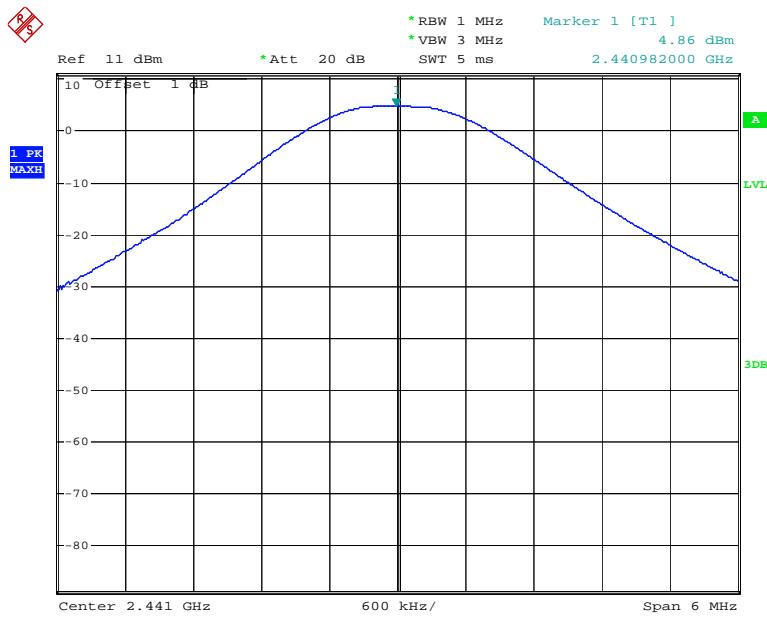
Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	4.94	30
	Middle	2441	4.86	30
	High	2480	4.16	30
EDR ($\pi/4$ -DQPSK)	Low	2402	3.06	30
	Middle	2441	2.97	30
	High	2480	2.18	30
EDR (8DPSK)	Low	2402	3.55	30
	Middle	2441	3.40	30
	High	2480	2.67	30

Note: The data above was tested in conducted mode.

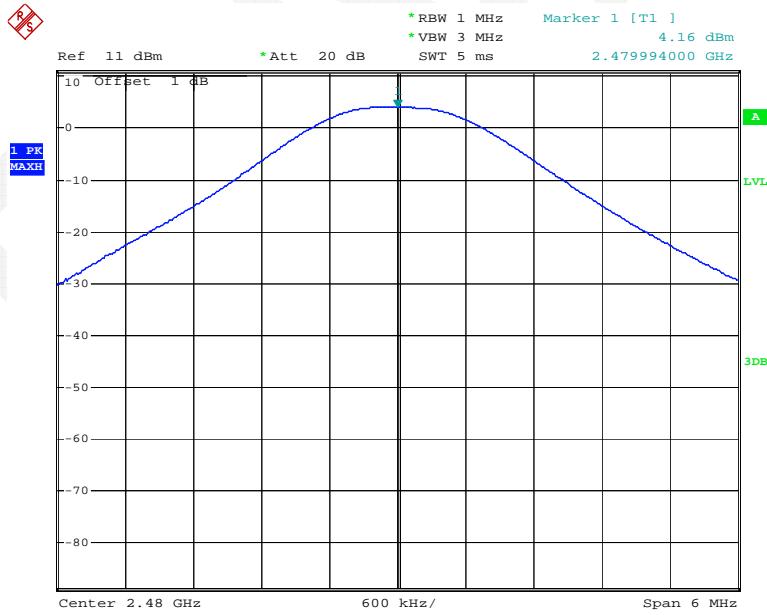
BDR Mode (GFSK):



Date: 13.SEP.2014 14:43:09

Output Power, Middle Channel

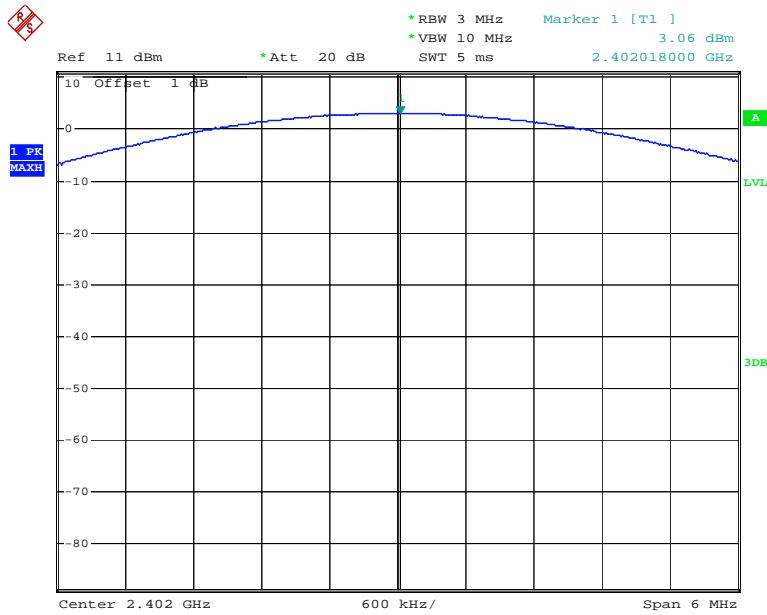
Date: 13.SEP.2014 14:45:20

Output Power, High Channel

Date: 13.SEP.2014 14:47:37

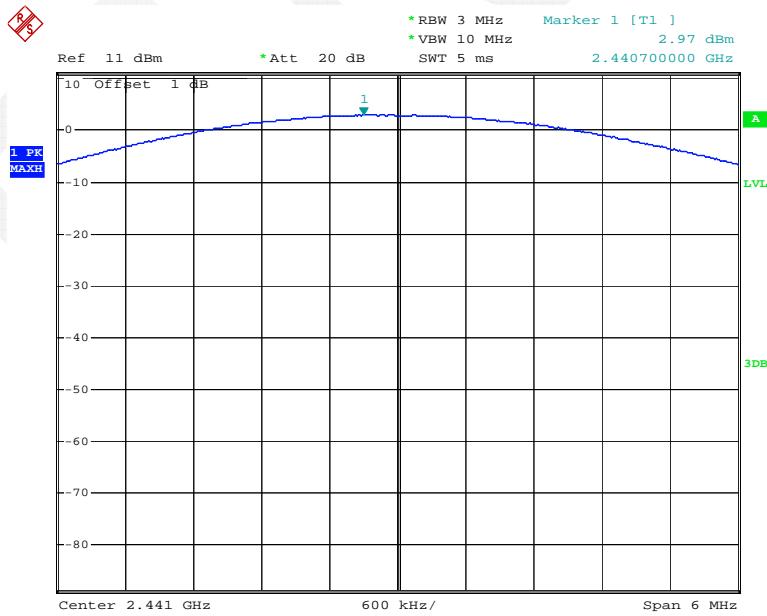
EDR Mode ($\pi/4$ -DQPSK):

Output Power, Low Channel



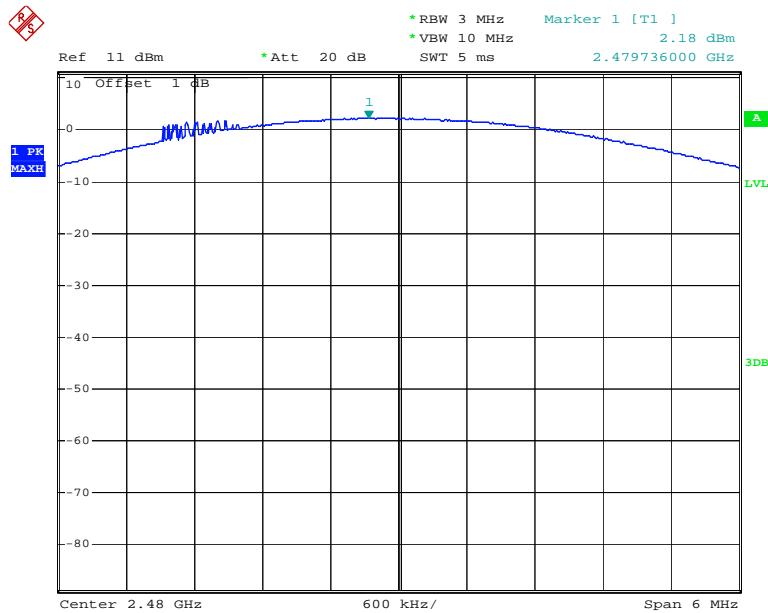
Date: 13.SEP.2014 14:56:51

Output Power, Middle Channel



Date: 13.SEP.2014 14:53:31

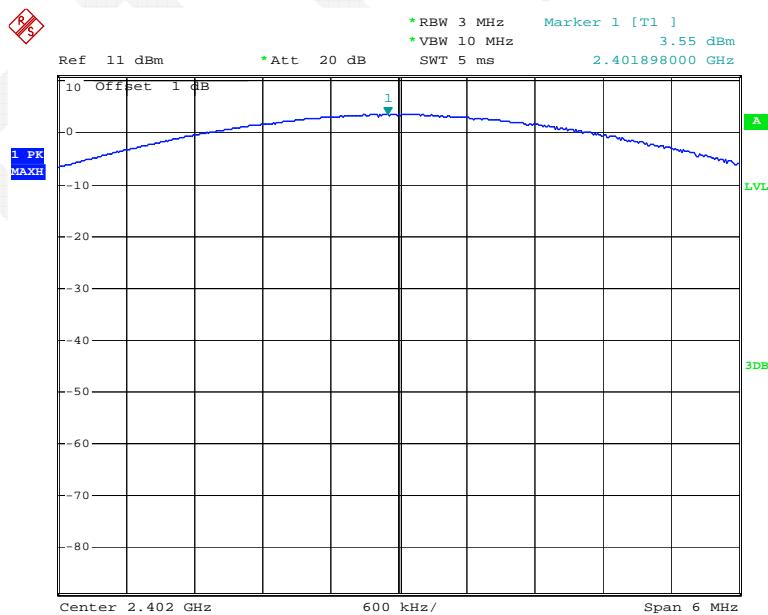
Output Power, High Channel



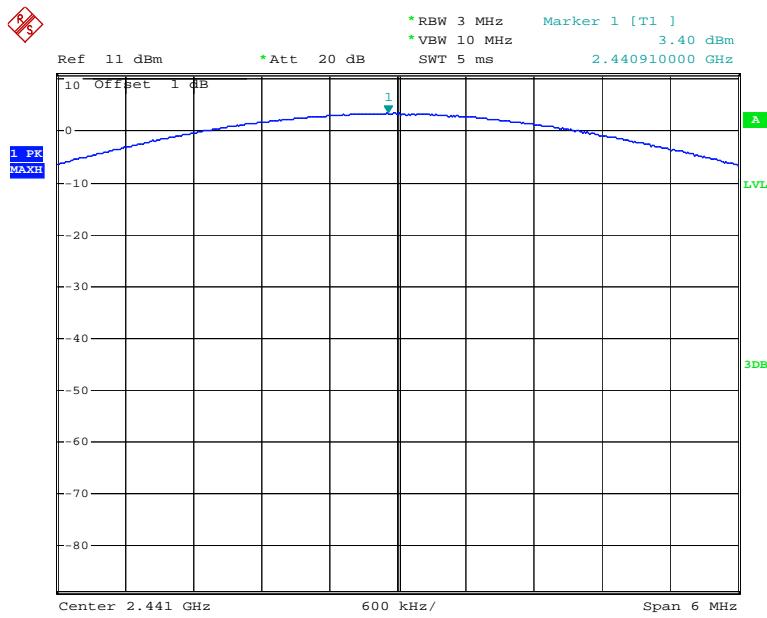
Date: 13.SEP.2014 14:50:10

EDR Mode (8DPSK):

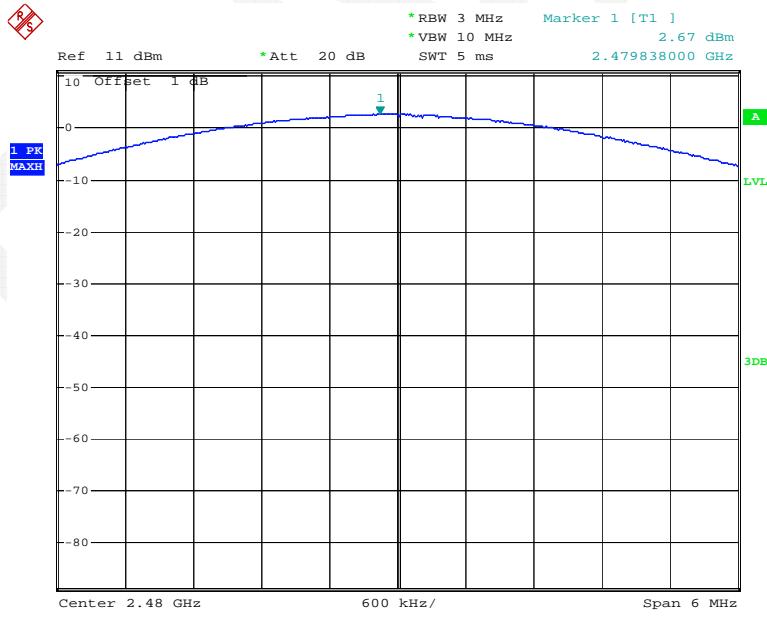
Output Power, Low Channel



Date: 13.SEP.2014 14:59:55

Output Power, Middle Channel

Date: 13.SEP.2014 15:02:37

Output Power, High Channel

Date: 13.SEP.2014 15:05:20

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

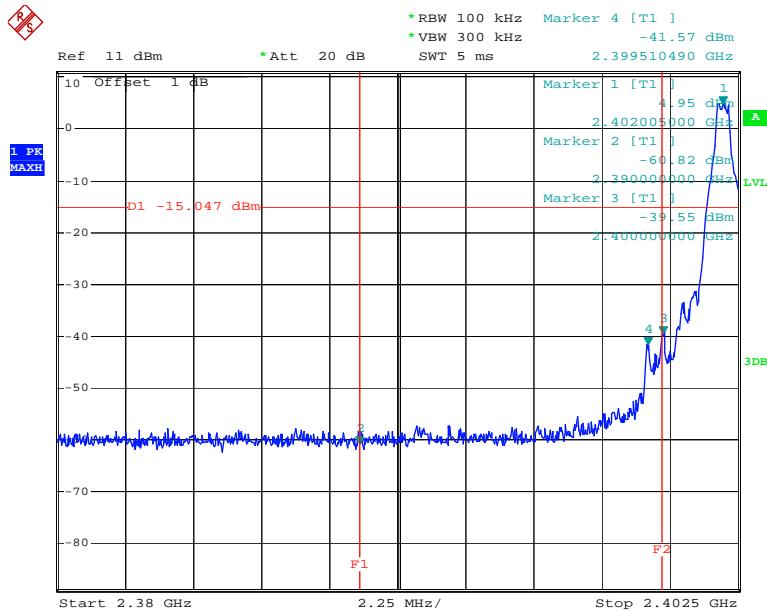
Temperature:	29.1 °C
Relative Humidity:	62%
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2014-09-13.

Test Result: Compliant.

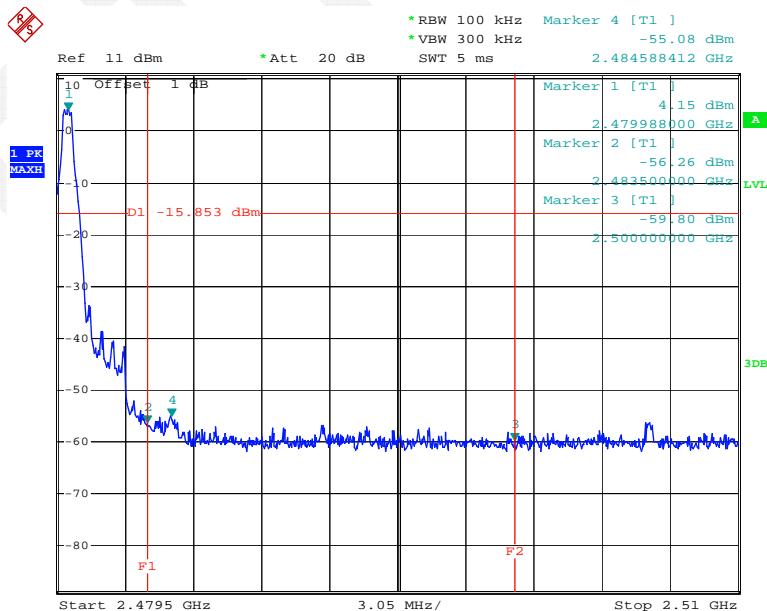
BDR Mode (GFSK):

Band Edge, Left Side



Date: 13.SEP.2014 14:44:41

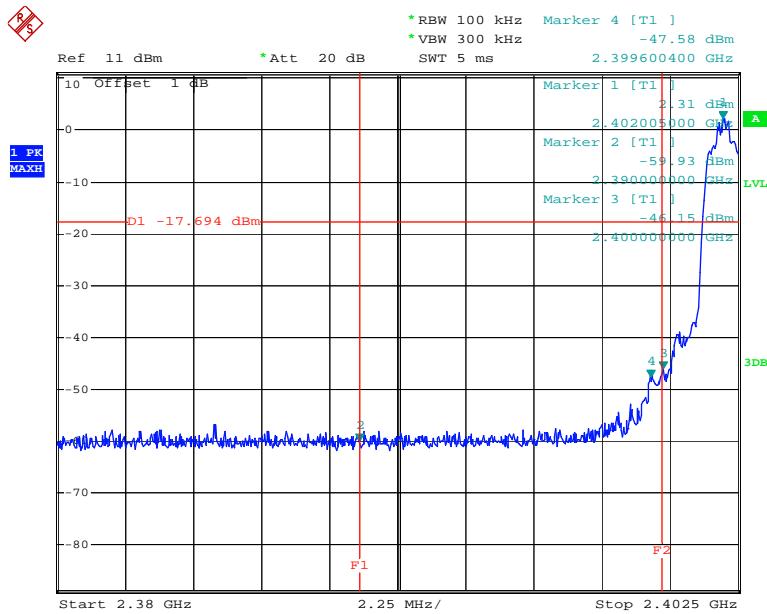
Band Edge, Right Side



Date: 13.SEP.2014 14:49:08

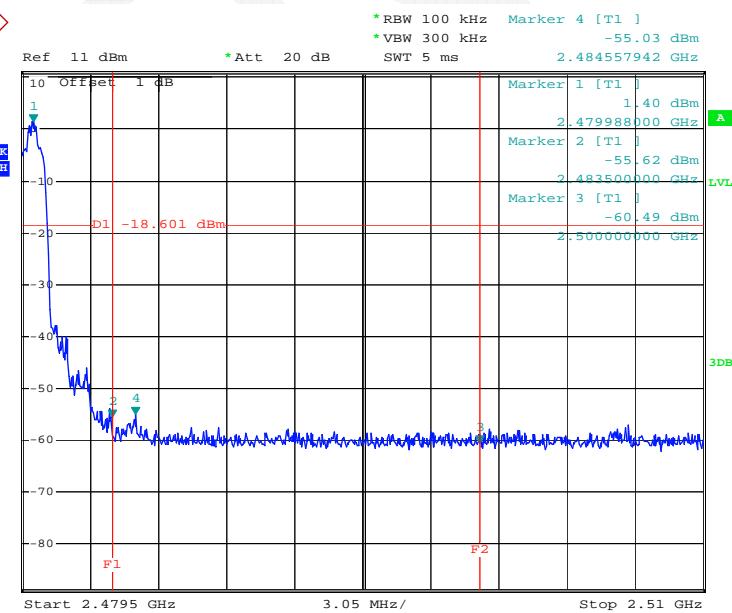
EDR Mode (π/4-DQPSK):

Band Edge, Left Side



Date: 13.SEP.2014 14:58:56

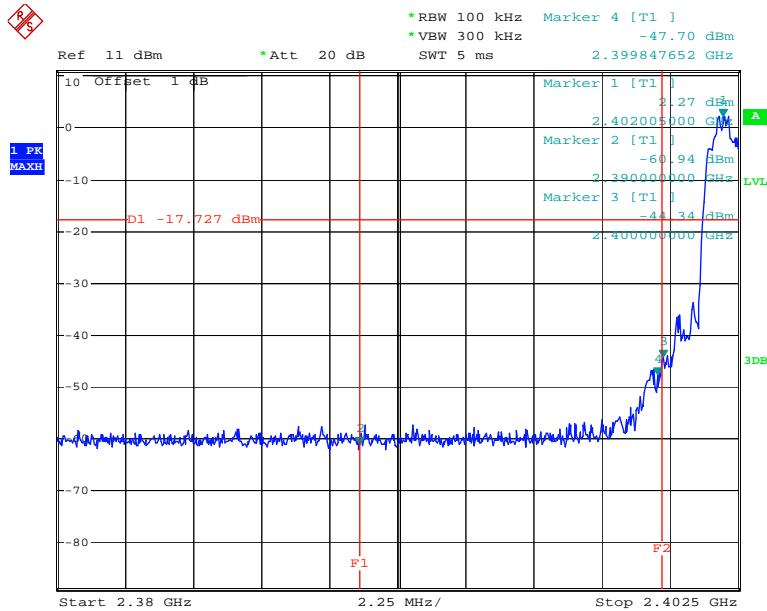
Band Edge, Right Side



Date: 13.SEP.2014 14:52:42

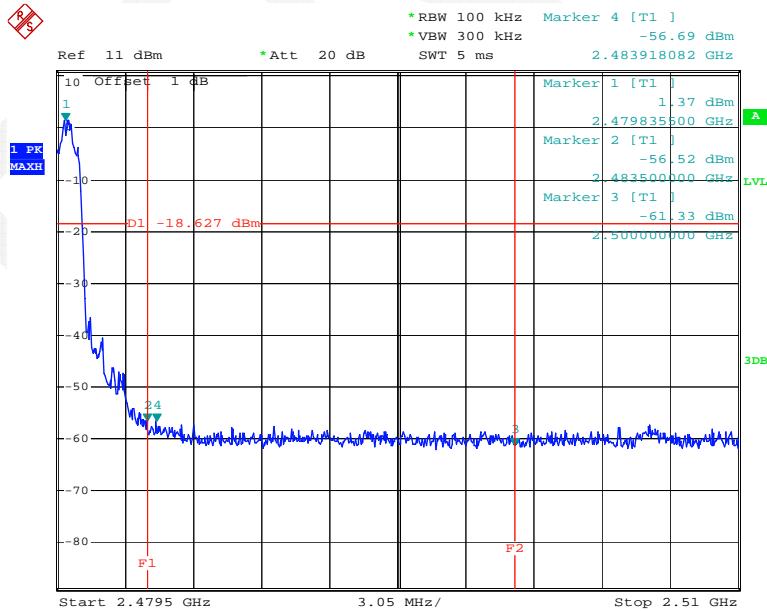
EDR Mode (8DPSK):

Band Edge, Left Side



Date: 13.SEP.2014 15:02:00

Band Edge, Right Side



Date: 13.SEP.2014 15:08:34

DECLARATION LETTER



Zhongshan K-mate General Electronics Co.,Ltd.

Declaration of Alteration

To Whom It May Concern,

We, Zhongshan K-mate General Electronics Co.,Ltd., hereby declare that there are some differences between our Multiple Models and testing model. Details as below:

Products Description	Name	Bluetooth audio transmitter	
	Brand	K-mate	
	Manufacturer	Zhongshan K-mate General Electronics Co.,Ltd.	
	Project No.	RDG140910001, RDG140910002, R2DG140910001-03	
Differences Description			
Testing Products	Multiple Models	Differences Items	Details
BTT025A	BTT025	Model name and APTX	BTT025A support APTX ,but BTT025 don't support APTX
	BTT025N	Model name and power supply mode	BTT025A is supplied by battery or charged by normal USB port; but BTT025N only can be supplied by normal USB port

Notes: Testing model-the product's model tested by BACL

Multiple Model- have the same or similar appearance, structure, PCB, Material and function to the testing product's model, and only are different for model name or power supply mode, APTX.

Besides the differences in the table above, we declare the products are identical
We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing

Best Regards,

Signature:

Print Name: | Xu Xing |

Title: [R&D Manager]

NO.2 ,5th Xinseng Street,Gangkou Town, Zhongshan City, Guangdong,China
xuxing@k-mate.com ,Tel. +86 760 88668055 and Fax. +86 760 88668103
 OPDG004R32 Version1.0 (20140717)

***** END OF REPORT *****