



Report No.: TW2105150E File Reference No.: 2021-06-03

Applicant: FUZHOU EMAX ELECTRONIC CO., LTD.

Product: Wireless Charging Pad

Model No.: EM9926, 5287333

Trademark: N/A

Test Standards: FCC Part 15 Subpart C

Test Result: It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C,

for the evaluation of electromagnetic compatibility



Dated: June 03, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No: TW2105150E Page 2 of 36

Date: 2021-06-03



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 36

Report No: TW2105150E

Date: 2021-06-03



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	13
6.5	Test Result.	14
7.0	20dB Bandwidth Test.	18
8.0	Antenna Requirement.	20
9.0	FCC Label.	21
10.0	Photo of Testing.	22

Date: 2021-06-03



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: +86 755 83448688 Fax: +86 755 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: FUZHOU EMAX ELECTRONIC CO., LTD.

Address: 1st, 4th, 5th floor of Building 27& Building 28, Fuwan, Jinshan Industrial Concentration

Area, No.869 Panyu Road, Gaishan Town, Cangshan District, FuZhou, Fujian, China.

Telephone: -Fax: -
1.3 Description of EUT

Product: Wireless Charging Pad

Manufacturer: FUZHOU EMAX ELECTRONIC CO., LTD.

Address: 1st, 4th, 5th floor of Building 27& Building 28, Fuwan, Jinshan Industrial

Concentration Area, No.869 Panyu Road, Gaishan Town, Cangshan District,

FuZhou, Fujian, China.

Brand Name: N/A

Model Number: EM9926
Additional Model Name 5287333
Additional Trade Name N/A

Rating: Input: DC9V, 2A, 18W; USB Output: DC5V, 1A, 5W;

Wireless Output: DC5V-9V, 1A

Hardware Version: V1.0 Software Version: V1.0

Serial No.: EM9926#0000001 Operation Frequency: See below table

Channel	Frequency (MHz)						
01	0.1115	06	0.140	11	0.165	16	0.190

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 36

Report No: TW2105150E

Date: 2021-06-03



02	0.120	07	0.145	12	0.170	17	0.195
03	0.125	08	0.150	13	0.175	18	0.200
04	0.130	09	0.155	14	0.180	19	0.205
05	0.135	10	0.160	15	0.185		
Teat	channel	Freque	ency (MHz)				
CH13		0.17	75 MHz				

Modulation Type: MSK

Antenna Designation Inductive Loop Antenna with Gain 0dBi

Note: Wireless Output: 5V 1A and 9V 1A mode all have been tested, only worse case mode Wireless Output 9V 1A is reported.

1.4 Submitted Sample

1 Samples

1.5 Test Duration

2021-05-10 to 2021-06-03

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 9kHz-30MHz Uncertainty =4.3dB

Radiated Emissions below 30MHz-1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

The sample tested by



Date: 2021-06-03



2.0 Test Equipment	-				
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
LISN	R&S	EZH3-Z5	100294	2020-06-23	2021-06-22
LISN	R&S	EZH3-Z5	100253	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2020-07-06	2021-07-05
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2021-01-16	2022-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: TW2105150E Page 7 of 36

Date: 2021-06-03



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:						
Standard	Test Type	Result	Notes			
FCC Part 15, Paragraph 15.203	Antenna	Pass	Compliant			
	requirements					
FCC Part 15, Paragraph 15.207	Conducted	Pass	Compliant			
	Emission Test					
ECC Part 15 Paragraph 15 200 (a) (f)	General	Pass	Compliant			
FCC Part 15, Paragraph 15.209 (a) (f)	Requirement	Pass	Compliant			
FCC Part 15, Paragraph 15.215	20dB	Pass	Compliant			
	Bandwidth					
	Testing					

3.2 Test Standards

FCC Part 15 Subpart C, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2021-06-03



5. Power Line Conducted Emission Test

5.1 Schematics of the test

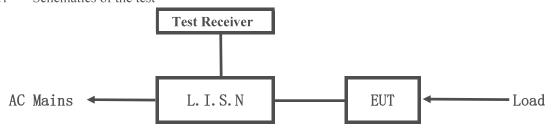


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test voltage: AC 120V 60Hz Block diagram of Test setup

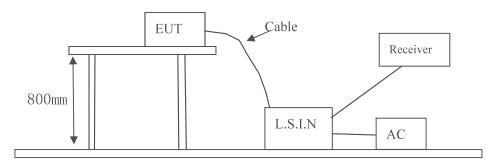

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Wireless Charging	FUZHOU EMAX ELECTRONIC	EM9926	WEC-EM9926
Pad	CO., LTD.	EM19920	W EC-EN19920

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: TW2105150E Page 9 of 36

Date: 2021-06-03



C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	Dongguan City	GQ18-090200-AU	Input: 100-240V~, 50-60Hz, 0.5A;
	GangQi		Output: DC9V, 2A, 18W
	Electronic Co.,		
	Ltd		

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB µ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
$5.00 \sim 30.00$	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz. (The average detector is necessary when the Quasi-peak emission level beyond the average Limit.)



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

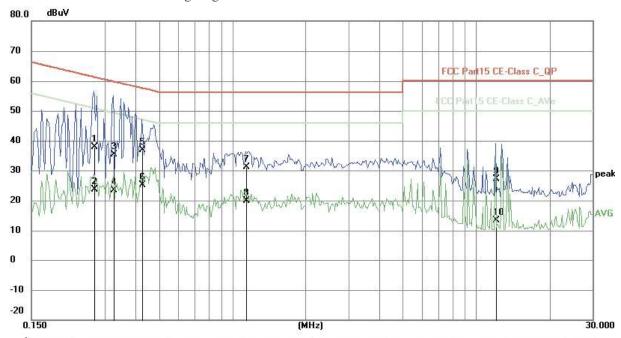

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2709	28.04	9.75	37.79	61.09	-23.30	QP	Р
2	0.2709	13.88	9.75	23.63	51.09	-27.46	AVG	Р
3	0.3255	25.68	9.76	35.44	59.57	-24.13	QP	Р
4	0.3255	13.52	9.76	23.28	49.57	-26.29	AVG	Р
5	0.4269	27.17	9.77	36.94	57.31	-20.37	QP	Р
6	0.4269	15.35	9.77	25.12	47.31	-22.19	AVG	Р
7	1.1367	21.31	9.79	31.10	56.00	-24.90	QP	Р
8	1.1367	10.19	9.79	19.98	46.00	-26.02	AVG	Р
9	12.0246	16.80	10.25	27.05	60.00	-32.95	QP	Р
10	12.0246	3.01	10.25	13.26	50.00	-36.74	AVG	Р



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity:75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

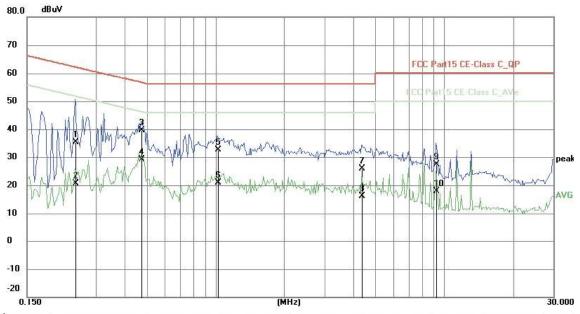

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2436	25.65	9.75	35.40	61.97	-26.57	QP	Р
2	0.2436	10.94	9.75	20.69	51.97	-31.28	AVG	Р
3	0.4737	29.93	9.77	39.70	56.45	-16.75	QP	Р
4	0.4737	19.32	9.77	29.09	46.45	-17.36	AVG	Р
5	1.0236	22.85	9.79	32.64	56.00	-23.36	QP	Р
6	1.0236	11.13	9.79	20.92	46.00	-25.08	AVG	Р
7	4.3533	15.90	9.90	25.80	56.00	-30.20	QP	Р
8	4.3533	6.19	9.90	16.09	46.00	-29.91	AVG	Р
9	9.2322	17.20	10.12	27.32	60.00	-32.68	QP	Р
10	9.2322	7.69	10.12	17.81	50.00	-32.19	AVG	Р




6 Radiated Emission Test

6.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at TIMEWAY EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9 kHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with RBW=120 kHz/VBW=300 kHz; All readings from 9 kHz to 30 MHz are quasi-peak values with RBW=10 kHz/VBW=30 kHz. For the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission test in these three bands are based on measurements employing an average detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


9kHz-30MHz

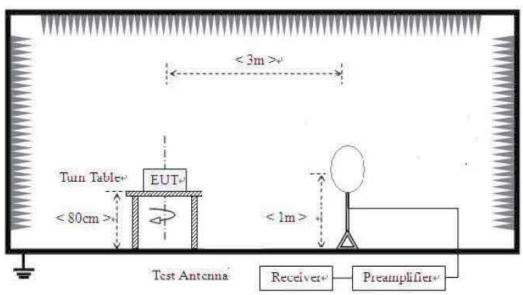

Date: 2021-06-03



30MHz-1000MHz

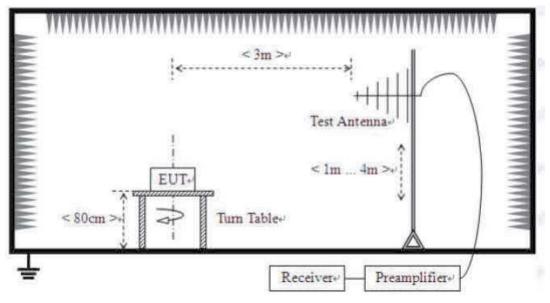

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

B. Frequencies in restricted band are compiled to limit on Paragraph 15.209. Limits for frequency below 30MHz

Frequency Range (MHz)	Distance (m)	Field strength (V/m)
0.009-0.490	300	2400/F(kHz)
0.490-1.705	30	24000/F(kHz)
1.705-30	30	30

Report No: TW2105150E Page 14 of 36

Date: 2021-06-03



Limits for frequency above 30MHz

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6.5 Test result

Report No: TW2105150E Page 15 of 36

Date: 2021-06-03




Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

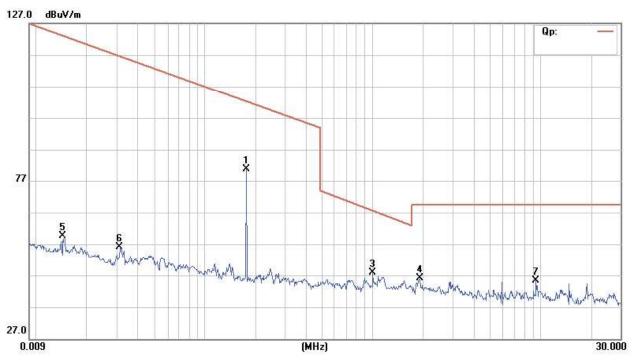

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	0.1750	71.08	9.77	80.85	102.7	-21.89	peak
2	0.1750	66.23	9.77	76.00	102.7	-26.74	AVG
3 *	1.0060	38.12	9.79	47.91	67.57	-19.66	peak
4	1.9173	36.26	9.80	46.06	69.50	-23.44	peak
5	0.0146	49.49	10.16	59.65	124.3	-64.67	peak
6	0.0310	45.92	10.15	56.07	117.7	-61.71	peak
7	9.4375	35.23	10.13	45.36	69.56	-24.20	peak

Report No: TW2105150E Page 16 of 36

Date: 2021-06-03




A. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

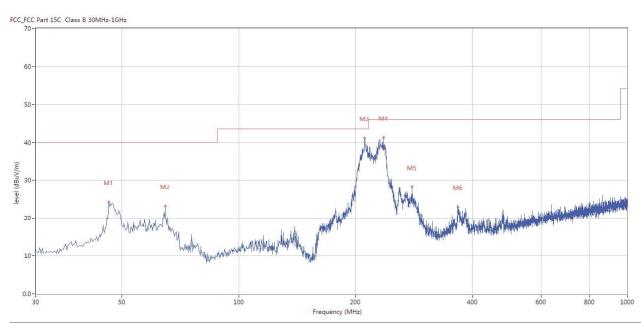

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	46.243	24.24	-11.41	40.0	-15.76	Peak	267.00	100	Horizontal	Pass
2	64.669	23.15	-13.49	40.0	-16.85	Peak	175.00	100	Horizonta l	Pass
3	210.860	41.10	-13.64	43.5	-2.40	Peak	237.00	100	Horizontal	Pass
4	235.831	41.21	-12.45	46.0	- 4.79	Peak	267.00	100	Horizontal	Pass
5	279.228	28.23	-11.53	46.0	-17.77	Peak	359.00	100	Horizontal	Pass
6	367.233	22.91	- 9.51	46.0	-23.09	Peak	240.00	100	Horizontal	Pass




B. General Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Please refer to following diagram for individual

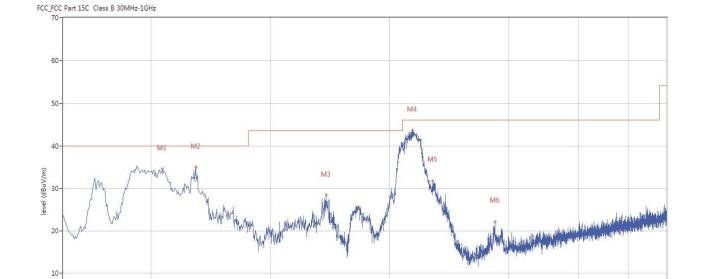

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	53.032	34.72	-11.50	40.0	-5.28	Peak	15.00	100	Vertical	Pass
2	64.911	34.90	-13.55	40.0	-5.10	Peak	0.00	100	Vertical	Pass
3	138.128	28.30	- 17.29	43.5	-15.20	Peak	61.00	100	Vertical	Pass
4	228.073	43.58	-12.77	46.0	-2.42	Peak	49.00	100	Vertical	Pass
5	256.681	31.80	-11.98	46.0	-14.20	Peak	7.00	100	Vertical	Pass
6	368.930	22.20	-9.53	46.0	-23.80	Peak	1.00	100	Vertical	Pass

Frequency (MHz)

1000

Report No: TW2105150E Page 18 of 36

Date: 2021-06-03



7.0 20dB Bandwidth Testing

7.1 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

7.3 Test Data

Frequency (MHz)	20dB Bandwidth Emission (kHz)	Limit (kHz)	Result
0.175	3.48		Pass


Refer to attached plots:

Report No: TW2105150E Page 19 of 36

Date: 2021-06-03



20dB Bandwidth

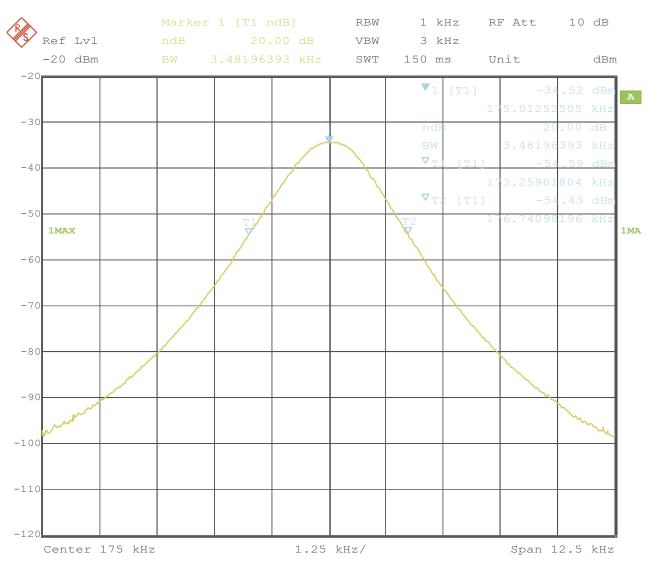

Date: 28.MAY.2021 13:52:05

Report No: TW2105150E Page 20 of 36

Date: 2021-06-03



8.0 Antenna Requirement

8.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

8.2 Antenna Connected constructions

The antenna is Inductive Loop Antenna. The antenna gain is 0dBi. So it meets the requirement of 15.203