

TEST REPORT

Product Name : ROCAR beta
Brand Mark : ROCAR
Model No. : M-81B
Extension Model : M-81G,M-81F,M-82B,M-81F
FCC ID : WIG-M-81G
Report Number : BLA-EMC-202401-A5002
Date of Sample Receipt : 2024/1/18
Date of Test : 2024/1/19 to 2024/2/4
Date of Issue : 2024/2/19
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Shenzhen Everbest Machinery Industry Co., Ltd
19th Building, 5th Region, Baiwangxin Industrial Park, SongBai Rd.,
Baimang, Xili, Nanshan, Shenzhen China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

charlie

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2024/2/9



REPORT REVISE RECORD

Version No.	Date	Description
00	2024/2/19	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY	5
2 GENERAL INFORMATION	6
3 GENERAL DESCRIPTION OF E.U.T.	6
4 OPERATION FREQUENCY EACH OF CHANNEL	7
5 TEST ENVIRONMENT	8
6 TEST MODE	8
7 MEASUREMENT UNCERTAINTY	9
8 DESCRIPTION OF SUPPORT UNIT	10
9 LABORATORY LOCATION	10
10 TEST INSTRUMENTS LIST	11
11 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	13
11.1 LIMITS	13
11.2 BLOCK DIAGRAM OF TEST SETUP	13
11.3 PROCEDURE	13
11.4 TEST DATA	15
12 CONDUCTED BAND EDGES MEASUREMENT	17
12.1 LIMITS	17
12.2 BLOCK DIAGRAM OF TEST SETUP	17
12.3 TEST DATA	18
13 RADIATED SPURIOUS EMISSIONS	19
13.1 LIMITS	19
13.2 BLOCK DIAGRAM OF TEST SETUP	20
13.3 PROCEDURE	20
13.4 TEST DATA	22
14 ANTENNA REQUIREMENT	38
14.1 CONCLUSION	38
15 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	39
15.1 LIMITS	39
15.2 BLOCK DIAGRAM OF TEST SETUP	40

15.3 PROCEDURE	40
15.4 TEST DATA	42
16 CONDUCTED SPURIOUS EMISSIONS	50
16.1 LIMITS	50
16.2 BLOCK DIAGRAM OF TEST SETUP	50
16.3 TEST DATA	51
17 POWER SPECTRUM DENSITY	52
17.1 LIMITS	52
17.2 BLOCK DIAGRAM OF TEST SETUP	52
17.3 TEST DATA	52
18 CONDUCTED PEAK OUTPUT POWER	53
18.1 LIMITS	53
18.2 BLOCK DIAGRAM OF TEST SETUP	53
18.3 TEST DATA	54
19 MINIMUM 6DB BANDWIDTH	55
19.1 LIMITS	55
19.2 BLOCK DIAGRAM OF TEST SETUP	55
19.3 TEST DATA	55
20 APPENDIX	56
20.1 MAXIMUM CONDUCTED OUTPUT POWER	56
20.2 -6dB BANDWIDTH	58
20.3 OCCUPIED CHANNEL BANDWIDTH	60
20.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	62
20.5 BAND EDGE	64
20.6 CONDUCTED RF SPURIOUS EMISSION	67
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	71
APPENDIX B: PHOTOGRAPHS OF EUT	73

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass

2 GENERAL INFORMATION

Applicant	Shenzhen Everbest Machinery Industry Co., Ltd
Address	19th Building, 5th Region, Baiwangxin Industrial Park, SongBai Rd.,Baimang,Xili,Nanshan,Shenzhen China
Manufacturer	Shenzhen Everbest Machinery Industry Co., Ltd
Address	19th Building, 5th Region, Baiwangxin Industrial Park, SongBai Rd.,Baimang,Xili,Nanshan,Shenzhen China
Factory	N/A
Address	N/A
Product Name	ROCAR beta
Test Model No.	M-81B
Extension Model	M-81G,M-81F,M-82B,M-81F
Remark	The difference between the series models is the removal of alcohol module function(corresponding to the removal of hall IC and alcohol module power supply) andtemperature and humidity detection function on the basis of the main model M-81B, whilethere is a slight difference in Bluetooth antenna.

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Engineer sample no:	BLA-EMC-202401-A50
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	internal antenna
Antenna Gain:	M-81B:0dBi(Provided by the customer)
	M-81G:-1.92dBi(Provided by the customer)
Note 1: Model M-81B, M-81G There are differences in the Bluetooth antennas. Both models are tested for radiation differences, and the data is reflected in the report	

4 OPERATION FREQUENCY EACH OF CHANNEL

BLE:

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz

5 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.8V

6 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
Remark: Only the data of the worst mode would be recorded in this report.	

7 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission(9kHz-30MHz)	±4.34dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

8 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A
PC	lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)

9 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

10 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2023/11/16	2026/11/15
Chamber 2	SKET	966	N/A	2021/07/20	2024/7/19
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Receiver	R&S	ESR7	101199	2023/08/30	2024/08/29
Receiver	R&S	ESPI7	101477	2023/07/07	2024/07/06
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/10/12	2025/10/11
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Horn Antenna	Schwarzbeck	BBHA 9170	1106	2022/04/24	2024/04/23
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2023/07/07	2024/07/06
Amplifier	SKET	PA-000318G-45	N/A	2023/08/30	2024/08/29
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2023/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/09/14	2025/09/13
1kHz calibration audio source	SKET	MCS-ABT-C35	N/A	2023/09/04	2024/09/03
Free Field Microphone	SKET	MGS MP 663	0414	2023/09/04	2024/09/03
Audio shielding box	SKET	SB-ABT-C35	N/A	2023/03/30	2024/03/29
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A
Signal Generator DTV	ECREDIX	DSG-1000	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2023/11/16	2025/11/15
Receiver	R&S	ESPI3	101082	2023/08/30	2024/08/29
LISN	R&S	ENV216	3560.6550.15	2023/08/30	2024/08/29
LISN	AT	AT166-2	AKK1806000003	2023/08/30	2024/08/29
ISN	TESEQ	ISNT8-cat6	53580	2023/08/30	2024/08/29
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2023/07/07	2024/07/06
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY49100060	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY54420161	2023/08/30	2024/08/29
Signal Generator	Agilent	N5182A	MY47420955	2023/08/30	2024/08/29
Signal Generator	Agilent	N5181A	MY46240904	2023/07/07	2024/07/06
Signal Generator	R&S	CMW500	132429	2023/08/30	2024/08/29
BluetoothTester	Anritsu	MT8852B	06262047872	2023/08/30	2024/08/29
Power probe	DARE	RPR3006W	14I00889SN042	2023/09/01	2024/08/31
Power detection box	CDKMV	MW100-PSB	MW201020JYT	2023/07/07	2024/07/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2023/08/30	2024/08/29
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2023/08/30	2024/08/29
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audio Precision	ATS-1	ATS141094	2023/07/07	2024/07/06

11 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

11.2 BLOCK DIAGRAM OF TEST SETUP

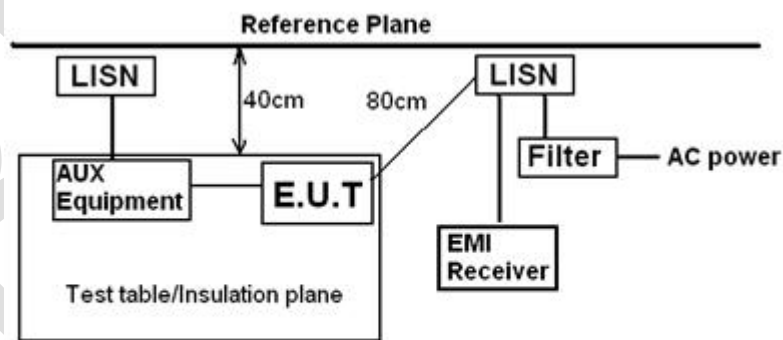

Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

11.3 PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
 - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
 - 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

11.4 TEST DATA

[TestMode: TX]; [Line: Line];[Power:AC120V/60Hz]

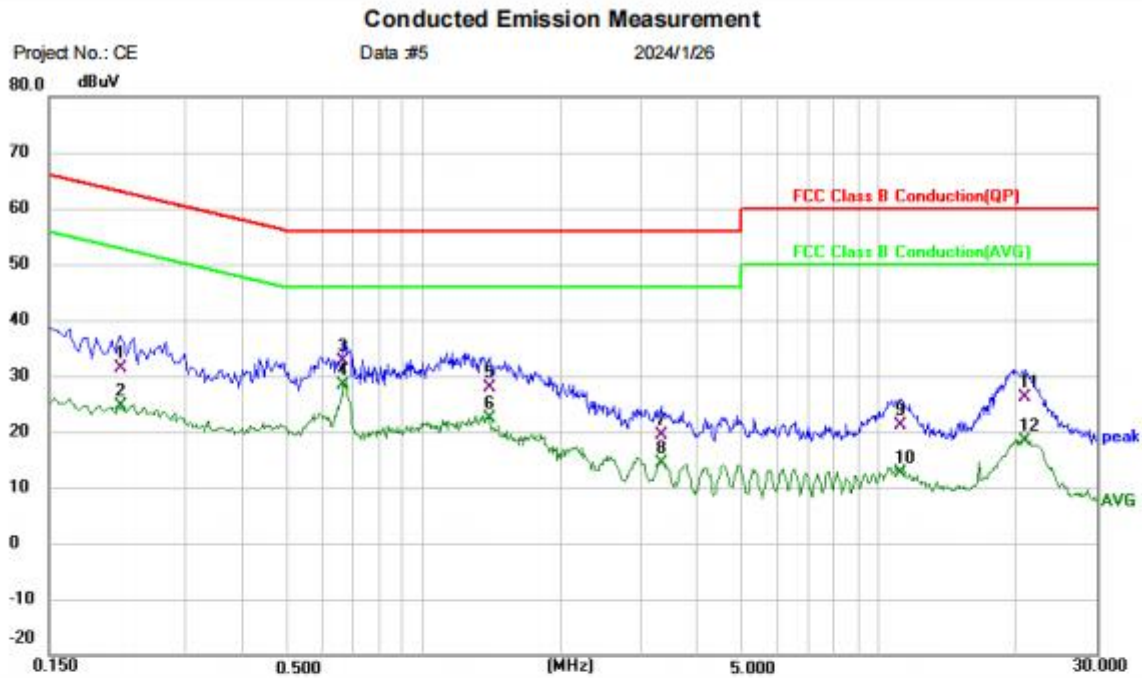


Site	Phase: L1	Temperature: (C)
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %RH
EUT: ROCAR beta	Distance:	RBW: 9 KHz
MN: M-81G		VBW: 30 KHz
Mode: TX-MODE		Sweep Time: 10 ms
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.2140	20.97	10.40	31.37	63.05	-31.68	QP		
2		0.2140	14.12	10.40	24.52	53.05	-28.53	AVG		
3		0.6660	22.53	9.99	32.52	56.00	-23.48	QP		
4	*	0.6660	18.42	9.99	28.41	46.00	-17.59	AVG		
5		1.3980	17.95	9.93	27.88	56.00	-28.12	QP		
6		1.3980	12.33	9.93	22.26	46.00	-23.74	AVG		
7		3.3180	9.42	10.02	19.44	56.00	-36.56	QP		
8		3.3180	4.43	10.02	14.45	46.00	-31.55	AVG		
9		11.1180	20.34	0.76	21.10	60.00	-38.90	QP		
10		11.1180	11.94	0.76	12.70	50.00	-37.30	AVG		
11		20.8540	11.30	14.78	26.08	60.00	-33.92	QP		
12		20.8540	3.62	14.78	18.40	50.00	-31.60	AVG		

Test Result: Pass

[TestMode: TX]; [Line: Neutral];[Power:AC120V/60Hz]

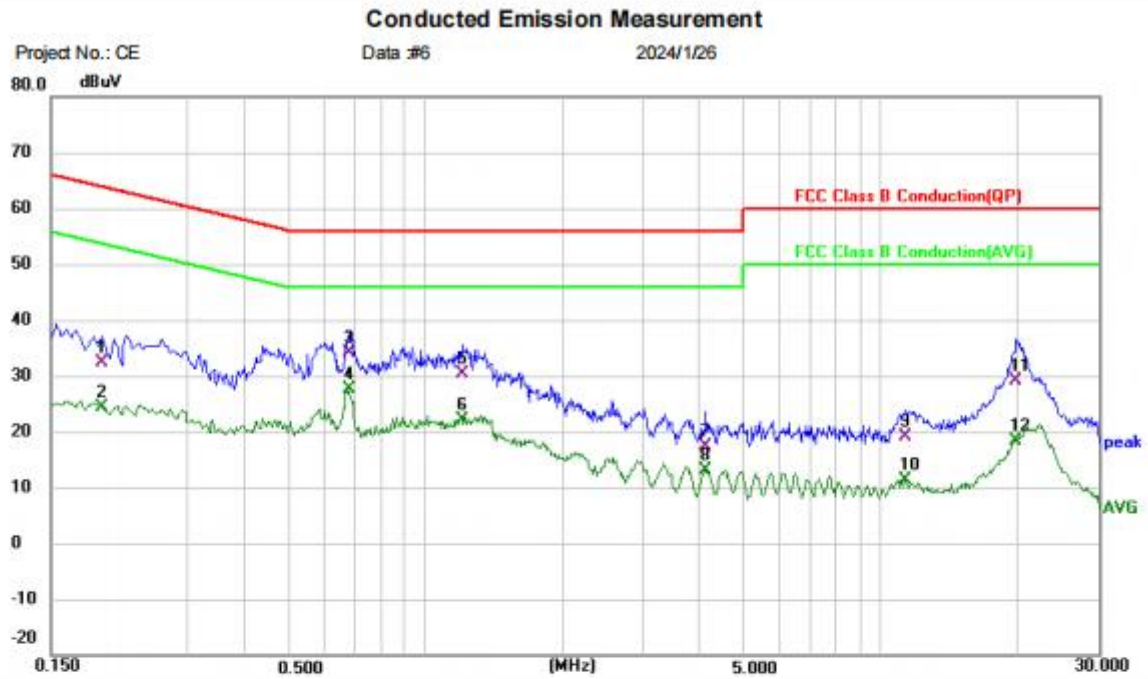

Site	Phase: N	Temperature: (C)
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %RH
EUT: ROCAR beta	Distance:	RBW: 9 KHz
MN: M-81G		VBW: 30 KHz
Mode: TX-MODE		Sweep Time: 10 ms
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.1940	22.24	10.17	32.41	63.86	-31.45			QP
2		0.1940	14.23	10.17	24.40	53.86	-29.46			AVG
3		0.6780	24.13	9.95	34.08	56.00	-21.92			QP
4	*	0.6780	17.76	9.95	27.71	46.00	-18.29			AVG
5		1.1980	20.45	9.89	30.34	56.00	-25.66			QP
6		1.1980	12.33	9.89	22.22	46.00	-23.78			AVG
7		4.1340	7.19	10.09	17.28	56.00	-38.72			QP
8		4.1340	3.09	10.09	13.18	46.00	-32.82			AVG
9		11.2940	18.43	0.60	19.03	60.00	-40.97			QP
10		11.2940	10.72	0.60	11.32	50.00	-38.68			AVG
11		19.8340	14.52	14.60	29.12	60.00	-30.88			QP
12		19.8340	3.89	14.60	18.49	50.00	-31.51			AVG

Test Result: Pass


12 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

12.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

12.2 BLOCK DIAGRAM OF TEST SETUP

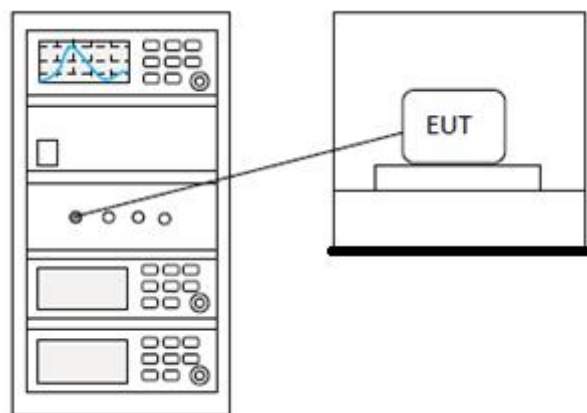

12.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

13 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

13.2 BLOCK DIAGRAM OF TEST SETUP

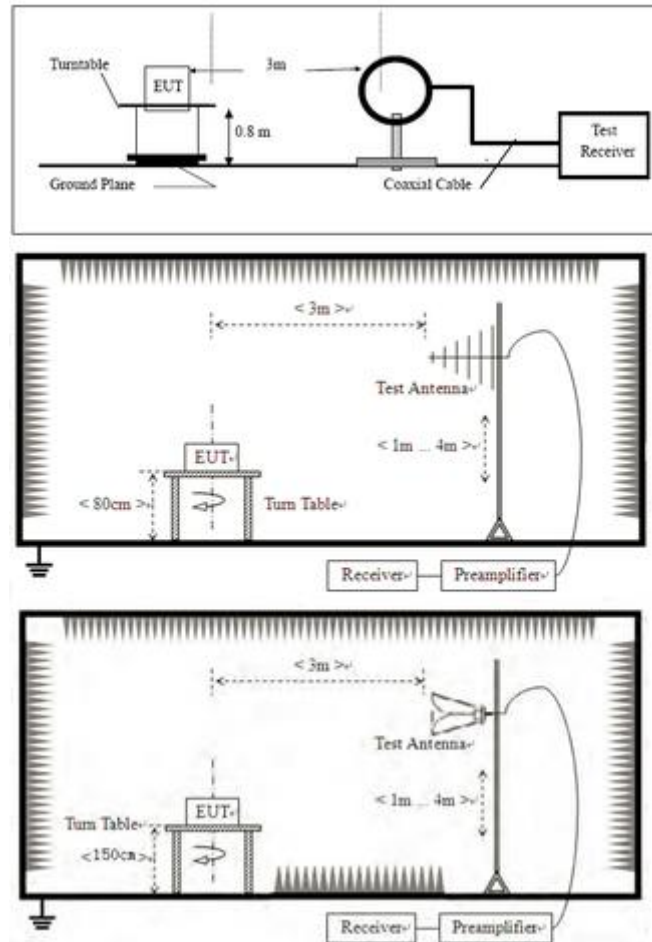

13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

13.4 TEST DATA

Below 1GHz


M-81B:

[TestMode: TX]; [Polarity: Horizontal]

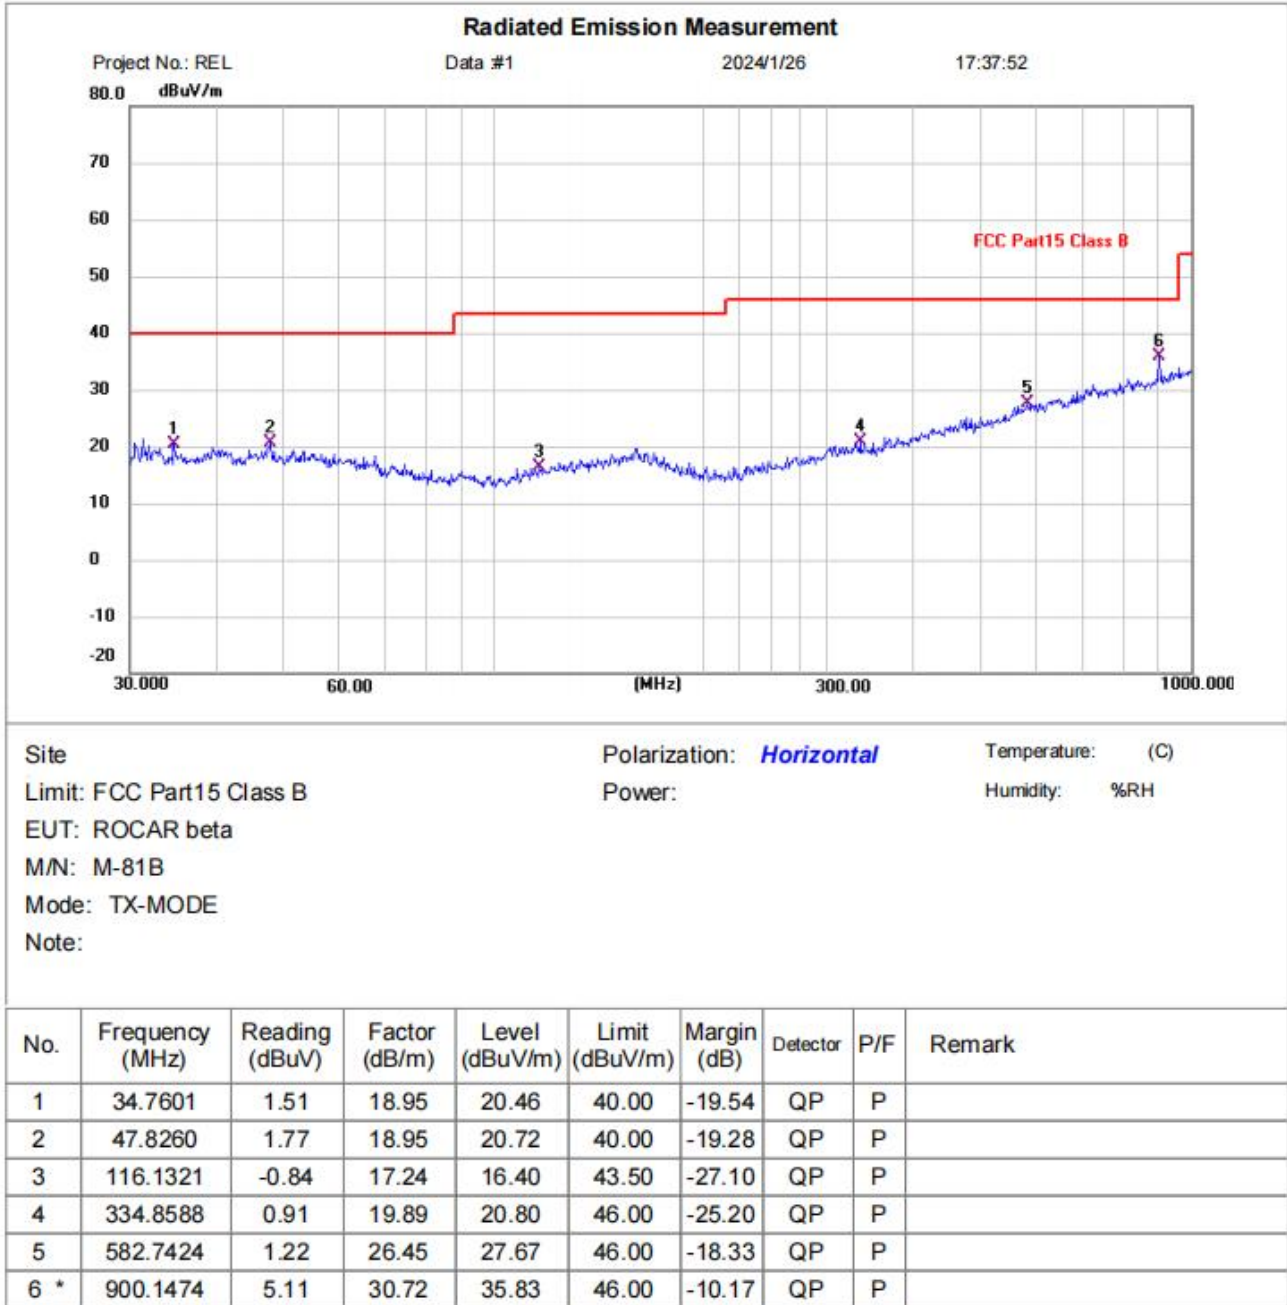

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

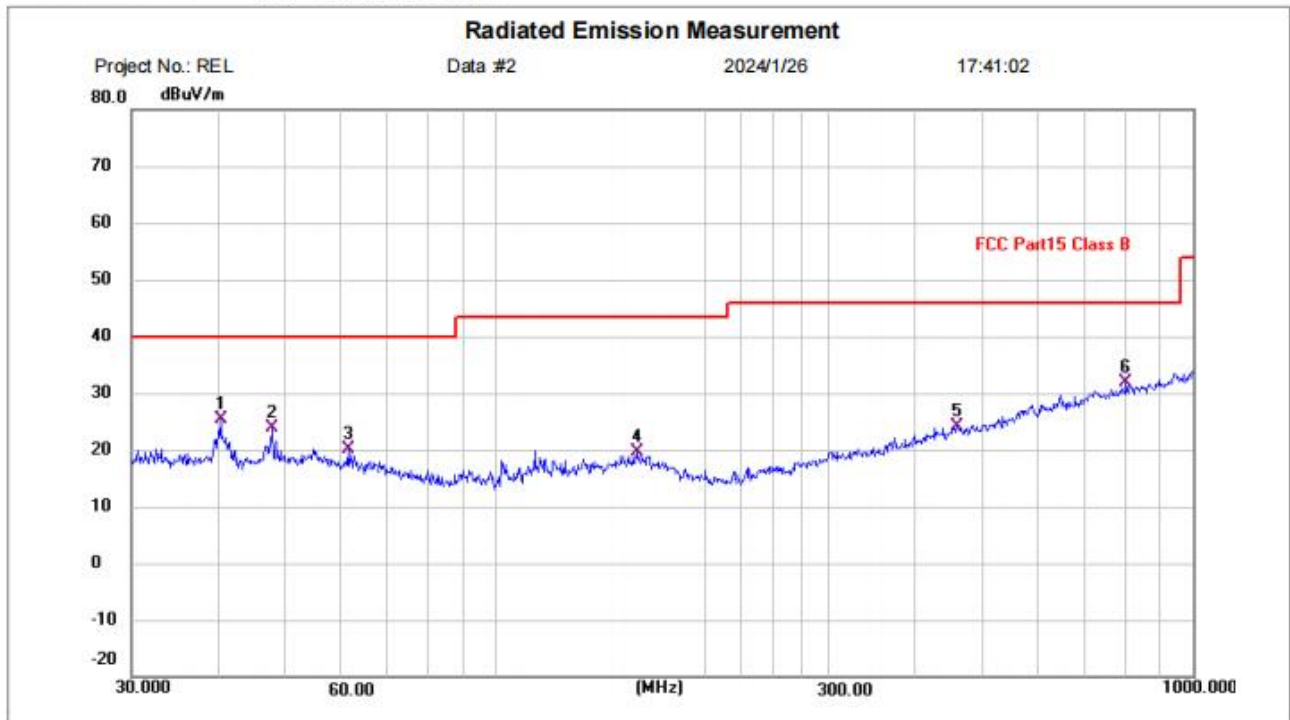

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 Class B Power: Humidity: %RH

EUT: ROCAR beta

M/N: M-81B

Mode: TX-MODE


Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	40.2757	5.47	19.81	25.28	40.00	-14.72	QP	P	
2	47.6586	4.84	19.00	23.84	40.00	-16.16	QP	P	
3	61.3463	1.62	18.61	20.23	40.00	-19.77	QP	P	
4	159.2251	-0.12	19.64	19.52	43.50	-23.98	QP	P	
5	459.1144	0.65	23.48	24.13	46.00	-21.87	QP	P	
6 *	801.7863	1.78	29.98	31.76	46.00	-14.24	QP	P	

Test Result: Pass

M-81G:

[TestMode: TX]; [Polarity: Horizontal]

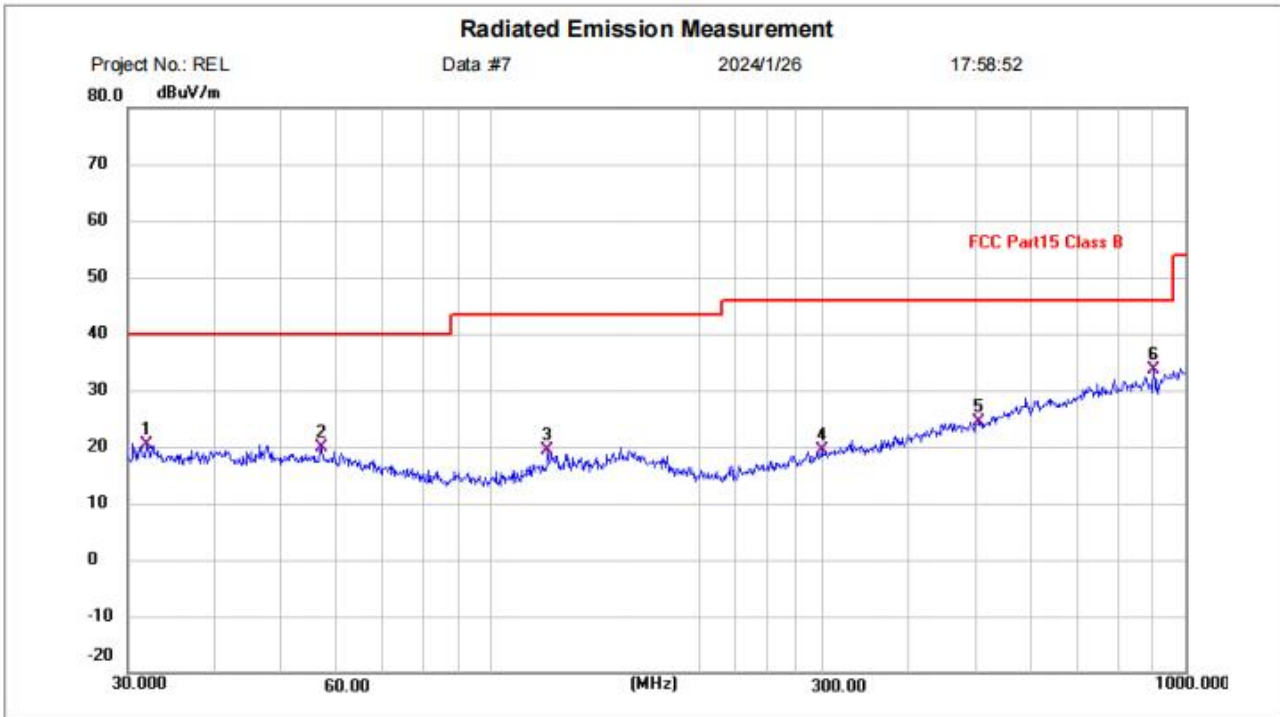


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 Class B Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81G
 Mode: TX-MODE
 Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	31.9545	1.68	18.82	20.50	40.00	-19.50	QP	P	
2	56.9912	0.66	19.26	19.92	40.00	-20.08	QP	P	
3	120.6991	1.57	17.73	19.30	43.50	-24.20	QP	P	
4	299.3158	0.05	19.34	19.39	46.00	-26.61	QP	P	
5	502.9395	0.63	23.87	24.50	46.00	-21.50	QP	P	
6 *	900.1474	2.89	30.72	33.61	46.00	-12.39	QP	P	

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

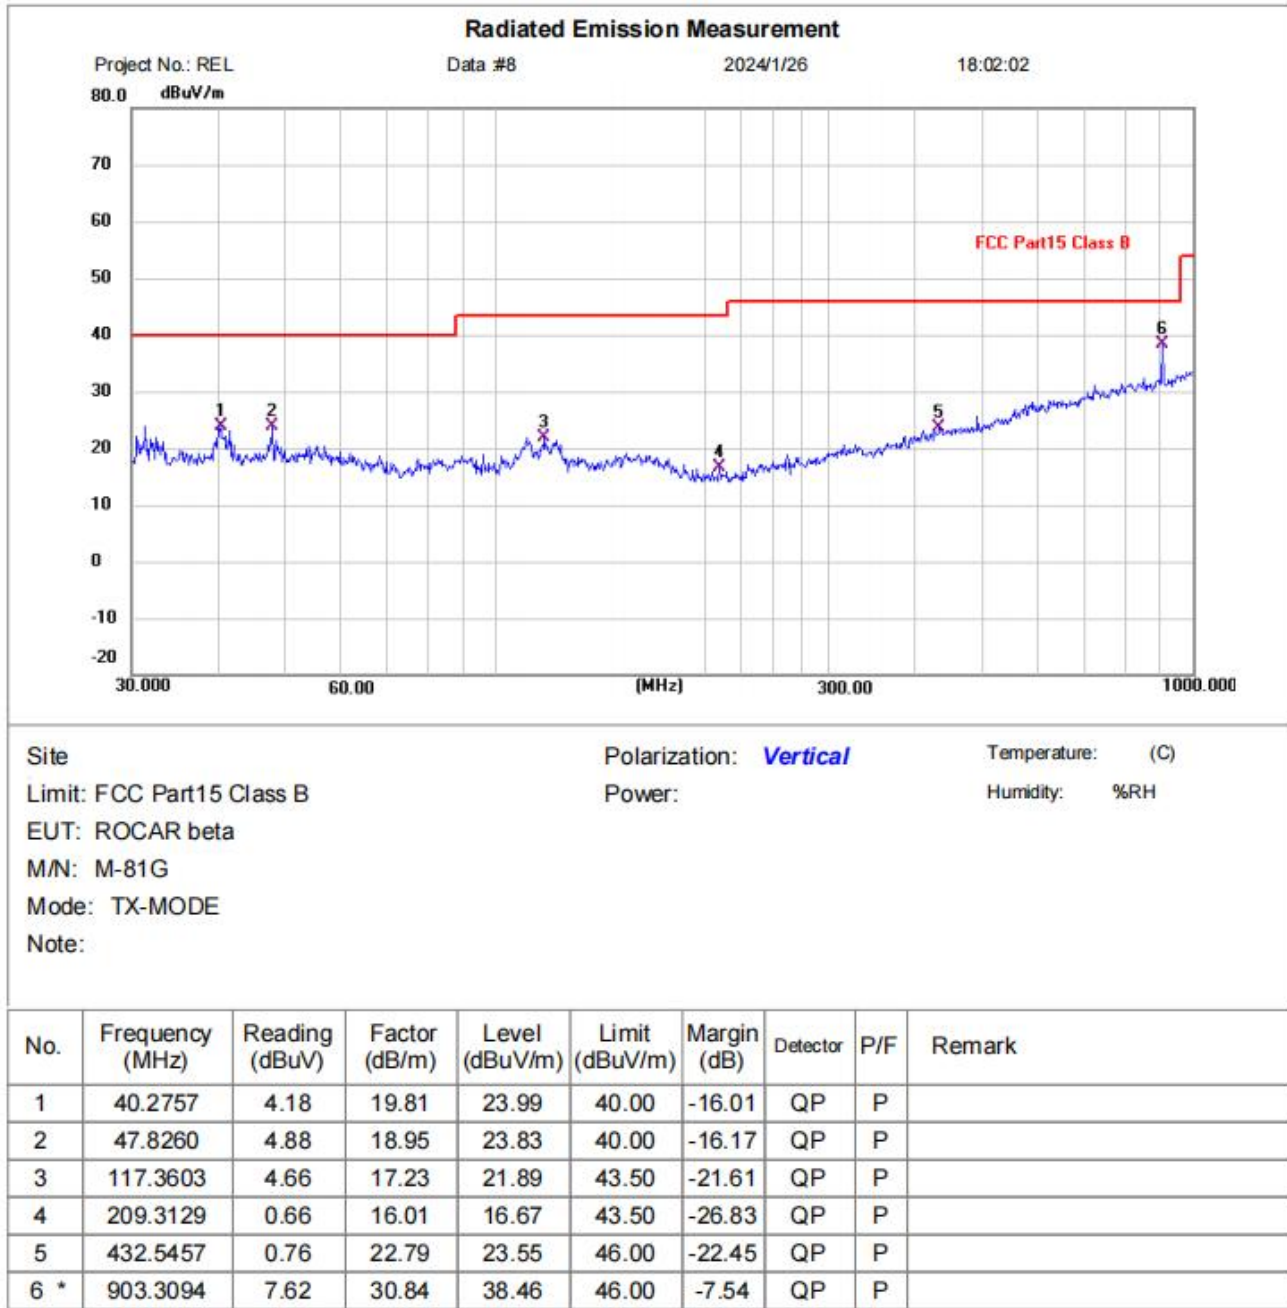


Test Result: Pass

Above 1GHz:

M-81B:

[TestMode: TX low channel]; [Polarity: Horizontal]

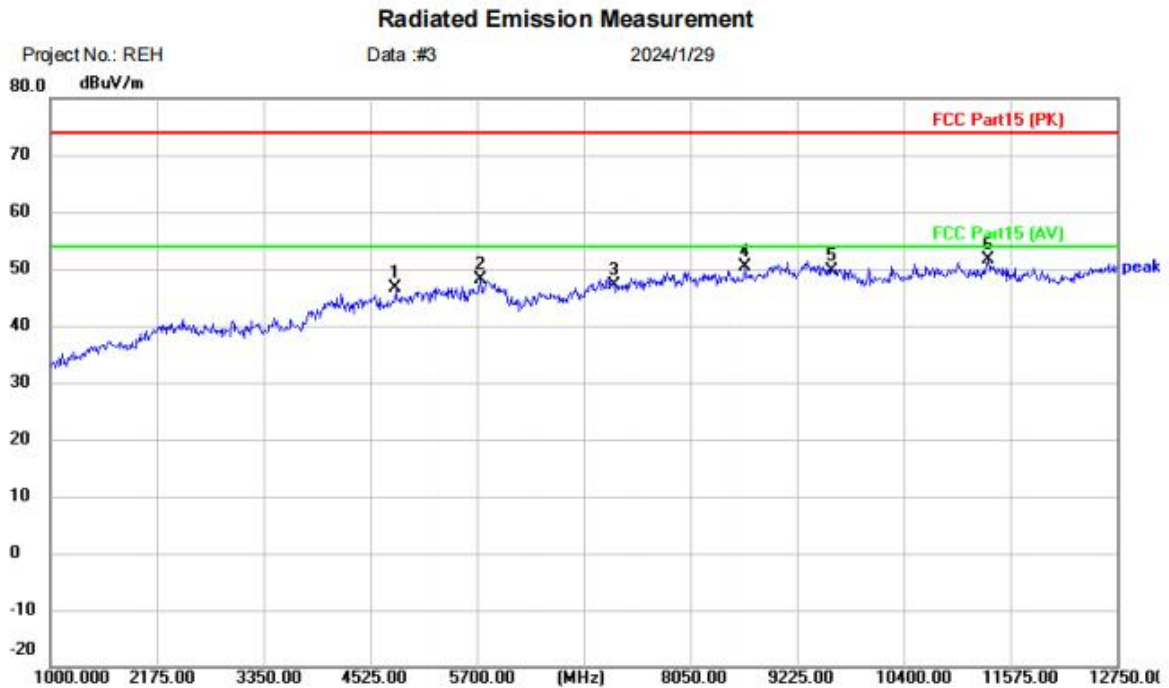


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	40.90	5.64	46.54	74.00	-27.46	peak	
2		5735.250	39.98	8.11	48.09	74.00	-25.91	peak	
3		7206.000	37.84	9.24	47.08	74.00	-26.92	peak	
4		8649.250	39.14	11.30	50.44	74.00	-23.56	peak	
5		9608.000	37.35	12.31	49.66	74.00	-24.34	peak	
6	*	11328.25	39.06	12.67	51.73	74.00	-22.27	peak	

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

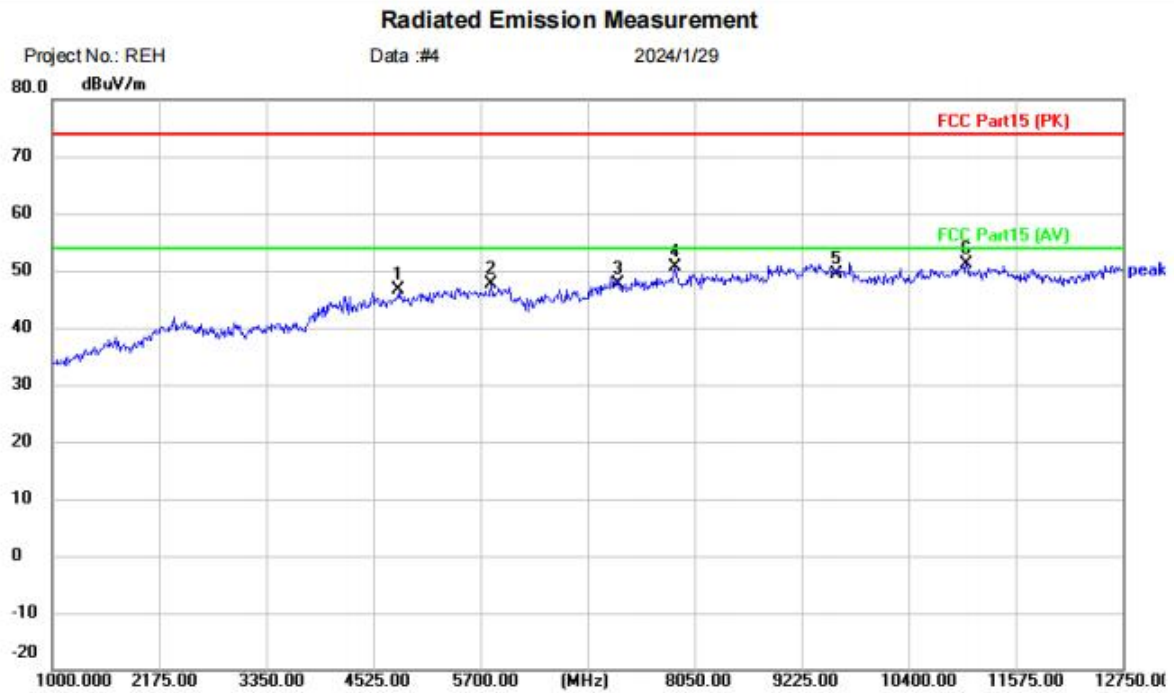


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	40.89	5.64	46.53	74.00	-27.47	peak	
2		5817.500	39.45	8.11	47.56	74.00	-26.44	peak	
3		7206.000	38.36	9.24	47.60	74.00	-26.40	peak	
4		7838.500	40.88	9.86	50.74	74.00	-23.26	peak	
5		9608.000	37.17	12.31	49.48	74.00	-24.52	peak	
6	*	11034.50	37.91	13.24	51.15	74.00	-22.85	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

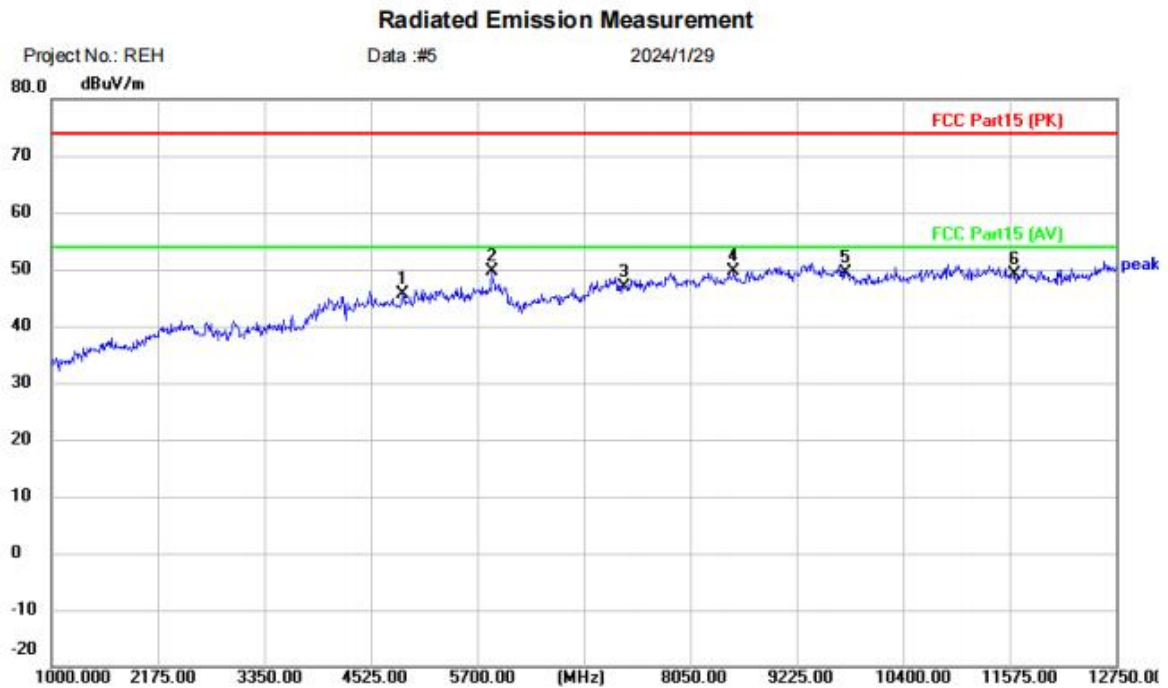


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2442
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4884.000	39.91	5.75	45.66	74.00	-28.34	peak	
2	*	5864.500	41.07	8.48	49.55	74.00	-24.45	peak	
3		7326.000	37.43	9.43	46.86	74.00	-27.14	peak	
4		8531.750	38.42	11.12	49.54	74.00	-24.46	peak	
5		9768.000	37.19	12.22	49.41	74.00	-24.59	peak	
6		11633.75	37.21	12.03	49.24	74.00	-24.76	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

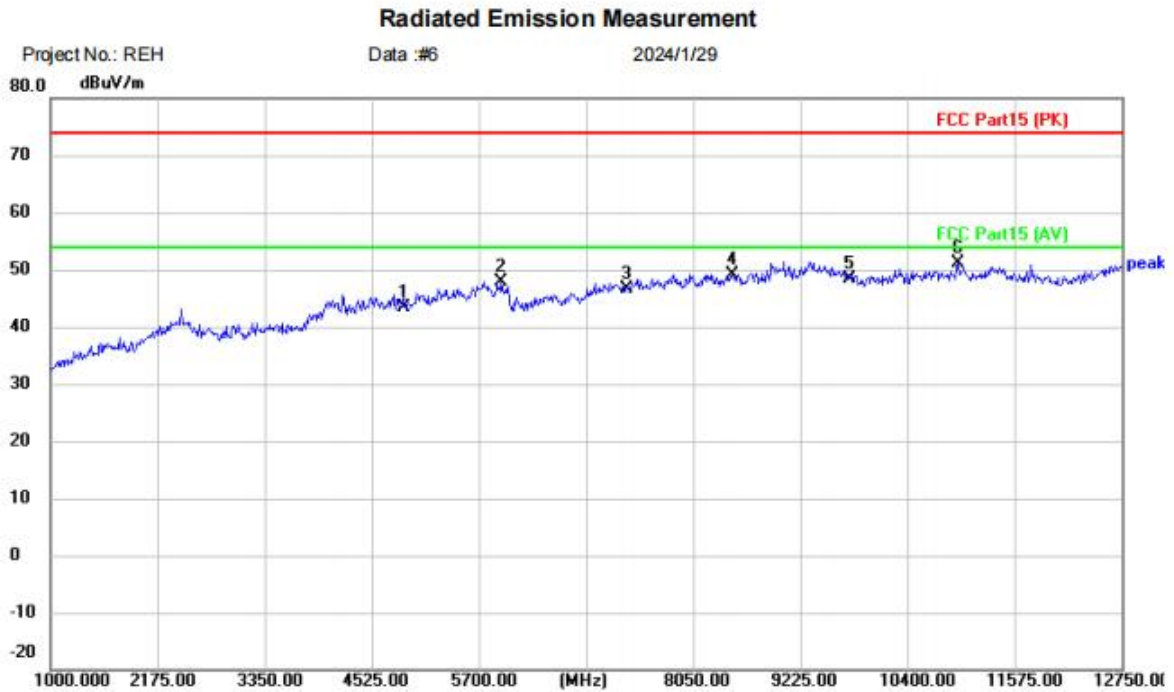


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2442
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4884.000	37.67	5.75	43.42	74.00	-30.58	peak	
2		5946.750	39.09	8.71	47.80	74.00	-26.20	peak	
3		7326.000	37.15	9.43	46.58	74.00	-27.42	peak	
4		8473.000	38.26	10.77	49.03	74.00	-24.97	peak	
5		9768.000	36.11	12.22	48.33	74.00	-25.67	peak	
6	*	10952.25	37.79	13.30	51.09	74.00	-22.91	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

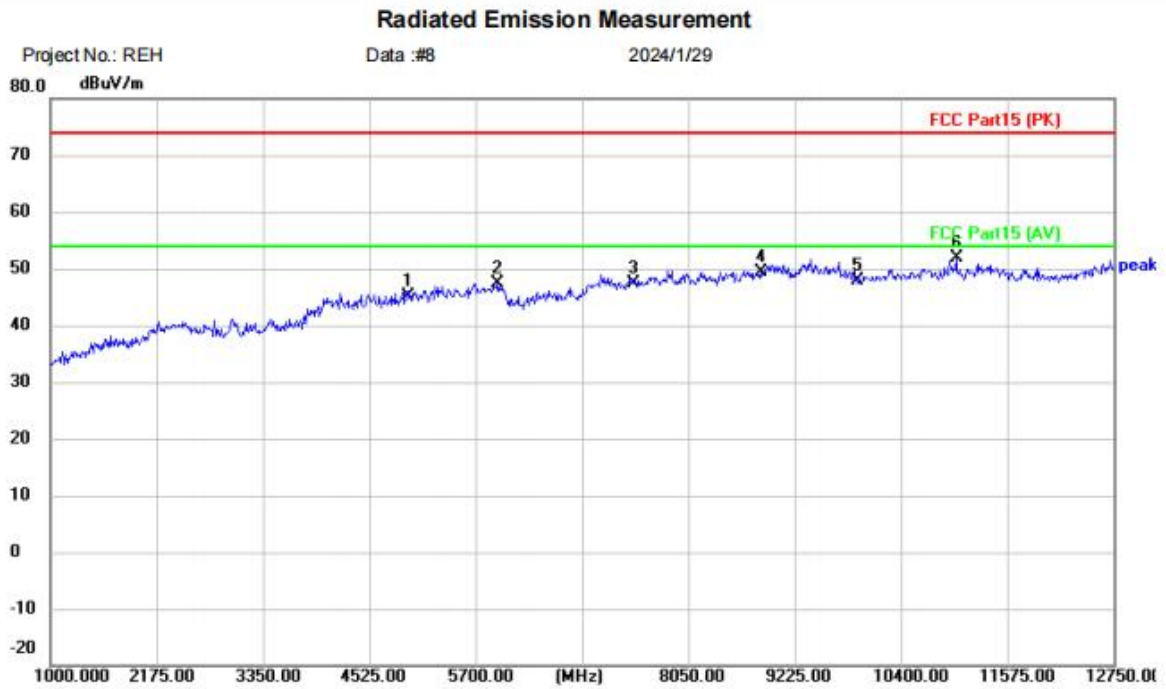


Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	38.58	6.60	45.18	74.00	-28.82	peak	
2		5946.750	38.61	8.71	47.32	74.00	-26.68	peak	
3		7440.000	37.78	9.64	47.42	74.00	-26.58	peak	
4		8849.000	37.63	11.77	49.40	74.00	-24.60	peak	
5		9920.000	35.64	12.14	47.78	74.00	-26.22	peak	
6	*	11011.00	38.42	13.40	51.82	74.00	-22.18	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

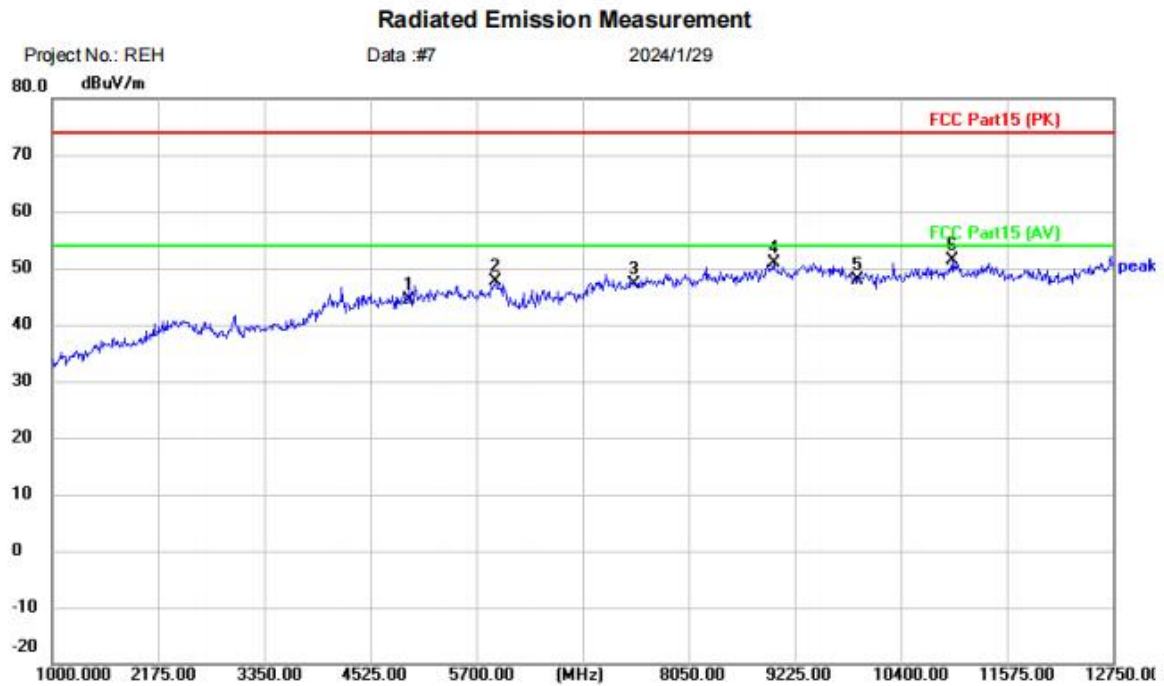


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	37.76	6.60	44.36	74.00	-29.64	peak	
2		5911.500	38.95	8.68	47.63	74.00	-26.37	peak	
3		7440.000	37.41	9.64	47.05	74.00	-26.95	peak	
4		8990.000	38.34	12.42	50.76	74.00	-23.24	peak	
5		9920.000	35.66	12.14	47.80	74.00	-26.20	peak	
6	*	10975.75	38.02	13.38	51.40	74.00	-22.60	peak	

Test Result: Pass

M-81G:

[TestMode: TX low channel]; [Polarity: Horizontal]

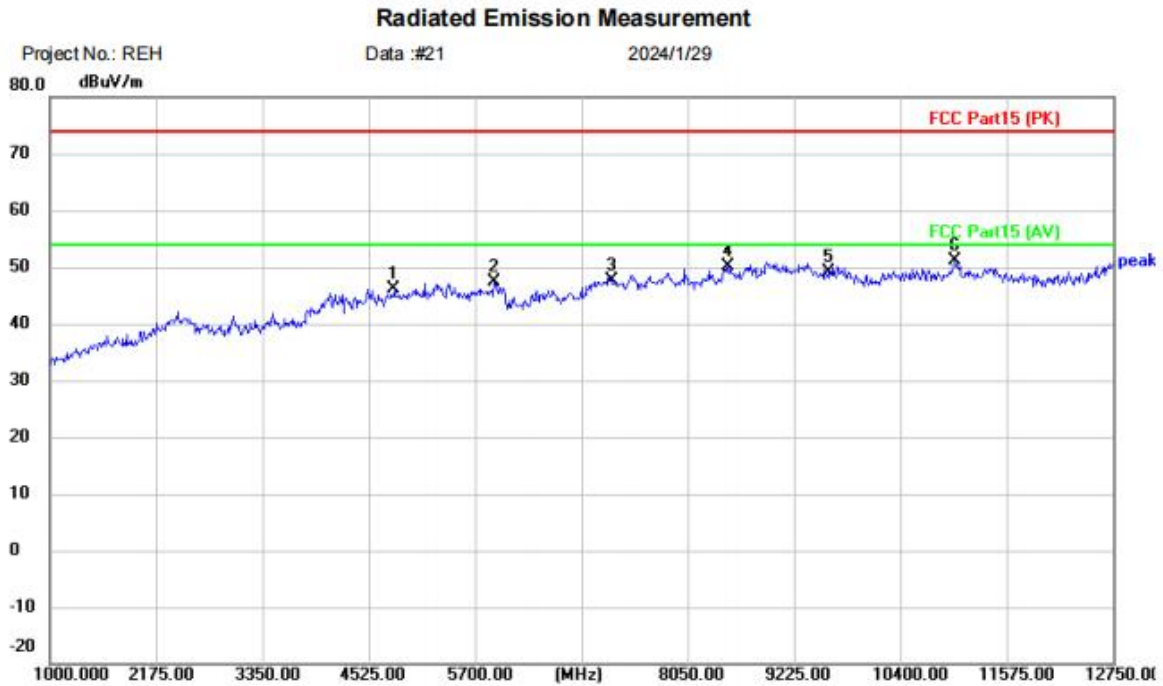


Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81G
 Mode: TX-2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	40.38	5.64	46.02	74.00	-27.98	peak	
2		5911.500	38.69	8.68	47.37	74.00	-26.63	peak	
3		7206.000	38.37	9.24	47.61	74.00	-26.39	peak	
4		8496.500	39.18	10.90	50.08	74.00	-23.92	peak	
5		9608.000	36.83	12.31	49.14	74.00	-24.86	peak	
6	*	10999.25	37.68	13.48	51.16	74.00	-22.84	peak	

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

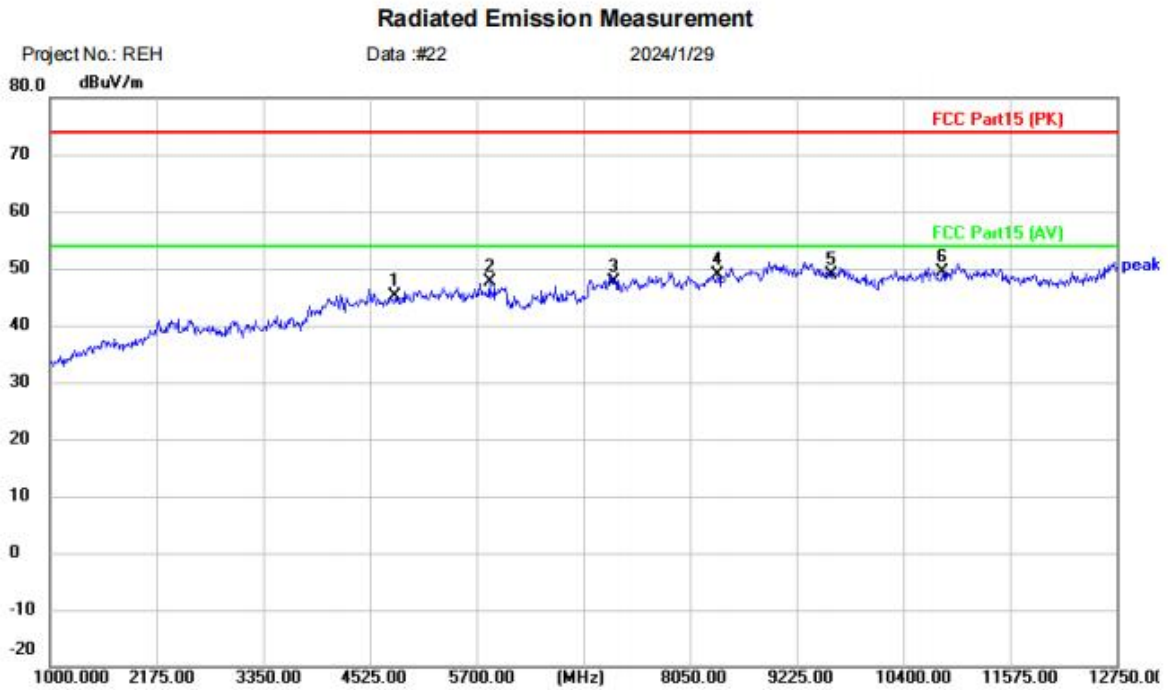


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81G
 Mode: TX-2402
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	39.60	5.64	45.24	74.00	-28.76	peak	
2		5841.000	39.39	8.31	47.70	74.00	-26.30	peak	
3		7206.000	38.49	9.24	47.73	74.00	-26.27	peak	
4		8355.500	38.84	10.15	48.99	74.00	-25.01	peak	
5		9608.000	36.68	12.31	48.99	74.00	-25.01	peak	
6	*	10834.75	36.53	12.91	49.44	74.00	-24.56	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

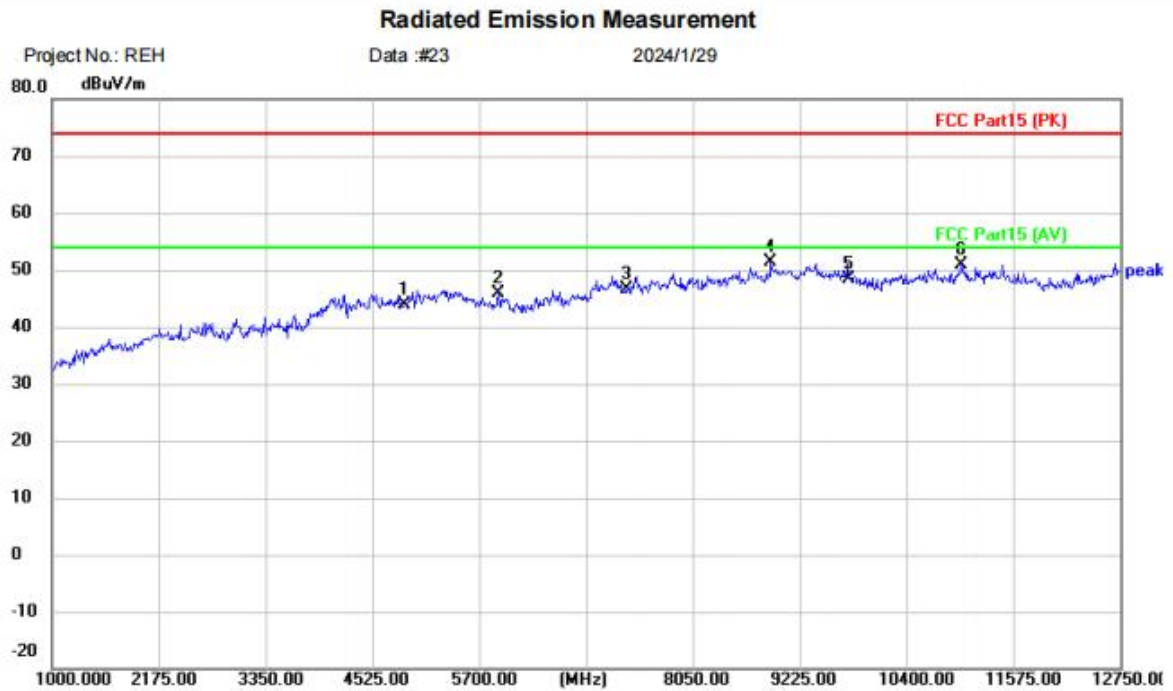


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81G
 Mode: TX-2442
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4884.000	38.14	5.75	43.89	74.00	-30.11	peak	
2		5911.500	37.32	8.68	46.00	74.00	-28.00	peak	
3		7326.000	37.09	9.43	46.52	74.00	-27.48	peak	
4	*	8907.750	39.22	12.10	51.32	74.00	-22.68	peak	
5		9768.000	36.10	12.22	48.32	74.00	-25.68	peak	
6		10999.25	37.52	13.48	51.00	74.00	-23.00	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

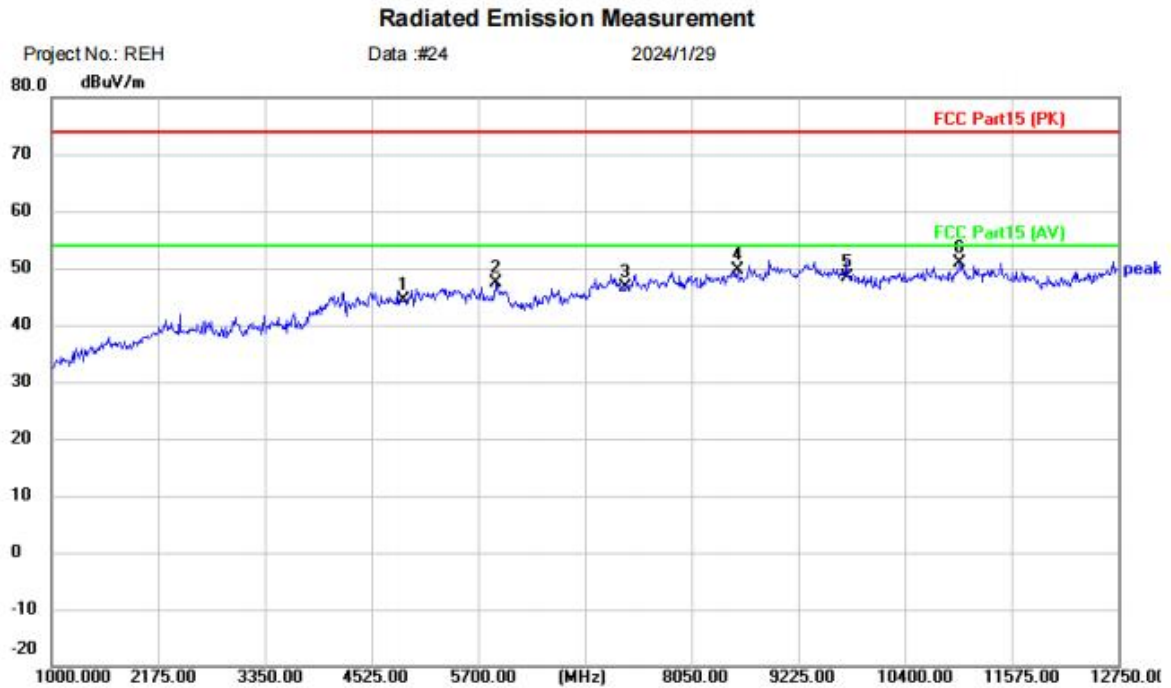


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81G
 Mode: TX-2442
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4884.000	38.64	5.75	44.39	74.00	-29.61	peak	
2		5888.000	38.77	8.60	47.37	74.00	-26.63	peak	
3		7326.000	37.09	9.43	46.52	74.00	-27.48	peak	
4		8555.250	38.31	11.20	49.51	74.00	-24.49	peak	
5		9768.000	36.10	12.22	48.32	74.00	-25.68	peak	
6	*	10999.25	37.52	13.48	51.00	74.00	-23.00	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

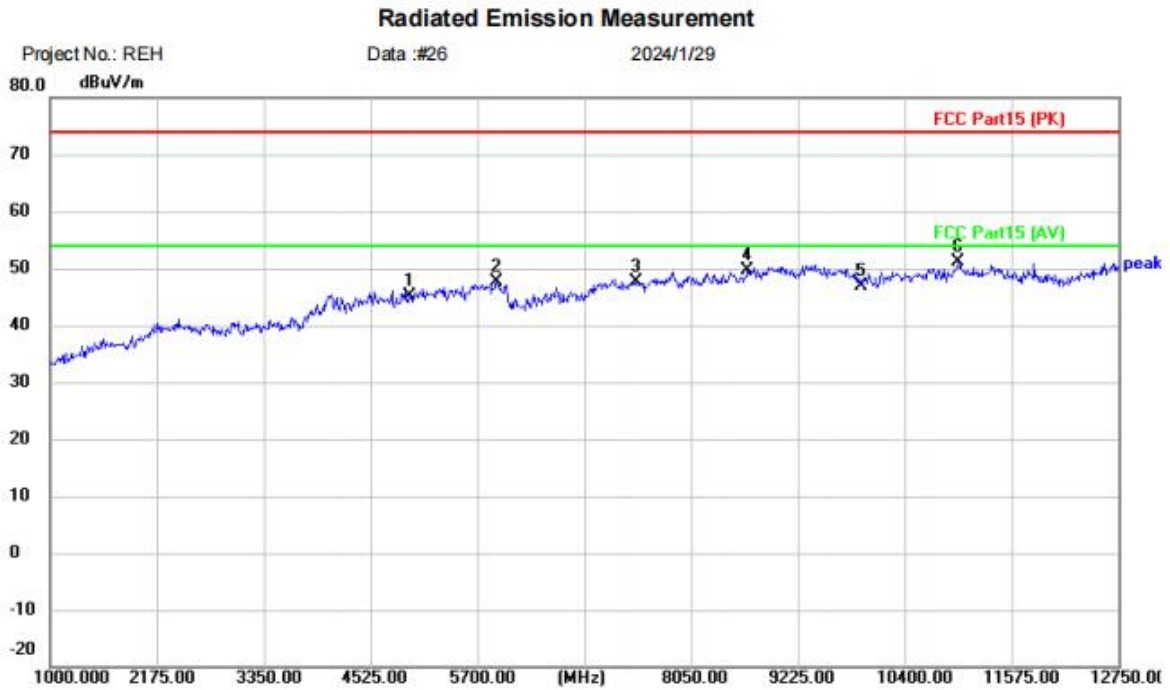

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81G
 Mode: TX-2480
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	38.59	6.60	45.19	74.00	-28.81	peak	
2		5911.500	38.89	8.68	47.57	74.00	-26.43	peak	
3		7440.000	37.91	9.64	47.55	74.00	-26.45	peak	
4		8672.750	38.18	11.40	49.58	74.00	-24.42	peak	
5		9920.000	34.83	12.14	46.97	74.00	-27.03	peak	
6	*	10987.50	37.72	13.44	51.16	74.00	-22.84	peak	

Test Result: Pass

14 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


14.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is contacted by a thimble needle and no consideration of replacement. The best case gain of the antenna is 0dBi

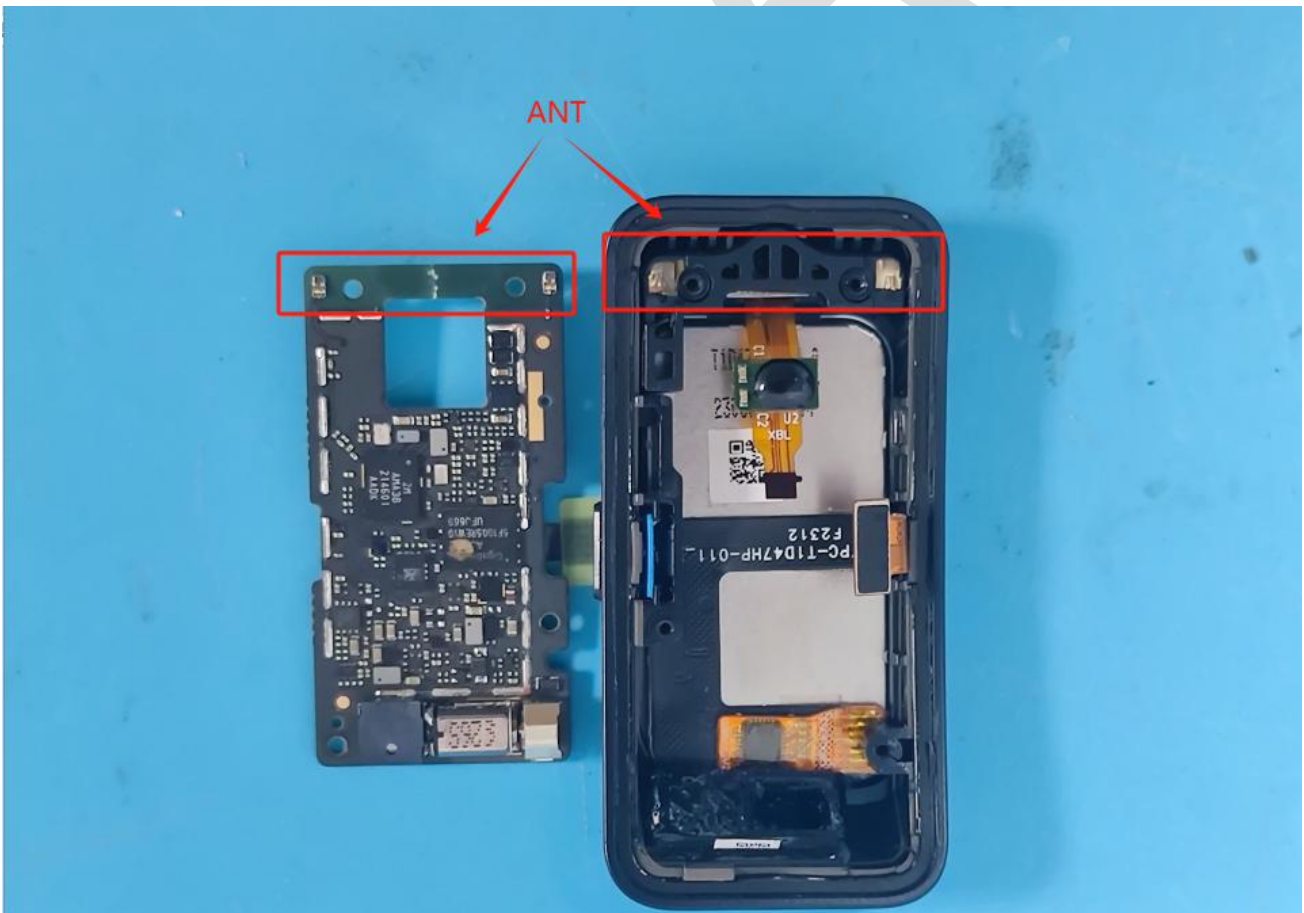

15 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

15.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

15.2 BLOCK DIAGRAM OF TEST SETUP

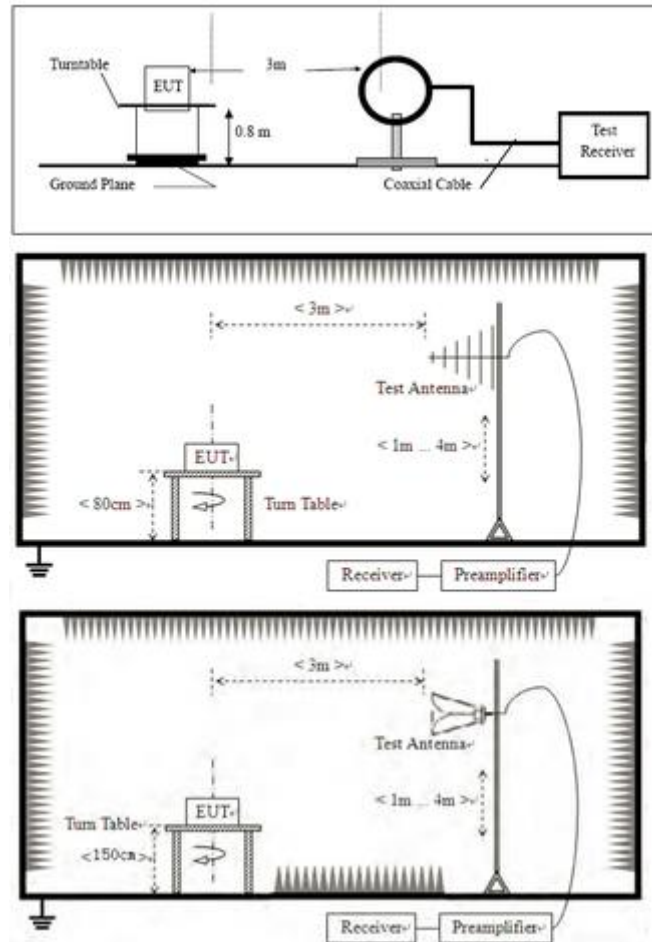

15.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

15.4 TEST DATA

M-81B:

[TestMode: TX low channel]; [Polarity: Horizontal]

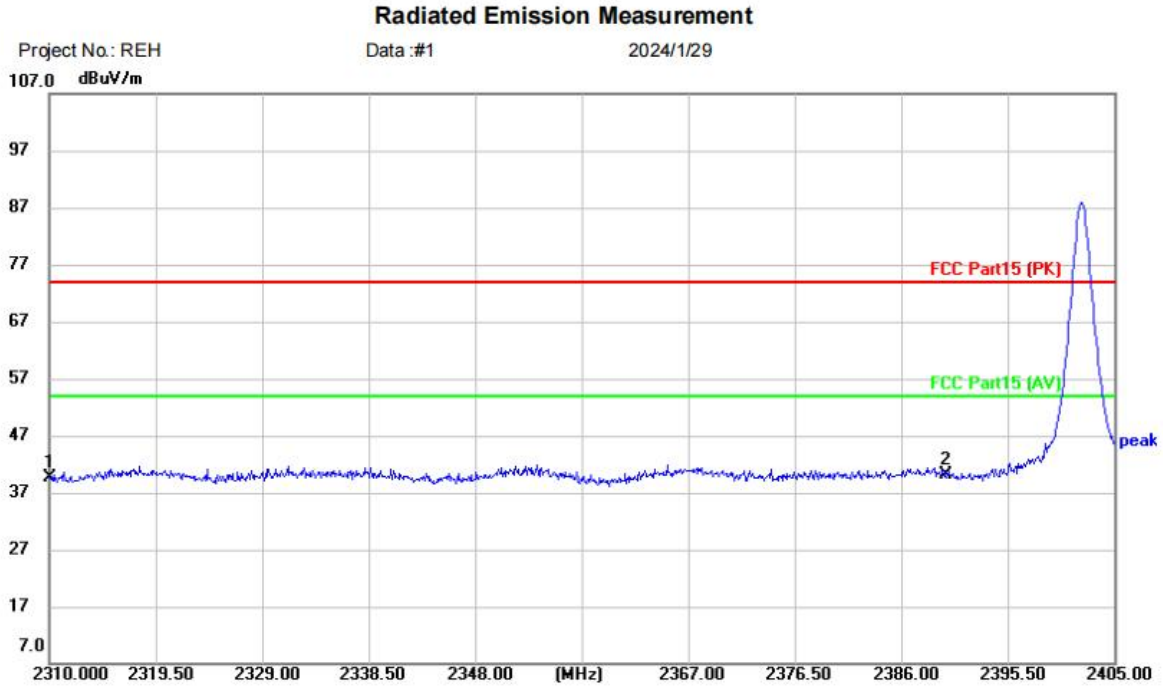


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: ROCAR beta		
M/N: M-81B		
Mode: TX-2402		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.46	-2.89	39.57	74.00	-34.43	peak	
2	*	2390.000	42.82	-2.70	40.12	74.00	-33.88	peak	

Test Result: Pass

[TestMode:TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

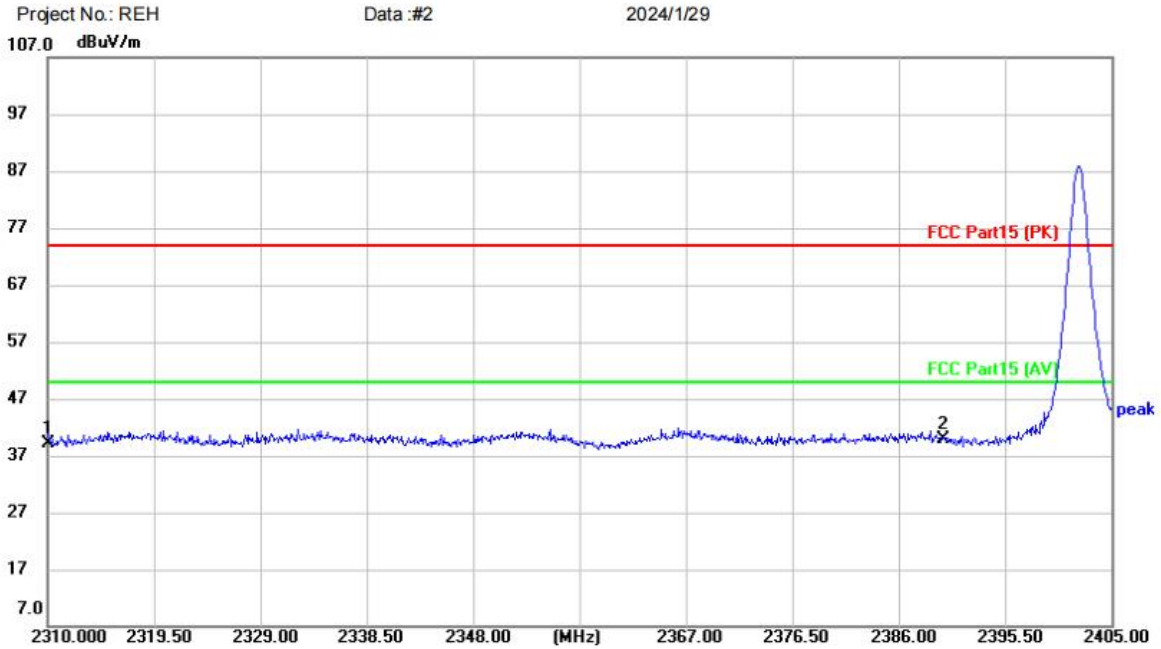


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2402
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	42.00	-2.89	39.11	74.00	-34.89	peak	
2	*	2390.000	42.68	-2.70	39.98	74.00	-34.02	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

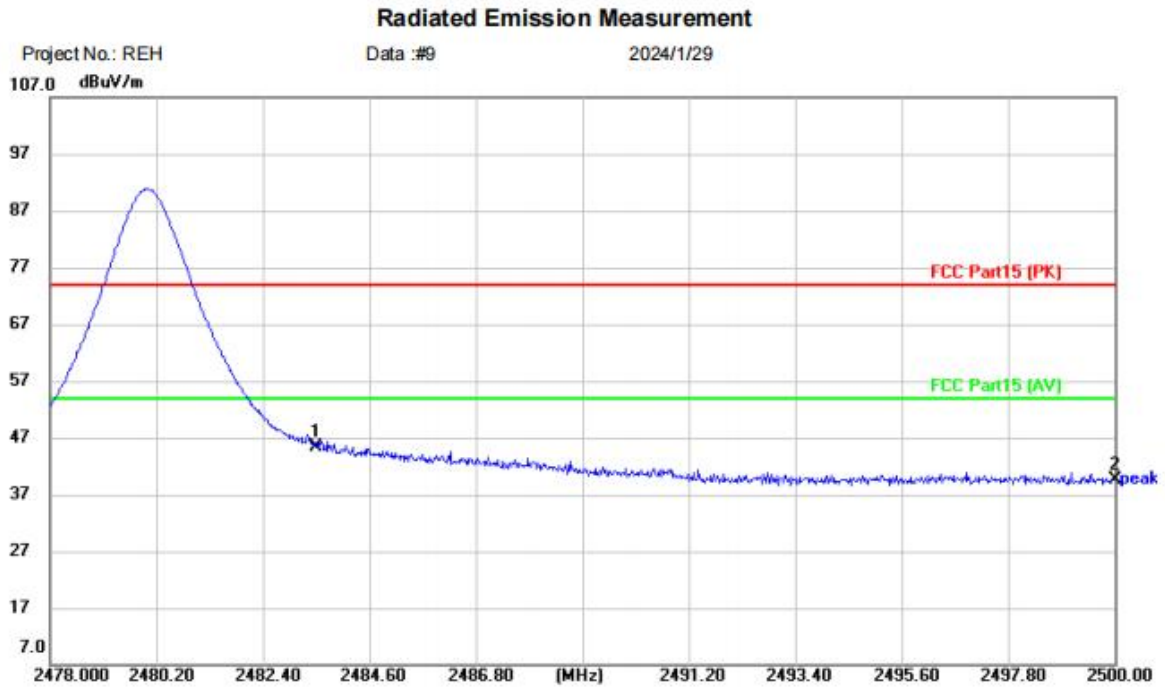


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	48.32	-2.91	45.41	74.00	-28.59	peak	
2		2500.000	42.69	-3.00	39.69	74.00	-34.31	peak	

Test Result: Pass

[TestMode:TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

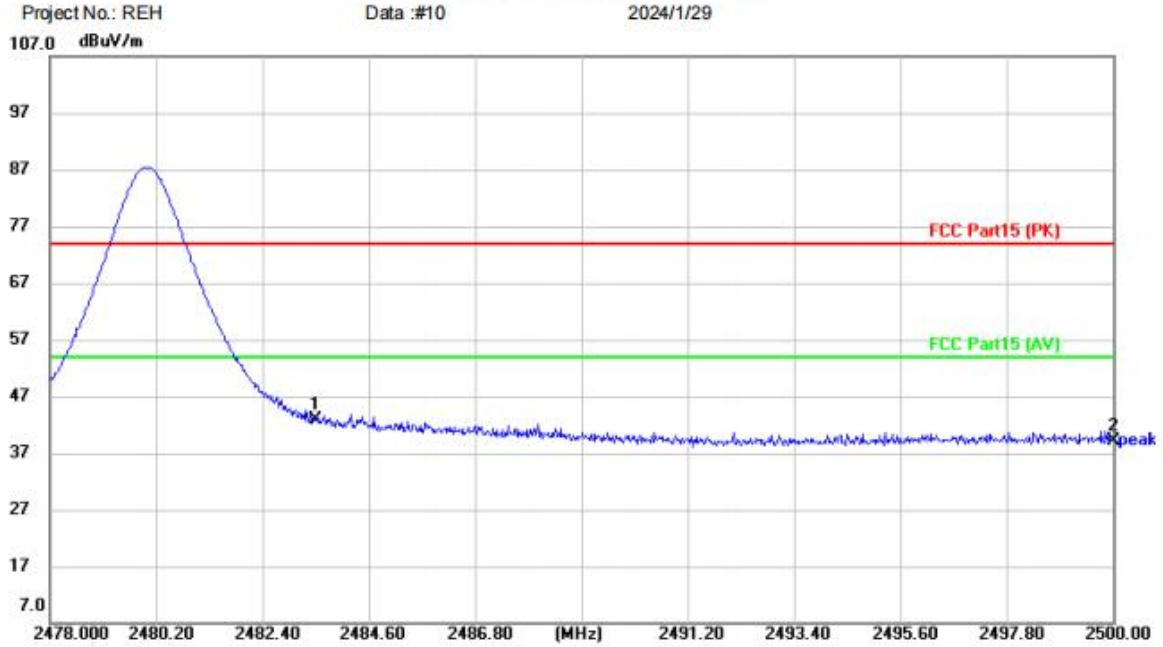


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81B
 Mode: TX-2480
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	45.81	-2.91	42.90	74.00	-31.10	peak	
2		2500.000	42.06	-3.00	39.06	74.00	-34.94	peak	

Test Result: Pass

M-81G:

[TestMode: TX low channel]; [Polarity: Horizontal]

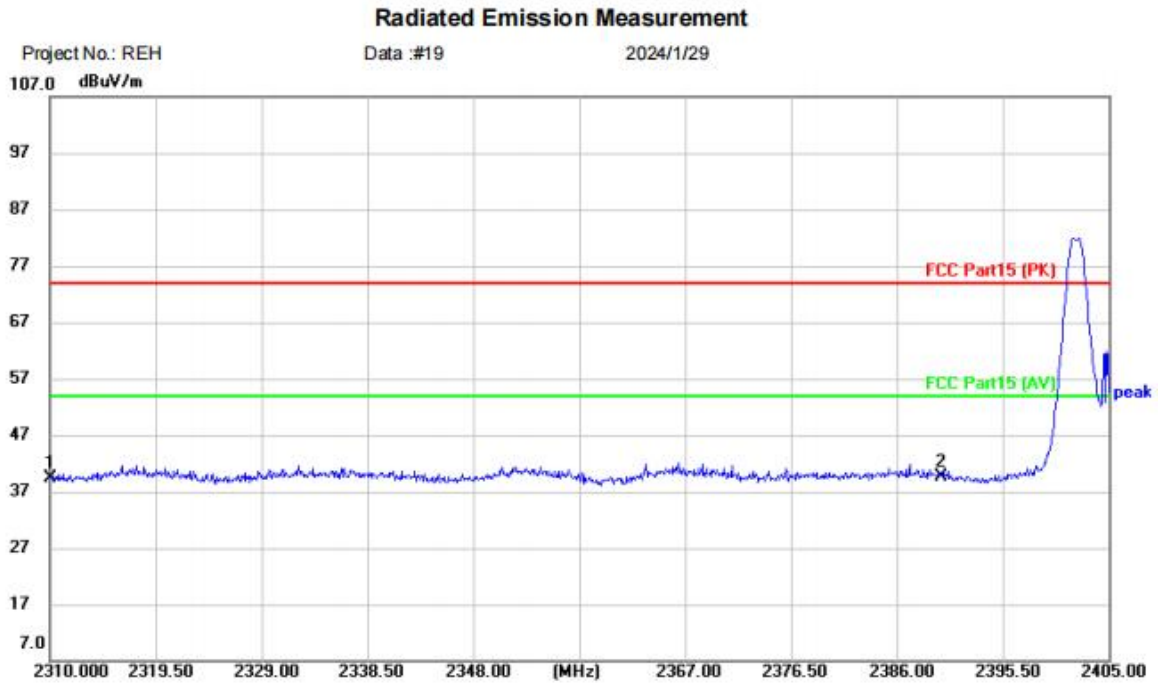


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: ROCAR beta		
M/N: M-81G		
Mode: TX-2402		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	42.17	-2.89	39.28	74.00	-34.72	peak	
2	*	2390.000	42.33	-2.70	39.63	74.00	-34.37	peak	

Test Result: Pass

[TestMode:TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

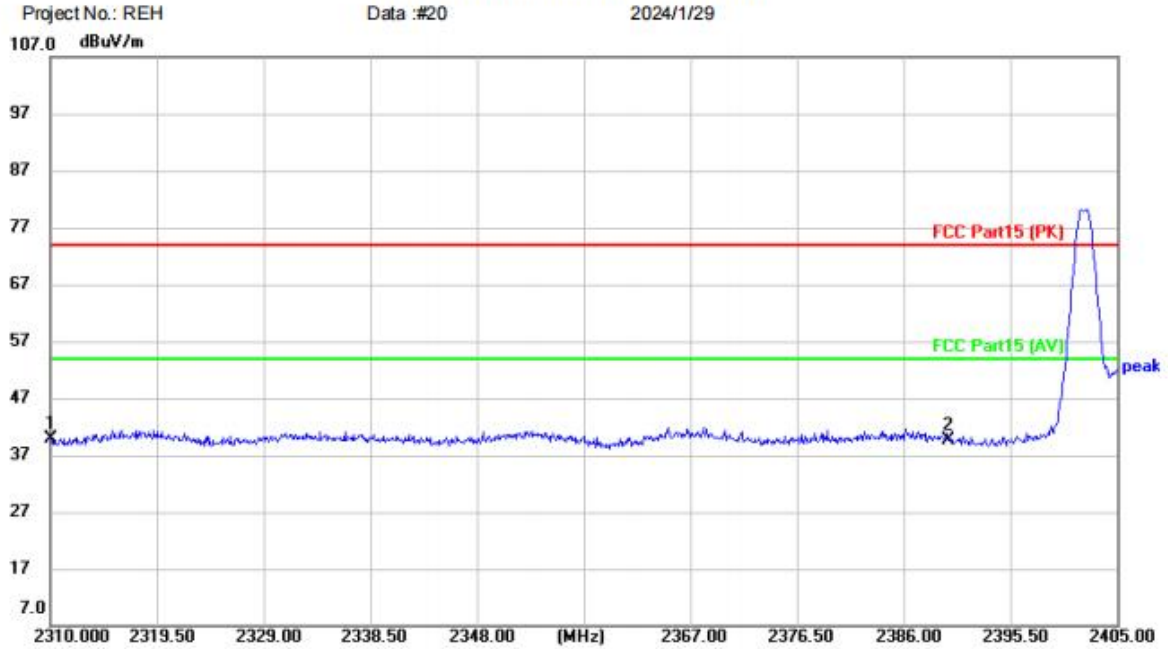


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81G
 Mode: TX-2402
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2310.000	42.88	-2.89	39.99	74.00	-34.01	peak	
2		2390.000	42.29	-2.70	39.59	74.00	-34.41	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

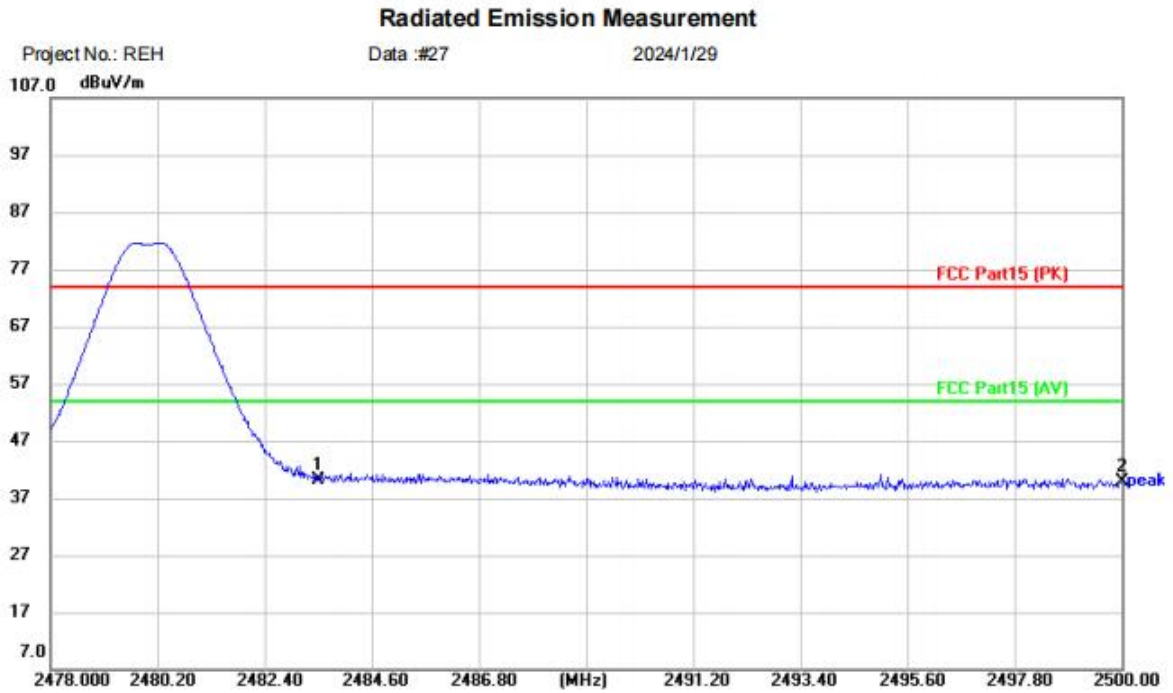


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: ROCAR beta		
M/N: M-81G		
Mode: TX-2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	42.94	-2.91	40.03	74.00	-33.97	peak	
2		2500.000	42.80	-3.00	39.80	74.00	-34.20	peak	

Test Result: Pass

[TestMode:TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

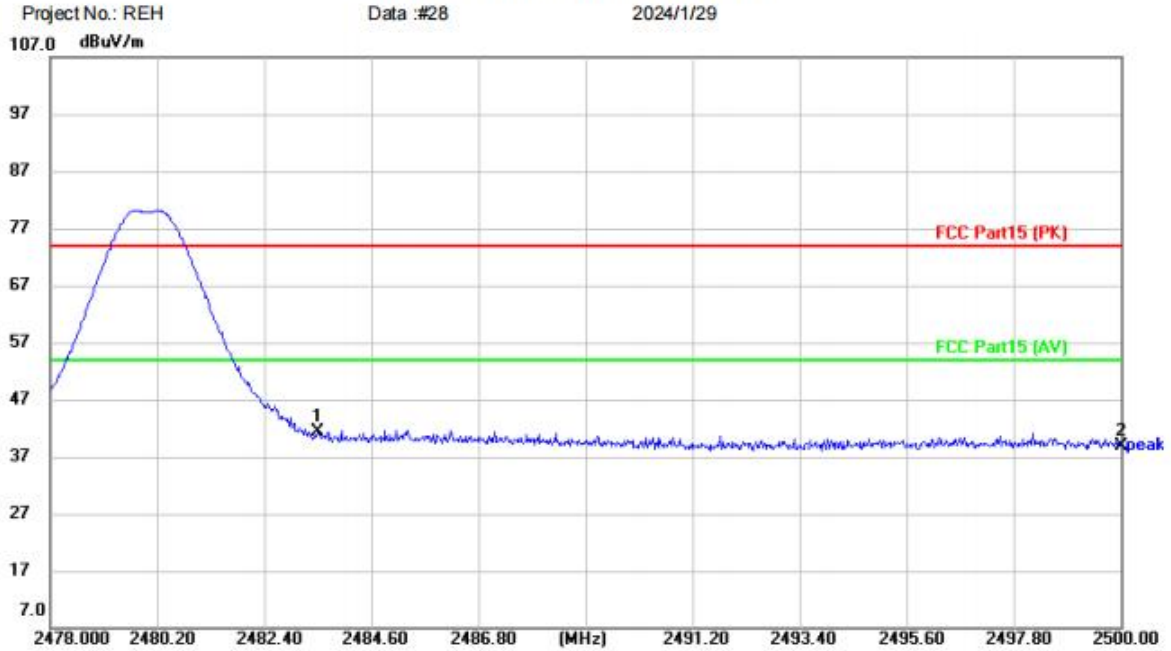

Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: ROCAR beta
 M/N: M-81G
 Mode: TX-2480
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	44.39	-2.91	41.48	74.00	-32.52	peak	
2		2500.000	41.82	-3.00	38.82	74.00	-35.18	peak	

Test Result: Pass


16 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

16.2 BLOCK DIAGRAM OF TEST SETUP

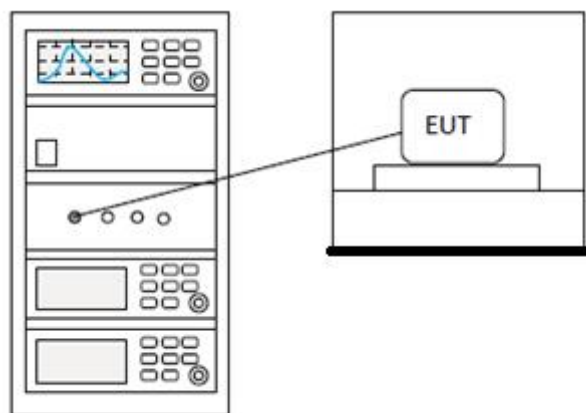

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


17 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

17.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

17.2 BLOCK DIAGRAM OF TEST SETUP

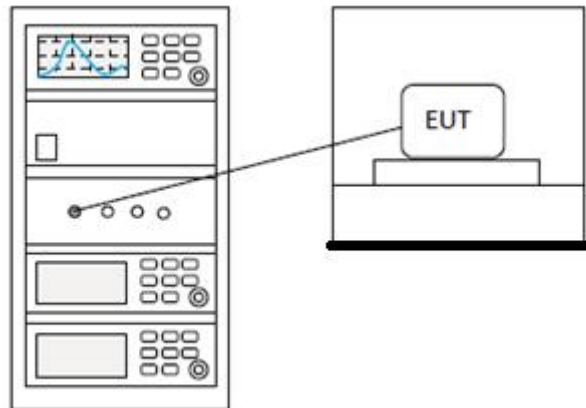

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


18 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

18.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

18.2 BLOCK DIAGRAM OF TEST SETUP

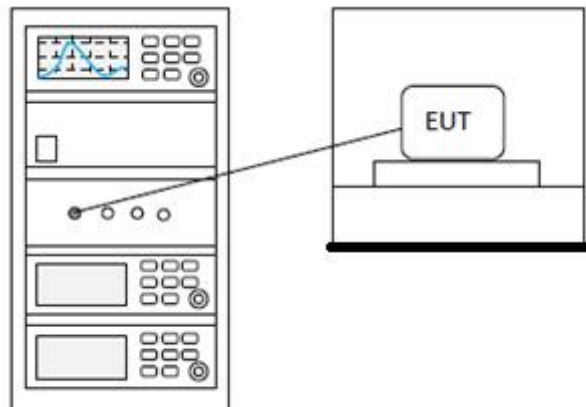

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


19 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

19.1 LIMITS

Limit:	≥500 kHz
--------	----------

19.2 BLOCK DIAGRAM OF TEST SETUP

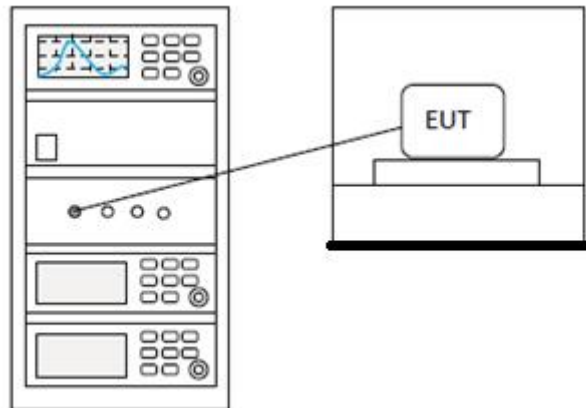

19.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


20 APPENDIX

Appendix1


20.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	2.502	30	Pass
NVNT	BLE 1M	2442	Ant1	2.768	30	Pass
NVNT	BLE 1M	2480	Ant1	2.377	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

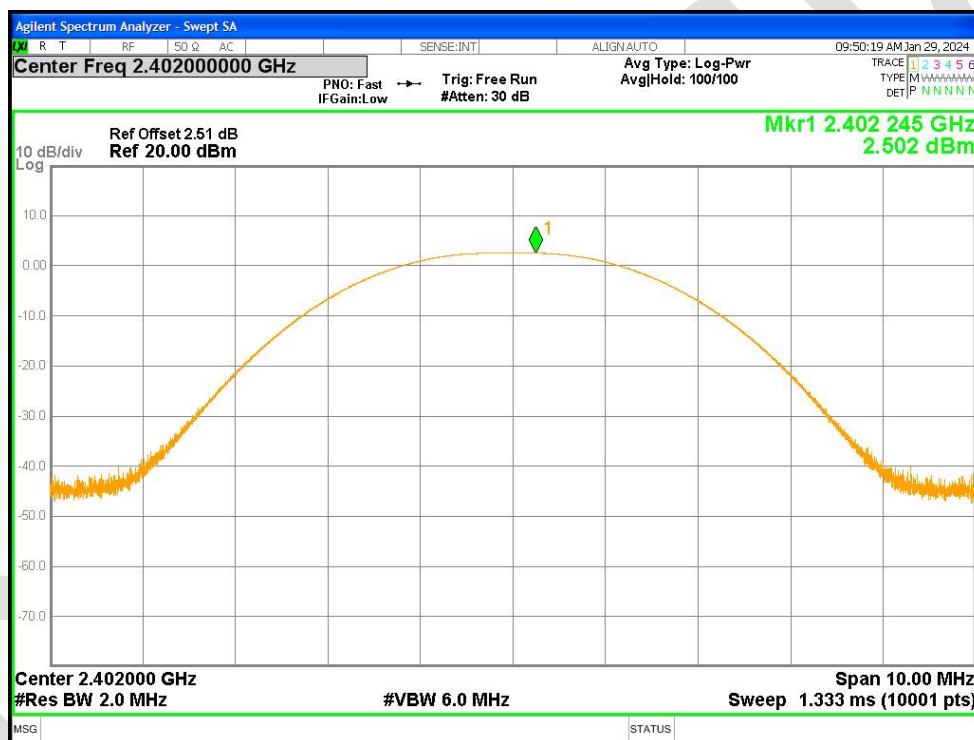

Power NVNT BLE 1M 2442MHz Ant1

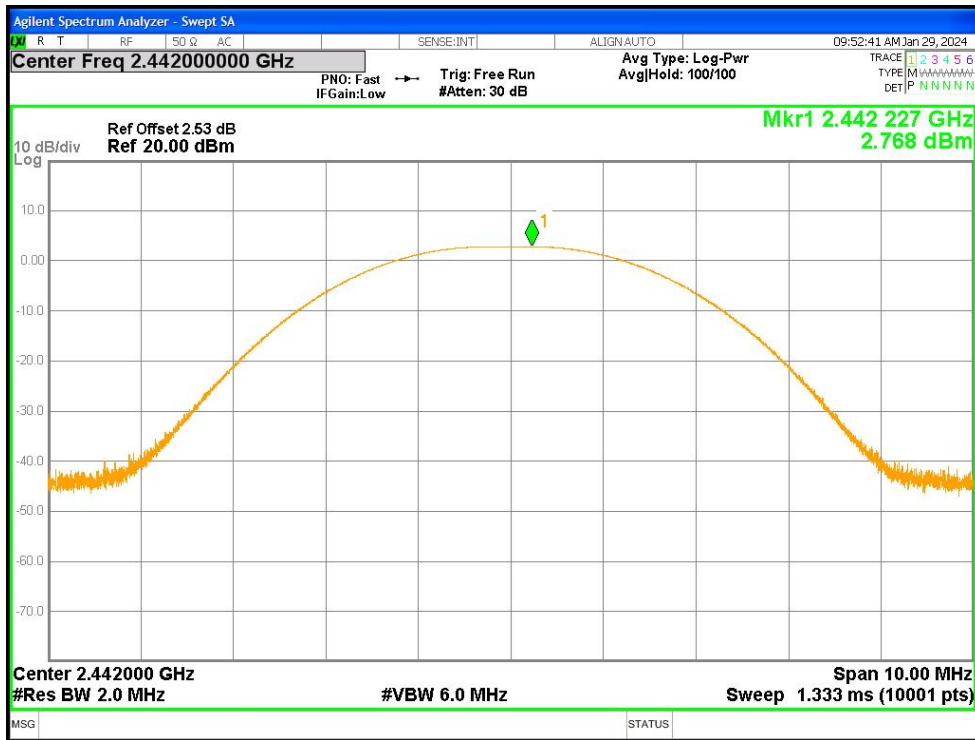


Power NVNT BLE 1M 2480MHz Ant1

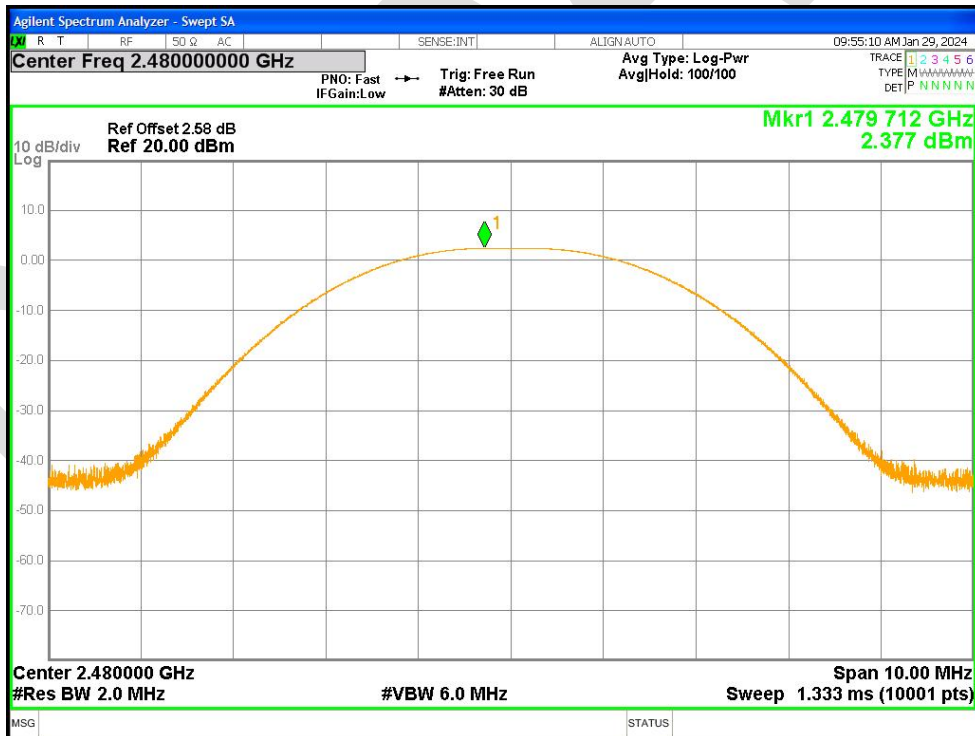


20.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.713	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.715	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.738	0.5	Pass

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

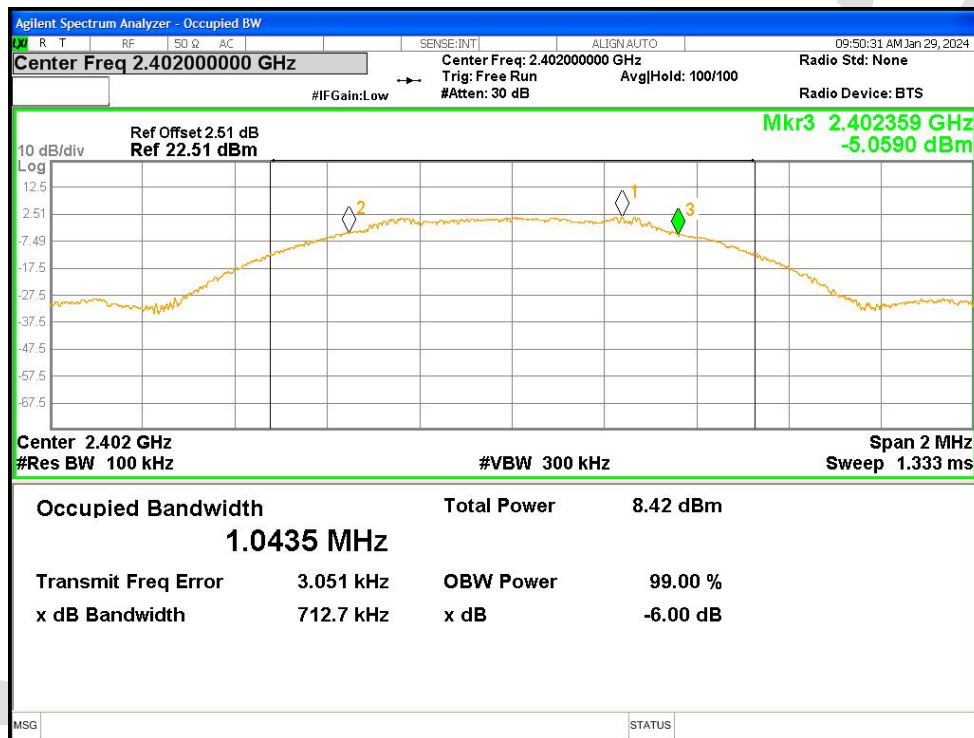

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

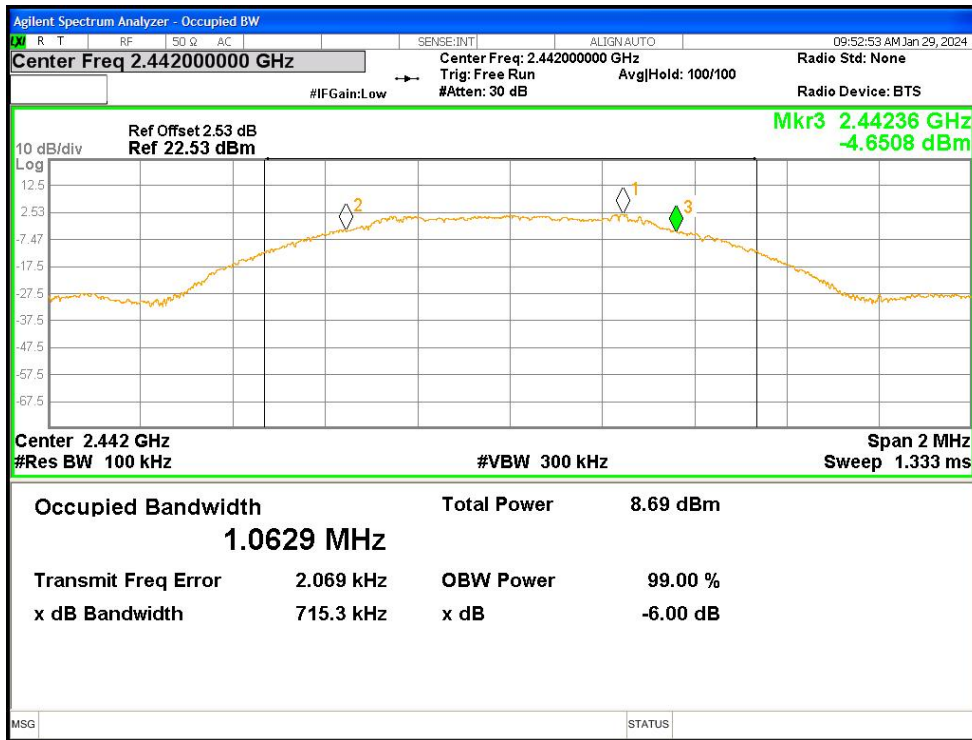

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

