

FCC TEST REPORT

For

Digital Multimeter

Model Number: DT-9969

FCC ID: WIGDT9969

Report Number : WT138004021

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection

National Digital Electronic Product Testing Center

Site Location : No.4 TongFa Road, Xili Town, Nanshan District,
Shenzhen, China

Tel : 0086-755-86009898

Fax : 0086-755-86009898-31396

Web : www.smq.com.cn

Test report declaration

Applicant : SHENZHEN EVERBEST MACHINERY INDUSTRY CO., LTD
Address : 19th Building, 5th Region, Baiwangxin Industrial Park, Songbai Rd., Baimang, Xili, Nanshan, Shenzhen, China
Manufacturer : SHENZHEN EVERBEST MACHINERY INDUSTRY CO., LTD
Address : 19th Building, 5th Region, Baiwangxin Industrial Park, Songbai Rd., Baimang, Xili, Nanshan, Shenzhen, China
EUT Description : Digital Multimeter
Model No : DT-9969
Trade mark : CEM
FCC ID : WIGDT9969

Test Standards:

FCC Part 15 (10-1-12 Edition)

ANSI C63.4-2009

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.207, 15.209 and 15.247.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:  Date: Dec.27,2013
(Chen Qichun)
Checked by:  Date: Dec.27,2013
(Yang Dongping)
Approved by:  Date: Dec.27,2013
(Lin Bin)

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY	5
2. GENERAL INFORMATION	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty.....	7
3. PRODUCT DESCRIPTION	8
3.1. EUT Description.....	8
3.2. Related Submittal(s) / Grant (s)	8
3.3. Block Diagram of EUT Configuration	8
3.4. Operating Condition of EUT.....	8
3.5. Support Equipment List	8
3.6. Test Conditions.....	9
3.7. Special Accessories	9
3.8. Equipment Modifications	9
4. TEST EQUIPMENT USED	10
5. CONDUCTED DISTURBANCE TEST.....	11
5.1. Test Standard and Limit	11
5.2. Test Procedure	11
5.3. Test Arrangement.....	11
5.4. Test Data	11
6. RADIATED DISTURBANCE TEST	12
6.1. Test Standard and Limit	12
6.2. Test Procedure	12
6.3. Test Arrangement.....	12
6.4. Test Data	13
7. 20DB BANDWIDTH MEASUREMENT.....	17
7.1. Limits of 20dB Bandwidth Measurement.....	17
7.2. Test Procedure	17
7.3. Test Setup	17

7.4.	Test Data	17
8.	CARRIER FREQUENCY SEPARATION MEASUREMENT	20
8.1.	Limits of Carrier Frequency Separation Measurement	20
8.2.	Test Procedures	20
8.3.	Test Setup	20
8.4.	Test Data	20
9.	NUMBER OF HOPPING CHANNEL.....	22
9.1.	Limits of Number of Hopping Channel	22
9.2.	Test Procedure	22
9.3.	Test Setup	22
9.4.	Test Data	22
10.	TIME OF OCCUPANCY.....	24
10.1.	Limits of Time of Occupancy	24
10.2.	Test Procedure	24
10.3.	Test Setup	24
10.4.	Test Results	25
11.	PEAK POWER.....	29
11.1.	Limits of Peak Power	29
11.2.	Test Procedure	29
11.3.	Test Results	29
12.	BAND EDGES MEASUREMENT	32
12.1.	Limits of Band Edges Measurement	32
12.2.	TEST PROCEDURE.....	32
12.3.	Test Results	32
13.	CONDUCTED SPURIOUS EMISSIONS	35
13.1.	Limits of Band Edges Measurement	35
13.2.	Test Procedure	35
13.3.	TEST RESULTS.....	35
14.	ANTENNA REQUIREMENT.....	40

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test
20dB bandwidth measurement	15.247 (a) (1)	Pass
Carrier frequency separation measurement	15.247 (a) (1)	Pass
Number of hopping channel	15.247 (a) (1) III	Pass
Time of occupancy	15.247 (a) (1) III	Pass
Peak output power	15.247 (b) (1)	Pass
Band edge compliance measurement	15.247 (d)	Pass
Radiated spurious emission & Radiated restricted band measurement	15.247 (d) / 15.205 & 15.209	Pass
Conducted emission test for power port	15.207	N/A
Antenna Requirement	15.203	Pass

Remark: “ N/A” means “ Not applicable.”

2. GENERAL INFORMATION

2.1. Report information

2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at No.4 TongFa Road, Xili Town, Nanshan District, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 446246 806614 994606(semi anechoic chamber).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

2.3.Measurement Uncertainty

Conducted Emission

9kHz~30MHz 3.5dB

Radiated Emission

30MHz~1000MHz 4.5dB

1GHz~26GHz 4.6dB

3. PRODUCT DESCRIPTION

3.1.EUT Description

Description : Digital Multimeter
Manufacturer : SHENZHEN EVERBEST MACHINERY INDUSTRY CO., LTD
Model Number : DT-9969
Operate Frequency : 2.402GHz~2.480GHz
Antenna Designation : PCB Antenna

3.2.Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: WIGDT9969, filing to comply with Section 15.207 , 15.209 , 15.247 of the FCC Part 15, Subpart C Rules.

3.3.Block Diagram of EUT Configuration




Figure 1 EUT setup

3.4.Operating Condition of EUT

Test Mode 1: Bluetooth

3.5.Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
--	--	--	--
--	--	--	--

3.6. Test Conditions

Date of test: Dec.23, 2013-Dec.25, 2013

Date of EUT Receive: Dec.20, 2013

Temperature: (20-21)°C

Relative Humidity: (37-39)%

3.7. Special Accessories

Not available for this EUT intended for grant.

3.8. Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	May.17, 2013	1 Year
SB9060	Spectrum analyzer	Rohde & Schwarz	FSQ40	May.17, 2013	1 Year
SB3955	Broadband antenna	SCHWARZBECK	VULB9163	Jan.21, 2013	1 Year
SB8501/01	Horn Antenna	Rohde & Schwarz	HF907	May.14, 2013	1 Year
SB8501/10	Horn Antenna	Rohde & Schwarz	3160-09	May.14, 2013	3 Years
SB8501/12	Horn Antenna	Rohde & Schwarz	3160-10	May.14, 2013	3 Years
SB8501/17	Preamplifier	Rohde & Schwarz	SCU-18	May.14, 2013	1 Year
SB8501/16	Preamplifier	Rohde & Schwarz	SCU-26	May.14, 2013	1 Year
SB9059	Preamplifier	Rohde & Schwarz	SCU-40	May.14, 2013	1 Year

5. CONDUCTED DISTURBANCE TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15 15.207

5.1.2. Test Limit

Table 4 Conducted Disturbance Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

* Decreasing linearly with logarithm of the frequency

* The lower limit shall apply at the transition frequency.

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). An EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data

The EUT is power supply by batteries, Therefore this test is not applicable.

6. RADIATED DISTURBANCE TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15 15.209

6.1.2. Test Limit

Table 5 Radiated Disturbance Test Limit

FREQUENCY MHz	FIELD STRENGTHS LIMITS ($\mu\text{V}/\text{m}$)	FIELD STRENGTHS LIMITS dB ($\mu\text{V}/\text{m}$)
Fundamental	50000	94.0
Harmonics	500	54.0
30 ~ 88	100	40.0
88 ~ 216	150	43.5
216 ~ 960	200	46.0
960 ~	500	54.0

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down to find out the maximum emission level. Radiated emission test above 1 GHz, between the antenna and the EUT using RF absorbing material covering the ground plane. Broadband antenna is used as a receiving antenna at frequency range 30MHz to 1000MHz, Horn antenna is used as a receiving antenna at frequency range above 1GHz. Both horizontal and vertical polarization of the antenna is set on test, in order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2009.

Radiated measurements were performed on the frequency range from 30MHz to 25GHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, $\text{VBW} \geq \text{RBW}$. All readings above 1 GHz are AV and PK values. $\text{RBW}=1\text{MHz}$ and $\text{VBW}=10\text{Hz}$ for AV value, $\text{RBW}=1\text{MHz}$ and $\text{VBW} \geq \text{RBW}$ for peak value.

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture. The EUT shall be measured in the XYZ three positions, and the test data which was shown in the follow was the worst case.

The EUT is set in continuous transmission mode.

6.4. Test Data

The emissions don't show in below are too low against the limits.

Table 6 Radiated Disturbance Test Data

Model No.: DT-9969								
Test mode: 1, TX, Low channel								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
78.649	Horizontal	1.0	7.8	23.5	32.3	40.0	X	QP
1601.990	Horizontal	-40.6	26.7	71.1	57.2	74	X	PK
1601.990	Horizontal	-40.6	26.7	61.5	47.6	54	X	AV
9608.670	Horizontal	-36.5	37.1	51.5	52.1	74	X	Harmonics PK
9608.670	Horizontal	-36.5	37.1	39.5	40.1	54	X	Harmonics AV
30.577	Vertical	0.6	12.3	11.8	24.7	40.0	X	QP
34.414	Vertical	0.6	12.3	14.8	27.7	40.0	X	QP

Table 7 Radiated Disturbance Test Data

Model No.: DT-9969								
Test mode: 1, TX, Middle channel								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
30.121	Vertical	0.6	12.3	14.8	27.7	40.0	X	QP
34.435	Vertical	0.6	12.3	14.3	27.2	40.0	X	QP
1628.002	Vertical	-40.7	26.7	71.0	57.0	74	X	PK
1628.002	Vertical	-40.7	26.7	59.0	45.0	54	X	AV
4882.015	Vertical	-39.4	34.0	62.4	57.0	74	X	Harmonics PK
4882.015	Vertical	-39.4	34.0	54.1	48.7	54	X	Harmonics AV
78.626	Horizontal	1.0	7.8	23.3	32.1	40.0	X	QP
1627.992	Horizontal	-40.7	26.7	71.7	57.7	74	X	PK
1627.992	Horizontal	-40.7	26.7	62.7	48.7	54	X	AV

Table 8 Radiated Disturbance Test Data

Model No.: DT-9969								
Test mode: 1, TX, High channel								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
30.087	Vertical	0.6	12.3	16.5	29.4	40.0	X	QP
34.427	Vertical	0.6	12.3	14.3	27.2	40.0	X	QP
1654.005	Vertical	-40.6	26.7	71.4	57.5	74	X	PK
1654.005	Vertical	-40.6	26.7	60.4	46.5	54	X	AV
4959.993	Vertical	-39.5	34.0	61.1	55.6	74	X	Harmonics PK
4959.993	Vertical	-39.5	34.0	53.6	48.1	54	X	Harmonics AV
78.642	Horizontal	1.0	7.8	23.9	32.7	40.0	X	QP
1653.999	Horizontal	-40.6	26.7	72.1	58.2	74	X	PK
1653.999	Horizontal	-40.6	26.7	63.7	49.8	54	X	AV
4959.998	Horizontal	-39.5	34.0	60.4	54.9	74	X	Harmonics PK
4959.998	Horizontal	-39.5	34.0	52.9	47.4	54	X	Harmonics AV

- Note: 1. Emission level(dBuV/m)=Reading Value(dBuV) + Correction Factor(dB)+Antenna Factor (dB/m)
 2. Correction Factor(dB) = Cable Factor (dB)+Amplifier Factor(dB)
 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Table 9 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	
6.31175 - 6.31225	123 - 138	2200 - 2300	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	
12.51975 -	240 - 285	3345.8 - 3358	
12.52025	322 - 335.4	3600 - 4400	
12.57675 -			
12.57725			
13.36 - 13.41			

Except as shown in above tables, all other emissions of the above band were less than the limit 20dB.

7. 20DB BANDWIDTH MEASUREMENT


7.1.Limits of 20dB Bandwidth Measurement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2.Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and $VBW \geq RBW$. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.



7.3.Test Setup



7.4.Test Data

Table 10 20dB Bandwidth Test Data


CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	0.852	Pass
2441	0.848	Pass
2480	0.852	Pass

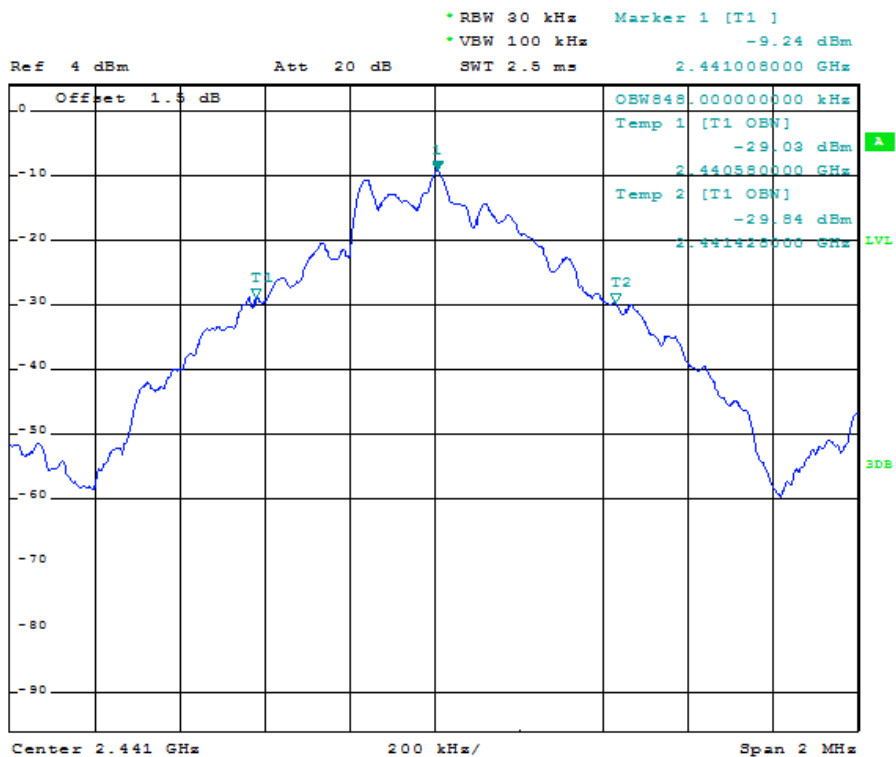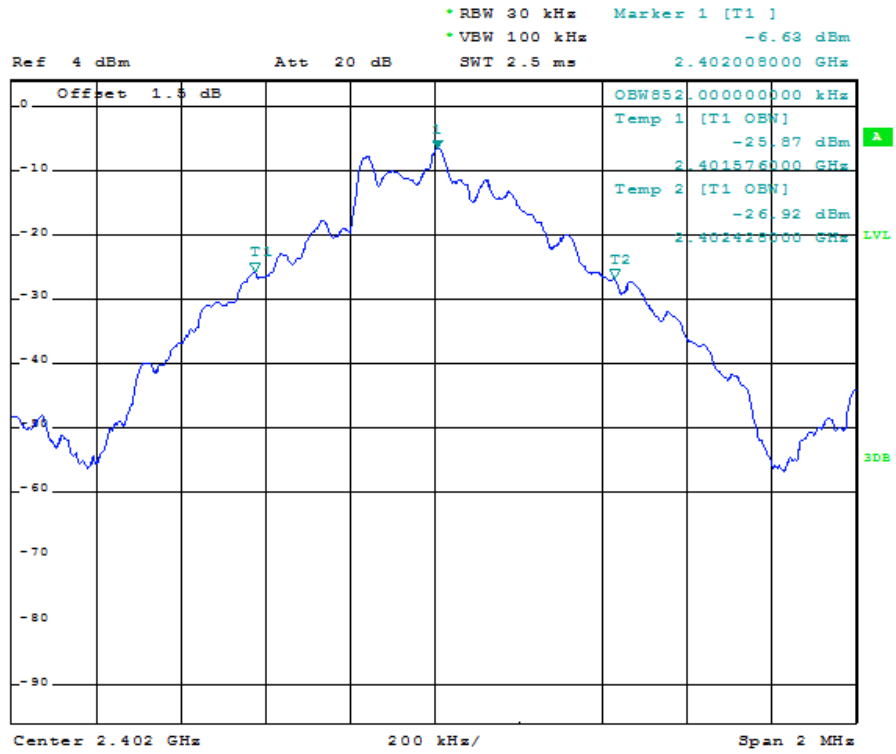



1. PR
MAXH

RBW 30 kHz Marker 1 [T1]
VBW 100 kHz -9.40 dBm
Ref 4 dBm Att 20 dB SWT 2.5 ms 2.480012000 GHz

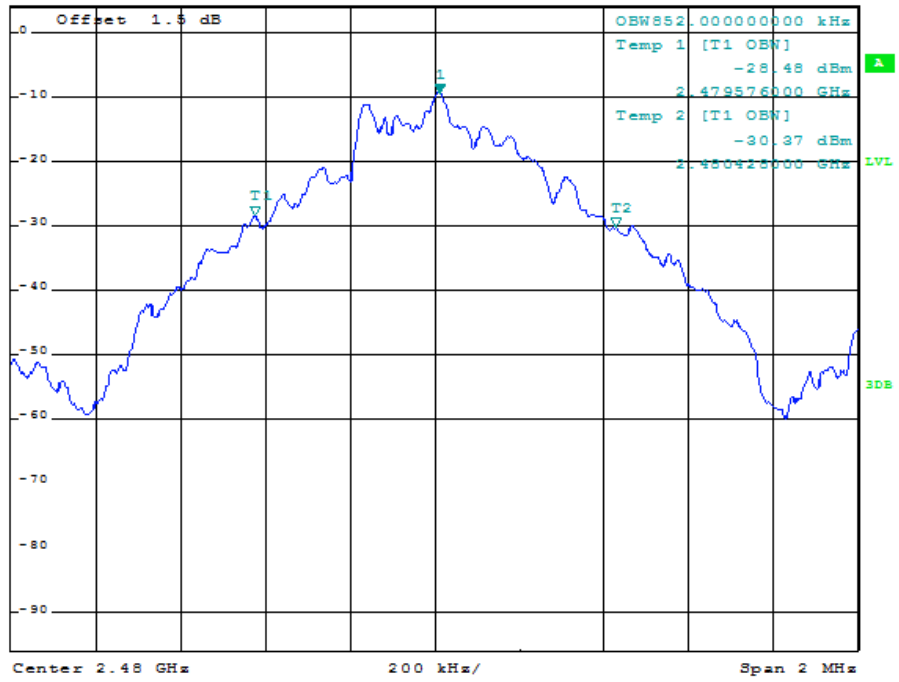

8. CARRIER FREQUENCY SEPARATION MEASUREMENT


8.1. Limits of Carrier Frequency Separation Measurement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

8.2. Test Procedures

- (a) Connect transmitter output to spectrum analyzer.
- (b) Set the transmitter to transmit maximum output power and switch ON frequency hopping function, then set the measured frequency number to two adjacent channels separately and test the carrier frequency separation with spectrum analyzer.

8.3. Test Setup




8.4. Test Data

Table 11 Carrier Frequency Separation Test Data

Frequency (GHz)	Frequency (GHz)	Frequency separation (MHz)	Result	Note
2.441	2.442	1.008	Pass	--



RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -4.00 dBm
Ref 4 dBm Att 40 dB SWT 2.5 ms 2.441000000 GHz

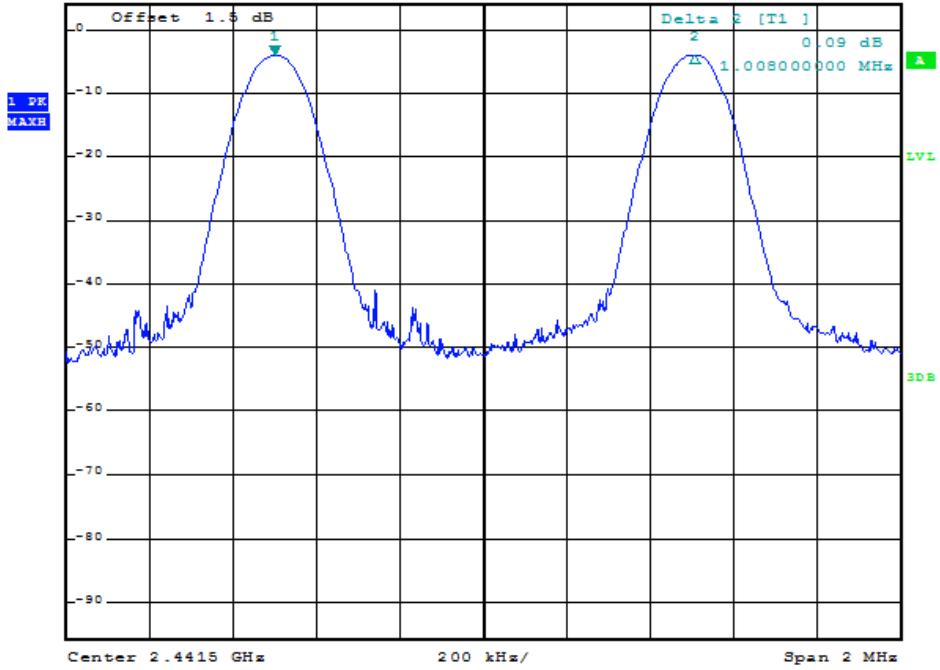

9. NUMBER OF HOPPING CHANNEL


9.1.Limits of Number of Hopping Channel

Number of hopping channel should be compliance with the requirements in part15.247 (a) (1) iii.

9.2.Test Procedure

- (a) Connect transmitter output to spectrum analyzer.
- (b) Set the transmitter to transmit maximum output power and switch ON frequency hopping function, then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.
- (c) Count the quantity of peaks to get the number of hopping channels.

9.3.Test Setup




9.4.Test Data

Table 12 Number of Hopping Channel Test Data

Hopping numbers	LIMIT	results
79	>15	Pass

Note: in case of AFH mode, minimum number of hopping channels is 20.

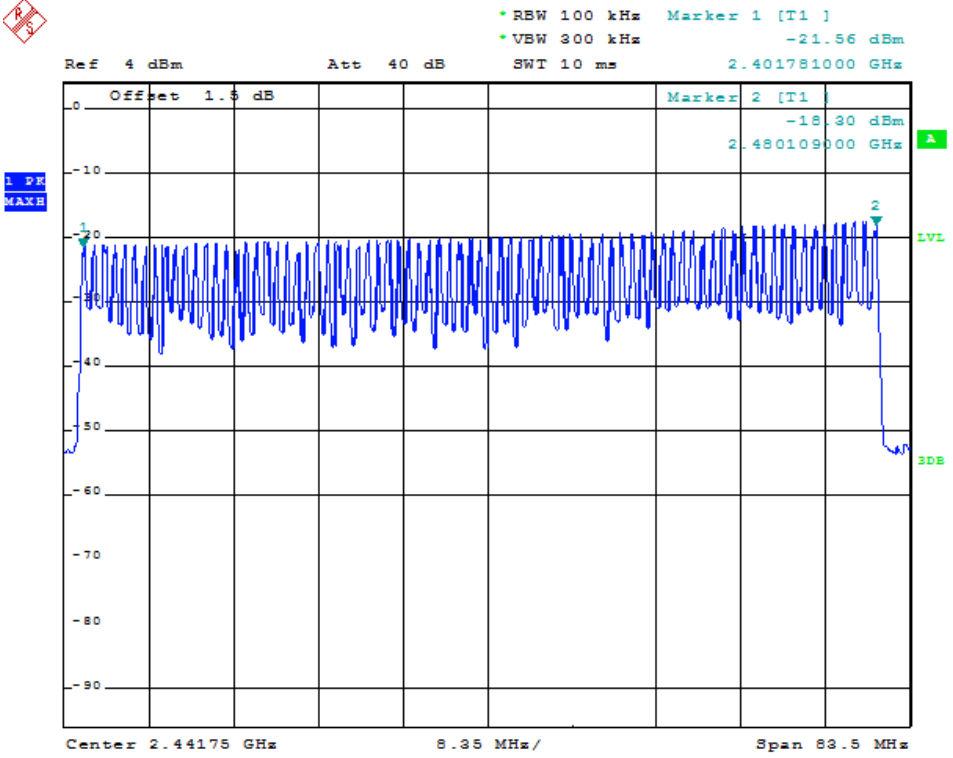

10. TIME OF OCCUPANCY


10.1.Limits of Time of Occupancy

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2.Test Procedure

- (a) Connect transmitter output to spectrum analyzer.
- (b) Set the transmitter to transmit maximum output power and switch on frequency hopping function.
- (c) Set the span of spectrum analyzer to 0 Hz, and set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz, then get the time domain measured diagram. And set sweep time to 2 times of one burst occupancy time, and measure the time of occupancy of one burst.
- (d) Set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz ,and set the sweep time to a period (0.4 seconds multiplied by the number of hopping channels employed), and count the number of the bursts.
- (e) Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts.

10.3.Test Setup



10.4. Test Results

Table 13 Time of Occupancy Test Data



	Time of Single Slot [ms]	Numbers of slots in a period 3.16s	Time of occupied in a period [s]	Limit [s]	Result
DH1	0.572	32	0.183	≤ 0.4	Pass
DH3	1.826	16	0.292	≤ 0.4	Pass
DH5	2.949	11	0.324	≤ 0.4	Pass

AFH mode



For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.

	Time of Single Slot [ms]	Numbers of slots in a period 3.16s	Time of occupied in a period [s]	Limit [s]	Result
AFH Mode DH5	2.949	12	0.082	≤ 0.4	Pass



DH1

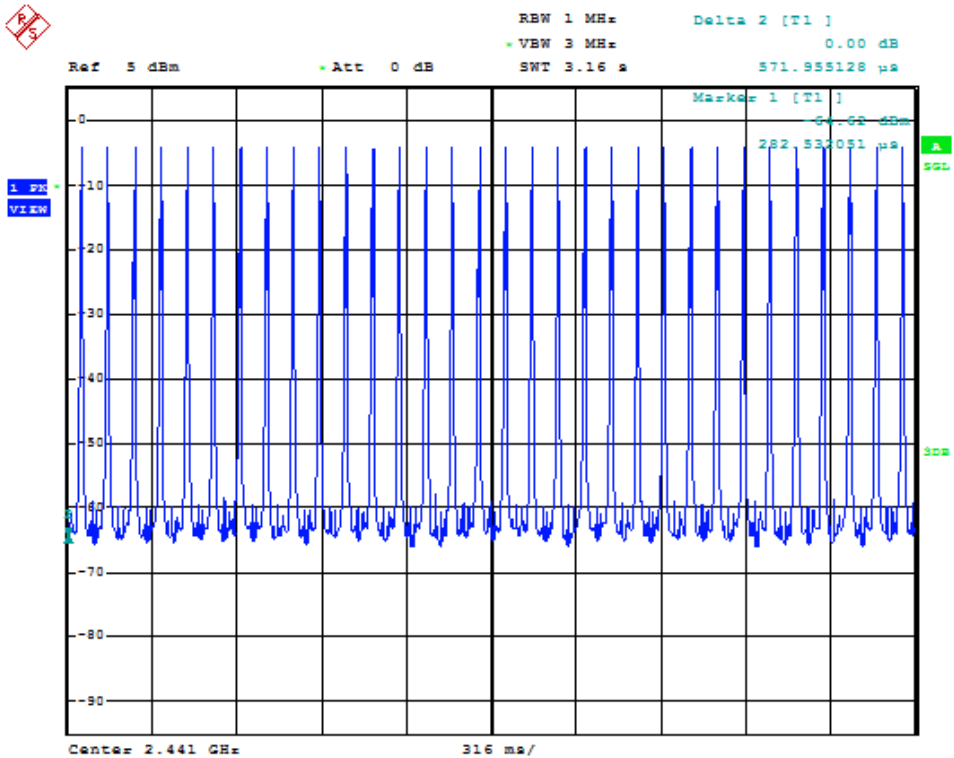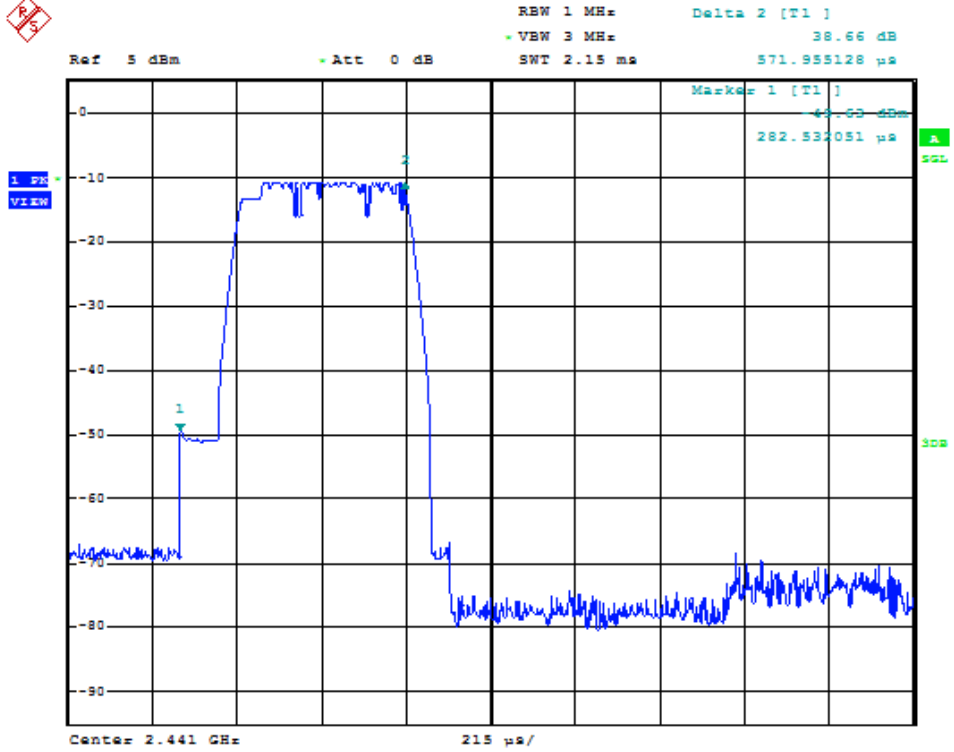

DH3

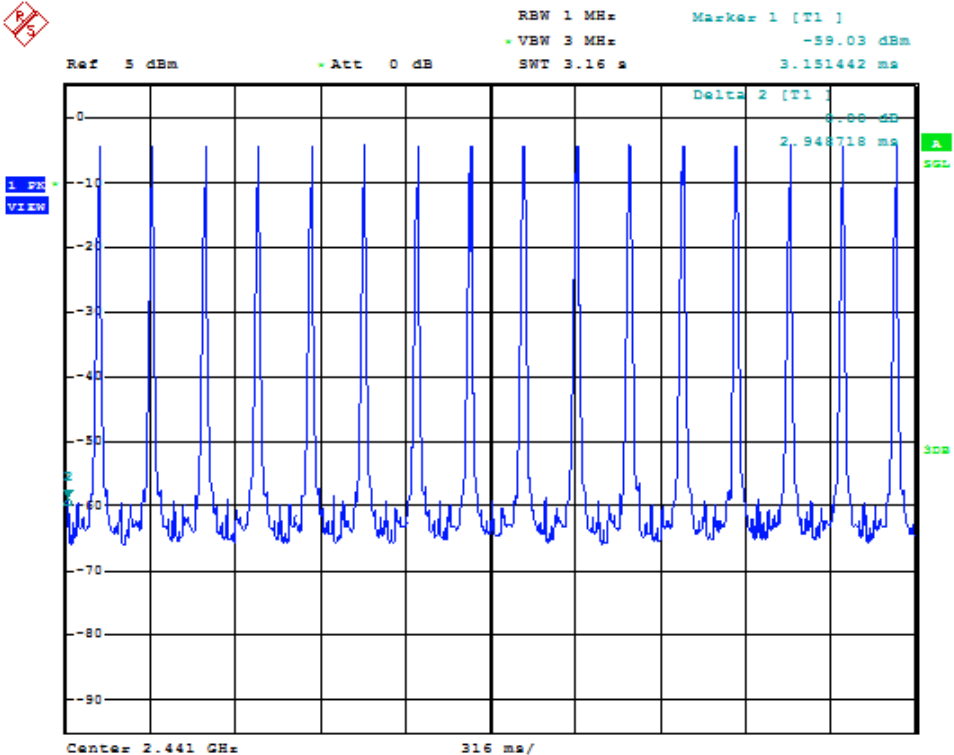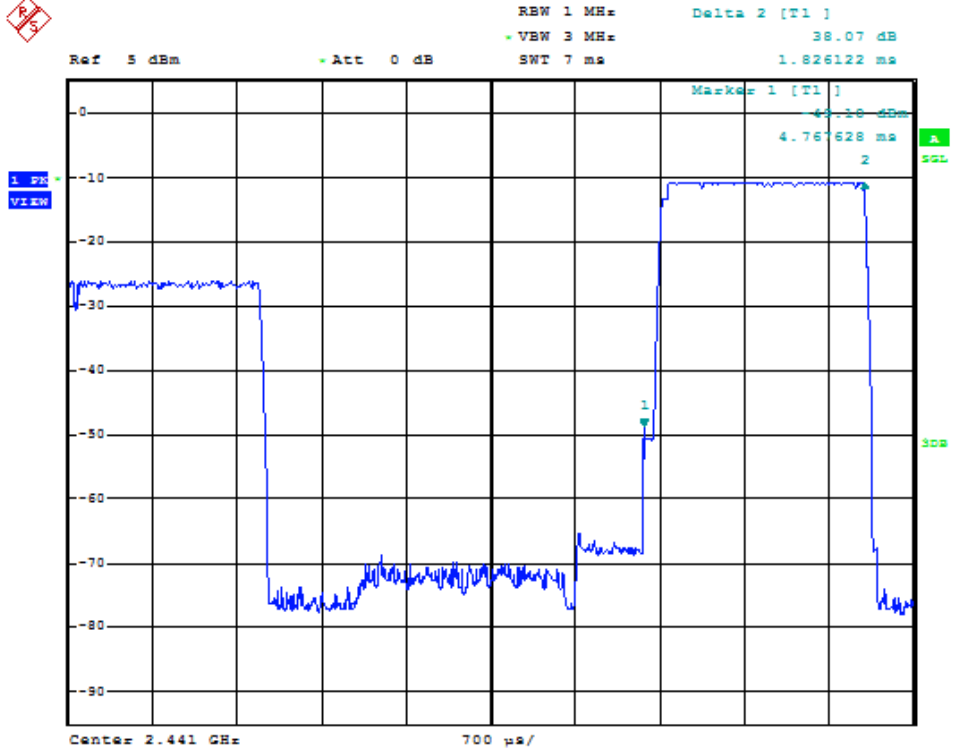

DH5

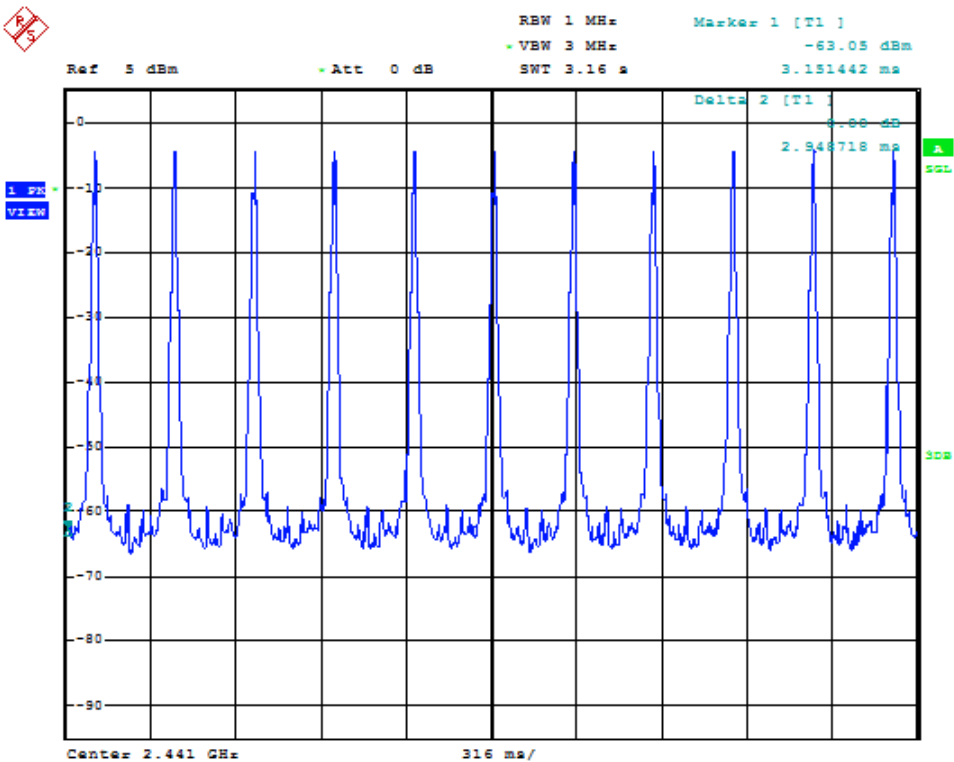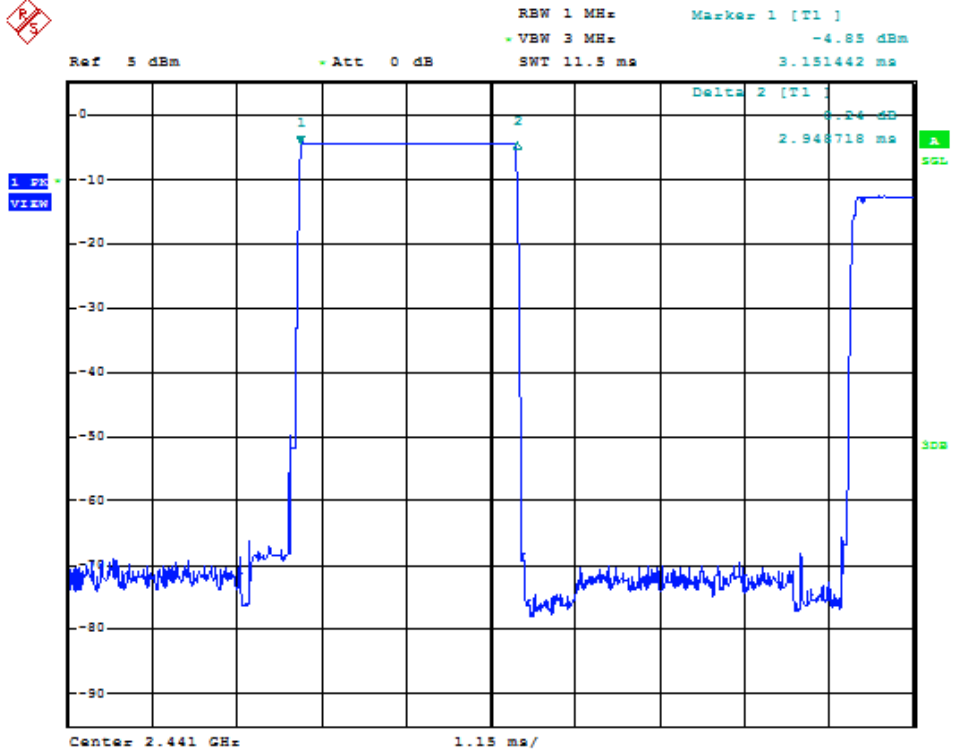

11. PEAK POWER

11.1.Limits of Peak Power

Compliance with part 15.247 (b) (1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watt (21dBm).



11.2.Test Procedure

- (a) Connect transmitter output to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power and switch off frequency hopping function.
- (c) Then set the EUT to transmit at highest, middle and lowest frequency and measure the conducted output power separately.

11.3.Test Results


Table 14 Peak Power Test Data

Channel	Channel No.	Center Freq.[MHz]	Meas. Level (Cond.) [dBm]
Lowest	0	2402	-4.43
Middle	39	2441	-5.77
Highest	78	2480	-5.35

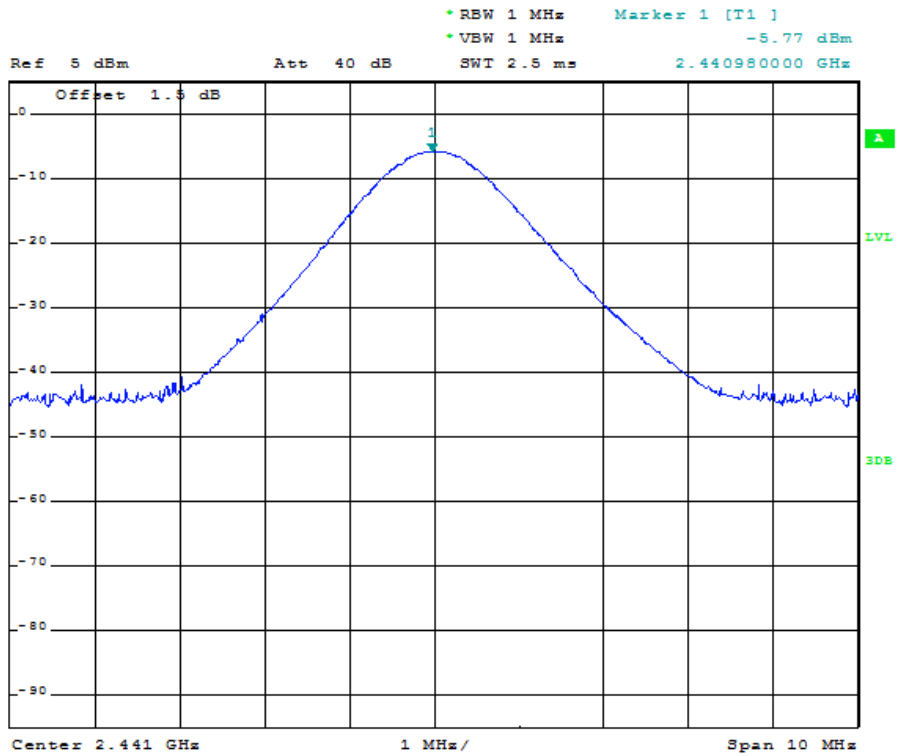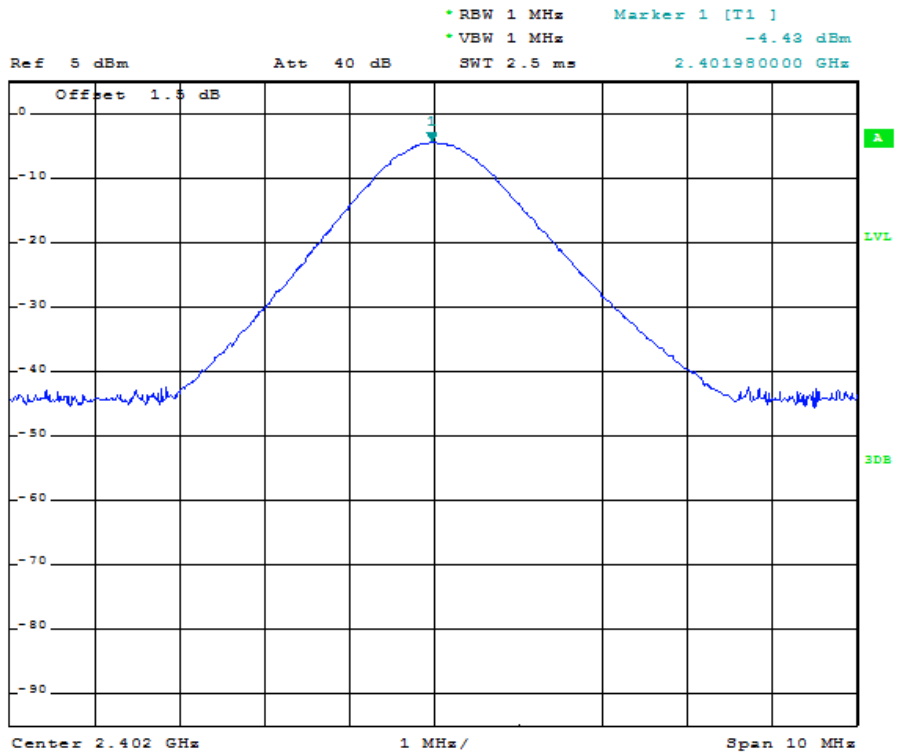



• RBW 1 MHz Marker 1 [T1]
• VBW 1 MHz -5.35 dBm
SWT 2.5 ms 2.480000000 GHz

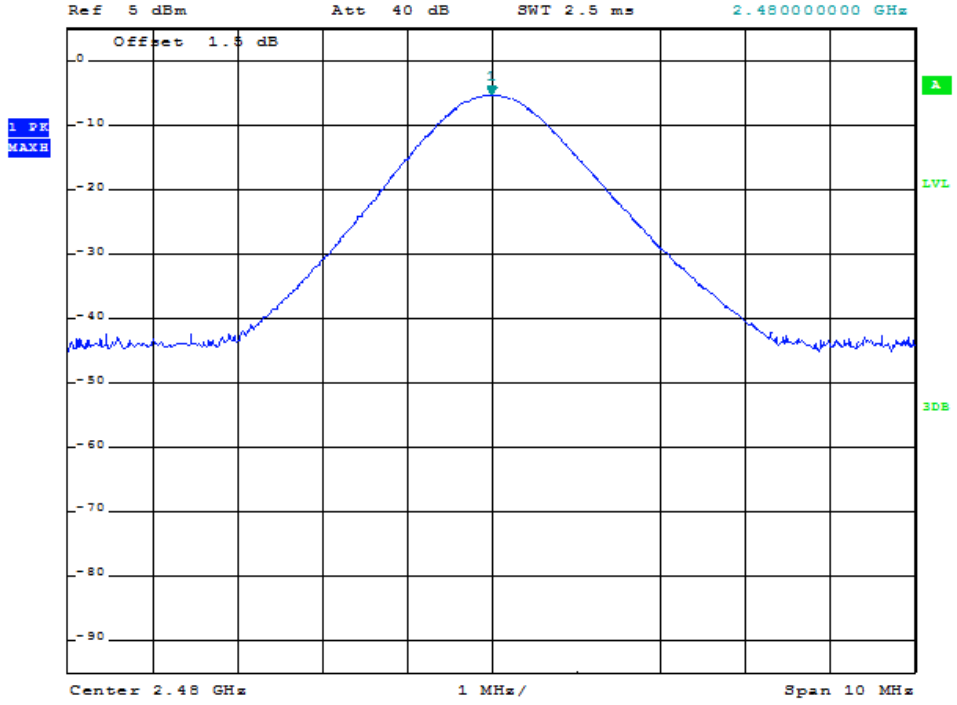

12. BAND EDGES MEASUREMENT

12.1.Limits of Band Edges Measurement

Below – 20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).


12.2.TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


12.3.Test Results

The measured plots are attached on the following. Test data shows compliance with the band edge requirement in part 15.247(d).


Low channel, Vertical

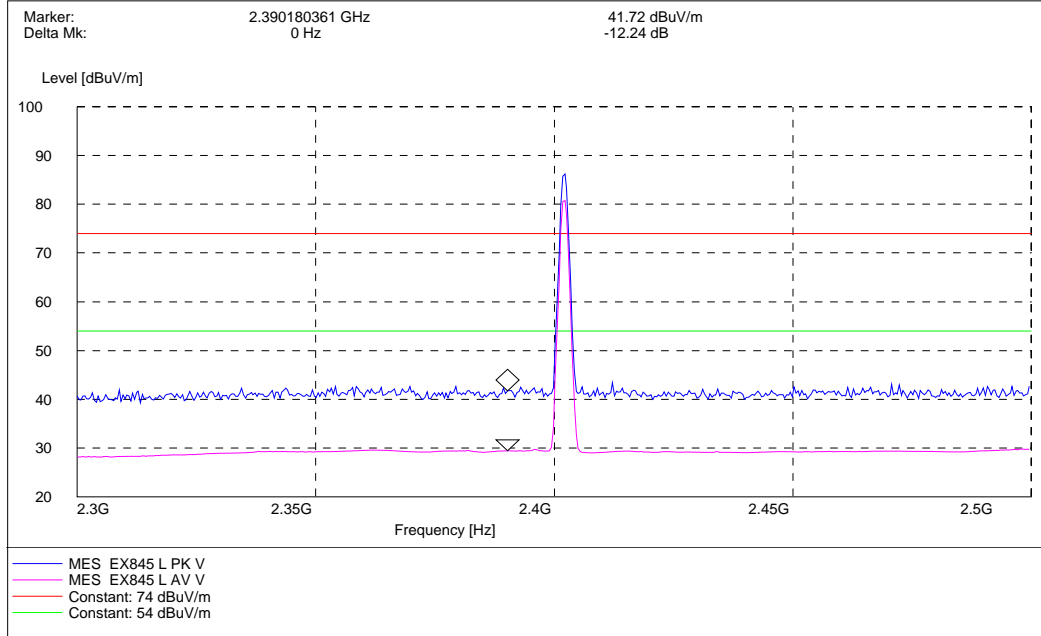


Low channel, Horizontal

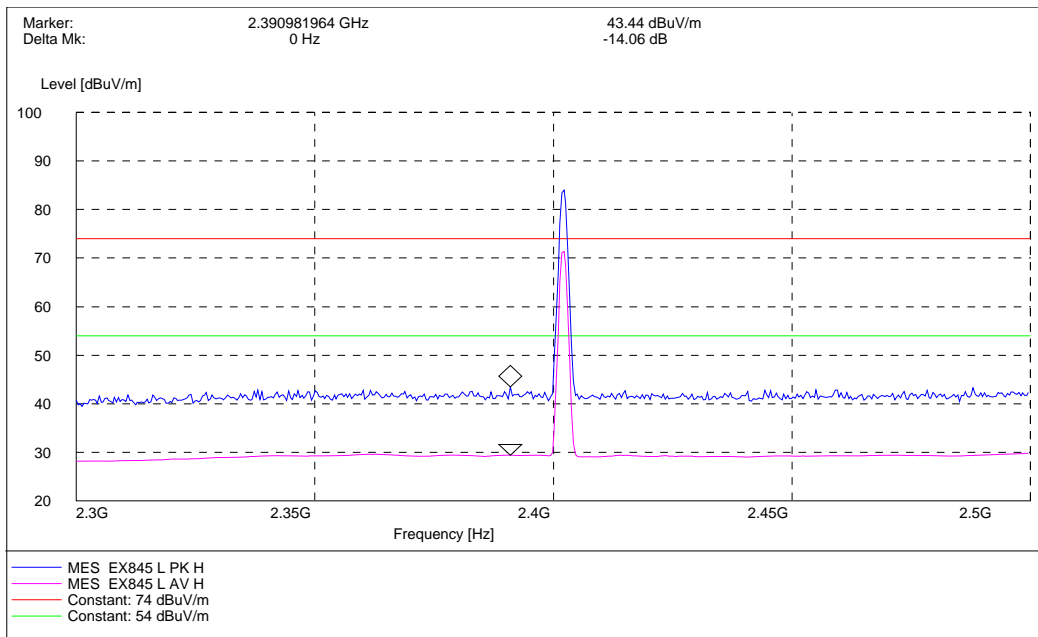

High channel, Vertical

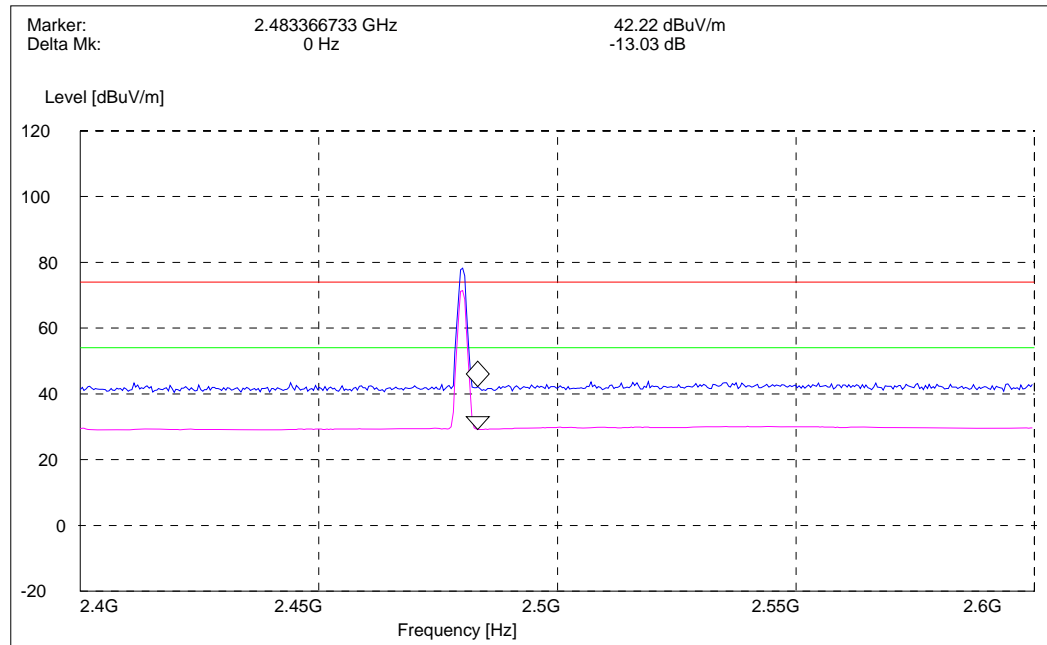

High channel, Horizontal

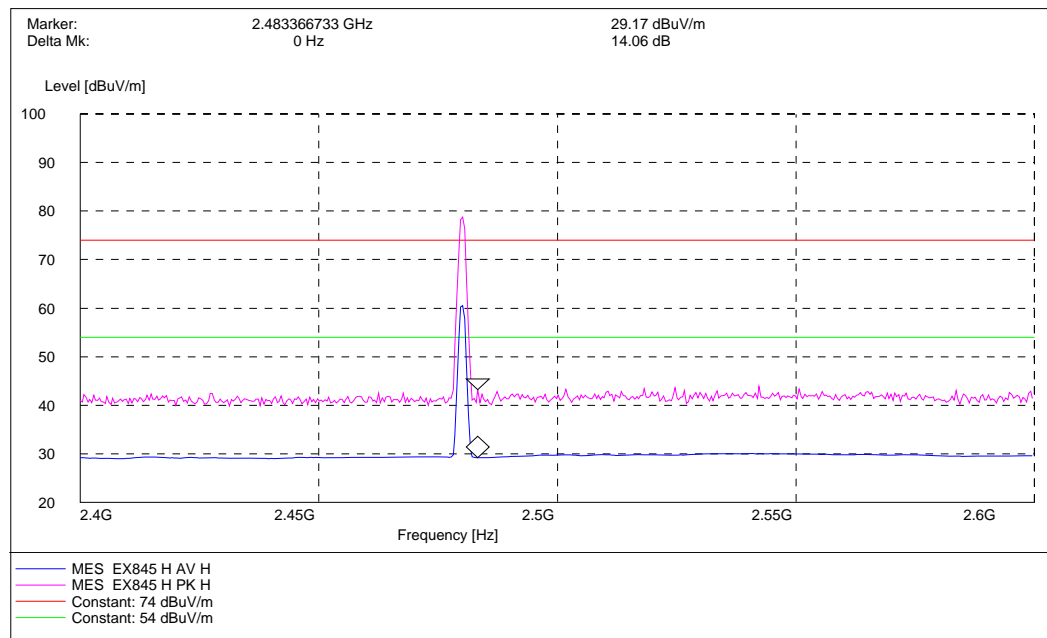

13. CONDUCTED SPURIOUS EMISSIONS

13.1. Limits of Band Edges Measurement

Below – 20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).

13.2. Test Procedure


The transmitter output was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal


13.3. TEST RESULTS


Low channel

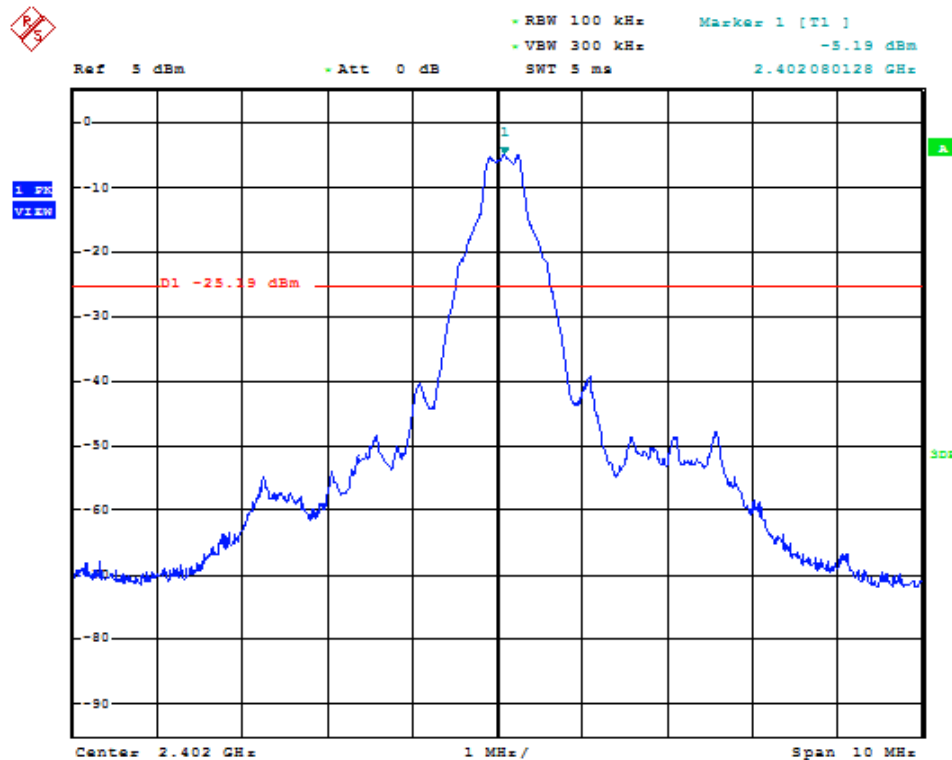

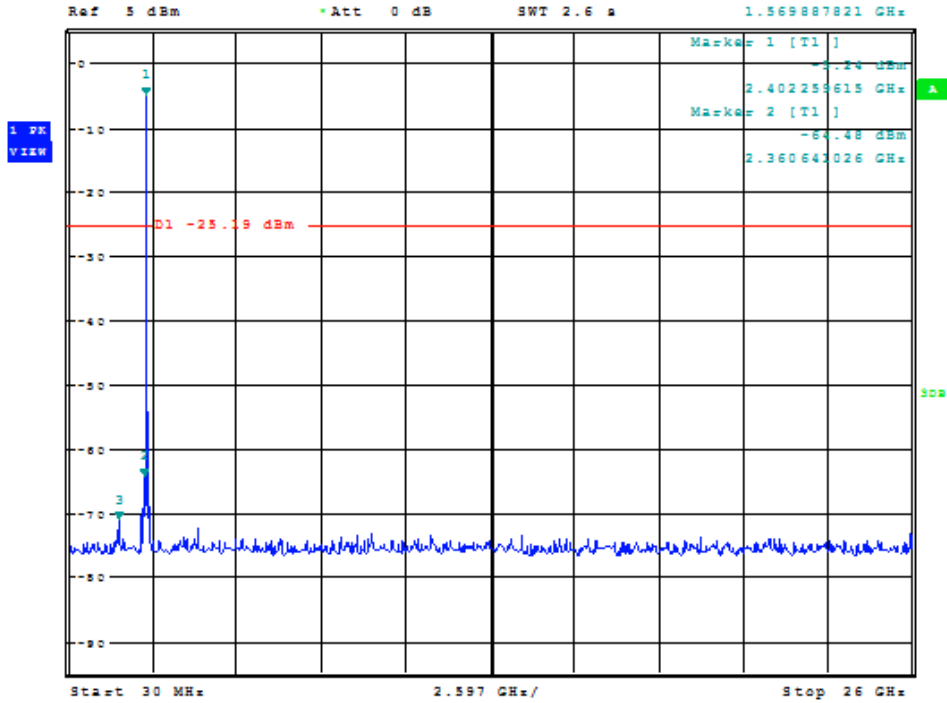



Mid channel

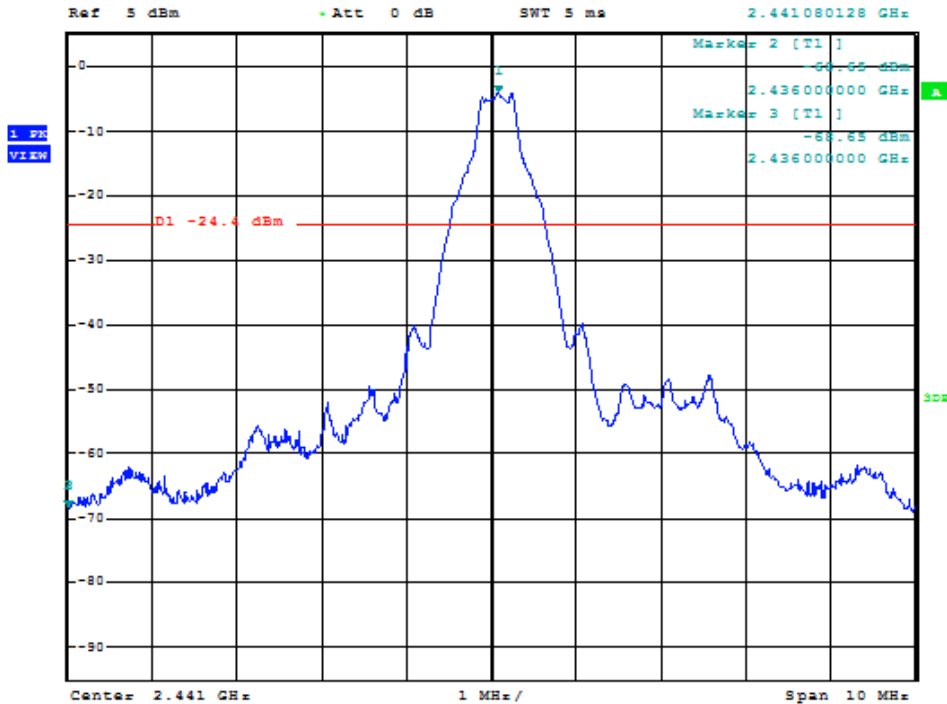

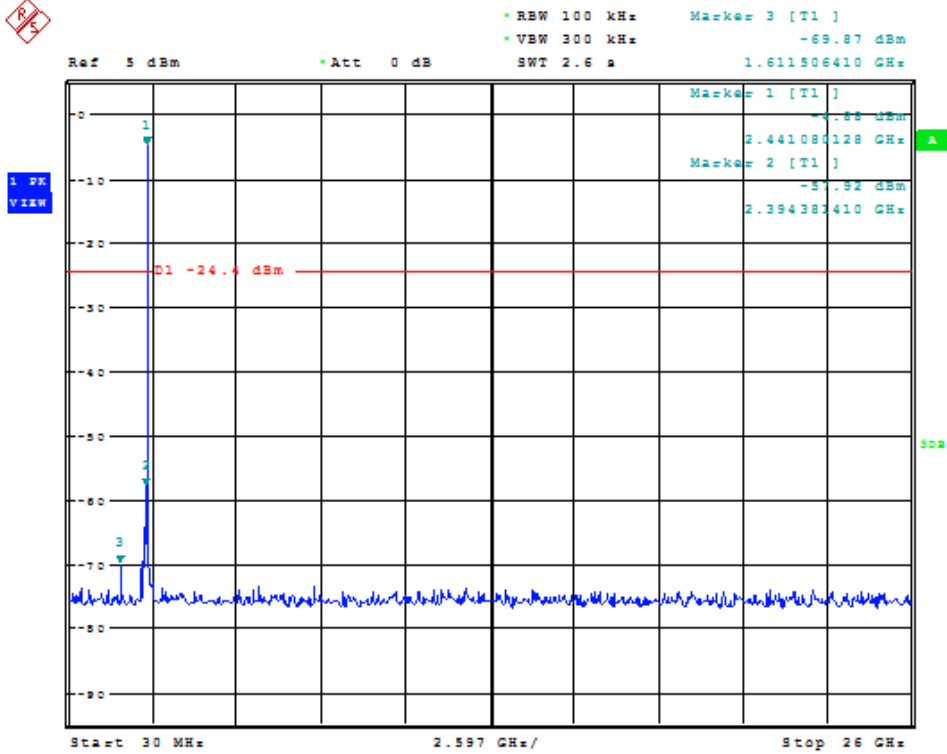

High Channel

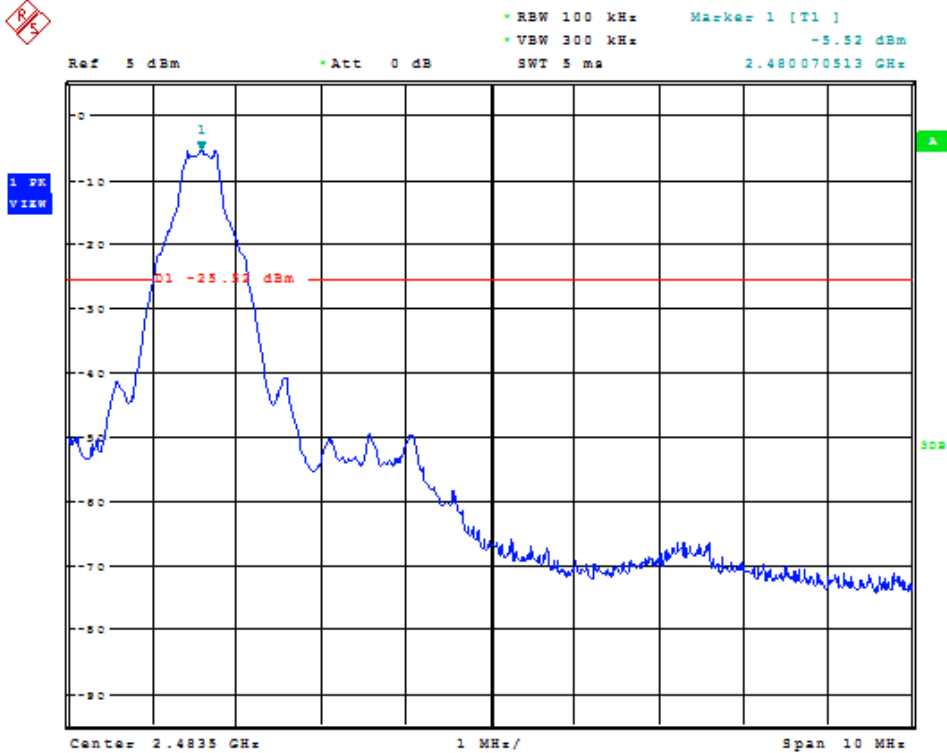

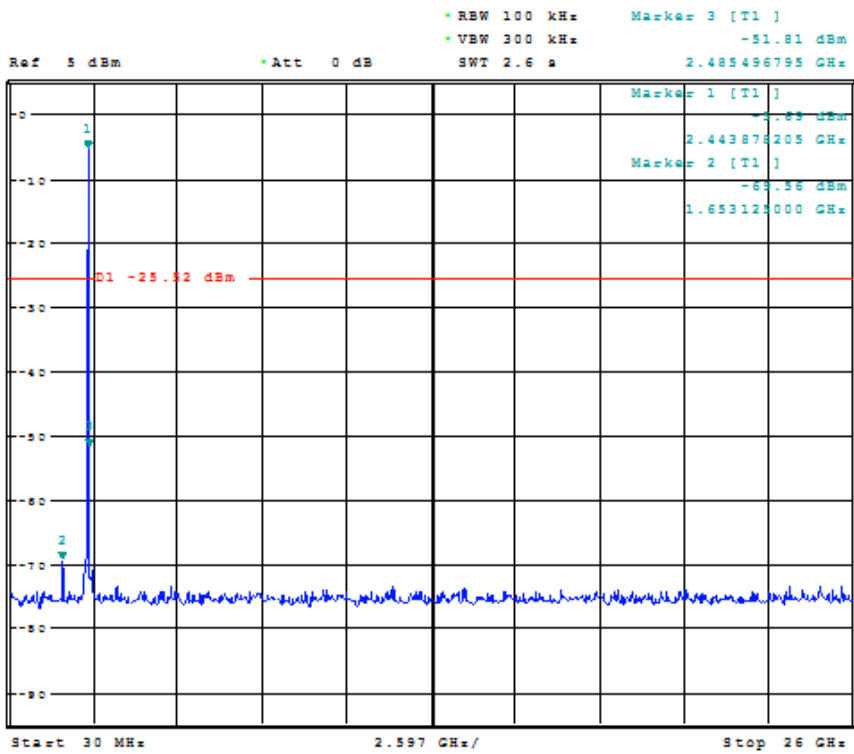


Band Edge with Hopping On





-RBW 100 kHz Marker 2 [T1]
-VWV 300 kHz -64.03 dBm
SWT 5 ms 2.484044872 GHz

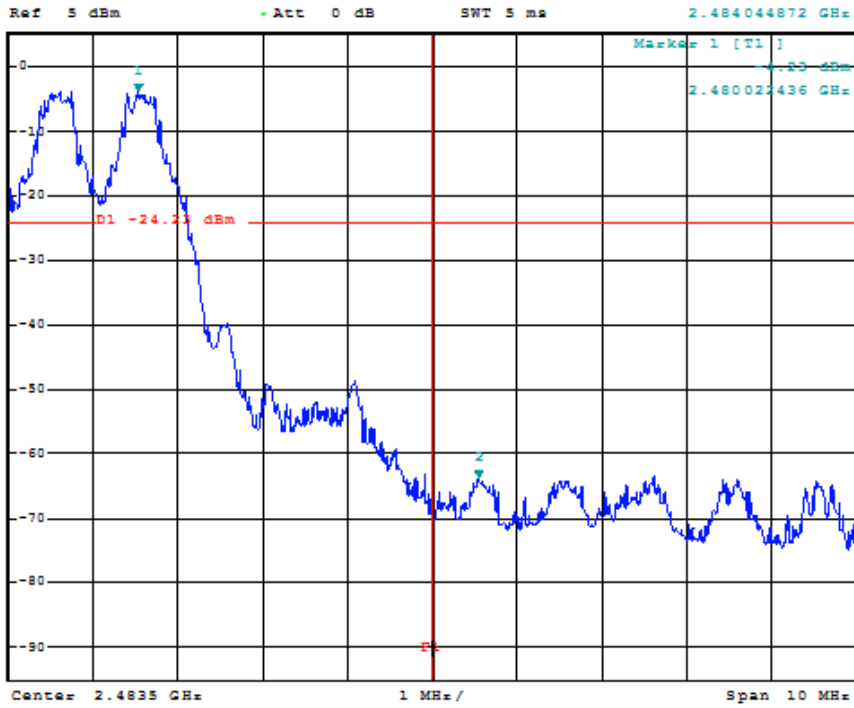

14. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is integrated inside the enclosure, this is permanently attached antenna and meets the requirements of this section.