

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称 : Shenzhen Shuaixian Electronic Equipment Co.,Ltd

CUSTOMER`S NAME

客 户 料 号 : _____

CUSTOMER`S P/N

产 品 规 格 : Y. A11. 395

PRODUCT SPEC

制 作 日 期 : August 9, 2024

ISSUE DATE

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE



东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

ADD: 东莞市大朗镇富民中路533号

ADD:533 Fumin Middle Road, Dalang Town, Dongguan City, China

TEL: 0769-82866410

FAX: 0769-82866409

SPECIFICATION FOR APPROVAL

[illegible]


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	Shuaixian	CUSTOMER'S P/N	0
ISSUE DATE	August 9, 2024	PRODUCT SPEC	Y. A11. 395

2.DIMENSION:

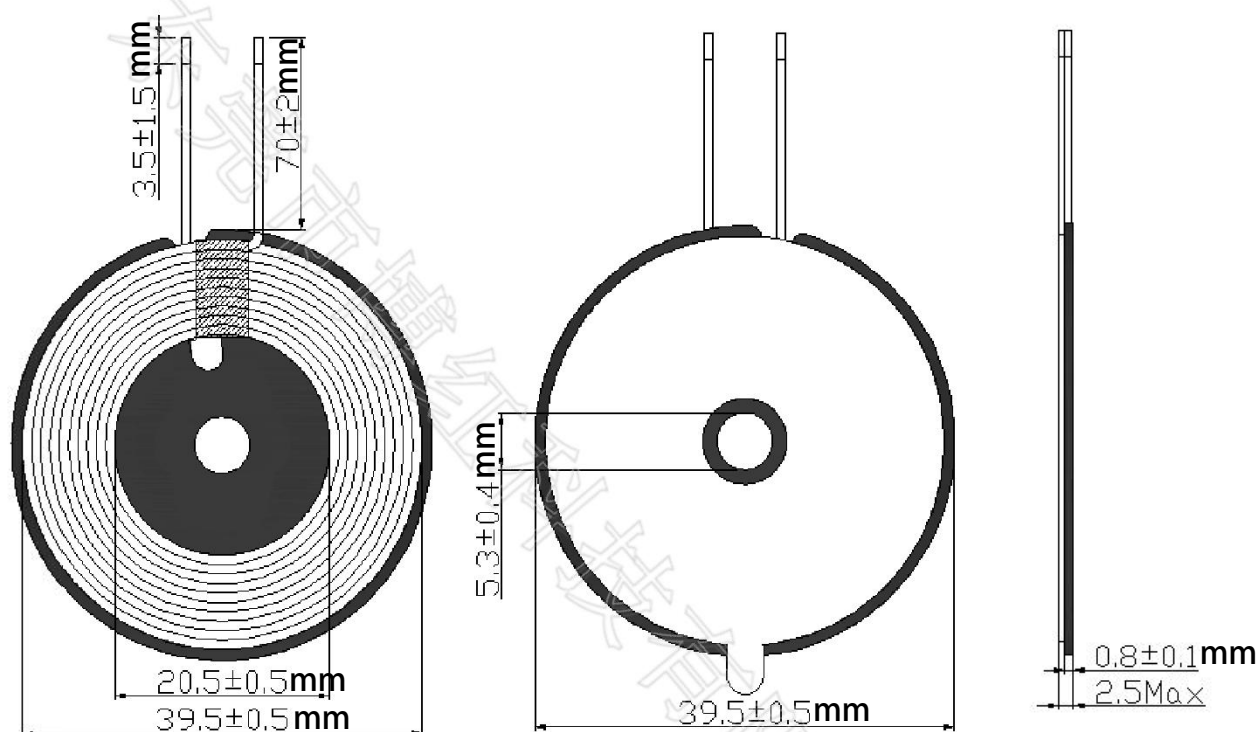

Notes.

1. The coil is tightly affixed to the magnetic sheet, and must not be warped;.
2. The surface of the coil is clean and free of dirt.
3. Double-sided adhesive backing, with pull handle.

ISSUE		CHECK		APPROVAL	
BY		BY		BY	


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	Shuaixian	CUSTOMER'S P/N	0
ISSUE DATE	August 9, 2024	PRODUCT SPEC	Y. A11. 395

4.CIRCUIT DIAGRAM

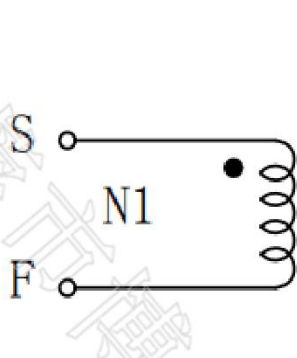

" • " : POLARITY/极性

5.WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø0.07*100P	10	/	CCW

6.CHARACTERISTIC

ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	6.3uH±10%	LCR1062 100KHz/1V AT 25℃±2℃
Q	S-F	50 Min	LCR1062 100KHz/1V AT 25℃±2℃
DCR	S-F	55mΩ Max	LCR1062 1KHz/0.3V AT 25℃±2℃


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD


SPECIFICATION FOR APPROVAL

CUSTOMER	Shuaixian	CUSTOMER'S P/N	0
ISSUE DATE	August 9, 2024	PRODUCT SPEC	Y. A11. 395

7.THE PACKING WAY

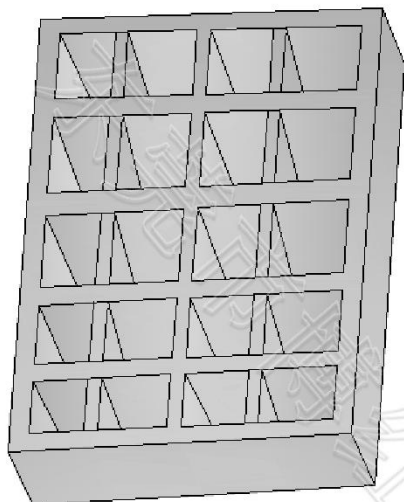

1. Pearl cotton specification:
355*235*65mm*20 compartments.
2. 15pcs per cell, 300pcs per tray.
3. 5 disks per box.
- 4.Total per box:1500pcs.

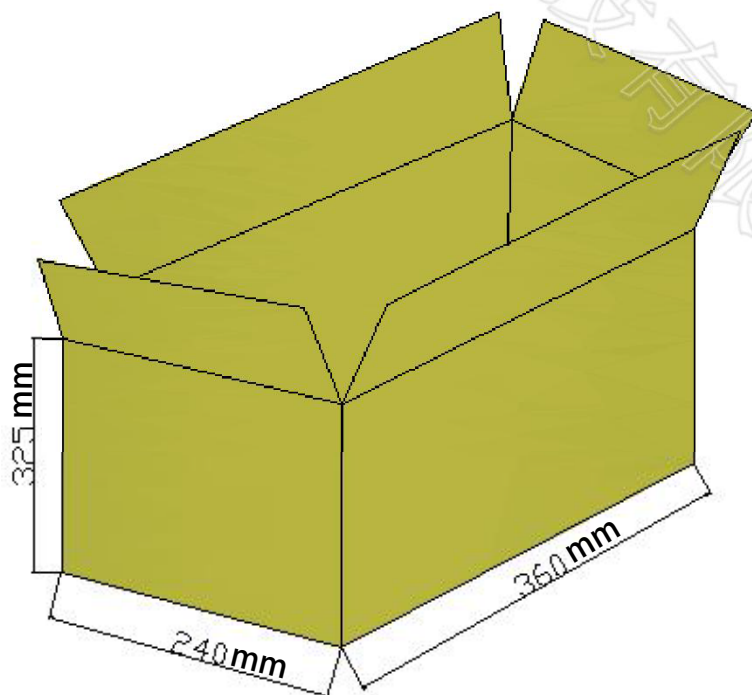

东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	Shuaixian	CUSTOMER'S P/N	0	
ISSUE DATE	August 9, 2024	PRODUCT SPEC	Y. A11. 395	
Memo				
NO.	Content	Handling method	Signature	Date
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				