



Report No.: TW2109003E File reference No.: 2021-09-09

Applicant: MAXELL CORPORATION OF AMERICA

Product: TWS Earphone

Model No.: B13-TWS, B13 SYNC UP

Trademark: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: September 09, 2021

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2109003E Page 2 of 51

Date: 2021-09-09



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Report No.: TW2109003E

Date: 2021-09-09



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition	13
6.4	Radiated Emission Limit	14
6.5	Test Result.	15
7.0	Band Edge	23
7.1	Test Method and Test Procedure	23
7.2	Radiated Test Setup	23
7.3	Configuration of the EUT	23
7.4	EUT Operating Condition	23
7.5	Band Edge Limit	23
7.6	Band Edge Test Result	24
8.0	Antenna Requirement	28
9.0	20dB bandwidth measurement	29
10.0	FCC ID Label	38
11.0	Photo of Test Setup and EUT View.	39

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-09-09



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: MAXELL CORPORATION OF AMERICA

Address: 3 Garret Mountain Plaza, Woodland Park, NJ, United States, 07424

Telephone: -Fax: --

1.3 Description of EUT

Product: TWS Earphone

Manufacturer: Shenzhen Swetz Sound Technology Co., Limited

Address: No.18, Xiantian Road, Xinsheng Community, Longgang Street, Longgang

District, Shenzhen, China

Trademark: N/A
Additional Trademark: N/A

Model Number: B13-TWS

Additional Model Name B13 SYNC UP

Hardware Version: V1.8 Software Version: V1.0.3

Rating: DC5V input or Built-in DC3.7V, 30mAh Li-ion battery for earphones and DC5V

input or Built-in DC3.7V, 300mAh Li-ion battery for charger base.

Modulation Type: GFSK, Pi/4D-QPSK, 8DPSK (Bluetooth)

Operation Frequency: 2402-2480MHz

Channel Separate: 1MHz Channel Number: 79

Antenna Designation Ceramic antenna with gain 1.0dBi (Declared by the applicant)

1.4 Submitted Sample: 1 pc

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2109003E Page 5 of 51

Date: 2021-09-09



1.5 Test Duration

2021-09-01 to 2021-09-09

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 51

Report No.: TW2109003E

Date: 2021-09-09



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
LISN	R&S	EZH3-Z5	100294	2021-06-18	2022-06-17
LISN	R&S	EZH3-Z5	100253	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-07-02	2024-07-01
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-01
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01
9*6*6 Anechoic			N/A	2021-07-02	2022-07-01
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2021-01-16	2022-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	1	2021-06-18	2022-06-17
RF Cable	Zhengdi	7m	-	2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2109003E Page 7 of 51

Date: 2021-09-09



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: TW2109003E

Date: 2021-09-09



5. Power Line Conducted Emission Test

5.1 Schematics of the test

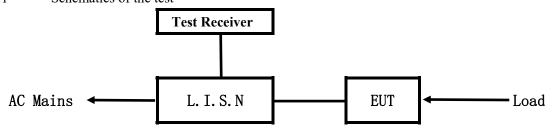


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

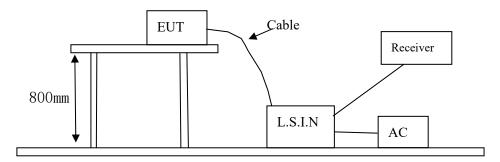

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID	
TWS Earphone	Shenzhen Swetz Sound Technology Co.,	B13-TWS, B13 SYNC UP	WKA TW173B	
I w S Earpnone	Limited	D13-1 W3, D13 31NC 01	WKA-TW173B	

Report No.: TW2109003E Page 9 of 51

Date: 2021-09-09



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30 00	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Pass

Report No.: TW2109003E

Date: 2021-09-09



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Communication by BT

Model: B13-TWS Results: Pass

Please refer to following diagram for individual

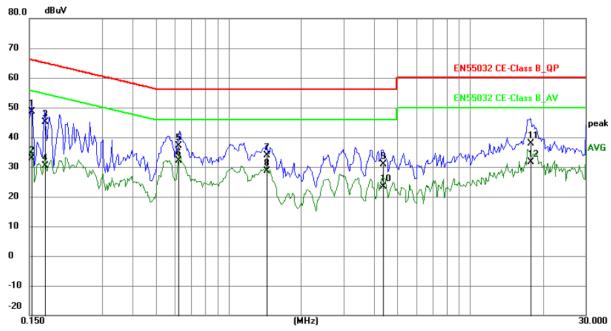

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	38.85	9.78	48.63	65.79	-17.16	QP	Р
2	0.1539	23.19	9.78	32.97	55.79	-22.82	AVG	Р
3	0.1734	35.39	9.77	45.16	64.80	-19.64	QP	Р
4	0.1734	20.66	9.77	30.43	54.80	-24.37	AVG	Р
5	0.6238	27.43	9.78	37.21	56.00	-18.79	QP	Р
6	0.6238	22.28	9.78	32.06	46.00	-13.94	AVG	Р
7	1.4370	24.09	9.79	33.88	56.00	-22.12	QP	Р
8	1.4370	18.95	9.79	28.74	46.00	-17.26	AVG	Р
9	4.3454	20.98	9.90	30.88	56.00	-25.12	QP	Р
10	4.3454	13.43	9.90	23.33	46.00	-22.67	AVG	Р
11	17.8395	27.45	10.55	38.00	60.00	-22.00	QP	Р
12	17.8395	20.96	10.55	31.51	50.00	-18.49	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-09-09

Report No.: TW2109003E



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Communication by BT

Model: B13-TWS Results: Pass

Please refer to following diagram for individual

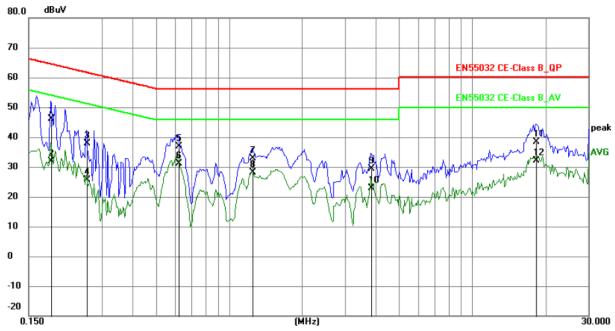

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1850	36.25	9.76	46.01	64.26	-18.25	QP	Р
2	0.1850	22.19	9.76	31.95	54.26	-22.31	AVG	Р
3	0.2592	28.22	9.75	37.97	61.46	-23.49	QP	Р
4	0.2592	15.95	9.75	25.70	51.46	-25.76	AVG	Р
5	0.6180	27.13	9.78	36.91	56.00	-19.09	QP	Р
6	0.6180	21.42	9.78	31.20	46.00	-14.80	AVG	Р
7	1.2459	23.10	9.79	32.89	56.00	-23.11	QP	Р
8	1.2459	18.25	9.79	28.04	46.00	-17.96	AVG	Р
9	3.8229	19.39	9.88	29.27	56.00	-26.73	QP	Р
10	3.8229	13.10	9.88	22.98	46.00	-23.02	AVG	Р
11	18.3114	27.92	10.58	38.50	60.00	-21.50	QP	Р
12	18.3114	21.49	10.58	32.07	50.00	-17.93	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2109003E Page 12 of 51

Date: 2021-09-09




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

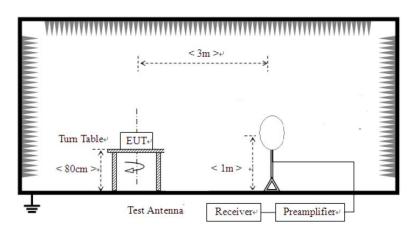


Page 13 of 51

Report No.: TW2109003E


Date: 2021-09-09



For radiated emissions from 30MHz to1GHz

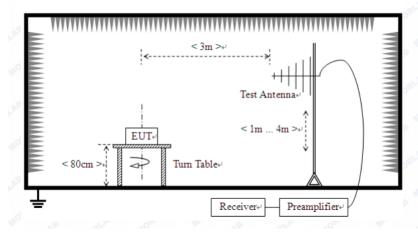

For radiated emissions above 1GHz

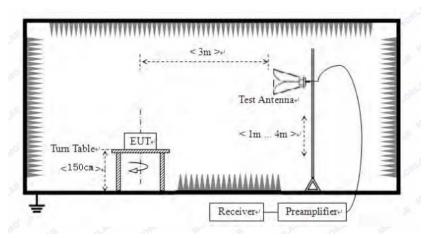

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Report No.: TW2109003E Page 14 of 51

Date: 2021-09-09



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	Strength of Fundamental (3m)			trength of Harmo	nics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBuV/m	
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
21 -960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 7. The three modulation modes of GFSK, Pi/4D-QPSK and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TW2109003E Page 15 of 51

Date: 2021-09-09




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

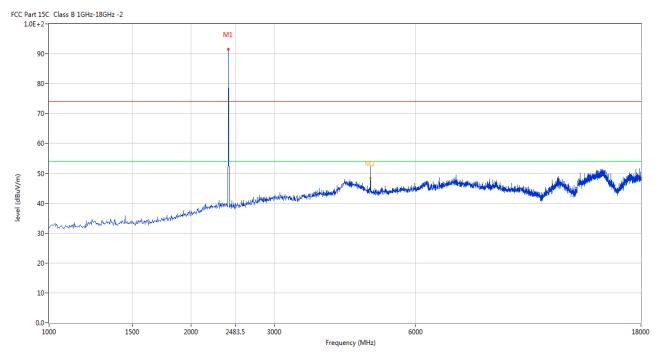


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.149	91.45	-3.57	114.0	-22.55	Peak	138.00	100	Horizontal	Pass
2	4802.799	52.89	3.12	74.0	-21.11	Peak	120.00	100	Horizontal	Pass
2**	4802.799	48.46	3.12	54.0	-5.54	AV	120.00	100	Horizontal	Pass

Report No.: TW2109003E Page 16 of 51

Date: 2021-09-09



Vertical

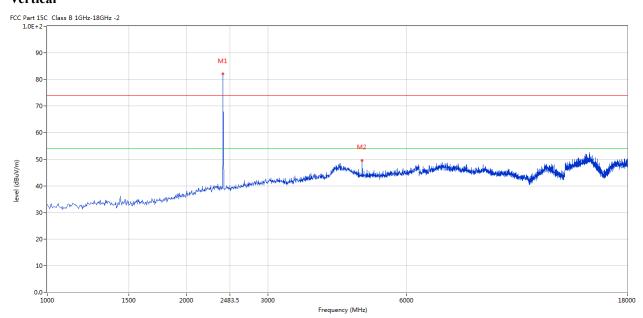

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402.149	82.04	-3.57	114.0	-31.96	Peak	177.00	100	Vertical	Pass
2	4802.799	49.59	3.12	74.0	-24.41	Peak	191.00	100	Vertical	Pass


Report No.: TW2109003E Page 17 of 51

Date: 2021-09-09



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

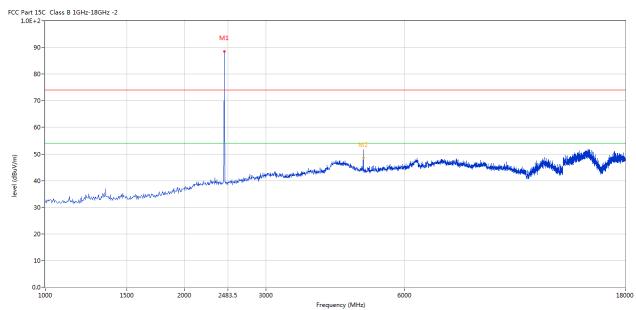


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	88.59	-3.57	114.0	-25.41	Peak	158.00	100	Horizontal	Pass
2	4879.280	51.56	3.20	74.0	-22.44	Peak	150.00	100	Horizontal	Pass
2**	4879.280	48.53	3.20	54.0	-5.47	AV	150.00	100	Horizontal	Pass

Report No.: TW2109003E Page 18 of 51

Date: 2021-09-09



Vertical

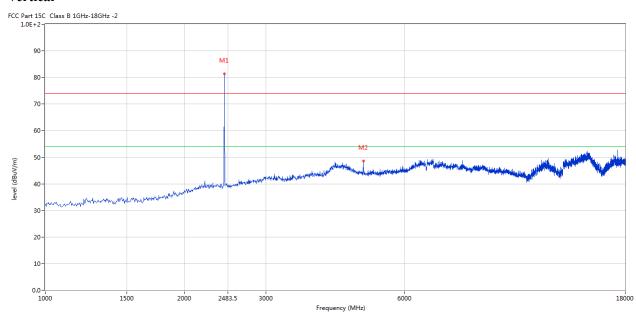

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	81.43	-3.57	114.0	-32.57	Peak	166.00	100	Vertical	Pass
2	4879.280	48.60	3.20	74.0	-25.40	Peak	174.00	100	Vertical	Pass


Report No.: TW2109003E Page 19 of 51

Date: 2021-09-09



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

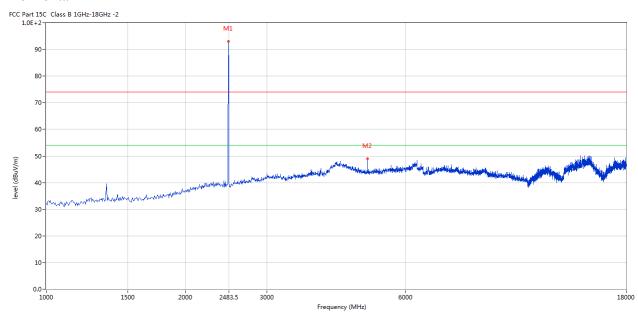


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.630	93.02	-3.57	114.0	-20.98	Peak	143.00	100	Horizontal	Pass
2	4960.010	48.94	3.36	74.0	-25.06	Peak	202.00	100	Horizontal	Pass

Report No.: TW2109003E Page 20 of 51

Date: 2021-09-09



Vertical

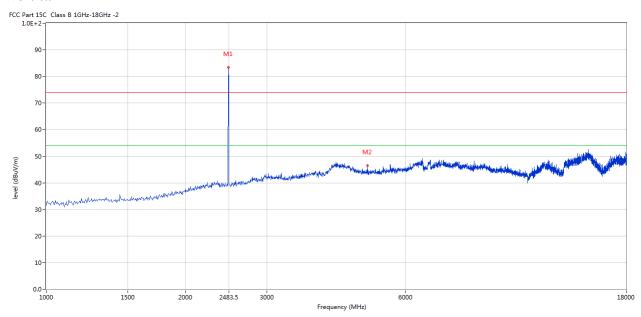

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.630	83.52	-3.57	114.0	-30.48	Peak	182.00	100	Vertical	Pass
2	4960.010	46.60	3.36	74.0	-27.40	Peak	188.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2109003E Page 21 of 51

Date: 2021-09-09




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

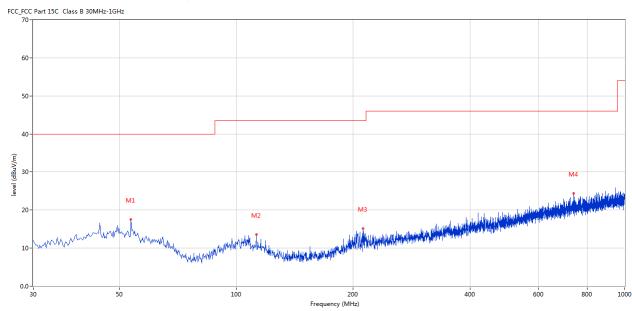

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	53.517	17.54	-11.52	40.0	-22.46	Peak	44.00	100	Horizontal	Pass
2	112.672	13.53	-13.95	43.5	-29.97	Peak	41.00	100	Horizontal	Pass
3	212.072	15.22	-13.68	43.5	-28.28	Peak	1.00	100	Horizontal	Pass
4	739.863	24.41	-3.55	46.0	-21.59	Peak	49.00	100	Horizontal	Pass

Report No.: TW2109003E Page 22 of 51

Date: 2021-09-09




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

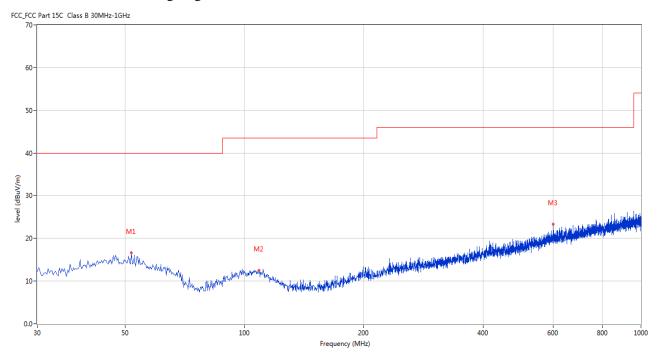

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	51.820	16.64	-11.42	40.0	-23.36	Peak	360.00	100	Vertical	Pass
2	108.793	12.52	-13.50	43.5	-30.98	Peak	359.00	100	Vertical	Pass
3	601.187	23.38	-5.05	46.0	-22.62	Peak	35.00	100	Vertical	Pass

Report No.: TW2109003E

Date: 2021-09-09




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

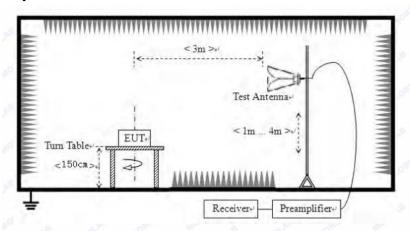

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2109003E


Date: 2021-09-09

Page 24 of 51



7.6 Test Result

Product:	TWS Earphone	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

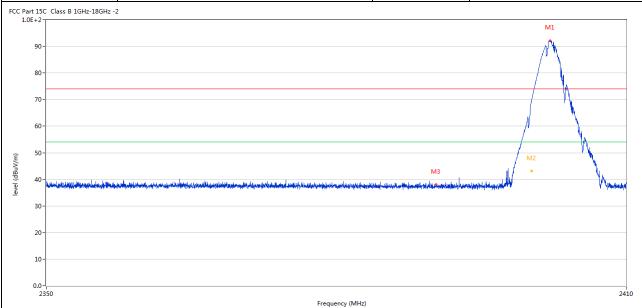

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	2400.087	65.08	-3.57	74.0	-8.92	Peak	148.00	100	Horizontal	Pass
2**	2400.087	43.19	-3.57	54.0	-10.81	AV	148.00	100	Horizontal	Pass
3	2390.160	38.11	-3.53	74.0	-35.89	Peak	52.00	100	Horizontal	Pass

Page 25 of 51 Rep

Report No.: TW2109003E Date: 2021-09-09	THIS LAND OF THE PARTY OF THE P
--	--

]	Product:		TWS Ea	rphone]	Detector		Ve	rtical	
Mode		K	Keeping Transmitting		Te	est Voltage		DC	23.7V	
Te	mperature		24 deg	g. C,	I	Humidity		56%	% RH	
Τe	est Result:		Pas	SS						
C Part 1 1.0E+	L5C Class B 1GHz-18GHz	-2			•		•			
9	0-							N	11	
8	0-								\	
7	0-									
6	0-									
	0								\ \	
. 5	0-					Ma		M2		
5		iday manamata interioratik peridinah sidinih sidinih sidini	and the later of a good free state to be seen a light to	i ildi saa dhiba dhadha qiladha sababada	Arritantis de la	M3	hadamah yake sindya posi	J	May have	orași de la
4		કોનું ૧૯ ૦૦, અલ્લાદ અને સ્ટેન્સ્ટ્રિક્સ સ્ટેન્સ્ટ્રિક્સ સ્ટેન્સ્ટ્રેન્ડ અને અને અને સ્ટેન્સ્ટ્રેન્ડ સ્ટેન્સ્ટ્રેન્ડ	Maritada en rengej komitan le kresanlijas	i vili il sam dilik sa di dilimaji ja pla sak da jeng	arana ka		lekskassadus pilpenktalis alguni	J	Mary Norwa	Market United
4	0-uhkerikaple piirkolarrettiin särjeka.	de, en annous, iribare, haid go il had collarly en cross	nerilada kerengelepilaka beradya	a vihili sure etti ka via etti majika Ha sua kerisha i	derassion des de la description de la descriptio		high and and a good a should be a good a	J	May Nove	er en
3	0 - whatafajik jiii ishi haya ili ishi dayak k	de, en mantaritain, aide en disad all anteriores	ne i sukk ser en en et grædin krik en udgar	તા મેન્દ્રી વાલક કરી છે. તમે કરી અને કરી કરી કરી હતા છે. તેને છે.	Artista Arabida		hidandogiph sechanni	J	Mark Market	oraphilition and
3 2	O- nikasidaple publishin rithin dayah. O- O-	એનું તમામાનુક લઈ, કરી હોતા કે તમાને કરી હોતા કે તમાને કરી હોતા હોતા હોતા હોતા હોતા હોતા હોતા હોતા	ne Planik Lev en egy frynthisky Berea afyn	a vikili mer etti ka vi ettimajika tika sakoka di	· 李明·李明·李明·李明·李明·李明·李明·李明·李明·李明·李明·李明·李明·李		kida aring da da in a pari	J	Mary Mary	west that is completed.
. 4 3 2	O- nikasidaple publishin rithin dayah. O- O-	de, enemones, irisare, acides estados de electrones	ne. i Lada Lev-conqui francisco los desculos n				hidanai yydi varinayni	J	Mark Mark	2410
4 3 2 1	0			F	requency (MHz)			No. All Section (Control of Control of Contr		2410
4 3 2 1	o	Results	Factor	F. Limit	requency (MHz) Over Limit		Table	Height	ANT	
4 3 2 1	0		Factor (dB)	F	requency (MHz)			No. All Section (Control of Control of Contr		2410 Verdic
3 3 2 1 0.	o- 0- 0- 0- 2350 Frequency (MHz)	Results (dBuV/m)	Factor	Limit (dBuV/m)	requency (MHz) Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	2410

Report No.: TW2109003E Page 26 of 51

Date: 2021-09-09



	Product: TWS Earphone		arphone		Polarity		Н	orizontal		
Mode Keeping Transmitting		ransmitting		Test Volta	ge]	DC3.7V			
T	emperature		24 de	eg. C,		Humidit	y	4	56% RH	
T	est Result:		Pa	iss						
CC Part	: 15C Class B 1GHz-18GH:	z -2					•			
level (dBuV/m)	90- 80- 70- 60- 50- 40-	a in mar substrated to the first of the substrate of the		NS AVAINAGE AND AV	4. Astronomero	had hely interesting to be a dead an according higher	a de se quae colificio de color de de de co	h de la company de la comp	to market and analysis desirable and analysis of the second	ovjedenský nej
	20-									
	10-									
	0.0- 2470			2483.	.5 Frequency (MHz)					2500
No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdic
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
2	2483.422	58.25	-3.57	74.0	-15.75	Peak	147.00	100	Horizontal	Pass
					1			1		i _

Report No.: TW2109003E Page 27 of 51

Date: 2021-09-09



]	Product:		TWS Ear	rphone		Detector		Ve	rtical	
Mode		ode Keeping Transmitting		Tes	Test Voltage		DC3.7V			
Temperature 24 deg. C,			g. C,	Н	lumidity		56% RH			
Te	Test Result: Pass									
CC Part 1	.5C Class B 1GHz-18GHz	-2			•					
9	0-									
			Many	. .						
8	0-			M						
7	0-		_/	/						
6	0-									
5	0-		/	, ,						
5	0	n delstan en	/	1	Market wife wife with a state of the same	المراجعة المستعدد والمستعدد والمستعدد والمستعدد المستعدد المستعدد المستعدد المستعدد والمستعدد والمستعد والمستعدد والمستعدد والمستعدد والمستعدد والمستعدد والمستعدد وال	نقت فاد بافرد تا الاسروب فيستفيذا	وروانية والمراورة ومرسوري أن والمراورة ومرسوري	والمراجع والمراطعة والمتالية والمتال	Maria Buand
(iii/apan) 5/4	O-	n dad ki sarungin dan sabanda da ka	/	1	hong with which the control of the c	tunkiranganakisilitik/dipaligka/d	معياض والمعارض والم والمعارض والمعارض والمعارض والمعارض والمعارض والمعارض والمعارض و	t for the place who we have been able to the second	emengagia, judi dikasak adaptan can d	indinatelijaas d
(Anga) 4	O-	n dadi kanangan dan cabanarah da	/	7	A Marie and a second constraint	tado so que interpr iso de desta de la constanta de la consta	ng Papaganak (i a yang da gara)	resident a resident des	romenting about the state of th	(Apadalpus d
M/Angp) 4	O-	n diele la recognitation està residente de la constitución de la const	/		hong with web with a single the second secon	tando annaminesistrik (sajudajdu) d	મારી ^{મા} ના કેમ પહિલ્લો કરો છે. તે માર્ચ કરો કરો કરો છે. તે માર્ચ કરો કરો કરો છે. તે માર્ચ કરો કરો કરો કરો કરો કરો 	terdidising periodising	enagasijus, jabilistalis papakasini k	injunistrijus d
E/(\ngp) level	0-	n diselle la prompte a sich misse der der			And who were national instrument	रिकोर कर कुला के स्वीति हो हो है हो है कि है	al ^h ubrygandiv.eha.gva	મું મહિલાનો કુલાનો કુલાનો કહેલા કેટલા કહેલા ક	enegrapia, gib direct kabulurini d	tipe manifeste de
E/(Angp) 4-4 3-3 3-4 1-4 1-4 1-4 1-4 1-4 1-4 1-4 1-4 1-4 1	0-	n dad bi sannya atau cabanisa da		2483.5		रेक्केट अन्यवस्था स्थापित होता है। इस्ते प्रकार स्थापित स	nd ^a ndrusendel.nem.ha _l en	જ્યાં કે કુલ્લાનું ક	ennergia, qui direct habeix vinsi	2500
(Appl) 44 34 34 34 34 34 34 3	0- 0- 0- 0- 0- 0- 0- 0- 2470		Factor		Frequency (MHz)					2500
E/(Angp) 4-4 3-3 3-4 1-4 1-4 1-4 1-4 1-4 1-4 1-4 1-4 1-4 1	o- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0-	Results	Factor (dR)	Limit	Frequency (MHz) Over Limit	Detector	Table	Height	ANT	
(Appl) 44 34 34 34 34 34 34 3	0- 0- 0- 0- 0- 0- 0- 0- 2470		Factor (dB)		Frequency (MHz)					2500

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 3. The three modulation modes of GFSK, Pi/4D-QPSK and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TW2109003E Page 28 of 51

Date: 2021-09-09



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a Ceramic antenna with gain 1.0dBi Max. It fulfills the requirement of this section.


Test Result: Pass

Report No.: TW2109003E Page 29 of 51

Date: 2021-09-09



9.0 20dB Bandwidth Measurement				
GFSK Modulation				
Product:	TWS Earphone	Test Mode:	Keep transmitting	
Mode	Keeping Transmitting	Test Voltage	DC3.7V	
Temperature	24 deg. C,	Humidity	56% RH	
Test Result:	Pass	Detector	PK	
20dB Bandwidth	660.00kHz			

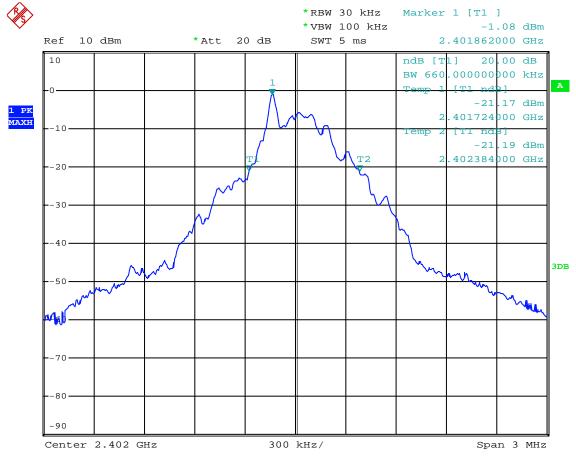

Date: 8.SEP.2021 15:06:37


Page 30 of 51

Report No.: TW2109003E

Date: 2021-09-09



GFSK Modulation					
Product:	TWS Earphone	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	660.00kHz				

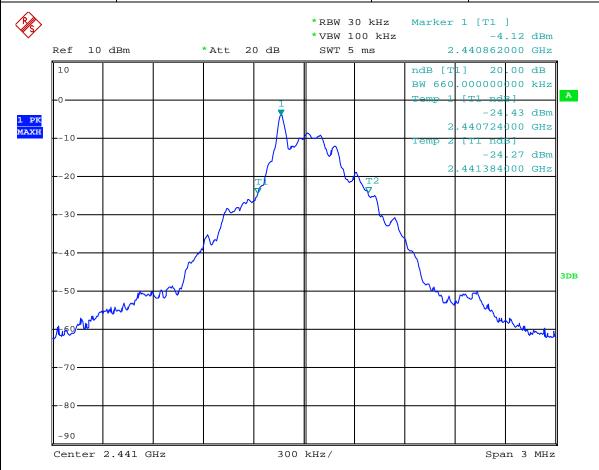

Date: 8.SEP.2021 15:06:02


Page 31 of 51

Report No.: TW2109003E

Date: 2021-09-09



GFSK Modulation					
Product:	TWS Earphone	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	660.00kHz				

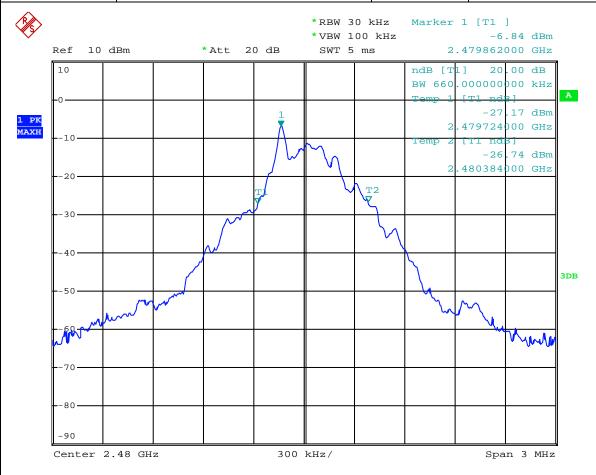

Date: 8.SEP.2021 15:04:56


Page 32 of 51

Report No.: TW2109003E

Date: 2021-09-09



Pi/4D-QPSK Modulation				
Product:	TWS Earphone	Test Mode:	Keep transmitting	
Mode	Keeping Transmitting	Test Voltage	DC3.7V	
Temperature	24 deg. C,	Humidity	56% RH	
Test Result:	Pass	Detector	PK	
20dB Bandwidth	1.110MHz			

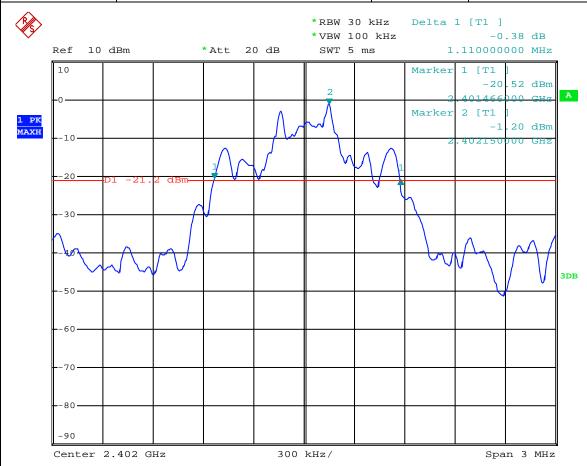

Date: 8.SEP.2021 15:07:58


Page 33 of 51

Report No.: TW2109003E

Date: 2021-09-09



Pi/4D-QPSK M	Pi/4D-QPSK Modulation				
Product:	TWS Earphone	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.110MHz				

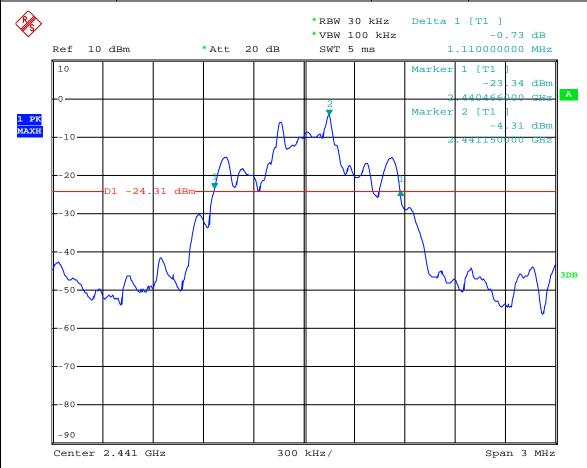

Date: 8.SEP.2021 15:09:09


Page 34 of 51

Report No.: TW2109003E

Date: 2021-09-09



Pi/4D-QPSK Modulation				
Product:	TWS Earphone	Test Mode:	Keep transmitting	
Mode	Keeping Transmitting	Test Voltage	DC3.7V	
Temperature	24 deg. C,	Humidity	56% RH	
Test Result:	Pass	Detector	PK	
20dB Bandwidth	1.116MHz			

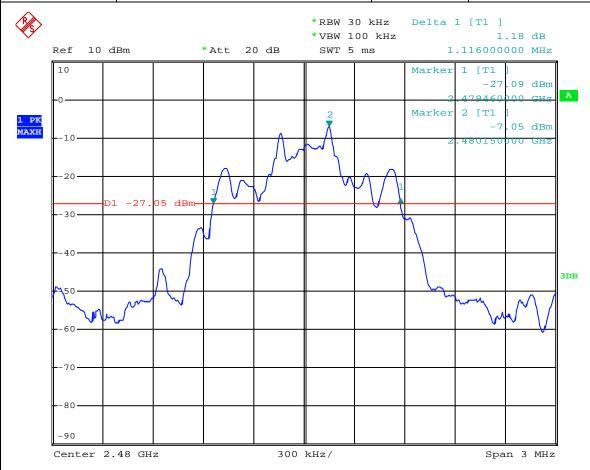

Date: 8.SEP.2021 15:10:15


Page 35 of 51

Report No.: TW2109003E

Date: 2021-09-09



8QPSK Modula	8QPSK Modulation					
Product:	TWS Earphone	Test Mode:	Keep transmitting			
Mode	Keeping Transmitting	Test Voltage	DC3.7V			
Temperature	24 deg. C,	Humidity	56% RH			
Test Result:	Pass	Detector	PK			
20dB Bandwidth	1.152MHz					

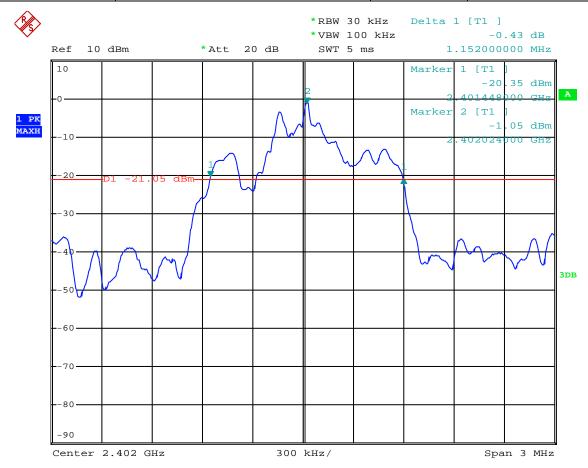

Date: 8.SEP.2021 15:14:41


Page 36 of 51

Report No.: TW2109003E

Date: 2021-09-09



8QPSK Modulation					
Product:	TWS Earphone	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.146MHz				

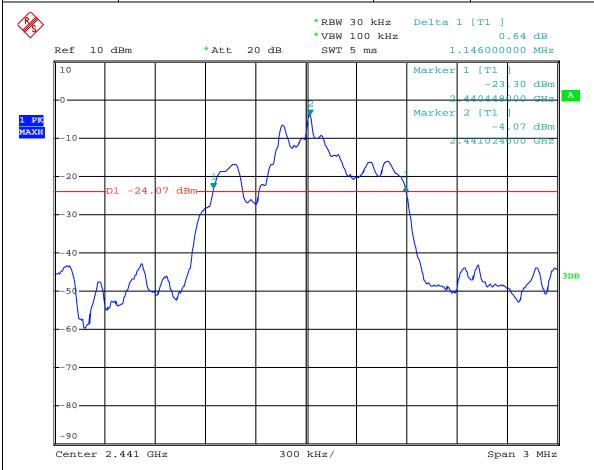

Date: 8.SEP.2021 15:12:31


Page 37 of 51

Report No.: TW2109003E

Date: 2021-09-09



8QPSK Modulation			
Product:	TWS Earphone	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.158MHz		

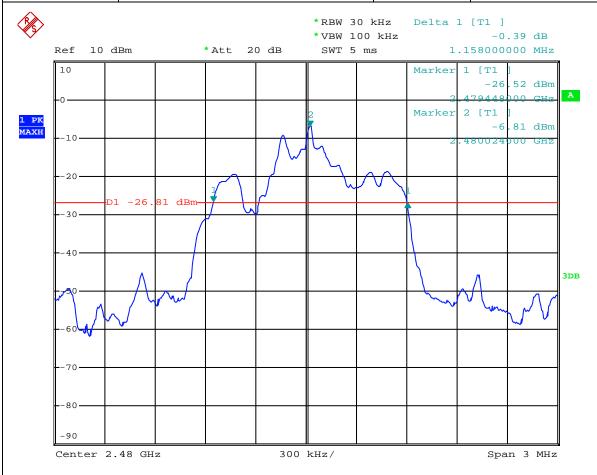

Date: 8.SEP.2021 15:11:16

Report No.: TW2109003E Page 38 of 51

Date: 2021-09-09



10.0 FCC ID Label

FCC ID: WKA-TW173B

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Report No.: TW2109003E Page 39 of 51

Date: 2021-09-09



11.0 Photo of testing

11.1 Conducted test View--




Page 40 of 51

Report No.: TW2109003E

Date: 2021-09-09



Radiated emission test view

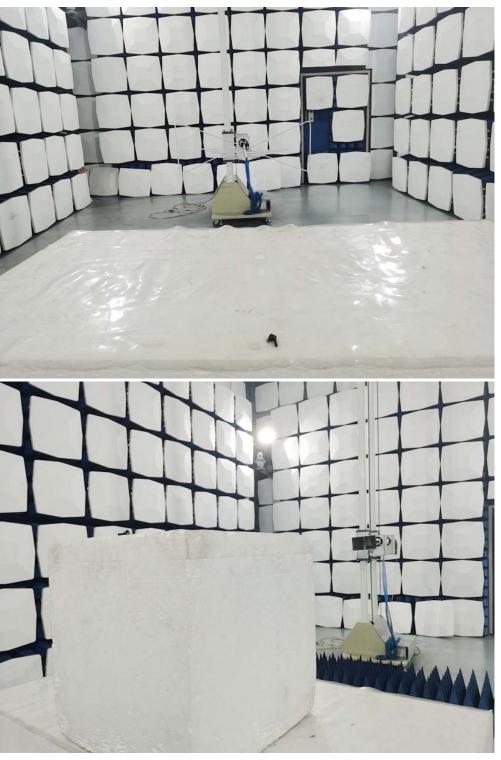

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2109003E

Date: 2021-09-09



11.2 Photographs – EUT

Outside View - charger base



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 42 of 51

Report No.: TW2109003E Date: 2021-09-09



Outside View - charger base



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 43 of 51

Report No.: TW2109003E

Date: 2021-09-09



Inside View - charger base

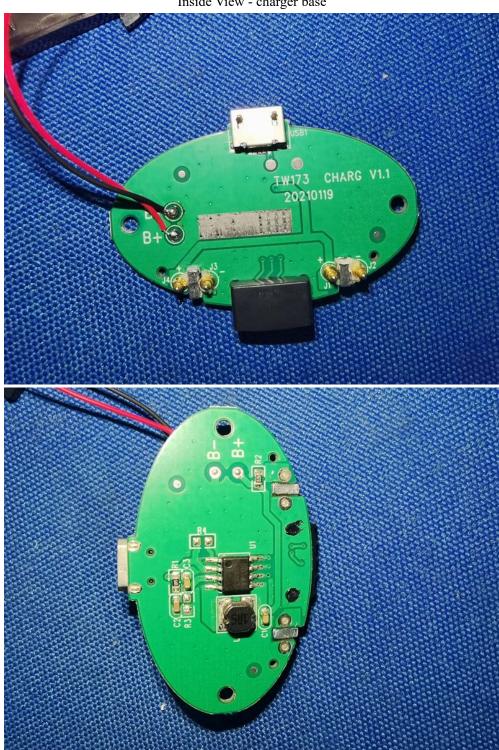

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2109003E Page 44 of 51

Date: 2021-09-09



Inside View - charger base




Page 45 of 51

Report No.: TW2109003E

Date: 2021-09-09



Outside View - Left earphone

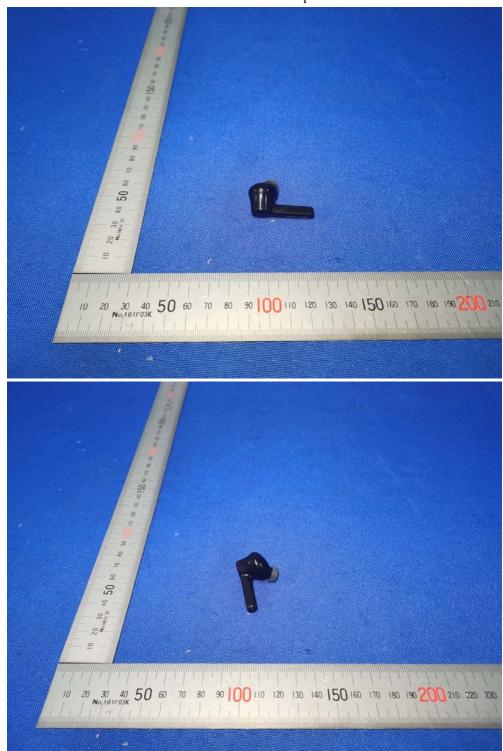

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 46 of 51

Date: 2021-09-09

Report No.: TW2109003E



Outside View - Left earphone

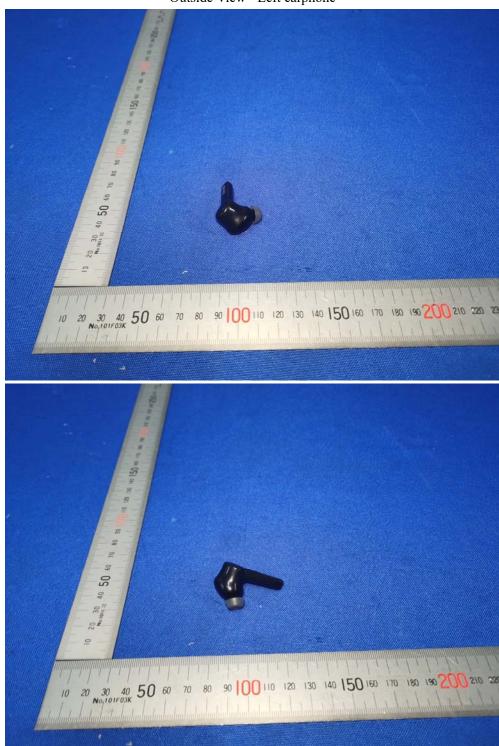

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 47 of 51

Report No.: TW2109003E

Date: 2021-09-09



Inside View - Left earphone

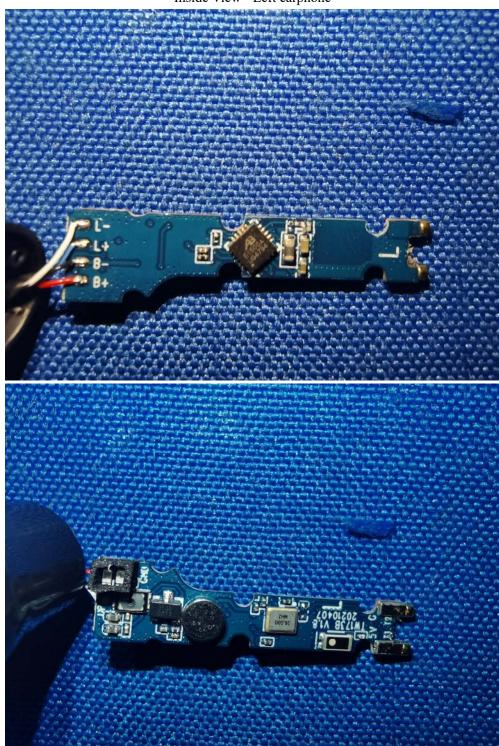

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2109003E Page 48 of 51

Date: 2021-09-09



Inside View - Left earphone




Page 49 of 51

Report No.: TW2109003E

Date: 2021-09-09



Outside View - Right earphone

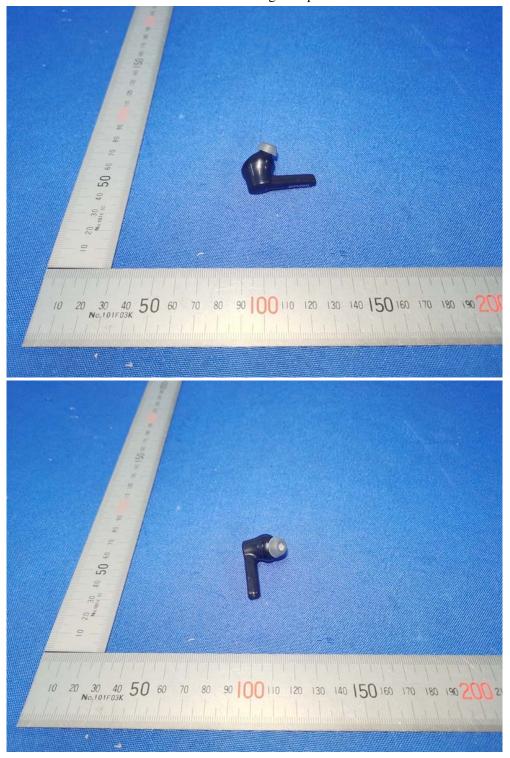

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2109003E

Date: 2021-09-09



Outside View - Right earphone

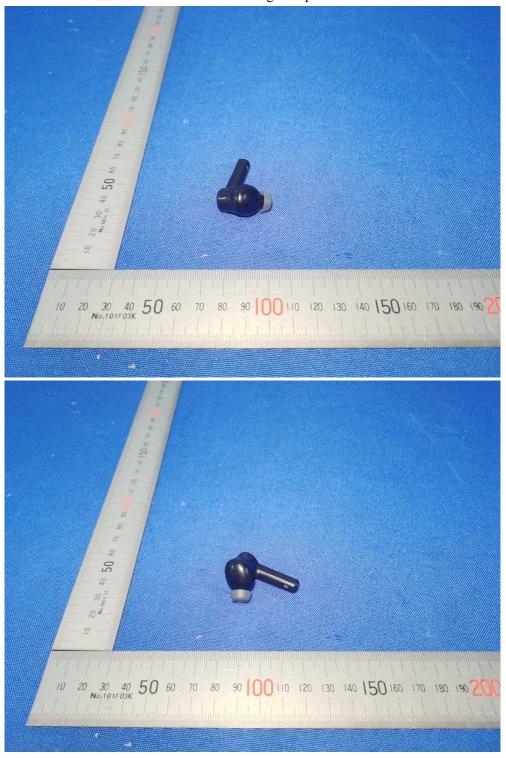

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 51 of 51

Report No.: TW2109003E

Date: 2021-09-09



Inside View - Right earphone

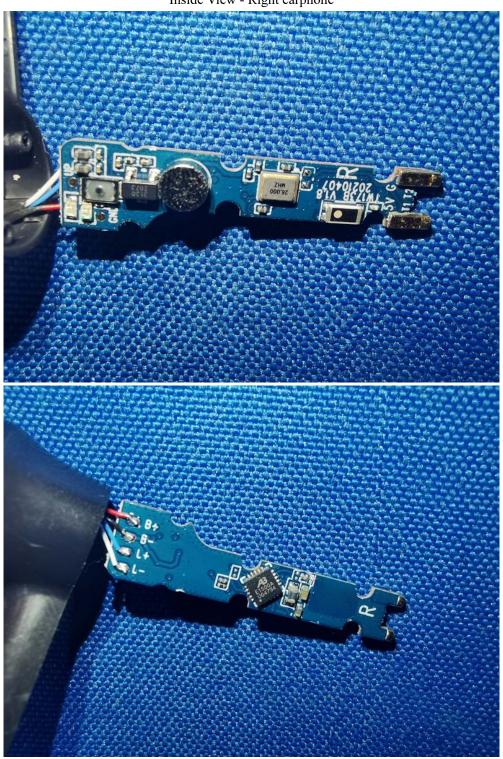

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.