

TEST REPORT

Product Name : Wireless Mini Speaker
Brand Mark : NA
Model No. : Bass 13 Wireless Mini Speaker
FCC ID : WKABSAA13
Report Number : BLA-EMC-202105-A5202
Date of Sample Receipt : 2021/5/14
Date of Test : 2021/5/14 to 2021/6/25
Date of Issue : 2021/6/25
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Maxell Corporation of America

3 Garret Mountain, 3rd Floor/Suite#300, Woodland Park NJ, 07424

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

**Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by:

Hasan
Jmen Li

Review by:

Sweell

Approved by:

Date: 2021/6/25



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/6/25	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.....	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST.....	10
10	ANTENNA REQUIREMENT	14
10.1	CONCLUSION	14
11	CONDUCTED SPURIOUS EMISSIONS	15
11.1	LIMITS	15
11.2	BLOCK DIAGRAM OF TEST SETUP	15
11.3	TEST DATA.....	16
12	CONDUCTED PEAK OUTPUT POWER	17
12.1	LIMITS	17
12.2	BLOCK DIAGRAM OF TEST SETUP	17
12.3	TEST DATA.....	18
13	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	19
13.1	LIMITS	19
13.2	BLOCK DIAGRAM OF TEST SETUP	19
13.3	PROCEDURE	19
13.4	TEST DATA.....	21
14	RADIATED SPURIOUS EMISSIONS.....	23
14.1	LIMITS	23
14.2	BLOCK DIAGRAM OF TEST SETUP	24
14.3	PROCEDURE	24
14.4	TEST DATA.....	26

15 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	34
15.1 LIMITS	34
15.2 BLOCK DIAGRAM OF TEST SETUP	35
15.3 PROCEDURE	35
15.4 TEST DATA.....	37
16 CONDUCTED BAND EDGES MEASUREMENT.....	41
16.1 LIMITS	41
16.2 BLOCK DIAGRAM OF TEST SETUP	41
16.3 TEST DATA.....	42
17 DWELL TIME.....	43
17.1 LIMITS	43
17.2 BLOCK DIAGRAM OF TEST SETUP	43
17.3 TEST DATA.....	44
18 HOPPING CHANNEL NUMBER	45
18.1 LIMITS	45
18.2 BLOCK DIAGRAM OF TEST SETUP	45
18.3 TEST DATA.....	45
19 CARRIER FREQUENCIES SEPARATION	46
19.1 LIMITS	46
19.2 BLOCK DIAGRAM OF TEST SETUP	46
19.3 TEST DATA.....	46
20 20DB BANDWIDTH.....	47
20.1 BLOCK DIAGRAM OF TEST SETUP	47
20.2 TEST DATA.....	47
21 APPENDIX.....	48
21.1 MAXIMUM CONDUCTED OUTPUT POWER	48
21.2 -20DB BANDWIDTH	53
21.3 OCCUPIED CHANNEL BANDWIDTH.....	58
21.4 BAND EDGE	63
21.5 BAND EDGE(HOPPING)	70
21.6 CONDUCTED RF SPURIOUS EMISSION	77
21.7 CARRIER FREQUENCIES SEPARATION	87
21.8 DWELL TIME	91

APPENDIX A: PHOTOGRAPHS OF TEST SETUP	95
APPENDIX B: PHOTOGRAPHS OF EUT	97

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass

2 GENERAL INFORMATION

Applicant	Maxell Corporation of America
Address	3 Garret Mounain, 3rd Floor/Suite#300, Woodland Park NJ, 07424
Manufacturer	Shenzhen E-Ran Technology Co., Ltd
Address	North Section, 6th Floor, Block 9A, Xiangxiang Industrial Park, Yingrenshi community, Shiyan Sub district, Baoan District, Shenzhen, China
Factory	Shenzhen E-Ran Technology Co., Ltd
Address	North Section, 6th Floor, Block 9A, Xiangxiang Industrial Park, Yingrenshi community, Shiyan Sub district, Baoan District, Shenzhen, China
Product Name	Wireless Mini Speaker
Test Model No.	Bass 13 Wireless Mini Speaker

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.0
Software Version	V1.0
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	-0.58dBi(Provided by the applicant)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.7V
Extreme	-20°C ~ +55°C	Low 3.5Vdc, High 4.2Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission, DH1,DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned Only the 8-DPSK, of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	安泰信	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Dwell Time

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Hopping Channel Number

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Carrier Frequencies Separation					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of 20dB Bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

10 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


10.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.58dBi.

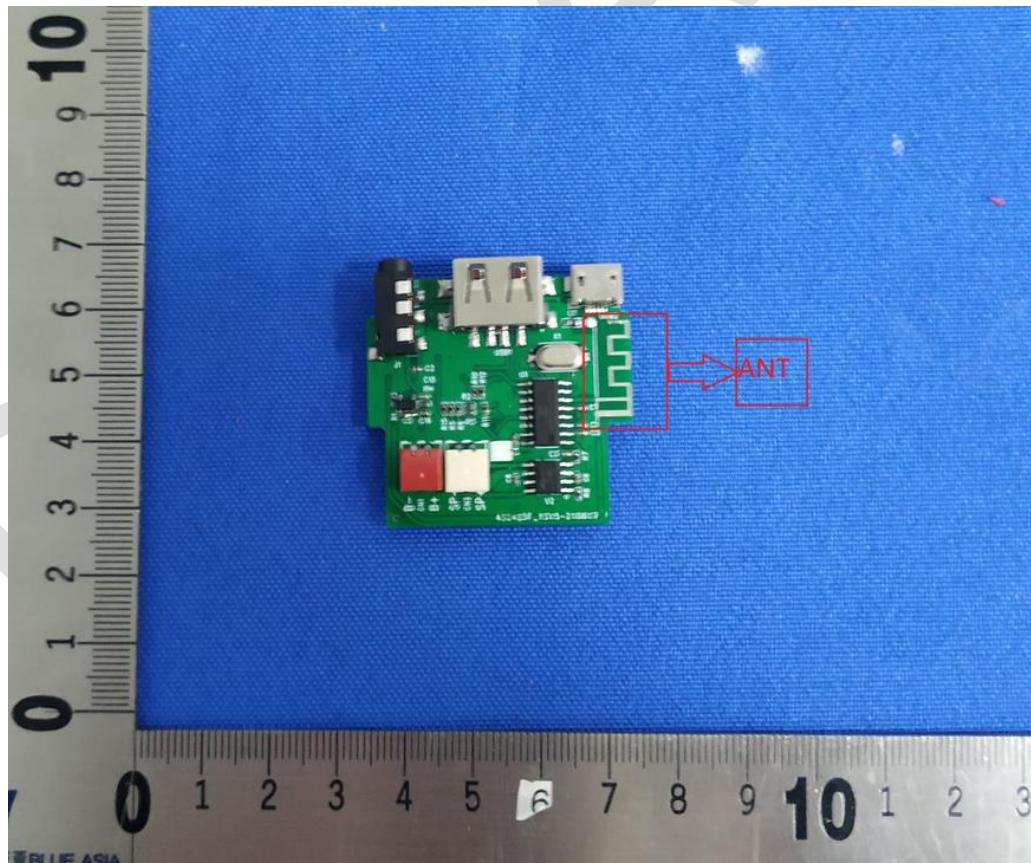


11 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

11.2 BLOCK DIAGRAM OF TEST SETUP

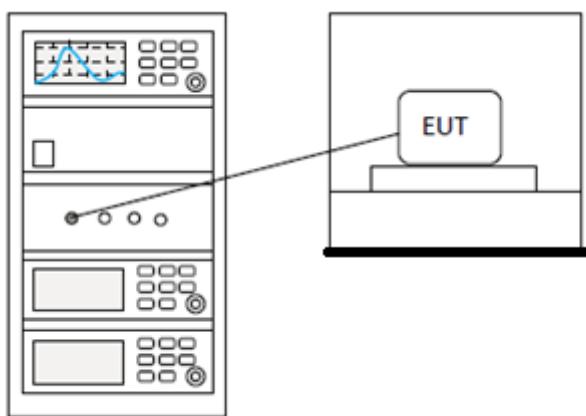

11.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


12 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

12.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

12.2 BLOCK DIAGRAM OF TEST SETUP

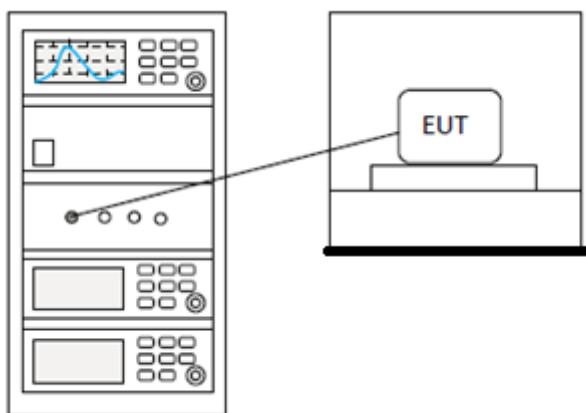

12.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia

13 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

13.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

13.2 BLOCK DIAGRAM OF TEST SETUP

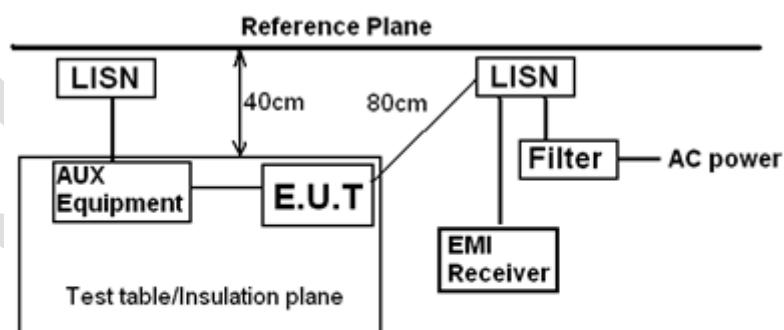

Remark
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

13.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 50hm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

13.4 TEST DATA

[TestMode: TX]; [Line: Line][Power:120V/60Hz]

Conducted Emission Measurement

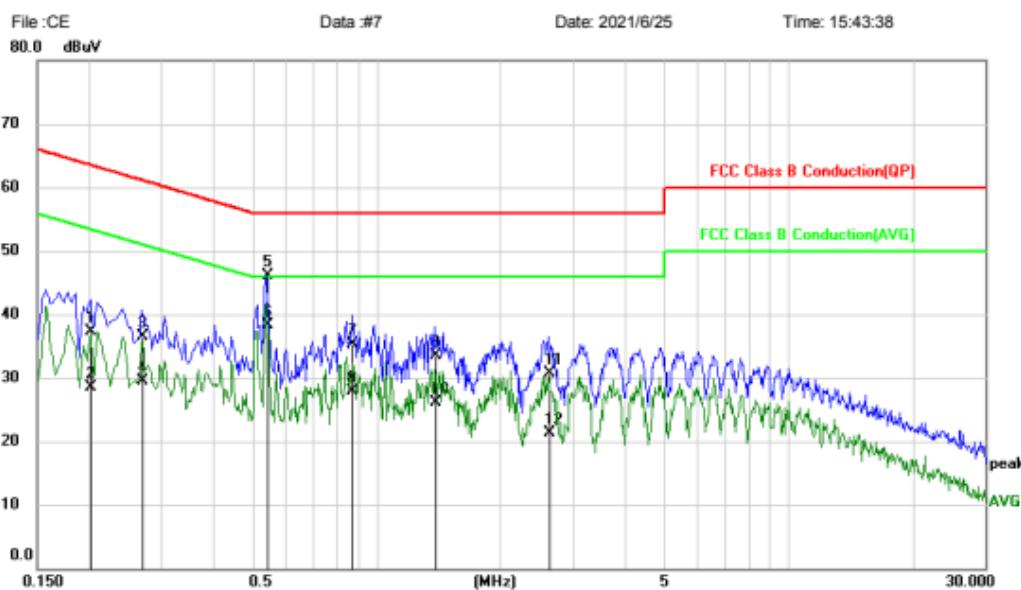

Site: Phase: **L1** Temperature:
Limit: FCC Class B Conduction(QP) Power: Humidity: %
EUT: Wireless Mini Speaker
M/N: Bass 13 Wireless Mini Speaker
Mode: BT mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2020	27.44	9.83	37.27	63.53	-26.26	QP	
2		0.2020	18.73	9.83	28.56	53.53	-24.97	AVG	
3		0.2700	26.69	9.84	36.53	61.12	-24.59	QP	
4		0.2700	19.57	9.84	29.41	51.12	-21.71	AVG	
5	*	0.5420	36.14	9.87	46.01	56.00	-9.99	QP	
6	*	0.5420	28.50	9.87	38.37	46.00	-7.63	AVG	
7		0.8740	25.31	9.91	35.22	56.00	-20.78	QP	
8		0.8740	18.08	9.91	27.99	46.00	-18.01	AVG	
9		1.3860	23.61	9.93	33.54	56.00	-22.46	QP	
10		1.3860	16.10	9.93	26.03	46.00	-19.97	AVG	
11		2.6180	20.65	9.96	30.61	56.00	-25.39	QP	
12		2.6180	11.34	9.96	21.30	46.00	-24.70	AVG	


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX]; [Line: Nutral][Power:120V/60Hz]

Conducted Emission Measurement

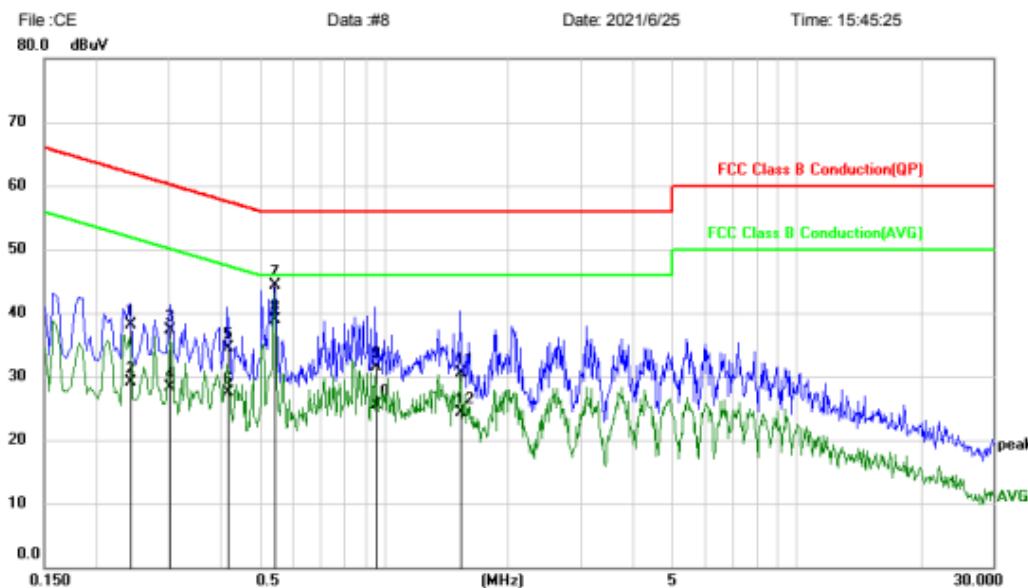

Site

Phase: **N**

Temperature:

Limit: FCC Class B Conduction(QP)

Power:

Humidity: %

EUT: Wireless Mini Speaker

M/N: Bass 13 Wireless Mini Speaker

Mode: BT mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2420	28.30	9.76	38.06	62.03	-23.97	QP	
2		0.2420	19.43	9.76	29.19	52.03	-22.84	AVG	
3		0.3020	27.51	9.77	37.28	60.19	-22.91	QP	
4		0.3020	18.44	9.77	28.21	50.19	-21.98	AVG	
5		0.4180	24.66	9.78	34.44	57.49	-23.05	QP	
6		0.4180	17.81	9.78	27.59	47.49	-19.90	AVG	
7		0.5420	34.48	9.79	44.27	56.00	-11.73	QP	
8 *		0.5420	29.10	9.79	38.89	46.00	-7.11	AVG	
9		0.9580	21.76	9.84	31.60	56.00	-24.40	QP	
10		0.9580	15.69	9.84	25.53	46.00	-20.47	AVG	
11		1.5300	20.74	9.85	30.59	56.00	-25.41	QP	
12		1.5300	14.36	9.85	24.21	46.00	-21.79	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

14 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX middle channel;TX Low channel;TX high channel
Test Mode (Final Test)	TX middle channel;TX Low channel;TX high channel
Tester	Eason
Temperature	25 °C
Humidity	52%

14.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

14.2 BLOCK DIAGRAM OF TEST SETUP

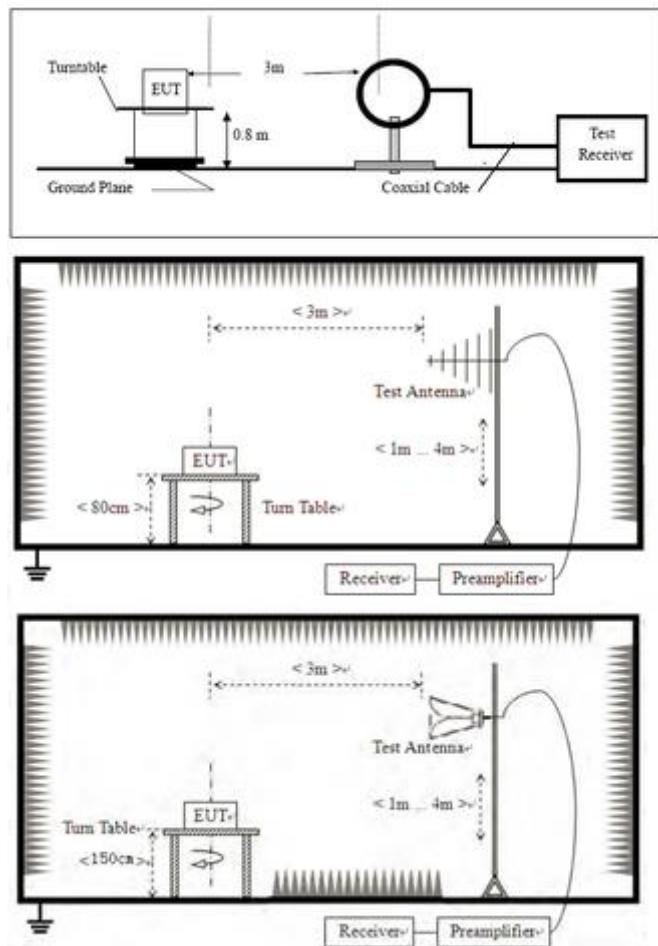

14.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

14.4 TEST DATA

[Test mode: TX]; [Polarity: Horizontal]

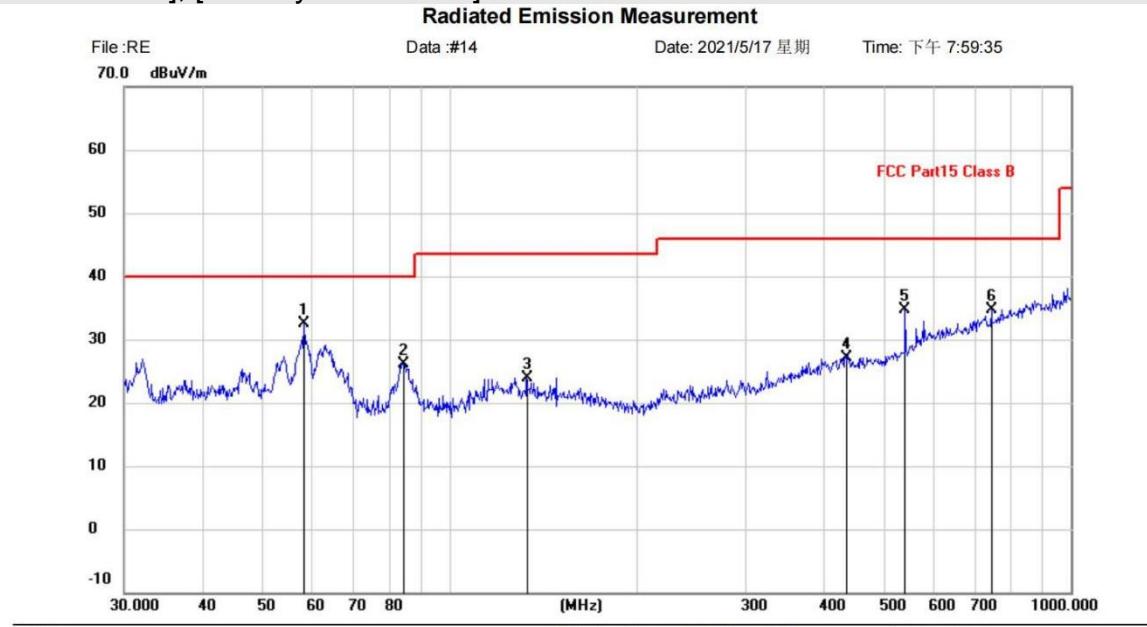

Site
Limit: FCC Part15 Class B
EUT: Wireless Mini Speaker
M/N: Bass 13 Wireless Mini Speaker
Mode: BT mode
Note:

Polarization: ***Horizontal***

Temperature:

Power:

Humidity: %


Distance:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	58.4074	9.02	23.50	32.52	40.00	-7.48	QP		
2		84.1100	6.70	19.47	26.17	40.00	-13.83	QP		
3		133.1511	0.90	23.10	24.00	43.50	-19.50	QP		
4		434.0651	-0.72	27.92	27.20	46.00	-18.80	QP		
5		541.3725	4.99	29.63	34.62	46.00	-11.38	QP		
6		744.8661	1.33	33.43	34.76	46.00	-11.24	QP		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

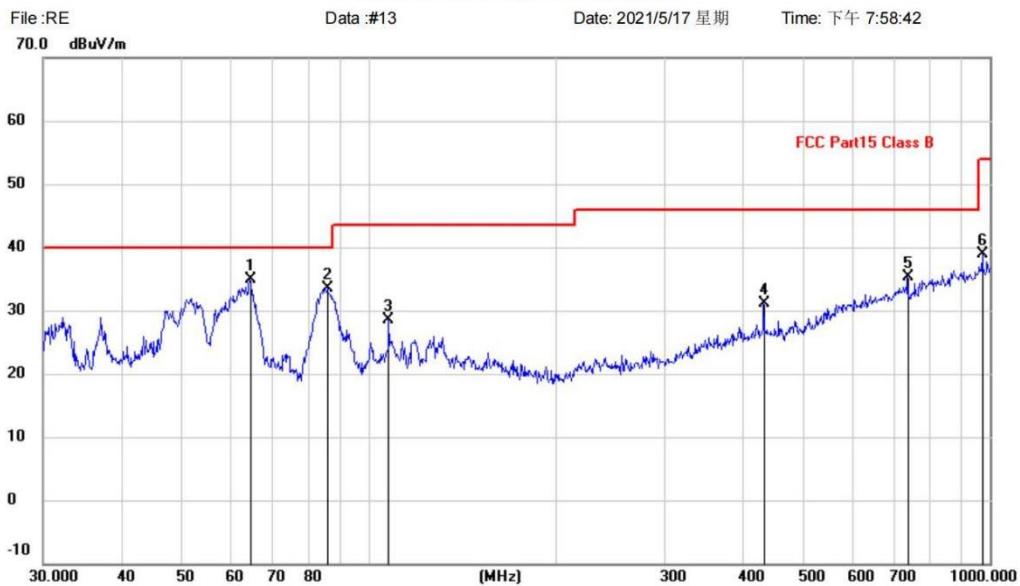[Test mode: TX]; [Polarity: Vertical]
Radiated Emission Measurement


Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 Class B	Power:	Humidity: %
EUT: Wireless Mini Speaker	Distance:	
M/N: Bass 13 Wireless Mini Speaker		
Mode: BT mode		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	64.4331	12.42	22.51	34.93	40.00	-5.07	QP			
2		85.8984	14.17	19.39	33.56	40.00	-6.44	QP			
3		107.8877	7.22	21.28	28.50	43.50	-15.00	QP			
4		432.5457	3.17	27.92	31.09	46.00	-14.91	QP			
5		737.0714	2.06	33.29	35.35	46.00	-10.65	QP			
6		972.3374	2.34	36.50	38.84	54.00	-15.16	QP			


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test mode: TX Low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

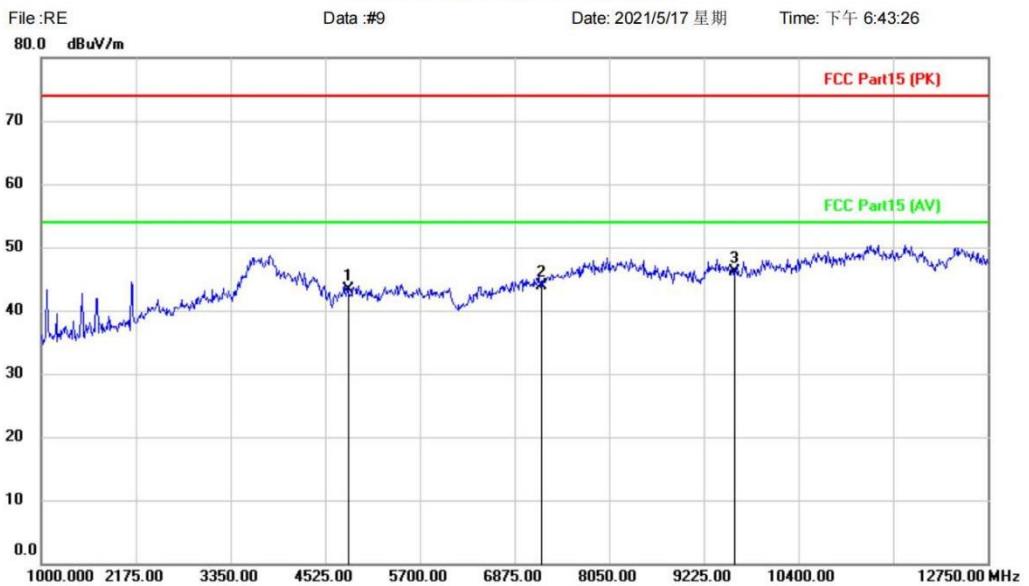

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Wireless Mini Speaker

Distance:

M/N: Bass 13 Wireless Mini Speaker

Mode: TX-L

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4804.000	39.53	3.71	43.24	74.00	-30.76	peak		
2		7206.000	37.92	5.96	43.88	74.00	-30.12	peak		
3	*	9608.000	36.79	9.29	46.08	74.00	-27.92	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test mode: TX Low channel]; [Polarity: Vertical]

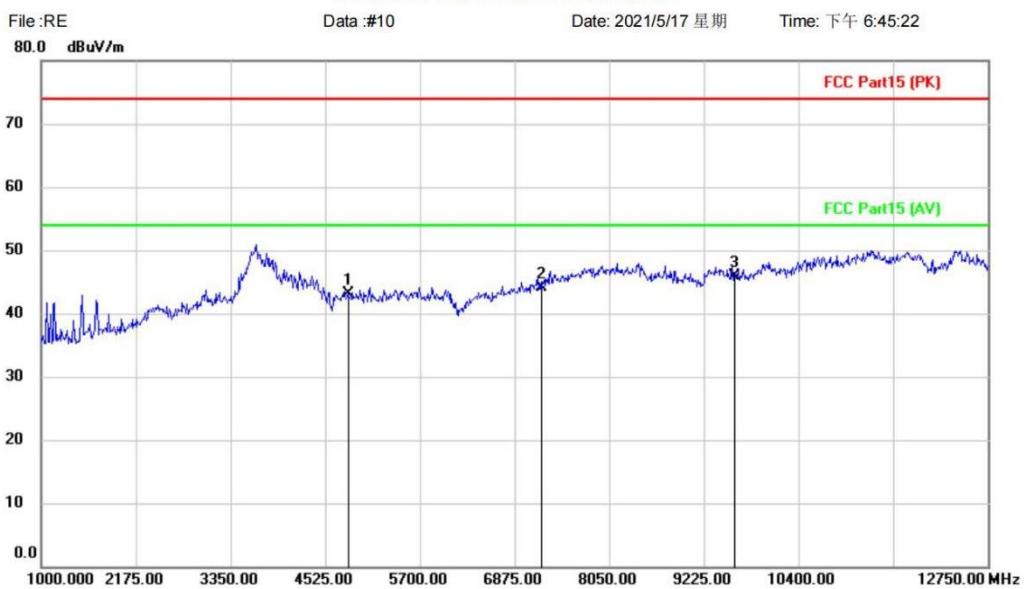Radiated Emission Measurement


Site Polarization: **Vertical** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Wireless Mini Speaker Distance:
M/N: Bass 13 Wireless Mini Speaker
Mode: TX-L
Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4804.000	39.38	3.71	43.09	74.00	-30.91	peak		
2		7206.000	38.09	5.96	44.05	74.00	-29.95	peak		
3	*	9608.000	36.65	9.29	45.94	74.00	-28.06	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Horizontal]
Radiated Emission Measurement

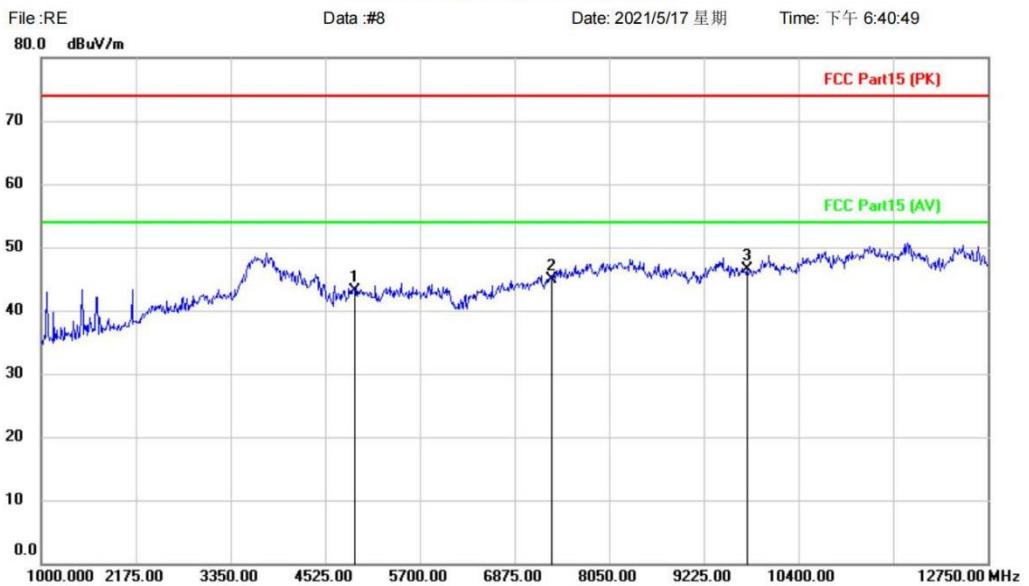

Site Polarization: **Horizontal** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Wireless Mini Speaker Distance:
M/N: Bass 13 Wireless Mini Speaker
Mode: TX-M
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4882.000	39.76	3.36	43.12	74.00	-30.88	peak		
2		7323.000	38.50	6.43	44.93	74.00	-29.07	peak		
3	*	9764.000	36.81	9.63	46.44	74.00	-27.56	peak		

*:Maximum data x:Over limit !:over margin


(Reference Only)

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Vertical]

Radiated Emission Measurement

File :RE Data :#7 Date: 2021/5/17 星期 Time: 下午 6:39:03

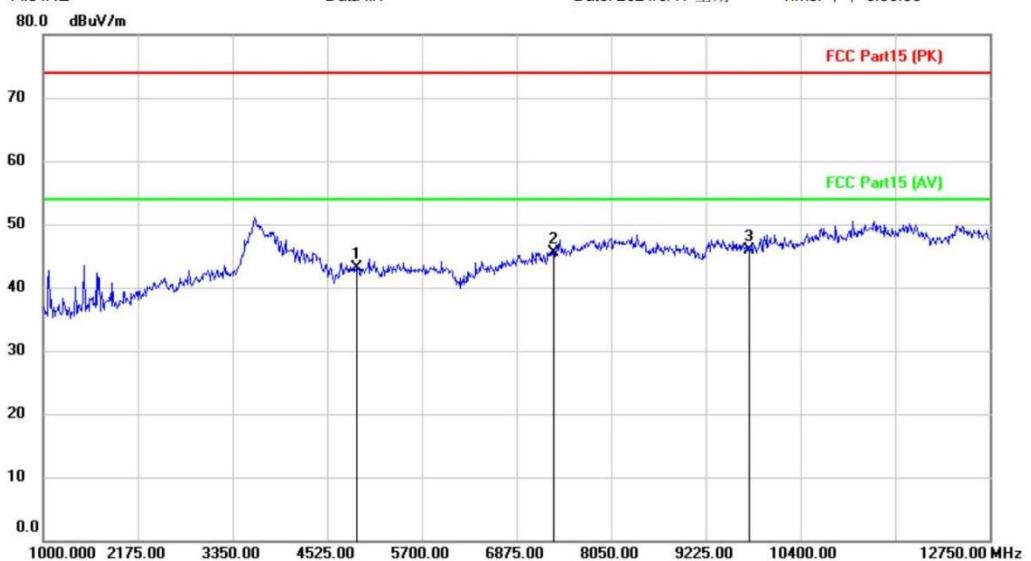

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Wireless Mini Speaker

Distance:

M/N: Bass 13 Wireless Mini Speaker

Mode: TX-M

Note:


No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height cm	Table Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	degree	
1		4882.000	39.79	3.36	43.15	74.00	-30.85	peak		
2		7323.000	39.17	6.43	45.60	74.00	-28.40	peak		
3	*	9764.000	36.31	9.63	45.94	74.00	-28.06	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test mode: TX highest channel]; [Polarity: Horizontal]
Radiated Emission Measurement

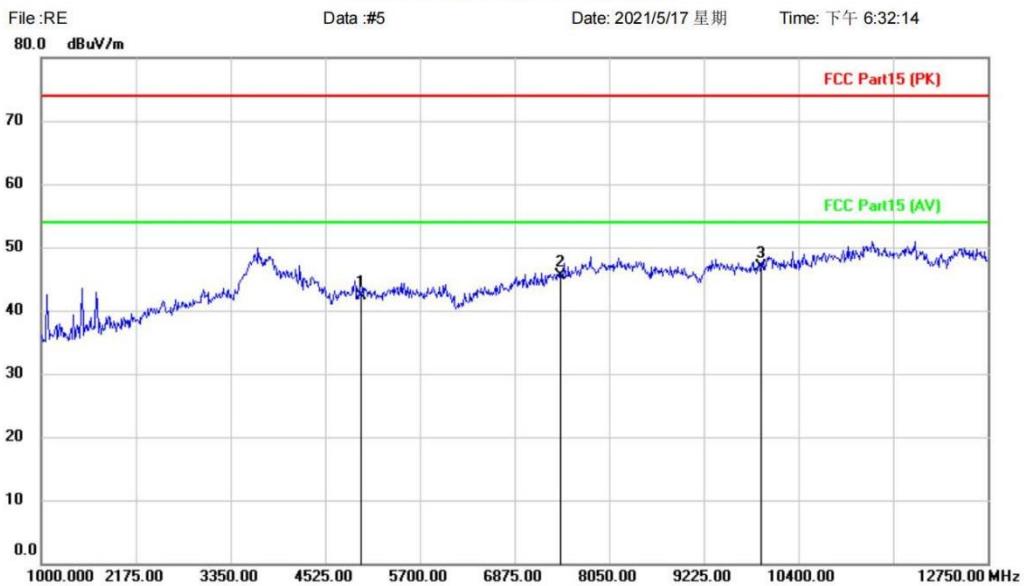

Site Polarization: **Horizontal** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Wireless Mini Speaker Distance:
M/N: Bass 13 Wireless Mini Speaker
Mode: TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4960.000	38.64	3.75	42.39	74.00	-31.61	peak		
2		7440.000	38.70	6.86	45.56	74.00	-28.44	peak		
3	*	9920.000	36.67	10.16	46.83	74.00	-27.17	peak		


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test mode: TX highest channel]; [Polarity: Vertical]

Radiated Emission Measurement

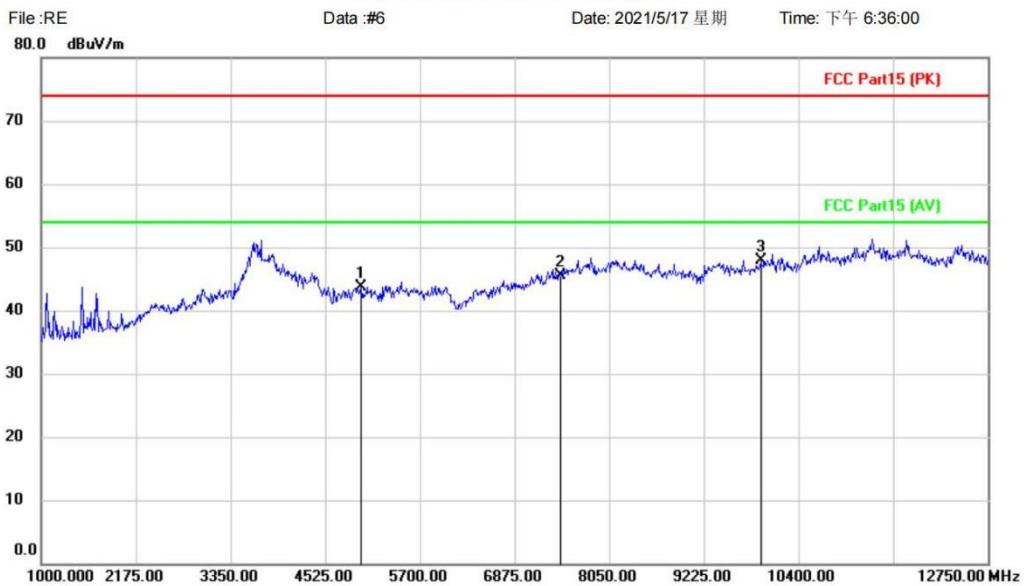

Site Polarization: **Vertical** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Wireless Mini Speaker Distance:
M/N: Bass 13 Wireless Mini Speaker
Mode: TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4960.000	39.91	3.75	43.66	74.00	-30.34	peak		
2		7440.000	38.74	6.86	45.60	74.00	-28.40	peak		
3	*	9920.000	37.80	10.16	47.96	74.00	-26.04	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

15 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX Low channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX high channel
Tester	Eason
Temperature	25 °C
Humidity	52%

15.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

15.2 BLOCK DIAGRAM OF TEST SETUP

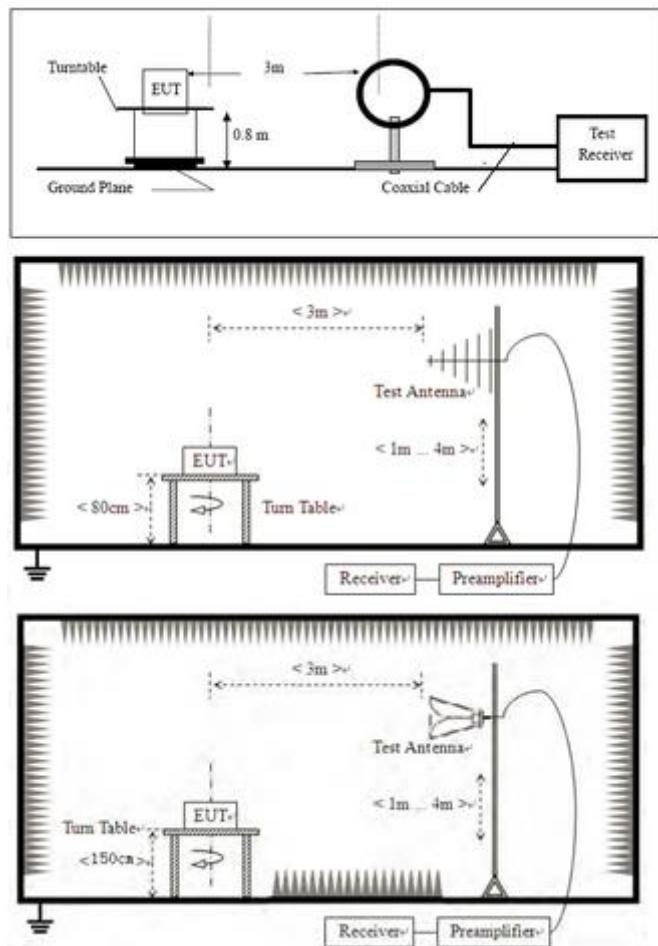

15.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

15.4 TEST DATA

[Test mode: TX Low channel]; [Polarity: Horizontal]

Radiated Emission Measurement



Site Polarization: **Horizontal** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Wireless Mini Speaker Distance:
M/N: Bass 13 Wireless Mini Speaker
Mode: TX-L
Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2310.000	41.88	-4.61	37.27	74.00	-36.73	peak		
2	*	2378.150	53.82	-4.32	49.50	74.00	-24.50	peak		
3		2390.000	46.89	-4.27	42.62	74.00	-31.38	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test mode: TX Low channel]; [Polarity: Vertical]

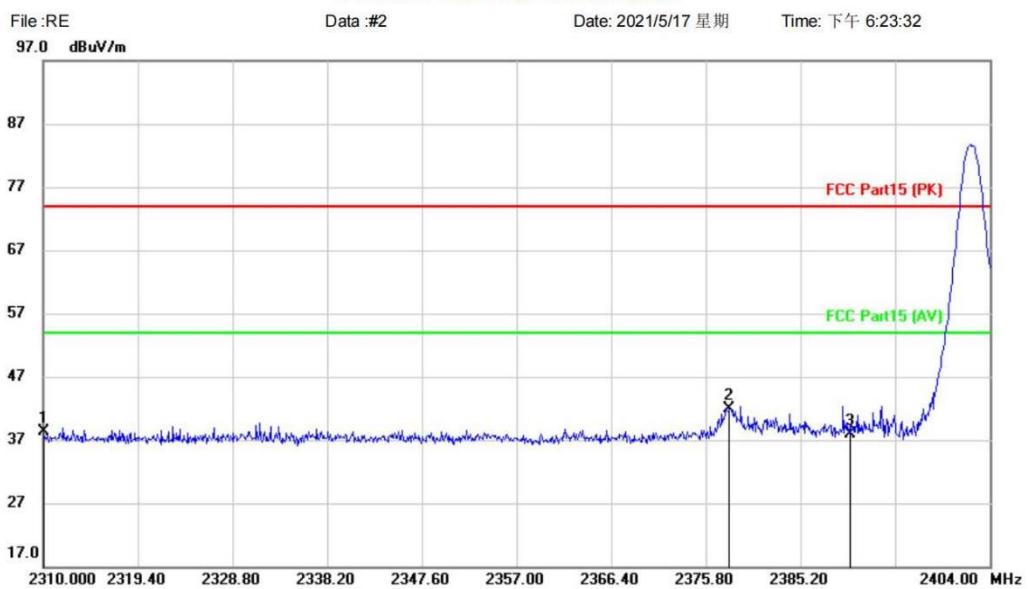Radiated Emission Measurement


Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Wireless Mini Speaker

Distance:

M/N: Bass 13 Wireless Mini Speaker

Mode: TX-L

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	42.88	-4.61	38.27	74.00	-35.73	peak		
2	*	2378.150	46.31	-4.32	41.99	74.00	-32.01	peak		
3		2390.000	42.16	-4.27	37.89	74.00	-36.11	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test mode: TX high channel]; [Polarity: Horizontal]

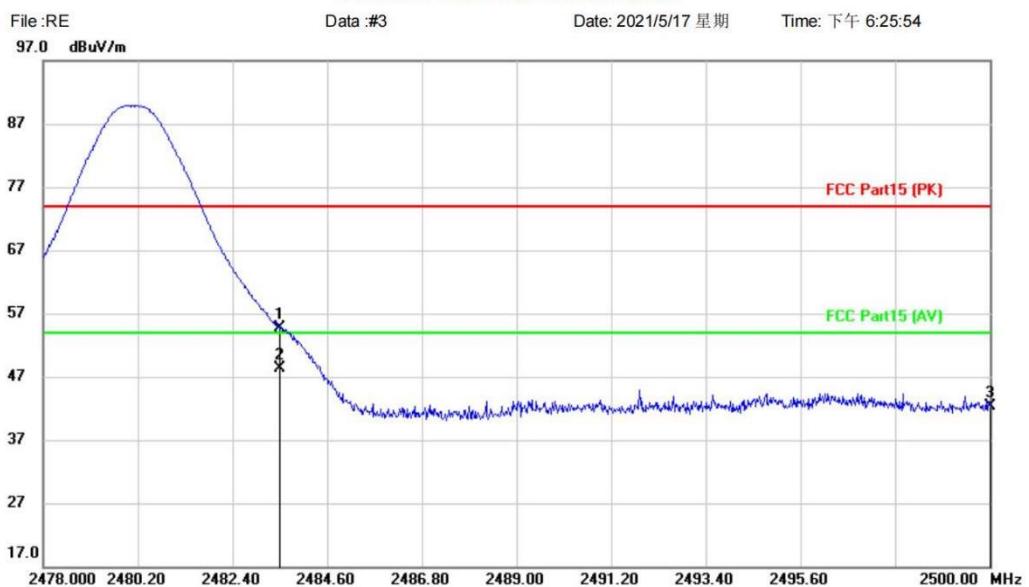Radiated Emission Measurement


Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Wireless Mini Speaker

Distance:

M/N: Bass 13 Wireless Mini Speaker

Mode: TX-H

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	58.60	-3.84	54.76	74.00	-19.24	peak		
2	*	2483.500	52.07	-3.84	48.23	54.00	-5.77	AVG		
3		2500.000	46.03	-3.78	42.25	74.00	-31.75	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test mode: TX high channel]; [Polarity: Vertical]

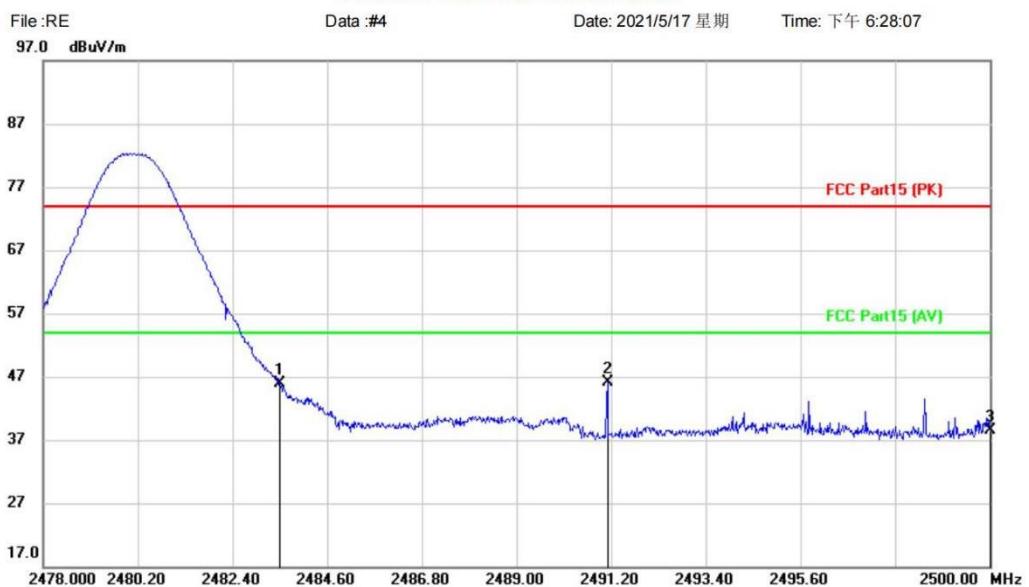Radiated Emission Measurement


Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Wireless Mini Speaker

Distance:

M/N: Bass 13 Wireless Mini Speaker

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	49.66	-3.84	45.82	74.00	-28.18	peak		
2	*	2491.112	49.84	-3.81	46.03	74.00	-27.97	peak		
3		2500.000	42.27	-3.78	38.49	74.00	-35.51	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


16 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

16.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

16.2 BLOCK DIAGRAM OF TEST SETUP

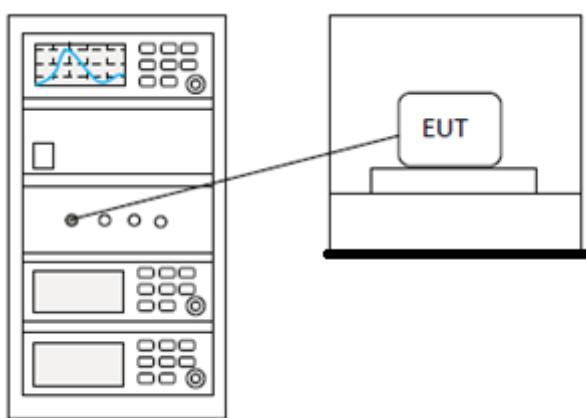

16.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


17 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

17.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

17.2 BLOCK DIAGRAM OF TEST SETUP

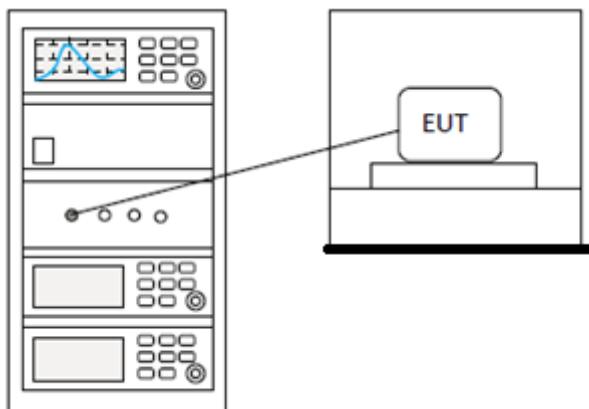

17.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


18 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

18.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

18.2 BLOCK DIAGRAM OF TEST SETUP

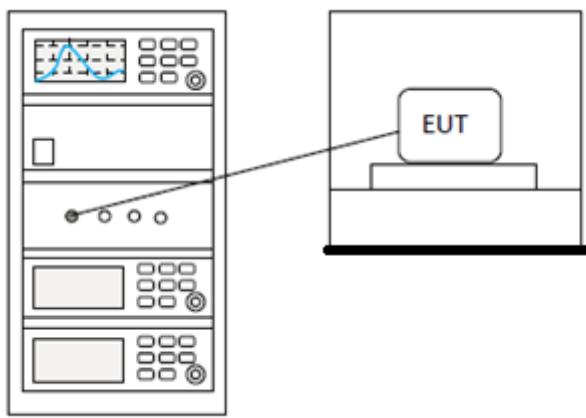

18.3 TEST DATA

Pass: Please Refer To Appendix: For Details
--


19 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

19.1 LIMITS

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

19.2 BLOCK DIAGRAM OF TEST SETUP

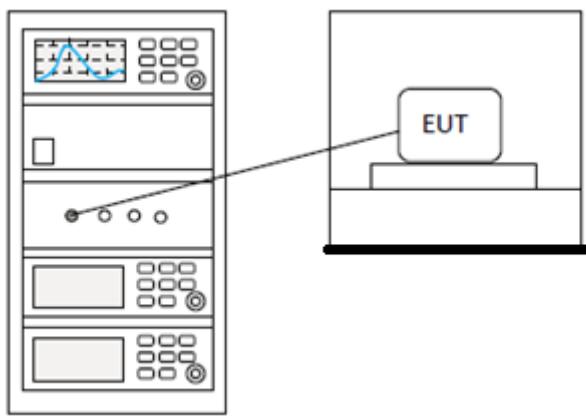


19.3 TEST DATA

Pass: Please Refer To Appendix: For Details

20 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

20.1 BLOCK DIAGRAM OF TEST SETUP

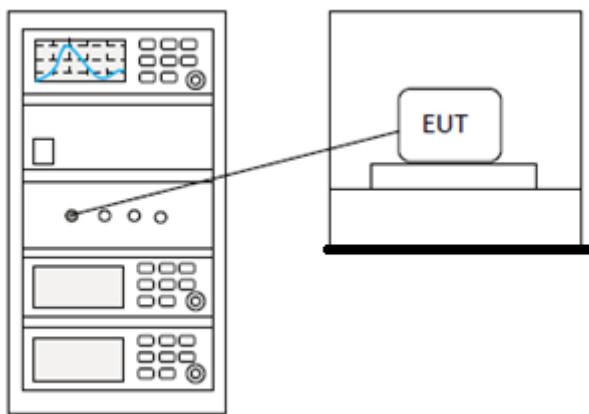

20.2 TEST DATA

Pass: Please Refer To Appendix: For Details