

FCC Test Report

Product Name	Notebook
Model No.	SF20GM3, SFxxxxxxxxxx (x=0~9;A~Z;a~z;-_)
FCC ID.	WL6-SFX0GMX

Applicant	ELITEGROUP COMPUTER SYSTEMS CO., LTD
Address	No.239, Sec. 2, Ti Ding Blvd., Taipei, Taiwan

Date of Receipt	Dec. 10, 2020
Issued Date	Feb. 01, 2021
Report No.	20C0384R-E3032110108
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: Feb. 01, 2021

Report No.: 20C0384R-E3032110108



Product Name	Notebook
Applicant	ELITEGROUP COMPUTER SYSTEMS CO., LTD
Address	No.239, Sec. 2, Ti Ding Blvd., Taipei, Taiwan
Manufacturer	Golden Elite Technology (SHENZHEN) Co., Ltd.
Model No.	SF20GM3, SFxxxxxxxxx (x=0~9;A~Z;a~z;-_)
FCC ID.	WL6-SFX0GMX
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V / 60Hz
Trade Name	ECS ELITEGROUP
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :

April Chen

(Senior Adm. Specialist / April Chen)

Tested By :

Bill Lin

(Engineer / Bill Lin)

Approved By :

Vincent Lin

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Tested System	7
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment.....	10
1.7. Uncertainty	11
2. CONDUCTED EMISSION	12
2.1. Test Setup	12
2.2. Limits.....	12
2.3. Test Procedure	13
2.4. Test Result of Conducted Emission.....	14
3. PEAK POWER OUTPUT	16
3.1. Test Setup	16
3.2. Limit.....	16
3.3. Test Procedure	16
3.4. Test Result of Peak Power Output.....	17
4. RADIATED EMISSION	19
4.1. Test Setup	19
4.2. Limits.....	20
4.3. Test Procedure	21
4.4. Test Result of Radiated Emission.....	22
5. RF ANTENNA CONDUCTED TEST	36
5.1. Test Setup	36
5.2. Limits.....	36
5.3. Test Procedure	36
5.4. Test Result of RF Antenna Conducted Test.....	37
6. BAND EDGE	39
6.1. Test Setup	39
6.2. Limit	40
6.3. Test Procedure	40
6.4. Test Result of Band Edge	41
7. CHANNEL NUMBER.....	53
7.1. Test Setup	53
7.2. Limit	53
7.3. Test Procedure	53
7.4. Test Result of Channel Number.....	54
8. CHANNEL SEPARATION.....	56
8.1. Test Setup	56
8.2. Limit	56
8.3. Test Procedure	56
8.4. Test Result of Channel Separation.....	57
9. DWELL TIME.....	61
9.1. Test Setup	61
9.2. Limit	61
9.3. Test Procedure	61
9.4. Test Result of Dwell Time.....	62
10. OCCUPIED BANDWIDTH	66
10.1. Test Setup	66
10.2. Limits.....	66
10.3. Test Procedure	66
10.4. Test Result of Occupied Bandwidth	67
11. DUTY CYCLE.....	71
11.1. Test Setup	71
11.2. Test Procedure	71
11.3. Test Result of Duty Cycle.....	72
12. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	74

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

Revision History

Report No.	Version	Description	Issued Date
20C0384R-E3032110108	V1.0	Initial issue of report.	2021-02-01

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Notebook
Trade Name	ECS ELITEGROUP
Model No.	SF20GM3, SFxxxxxxxxxx (x=0~9;A~Z;a~z;-_)
FCC ID.	WL6-SFX0GMX
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Power Adapter	MFR: SunWard, M/N: AD24BUH120200 Input: AC 100-240V, 50-60Hz 0.7A MAX Output: 12V $\overline{=}$ 2.0A Cable out: Non-Shielded, 1.5m

Antenna List

No.	Manufacturer	Part No. (Vendor)	Antenna Type	Peak Gain
1	WGT	13-130PFW8055(QS)	PIFA Antenna	2.46dBi for 2.4GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is a Notebook with a built-in 2.4 GHz and 5 GHz WLAN and Bluetooth V5.0, V3.0, V2.1+EDR transceiver, this report for Bluetooth V3.0, V2.1+EDR.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Test Mode	Mode 1: Transmit - 1Mbps Mode 2: Transmit - 3Mbps
-----------	--


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	LCD Monitor	Lenovo	T24d	V5CZ4272	Non-Shielded, 1.8m
2	Adapter	SunWard	AD24BUH120200	N/A	N/A
3	Microphone & Earphone	PCHOME	N/A	N/A	N/A
4	USB 3.0	Transcend	TS1TSJ25M3	D468623809	N/A
5	External HDD	SanDisk	SanDisk Extreme 900	N/A	N/A
6	USB 3.0	Transcend	TS1TSJ25M3	D468623808	N/A
7	Micro SD Card 1GB	SanDisk	N/A	0801002841D2N	N/A

Signal Cable Type	Signal cable Description
A	Power Cable Non-Shielded, 1.8m
B	Power Cable Non-Shielded, 1.5m
C	HDMI Cable Shielded, 1.8m
D	Microphone & Earphone Cable Non-Shielded, 1.2m
E	USB Cable Shielded, 0.5m
F	USB Cable Shielded, 0.4m
G	USB Cable Shielded, 0.4m

1.3. Configuration of Tested System

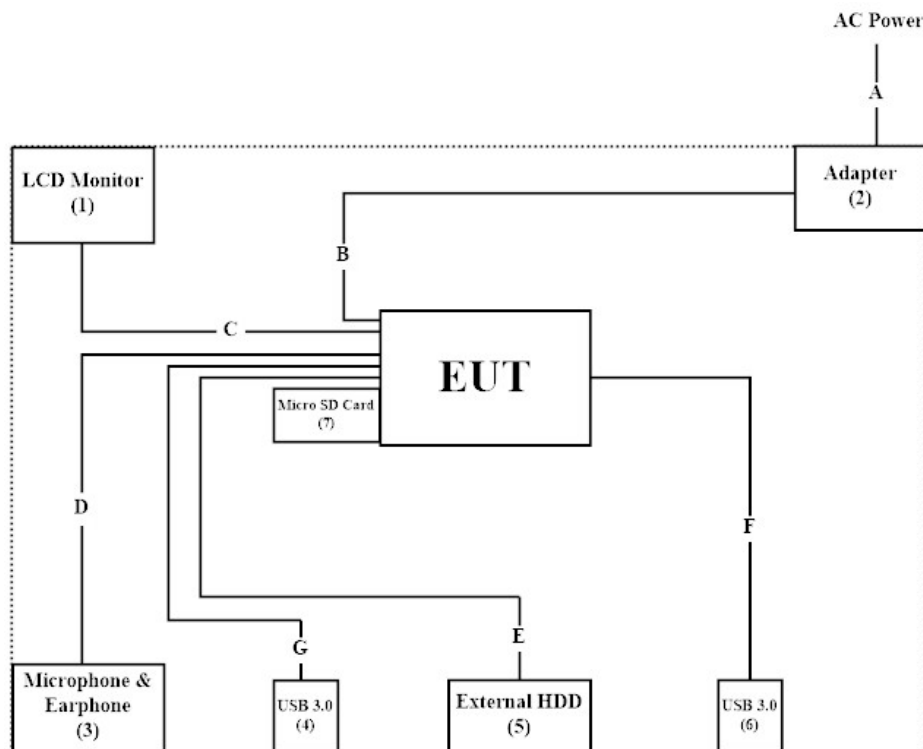

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software “DRTU Ver.11.1941.0.10270” on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	21.9 °C
	Humidity (%RH)	10~90 %	57.8 %
Radiated Emission	Temperature (°C)	10~40 °C	21.5 °C
	Humidity (%RH)	10~90 %	63.5 %
Conductive	Temperature (°C)	10~40 °C	22 °C
	Humidity (%RH)	10~90 %	55 %

USA : FCC Registration Number: TW0023

Canada : IC Registration Number: 25880

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan, R.O.C.

Phone number : 886-2-2602-7968
Fax number : 866-2-2602-3286
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Two-Line V-Network	R&S	ENV216	101306	2020.03.25	2021.03.24
X	Two-Line V-Network	R&S	ENV216	101307	2020.04.17	2021.04.16
X	Coaxial Cable	DEKRA	RG400_BNC	RF001	2020.05.24	2021.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0.

For Conducted measurements /ASR2

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103464	2020.02.11	2021.02.10
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2020.05.13	2021.05.12
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2020.05.22	2021.05.21
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2020.05.22	2021.05.21

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5.

For Radiated measurements /ACB2

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2020.03.16	2021.03.15
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2020.07.20	2021.07.19
X	Horn Antenna	ETS-Lindgren	3117	00201366	2020.09.21	2021.09.20
	Horn Antenna	ETS-Lindgren	3117	00203761	2020.11.23	2021.11.22
	Horn Antenna	Com-Power	AH-840	101087	2020.06.08	2021.06.07
X	Pre-Amplifier	EMCI	EMC001330	980301	2020.06.04	2021.06.03
X	Pre-Amplifier	EMCI	EMC051845SE	980632	2020.08.21	2021.08.20
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2020.06.24	2021.06.23
	Pre-Amplifier	EMCI	EMC184045SE	980314	2020.06.10	2021.06.09
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Spectrum Analyzer	R&S	FSV40	101148	2020.03.16	2021.03.15
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2020.07.03	2021.07.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2020.06.10	2021.06.09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	±3.42 dB	
Peak Power Output	±0.91 dB	
Radiated Emission	Under 1GHz ±4.06 dB	Above 1GHz ±3.73 dB
RF Antenna Conducted Test	±2.53 dB	
Band Edge	Under 1GHz ±4.06 dB	Above 1GHz ±3.73 dB
Channel Number	N/A	
Channel Separation	±682.83 Hz	
Dwell Time	±2.31 ms	
Occupied Bandwidth	±682.83 Hz	
Duty Cycle (2.4GHz)	±2.31 ms	

2. Conducted Emission

2.1. Test Setup

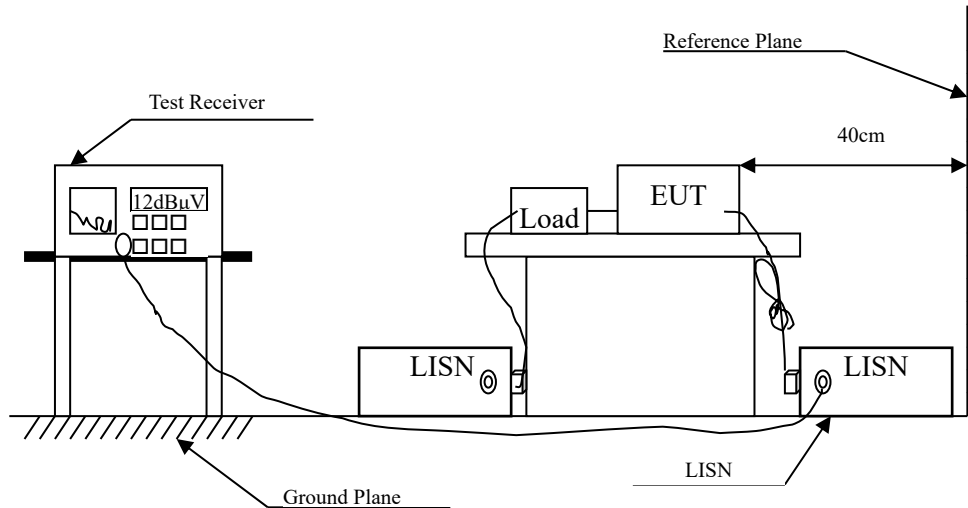

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT setup and the test procedure are according to ANSI C63.4, 2014 to comply with the requirements of FCC 47CFR Subpart C.

2.4. Test Result of Conducted Emission

Product : Notebook
 Test Item : Conducted Emission Test
 Test date : 2021/01/28
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)

Line1

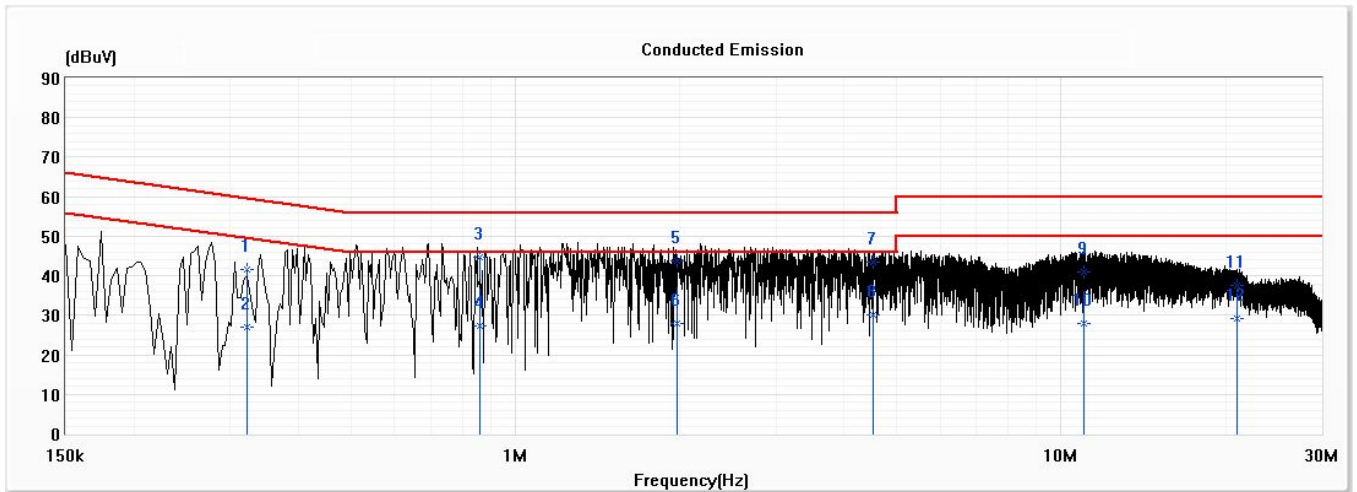


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.323	41.70	59.63	-17.93	32.04	9.65	QP
2	0.323	26.98	49.63	-22.65	17.32	9.65	AV
*3	0.859	44.57	56.00	-11.43	34.89	9.68	QP
4	0.859	27.24	46.00	-18.76	17.56	9.68	AV
5	1.974	43.91	56.00	-12.09	34.19	9.72	QP
6	1.974	28.08	46.00	-17.92	18.36	9.72	AV
7	4.526	43.54	56.00	-12.46	33.76	9.78	QP
8	4.526	30.25	46.00	-15.75	20.46	9.78	AV
9	10.997	40.90	60.00	-19.10	31.00	9.90	QP
10	10.997	27.83	50.00	-22.17	17.93	9.90	AV
11	21.049	37.40	60.00	-22.60	27.43	9.97	QP
12	21.049	29.28	50.00	-20.72	19.31	9.97	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

Product : Notebook
 Test Item : Conducted Emission Test
 Test date : 2021/01/28
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)

N

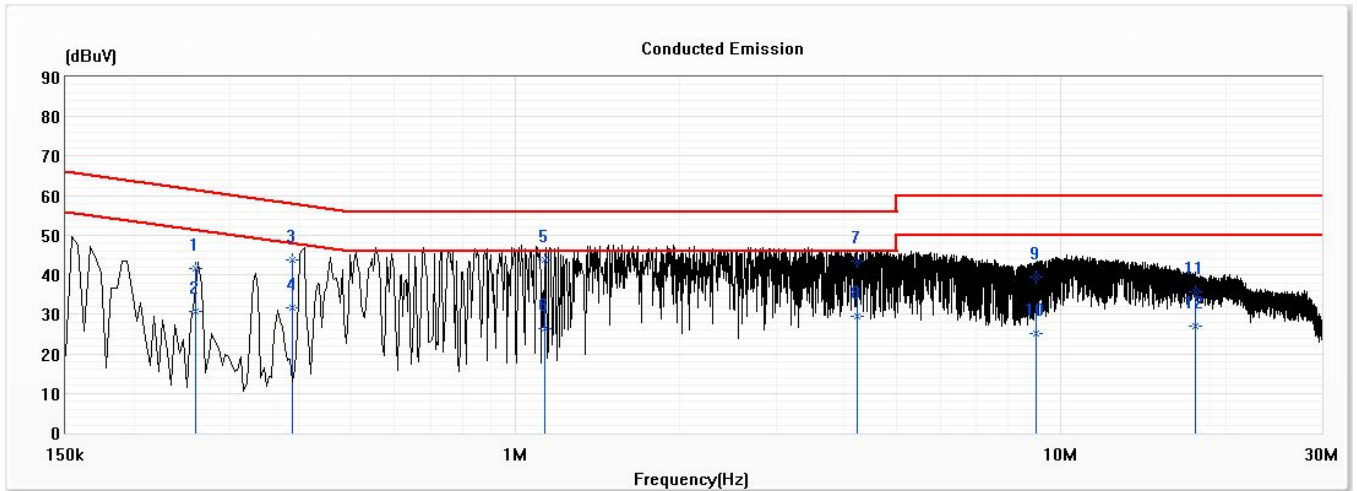


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.259	41.48	61.46	-19.98	31.81	9.67	QP
2	0.259	30.66	51.46	-20.80	20.99	9.67	AV
3	0.391	43.79	58.04	-14.25	34.12	9.67	QP
4	0.391	31.63	48.04	-16.41	21.96	9.67	AV
*5	1.133	43.63	56.00	-12.37	33.94	9.69	QP
6	1.133	26.32	46.00	-19.68	16.63	9.69	AV
7	4.228	43.49	56.00	-12.51	33.71	9.78	QP
8	4.228	29.58	46.00	-16.42	19.79	9.78	AV
9	8.975	39.45	60.00	-20.55	29.56	9.89	QP
10	8.975	25.09	50.00	-24.91	15.20	9.89	AV
11	17.654	35.58	60.00	-24.42	25.56	10.03	QP
12	17.654	27.08	50.00	-22.92	17.06	10.03	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

3. Peak Power Output

3.1. Test Setup

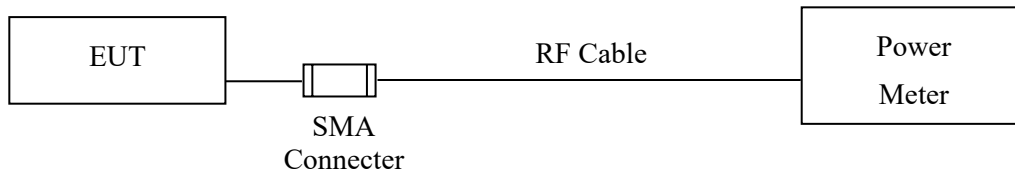

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

Tested according to FHSS test procedure of KDB 558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

3.4. Test Result of Peak Power Output

Product : Notebook
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2021/01/28

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	10.83	1 Watt= 30 dBm	Pass
Channel 39	2441.00	11.46	1 Watt= 30 dBm	Pass
Channel 78	2480.00	11.50	1 Watt= 30 dBm	Pass


Product : Notebook
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - 3Mbps
Test Date : 2021/01/28

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	10.45	1 Watt= 30 dBm	Pass
Channel 39	2441.00	11.02	1 Watt= 30 dBm	Pass
Channel 78	2480.00	11.02	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

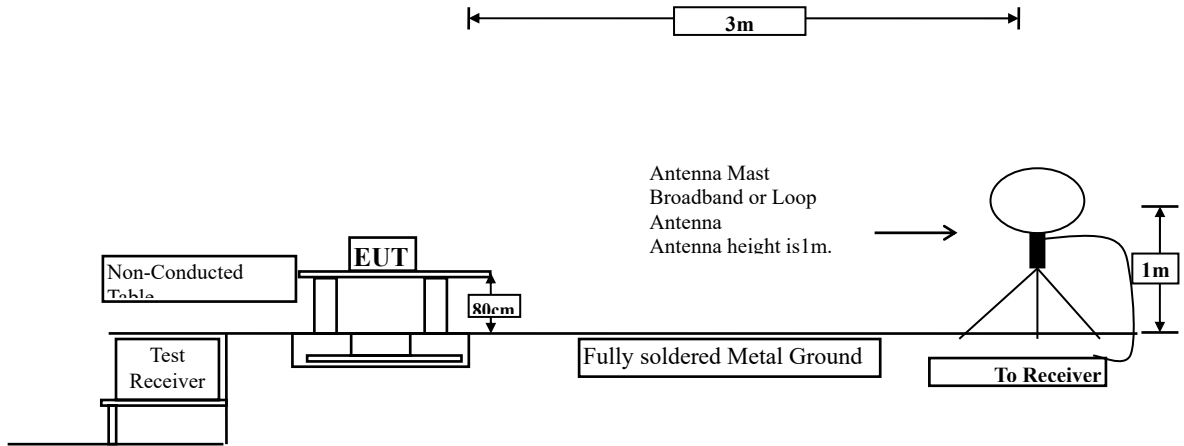

Radiated Emission Below 1GHz

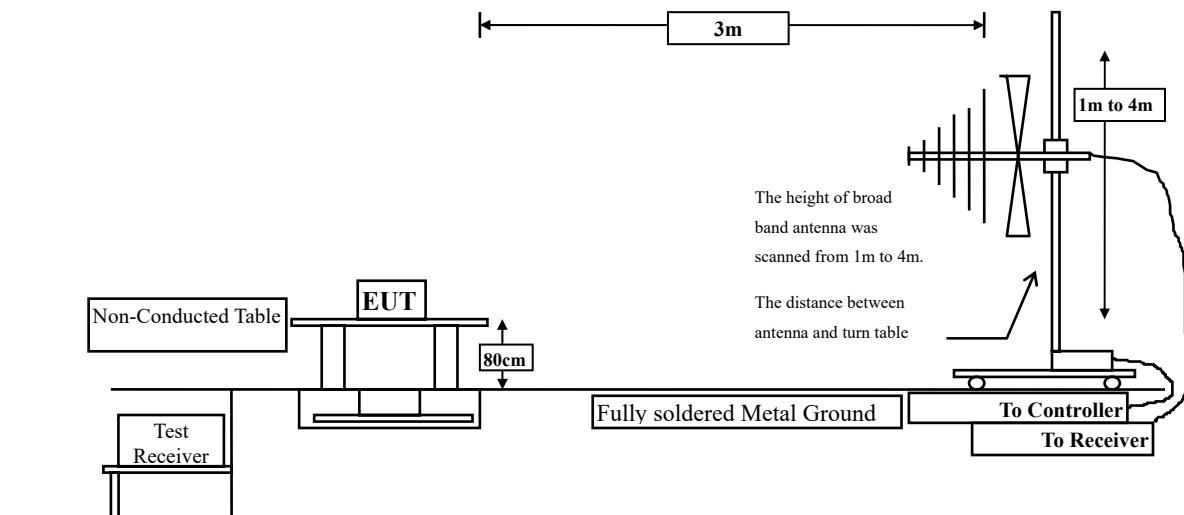

Radiated Emission Above 1GHz

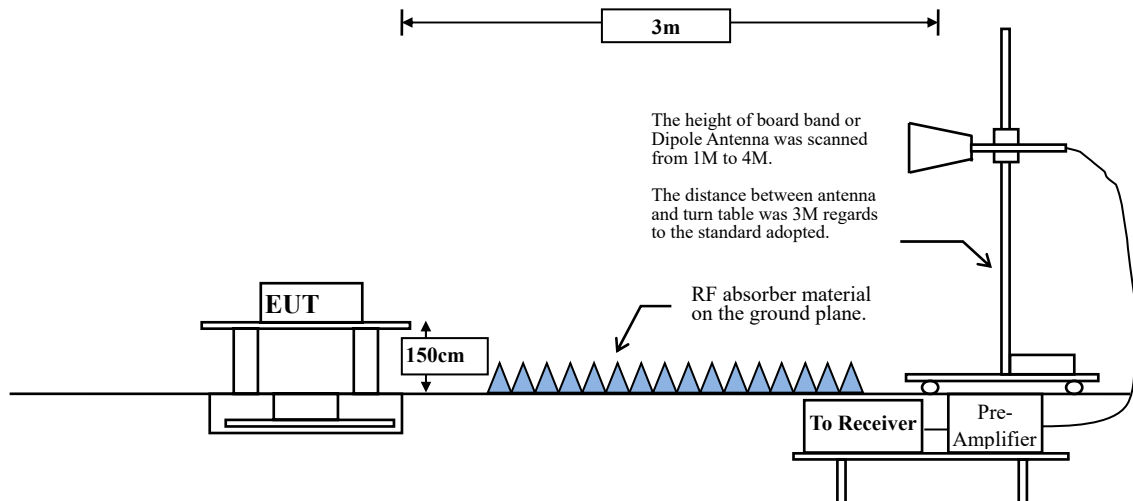

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.


The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Test Result of Radiated Emission

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2402MHz)
 Test Date : 2021/01/26

Horizontal

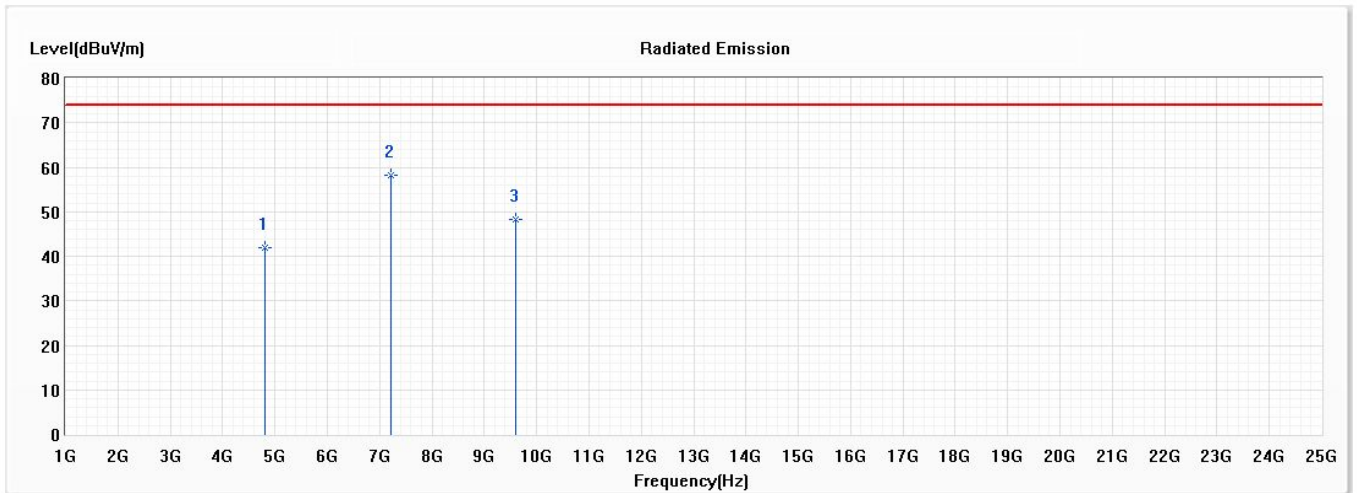

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	41.89	74.00	-32.11	54.94	-13.05	PK
* 2	7206.000	58.32	74.00	-15.68	70.01	-11.69	PK
3	9608.000	48.23	74.00	-25.77	59.41	-11.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	7206.000	58.320	-24.792	33.528	-20.472	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2402MHz)
 Test Date : 2021/01/26

Vertical

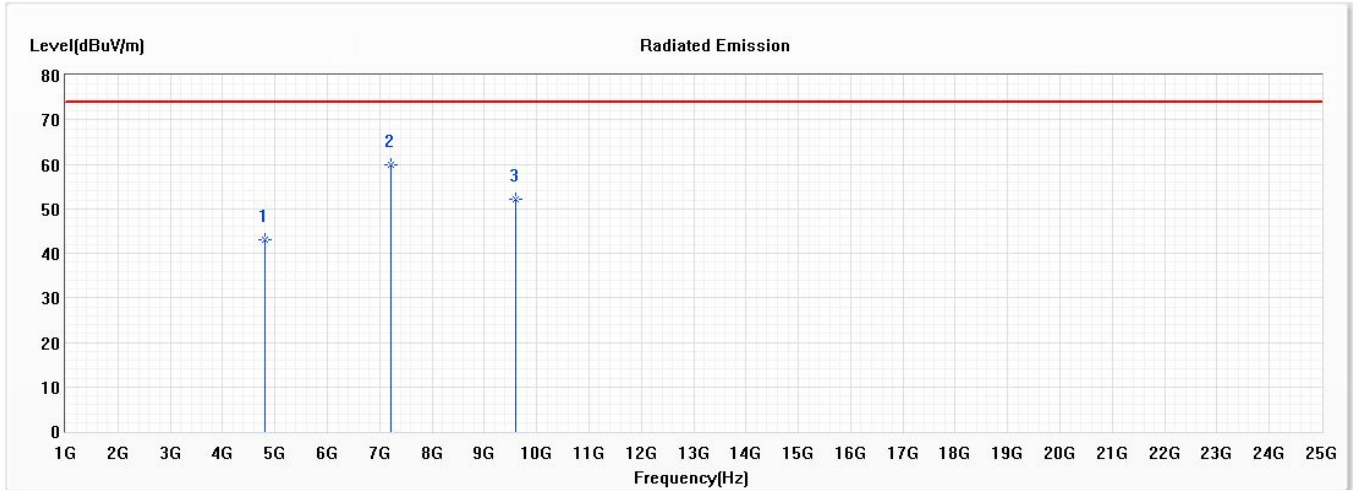

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	43.01	74.00	-30.99	56.06	-13.05	PK
* 2	7206.000	59.80	74.00	-14.20	71.49	-11.69	PK
3	9608.000	52.17	74.00	-21.83	63.35	-11.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	7206.000	59.800	-24.792	35.008	-18.992	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2021/01/26

Horizontal

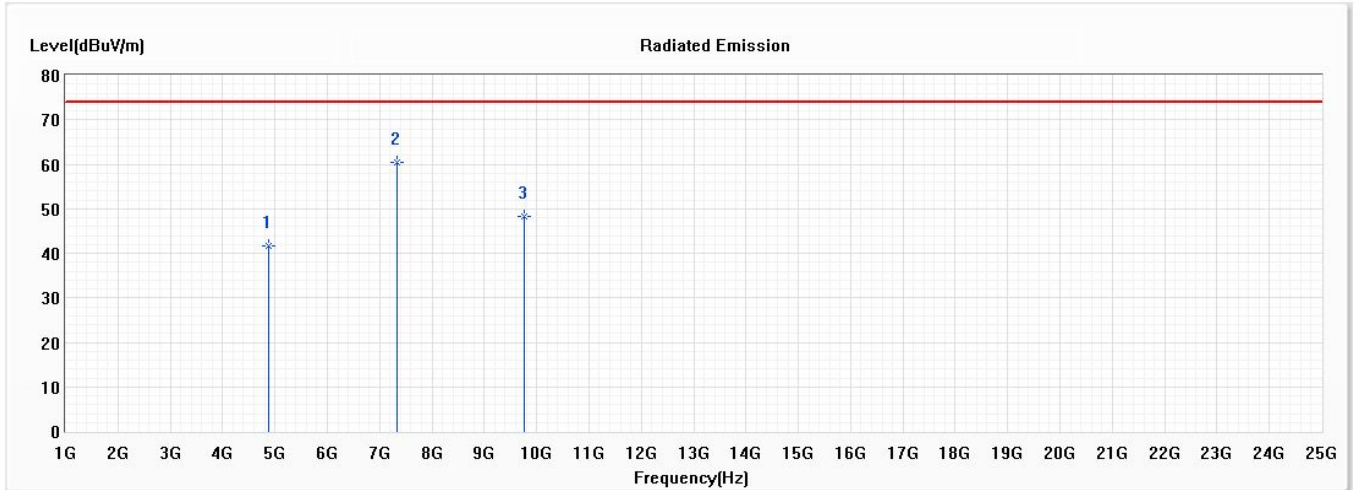

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	41.77	74.00	-32.23	54.78	-13.01	PK
* 2	7323.000	60.49	74.00	-13.51	72.44	-11.95	PK
3	9764.000	48.23	74.00	-25.77	59.18	-10.95	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
39 (Average)	7323.000	60.490	-24.792	35.698	-18.302	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2021/01/26

Vertical

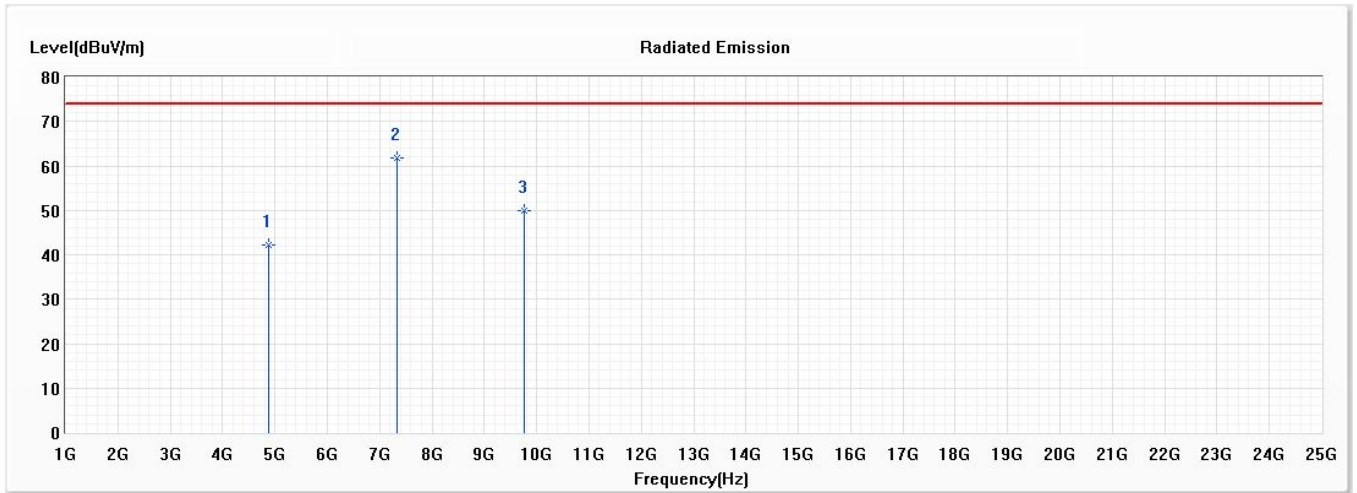

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	42.23	74.00	-31.77	55.24	-13.01	PK
* 2	7323.000	61.89	74.00	-12.11	73.84	-11.95	PK
3	9764.000	49.82	74.00	-24.18	60.77	-10.95	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
39 (Average)	7323.000	61.890	-24.792	37.098	-16.902	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2480MHz)
 Test Date : 2021/01/26

Horizontal

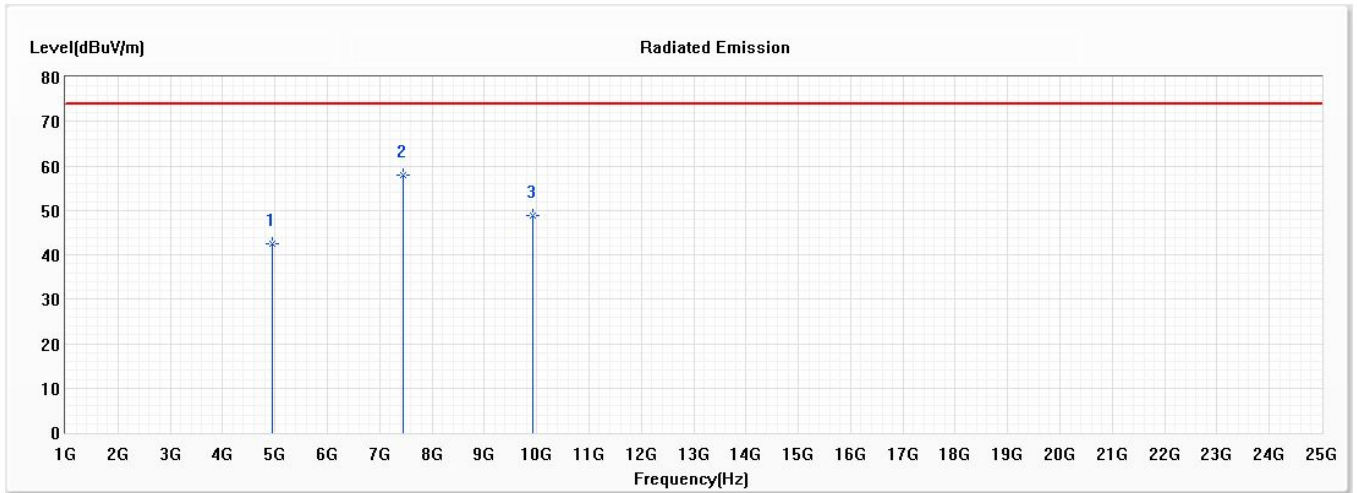

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	42.54	74.00	-31.46	55.25	-12.71	PK
* 2	7440.000	58.01	74.00	-15.99	70.09	-12.08	PK
3	9920.000	48.79	74.00	-25.21	59.66	-10.87	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
78 (Average)	7440.000	58.010	-24.792	33.218	-20.782	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2480MHz)
 Test Date : 2021/01/26

Vertical

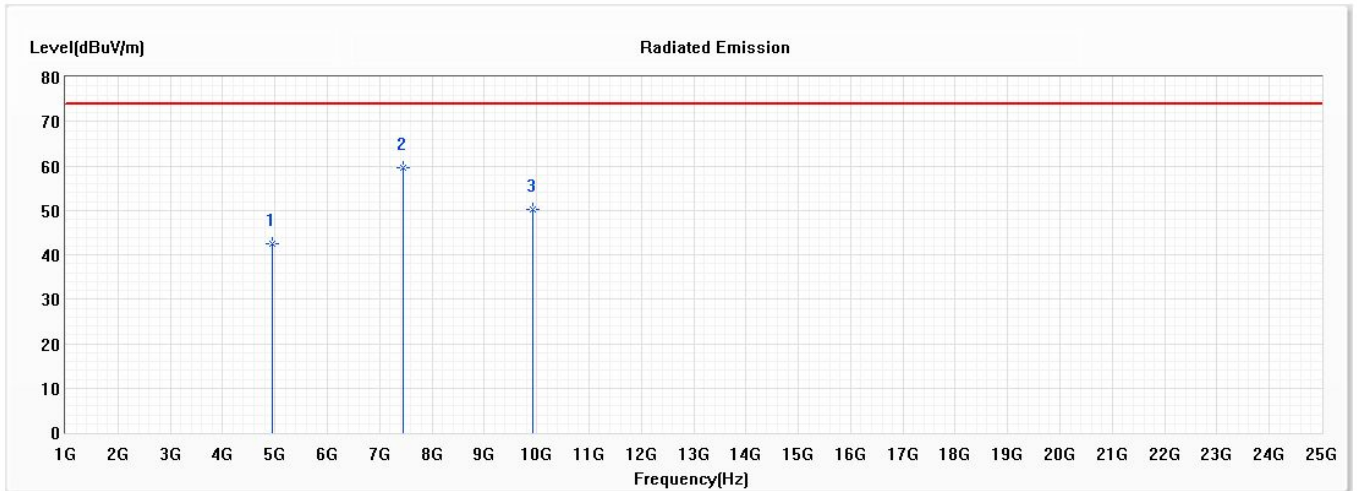

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	42.60	74.00	-31.40	55.31	-12.71	PK
* 2	7440.000	59.69	74.00	-14.31	71.77	-12.08	PK
3	9920.000	50.30	74.00	-23.70	61.17	-10.87	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
78 (Average)	7440.000	56.690	-24.792	31.898	-22.102	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/26

Horizontal

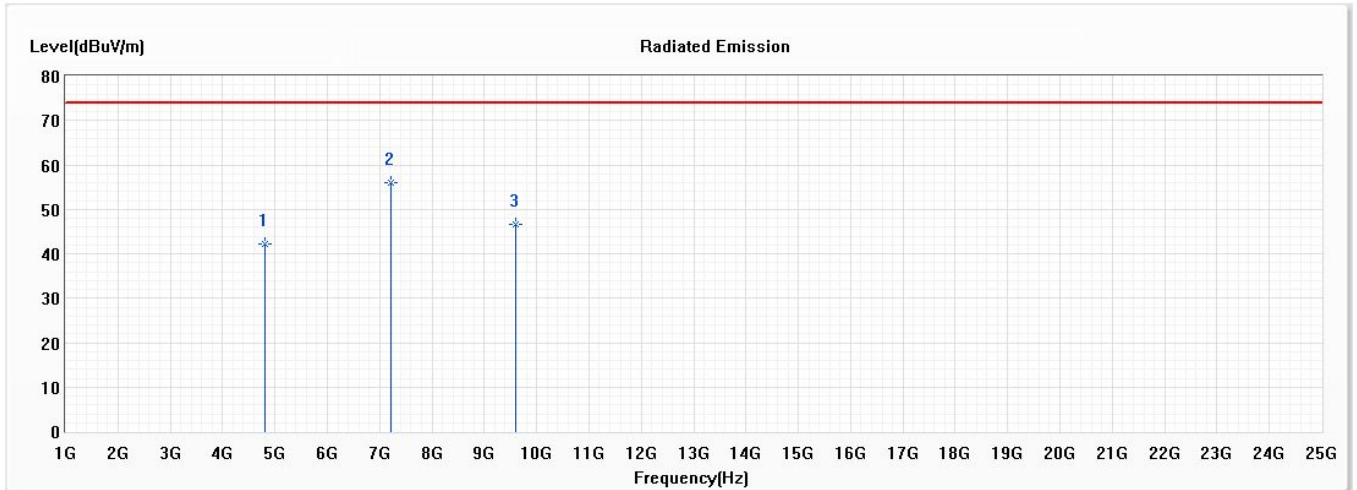

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	42.23	74.00	-31.77	55.28	-13.05	PK
* 2	7206.000	56.10	74.00	-17.90	67.79	-11.69	PK
3	9608.000	46.53	74.00	-27.47	57.71	-11.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	7206.000	56.100	-24.792	31.308	-22.692	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/26

Vertical

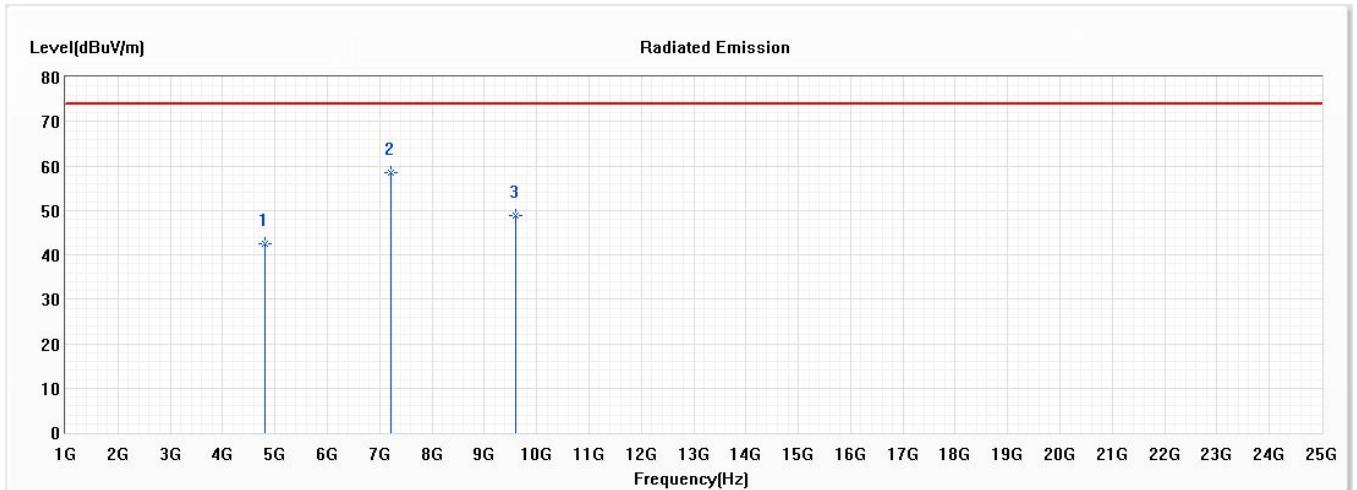

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	42.42	74.00	-31.58	55.47	-13.05	PK
* 2	7206.000	58.40	74.00	-15.60	70.09	-11.69	PK
3	9608.000	48.70	74.00	-25.30	59.88	-11.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	7206.000	58.400	-24.792	33.608	-20.392	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/26

Horizontal

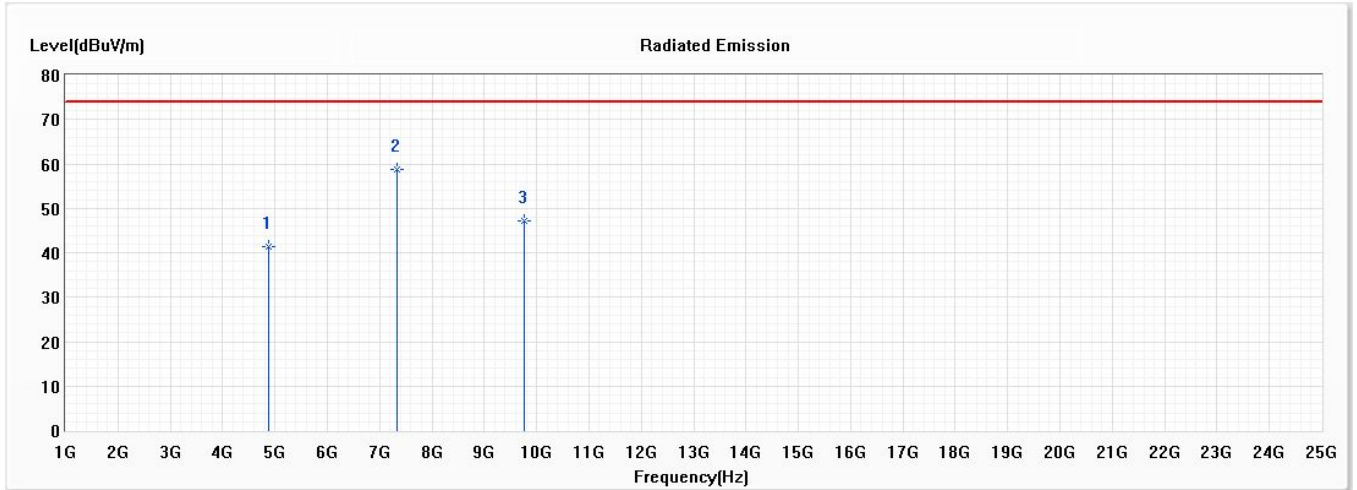

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	41.43	74.00	-32.57	54.44	-13.01	PK
* 2	7323.000	58.79	74.00	-15.21	70.74	-11.95	PK
3	9764.000	47.30	74.00	-26.70	58.25	-10.95	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
39 (Average)	7323.000	58.790	-24.792	33.998	-20.002	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/26

Vertical

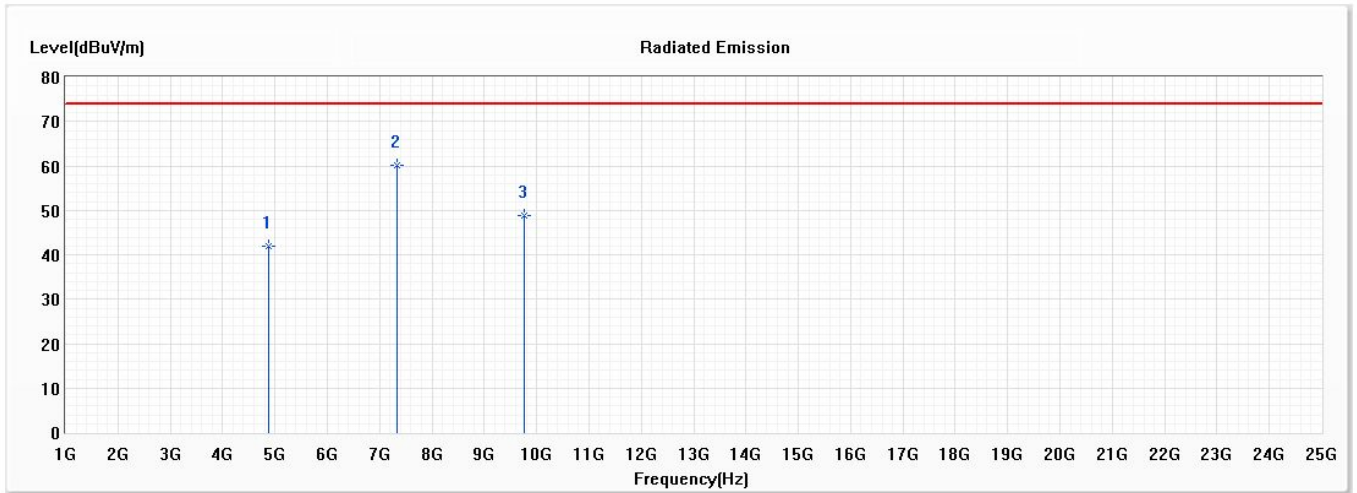

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	41.82	74.00	-32.18	54.83	-13.01	PK
* 2	7323.000	60.17	74.00	-13.83	72.12	-11.95	PK
3	9764.000	48.86	74.00	-25.14	59.81	-10.95	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
39 (Average)	7323.000	60.170	-24.792	35.378	-18.622	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/26

Horizontal

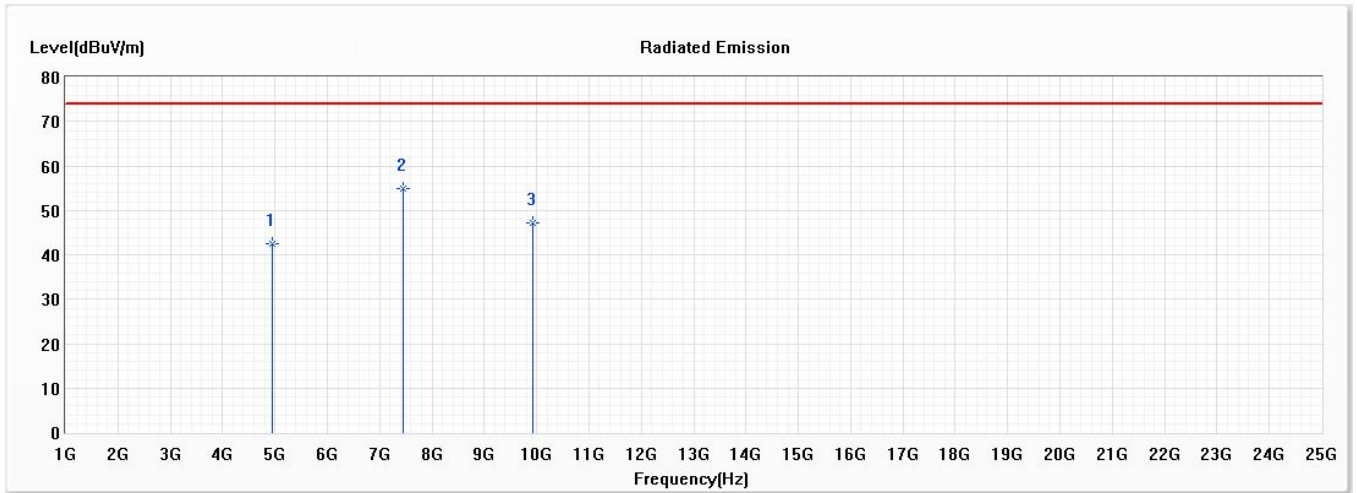

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	42.57	74.00	-31.43	55.28	-12.71	PK
* 2	7440.000	54.76	74.00	-19.24	66.84	-12.08	PK
3	9920.000	47.14	74.00	-26.86	58.01	-10.87	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
78 (Average)	7440.000	54.760	-24.792	29.968	-24.032	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/26

Vertical

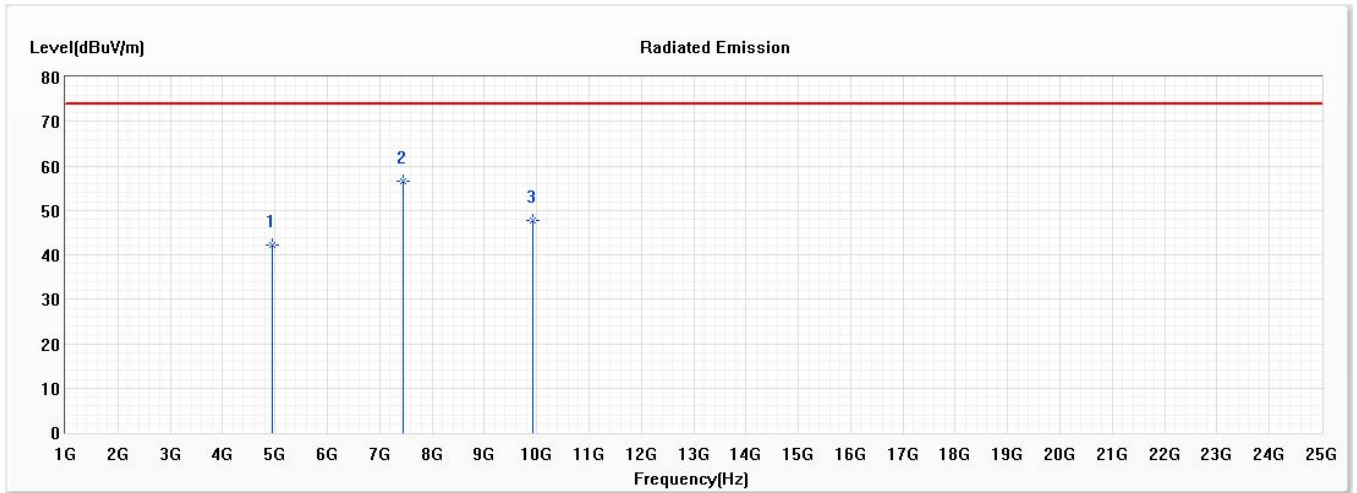

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	42.25	74.00	-31.75	54.96	-12.71	PK
* 2	7440.000	56.44	74.00	-17.56	68.52	-12.08	PK
3	9920.000	47.72	74.00	-26.28	58.59	-10.87	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
78 (Average)	7440.000	56.440	-24.792	31.648	-22.352	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/22

Horizontal

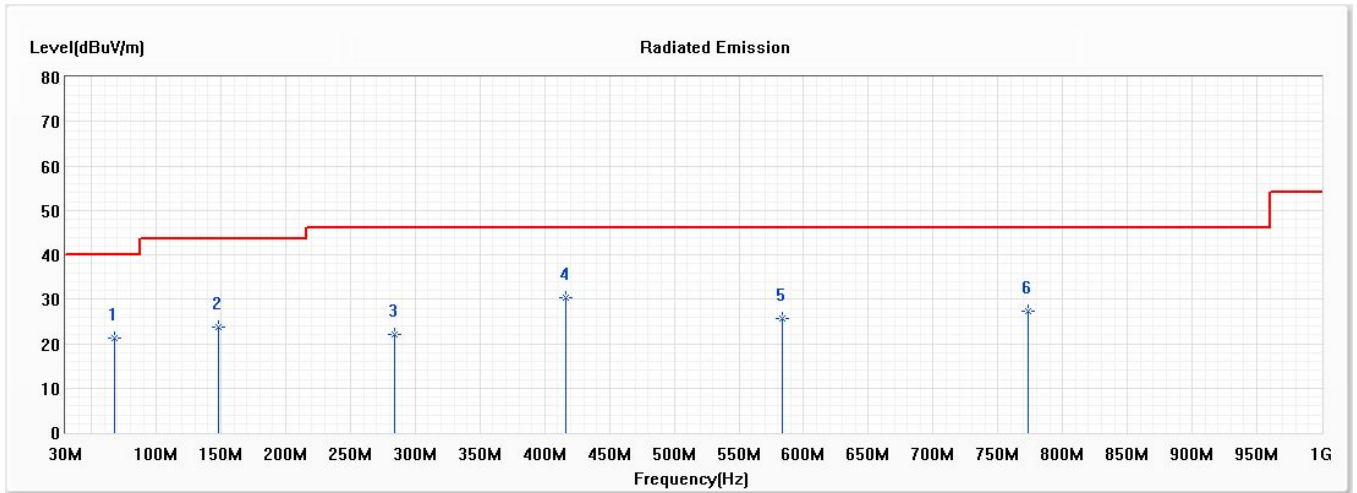


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	67.957	21.27	40.00	-18.73	34.28	-13.01	QP
2	148.087	23.80	43.50	-19.70	34.64	-10.84	QP
3	284.449	22.08	46.00	-23.92	32.35	-10.27	QP
* 4	416.594	30.30	46.00	-15.70	37.37	-7.07	QP
5	583.884	25.77	46.00	-20.23	29.26	-3.49	QP
6	773.667	27.37	46.00	-18.63	28.30	-0.93	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Notebook
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/22

Vertical

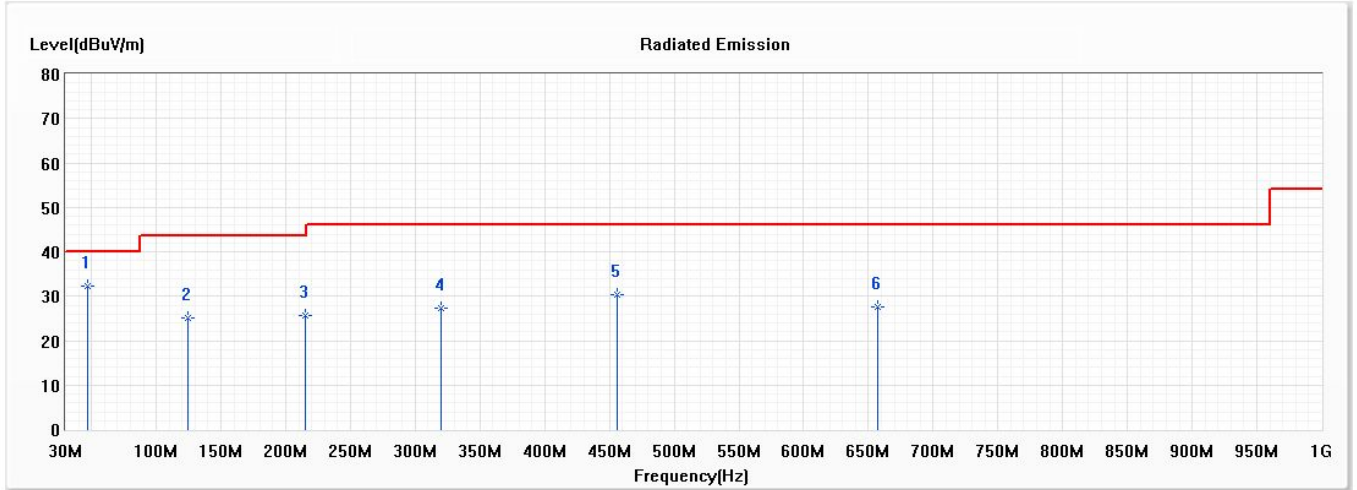


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	46.870	32.39	40.00	-7.61	43.02	-10.63	QP
2	124.188	25.16	43.50	-18.34	37.93	-12.77	QP
3	215.565	25.70	43.50	-17.80	38.29	-12.59	QP
4	319.594	27.32	46.00	-18.68	36.70	-9.38	QP
5	455.957	30.39	46.00	-15.61	36.54	-6.15	QP
6	656.986	27.59	46.00	-18.41	30.31	-2.72	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

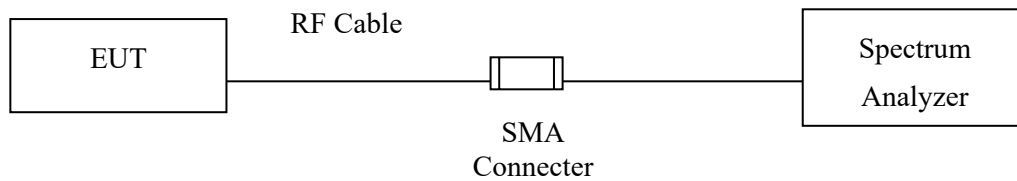

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 b) for compliance to FCC 47CFR 15.247 requirements.

5.4. Test Result of RF Antenna Conducted Test

Product : Notebook
 Test Item : RF Antenna Conducted Test
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2021/01/28

Figure Channel 00:

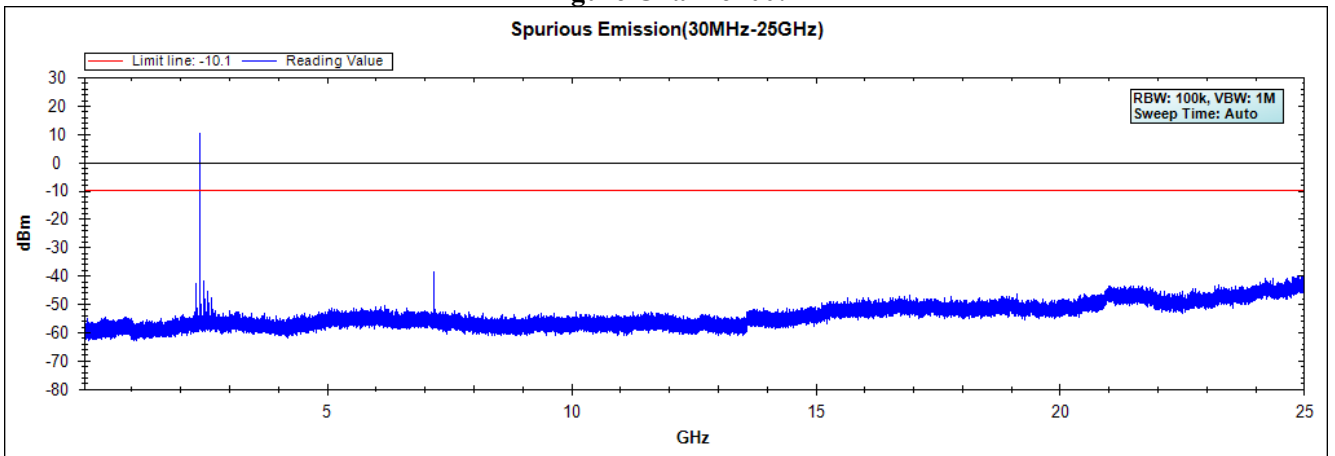


Figure Channel 39:


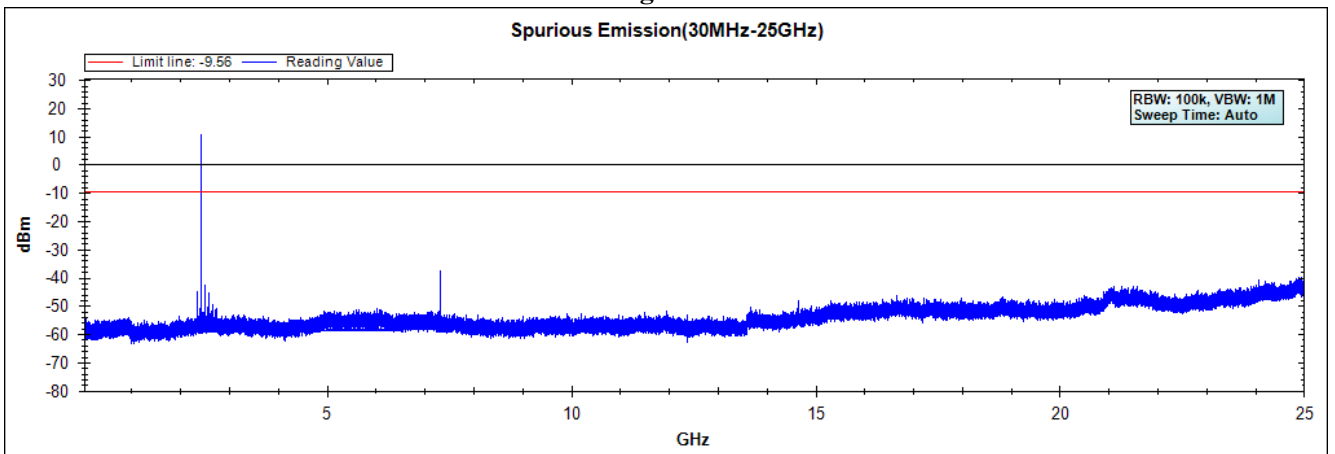


Figure Channel 78:

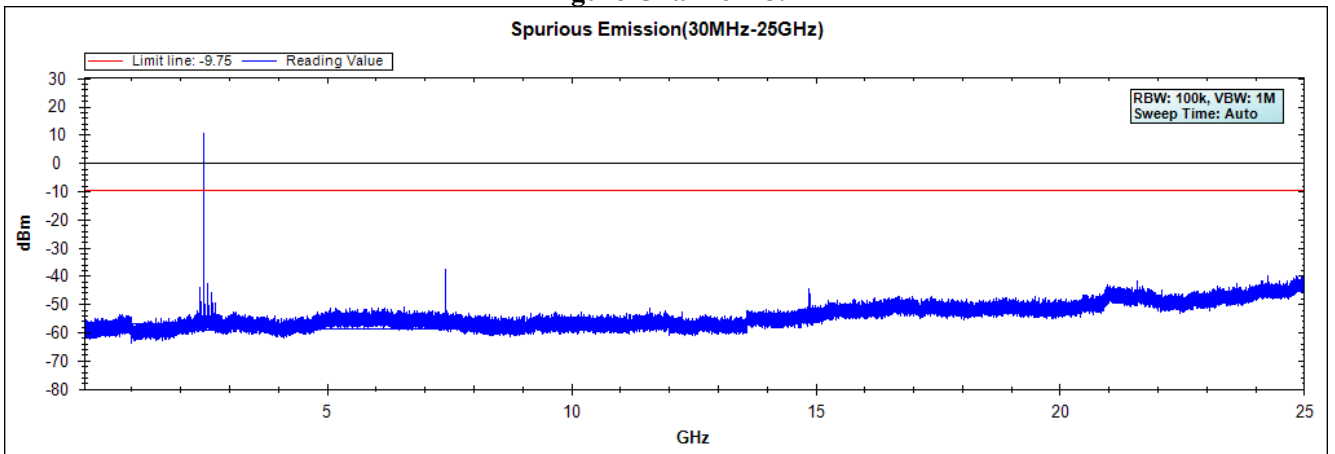

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Notebook
Test Item : RF Antenna Conducted Test
Test Mode : Mode 2: Transmit - 3Mbps
Test Date : 2021/01/28

Figure Channel 00:

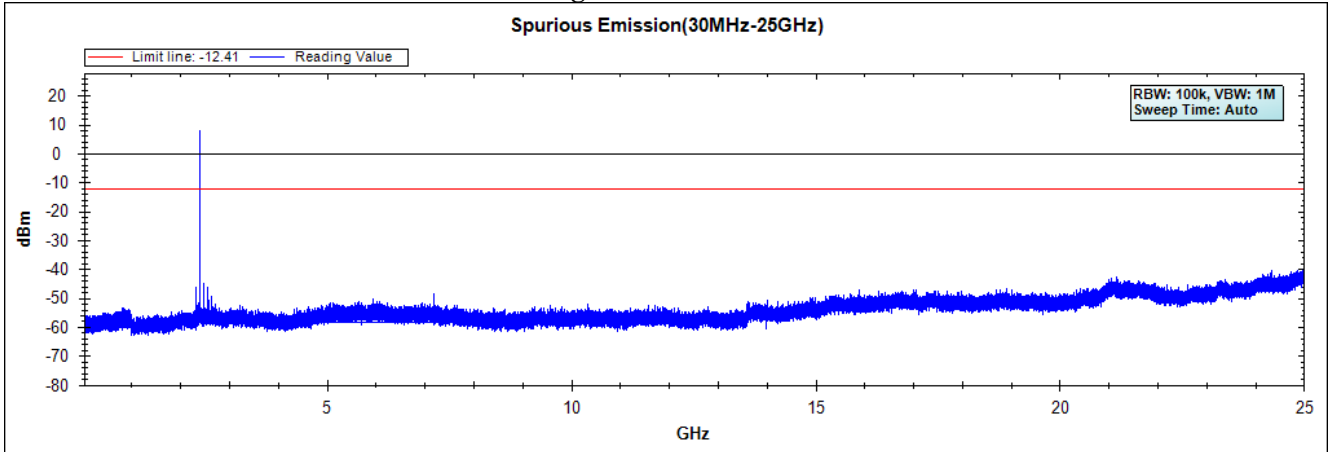


Figure Channel 39:


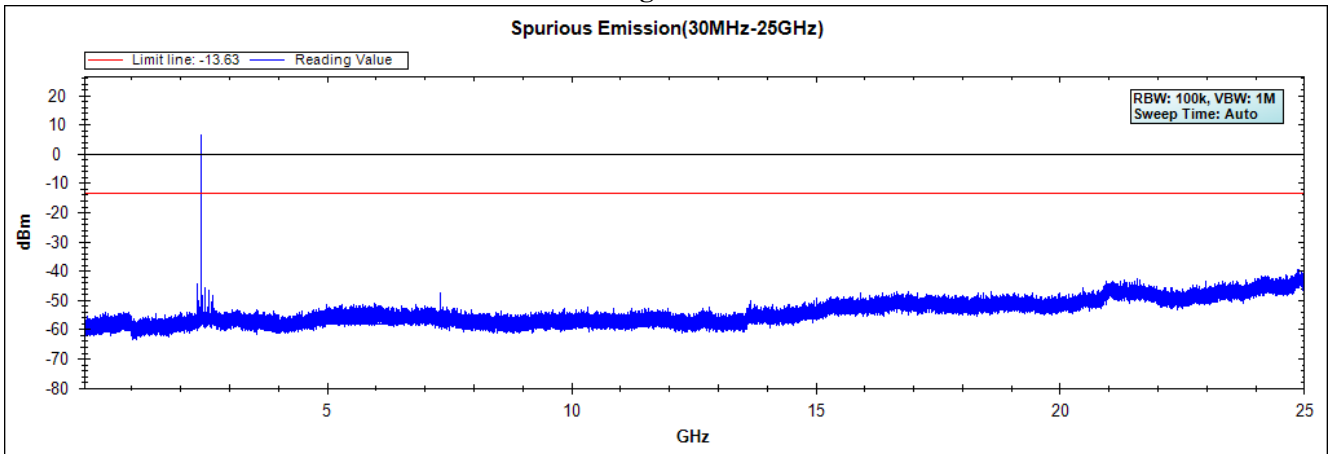


Figure Channel 78:

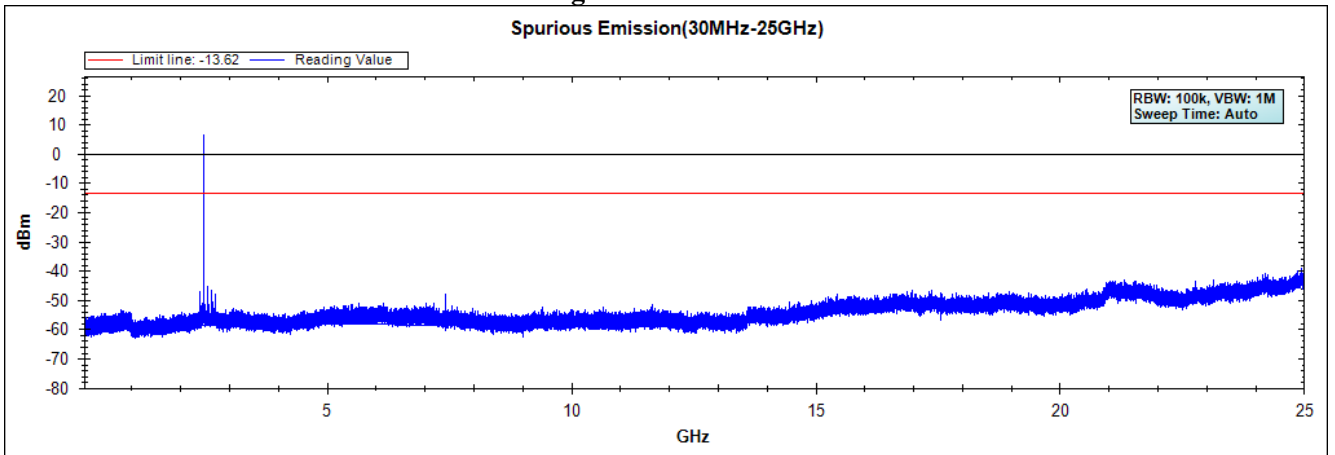


Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

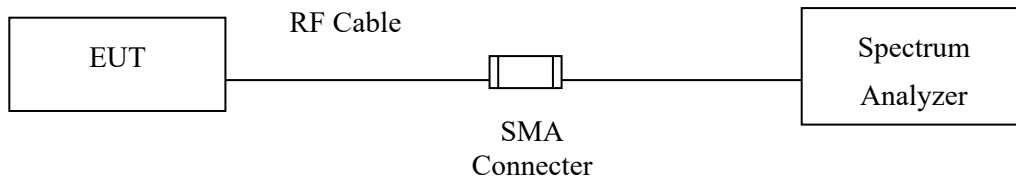

RF Radiated Measurement:

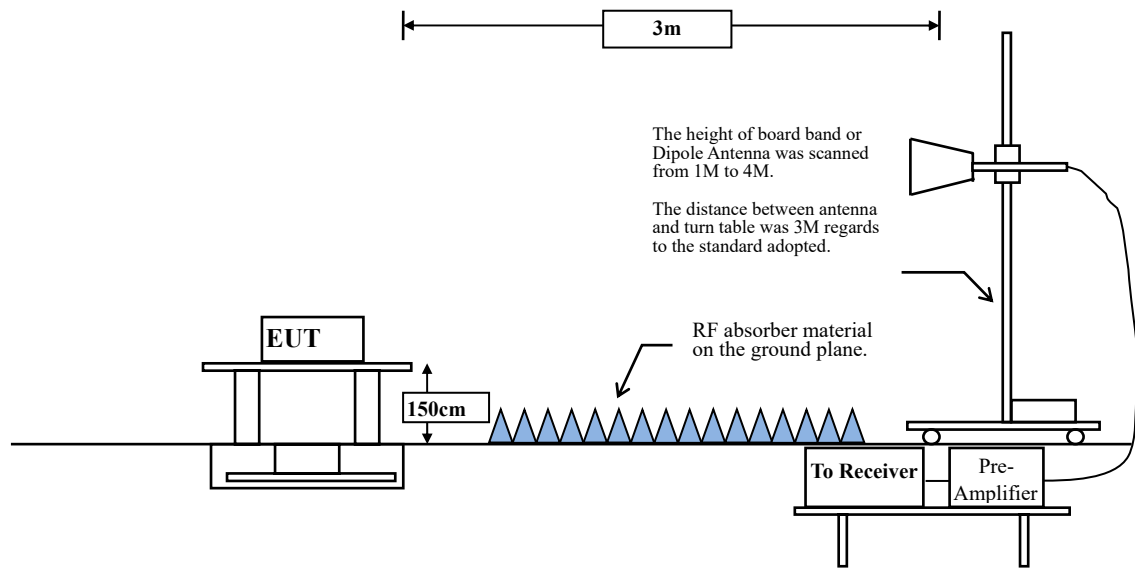

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.4. Test Result of Band Edge

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/01/26

Horizontal

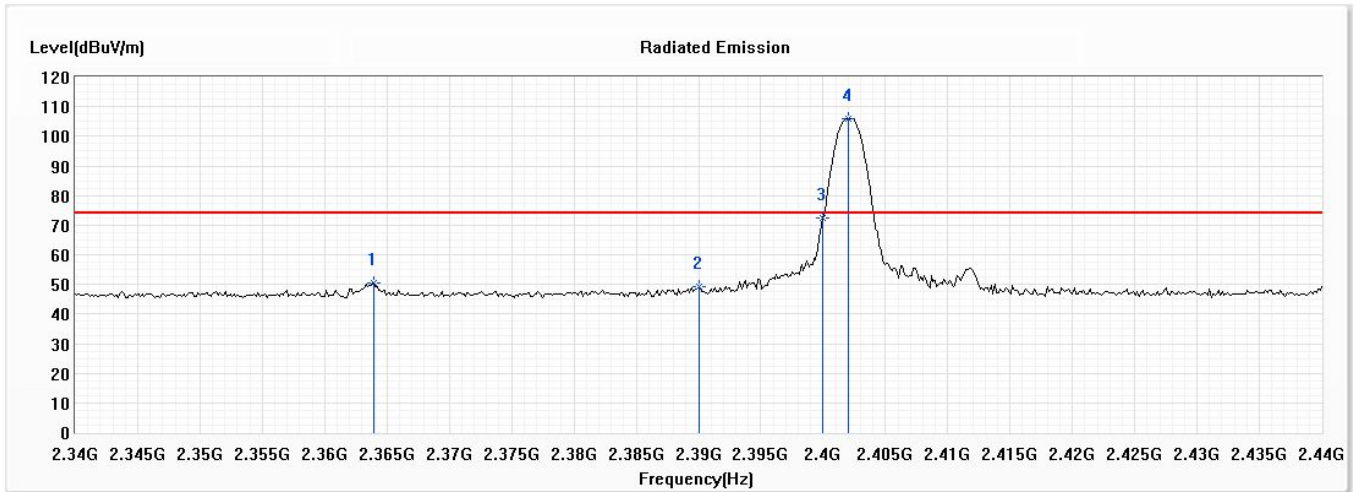

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2363.913	50.33	74.00	-23.67	38.54	11.79	PK
2	2390.000	49.21	74.00	-24.79	37.29	11.92	PK
3	2400.000	72.56	--	--	60.60	11.96	PK
! 4	2402.029	105.79	--	--	93.82	11.97	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	2363.913	50.330	-24.792	25.538	-28.462	54.000
00 (Average)	2390.000	49.210	-24.792	24.418	-29.582	54.000
00 (Average)	2400.000	72.560	-24.792	47.768	--	--
00 (Average)	2402.029	105.790	-24.792	80.998	--	--

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/01/26

Vertical

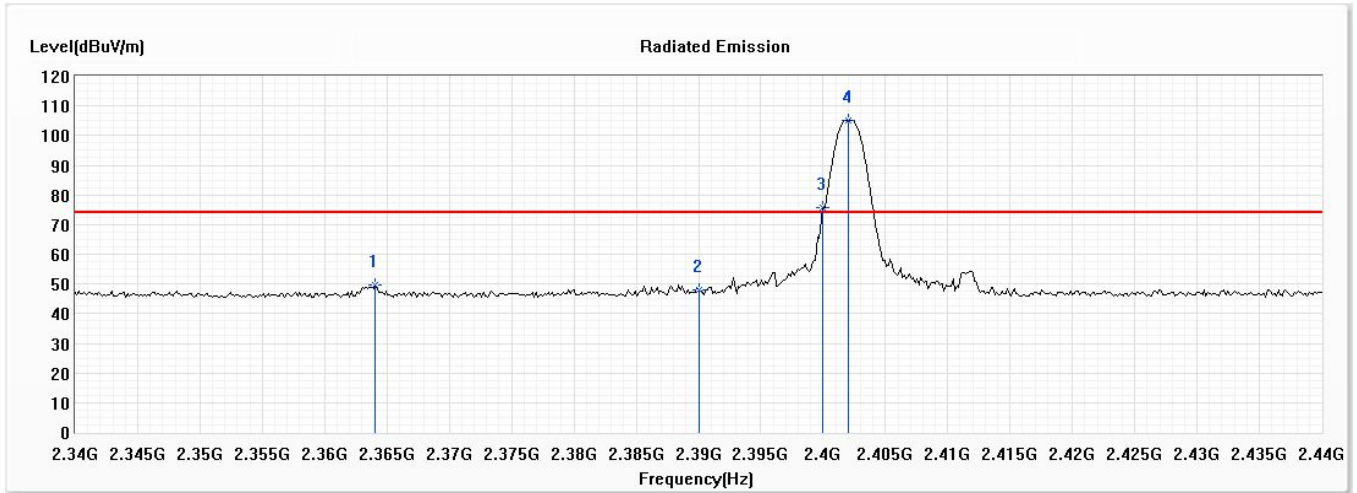

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2364.058	49.56	74.00	-24.44	37.77	11.79	PK
2	2390.000	47.95	74.00	-26.05	36.03	11.92	PK
! 3	2400.000	75.61	--	--	63.65	11.96	PK
! 4	2402.029	105.19	--	--	93.22	11.97	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	2364.058	49.560	-24.792	24.768	-29.232	54.000
00 (Average)	2390.000	47.950	-24.792	23.158	-30.842	54.000
00 (Average)	2400.000	75.610	-24.792	50.818	--	--
00 (Average)	2402.029	105.190	-24.792	80.398	--	--

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/01/26

Horizontal

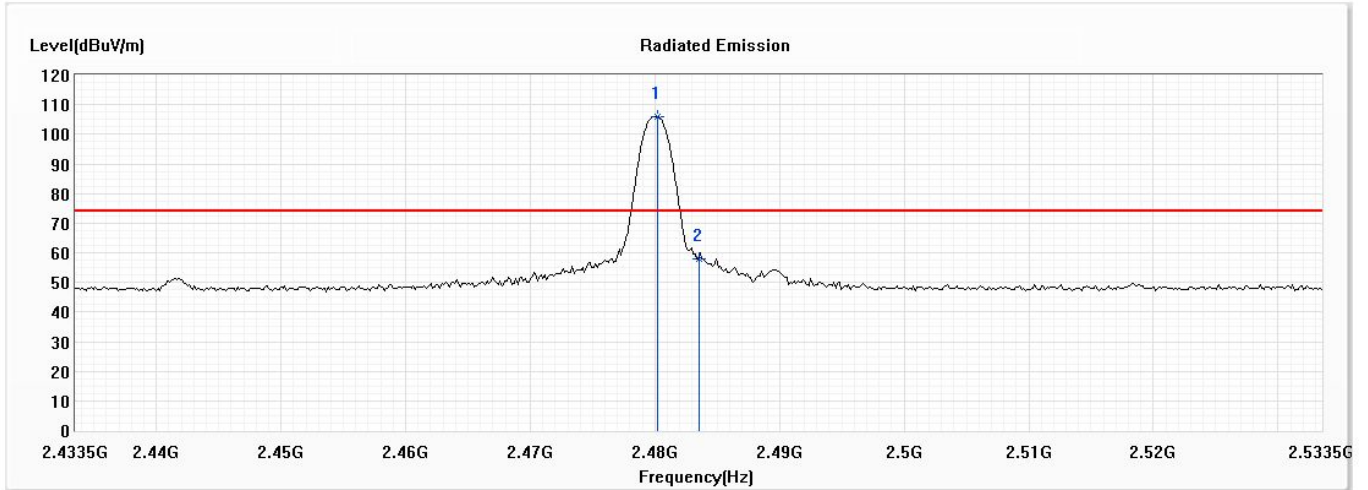

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.167	105.78	--	--	93.55	12.23	PK
2	2483.500	58.06	74.00	-15.94	45.82	12.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
78 (Average)	2480.167	105.780	-24.792	80.988	--	--
78 (Average)	2483.500	58.060	-24.792	33.268	-20.732	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/01/26

Vertical

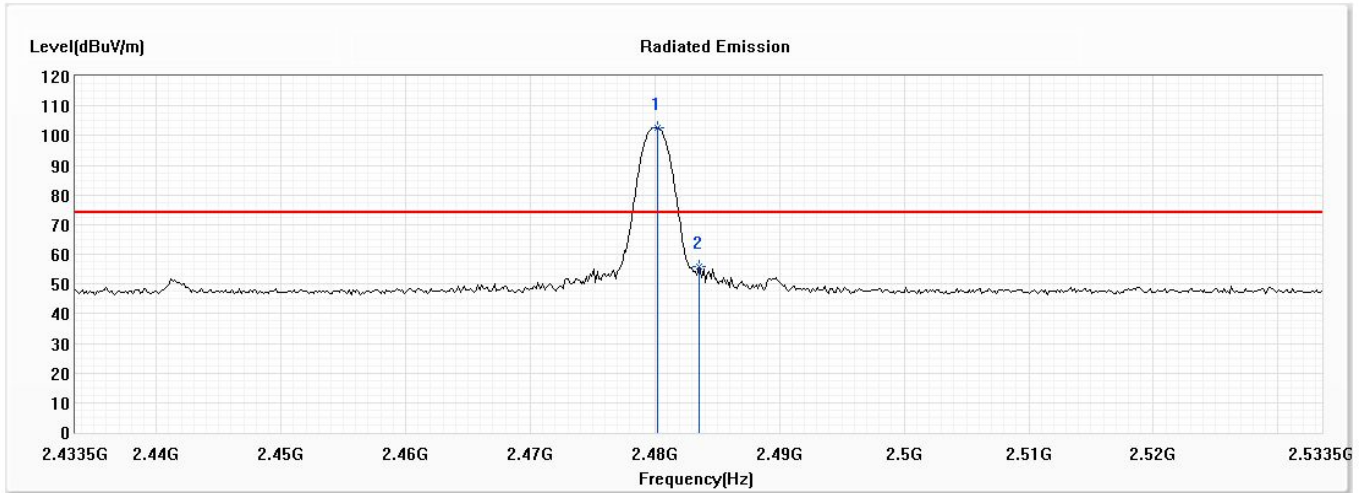

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.167	102.49	--	--	90.26	12.23	PK
2	2483.500	55.83	74.00	-18.17	43.59	12.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
78 (Average)	2480.167	102.490	-24.792	77.698	--	--
78 (Average)	2483.500	55.830	-24.792	31.038	-22.962	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/26

Horizontal

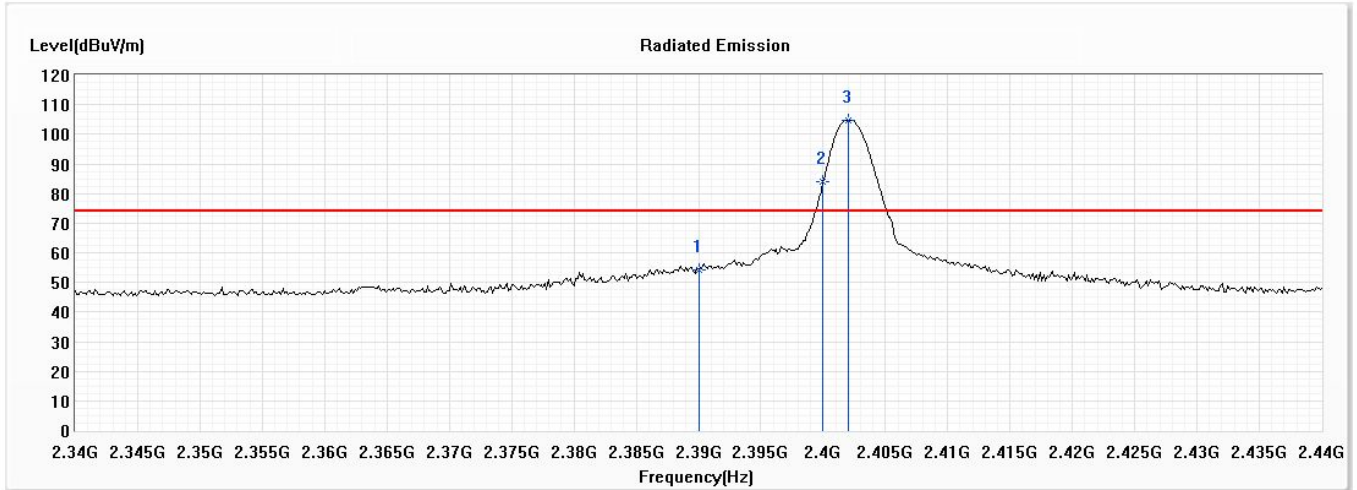

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	54.05	74.00	-19.95	42.13	11.92	PK
! 2	2400.000	83.96	--	--	72.00	11.96	PK
! 3	2402.029	104.77	--	--	92.80	11.97	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	2390.000	54.050	-24.792	29.258	-24.742	54.000
00 (Average)	2400.000	83.960	-24.792	59.168	--	--
00 (Average)	2402.029	104.770	-24.792	79.978	--	--

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/26

Vertical

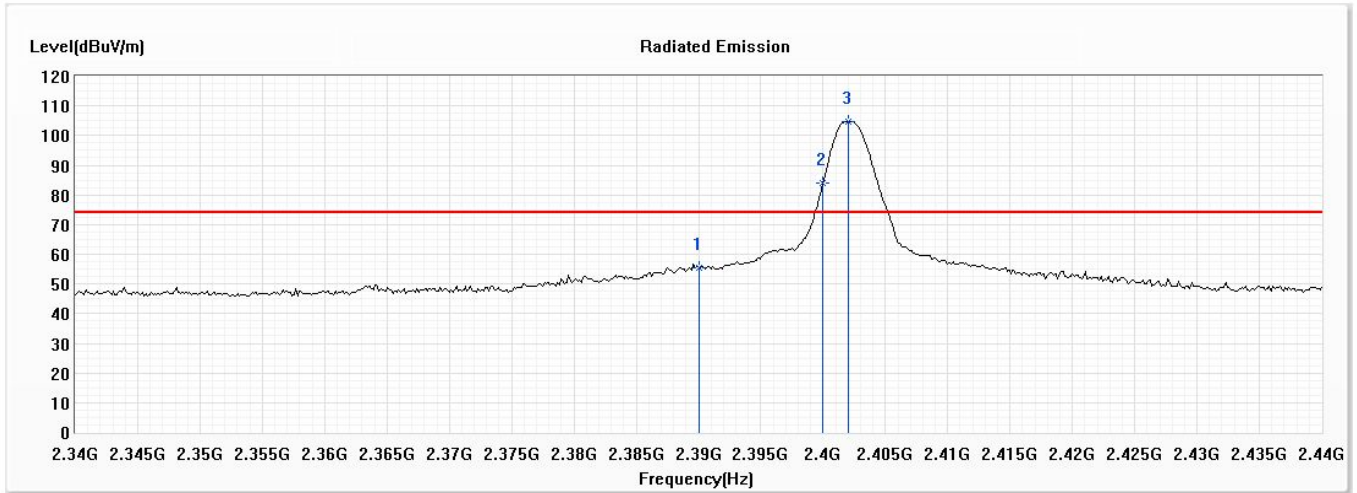

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	55.50	74.00	-18.50	43.58	11.92	PK
! 2	2400.000	84.10	--	--	72.14	11.96	PK
! 3	2402.029	104.88	--	--	92.91	11.97	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
00 (Average)	2390.000	55.500	-24.792	30.708	-23.292	54.000
00 (Average)	2400.000	84.100	-24.792	59.308	--	--
00 (Average)	2402.029	104.880	-24.792	80.088	--	--

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/26

Horizontal

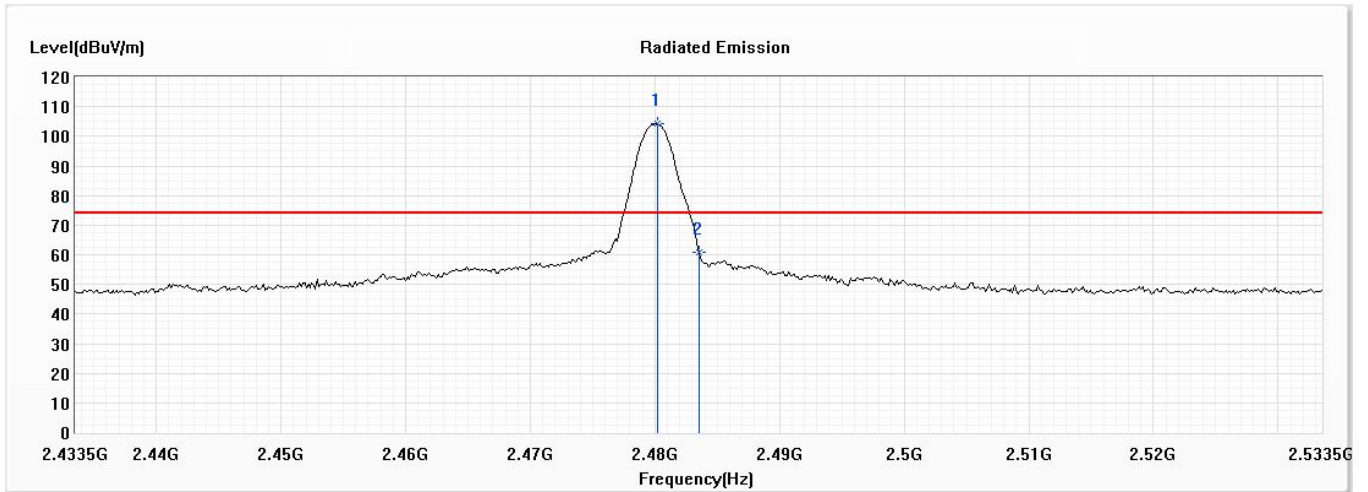

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.167	104.14	--	--	91.91	12.23	PK
2	2483.500	60.98	74.00	-13.02	48.74	12.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
78 (Average)	2480.167	104.140	-24.792	79.348	--	--
78 (Average)	2483.500	60.980	-24.792	36.188	-17.812	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/26

Vertical

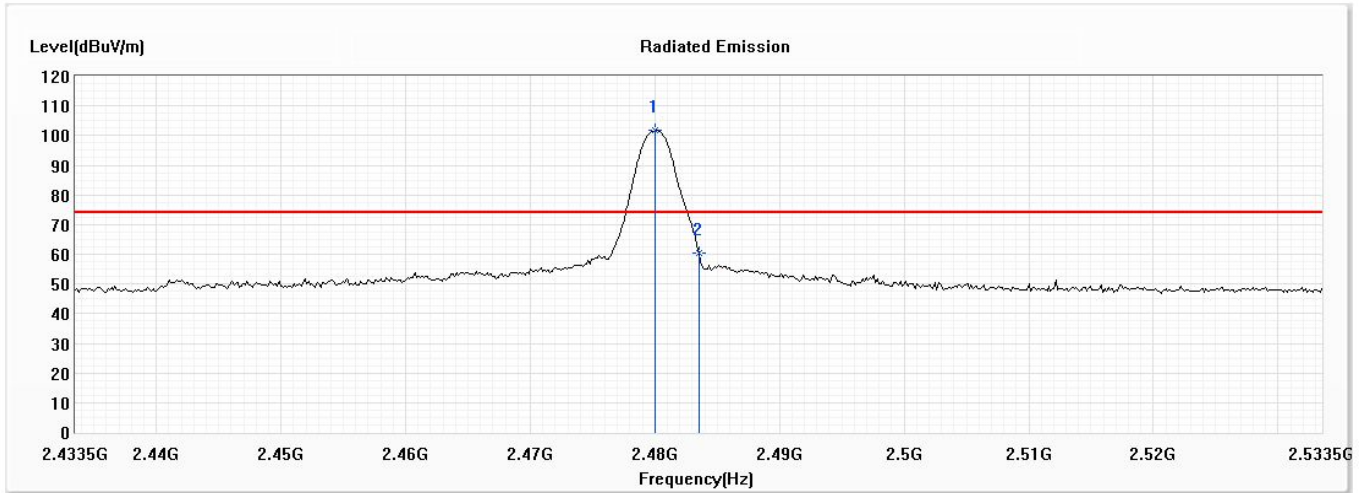

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.022	101.72	--	--	89.49	12.23	PK
2	2483.500	60.43	74.00	-13.57	48.19	12.24	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBuV/m)
78 (Average)	2480.022	101.720	-24.792	76.928	--	--
78 (Average)	2483.500	60.430	-24.792	35.638	-18.362	54.000

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 11.

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping off)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:


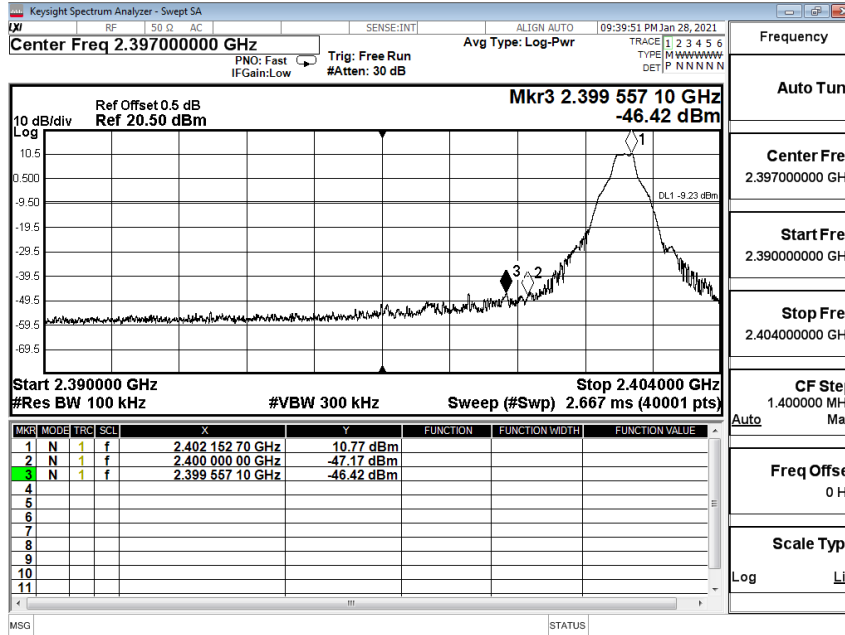


Figure Channel 78:

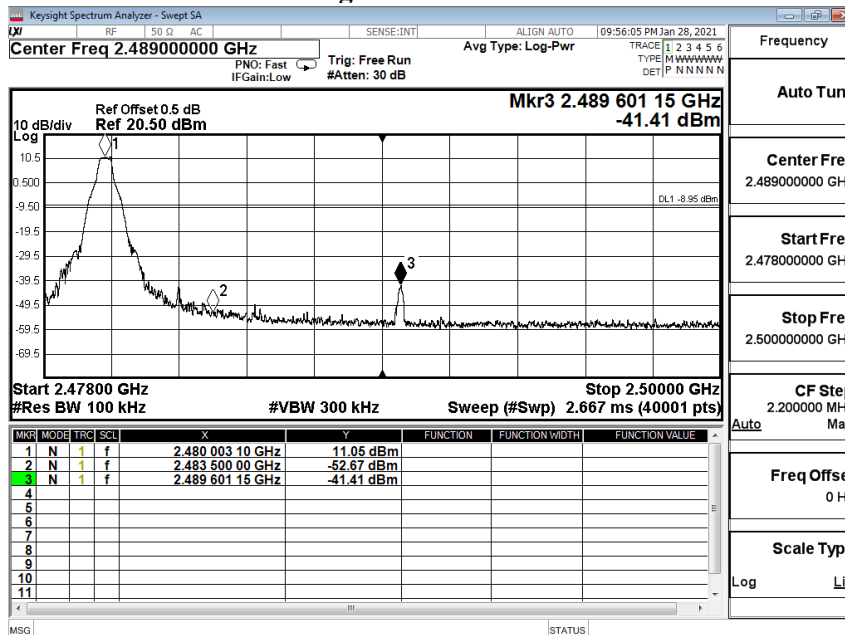

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping on)

Measurement Level Δ (dB)	Result
> 20	PASS

Figure Channel 00 Hopping:


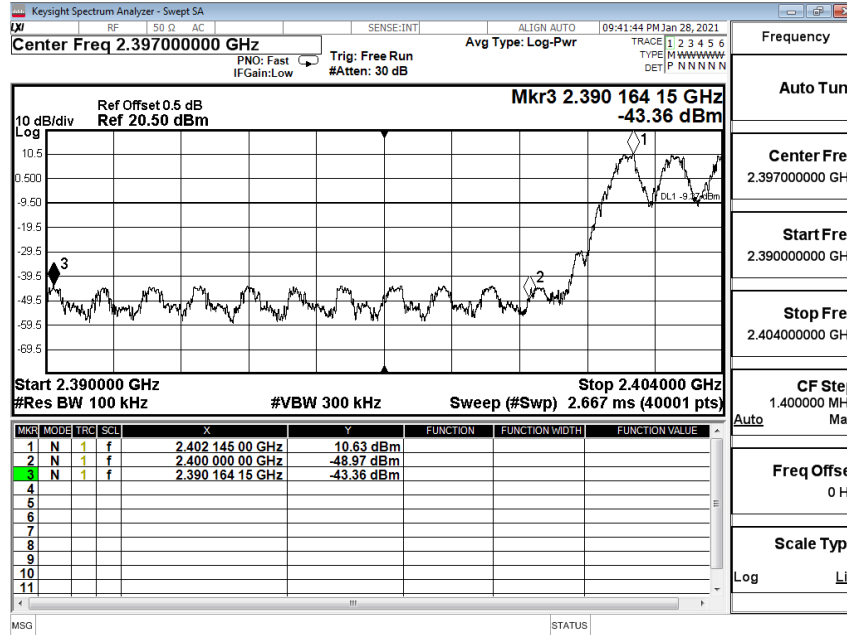


Figure Channel 78 Hopping:

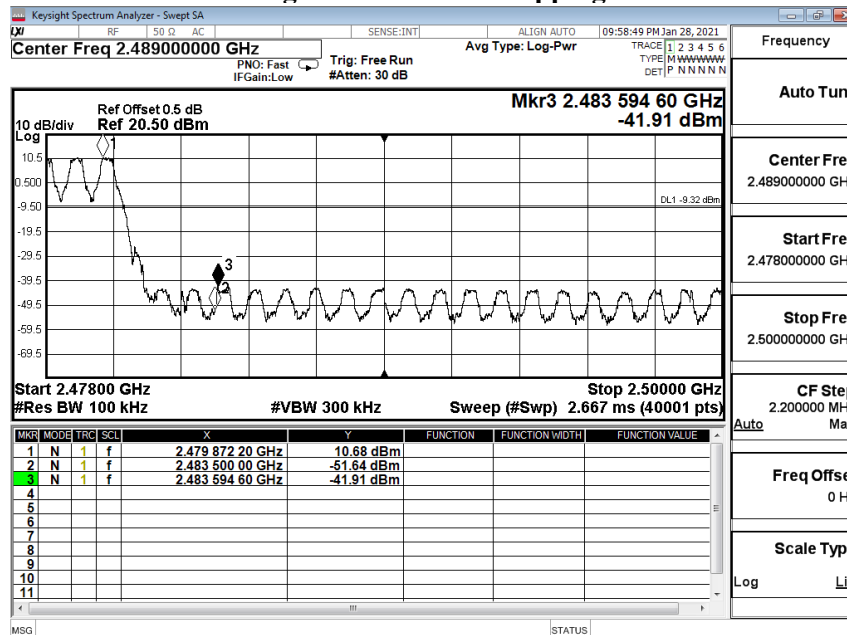

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps(Hopping off)

Measurement Level	Result
Δ (dB)	
> 20	PASS

Figure Channel 00:


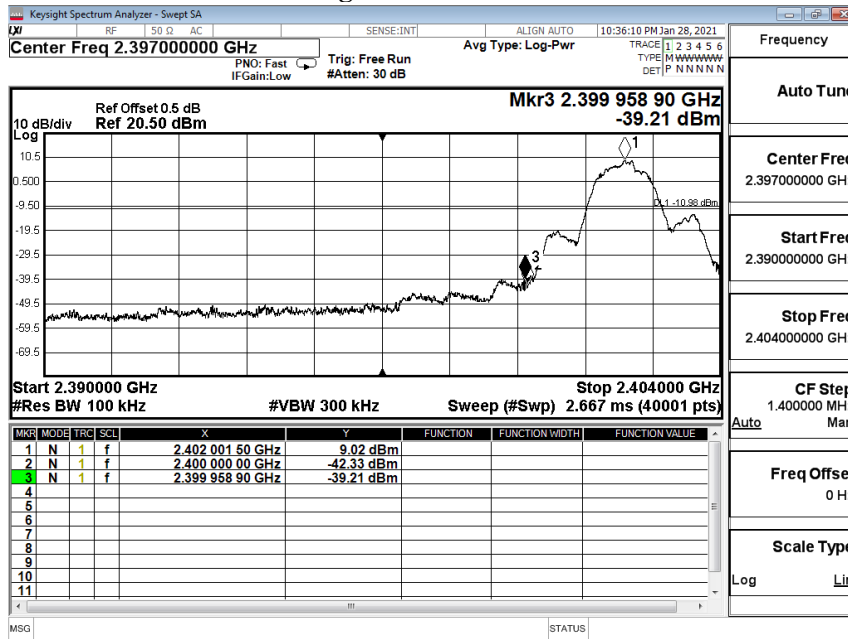


Figure Channel 78:

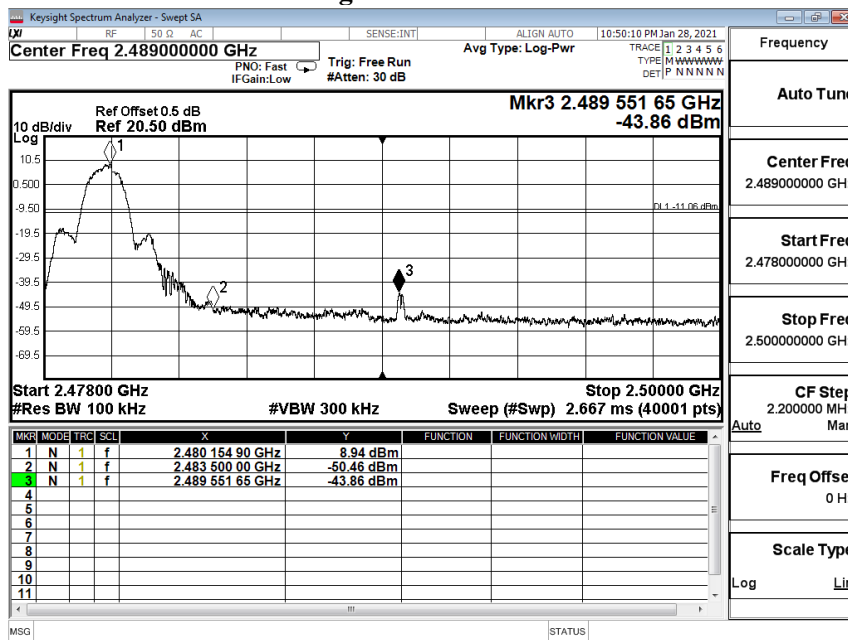

Product : Notebook
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps(Hopping on)

Measurement Level Δ (dB)	Result
> 20	PASS

Figure Channel 00 Hopping:



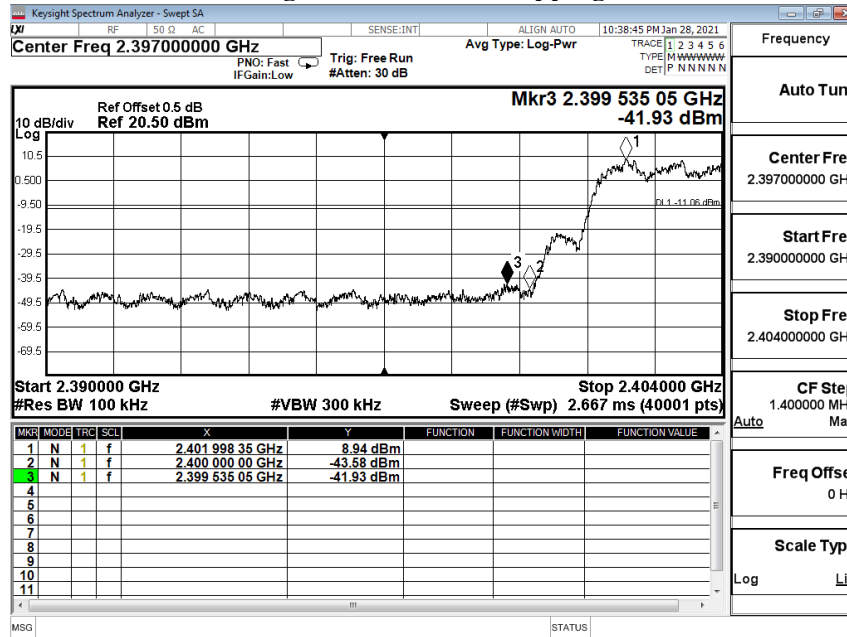


Figure Channel 78 Hopping:

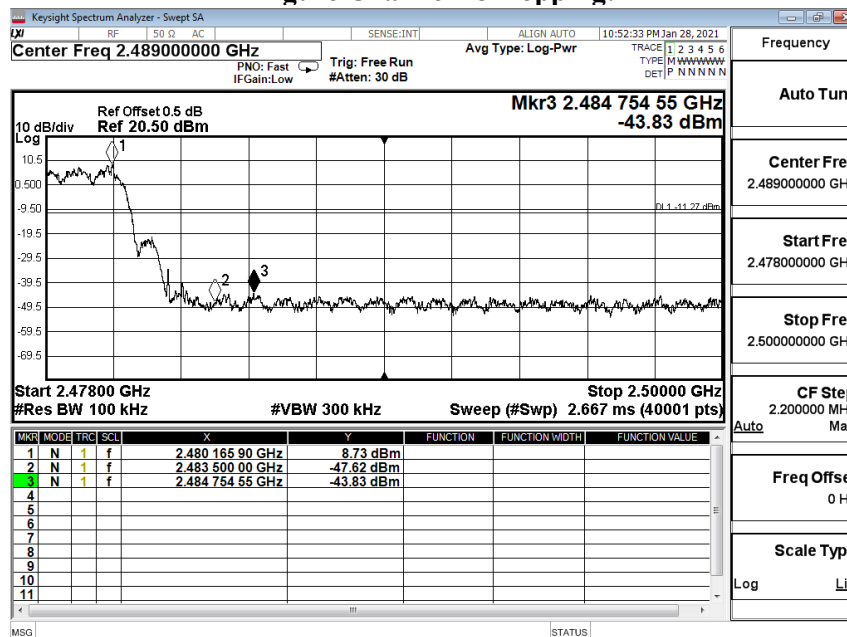

7. Channel Number

7.1. Test Setup

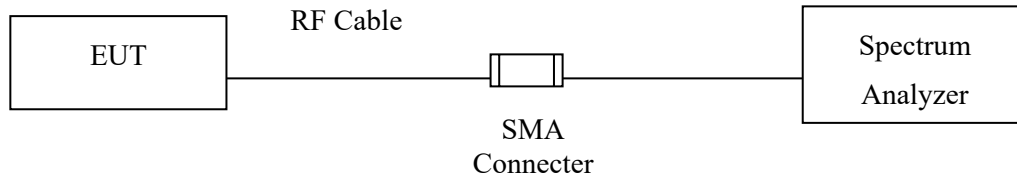

7.2. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.3. Test Procedure


Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of Channel Number


Product : Notebook
 Test Item : Channel Number
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2021/01/28

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

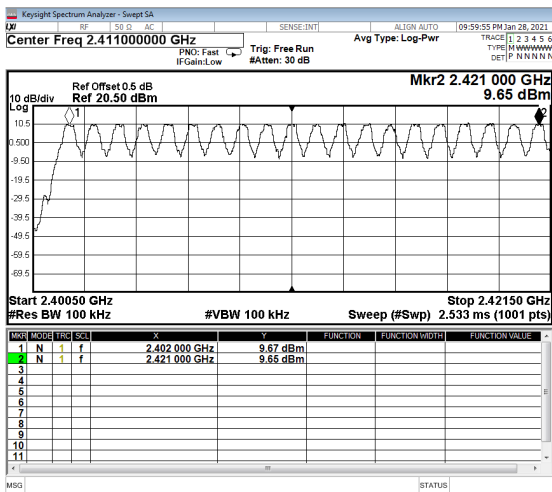


2422-2441MHz

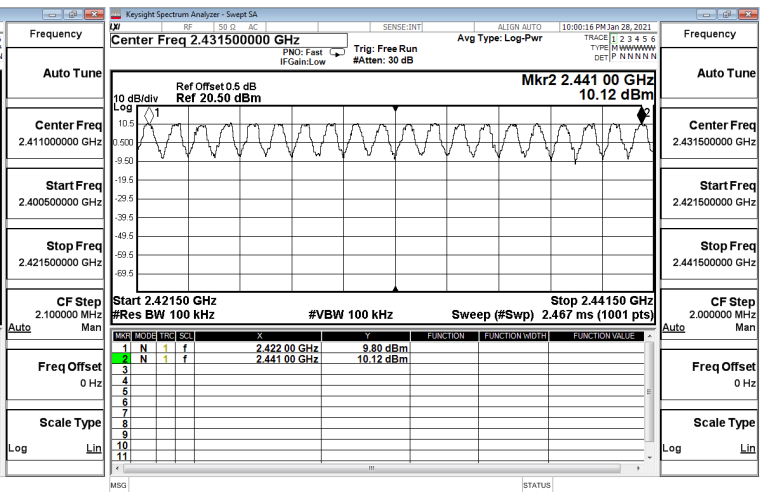

2442-2461MHz

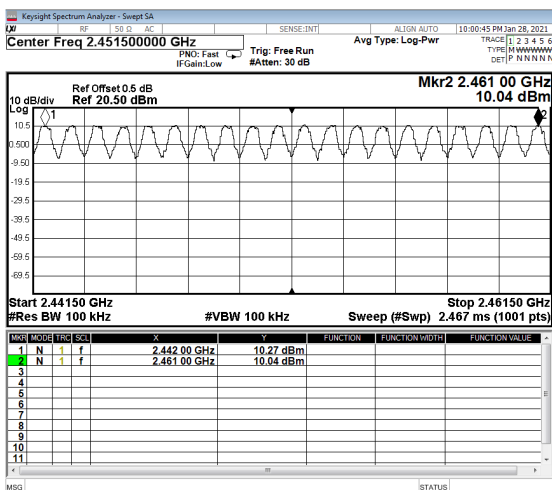


2462-2480MHz

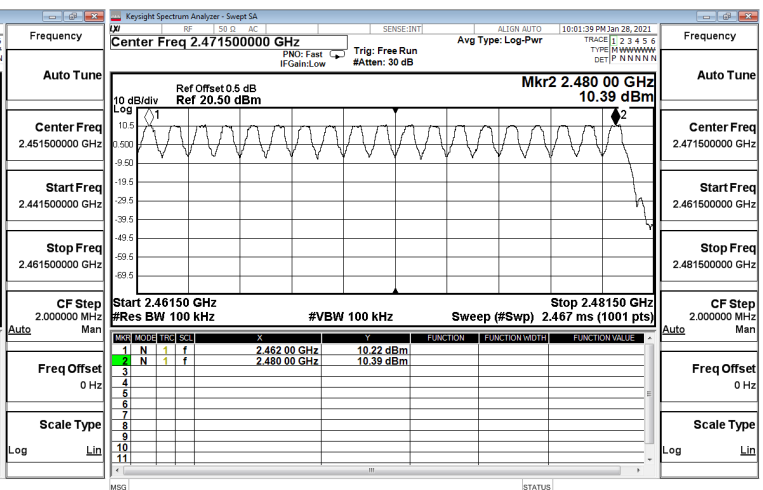


Product : Notebook
 Test Item : Channel Number
 Test Mode : Mode 2: Transmit - 3Mbps
 Test Date : 2021/01/28

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

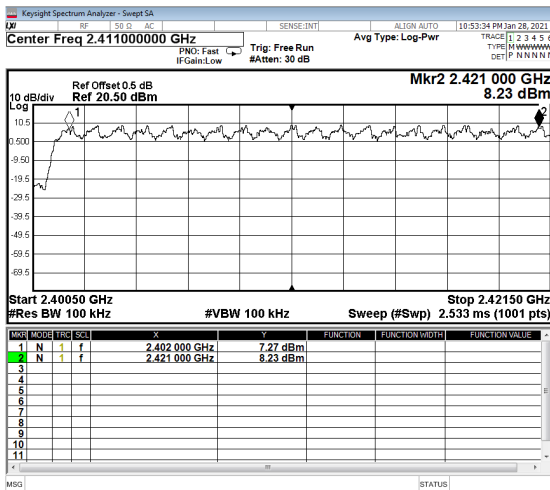


2422-2441MHz

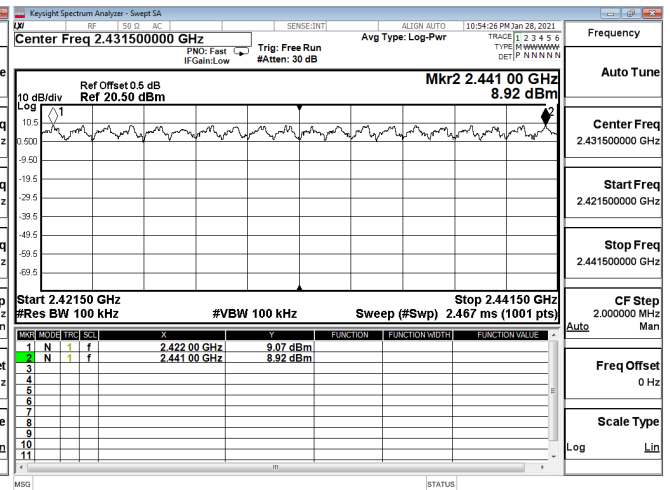

2442-2461MHz

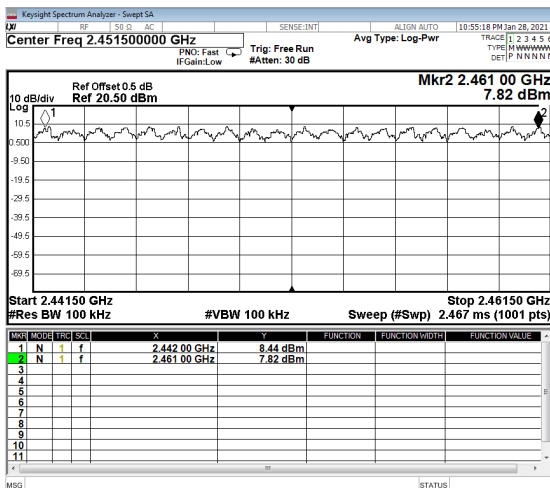


2462-2480MHz

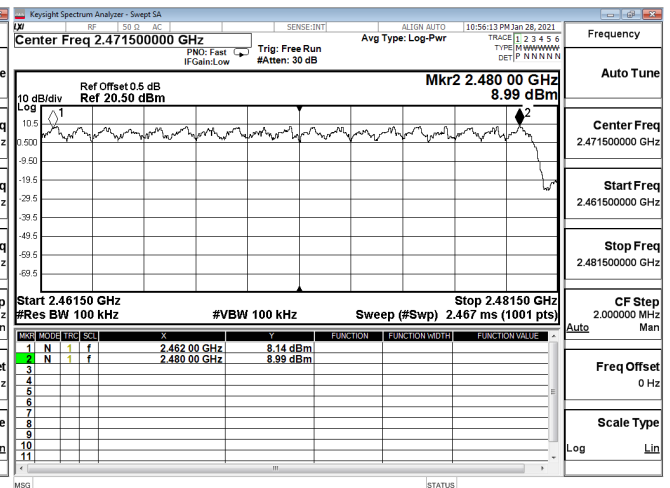

8. Channel Separation

8.1. Test Setup

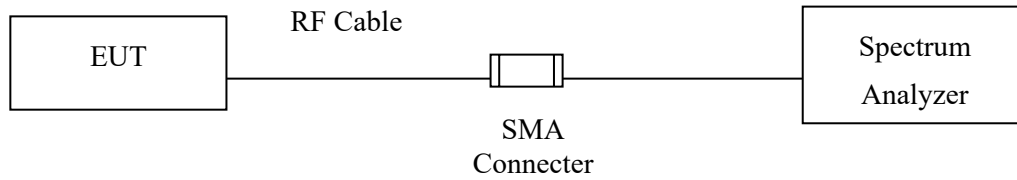

8.2. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements).


8.4. Test Result of Channel Separation

Product : Notebook
 Test Item : Channel Separation
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2021/01/28


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	634.0	Pass
39	2441	1000	>25 kHz	636.0	Pass
78	2480	1000	>25 kHz	638.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

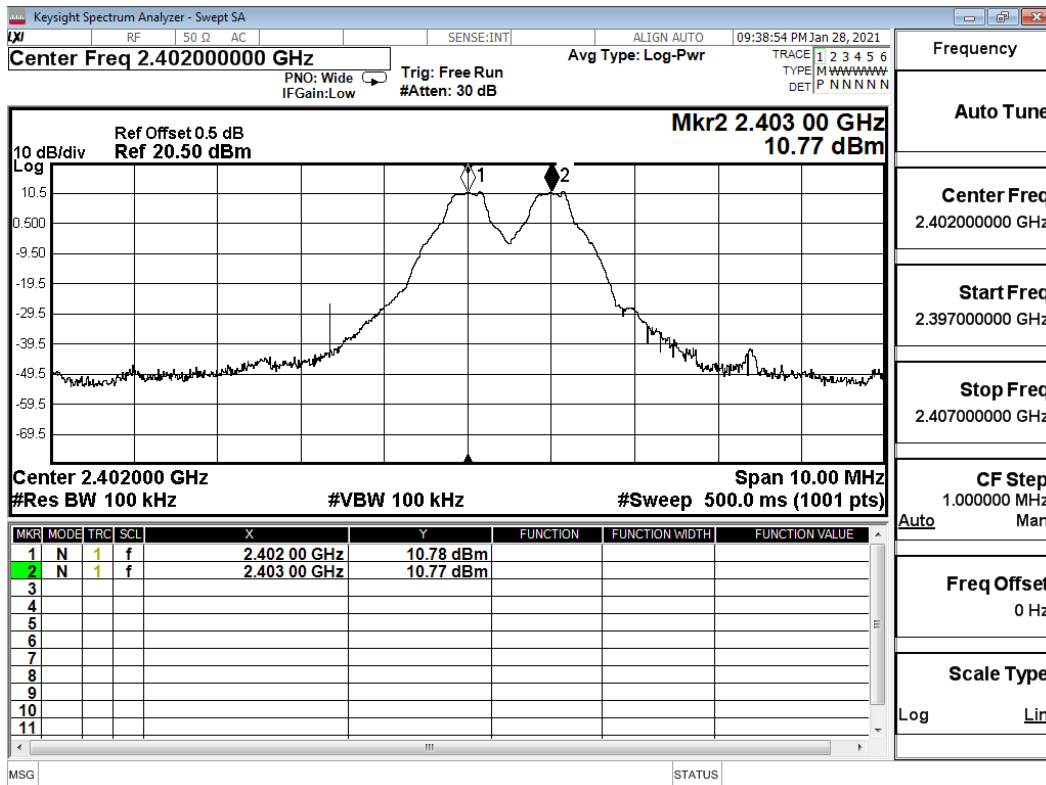

Channel 39 (2441MHz)

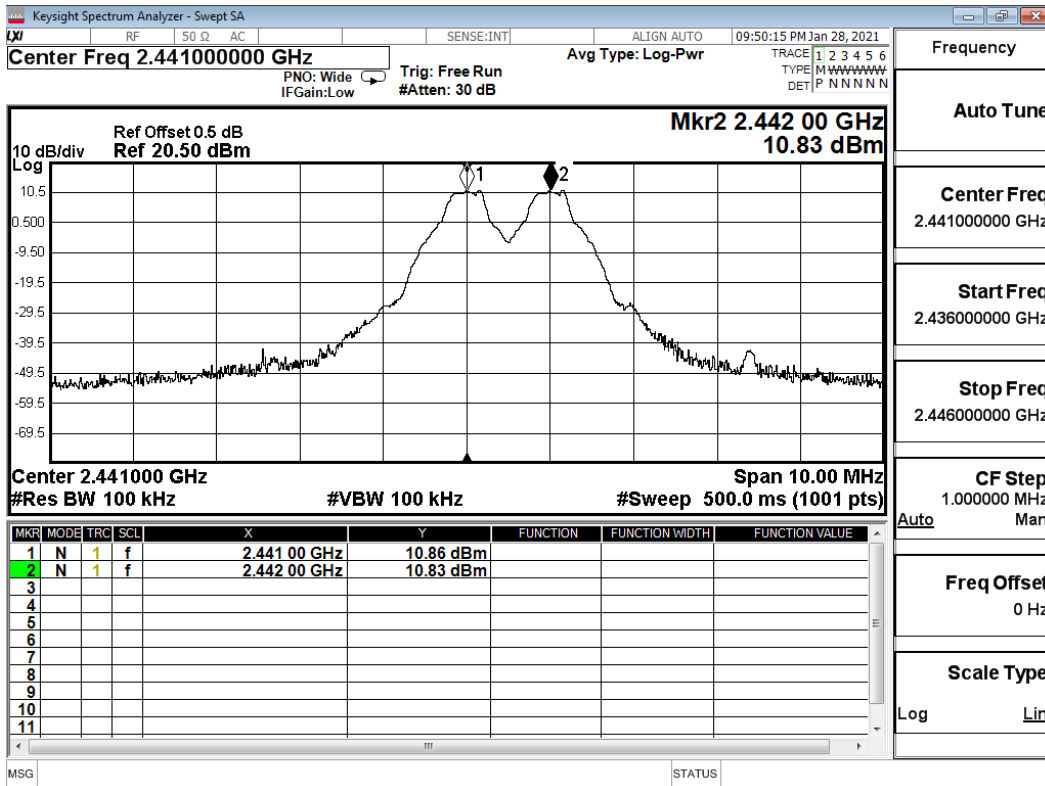

Channel 78 (2480MHz)

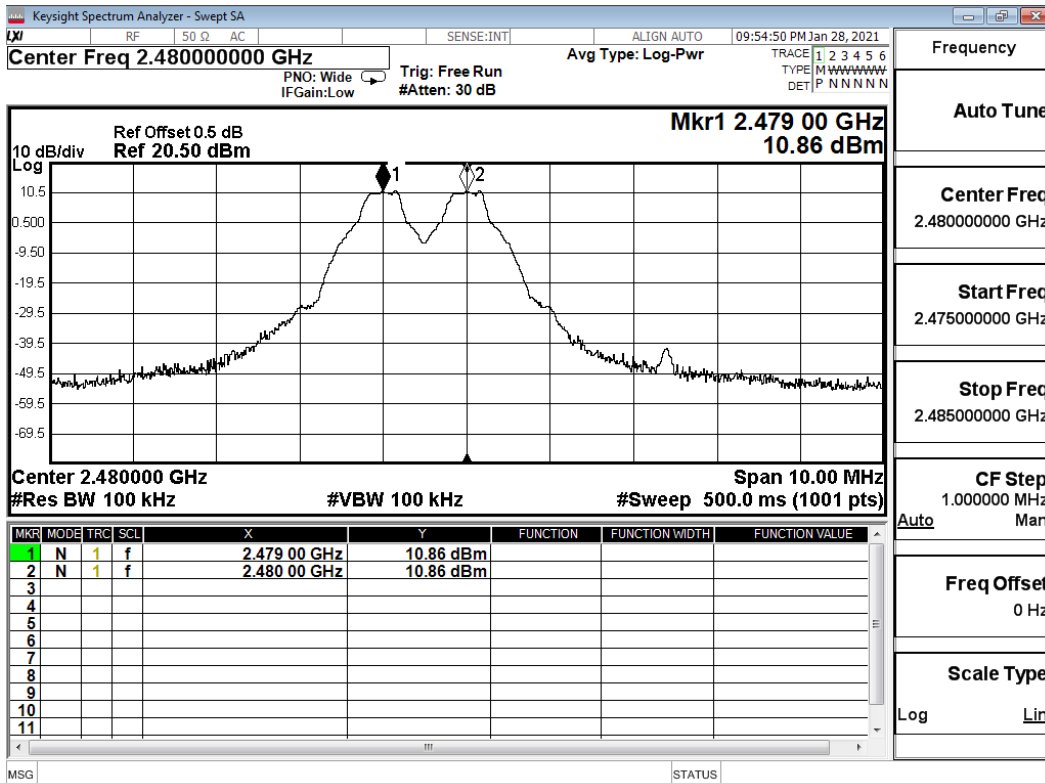


Product : Notebook
 Test Item : Channel Separation
 Test Mode : Mode 2: Transmit - 3Mbps
 Test Date : 2021/01/28


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	962.0	Pass
39	2441	1000	>25 kHz	962.0	Pass
78	2480	1000	>25 kHz	964.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

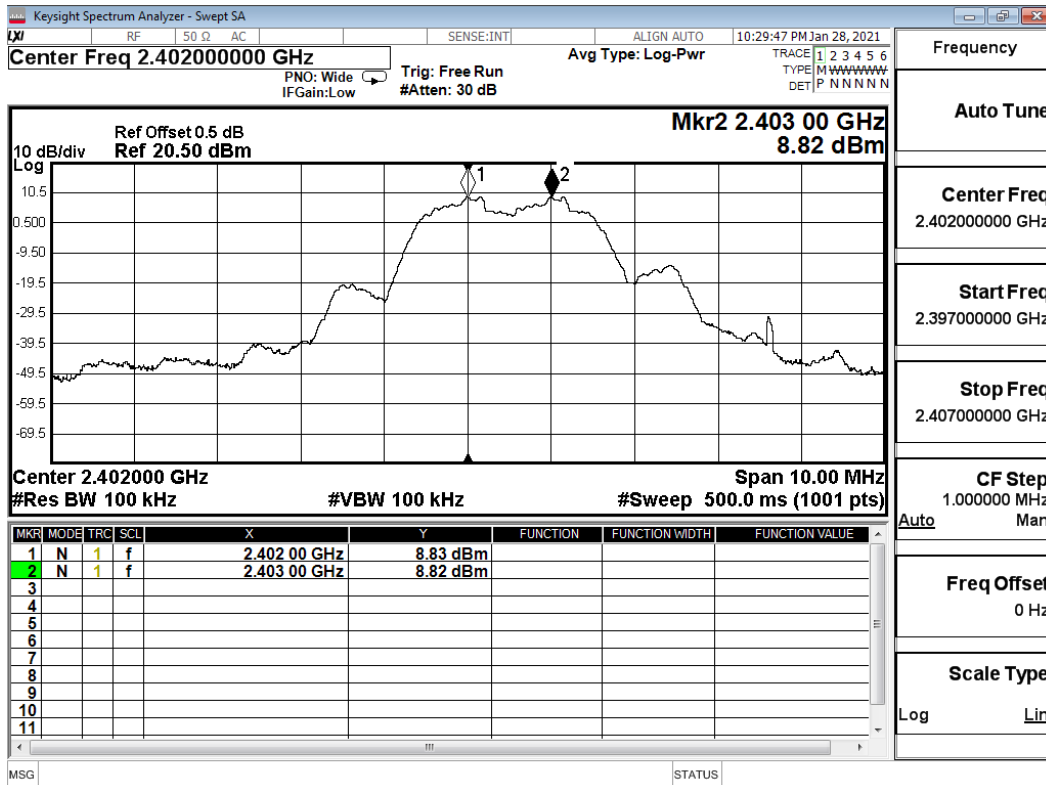

Channel 39 (2441MHz)

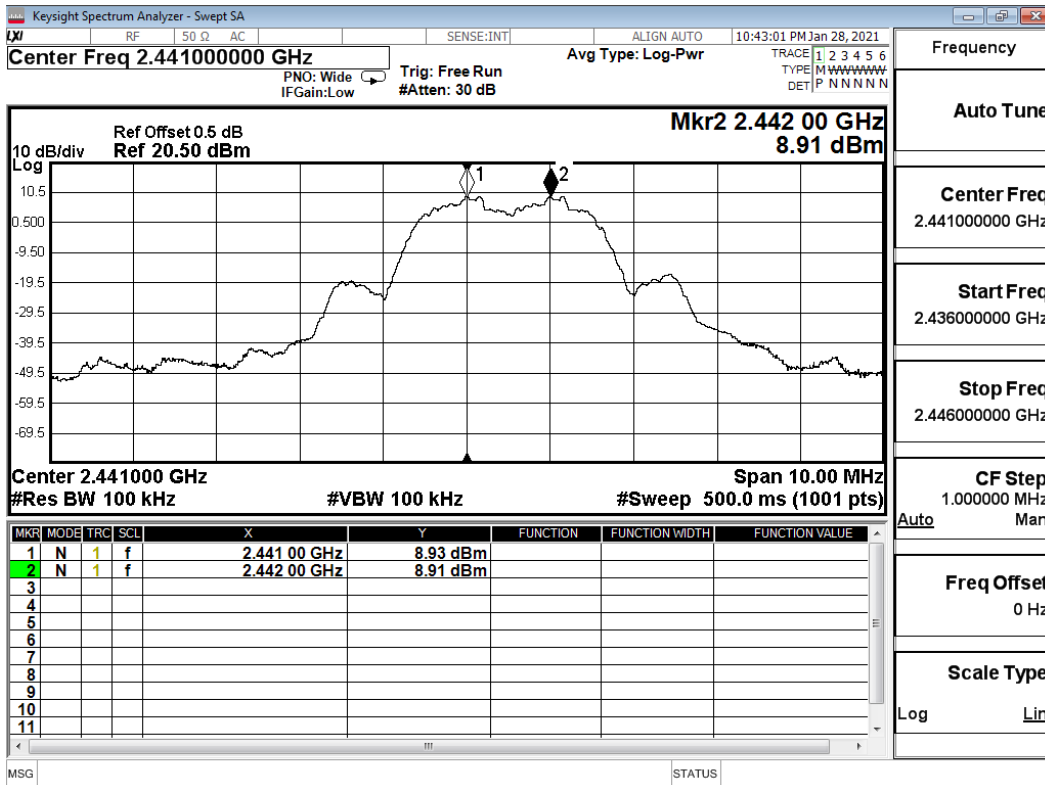


Channel 78 (2480MHz)

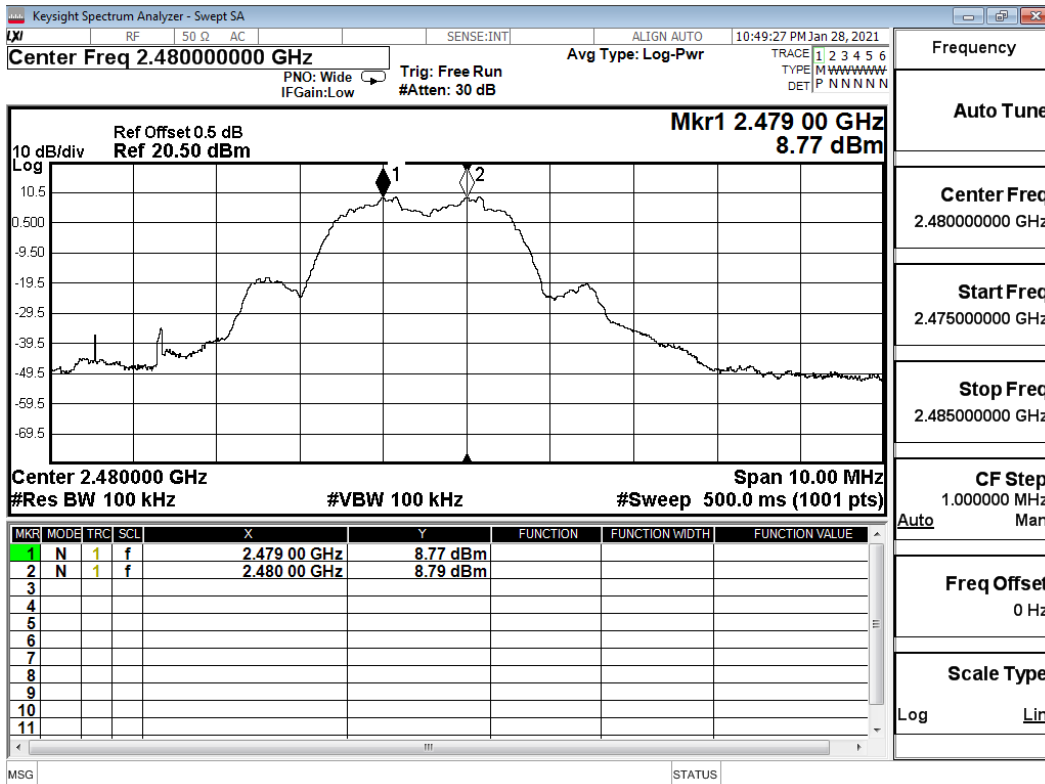

9. Dwell Time

9.1. Test Setup

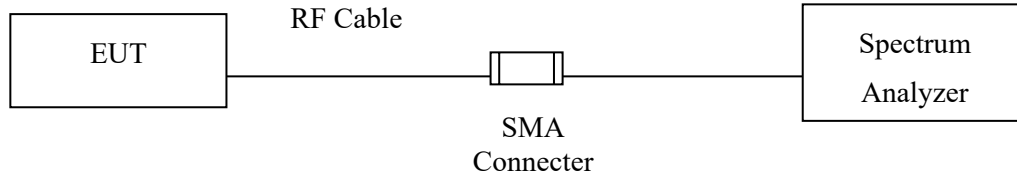

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.


9.4. Test Result of Dwell Time

Product : Notebook
 Test Item : Dwell Time
 Test Mode : Mode 1: Transmit - 1Mbps (Channel 00,39,78)
 Test Date : 2021/02/03


Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Dwell Time (ms)	Limit (ms)	Result
2402	2.880	80	31600	230.400	400	Pass
2441	2.860	77	31600	220.220	400	Pass
2480	2.880	80	31600	230.400	400	Pass

Dwell time = Time slot length(ms)*Hopping of Number


CH 00 Hopping of Number

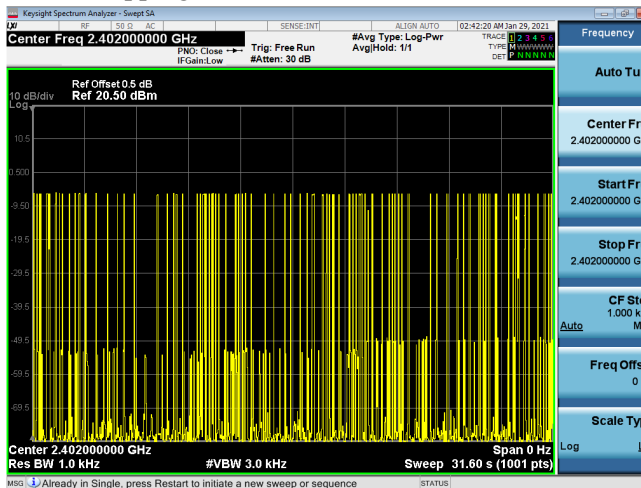

CH 00 Time slot length

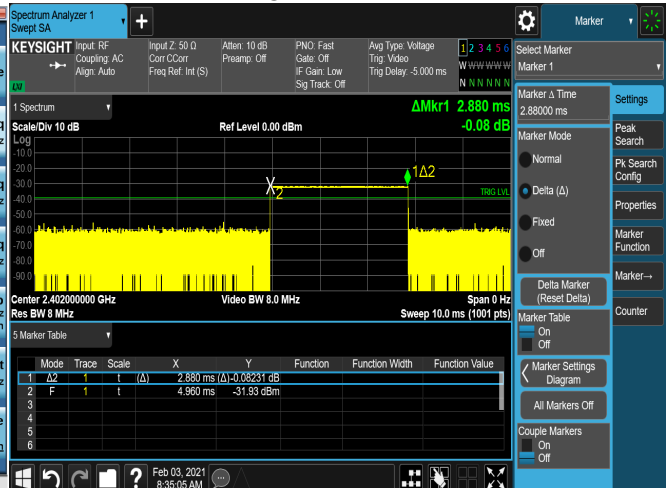


CH39 Hopping of Number

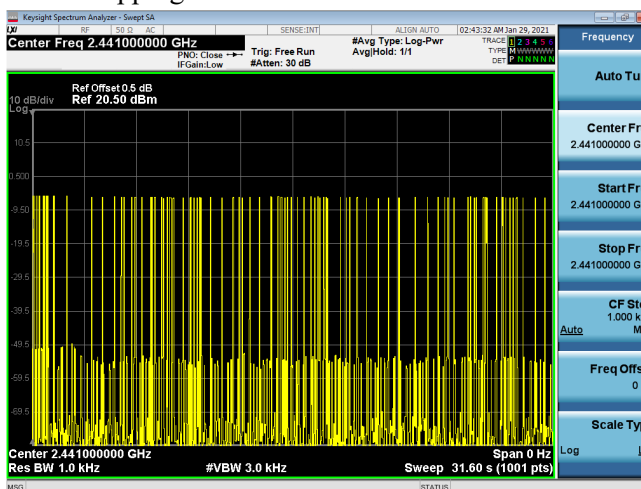


CH 39 Time slot length



CH 78 Hopping of Number

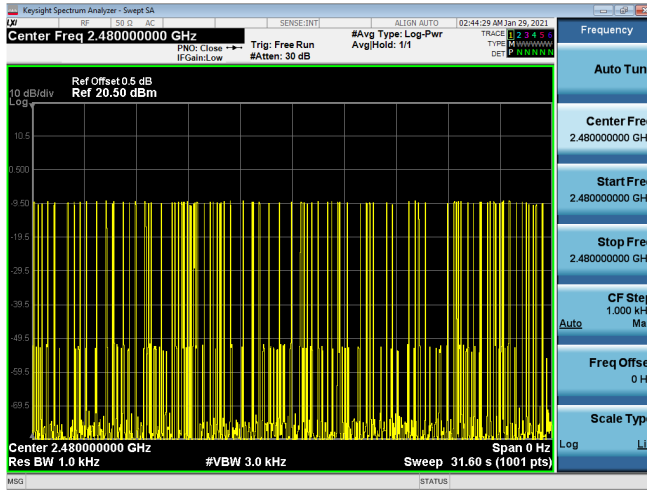

CH 78 Time slot length

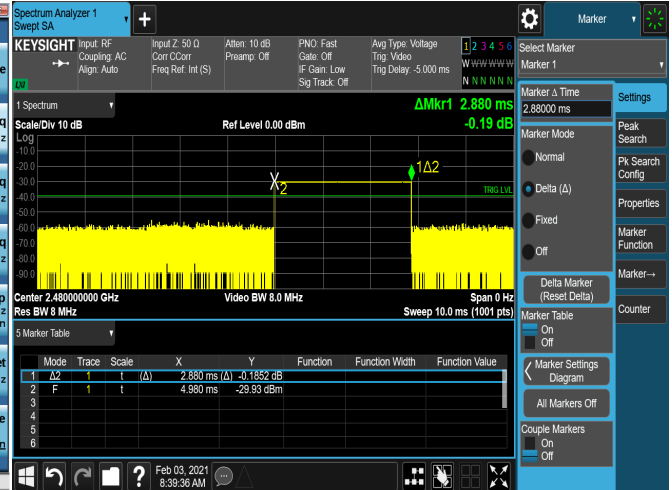

Note:


The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

Product : Notebook
 Test Item : Dwell Time
 Test Mode : Mode 2: Transmit - 3Mbps (Channel 00,39,78)
 Test Date : 2021/02/03

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Dwell Time (ms)	Limit (ms)	Result
2402	2.880	77	31600	221.760	400	Pass
2441	2.880	74	31600	213.120	400	Pass
2480	2.880	78	31600	224.640	400	Pass

Dwell time = Time slot length(ms)*Hopping of Number


CH 00 Hopping of Number

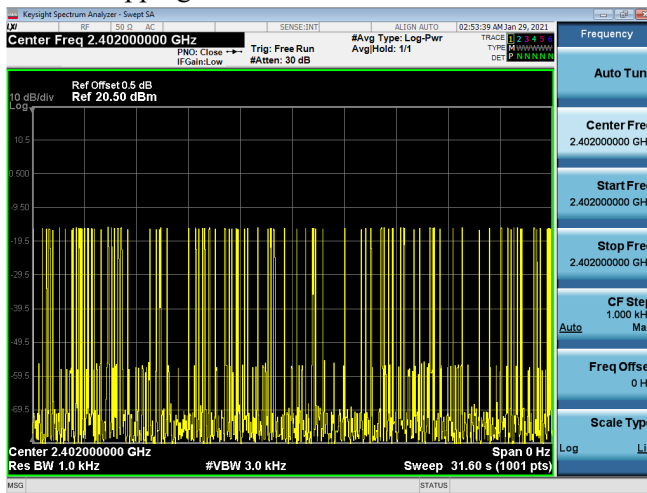


CH 00 Time slot length




CH39 Hopping of Number

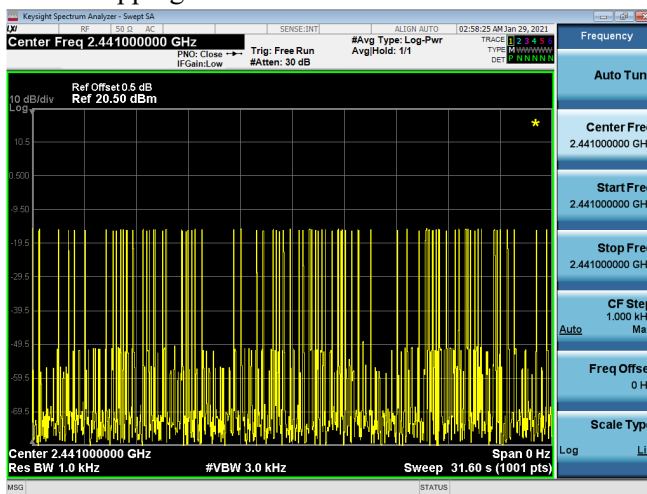


CH 39 Time slot length

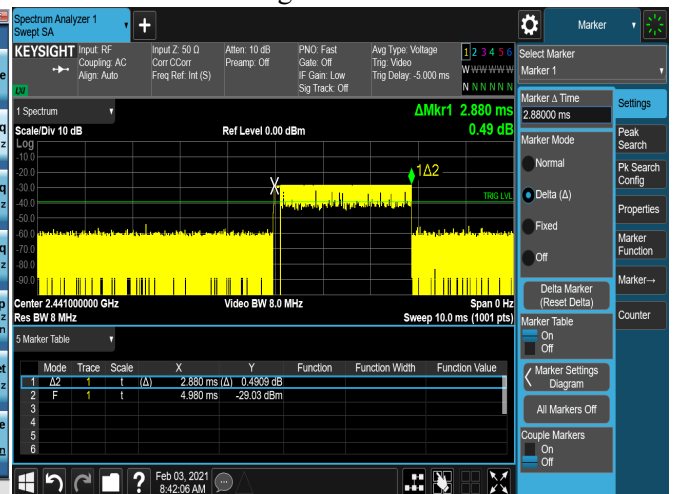

CH 78 Hopping of Number

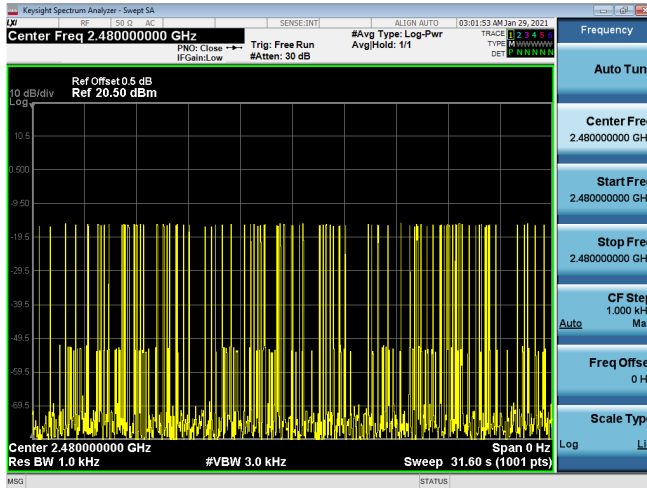

CH 78 Time slot length

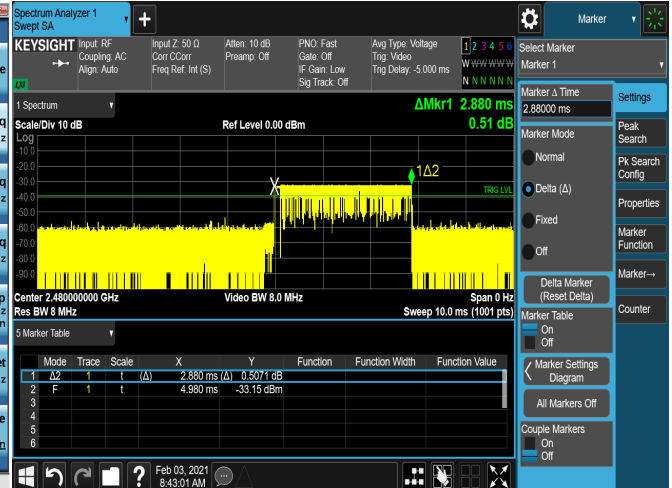


Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

10. Occupied Bandwidth

10.1. Test Setup

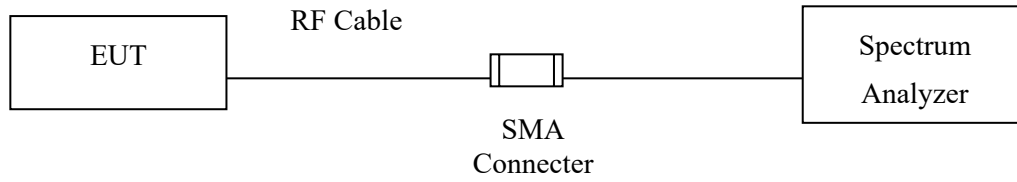

10.2. Limits

N/A

10.3. Test Procedure

Tested according to FHSS test procedure of KDB558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

10.4. Test Result of Occupied Bandwidth

Product : Notebook
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 1: Transmit - 1Mbps
 Test Date : 2021/01/28

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	951	--	NA
39	2441	954	--	NA
78	2480	957	--	NA

Figure Channel 00:

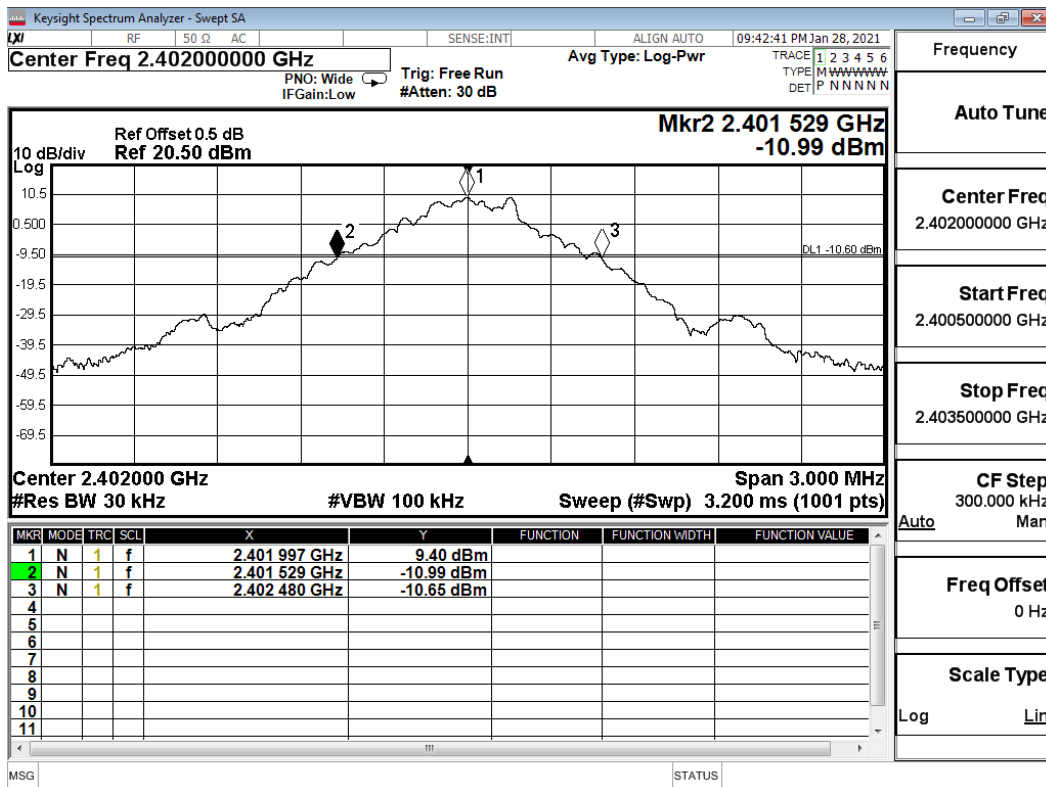


Figure Channel 39:


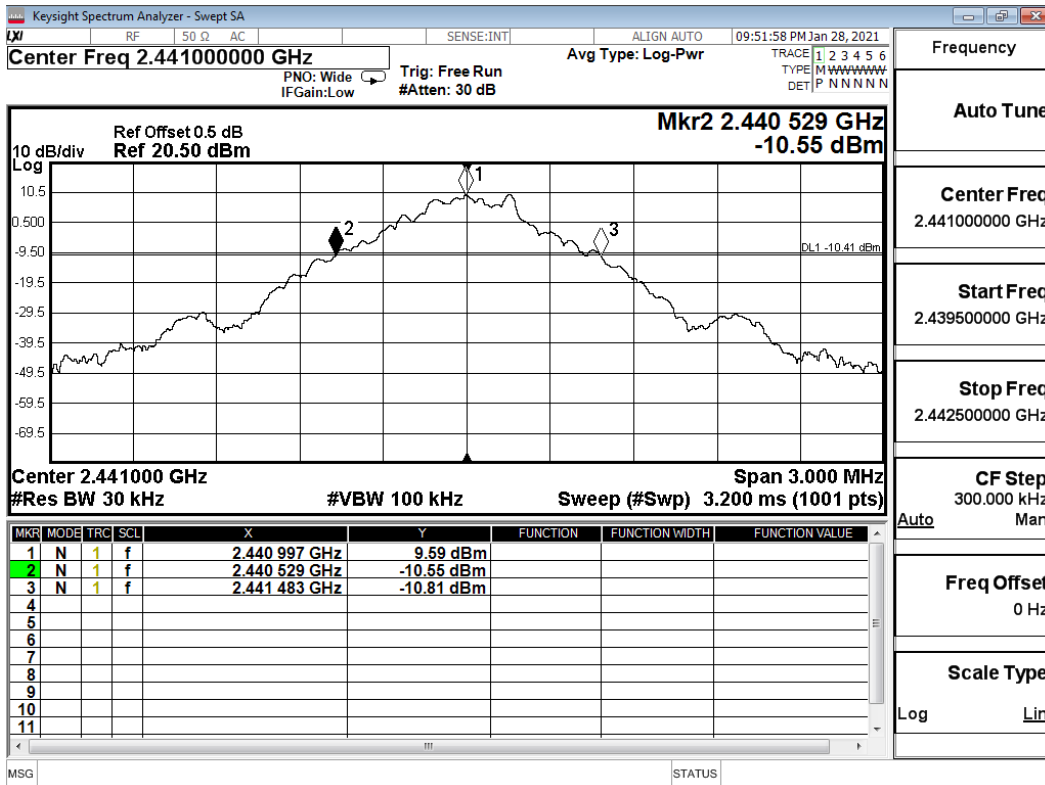


Figure Channel 78:

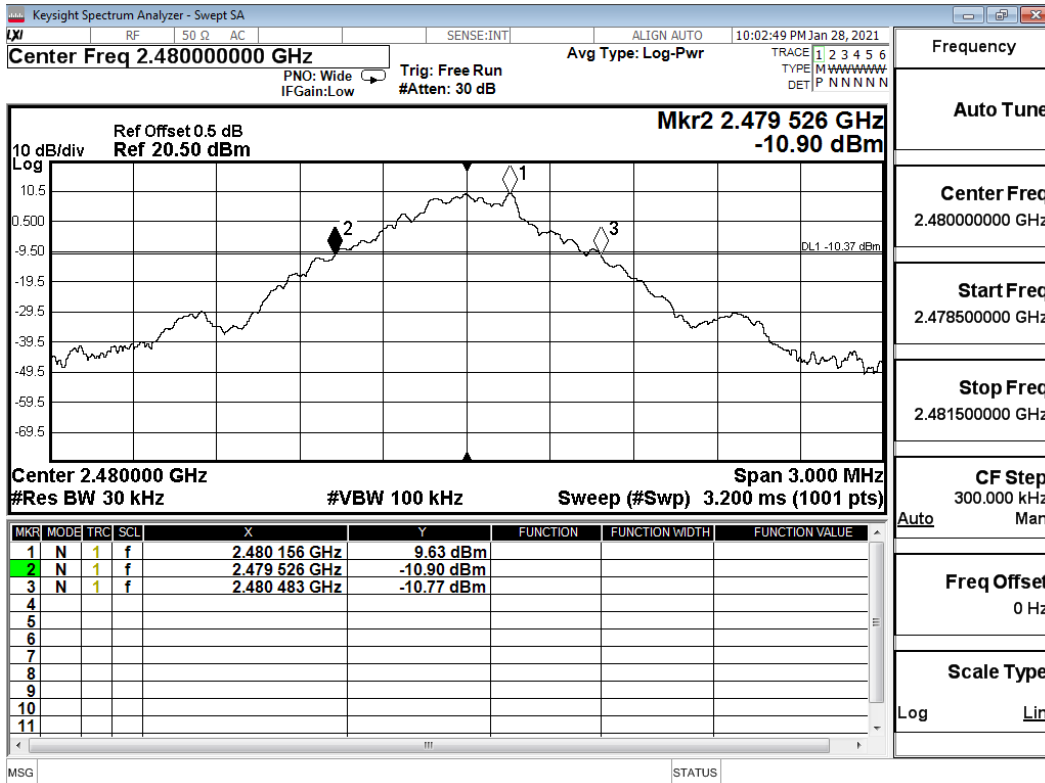

roduct : Notebook
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/26

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1443	--	NA
39	2441	1443	--	NA
78	2480	1446	--	NA

Figure Channel 00:

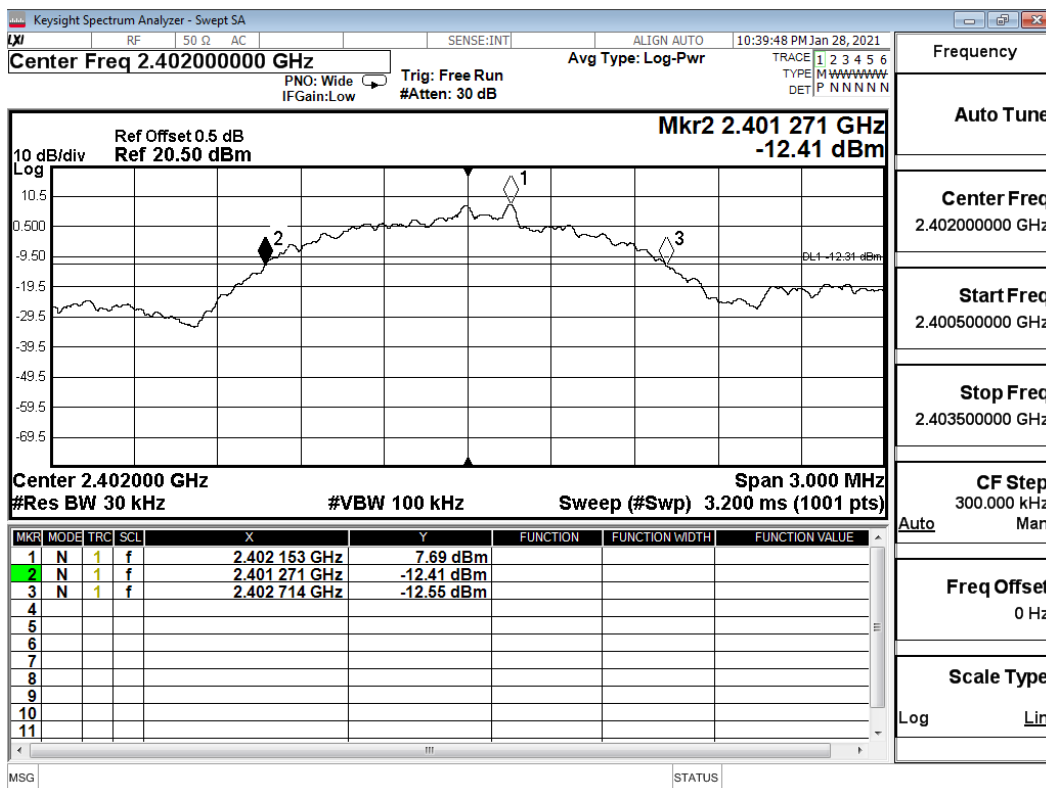


Figure Channel 39:



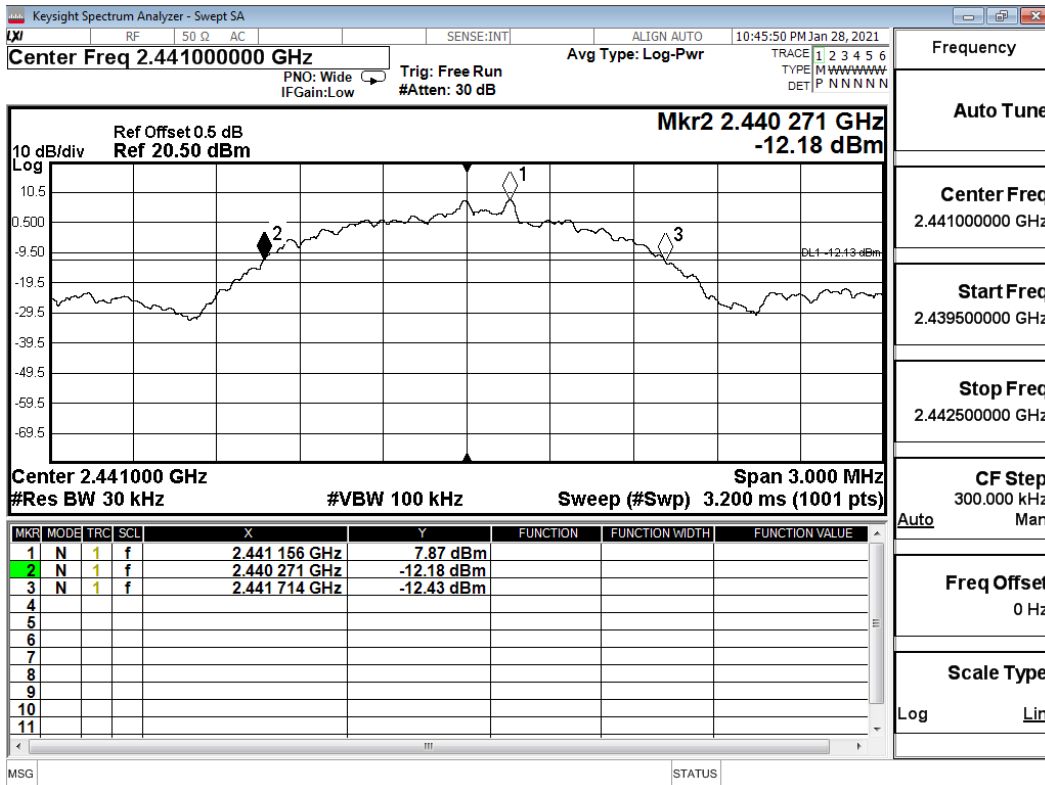


Figure Channel 78:

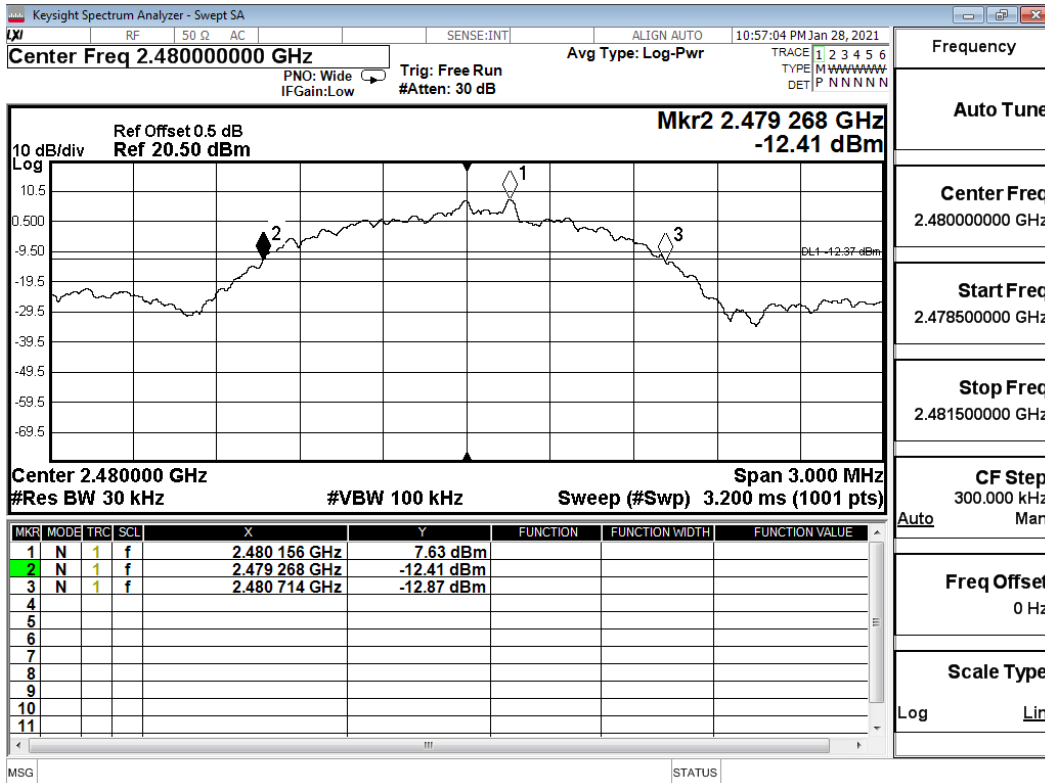

11. Duty Cycle

11.1. Test Setup


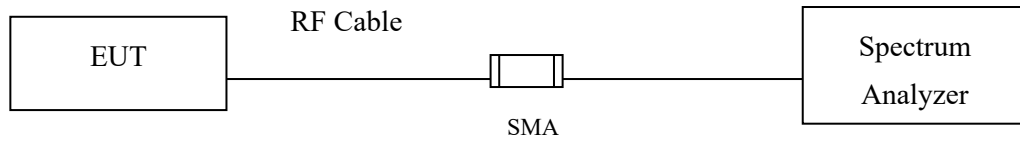


11.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

11.3. Test Result of Duty Cycle

Product : Notebook
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit - 1Mbps

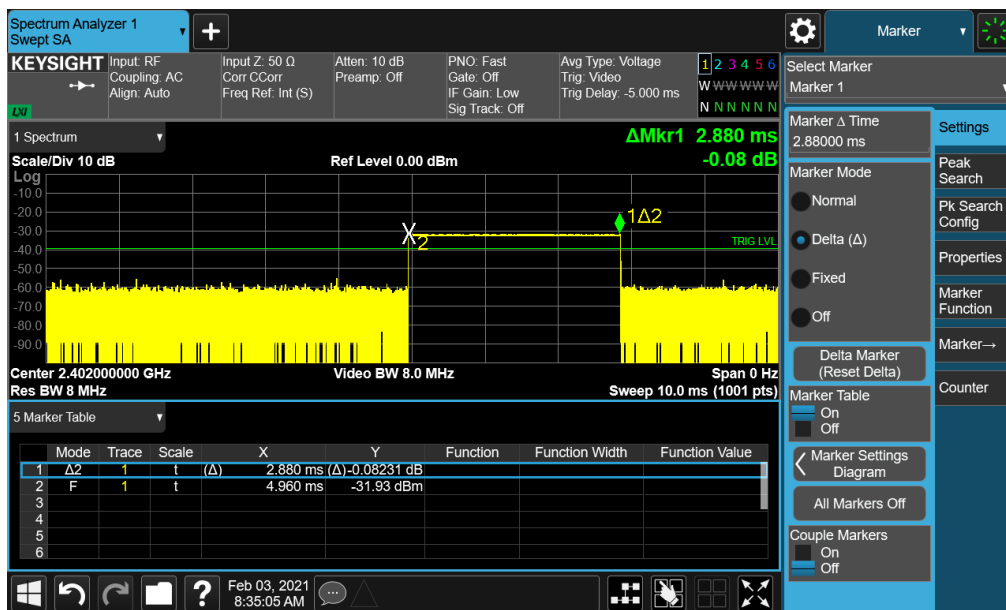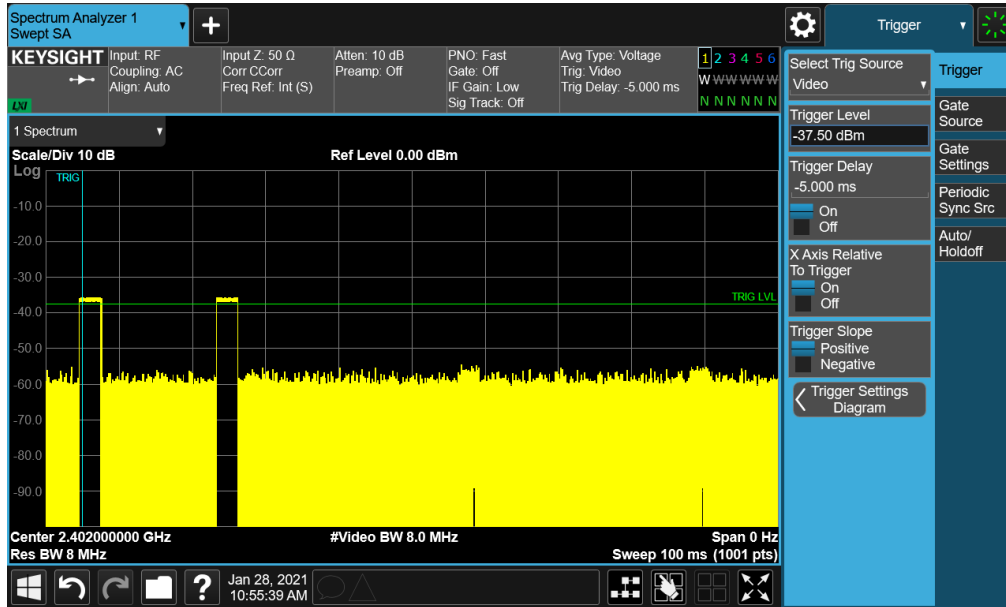



Time on of 100ms=5.760ms

Duty Cycle=5.760ms / 100ms= 0.0576

Duty Cycle correction factor= 20 LOG 0.0576= -24.792 dB

Duty Cycle correction factor	-24.792	dB
------------------------------	---------	----

Product : Notebook
 Test Item : Duty Cycle
 Test Mode : Mode 2: Transmit - 3Mbps

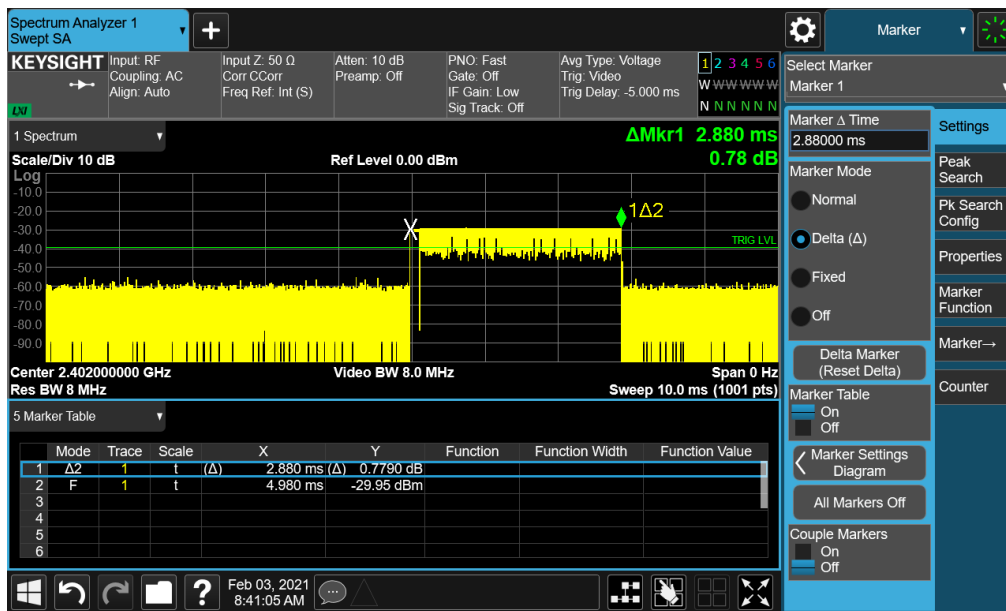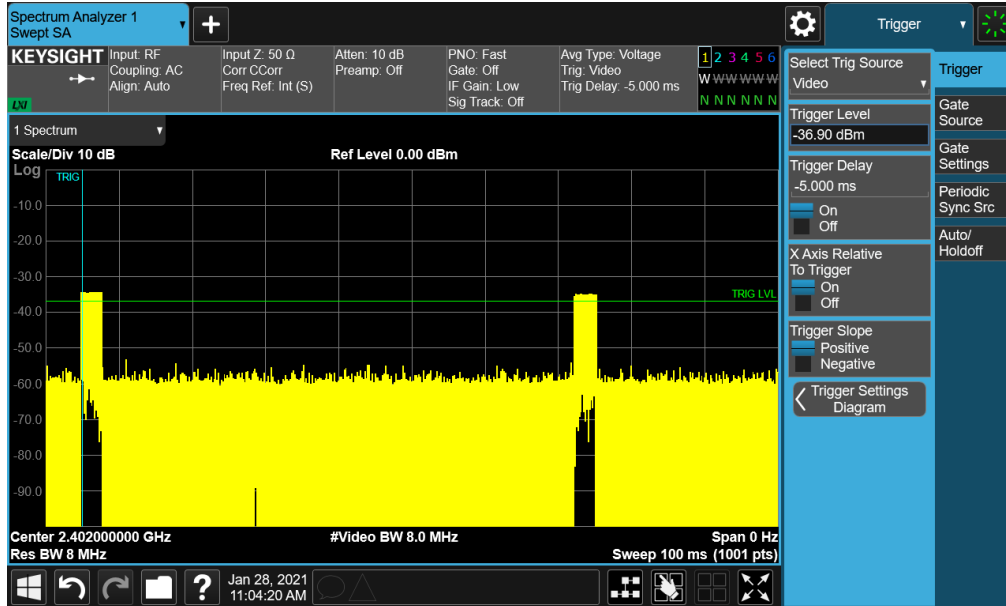

Time on of 100ms=5.760ms

Duty Cycle=5.760ms / 100ms= 0.0576

Duty Cycle correction factor= 20 LOG 0.0576= -24.792 dB

Duty Cycle correction factor	-24.792	dB
------------------------------	---------	----

12. EMI Reduction Method During Compliance Testing

No modification was made during testing.