



Report No.: RZA1107-1251RF01



Part 22


TEST REPORT

Product Name	HSPA+ USB Modem
Model Name	WM3118
FCC ID	WLPWM3118
Client	Shanghai Longcheer 3g Technology Co.,Ltd

TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY

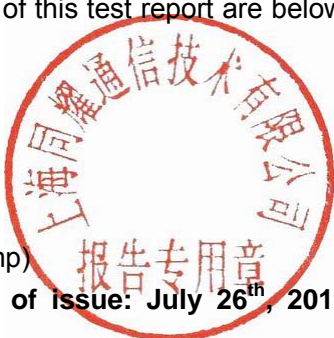Product Name	HSPA+ USB Modem	Model Name	WM3118
FCC ID	WLPWM3118		
Report No.	RZA1107-1251RF01		
Client	Shanghai Longcheer 3g Technology Co.,Ltd		
Manufacturer	Shanghai Longcheer 3g Technology Co.,Ltd		
Reference Standard(s)	<p>FCC CFR47 Part 2 (2010-12) Frequency Allocations And Radio Treaty Matters; General Rules And Regulations</p> <p>FCC CFR 47 Part 22H (2010-12) Public Mobile Services(850MHz)</p> <p>ANSI/TIA-603-C(2004) Land mobile FM or PM Communications Equipment Measurements and Performance Standards.</p>		
Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 2 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <div style="text-align: right;">  (Stamp) Date of issue: July 26th, 2011 </div>		
Comment	The test result only responds to the measured sample.		

Approved by Derek. Yang
Director

Revised by Kain. Xu
OTA Manager

Performed by Walter. Zhu
OTA Engineer

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 3 of 36

TABLE OF CONTENT

1. General Information	4
1.1. Notes of the test report	4
1.2. Testing laboratory	4
1.3. Applicant Information	5
1.4. Manufacturer Information	5
1.5. Information of EUT	6
1.6. Test Date	6
2. Test Information	7
2.1. Summary of test results	7
2.2. RF Power Output	8
2.3. Effective Radiated Power	10
2.4. Occupied Bandwidth	13
2.5. Band Edge Compliance	19
2.6. Frequency Stability	24
2.7. Spurious Emissions at Antenna Terminals	26
2.8. Radiates Spurious Emission	30
3. Main Test Instruments	35
ANNEX A: EUT Appearance and Test Setup	36
A.1 EUT Appearance	36
A.2 Test Setup	36

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electrical report is inconsistent with the printed one, it should be subject to the latter.

1.2. Testing laboratory

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Yang Weizhong
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	http://www.ta-shanghai.com
E-mail:	yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 5 of 36

1.3. Applicant Information

Company: Shanghai Longcheer 3g Technology Co.,Ltd
Address: No.1,Building 5, 299 Bisheng Rd, Zhangjiang Hi-Tech Park, Pudong, Shanghai,
P.R. China
City: Shanghai
Postal Code: 200233
Country: P.R. China
Contact: Xie Fei
Telephone: +86-29-81881999*8100
Fax: +86-29-81882000

1.4. Manufacturer Information

Company: Shanghai Longcheer 3g Technology Co.,Ltd
Address: No.1,Building 5, 299 Bisheng Rd, Zhangjiang Hi-Tech Park, Pudong, Shanghai,
P.R. China
City: Shanghai
Postal Code: 200233
Country: P.R. China
Telephone: +86-29-81881999*8100
Fax: +86-29-81882000

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 6 of 36

1.5. Information of EUT

General information

Name of EUT:	HSPA+ USB Modem		
IMEI :	356360040022848		
Hardware Version:	LQAMG82		
Software Version:	LQA00C1.1.0_MG82		
Antenna Type:	Internal Antenna		
Device Operating Configurations:			
Operating Mode(s):	GSM 850; (tested)		
Test Modulation:	(GSM)GMSK;		
GPRS Multislot Class:	10		
EGPRS Multislot Class:	12		
Maximum E.R.P.	GSM 850: 27.81 dBm		
Power Supply:	Battery or Charger (AC adaptor)		
Rated Power Supply Voltage:	5.0 V		
Extreme Voltage:	Minimum: 4.5 V Maximum: 5.5 V		
Extreme Temperature:	Lowest: -30°C Highest: +50°C		
Test Channel: (Low - Middle - High)	128 – 190 – 251 (GSM 850) (tested)		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824.2 ~ 848.8	869.2 ~ 893.8

Equipment Under Test (EUT) is HSPA+ USB Modem with internal antenna. The EUT is tested GSM 850 in this report.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test is performed from March 28, 2011 to April 2, 2011 and April 22, 2011.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 7 of 36

2. Test Information

2.1. Summary of test results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	22.917	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS

PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

2.2. RF Power Output


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation. These measurements have been tested at following

Test Setup

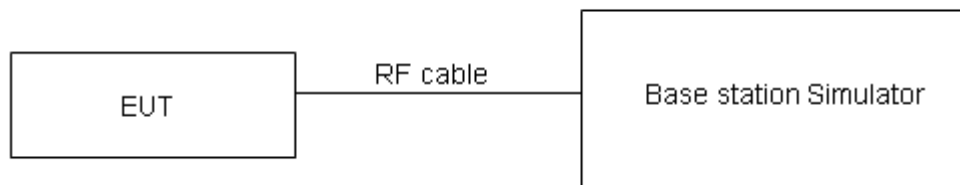

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$. $U = 0.4$ dB.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 9 of 36

Test Results

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GPRS (GMSK)	1TXslot	31.74	31.82	31.83
	2TXslots	29.75	29.85	29.83
EGPRS (GMSK)	1TXslot	31.64	31.7	31.69
	2TXslots	29.67	29.71	29.73
	3TXslots	28.64	28.69	28.67
	4TXslots	25.63	25.7	25.68
EGPRS (8-PSK)	1TXslot	26.30	26.38	26.39
	2TXslots	23.25	23.35	23.37
	3TXslots	21.22	21.31	21.34
	4TXslots	20.19	20.21	20.29

Note:

1) The maximum RF Output Power numbers are marks in bold.

2)The following testing in GPRS/EGPRS is set to 1TXslot based on the maximum RF Output Power.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 10 of 36

2.3. Effective Radiated Power

Ambient condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

The measurement procedures in TIA- 603C are used.

Step 1:

The measurement is carried out in the semi-anechoic chamber. EUT was placed on a 0.8 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used while RBW and VBW are both set to 3MHz. During the measurement, the highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna moved up and down over a range from 1 to 4 meters in both horizontally and vertically polarized orientations. The test setup refers to figure below.

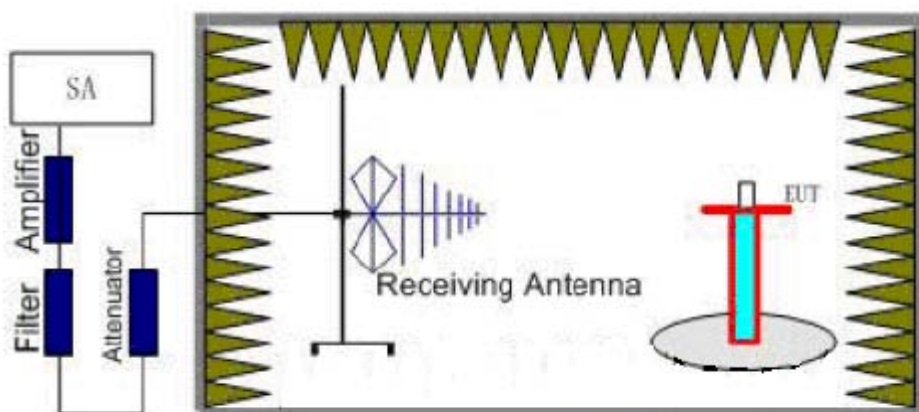

Step 2:


A dipole antenna shall be substituted in place of the EUT. The antenna will be driven by a signal generator with a adjustable S.G. applied through a 30dB amplifier and a Tx cable. Then the Analyzer reading which is equal to LVL is recorded while the antenna was moving up and down. The E.R.P. /E.I.R.P. of the EUT can be calculated through the level of the signal generator, Tx cable loss and the gain of the substitution antenna. The test setup refers to figure below.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 11 of 36

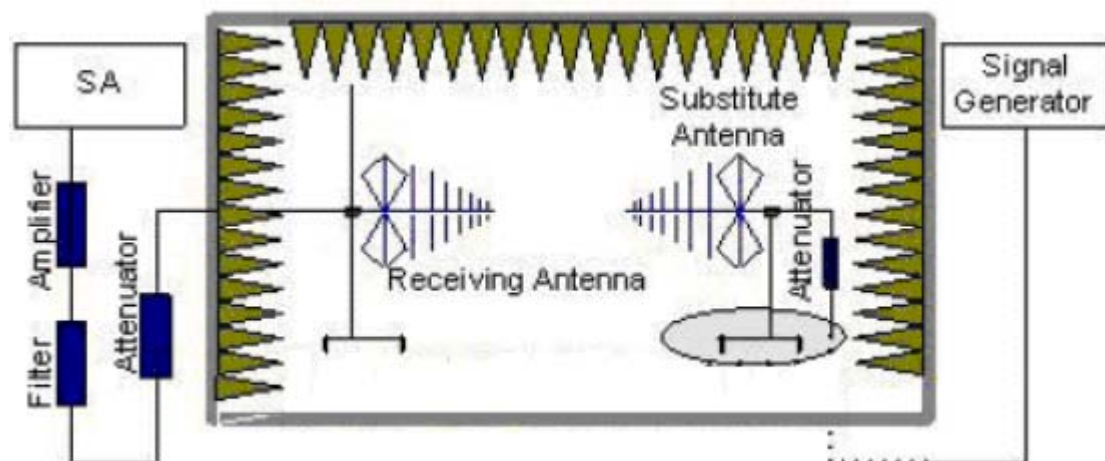

$E.R.P = S.G + 30 - Tx \text{ Cable loss} + \text{Substitution antenna gain} - 2.15$.

$EIRP = E.R.P + 2.15$

Limits

Rule Part 22.913(a) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$. $U = 1.19 \text{ dB}$

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 12 of 36

Test Results: Pass

	Channel	Polarization	LVL(dBm)	SG+30(dBm)	Gain(dBi)	Cable Loss(dBm)	E.R.P.(dBm)
GSM 850 GPRS(GMSK)	128	Vertical	-16.84	44.07	1.06	15.17	27.81
	190	Vertical	-17.67	43.18	1.24	15.2	27.07
	251	Vertical	-17.38	43.53	1.38	15.24	27.52
GSM 850 EGPRS(GMSK)	128	Vertical	-16.94	43.96	1.06	15.17	27.7
	190	Vertical	-17.64	43.21	1.24	15.2	27.1
	251	Vertical	-17.51	43.4	1.38	15.24	27.39
GSM 850 EGPRS(8-PSK)	128	Vertical	-25.49	37.65	1.06	15.17	21.39
	190	Vertical	-22.94	37.9	1.24	15.2	21.79
	251	Vertical	-25.96	38	1.38	15.24	21.99

Note: 1. E.R.P = S.G+30. - Tx Cable loss + Substitution antenna gain – 2.15.

2. EIRP= E.R.P+2.15

2.4. Occupied Bandwidth


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz, VBW is set to 10kHz for GSM 850. 99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

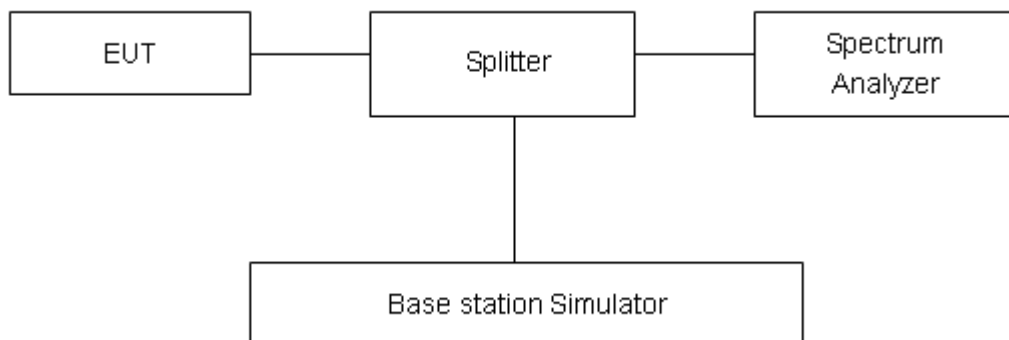

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$. $U = 624\text{Hz}$.

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RZA1107-1251RF01

Page 14 of 36

Test Result

	Channel	Frequency (MHz)	99% Power Bandwidth (kHz)	-26dBc Bandwidth(kHz)
GSM 850 GPRS(GMSK)	128	824.2	241.8337	314.318
	190	836.6	245.7370	317.210
	251	848.8	244.8664	313.607
GSM 850 EGPRS(GMSK)	128	824.2	244.7966	318.403
	190	836.6	245.8232	316.000
	251	848.8	244.9753	311.992
GSM 850 EGPRS(8-PSK)	128	824.2	240.9427	296.277
	190	836.6	246.9776	298.837
	251	848.8	243.7939	305.550

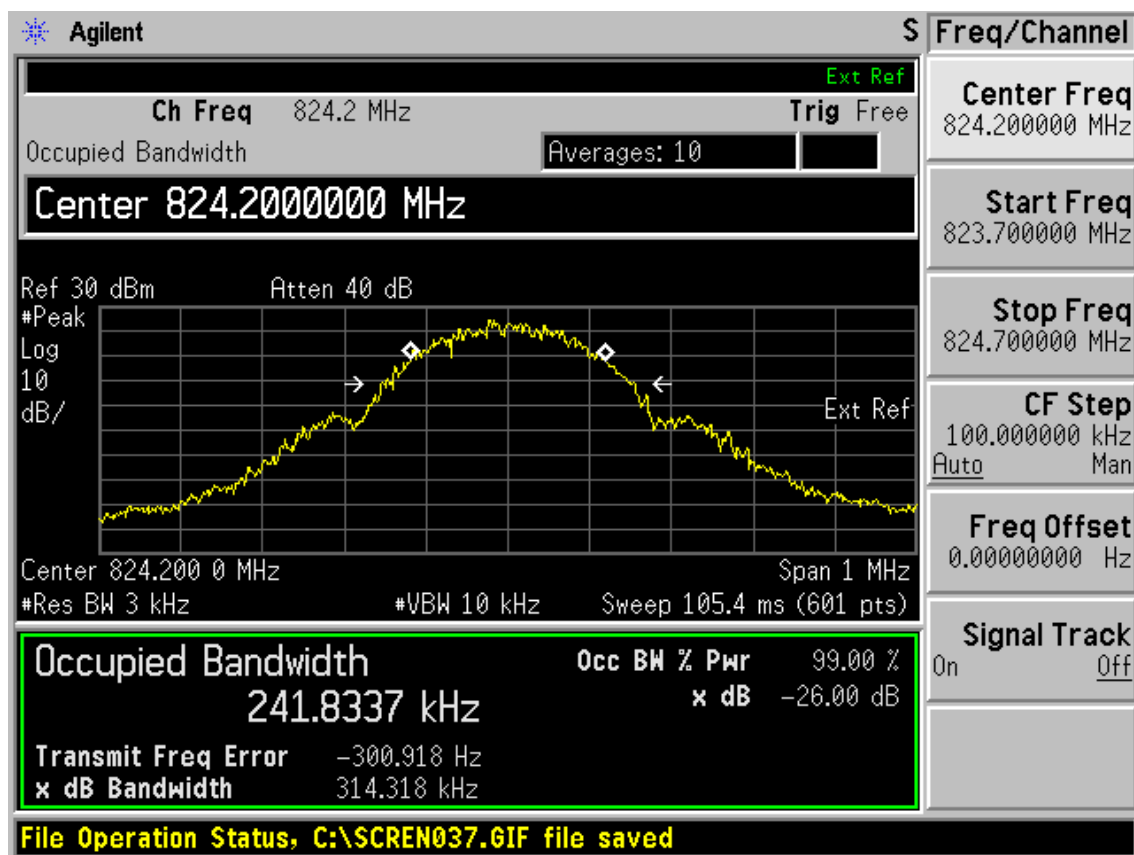


GSM 850 GPRS CH128 Occupied Bandwidth


TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 15 of 36

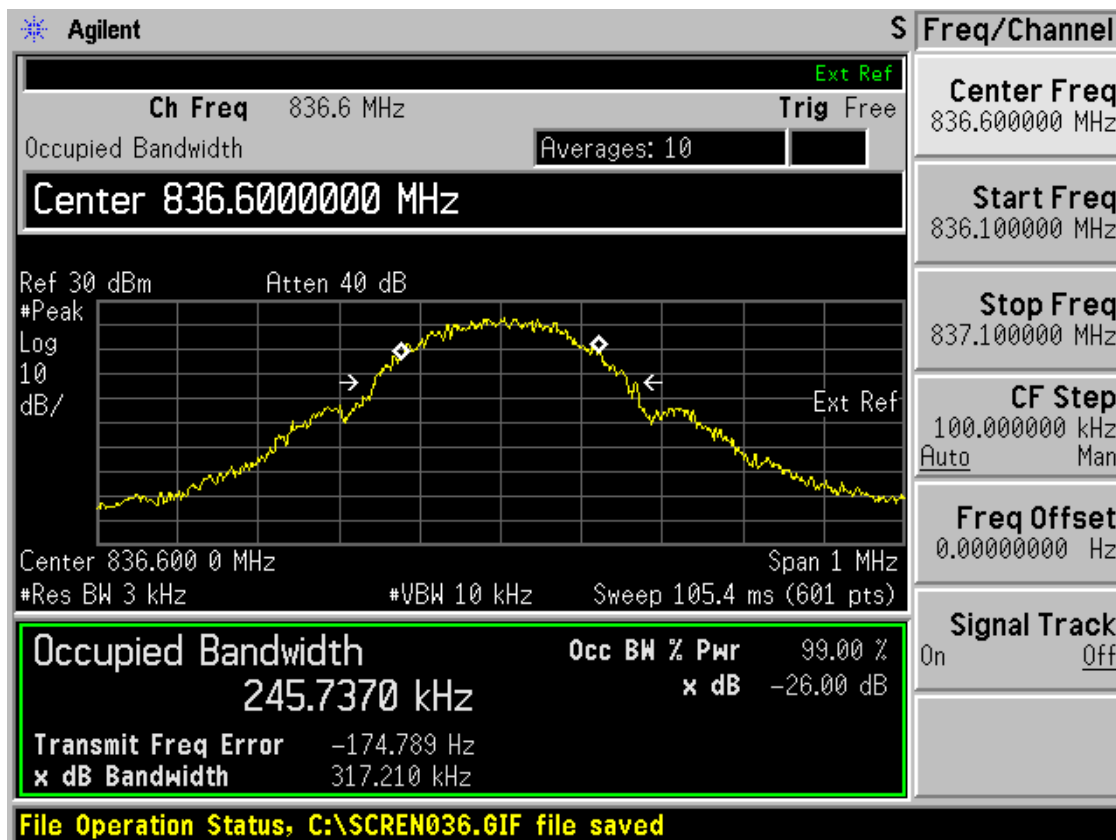

GSM 850 GPRS CH190 Occupied Bandwidth

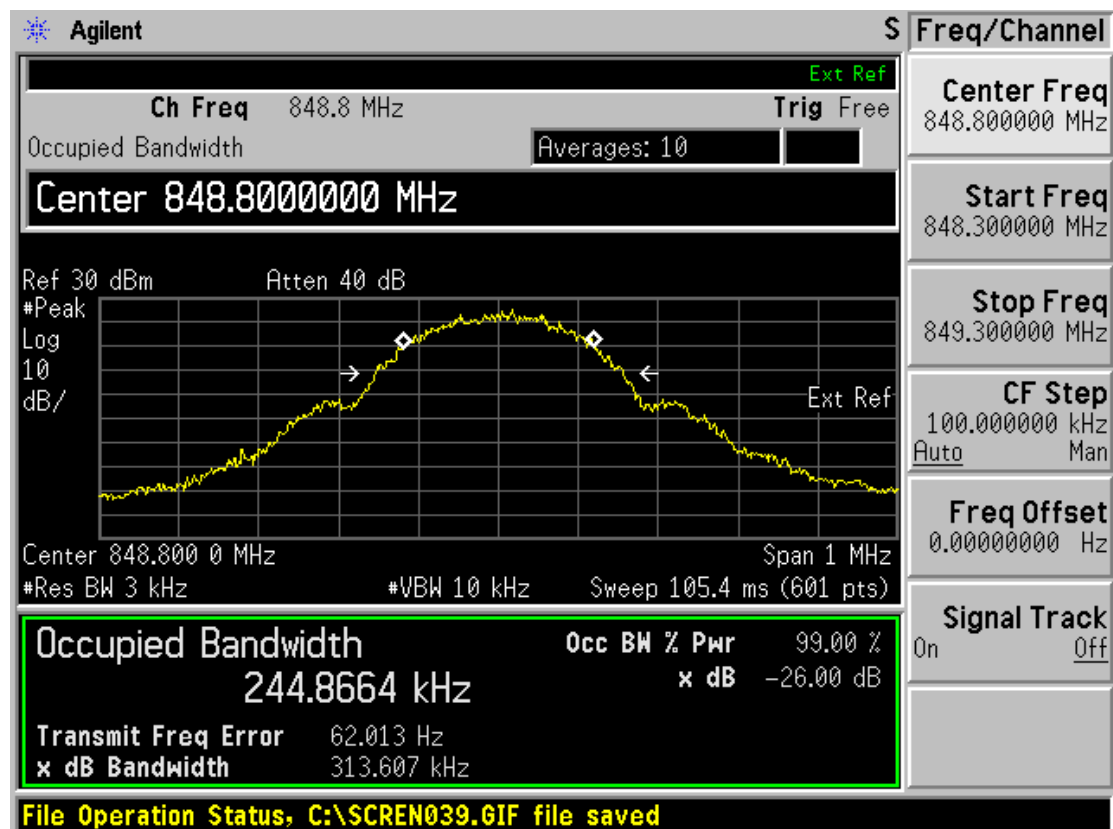


GSM 850 GPRS CH251 Occupied Bandwidth


TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 16 of 36

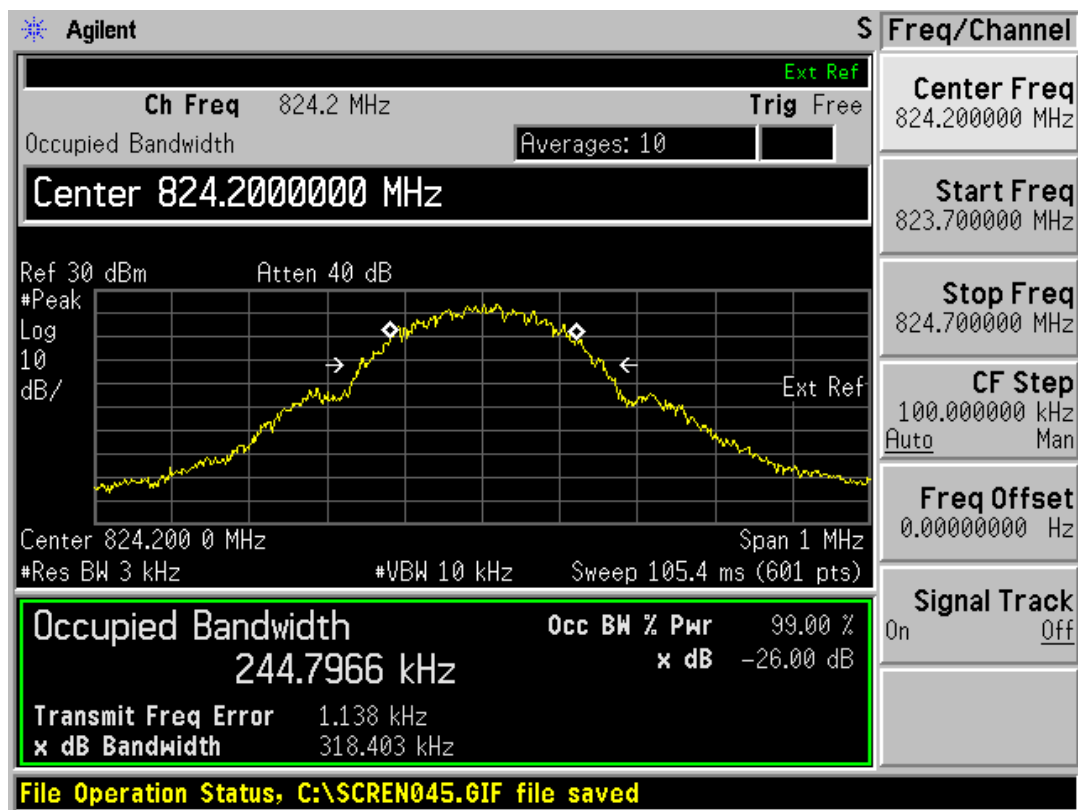

GSM 850 EGPRS(GMSK) CH128 Occupied Bandwidth

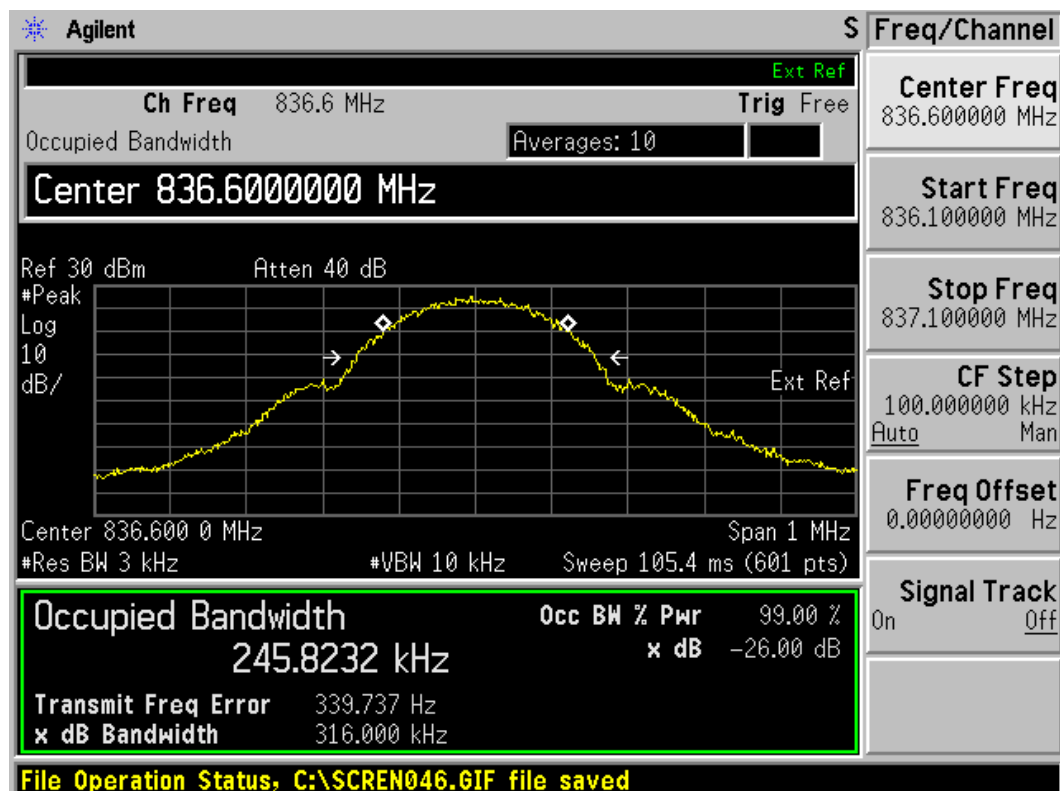


GSM 850 EGPRS(GMSK) CH190 Occupied Bandwidth


TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1107-1251RF01

Page 17 of 36

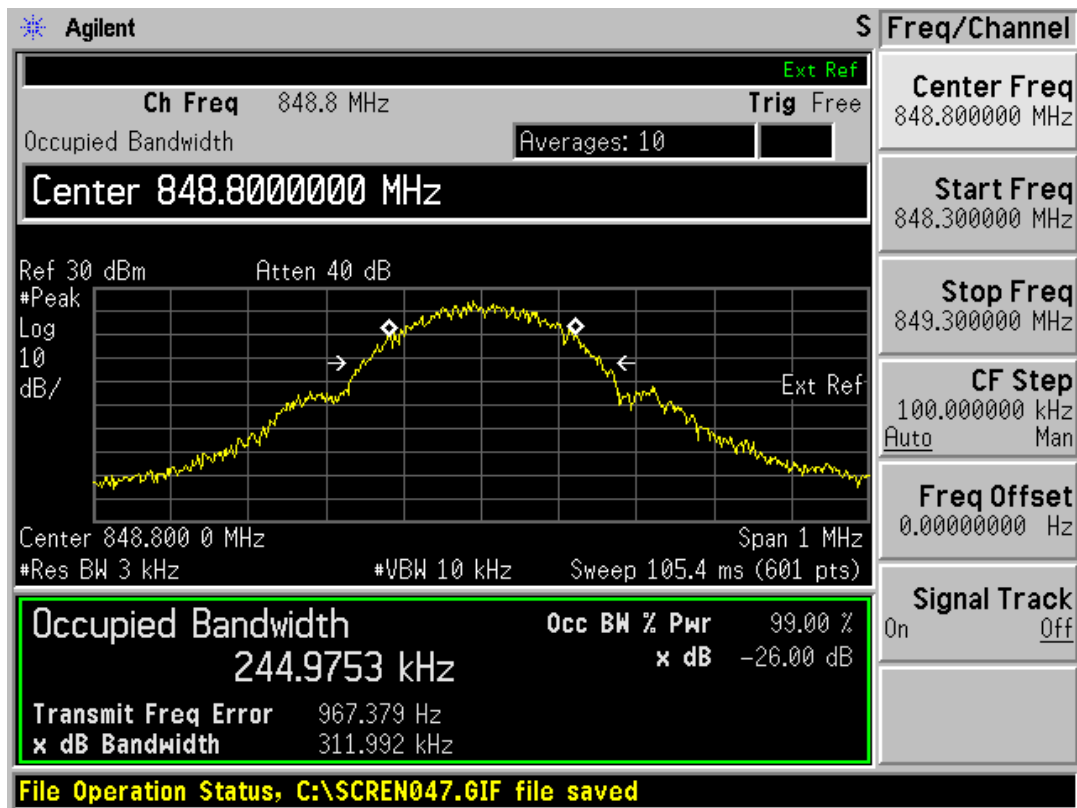

GSM 850 EGPRS(GMSK) CH251 Occupied Bandwidth

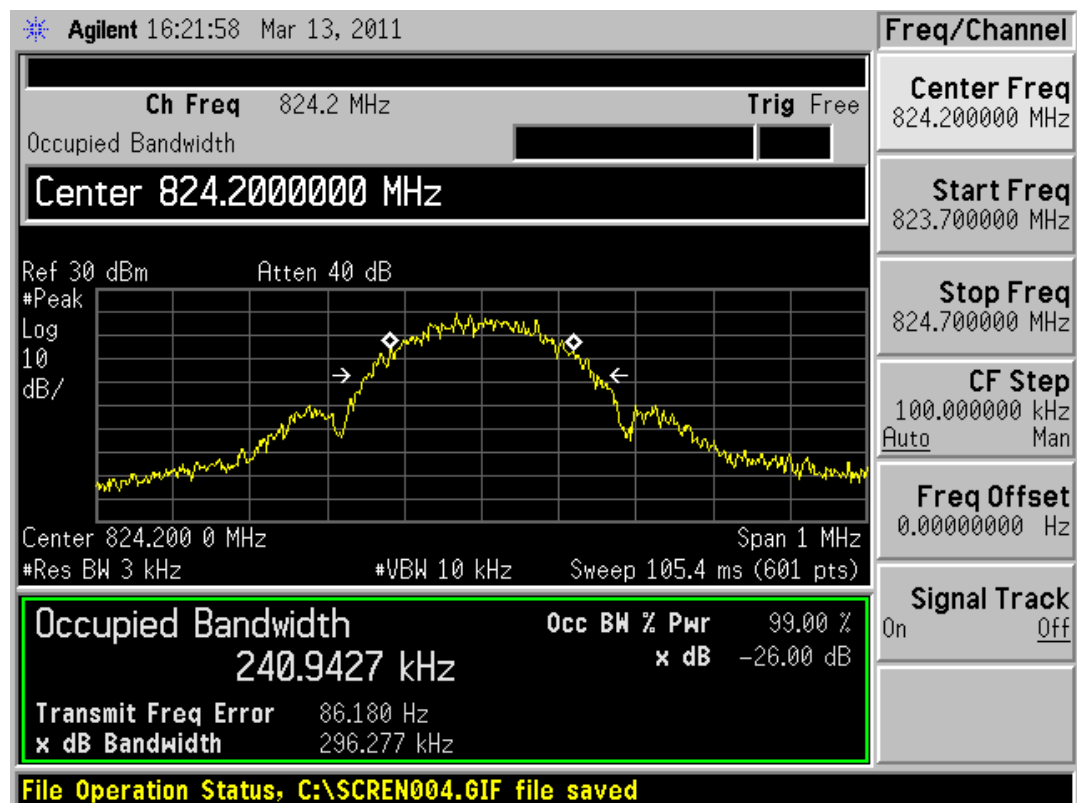


GSM 850 EGPRS(8-PSK) CH128 Occupied Bandwidth


TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1107-1251RF01

Page 18 of 36

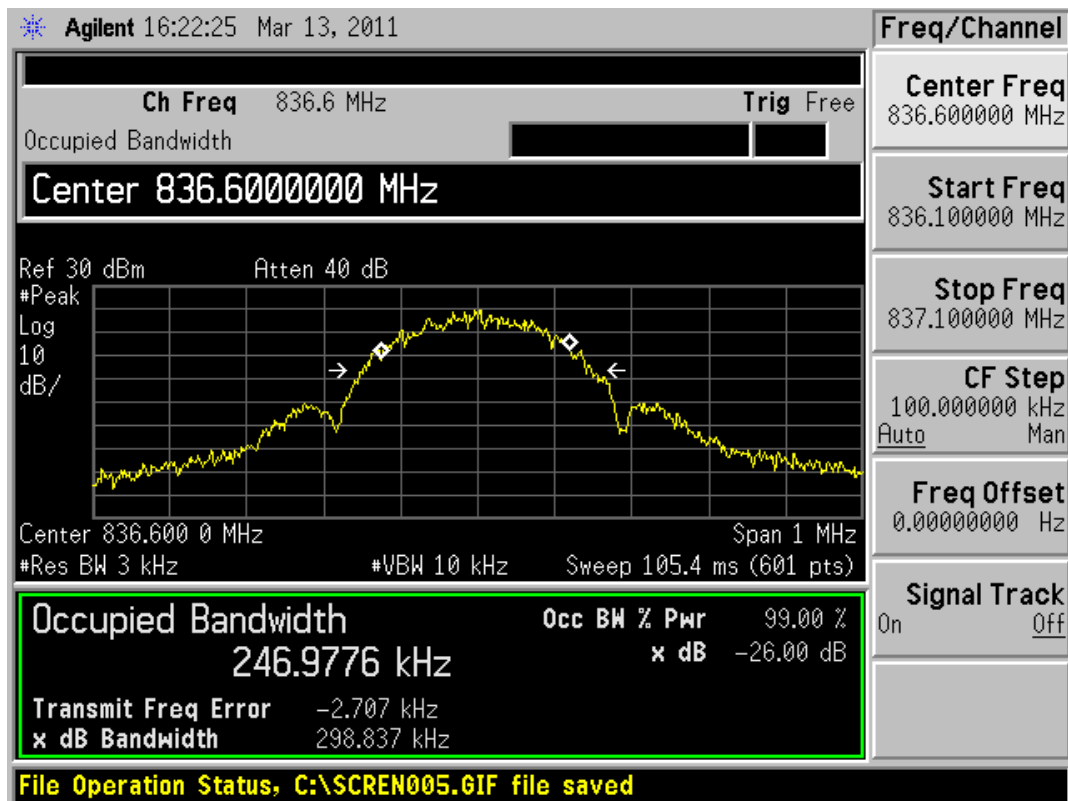

GSM 850 EGPRS(8-PSK) CH190 Occupied Bandwidth

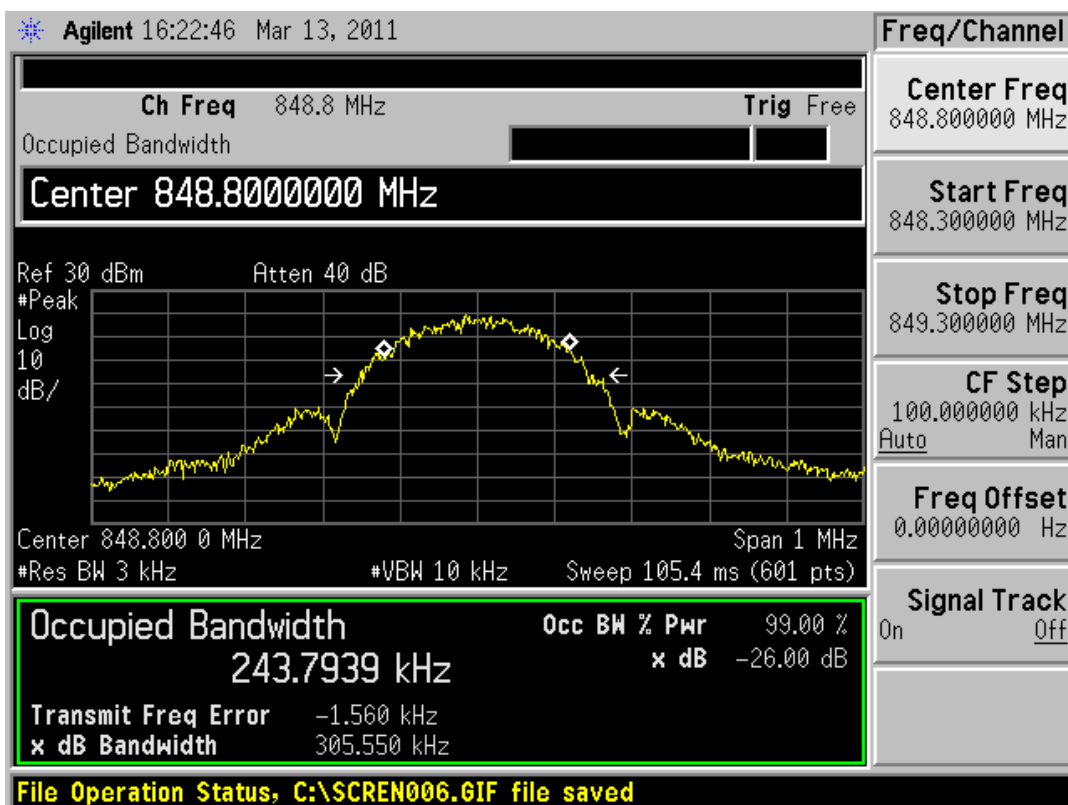

GSM 850 EGPRS(8-PSK) CH251 Occupied Bandwidth

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 19 of 36

2.5. Band Edge Compliance


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to 3kHz, VBW is set to 10kHz for GSM 850. Spectrum analyzer plots are included on the following pages.

Test Setup

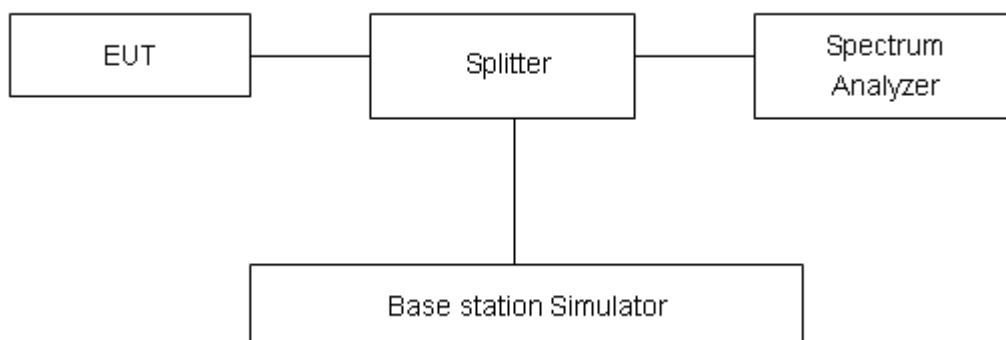

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 0.684$ dB.

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RZA1107-1251RF01

Page 20 of 36

Test Result:

	Frequency (MHz)	Reference value (dBm)	Limit	Conclusion
GSM 850 GPRS(GMSK)	823.98	-16.66	-13	PASS
	849.02	-14.40	-13	PASS
GSM 850 EGPRS(GMSK)	823.99	-16.24	-13	PASS
	849.02	-16.59	-13	PASS
GSM 850 EGPRS(8-PSK)	823.98	-24.57	-13	PASS
	849.02	-25.31	-13	PASS

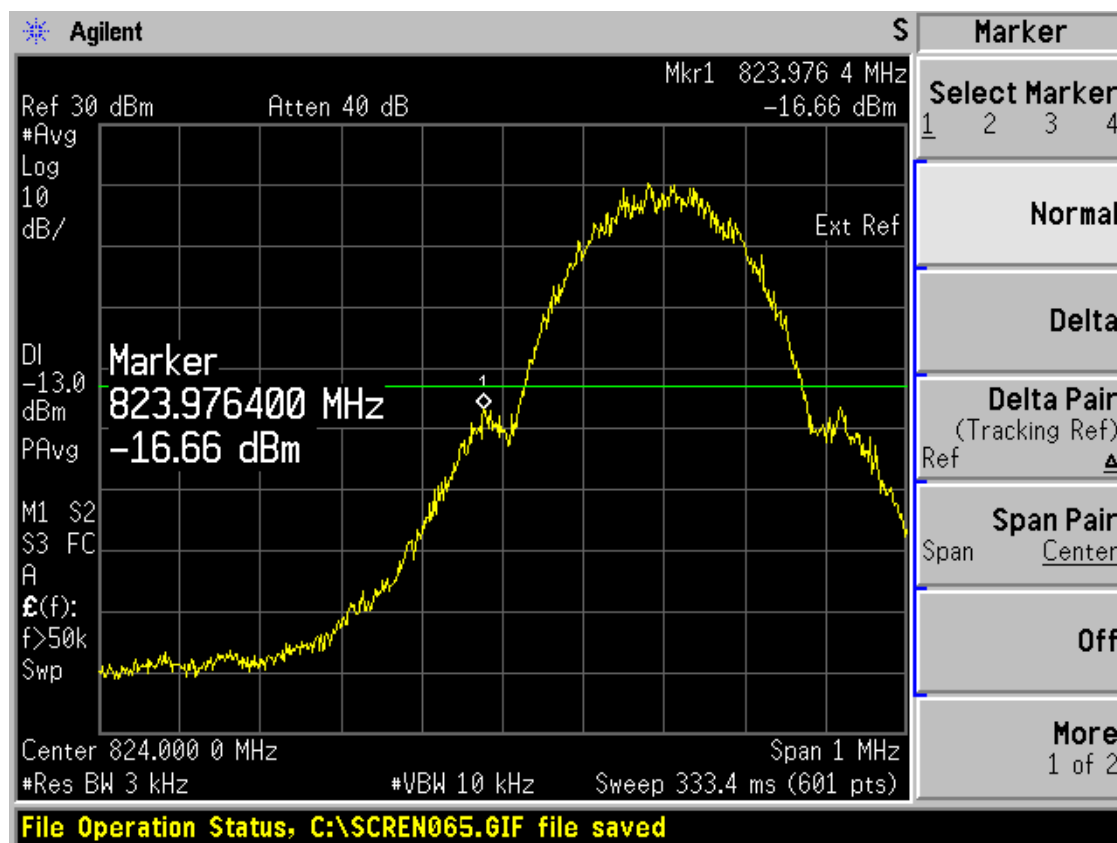


GSM 850 GPRS 128 Channel


TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 21 of 36

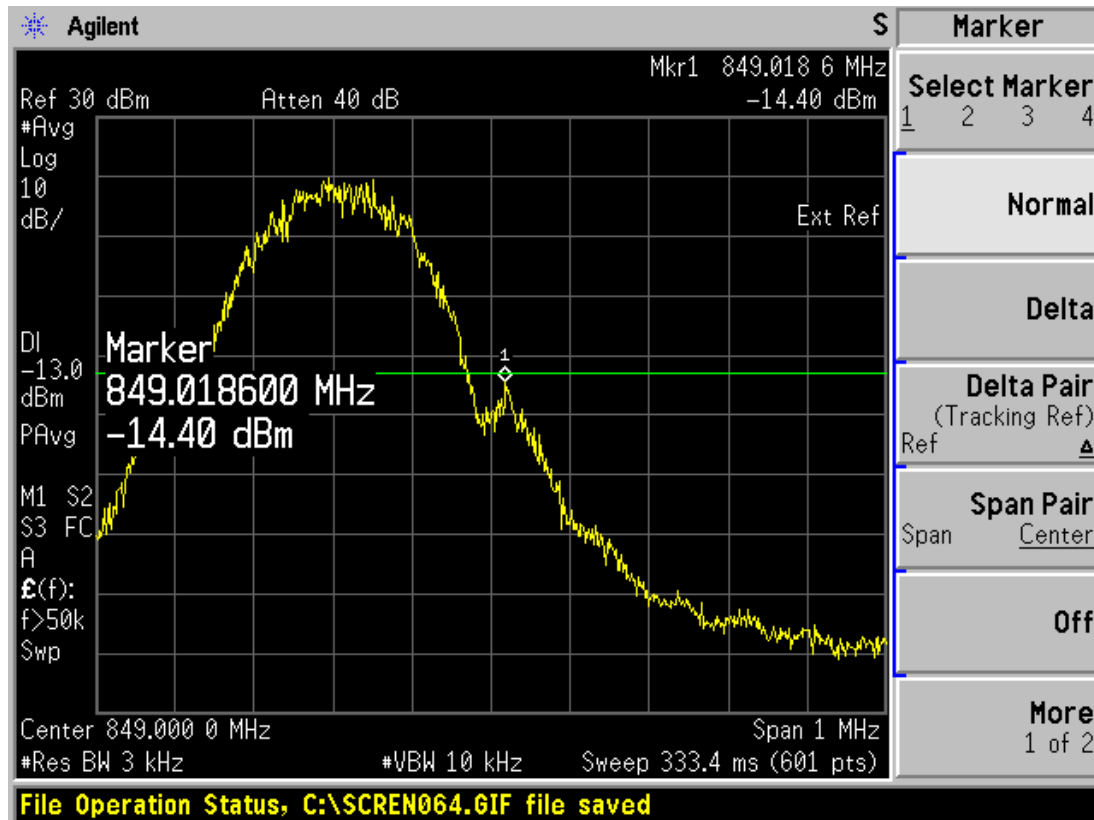

GSM 850 GPRS 251 Channel

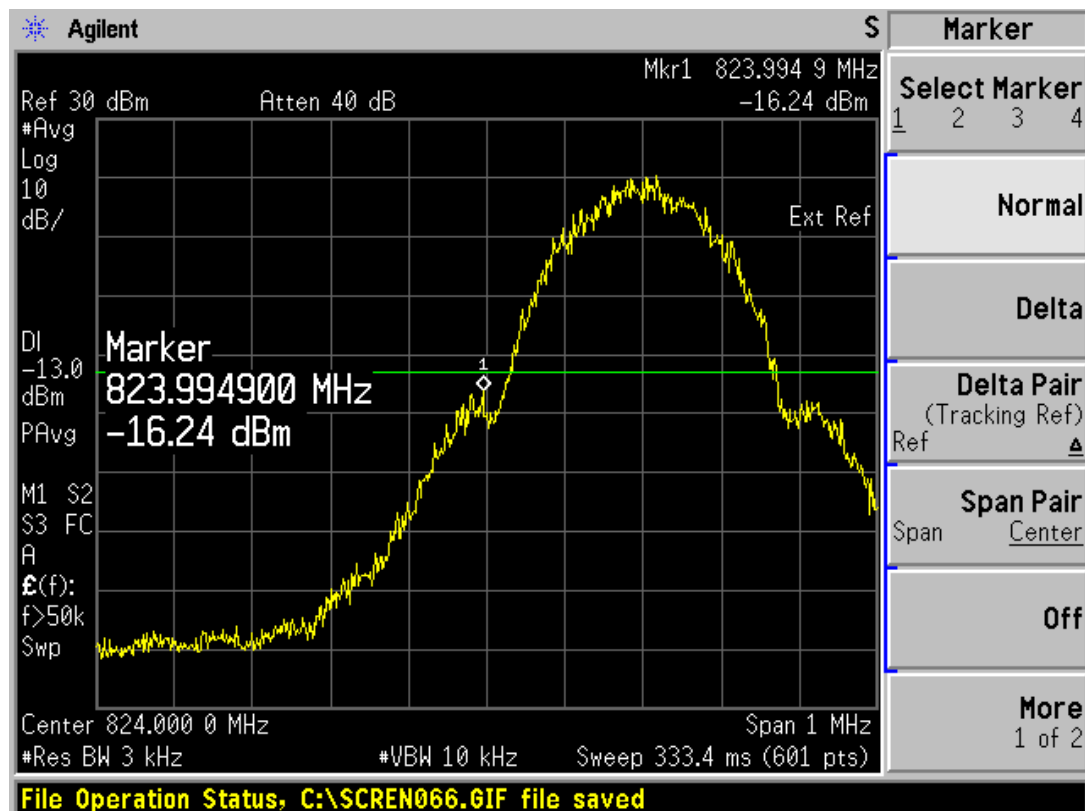


GSM 850 EGPRS(GMSK) 128 Channel


TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 22 of 36

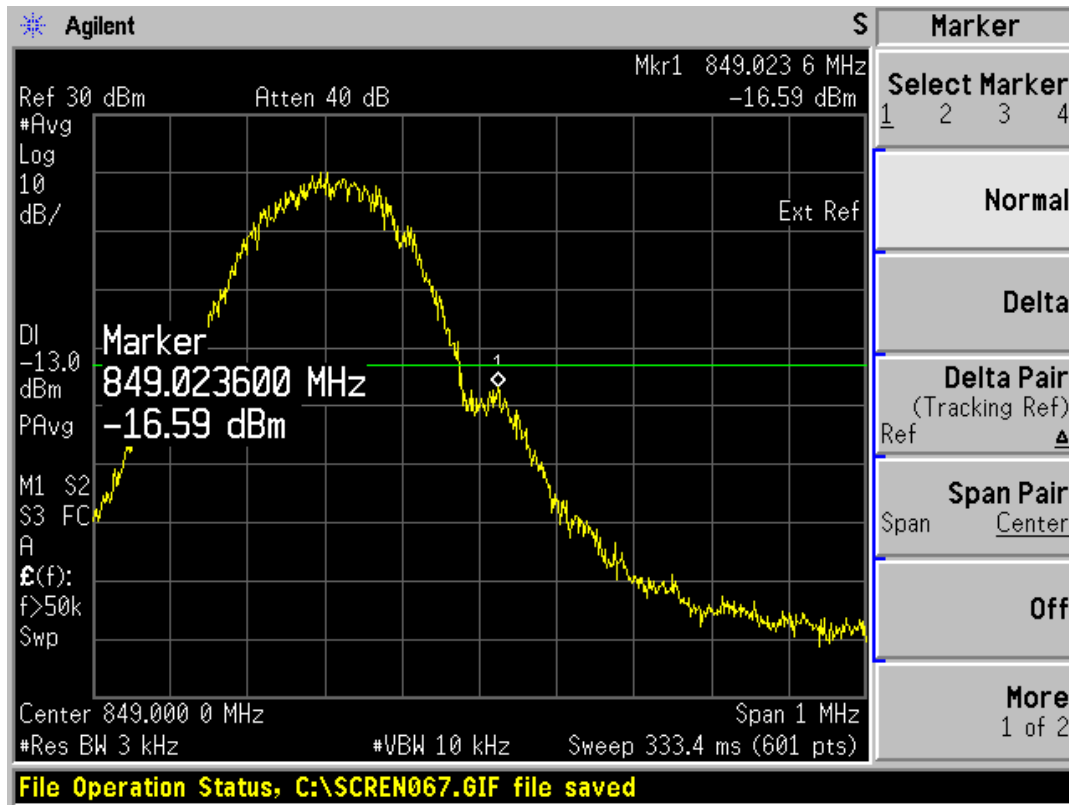

GSM 850 EGPRS(GMSK) 251 Channel

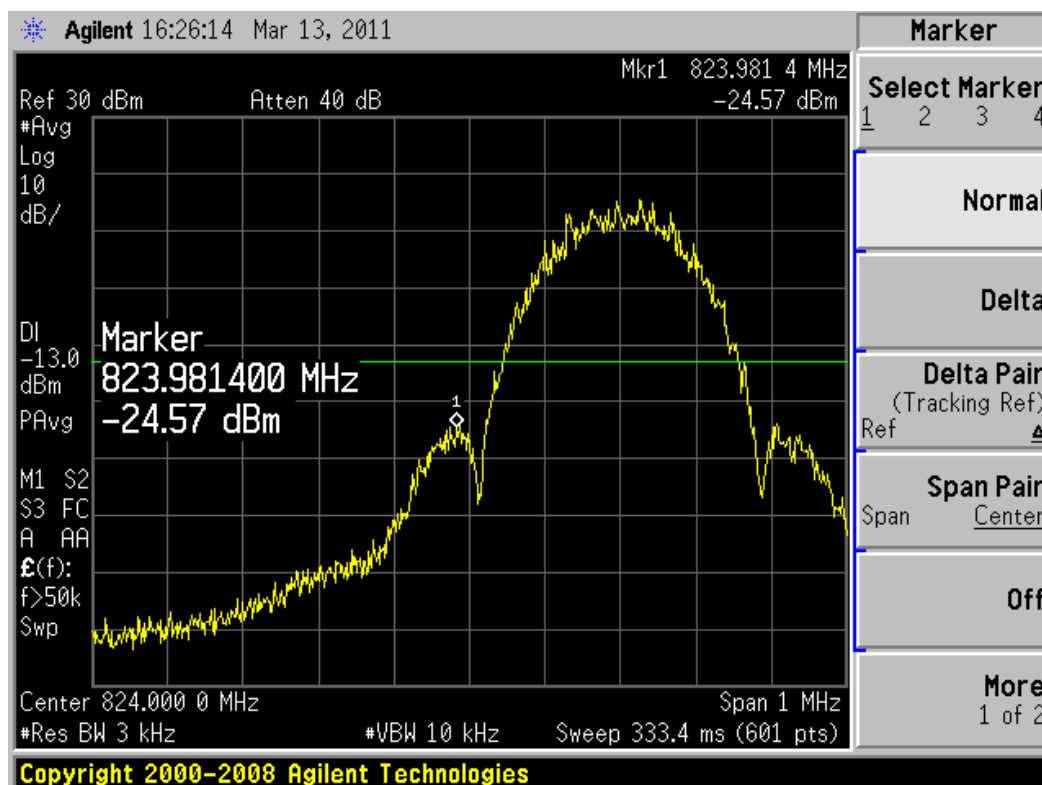


GSM 850 EGPRS(8-PSK) 128 Channel

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 23 of 36

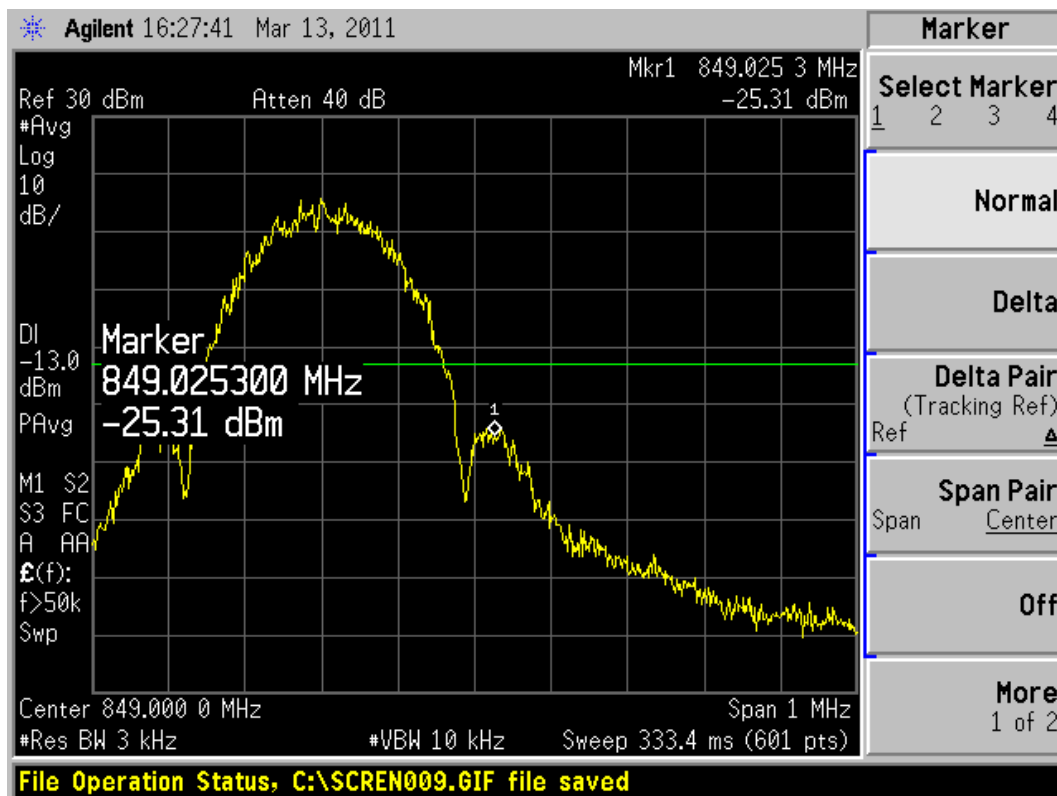

GSM 850 EGPRS(8-PSK) 251 Channel

2.6. Frequency Stability

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 4.5 V and 5.5 V, with a nominal voltage of 5.0 V.

Test setup

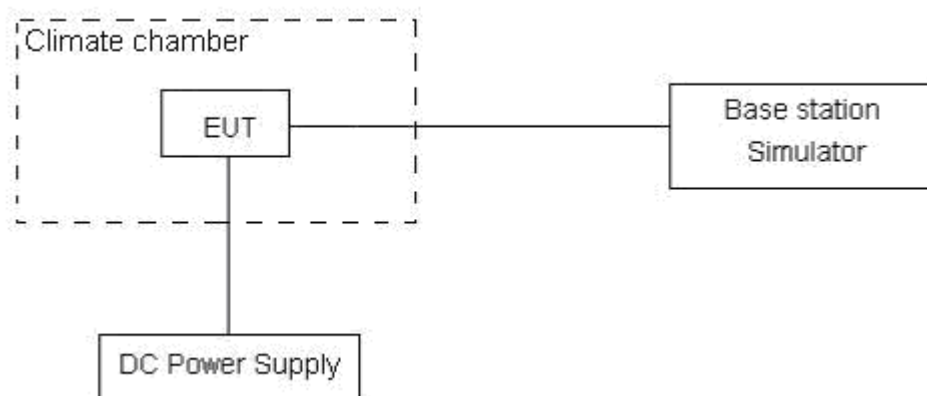

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 25 of 36

Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency from the base station.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$. $U = 0.01\text{ppm}$.

Test Result

GSM 850

Temperature (°C)	Test Results (ppm) / 5.0 V Power supply
	Channel 190
-30	0.03027
-20	0.03145
-10	0.02736
0	0.02740
10	0.02994
20	0.03053
30	0.03251
40	0.03348
50	0.03005

Voltage (V)	Test Results(ppm) / 20°C
	Channel 190
4.5	0.02157
5.0	0.03053
5.5	0.03140

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 26 of 36

2.7. Spurious Emissions at Antenna Terminals


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. For GSM 850, RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

Test setup

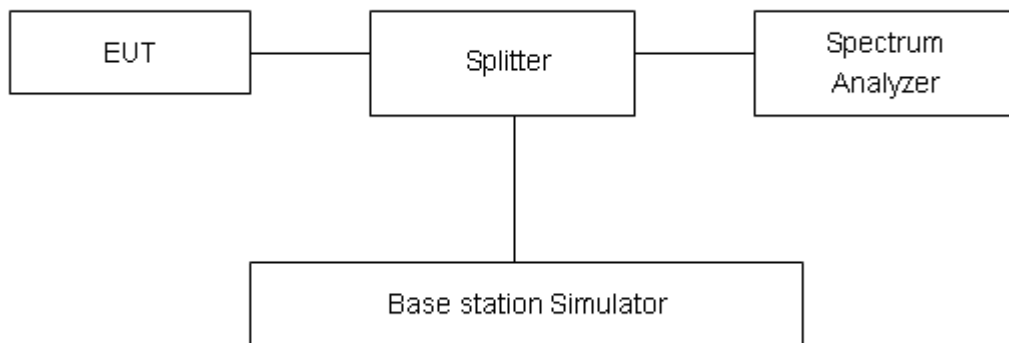

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75 % confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-12.75GHz	1.407 dB

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RZA1107-1251RF01

Page 27 of 36

Test Result

GSM 850 CH128

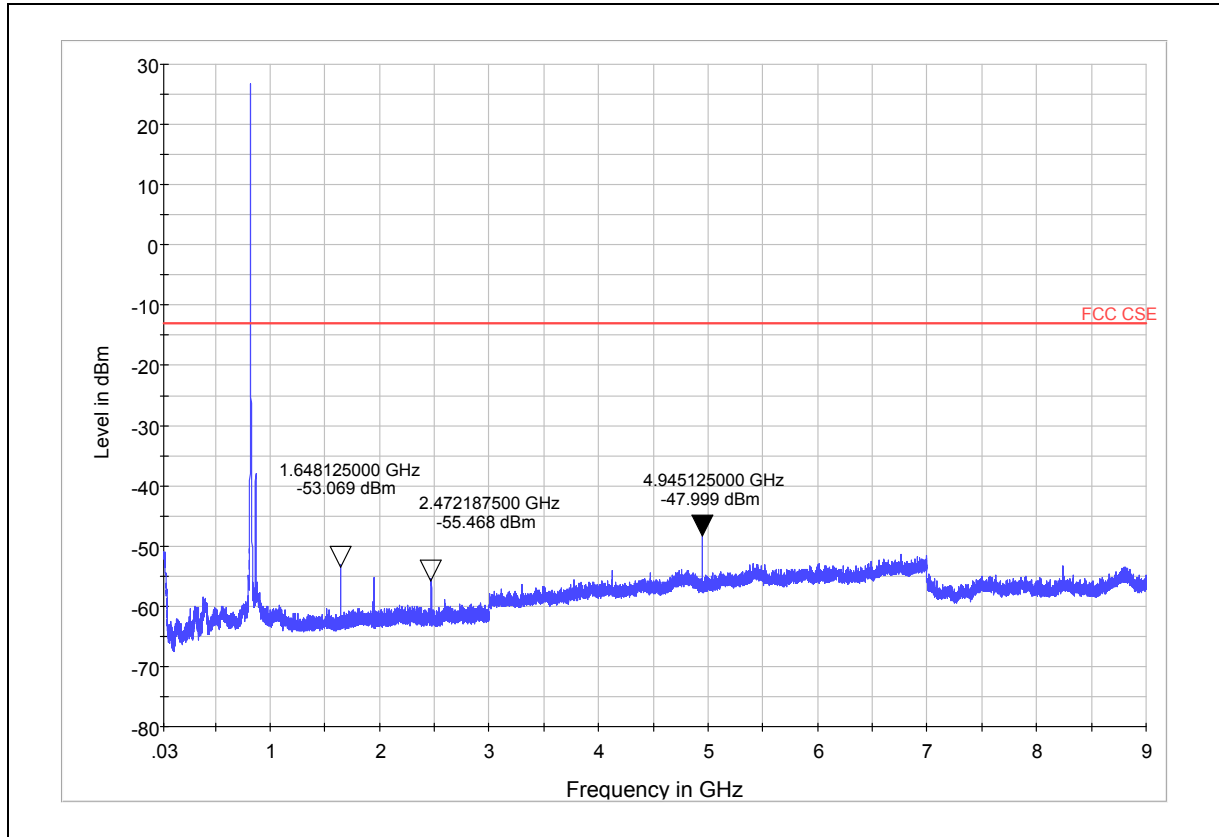

Note: The signal beyond the limit is carrier
GSM 850 128 Channel 30MHz~9GHz

Harmonic	TX ch.128 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	1648.1	-53.07	-13	40.07
3	2472.2	-55.47	-13	42.47
4	3296.8	Nf	-13	/
5	4121	Nf	-13	/
6	4945.1	-48.00	-13	35.00
7	5769.4	Nf	-13	/
8	6593.6	Nf	-13	/
9	7417.8	Nf	-13	/
10	8242	Nf	-13	/
Nf: noise floor				

Note: The other Spurious RF conducted emissions level is no more than noise floor.


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 28 of 36

GSM 850 CH190

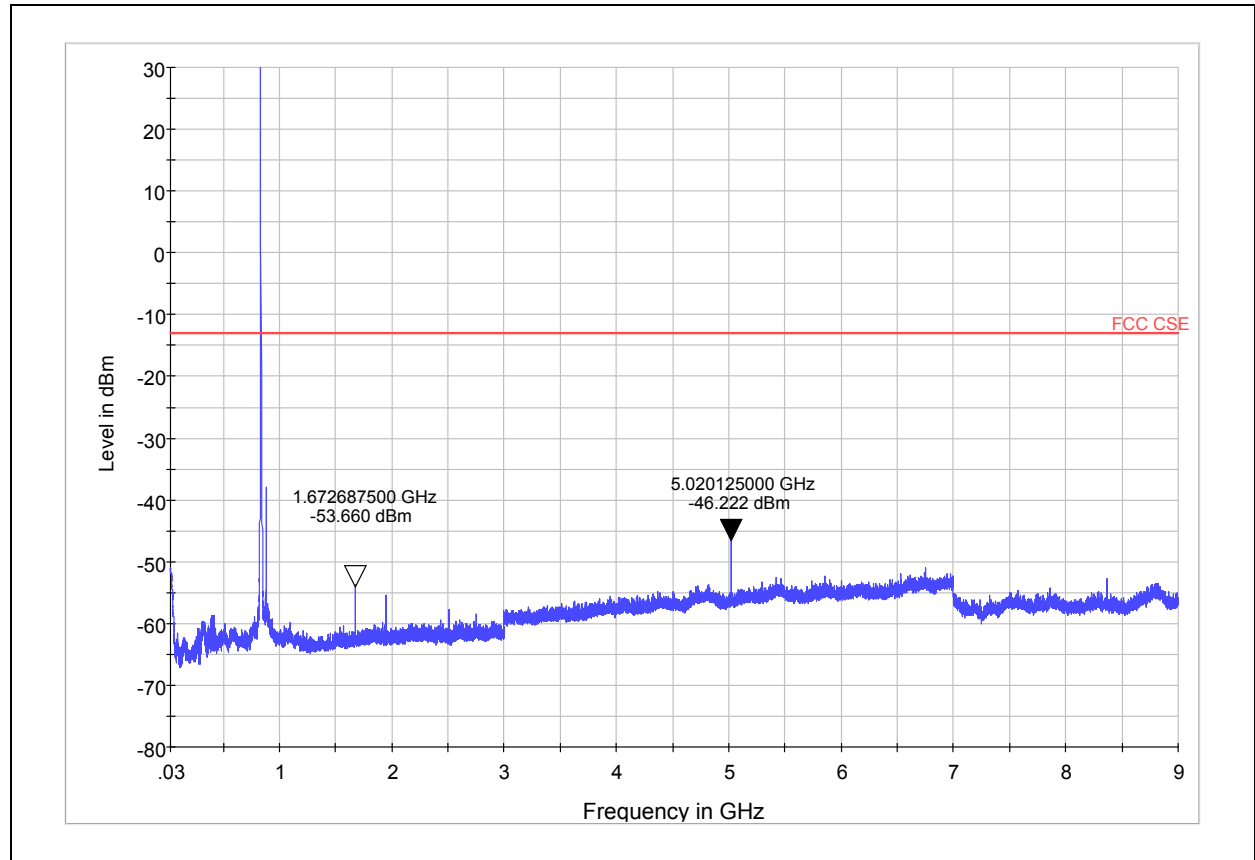

Note: The signal beyond the limit is carrier
GSM 850 190 Channel 30MHz~9GHz

Harmonic	TX ch.190 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	1672.7	-53.66	-13	40.66
3	2509.8	Nf	-13	/
4	3346.4	Nf	-13	/
5	4183	Nf	-13	/
6	5020.1	-46.22	-13	33.22
7	5856.2	Nf	-13	/
8	6692.8	Nf	-13	/
9	7529.4	Nf	-13	/
10	8366	Nf	-13	/
Nf: noise floor				

Note: The other Spurious RF conducted emissions level is no more than noise floor.


TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 29 of 36

GSM 850 CH251

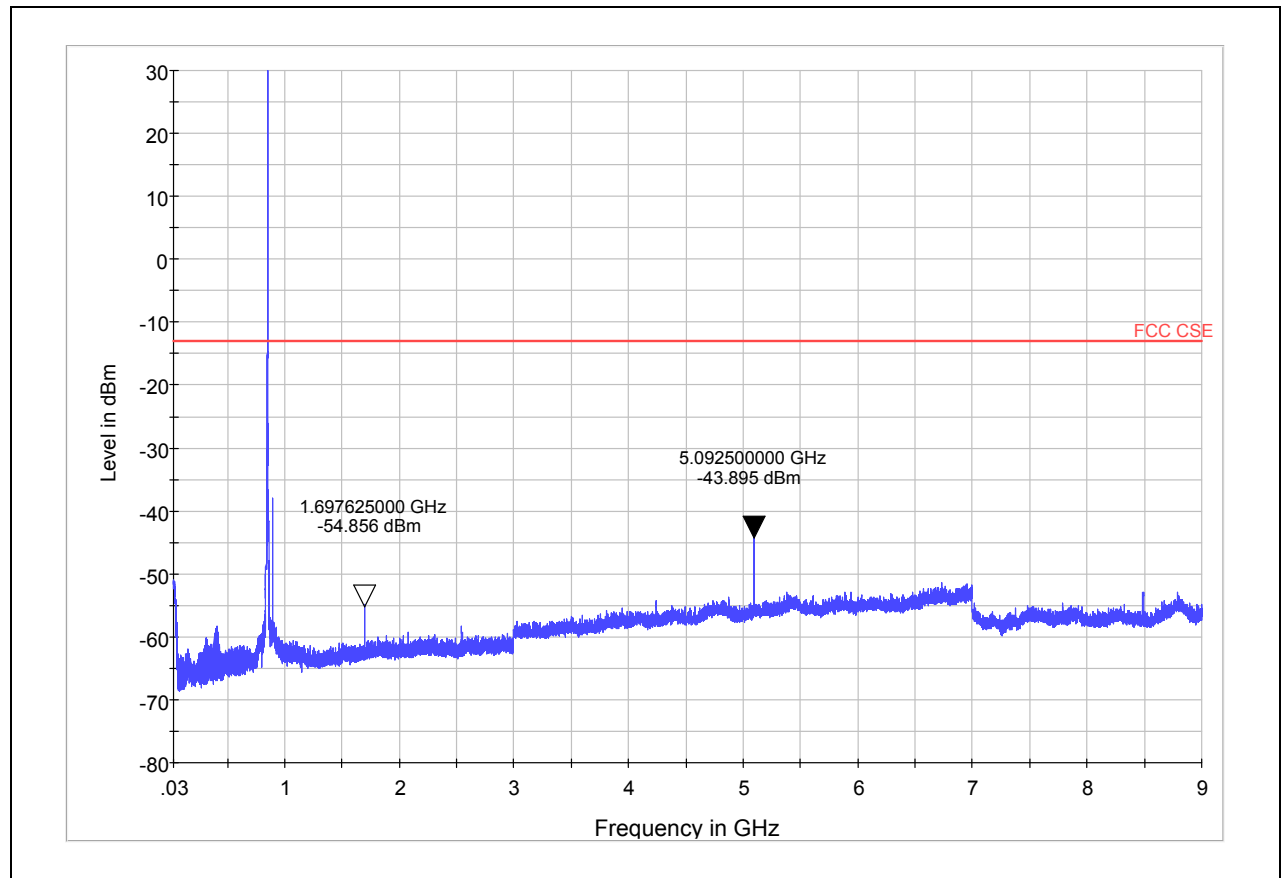

Note: The signal beyond the limit is carrier
GSM 850 251 Channel 30MHz~9GHz

Harmonic	TX ch.251 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	1697.6	-54.86	-13	41.86
3	2546.4	Nf	-13	/
4	3395.2	Nf	-13	/
5	4244	Nf	-13	/
6	5092.5	-43.90	-13	30.90
7	5941.6	Nf	-13	/
8	6790.4	Nf	-13	/
9	7639.2	Nf	-13	/
10	8488	Nf	-13	/
Nf: noise floor				

Note: The other Spurious RF conducted emissions level is no more than noise floor.

2.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement


The measurements procedures in TIA -603C are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment.

The procedure of Radiates Spurious Emission is as follows:

Step 1:

The measurement is carried out in the full-anechoic chamber.. EUT was placed on a 0.8 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used while RBW and VBW are both set to 3MHz. During the measurement, the highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna moved up and down over a range from 1 to 4 meters in both horizontally and vertically polarized orientations. The test setup refers to figure below.

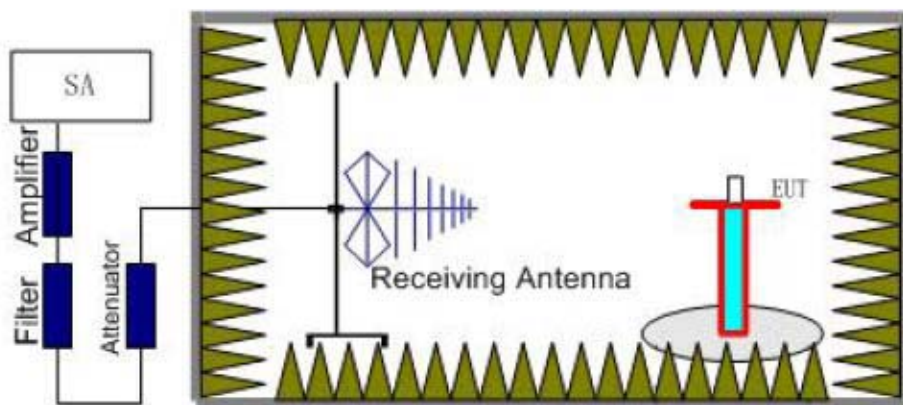


Step 2:

A dipole antenna shall be substituted in place of the EUT. The antenna will be driven by a signal generator with a adjustable S.G. applied through a Tx cable. Adjust the level of the signal generator output until the value of the receiver reach the previously recorded analyzer power level (LVL). Then The E.R.P. /E.I.R.P. of the EUT can be calculated through the level of the signal generator, Tx cable loss and the gain of the substitution antenna. The test setup refers to figure below.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 31 of 36

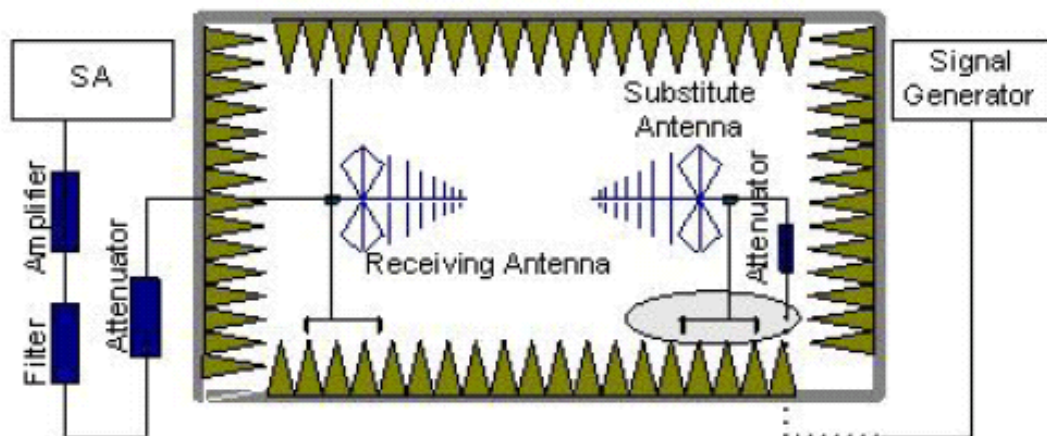

$E.R.P \text{ (peak power)} = S.G. - Tx \text{ Cable loss} + \text{Substitution antenna gain} - 2.15.$

$EIRP = E.R.P + 2.15$

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the antenna is vertical.

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.16$ dB.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 32 of 36

Test Result

GSM 850 CH128

Harmonic	TX ch.128 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1648.5	-48.3	10.15	16.1	-56.40	-13	43.40	180
3	2472.6	/	/	/	Nf	-13	/	/
4	3296.8	/	/	/	Nf	-13	/	/
5	4233.4	-36.33	11.35	17.2	-44.33	-13	31.33	135
6	4945.5	-34.72	11.95	17.4	-42.32	-13	29.32	135
7	5769.8	-40.12	13.55	17.6	-46.32	-13	33.32	180
8	6593.6	/	/	/	Nf	-13	/	/
9	7417.8	/	/	/	Nf	-13	/	/
10	8242	/	/	/	Nf	-13	/	/
Nf: noise floor								

Note: The other Spurious RF Radiated emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 33 of 36

GSM 850 CH190

Harmonic	TX ch.190 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.1	-48.84	16.1	10.75	-56.34	-13	43.34	180
3	2509.8	/	/	/	Nf	-13	/	/
4	3346.4	/	/	/	Nf	-13	/	/
5	4245.8	-37.32	17.2	11.15	-45.52	-13	32.52	180
6	5019.0	-36.04	17.4	11.95	-43.64	-13	30.64	135
7	5856.8	-39.6	17.6	13.55	-45.80	-13	32.80	225
8	6692.8	/	/	/	Nf	-13	/	/
9	7529.4	/	/	/	Nf	-13	/	/
10	8366	/	/	/	Nf	-13	/	/
Nf: noise floor								

Note: The other Spurious RF Radiated emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1107-1251RF01

Page 34 of 36

GSM 850 CH251

Harmonic	TX ch.251 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1697.6	-51.05	16.1	10.75	-56.4	-13	43.4	180
3	2546.4	/	/	/	Nf	-13	/	/
4	3395.2	/	/	/	Nf	-13	/	/
5	4244	/	/	/	Nf	-13	/	/
6	5092.8	-39.83	17.4	11.95	-45.28	-13	32.28	180
7	5941.6	/	/	/	Nf	-13	/	/
8	6790.4	/	/	/	Nf	-13	/	/
9	7639.2	/	/	/	Nf	-13	/	/
10	8488	/	/	/	Nf	-13	/	/
Nf: noise floor								

Note: The other Spurious RF Radiated emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1107-1251RF01

Page 35 of 36

3. Main Test Instruments

No.	Name	Type	Manufacturer	Serial Number	Calibration Date	Valid Period
01	Base Station Simulator	CMU200	R&S	118133	2010-05-27	One year
02	Signal Analyzer	FSV	R&S	100815	2010-06-28	One year
03	Signal generator	SMR27	R&S	1606.6000.02	2010-06-28	One year
04	EMI Test Receiver	ESCI	R&S	100948	2010-07-01	One year
05	Trilog Antenna	VUBL 9163	SCHWARZB ECK	9163-201	2010-06-29	Two years
06	Horn Antenna	HF907	R&S	100126	2009-07-02	Two years
07	Power Splitter	11667A	Agilent	52960	NA	NA
08	DC Power Supply	GPS-3030D	GM	E877677	NA	NA
09	Climatic Chamber	ESS-SDH401	YIN HE	2006001	2011-02-21	One year
10	Semi-Anechoic Chamber	9.6*6.7*6.6m	ETS-Lindgren	NA	NA	NA
11	EMI test software	ES-K1	R&S	NA	NA	NA

*****END OF REPORT BODY*****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



a: EUT

Picture 1 EUT and Auxiliary

A.2 Test Setup



Picture 2: Radiated Spurious Emissions Test setup