

Report No.: SZEM150600379602

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 137

#### **FCC REPORT**

Application No: SZEM1506003796CR

**Applicant:** Polk Audio **Manufacturer:** Polk Audio

Factory: Zhao Yang Electronic (ShenZhen) Co., Ltd.

**Product Name:** wireless all-in-one speaker system

Model No.(EUT): OMNI S6
Trade Mark: POLK

FCC ID: WLQOMNIS6

Standards: 47 CFR Part 15, Subpart C (2014)

**Date of Receipt:** 2015-07-31

**Date of Test:** 2015-08-03 to 2015-08-12

**Date of Issue:** 2015-08-13

Test Result: PASS \*

. \* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150600379602

Page: 2 of 137

#### 2 Version

Revision Record						
Version Chapter Date Modifier Remark						
00		2015-08-13		Original		

Authorized for issue by:		
	Owen Zhon	2015-08-12
Tested By	(Owen Zhou) /Project Engineer	Date
	Heely Wen.	2015-08-13
Prepared By	(Hedy Wen) /Clerk	Date
	Eric Fu	2015-08-13
Checked By	(Eric Fu) /Reviewer	Date



Report No.: SZEM150600379602

Page: 3 of 137

#### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS



Report No.: SZEM150600379602

Page: 4 of 137

#### 4 Contents

		P	age
1	COV	'ER PAGE	1
2	VER	SION	2
3	TES	T SUMMARY	3
4	CON	ITENTS	4
5	GEN	IERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST ENVIRONMENT AND MODE	7
	5.4	DESCRIPTION OF SUPPORT UNITS	7
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	_
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TES	T RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	12
	6.2	CONDUCTED EMISSIONS	13
	6.3	CONDUCTED PEAK OUTPUT POWER	17
	6.4	6DB OCCUPY BANDWIDTH	26
	6.5	Power Spectral Density	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	RF CONDUCTED SPURIOUS EMISSIONS	
		OT AS FOLLOWS:	
	6.8	RADIATED SPURIOUS EMISSIONS	
	6.8.1		
	6.8.2		
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PHO	TOGRAPHS - EUT TEST SETUP1	36
	7.1	CONDUCTED EMISSION	36
	7.2	RADIATED SPURIOUS EMISSION	36
Q	DHU	TOCDADUS - ELIT CONSTDUCTIONAL DETAILS	27



Report No.: SZEM150600379602

Page: 5 of 137

#### 5 General Information

#### 5.1 Client Information

Applicant:	Polk Audio		
Address of Applicant:	5601 Metro Drive Baltimore, Maryland, 21215, USA		
Manufacturer:	Polk Audio		
Address of Manufacturer:	5601 Metro Drive Baltimore, Maryland, 21215, USA		
Factory:	Zhao Yang Electronic (ShenZhen) Co., Ltd.		
Address of Factory:	Section A, 4th Floor, Building 1 & Building 2, De Yong Jia Industrial Park, Guang Qiao Road, Yu Lv Community, Gong Ming Street, Guang Ming New District, Shenzhen, Guangdong, P.R.C		

#### 5.2 General Description of EUT

Product Name:	wireless all-in-one speaker system
Model No.:	OMNI S6
Trade Mark:	POLK
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
	IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n(HT20): 11 Channels
	IEEE 802.11n(HT40): 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK)
	IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE802.11n(HT20 and HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Sample Type:	Fixed production
Test Power Grade:	802.11b :15dBm@1Mbps;
	802.11g:10dBm@6 Mbps;
	802.11n20(2.4G):10 dBm@MCS0;
	802.11n40(2.4G) :10 dBm@MCS0 (manufacturer declare)
Test Software of EUT:	teraterm.exe (manufacturer declare )
Antenna Type:	Integral
Antenna Gain:	2.28dBi
Antenna Delivery:	1TX+1RX
Power Supply:	AC 100-240V 50/60Hz
Test Voltage:	AC 120V 60Hz



Report No.: SZEM150600379602

Page: 6 of 137

Operation Frequency each of channel(802.11b/g/n HT20)										
Channel	Fr	equency	Channe	Frequency	Channel	Fre	quency	Chanr	nel	Frequency
1	24	412MHz	4	2427MHz	7	244	12MHz	10		2457MHz
2	24	417MHz	5	2432MHz	8	244	17MHz	11		2462MHz
3	24	422MHz	6	2437MHz	9	245	52MHz			
Operation F	-requ	iency each	of channe	el(802.11n HT40	)					
Channe	Channel Frequency			Channel	Frequency Channel		F	requency		
1 2422MHz		ИНz	4	2437MHz		7			2452MHz	
2	2 2427MHz		MHz	5	2442MH	lz				
3		2432	ИНz	6	2447MH	lz				

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

#### For 802.11b/g/n (HT20):

Channel	Frequency		
The Lowest channel	2412MHz		
The Middle channel	2437MHz		
The Highest channel	2462MHz		

#### For 802.11n (HT40)

Channel	Frequency		
The Lowest channel	2422MHz		
The Middle channel	2437MHz		
The Highest channel	2452MHz		



Report No.: SZEM150600379602

Page: 7 of 137

#### 5.3 Test Environment and Mode

Operating Environment:	Operating Environment:						
Temperature:	24.0 °C						
Humidity:	52 % RH						
Atmospheric Pressure:	1005 mbar						
Test mode:							
Transmitting mode	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.						

#### 5.4 Description of Support Units

The EUT has been tested independent unit.

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM150600379602

Page: 8 of 137

#### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.





Report No.: SZEM150600379602

Page: 9 of 137

#### 5.10Equipment List

	Conducted Emission							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2016-05-13			
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24			
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2016-05-13			
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30			
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30			
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2016-05-13			
8	Coaxial Cable	SGS	N/A	SEL0025	2016-05-13			
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24			
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24			
11	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13			



Report No.: SZEM150600379602

Page: 10 of 137

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	N/A SEL0017			
2	Spectrum Analyzer	Rohde & Schwarz	FSU43	SEL0270	2015-07-28		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24		
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24		
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24		
7	Horn Antenna(26GHz-40 GHz)	A.H.Systems, inc.	SAS-573	SEL0349	2016-03-20		
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16		
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24		
10	Pre-amplifier(26GHz -40GHz)	Compliance Directions Systems Inc.	PAP-2640- 50	SEL0350	2016-03-20		
11	Coaxial cable	SGS	N/A	SEL0027	2015-05-29		
12	Coaxial cable	SGS	N/A	SEL0189	2015-05-29		
13	Coaxial cable	SGS	N/A	SEL0121	2015-05-29		
14	Coaxial cable	SGS	N/A	SEL0178	2015-05-29		
15	Band filter	Amindeon	82346	SEL0094	2015-05-16		
16	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16		
17	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24		
18	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24		
19	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16		
20	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24		
21	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04		



Report No.: SZEM150600379602

Page: 11 of 137

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2016-04-25
8	Band filter	amideon	82346	SEL0094	2016-05-13
9	POWER METER	R&S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2016-04-25
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM150600379602

Page: 12 of 137

#### 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

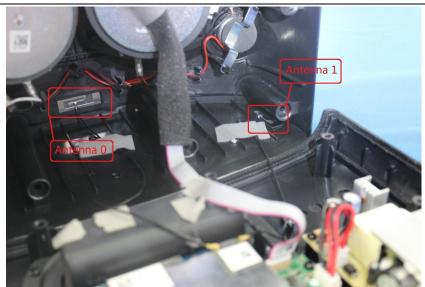

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.28dBi. It support operations in 1X1 diversity, 1 X1 SISO configurations and Single-stream legacy modes.



Report No.: SZEM150600379602

Page: 13 of 137


#### 6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.	207			
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	150kHz to 30MHz				
Limit:	Francisco (MIII-)	Limit (c	dBuV)		
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithr	n of the frequency.			
Test Procedure:	<ol> <li>The mains terminal disturb room.</li> </ol>	pance voltage test was	conducted in a shie	lded	
	2) The EUT was connected to AC power source through a LISN 1 ( Impedance Stabilization Network) which provides a $50\Omega/50\mu H + 1$ linear impedance. The power cables of all other units of the EUT was connected to a second LISN 2, which was bonded to the growing reference plane in the same way as the LISN 1 for the unit be measured. A multiple socket outlet strip was used to connect multipower cables to a single LISN provided the rating of the LISN was exceeded.				
	3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.				
	4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.				
	<ol> <li>In order to find the m equipment and all of the i ANSI C63.10: 2013 on cor</li> </ol>	nterface cables must b	e changed according		



Report No.: SZEM150600379602

Page: 14 of 137

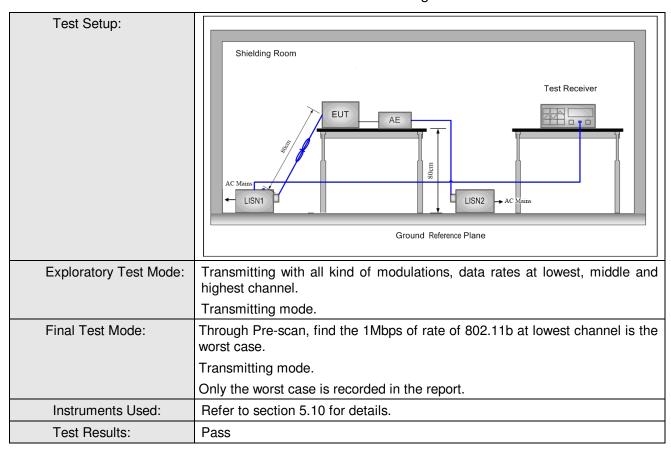



Report No.: SZEM150600379602


Page: 15 of 137

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

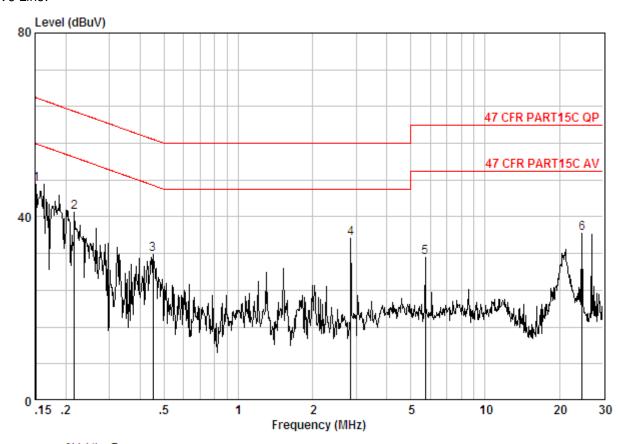

Site : Shielding Room

Condition : 47 CFR PART15C AV CE LINE

Job No. : 3796CR Test Mode : TX


	 Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15160	0.02	9.82	37.33	47.17	55.91	-8.74	Peak
2	0.21620	0.02	9.83	31.08	40.93	52.96	-12.03	Peak
3	0.45155	0.01	9.86	21.95	31.82	46.85	-15.03	Peak
4	2.854	0.02	10.02	25.20	35.24	46.00	-10.76	Peak
5	5.713	0.01	10.13	21.02	31.16	50.00	-18.84	Peak
6	24.659	0.02	9.89	26.57	36.49	50.00	-13.51	Peak



Report No.: SZEM150600379602

Page: 16 of 137

#### Neutral Line:

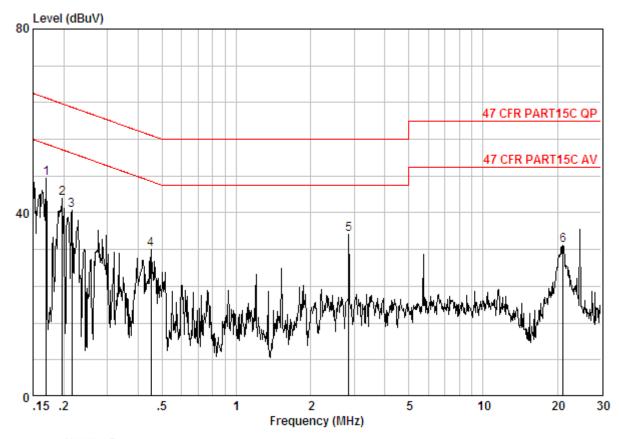

Site : Shielding Room

Condition : 47 CFR PART15C AV CE NEUTRAL

Job No. : 3796CR Test Mode : TX

	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 @ 2 3 4 5	0.16944 0.19758 0.21506 0.45155 2.854 21.035	0.02 0.02 0.01 0.02	9.85 9.88 10.12	33.23 30.77 22.15 25.06	43.10 40.64 32.04 35.21	53.71 53.01 46.85 46.00	-10.61 -12.37 -14.80 -10.79	Peak Peak Peak Peak

#### Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM150600379602

Page: 17 of 137

#### 6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)					
Test Method:	ANSI C63.10 2013					
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table					
	Ground Reference Plane					
	Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Test Instruments:	Refer to section 5.10 for details.					
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.					
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Pre-scan was performed at Antenna 0 and Antenna 1, no worst case was found. Only the test data of Antenna 0 was shown in this report.					
Limit:	30dBm					
Test Results:	Pass					



Report No.: SZEM150600379602

Page: 18 of 137

Pre-scan und	Pre-scan under all rate at lowest channel 1							
Mode		802	.11b			_		
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	18.65	18.49	18.22	17.83				
Mode				802	2.11g			
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	18.84	18.68	18.52	18.47	18.45	18.21	18.02	17.78
Mode				802.11	n(HT20)			
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	18.82	18.69	18.55	18.54	18.34	18.12	18.01	17.86
Mode	802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)	18.51	18.45	18.33	18.26	18.22	18.04	17.78	17.66

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).





Report No.: SZEM150600379602

Page: 19 of 137

#### **Measurement Data**

	802.11b mode						
Test channel	Test channel Peak Output Power (dBm)		Result				
Lowest	18.65	30.00	Pass				
Middle	17.64	30.00	Pass				
Highest	18.14	30.00	Pass				
	802.11g mo	de					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	18.84	30.00	Pass				
Middle	17.61	30.00	Pass				
Highest	18.17	30.00	Pass				
	802.11n(HT20)	mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	18.82	30.00	Pass				
Middle	17.98	30.00	Pass				
Highest	18.44	30.00	Pass				
	802.11n(HT40)	mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	18.51	30.00	Pass				
Middle	18.08	30.00	Pass				
Highest	Highest 17.64		Pass				




Report No.: SZEM150600379602

Page: 20 of 137

#### Test plot as follows:

Test mode: 802.11b Test channel: Lowest

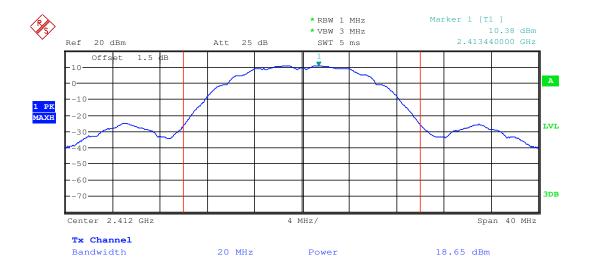

Test mode: 802.11b Test channel: Middle








Report No.: SZEM150600379602

Page: 21 of 137

Test mode: 802.11b Test channel: Highest

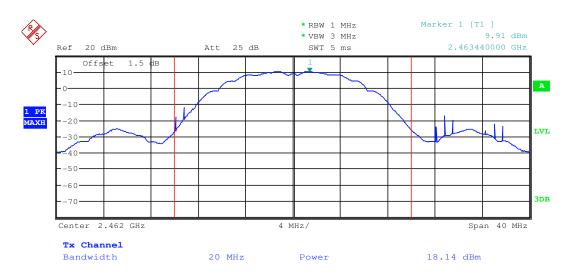



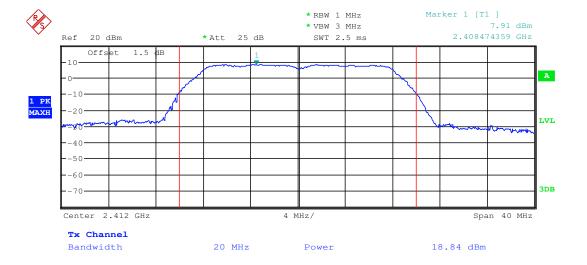




Report No.: SZEM150600379602

Page: 22 of 137

Test mode: 802.11g Test channel: Middle



Test mode: 802.11g Test channel: Highest

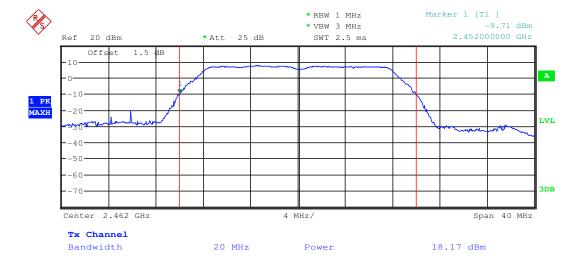





Report No.: SZEM150600379602

Page: 23 of 137

Test mode: 802.11n(HT20) Test channel: Lowest

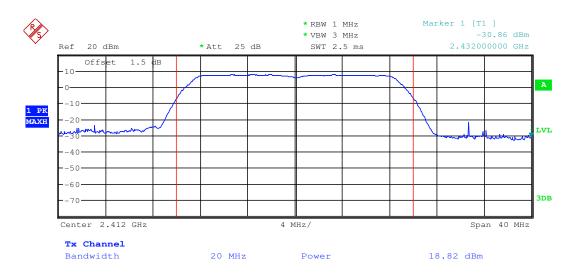

Test mode: 802.11n(HT20) Test channel: Middle

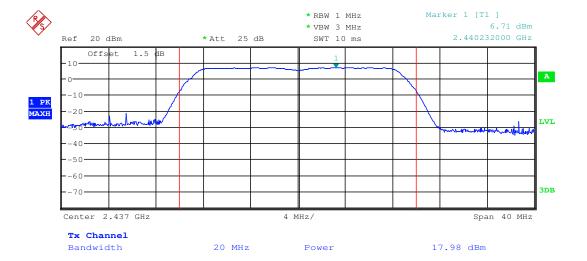





Report No.: SZEM150600379602

Page: 24 of 137

Test mode: 802.11n(HT20) Test channel: Highest

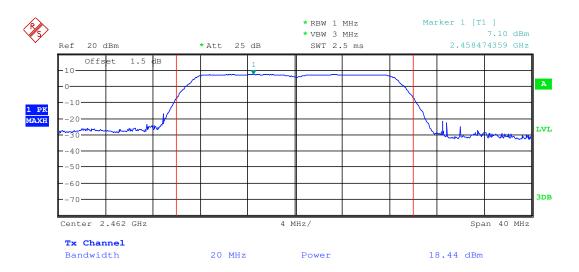

Test mode:	802.11n(HT40)	Test channel:	Lowest
1001111000.	002.1111(111.10)	i oot onamon	2011001

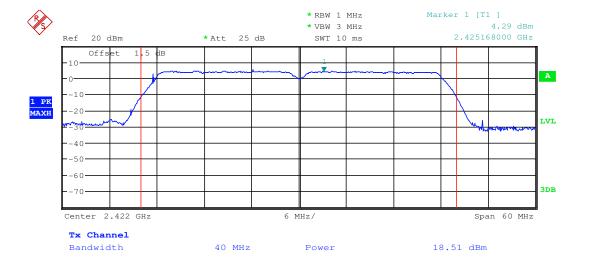




Report No.: SZEM150600379602

Page: 25 of 137

Test mode: 802.11n(HT40) Test channel: Middle

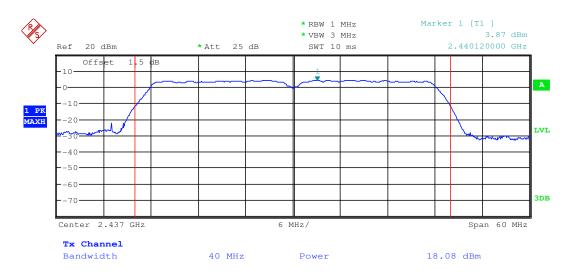








Report No.: SZEM150600379602

Page: 26 of 137

#### 6.4 6dB Occupy Bandwidth

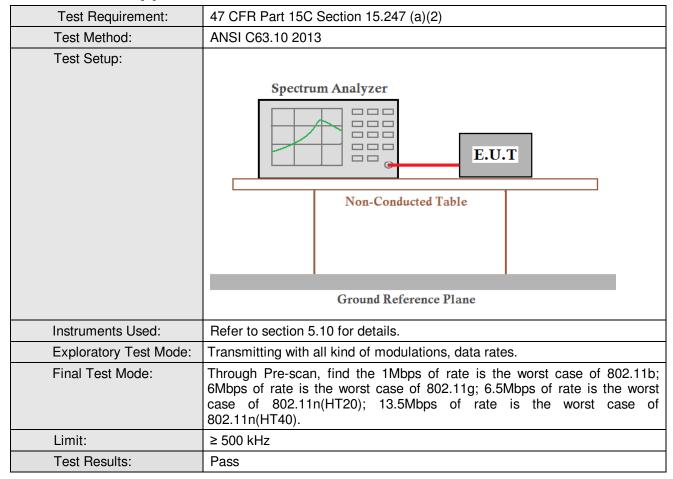



Report No.: SZEM150600379602

Page: 27 of 137

#### **Measurement Data**

	802.11b mode						
Test channel	Test channel 6dB Occupy Bandwidth (MHz)		Result				
Lowest	10.11	≥500	Pass				
Middle	10.11	≥500	Pass				
Highest	10.11	≥500	Pass				
	802.11g mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	16.41	≥500	Pass				
Middle	16.41	≥500	Pass				
Highest	16.62	≥500	Pass				
	802.11n(HT20) mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	17.67	≥500	Pass				
Middle	17.85	≥500	Pass				
Highest	17.73	≥500	Pass				
	802.11n(HT40) mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	36.54	≥500	Pass				
Middle	36.54	≥500	Pass				
Highest	36.54	≥500	Pass				




Report No.: SZEM150600379602

Page: 28 of 137

Test plot as follows:



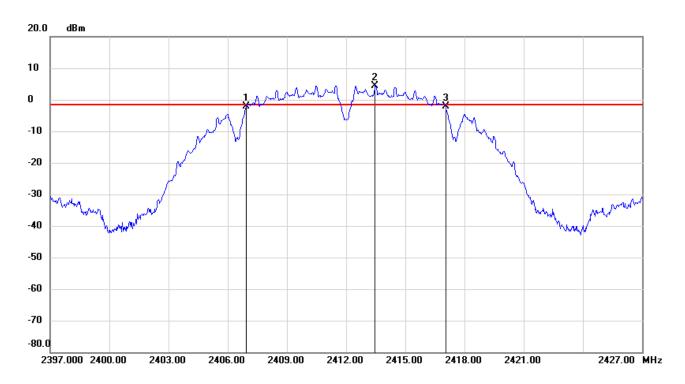

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2406.9300	-2.14	-1.69	-0.45
2	2413.4700	4.31	-1.69	6.00
3	2417.0400	-2.24	-1.69	-0.55

No.		> Frequency(MHz)	〉Level(dB)	
1	mk3-mk1	10.11	-0.1	






Report No.: SZEM150600379602

Page: 29 of 137

Test mode: 802.11b Test channel: Middle

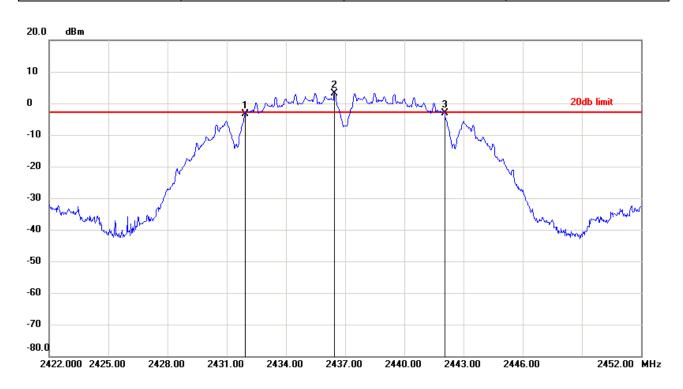

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2431.9300	-3.25	-2.79	-0.46
2	2436.4600	3.21	-2.79	6.00
3	2442.0400	-3.16	-2.79	-0.37


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	10.11	0.09



Report No.: SZEM150600379602

Page: 30 of 137



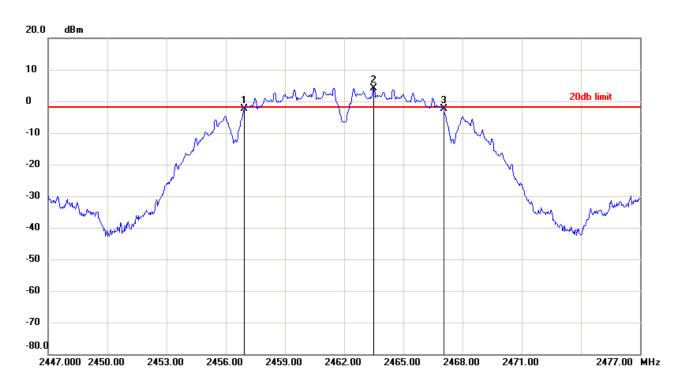

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2456.9300	-2.45	-1.89	-0.56
2	2463.5000	4.11	-1.89	6.00
3	2467.0400	-2.47	-1.89	-0.58


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	10.11	-0.02



Report No.: SZEM150600379602

Page: 31 of 137



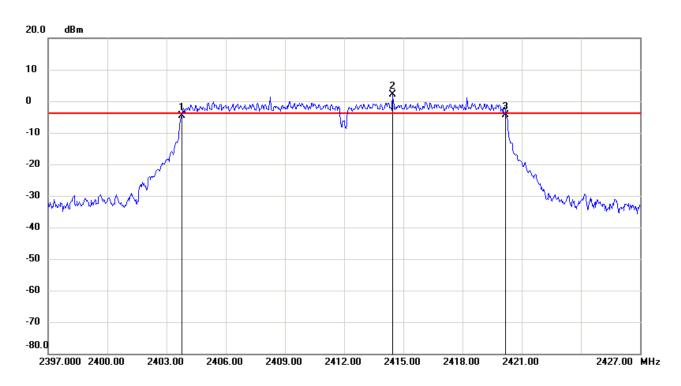

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.7800	-4.61	-3.93	-0.68
2	2414.4600	2.07	-3.93	6.00
3	2420.1900	-4.26	-3.93	-0.33


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	16.41	0.35



Report No.: SZEM150600379602

Page: 32 of 137



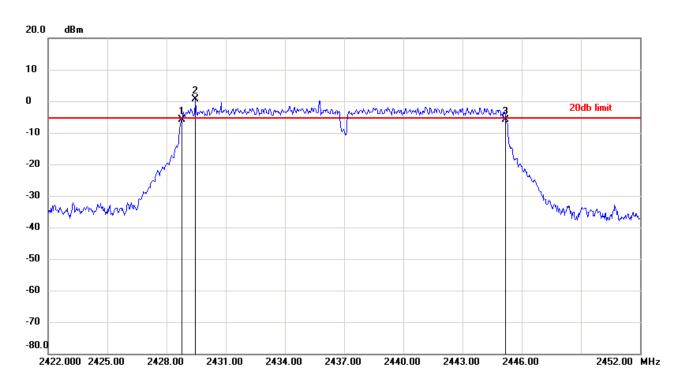

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.7800	-5.87	-5.45	-0.42
2	2429.4700	0.55	-5.45	6.00
3	2445.1900	-5.81	-5.45	-0.36


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	16.41	0.06



Report No.: SZEM150600379602

Page: 33 of 137



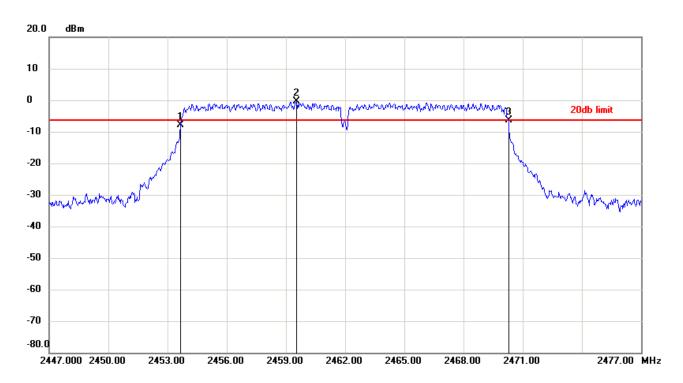


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.6600	-7.94	-6.31	-1.63
2	2459.5400	-0.31	-6.31	6.00
3	2470.2800	-6.46	-6.31	-0.15


No.		> Frequency(MHz)	〉Level(dB)
1	mk3-mk1	16.62	1.48



Report No.: SZEM150600379602

Page: 34 of 137



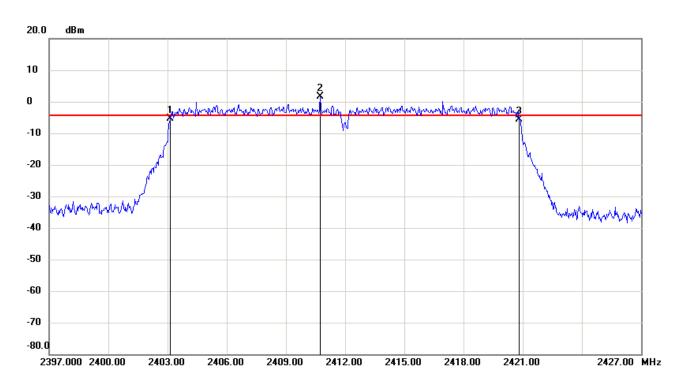

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.1500	-5.41	-4.36	-1.05
2	2410.7400	1.64	-4.36	6.00
3	2420.8200	-5.63	-4.36	-1.27


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	17.67	-0.22



Report No.: SZEM150600379602

Page: 35 of 137



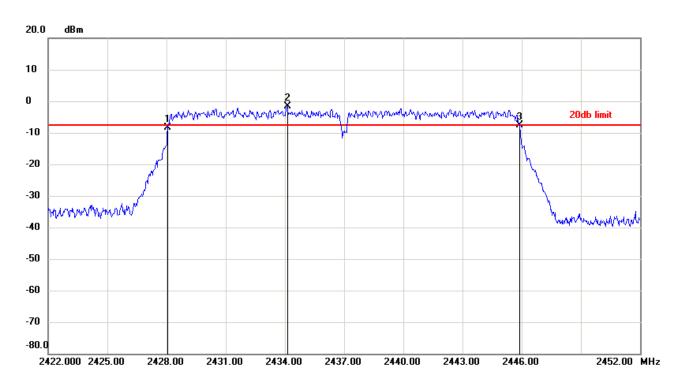

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.0600	-8.33	-7.72	-0.61
2	2434.1200	-1.72	-7.72	6.00
3	2445.9100	-7.72	-7.72	0.00


No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	17.85	0.61



Report No.: SZEM150600379602

Page: 36 of 137



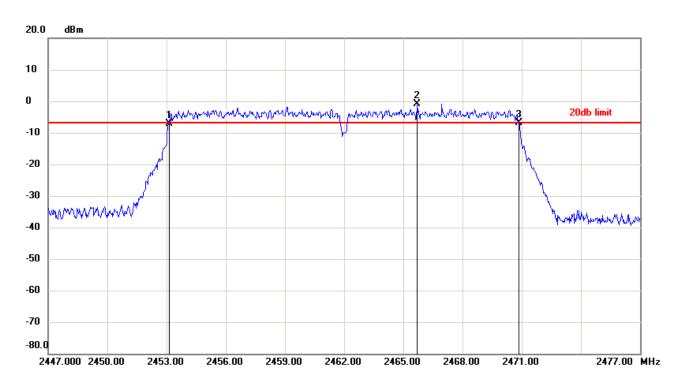

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.1200	-7.11	-6.76	-0.35
2	2465.6900	-0.76	-6.76	6.00
3	2470.8500	-6.84	-6.76	-0.08


No.		> Frequency(MHz)	〉Level(dB)
1	mk3-mk1	17.73	0.27



Report No.: SZEM150600379602

Page: 37 of 137



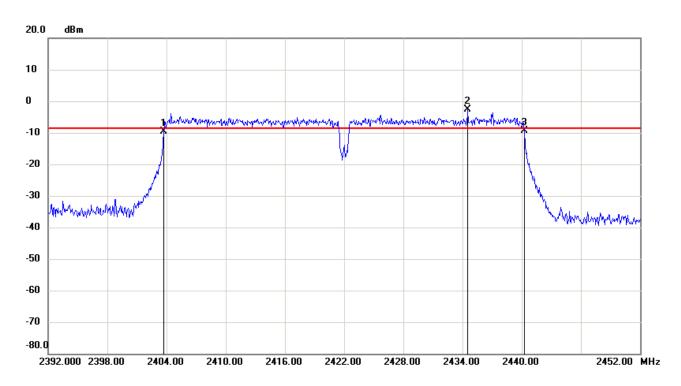

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.7000	-9.68	-8.57	-1.11
2	2434.5400	-2.57	-8.57	6.00
3	2440.2400	-9.40	-8.57	-0.83


No.		> Frequency(MHz)	〉Level(dB)
1	mk3-mk1	36.54	0.28



Report No.: SZEM150600379602

Page: 38 of 137



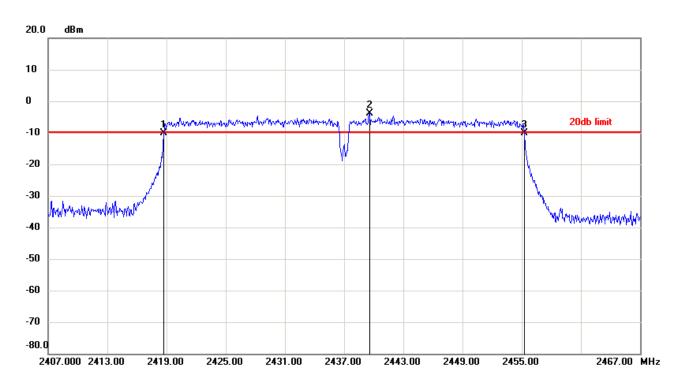

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2418.7000	-10.07	-9.81	-0.26
2	2439.5800	-3.81	-9.81	6.00
3	2455.2400	-10.03	-9.81	-0.22

No		› Frequency(MHz)	› Level(dB)
1	mk3-mk1	36.54	0.04






Report No.: SZEM150600379602

Page: 39 of 137



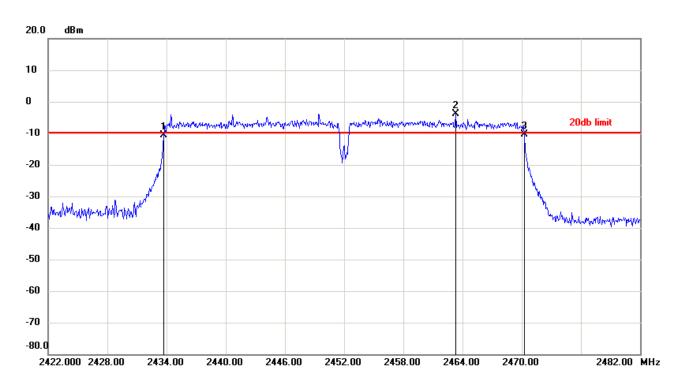

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2433.7000	-10.73	-9.83	-0.90
2	2463.2800	-3.83	-9.83	6.00
3	2470.2400	-10.48	-9.83	-0.65

No.		〉Frequency(MHz)	〉Level(dB)
1	mk3-mk1	36.54	0.25



Report No.: SZEM150600379602

Page: 40 of 137

### 6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)		
Test Method:	ANSI C63.10 2013		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details.		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).		
Limit:	≤8.00dBm/3kHz		
Test Results:	Pass		



Report No.: SZEM150600379602

Page: 41 of 137

#### **Measurement Data**

Measurement Data	leasurement Data					
	802.11b mode					
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result			
Lowest	-14.23	≤8.00	Pass			
Middle	-14.87	≤8.00	Pass			
Highest	-14.38	≤8.00	Pass			
	802.11g mode					
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result			
Lowest	-18.27	≤8.00	Pass			
Middle	-19.60	≤8.00	Pass			
Highest	-18.54	≤8.00	Pass			
	802.11n (HT20) mode					
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result			
Lowest	-17.09	≤8.00	Pass			
Middle	-18.48	≤8.00	Pass			
Highest	-17.23	≤8.00	Pass			
	802.11n(HT40) mode					
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result			
Lowest	-18.69	≤8.00	Pass			
Middle	-19.61	≤8.00	Pass			
Highest	-21.90	≤8.00	Pass			




Report No.: SZEM150600379602


Page: 42 of 137

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

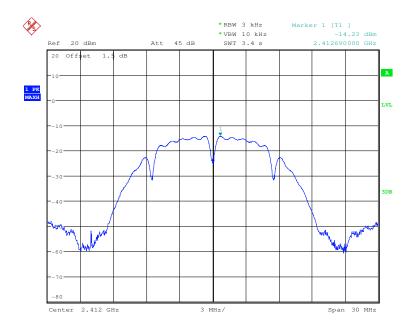



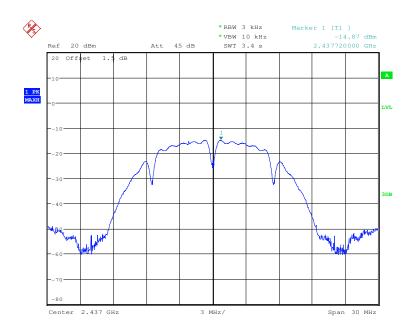





Report No.: SZEM150600379602

Page: 43 of 137

Test mode: 802.11b Test channel: Highest

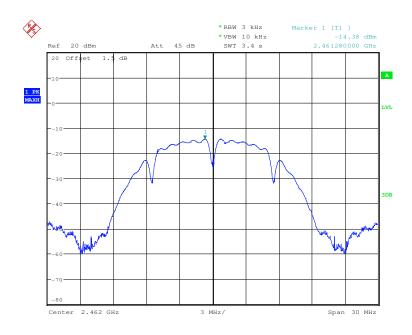



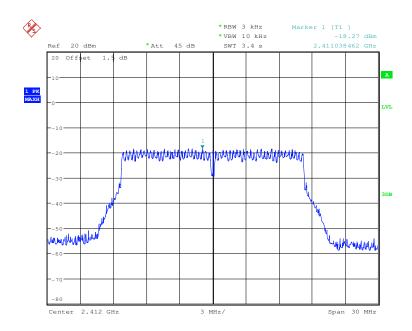





Report No.: SZEM150600379602

Page: 44 of 137

Test mode: 802.11g Test channel: Middle

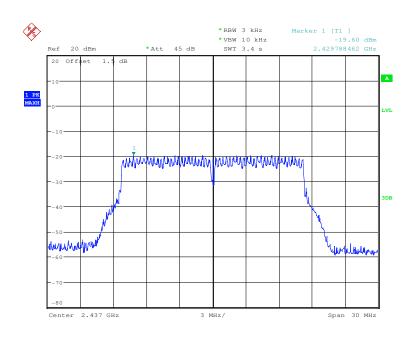



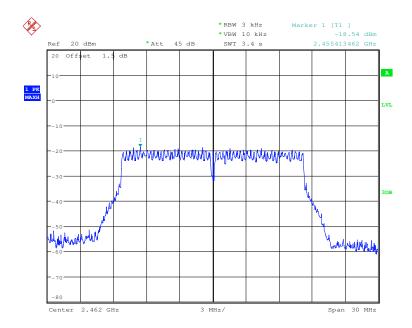





Report No.: SZEM150600379602

Page: 45 of 137

Test mode: 802.11n (HT20) Test channel: Lowest

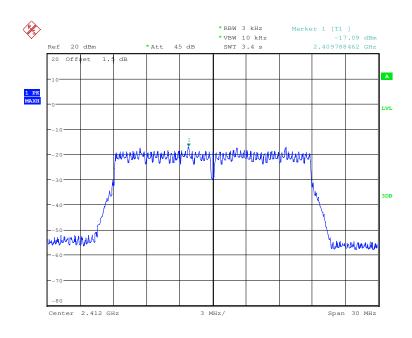



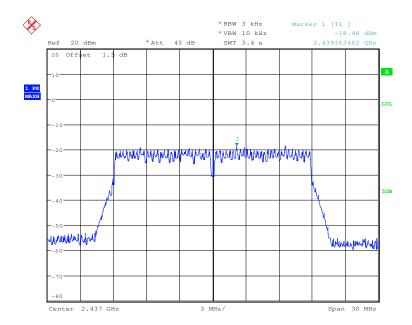





Report No.: SZEM150600379602

Page: 46 of 137

Test mode: 802.11n (HT20) Test channel: Highest

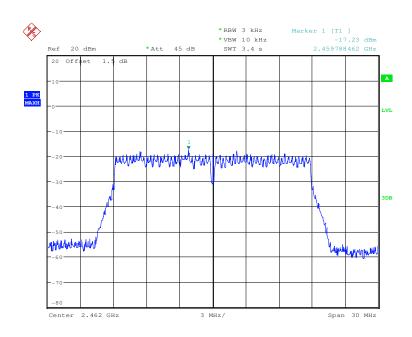



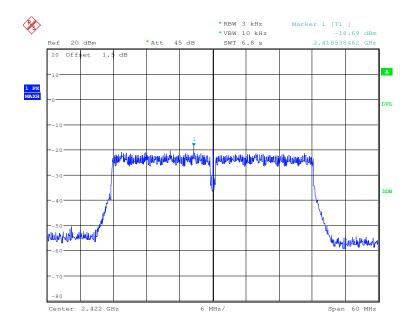





Report No.: SZEM150600379602

Page: 47 of 137

Test mode: 802.11n (HT40) Test channel: Middle

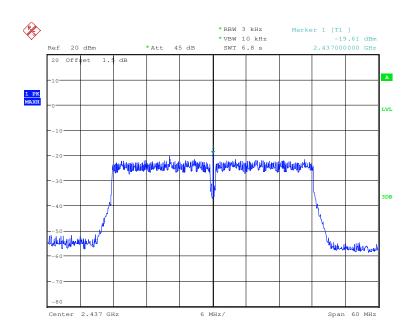



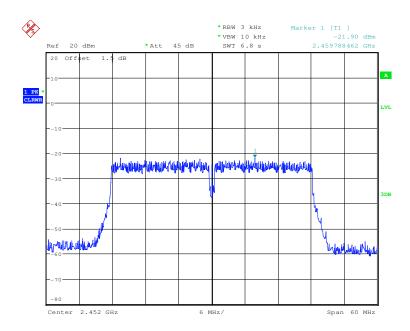



Report No.: SZEM150600379602

Page: 48 of 137

### 6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10 2013		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Instruments Used:	Refer to section 5.10 for details.		
Test Results:	Pass		






Report No.: SZEM150600379602

Page: 49 of 137

#### Test plot as follows:

Test mode: 802.11b Test channel: Lowest

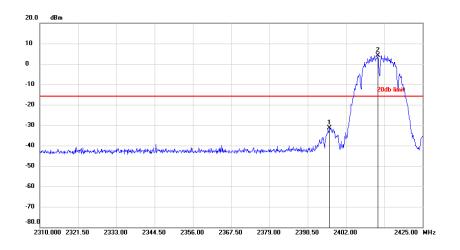

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2397.0550	-31.28	-15.86	-15.42
2	2411.5450	4.14	-15.86	20.00

Test mode:	802.11b	Test channel:	Highest
Test mode.	002.110	i est chamilei.	riigiiest




No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2460.4500	3.92	-16.08	20.00
2	2486.5500	-39.24	-16.08	-23.16



Report No.: SZEM150600379602


Page: 50 of 137

Test mode: 802.11g Test channel: Lowest

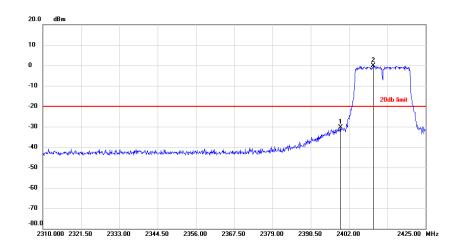

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.4700	-30.44	-20.08	-10.36
2	2409.2450	-0.08	-20.08	20.00

Test mode:	802.11g	Test channel:	Highest

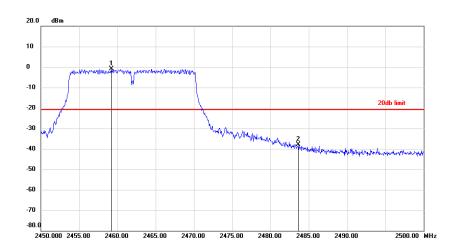


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2459.2500	-0.79	-20.79	20.00
2	2483.6500	-37.92	-20.79	-17.13



Report No.: SZEM150600379602


Page: 51 of 137

Test mode: 802.11n (HT20) Test channel: Lowest

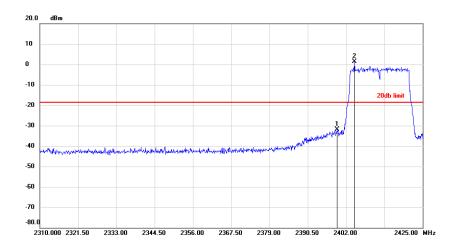

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.2400	-31.75	-18.68	-13.07
2	2404.5300	1.32	-18.68	20.00

Test mode:	802.11n (HT20)	Test channel:	Highest

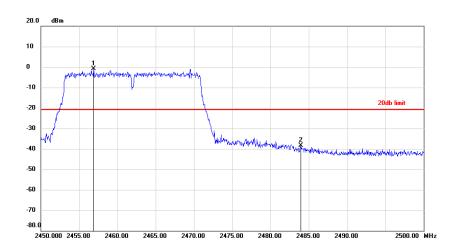


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2456.9000	-0.76	-20.76	20.00
2	2483.9500	-38.44	-20.76	-17.68



Report No.: SZEM150600379602


Page: 52 of 137

Test mode: 802.11n (HT40) Test channel: Lowest

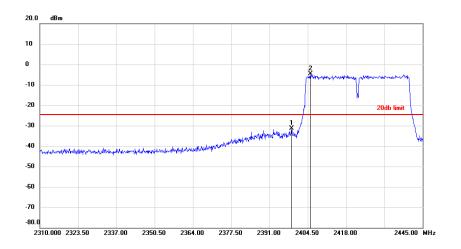

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2398.8300	-31.35	-24.62	-6.73
2	2405.4450	-4.62	-24.62	20.00

Test mode:	802.11n (HT40)	Test channel:	Highest

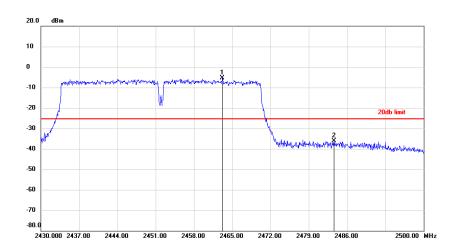

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2463.1800	-5.34	-25.34	20.00
2	2483.6200	-36.02	-25.34	-10.68



Report No.: SZEM150600379602

Page: 53 of 137

### 6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10 2013		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Instruments Used:	Refer to section 5.10 for details.		
Test Results:	Pass		




Report No.: SZEM150600379602


Page: 54 of 137

### Test plot as follows:

Test mode:	802.11b	Test channel:	Lowest

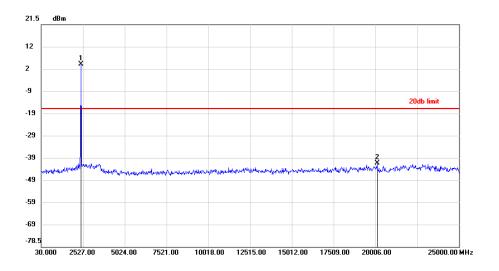

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2412.1380	3.67	-16.33	20.00
2	20120.0297	-40.85	-16.33	-24.52

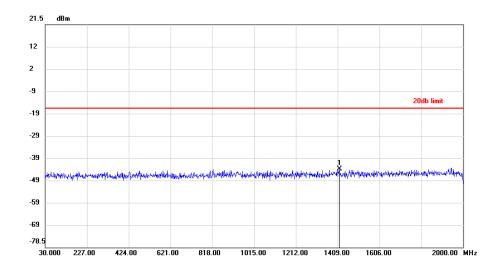


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1417.2083	-43.40	-16.17	-27.23




Report No.: SZEM150600379602

Page: 55 of 137

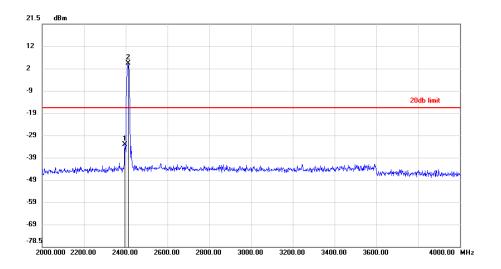

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2397.1333	-32.63	-16.17	-16.46
2	2413.4000	3.83	-16.17	20.00

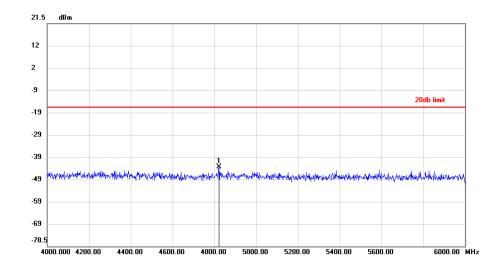


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4823.9333	-42.92	-16.17	-26.75




Report No.: SZEM150600379602

Page: 56 of 137

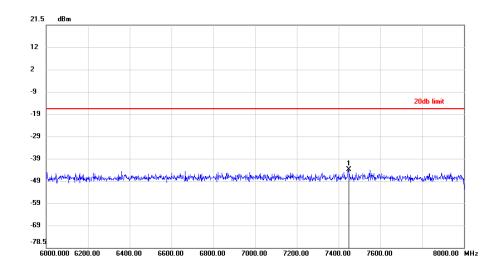

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7447.0667	-43.34	-16.17	-27.17

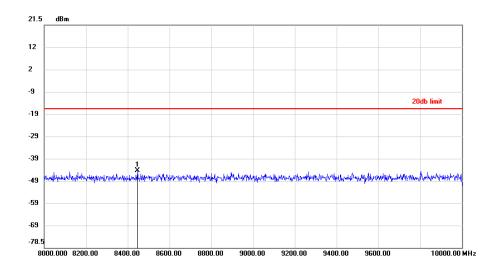


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8446.6000	-43.98	-16.17	-27.81




Report No.: SZEM150600379602

Page: 57 of 137



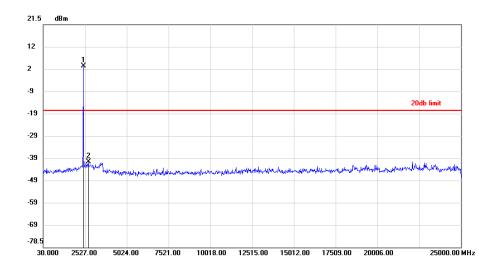

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2435.4433	2.95	-17.05	20.00
2	2726.7600	-40.06	-17.05	-23.01

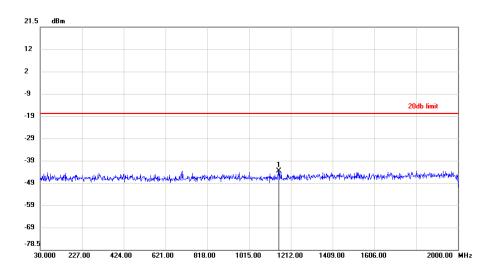


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1153.9507	-43.07	-17.35	-25.72




Report No.: SZEM150600379602

Page: 58 of 137

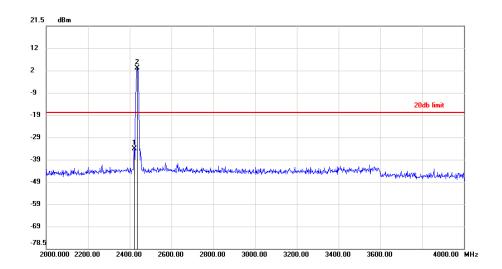

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2422.0000	-33.56	-17.35	-16.21
2	2437.4000	2.65	-17.35	20.00

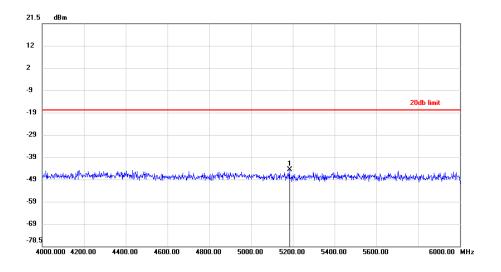


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	5185.2000	-44.11	-17.35	-26.76




Report No.: SZEM150600379602

Page: 59 of 137

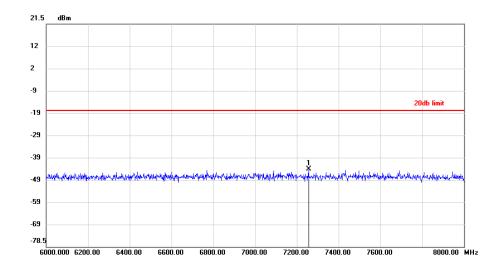

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7257.4000	-43.64	-17.35	-26.29

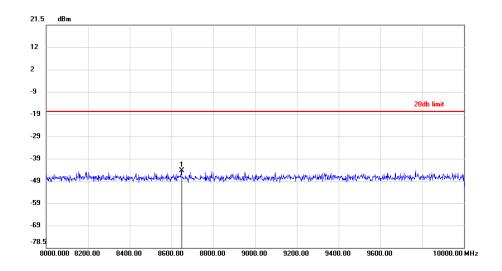


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8647.6667	-43.84	-17.35	-26.49




Report No.: SZEM150600379602

Page: 60 of 137



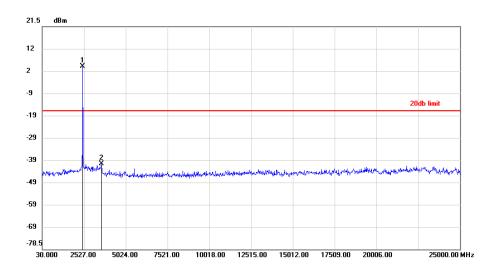

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2462.9103	3.53	-16.47	20.00
2	3576.5723	-40.08	-16.47	-23.61

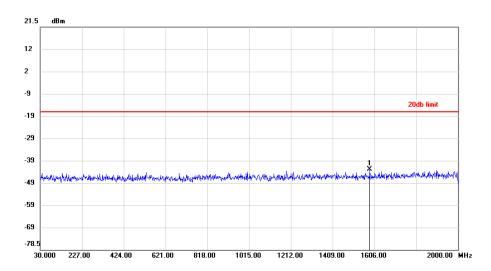


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1585.0523	-42.41	-16.63	-25.78




Report No.: SZEM150600379602

Page: 61 of 137

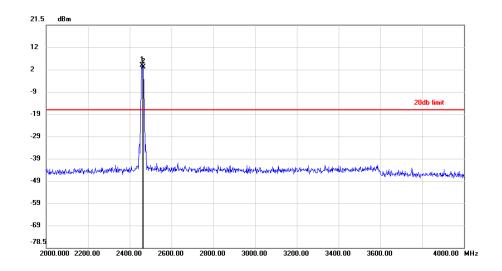

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2460.4000	3.37	-16.63	20.00
2	2464.4667	2.63	-16.63	19.26

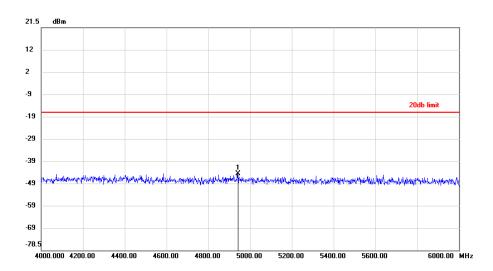


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4941.4667	-44.02	-16.63	-27.39




Report No.: SZEM150600379602

Page: 62 of 137

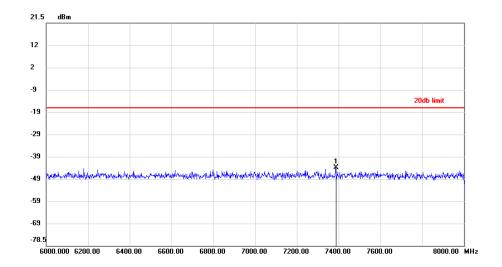

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7386.0667	-43.44	-16.63	-26.81

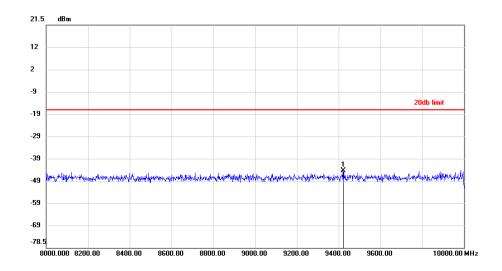


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9421.4667	-43.94	-16.63	-27.31




Report No.: SZEM150600379602

Page: 63 of 137

Test mode: 802.11g Test channel: Lowest

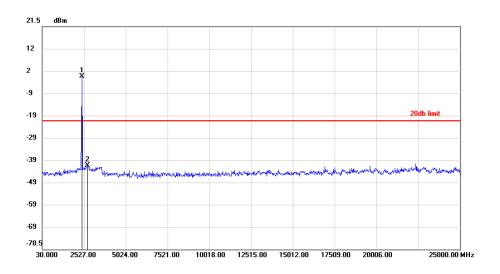

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2415.4673	-0.92	-20.92	20.00
2	2744.2390	-40.82	-20.92	-19.90

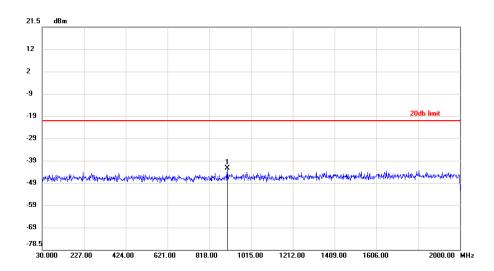


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	904.2203	-41.76	-20.54	-21.22




Report No.: SZEM150600379602

Page: 64 of 137

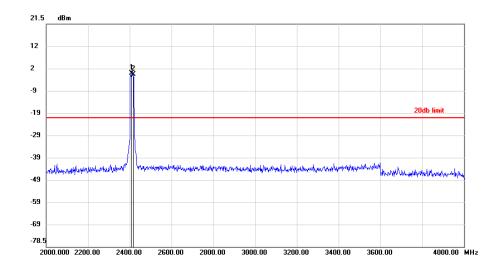

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2409.4000	-0.54	-20.54	20.00
2	2416.5333	-1.02	-20.54	19.52

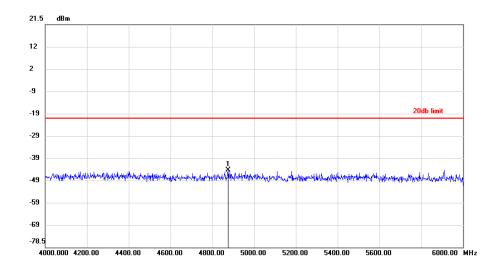


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4876.3333	-43.79	-20.54	-23.25




Report No.: SZEM150600379602

Page: 65 of 137

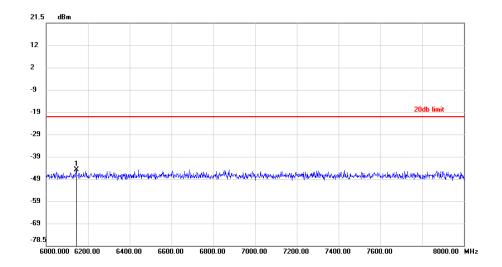

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6143.2667	-44.34	-20.54	-23.80

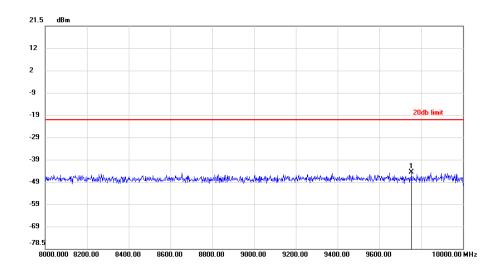


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9754.1333	-44.07	-20.54	-23.53




Report No.: SZEM150600379602

Page: 66 of 137



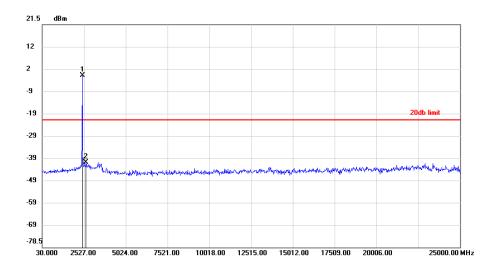

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2443.7667	-1.34	-21.34	20.00
2	2652.6823	-40.28	-21.34	-18.94

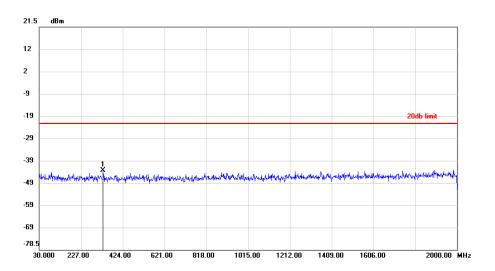


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	332.7890	-42.84	-21.85	-20.99




Report No.: SZEM150600379602

Page: 67 of 137

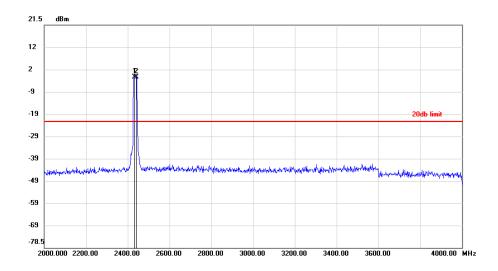

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2434.4000	-1.85	-21.85	20.00
2	2441.2667	-1.93	-21.85	19.92

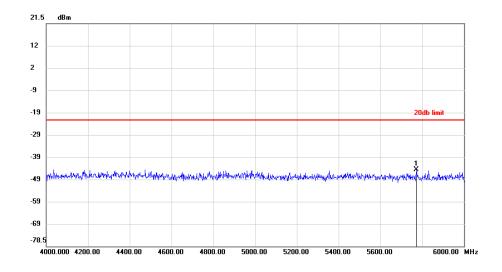


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	5773.0000	-44.08	-21.85	-22.23




Report No.: SZEM150600379602

Page: 68 of 137

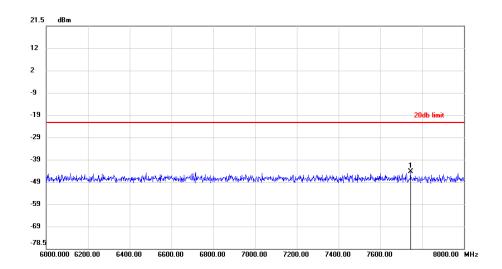

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7744.1333	-43.97	-21.85	-22.12

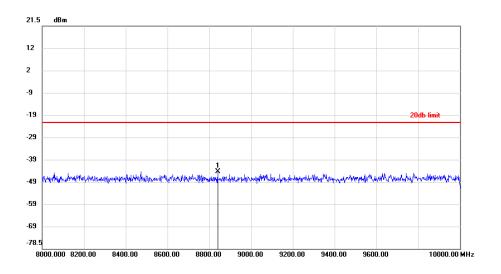

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8841.8000	-43.80	-21.85	-21.95







Report No.: SZEM150600379602

Page: 69 of 137



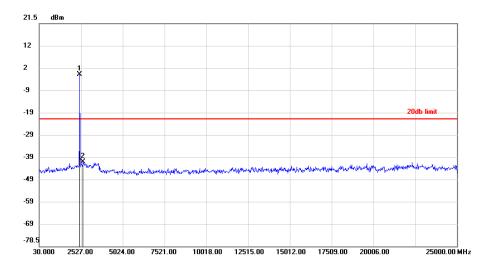

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2464.5750	-1.43	-21.43	20.00
2	2657.6763	-40.69	-21.43	-19.26

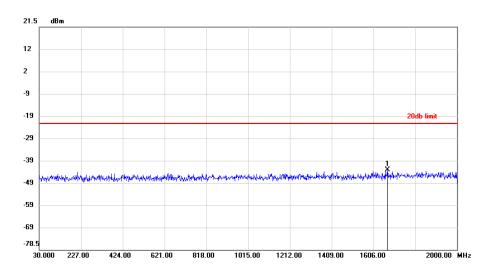


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1673.7680	-42.64	-21.76	-20.88




Report No.: SZEM150600379602

Page: 70 of 137

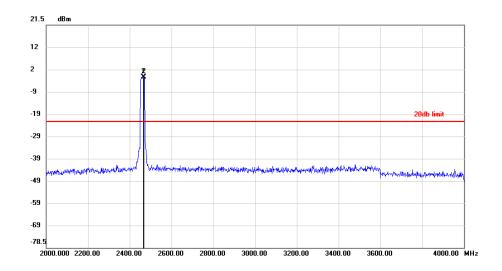

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2464.1333	-1.76	-21.76	20.00
2	2469.8000	-1.79	-21.76	19.97

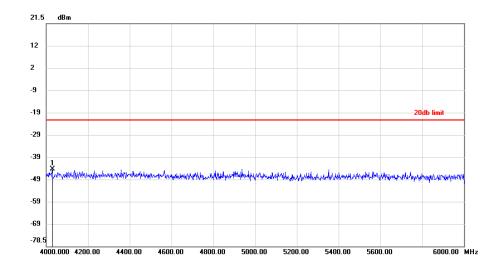


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4028.4667	-43.77	-21.76	-22.01




Report No.: SZEM150600379602

Page: 71 of 137

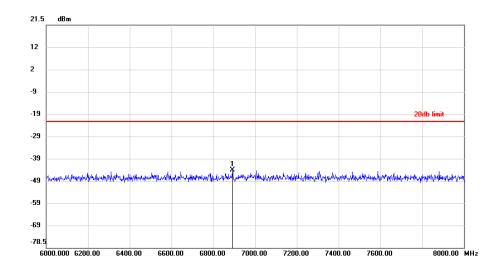

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6892.6000	-43.69	-21.76	-21.93

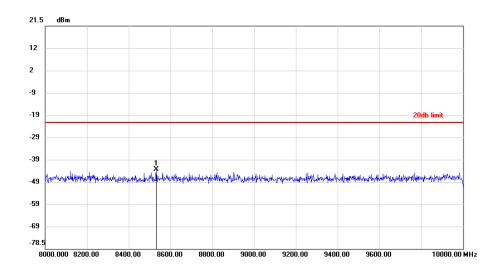


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8532.8000	-42.99	-21.76	-21.23




Report No.: SZEM150600379602

Page: 72 of 137



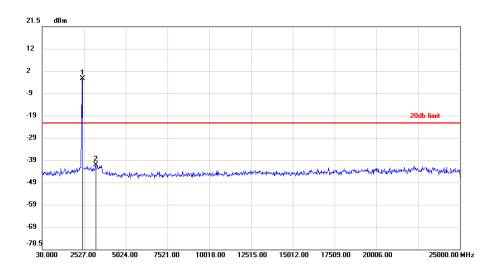

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2406.3117	-1.78	-21.78	20.00
2	3238.6450	-40.63	-21.78	-18.85

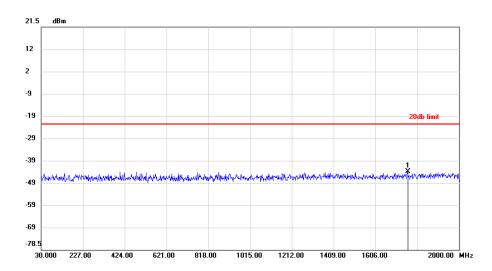


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1759.1347	-43.42	-22.16	-21.26




Report No.: SZEM150600379602

Page: 73 of 137

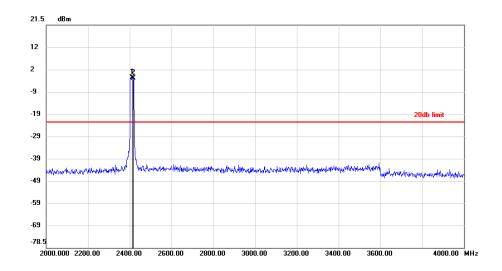

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2411.2667	-2.16	-22.16	20.00
2	2418.9333	-2.29	-22.16	19.87

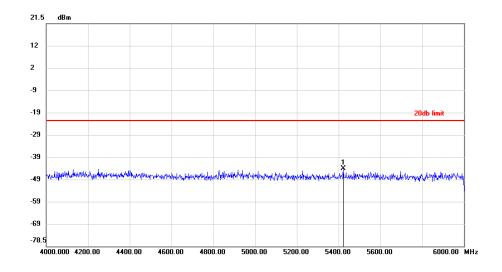


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	5423.7333	-43.52	-22.16	-21.36




Report No.: SZEM150600379602

Page: 74 of 137

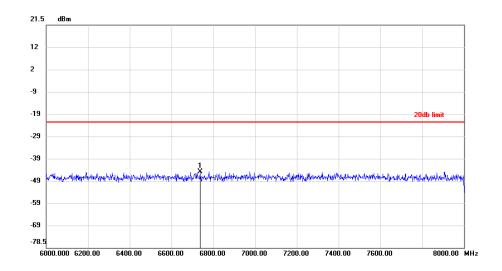

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6737.6667	-44.25	-22.16	-22.09

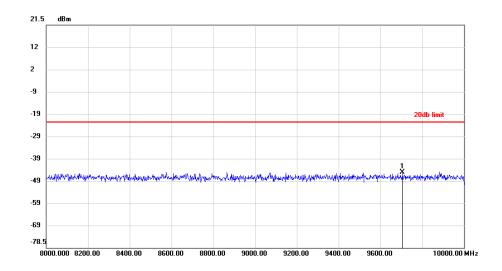


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9706.6000	-44.52	-22.16	-22.36




Report No.: SZEM150600379602

Page: 75 of 137

Test mode: 802.11n (HT20) Test channel: Middle

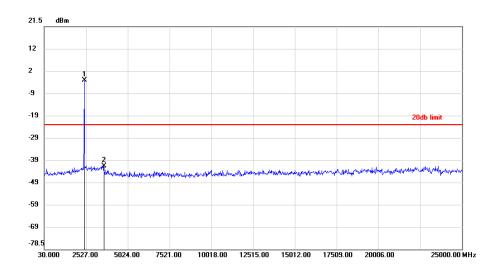

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2439.6050	-2.72	-22.72	20.00
2	3597.3807	-41.01	-22.72	-18.29

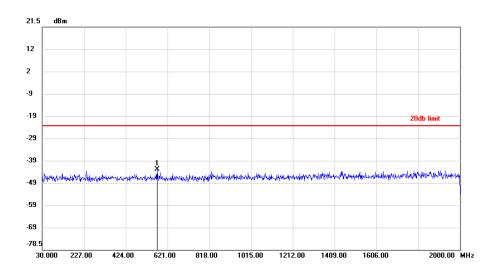


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	573.3260	-42.36	-22.94	-19.42




Report No.: SZEM150600379602

Page: 76 of 137

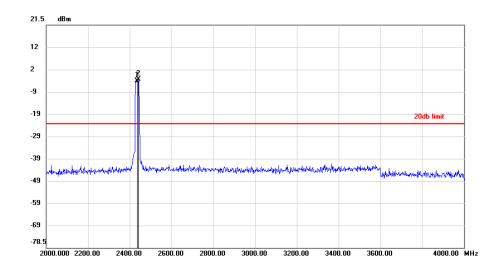

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2435.6667	-3.51	-22.94	19.43
2	2440.3333	-2.94	-22.94	20.00

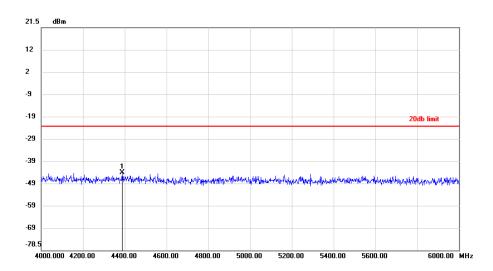


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4388.4000	-43.64	-22.94	-20.70




Report No.: SZEM150600379602

Page: 77 of 137

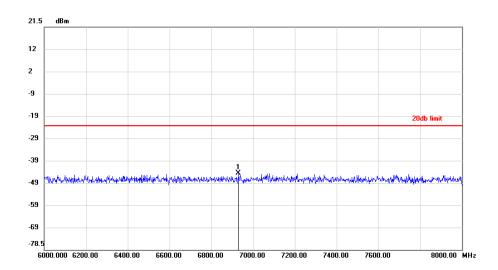

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6930.2000	-44.24	-22.94	-21.30

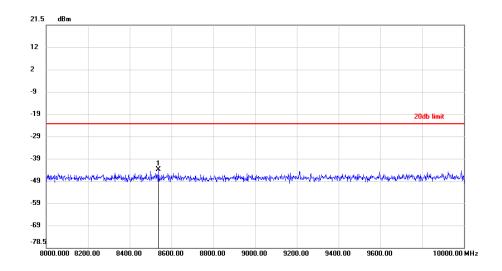


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8539.8000	-43.43	-22.94	-20.49




Report No.: SZEM150600379602

Page: 78 of 137

Test mode: 802.11n (HT20) Test channel: Highest

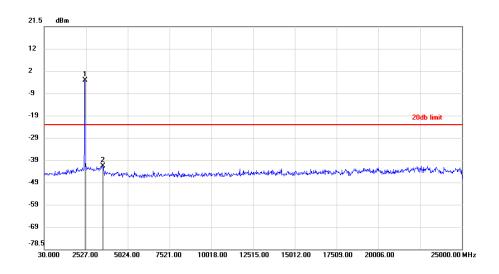

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2458.7487	-2.58	-22.58	20.00
2	3507.4887	-41.14	-22.58	-18.56

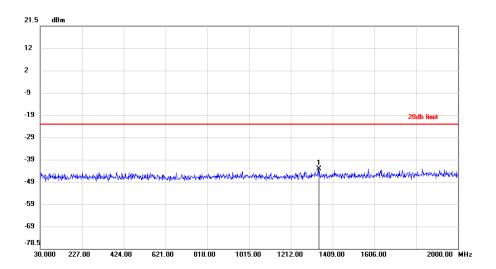


				6-0
No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1343.4647	-42.58	-22.54	C-20.04
				D
				( 深圳 / 9)
				HE




Report No.: SZEM150600379602

Page: 79 of 137

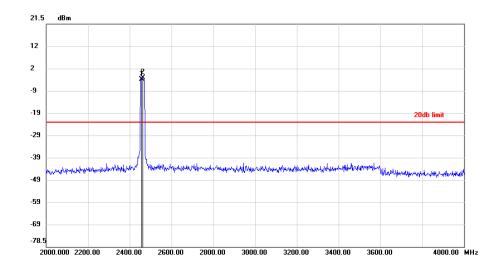

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2454.0667	-3.25	-22.54	19.29
2	2461.2667	-2.54	-22.54	20.00

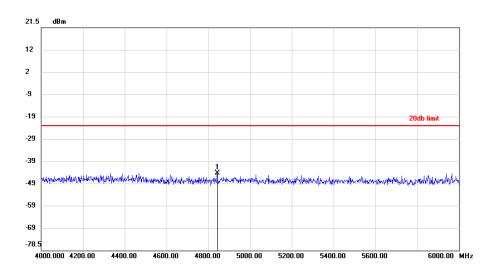


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4842.2667	-43.83	-22.54	-21.29




Report No.: SZEM150600379602

Page: 80 of 137

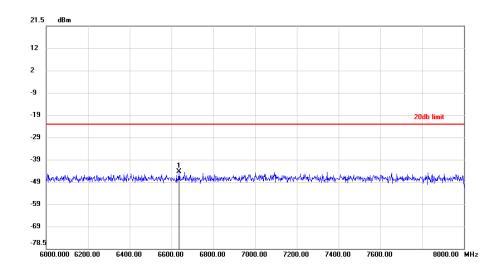

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6636.4000	-43.75	-22.54	-21.21

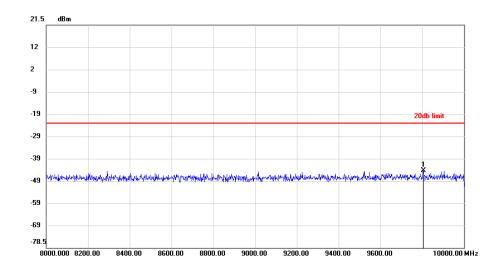


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9804.8667	-43.84	-22.54	-21.30




Report No.: SZEM150600379602

Page: 81 of 137

Test mode: 802.11n (HT40) Test channel: Lowest

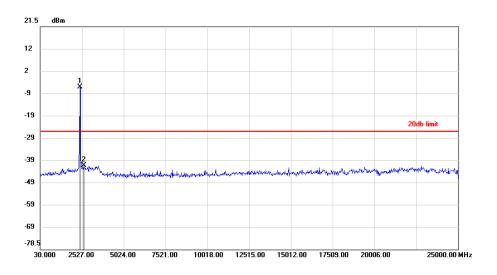

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2405.4793	-5.64	-25.64	20.00
2	2634.3710	-40.80	-25.64	-15.16

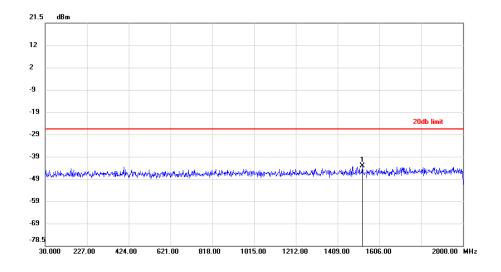


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1526.3463	-42.71	-26.03	-16.68




Report No.: SZEM150600379602

Page: 82 of 137

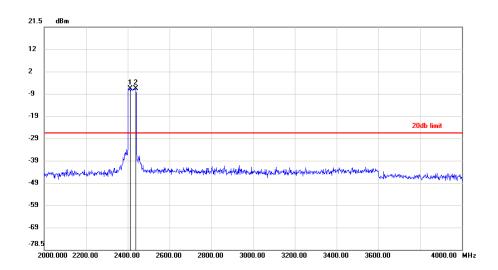

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2413.2000	-6.10	-26.03	19.93
2	2439.2000	-6.03	-26.03	20.00

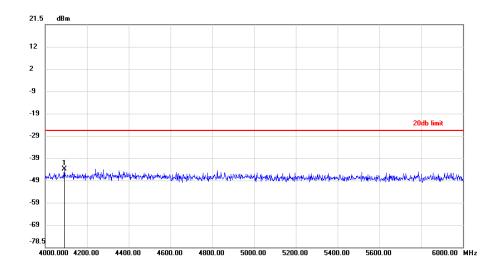


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4092.3333	-43.27	-26.03	-17.24




Report No.: SZEM150600379602

Page: 83 of 137

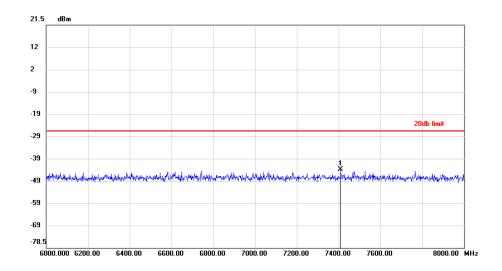

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7411.2000	-43.39	-26.03	-17.36

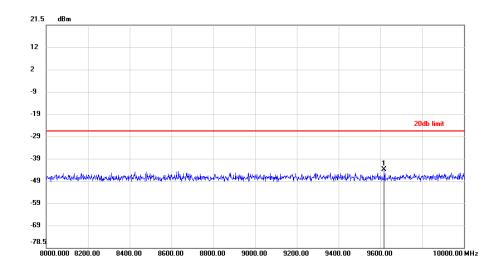


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9619.0000	-43.43	-26.03	-17.40




Report No.: SZEM150600379602

Page: 84 of 137



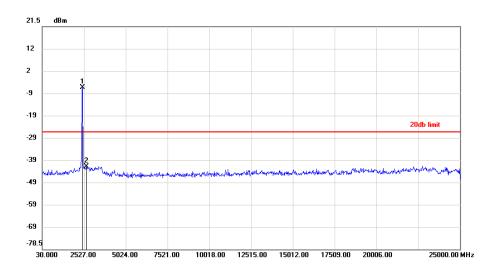

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2429.6170	-5.98	-25.98	20.00
2	2677.6523	-41.40	-25.98	-15.42

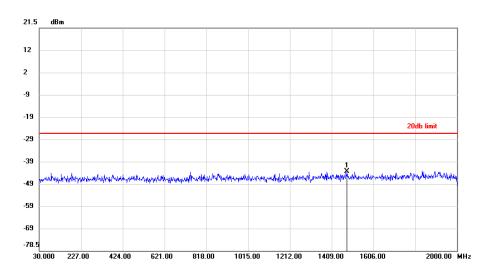


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1482.6123	-42.87	-25.81	-17.06




Report No.: SZEM150600379602

Page: 85 of 137

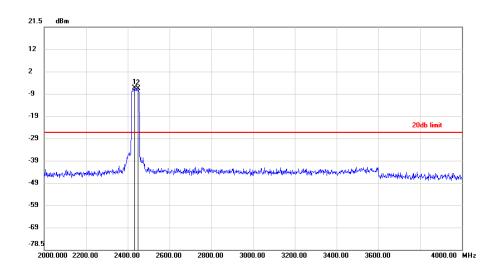

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2432.2000	-5.81	-25.81	20.00
2	2450.7333	-6.09	-25.81	19.72

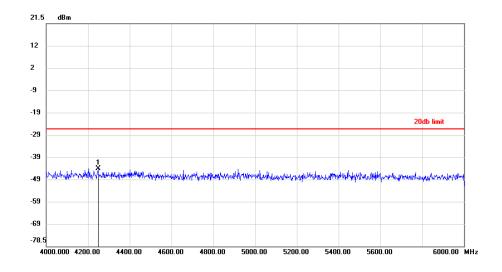


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4248.2667	-43.58	-25.81	-17.77




Report No.: SZEM150600379602

Page: 86 of 137

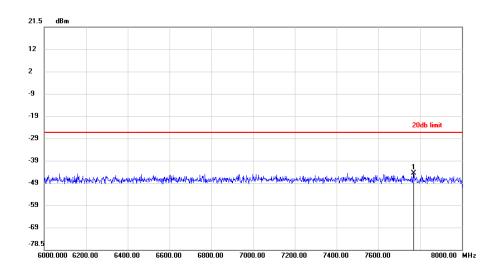

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7766.4667	-44.22	-25.81	-18.41

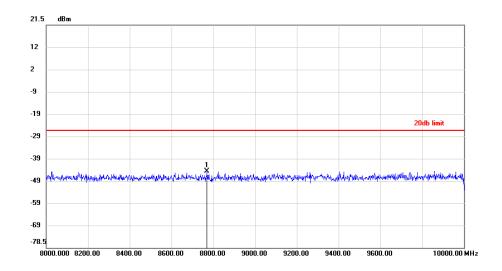


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8771.1333	-44.14	-25.81	-18.33




Report No.: SZEM150600379602

Page: 87 of 137



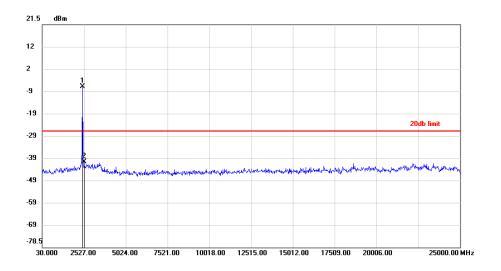

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2439.6050	-6.31	-26.31	20.00
2	2544.4790	-40.22	-26.31	-13.91

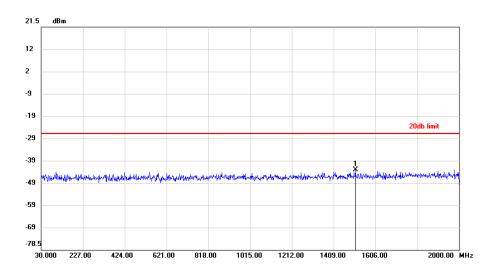


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1512.6877	-42.67	-26.27	-16.40




Report No.: SZEM150600379602

Page: 88 of 137

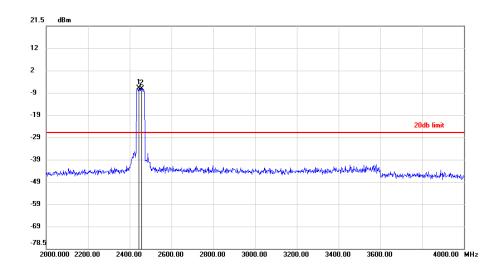

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2444.1333	-6.27	-26.27	20.00
2	2456.2667	-6.68	-26.27	19.59

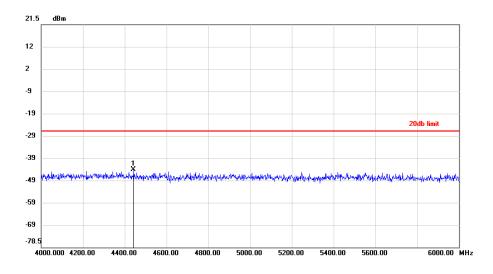


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	4443.1333	-43.70	-26.27	17.43
			1	Co




Report No.: SZEM150600379602

Page: 89 of 137

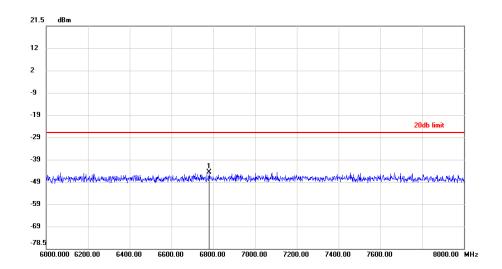

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6780.3333	-44.05	-26.27	-17.78

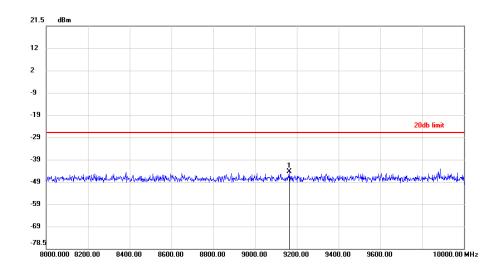

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	9164.4000	-43.94	-26.27	-17.67

#### Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM150600379602

Page: 90 of 137

#### 6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
	Above IGHZ	Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				



Report No.: SZEM150600379602

Page: 91 of 137

#### Test Setup:

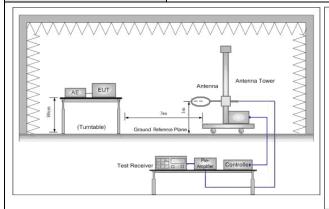

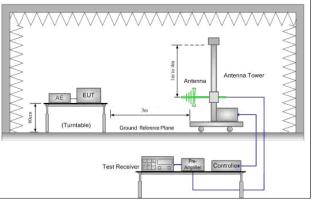


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

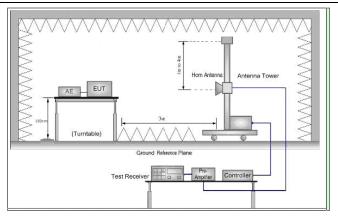


Figure 3. Above 1 GHz

#### Test Procedure:

- a. For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- b. For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to height 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



Report No.: SZEM150600379602

Page: 92 of 137

	<ul> <li>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>h. Test the EUT in the lowest channel, the middle channel, the Highest channel.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.		
	Transmitting mode		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).		
	For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.		
	Only the worst case is recorded in the report.		
Instruments Used:	Refer to section 5.10 for details.		
Test Results:	Pass		




Report No.: SZEM150600379602

Page: 93 of 137

#### 6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting mode	Vertical

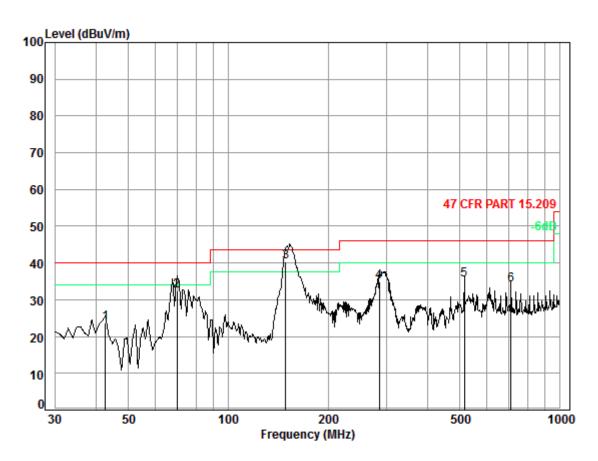

Condition: 47 CFR PART 15.209 3m 3142C Vertical

Job No. : 3796CR Test Mode: TX mode


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
						ID 1//	ID 1//	
	MHz	dB	aB/m	dB	abuv	abuv/m	abuv/m	dB
1	42.60	0.66	11.96	27.31	38.30	23.61	40.00	-16.39
2	69.84	0.80	6.90	27.25	52.03	32.48	40.00	-7.52
3	149.04	1.32	8.91	26.91	56.98	40.30	43.50	-3.20
4	284.98	1.84	13.24	26.44	46.31	34.95	46.00	-11.05
5	515.44	2.62	18.23	27.67	42.33	35.51	46.00	-10.49
6	711.67	2.94	21.60	27.40	36.79	33.93	46.00	-12.07



Report No.: SZEM150600379602

Page: 94 of 137



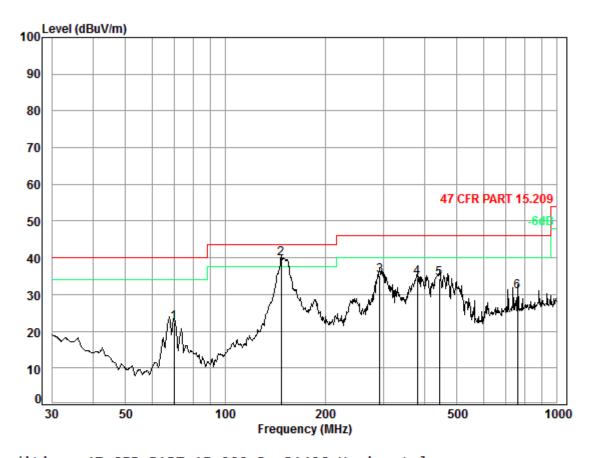

Condition: 47 CFR PART 15.209 3m 3142C Horizontal

Job No. : 3796CR Test Mode: TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	69.84	0.80	6.90	27.25	41.84	22.29	40.00	-17.71
2	147.40	1.31	8.77	26.92	56.66	39.82	43.50	-3.68
3	292.06	1.87	13.55	26.42	46.08	35.08	46.00	-10.92
4	379.91	2.15	16.06	27.01	43.28	34.48	46.00	-11.52
5	441.74	2.38	16.73	27.40	42.71	34.42	46.00	-11.58
6	760.70	3.09	21.83	27.34	33.11	30.69	46.00	-15.31



Report No.: SZEM150600379602

Page: 95 of 137

#### 6.8.2 Transmitter emission above 1GHz

Test mode:	802.	11b	Test cha	ınnel:	Lowest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t Polarization
3387.708	7.18	32.75	38.69	48.48	49.72	74	-24.2	8 Vertical
4824.000	6.46	34.72	39.24	49.88	51.82	74	-22.1	8 Vertical
5947.702	8.00	36.20	39.19	47.71	52.72	74	-21.2	8 Vertical
7236.000	8.96	35.60	39.06	47.50	53.00	74	-21.0	0 Vertical
9648.000	9.97	37.45	37.91	43.37	52.88	74	-21.1	2 Vertical
11622.330	10.44	38.32	38.52	43.20	53.44	74	-20.5	6 Vertical
3225.082	7.51	32.32	38.61	49.77	50.99	74	-23.0	1 Horizontal
4824.000	6.46	34.72	39.24	49.05	50.99	74	-23.0	1 Horizontal
5828.433	7.81	35.97	39.20	47.99	52.57	74	-21.4	3 Horizontal
7236.000	8.96	35.60	39.06	48.28	53.78	74	-20.2	2 Horizontal
9648.000	9.97	37.45	37.91	42.66	52.17	74	-21.8	3 Horizontal
11757.650	10.50	38.46	38.59	42.65	53.02	74	-20.9	8 Horizontal

Test mode:	802	2.11b	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3716.403	6.84	33.09	38.84	48.68	49.77	74	-24.23	Vertical
4874.000	6.57	34.77	39.26	47.92	50.00	74	-24.00	Vertical
5964.939	8.03	36.23	39.19	47.14	52.21	74	-21.79	Vertical
7311.000	9.06	35.52	39.06	47.98	53.50	74	-20.50	Vertical
9648.000	9.97	37.45	37.91	41.61	51.12	74	-22.88	Vertical
11723.670	10.49	38.43	38.57	42.04	52.39	74	-21.61	Vertical
3568.847	6.93	32.97	38.77	47.62	48.75	74	-25.25	Horizontal
4874.000	6.57	34.77	39.26	48.30	50.38	74	-23.62	Horizontal
6034.386	8.07	36.26	39.18	47.45	52.60	74	-21.40	Horizontal
7311.000	9.06	35.52	39.06	47.85	53.37	74	-20.63	Horizontal
9748.000	9.91	37.76	37.85	42.72	52.54	74	-21.46	Horizontal
11422.280	10.37	38.17	38.43	43.08	53.19	74	-20.81	Horizontal



Report No.: SZEM150600379602

Page: 96 of 137

Test mode:	802.	11b	Test cha	ınnel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	t Polarization
3291.078	7.37	32.50	38.65	48.32	49.54	74	-24.4	6 Vertical
4924.000	6.68	34.82	39.28	47.81	50.03	74	-23.9	7 Vertical
6104.642	8.06	36.18	39.17	47.44	52.51	74	-21.4	9 Vertical
7386.000	9.16	35.44	39.05	46.87	52.42	74	-21.5	8 Vertical
9848.000	9.85	38.06	37.79	42.52	52.64	74	-21.3	6 Vertical
11860.170	10.55	38.56	38.64	43.26	53.73	74	-20.2	7 Vertical
3397.525	7.16	32.77	38.69	48.25	49.49	74	-24.5	1 Horizontal
4924.000	6.68	34.82	39.28	48.41	50.63	74	-23.3	7 Horizontal
6034.386	8.07	36.26	39.18	48.30	53.45	74	-20.5	5 Horizontal
7386.000	9.16	35.44	39.05	43.45	49.00	74	-25.0	0 Horizontal
9848.000	9.85	38.06	37.79	41.88	52.00	74	-22.0	0 Horizontal
11757.650	10.50	38.46	38.59	42.48	52.85	74	-21.1	5 Horizontal

Test mode:	802.	11g	Test cha	ınnel:	Lo	owest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)		Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t Polarization
3641.878	6.89	33.03	38.80	47.90		49.02	74	-24.9	8 Vertical
4824.000	6.46	34.72	39.24	49.06		51.00	74	-23.0	0 Vertical
5921.940	7.96	36.15	39.19	47.71		52.63	74	-21.3	7 Vertical
7236.000	8.96	35.60	39.06	47.98		53.48	74	-20.5	2 Vertical
9648.000	9.97	37.45	37.91	42.23		51.74	74	-22.2	6 Vertical
11128.630	10.31	38.11	38.29	42.83		52.96	74	-21.0	4 Vertical
3368.157	7.22	32.70	38.68	47.13		48.37	74	-25.6	3 Horizontal
4824.000	6.46	34.72	39.24	48.46		50.40	74	-23.6	60 Horizontal
6034.386	8.07	36.26	39.18	47.20		52.35	74	-21.6	5 Horizontal
7236.000	8.96	35.60	39.06	47.86		53.36	74	-20.6	Horizontal
9648.000	9.97	37.45	37.91	41.92		51.43	74	-22.5	7 Horizontal
11128.630	10.31	38.11	38.29	42.49		52.62	74	-21.3	8 Horizontal



Report No.: SZEM150600379602

Page: 97 of 137

Test mode:	802.	11g	Test cha	ınnel:	Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3631.354	6.89	33.02	38.80	48.44	49.55	74	-24.4	5 Vertical
4874.000	6.57	34.77	39.26	48.92	51.00	74	-23.0	0 Vertical
6211.563	8.03	36.07	39.16	48.05	52.99	74	-21.0	1 Vertical
7311.000	9.06	35.52	39.06	48.31	53.83	74	-20.1	7 Vertical
9748.000	9.91	37.76	37.85	41.92	51.74	74	-22.2	6 Vertical
11422.280	10.37	38.17	38.43	43.30	53.41	74	-20.5	9 Vertical
3457.032	7.05	32.84	38.72	48.37	49.54	74	-24.4	6 Horizontal
4874.000	6.57	34.77	39.26	49.20	51.28	74	-22.7	2 Horizontal
6193.614	8.04	36.09	39.16	48.68	53.65	74	-20.3	5 Horizontal
7311.000	9.06	35.52	39.06	44.25	49.77	74	-24.2	3 Horizontal
9748.000	9.91	37.76	37.85	41.92	51.74	74	-22.2	6 Horizontal
11422.280	10.37	38.17	38.43	43.30	53.41	74	-20.5	9 Horizontal

Test mode:	802	2.11g	Test cha	ınnel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t Polarization
3243.802	7.47	32.37	38.62	48.02	49.24	74	-24.7	6 Vertical
4824.000	6.46	34.72	39.24	48.97	50.91	74	-23.0	9 Vertical
5913.378	7.95	36.13	39.19	47.95	52.84	74	-21.1	6 Vertical
7386.000	9.16	35.44	39.05	48.19	53.74	74	-20.2	6 Vertical
9848.000	9.85	38.06	37.79	42.01	52.13	74	-21.8	7 Vertical
11757.650	10.50	38.46	38.59	43.24	53.61	74	-20.3	9 Vertical
3407.371	7.15	32.79	38.70	48.35	49.59	74	-24.4	1 Horizontal
4924.000	6.68	34.82	39.28	51.14	53.36	74	-20.6	4 Horizontal
5964.939	8.03	36.23	39.19	48.02	53.09	74	-20.9	1 Horizontal
7386.000	9.16	35.44	39.05	47.40	52.95	74	-21.0	5 Horizontal
9848.000	9.85	38.06	37.79	41.35	51.47	74	-22.5	3 Horizontal
11740.650	10.50	38.44	38.58	43.00	53.36	74	-20.6	4 Horizontal



Report No.: SZEM150600379602

Page: 98 of 137

Test mode:	802.	.11n(HT20)	Test cha	nnel:	Lowest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3647.151	6.88	33.04	38.81	48.41	49.52	74	-24.48	S Vertical
4824.000	6.46	34.72	39.24	48.23	50.17	74	-23.83	S Vertical
5999.562	8.08	36.30	39.18	47.73	52.93	74	-21.07	Vertical
7236.000	8.96	35.60	39.06	47.93	53.43	74	-20.57	Vertical
9648.000	9.97	37.45	37.91	41.21	50.72	74	-23.28	S Vertical
10842.530	10.19	37.96	38.14	43.95	53.96	74	-20.04	Vertical
3673.633	6.87	33.06	38.82	48.83	49.94	74	-24.06	Horizontal
4824.000	6.46	34.72	39.24	50.18	52.12	74	-21.88	B Horizontal
5999.562	8.08	36.30	39.18	46.81	52.01	74	-21.99	Horizontal
7236.000	8.96	35.60	39.06	47.41	52.91	74	-21.09	Horizontal
9648.000	9.97	37.45	37.91	42.15	51.66	74	-22.34	Horizontal
11825.890	10.53	38.53	38.62	42.65	53.09	74	-20.91	Horizontal

Test mode:	802.	11n(HT20)	Test cha	ınnel:	Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	
3705.664	6.85	33.08	38.83	48.73	49.83	74	-24.17	7 Vertical
4874.000	6.57	34.77	39.26	49.36	51.44	74	-22.56	6 Vertical
5930.516	7.97	36.17	39.19	48.47	53.42	74	-20.58	3 Vertical
7311.000	9.06	35.52	39.06	47.39	52.91	74	-21.09	Vertical
9748.000	9.91	37.76	37.85	42.82	52.64	74	-21.36	6 Vertical
11422.280	10.37	38.17	38.43	43.15	53.26	74	-20.74	1 Vertical
3652.432	6.88	33.04	38.81	48.59	49.70	74	-24.30	) Horizontal
4874.000	6.57	34.77	39.26	48.51	50.59	74	-23.41	Horizontal
5896.291	7.92	36.10	39.19	48.50	53.33	74	-20.67	7 Horizontal
7311.000	9.06	35.52	39.06	47.91	53.43	74	-20.57	7 Horizontal
9748.000	9.91	37.76	37.85	42.09	51.91	74	-22.09	Horizontal
11323.540	10.35	38.14	38.38	43.28	53.39	74	-20 <mark>.6</mark> 1	Horizontal



Report No.: SZEM150600379602

Page: 99 of 137

Test mode:	802	.11n(HT20)	Test cha	ınnel:	Highest	Remark:	Р	eak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3694.956	6.86	33.07	38.83	46.34	47.44	74	-26.56	Vertical
4924.000	6.68	34.82	39.28	47.36	49.58	74	-24.42	Vertical
6008.249	8.08	36.29	39.18	48.58	53.77	74	-20.23	Vertical
7386.000	9.16	35.44	39.05	46.29	51.84	74	-22.16	Vertical
9848.000	9.85	38.06	37.79	43.32	53.44	74	-20.56	Vertical
11689.790	10.47	38.39	38.56	41.65	51.95	74	-22.05	Vertical
3319.774	7.32	32.57	38.66	49.22	50.45	74	-23.55	Horizontal
4924.000	6.68	34.82	39.28	49.36	51.58	74	-22.42	Horizontal
6175.716	8.04	36.11	39.17	48.05	53.03	74	-20.97	Horizontal
7386.000	9.16	35.44	39.05	46.70	52.25	74	-21.75	Horizontal
9848.000	9.85	38.06	37.79	42.52	52.64	74	-21.36	Horizontal
11422.280	10.37	38.17	38.43	43.15	53.26	74	-20.74	Horizontal

Test mode:	802	.11n(HT40)	Test cha	ınnel:	Lo	west	Remark:	Remark: Pe		eak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)		Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t	Polarization	
3467.050	7.03	32.86	38.73	48.13		49.29	74	-24.7	'1	Vertical	
4844.000	6.51	34.74	39.25	49.31		51.31	74	-22.6	9	Vertical	
6016.949	8.08	36.28	39.18	47.08		52.26	74	-21.7	'4	Vertical	
7266.000	9.00	35.57	39.06	47.43		52.94	74	-21.0	6	Vertical	
9688.000	9.94	37.57	37.88	42.65		52.28	74	-21.7	'2	Vertical	
11825.890	10.53	38.53	38.62	42.63		53.07	74	-20.9	3	Vertical	
3792.453	6.80	33.14	38.87	47.96		49.03	74	-24.9	7	Horizontal	
4844.000	6.51	34.74	39.25	48.91		50.91	74	-23.0	9	Horizontal	
5999.562	8.08	36.30	39.18	47.79		52.99	74	-21.0	)1	Horizontal	
7266.000	9.00	35.57	39.06	44.23		49.74	74	-24.2	26	Horizontal	
9688.000	9.94	37.57	37.88	42.50		52.13	74	-21.8	37	Horizontal	
11389.270	10.37	38.15	38.41	42.97		53.08	74	-20.9	2	Horizontal	



Report No.: SZEM150600379602

Page: 100 of 137

Test mode:	802	.11n(HT40)	Test cha	ınnel:	Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Ove Limi (dB)	t Polarization
3417.246	7.13	32.80	38.70	48.97	50.20	74	-23.8	0 Vertical
4874.000	6.57	34.77	39.26	48.80	50.88	74	-23.1	2 Vertical
6016.949	8.08	36.28	39.18	48.08	53.26	74	-20.7	4 Vertical
7311.000	9.06	35.52	39.06	44.29	49.81	74	-24.1	9 Vertical
9748.000	9.91	37.76	37.85	42.46	52.28	74	-21.7	2 Vertical
11128.630	10.31	38.11	38.29	42.41	52.54	74	-21.4	6 Vertical
3548.251	6.94	32.94	38.76	48.07	49.19	74	-24.8	1 Horizontal
4874.000	6.57	34.77	39.26	48.85	50.93	74	-23.0	7 Horizontal
6016.949	8.08	36.28	39.18	48.08	53.26	74	-20.7	4 Horizontal
7311.000	9.06	35.52	39.06	48.26	53.78	74	-20.2	2 Horizontal
9748.000	9.91	37.76	37.85	43.07	52.89	74	-21.1	1 Horizontal
10811.200	10.17	37.93	38.13	43.72	53.69	74	-20.3	1 Horizontal

Test mode:	802.	802.11n(HT40)		ınnel:	Highest	Remark:	nark: Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	
3615.625	6.90	33.01	38.79	47.56	48.68	74	-25.32	2 Vertical
4904.000	6.64	34.81	39.27	49.99	52.17	74	-21.83	3 Vertical
6069.413	8.06	36.22	39.18	46.95	52.05	74	-21.9	5 Vertical
7356.000	9.12	35.47	39.05	42.34	47.88	74	-26.12	2 Vertical
9808.000	9.88	37.94	37.81	41.81	51.82	74	-22.18	8 Vertical
11571.990	10.42	38.28	38.50	41.97	52.17	74	-21.83	3 Vertical
3329.395	7.30	32.60	38.66	47.87	49.11	74	-24.89	9 Horizontal
4904.000	6.64	34.81	39.27	47.40	49.58	74	-24.42	2 Horizontal
5982.226	8.05	36.27	39.19	47.19	52.32	74	-21.68	B Horizontal
7356.000	9.12	35.47	39.05	43.15	48.69	74	-25.3°	1 Horizontal
9808.000	9.88	37.94	37.81	41.46	51.47	74	-22.53	3 Horizontal
12033.020	10.66	38.74	38.73	41.49	52.16	74	-21.84	4 Horizontal



Report No.: SZEM150600379602

Page: 101 of 137

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM150600379602

Page: 102 of 137

#### 6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10 2013						
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)						
Limit:	Frequency	Limit (dBuV/m @3m)	Remark				
	30MHz-88MHz	40.0	Quasi-peak Value				
	88MHz-216MHz	43.5	Quasi-peak Value				
	216MHz-960MHz	46.0	Quasi-peak Value				
	960MHz-1GHz	54.0	Quasi-peak Value				
	Above 1GHz	54.0	Average Value				
	Above IGHZ	74.0	Peak Value				
Test Setup:							

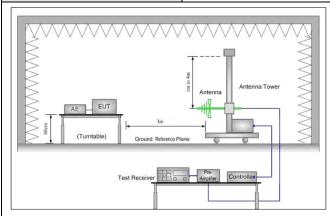

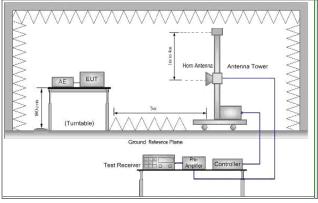


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM150600379602

Page: 103 of 137

Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.				
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.				
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.				
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.				
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.				
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel				
	g. Test the EUT in the lowest channel, the Highest channel				
	h. Repeat above procedures until all frequencies measured was complete.				
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.				
	Transmitting mode				
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).				
	Only the worst case is recorded in the report.				
Instruments Used:	Refer to section 5.10 for details.				
Test Results:	Pass				




Report No.: SZEM150600379602

Page: 104 of 137

Test plot as follows:

Test mode: 802.11b Test channel: Lowest Remark: Peak Vertical

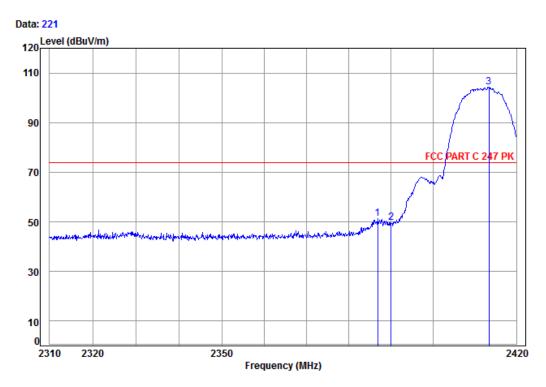

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3796CR

Mode: : 2412 B Band edge

over	Limit		read	rreamp	Ant	cabie		
Limit	Line	Level	Level	Factor	Factor	Loss	Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	_
-22.75	74.00	51.25	52.49	38.46	32.32	4.90	2386.79	1
-24.30	74.00	49.70	50.91	38.46	32.35	4.90	2390.00	2
30.46	74.00	104.46	105.58	38.46	32.41	4.93	2413.37	3 рр


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600379602

Page: 105 of 137

Test mode: 802.11b Test channel: Lowest Remark: Peak Horizontal

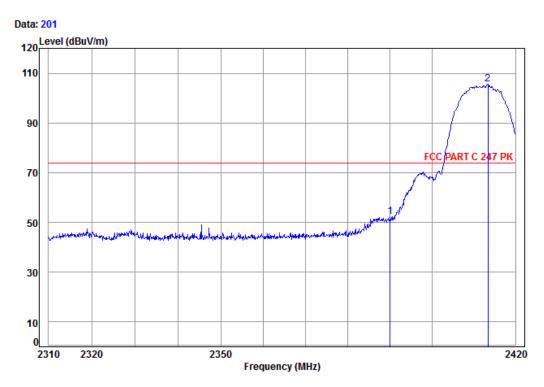

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3796CR

Mode: : 2412 B Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 32.35 38.46 53.65 52.44 74.00 -21.56 2390.00 4.93 32.41 38.46 106.64 105.52 74.00 31.52 2 pp 2413.37



Report No.: SZEM150600379602

Page: 106 of 137

Test mode: 802.11b Test channel: Lowest Remark: Average Vertical

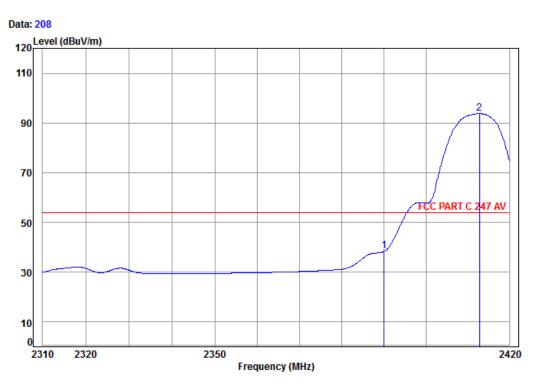

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3796CR

Mode: : 2412 B Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 54.00 -15.45 2390.00 4.90 38.46 39.76 38.55 1 32.35 4.93 32.41 38.46 94.87 93.75 2 pp 2412.81 54.00 39.75



Report No.: SZEM150600379602

Page: 107 of 137

Test mode: 802.11b Test channel: Lowest Remark: Average Horizontal

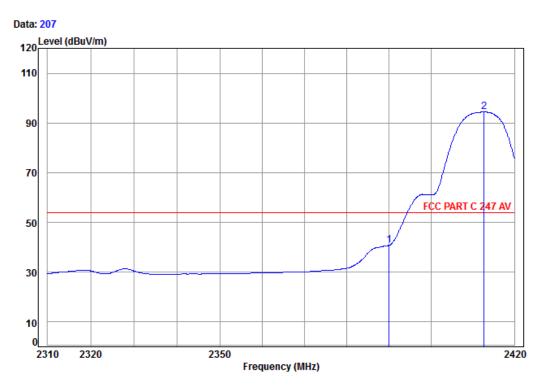

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3796CR

Mode: : 2412 B Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 42.07 40.86 2390.00 32.35 54.00 -13.14 4.93 32.41 38.46 95.53 94.41 54.00 40.41 2 pp 2412.69



Report No.: SZEM150600379602

Page: 108 of 137

Test mode: 802.11b Test channel: Highest Remark: Peak Vertical

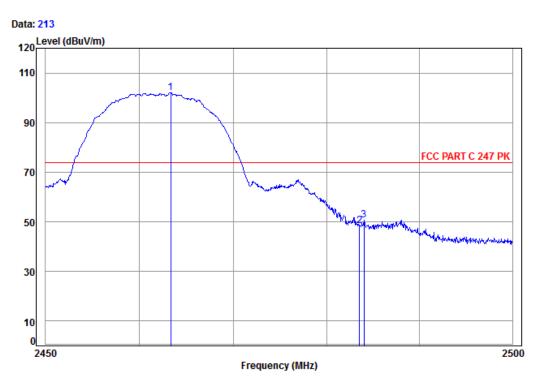

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3796CR

1

3

Mode: : 2462 B Band edge

Cable Ant Preamp Read Limit 0ver Frea Loss Factor Factor Level Level Line Limit MHz dB dB/m dBuV dBuV/m dBuV/m 2463.30 5.00 32.43 38.46 103.13 102.10 74.00 28.10 32.44 38.47 49.54 48.54 74.00 -25.46 2483.50 5.03 2483.99 5.03 32.44 38.47 51.65 50.65 74.00 -23.35






Report No.: SZEM150600379602

Page: 109 of 137

Test mode: 802.11b Test channel: Highest Remark: Peak Horizontal

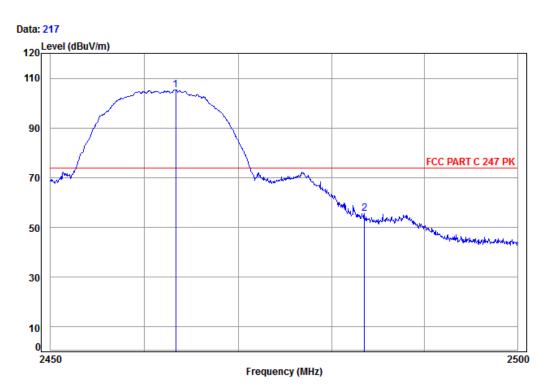

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3796CR

Mode: : 2462 B Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 38.46 106.47 105.44 74.00 31.44 2463.30 5.00 32.43 2483.50 5.03 32.44 38.47 56.61 55.61 74.00 -18.39



Report No.: SZEM150600379602

Page: 110 of 137

Test mode: 802.11b Test channel: Highest Remark: Average Vertical

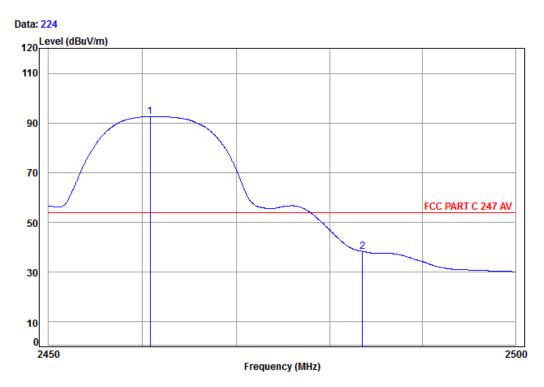

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3796CR

Mode: : 2462 B Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 5.00 38.46 93.54 92.51 54.00 38.51 1 pp 2460.81 32.43 2483.50 5.03 32.44 38.47 39.41 38.41 54.00 -15.59



Report No.: SZEM150600379602

Page: 111 of 137

Test mode: 802.11b Test channel: Highest Remark: Average Horizontal

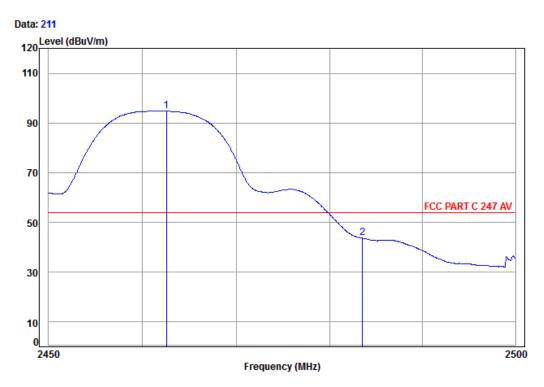

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3796CR

Mode: : 2462 B Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 5.00 38.46 95.76 94.73 54.00 40.73 2462.56 32.43 2483.50 5.03 32.44 38.47 44.68 43.68 54.00 -10.32



Report No.: SZEM150600379602

Page: 112 of 137

Test mode: 802.11g Test channel: Lowest Remark: Peak Vertical

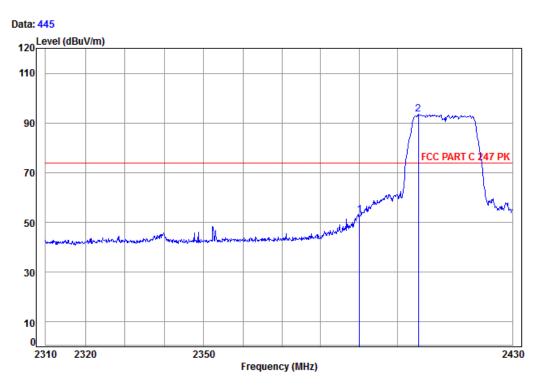

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3796CR

Mode: : 2412 G Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 54.29 53.08 74.00 -20.92 2390.00 32.35 4.92 32.41 38.46 94.58 93.45 74.00 19.45 2 pp 2405.39



Report No.: SZEM150600379602

Page: 113 of 137

Test mode: 802.11g Test channel: Lowest Remark: Peak Horizontal

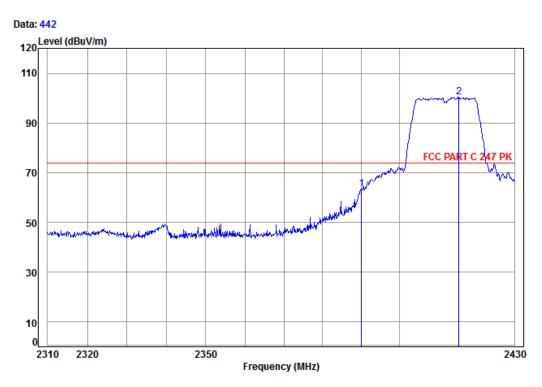

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3796CR

Mode: : 2412 G Band edge


Ant Preamp Limit Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 64.77 63.56 74.00 -10.44 2390.00 32.35 4.94 32.42 38.46 101.42 100.32 74.00 26.32 2 pp 2415.40



Report No.: SZEM150600379602

Page: 114 of 137

Test mode: 802.11g Test channel: Lowest Remark: Average Vertical

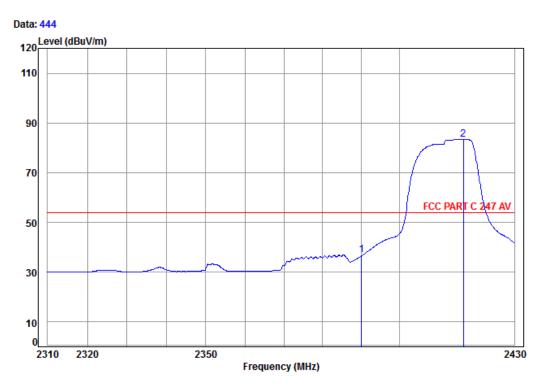

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3796CR

Mode: : 2412 G Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 54.00 -17.11 2390.00 4.90 38.46 38.10 36.89 1 32.35 4.94 32.42 38.46 84.47 83.37 2 pp 2416.62 54.00 29.37



Report No.: SZEM150600379602

Page: 115 of 137

Test mode: 802.11g Test channel: Lowest Remark: Average Horizontal

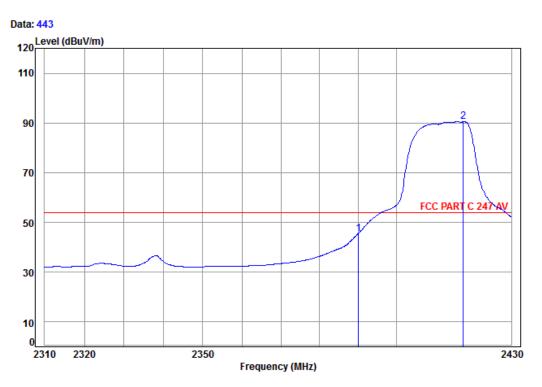

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3796CR

Mode: : 2412 G Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 46.70 45.49 54.00 2390.00 32.35 -8.51 4.94 32.42 38.46 91.53 90.43 2 pp 2417.36 54.00



Report No.: SZEM150600379602

Page: 116 of 137

Test mode: 802.11g Test channel: Highest Remark: Peak Vertical

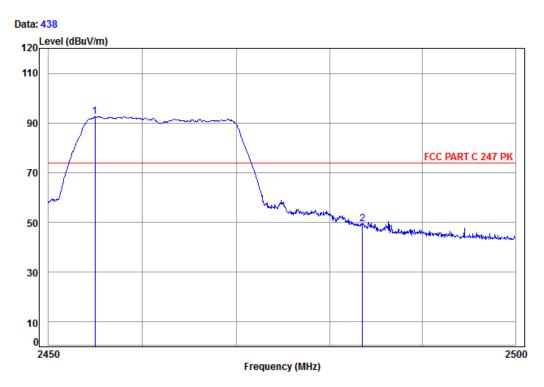

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3796CR

Mode: : 2462 G Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.99 38.46 93.60 92.56 74.00 18.56 2454.96 32.43 2483.50 5.03 32.44 38.47 50.25 49.25 74.00 -24.75



Report No.: SZEM150600379602

Page: 117 of 137

Test mode: 802.11g Test channel: Highest Remark: Peak Horizontal

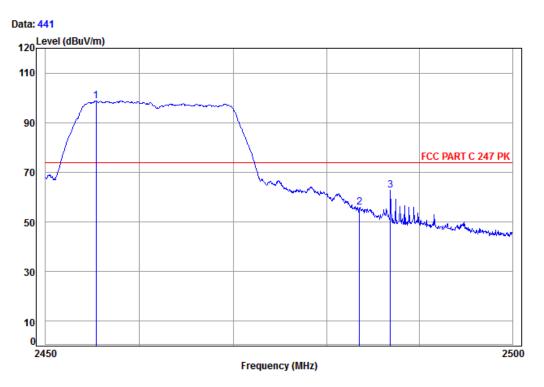

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3796CR

Mode: : 2462 G Band edge

		Cable	Ant	Preamp	Kead		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2455.35	4.99	32.43	38.46	99.87	98.83	74.00	24.83
2	2483.50	5.03	32.44	38.47	56.93	55.93	74.00	-18.07
3	2486.85	5.03	32.44	38.47	63.67	62.67	74.00	-11.33


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600379602

Page: 118 of 137

Test mode: 802.11g Test channel: Highest Remark: Average Vertical

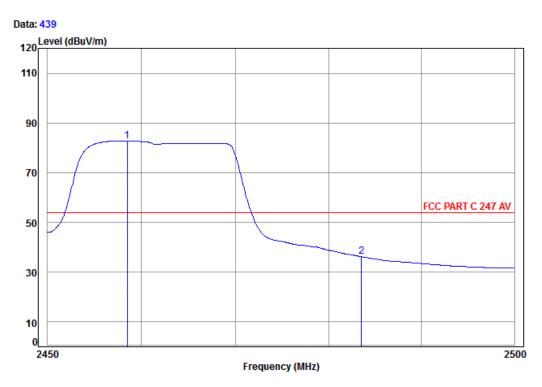

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3796CR

Mode: : 2462 G Band edge

Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.99 38.46 54.00 28.70 2458.48 32.43 83.74 82.70 2483.50 5.03 32.44 38.47 37.30 36.30 54.00 -17.70






Report No.: SZEM150600379602

Page: 119 of 137

Test mode: 802.11g Test channel: Highest Remark: Average Horizontal

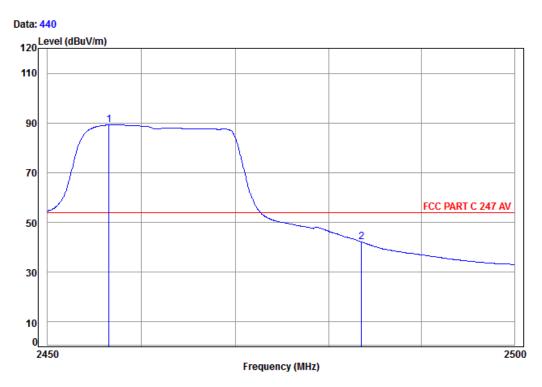

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3796CR

Mode: : 2462 G Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 54.00 35.17 4.99 38.46 90.21 89.17 2456.54 32.43 2483.50 5.03 32.44 38.47 43.15 42.15 54.00 -11.85



Report No.: SZEM150600379602

Page: 120 of 137

Test mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Vertical

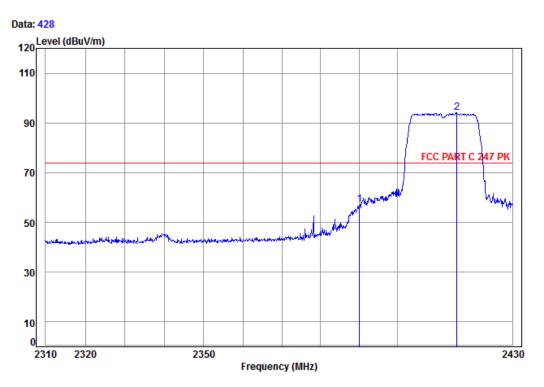

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3796CR

Mode: : 2412 N20 Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 58.32 57.11 74.00 -16.89 2390.00 32.35 4.94 32.42 38.46 95.26 94.16 74.00 20.16 2 pp 2415.40



Report No.: SZEM150600379602

Page: 121 of 137

Test mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Horizontal

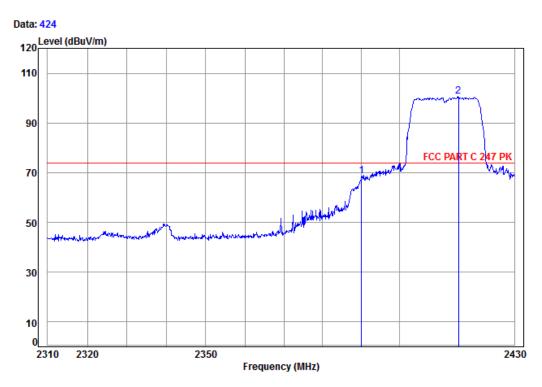

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3796CR

Mode: : 2412 N20 Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 69.89 68.68 74.00 2390.00 32.35 -5.32 4.94 32.42 38.46 101.71 100.61 74.00 26.61 2 pp 2415.28



Report No.: SZEM150600379602

Page: 122 of 137

Test mode: 802.11n(HT20) Test channel: Lowest Remark: Average Vertical

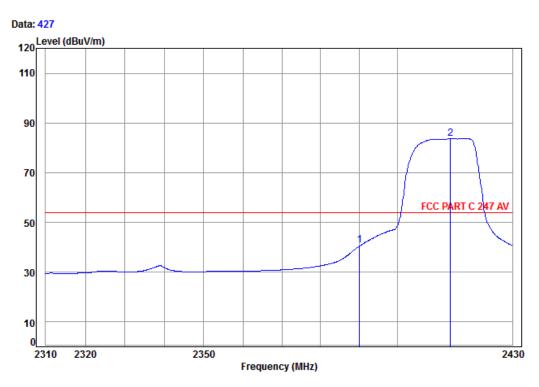

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3796CR

Mode: : 2412 N20 Band edge


Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 41.97 40.76 54.00 -13.24 1 2390.00 32.35 4.93 32.41 38.46 84.88 83.76 54.00 29.76 2 pp 2413.69



Report No.: SZEM150600379602

Page: 123 of 137

802.11n(HT20) Test channel: Test mode: Remark: Horizontal Lowest Average

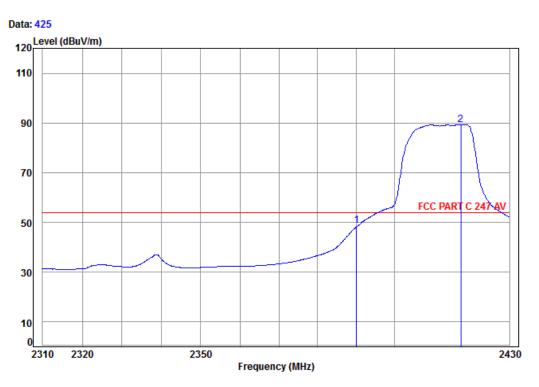

: chamber Site

Condition: FCC PART C 247 AV 3m Horizontal

: 3796CR

1

Mode: : 2412 N20 Band edge


Ant Preamp Limit 0ver Read Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 49.77 48.56 54.00 2390.00 32.35 -5.44 4.94 32.42 38.46 90.35 89.25 2 pp 2417.24 54.00 35.25



Report No.: SZEM150600379602

Page: 124 of 137

Test mode: 802.11n(HT20) Test channel: Highest Remark: Peak Vertical

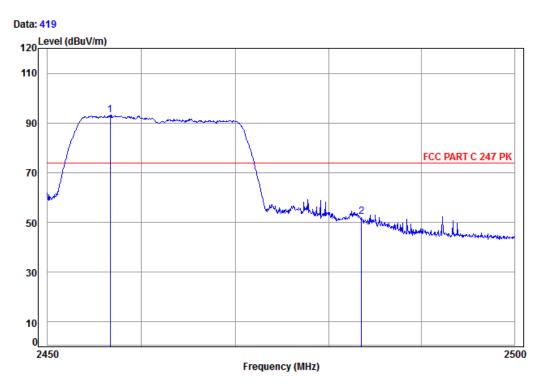

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3796CR

Mode: : 2462 N20 Band edge


Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.99 38.46 94.18 93.14 74.00 19.14 2456.64 32.43 2483.50 5.03 32.44 38.47 53.24 52.24 74.00 -21.76



Report No.: SZEM150600379602

Page: 125 of 137

Test mode: 802.11n(HT20) Test channel: Highest Remark: Peak Horizontal

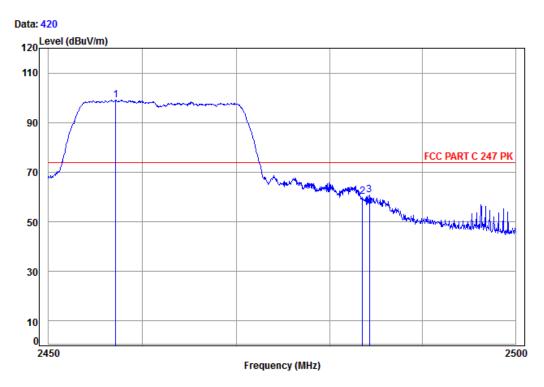

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3796CR

Mode: : 2462 N20 Band edge

Ant Preamp Cable Read Limit Over Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 38.46 100.10 1 2457.14 4.99 32.43 99.06 74.00 25.06 2483.50 5.03 32.44 38.47 61.28 60.28 74.00 -13.72 3 2484.24 5.03 32.44 38.47 61.92 60.92 74.00 -13.08


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600379602

Page: 126 of 137

Test mode: 802.11n(HT20) Test channel: Highest Remark: Average Vertical

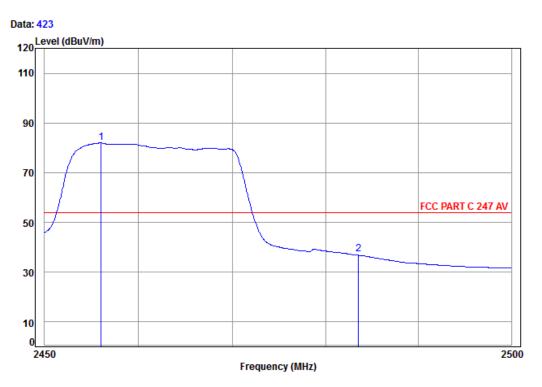

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3796CR

Mode: : 2462 N20 Band edge


Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dΒ dBuV dBuV/m dBuV/m dB 4.99 38.46 83.00 81.96 2456.00 32.43 54.00 27.96 2483.50 5.03 32.44 38.47 38.29 37.29 54.00 -16.71



Report No.: SZEM150600379602

Page: 127 of 137

Test mode: 802.11n(HT20) Test channel: Highest Remark: Average Horizontal

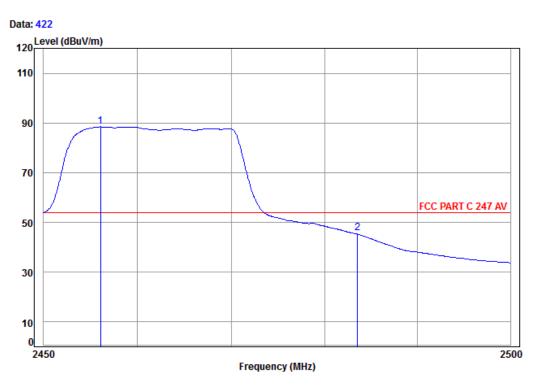

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3796CR

Mode: : 2462 N20 Band edge


Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.99 38.46 89.52 88.48 1 pp 2456.05 32.43 54.00 34.48 2483.50 5.03 32.44 38.47 46.92 45.92 54.00



Report No.: SZEM150600379602

Page: 128 of 137

Test mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Vertical

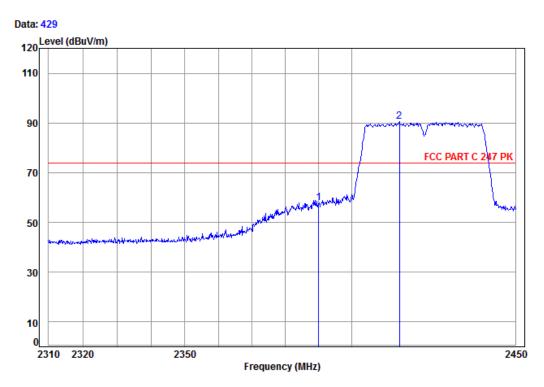

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3796CR

Mode: : 2422 N40 Band edge

Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 74.00 -16.15 2390.00 4.90 38.46 59.06 57.85 32.35 4.93 32.42 38.46 91.56 90.45 2 pp 2414.51 74.00 16.45






Report No.: SZEM150600379602

Page: 129 of 137

Test mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Horizontal

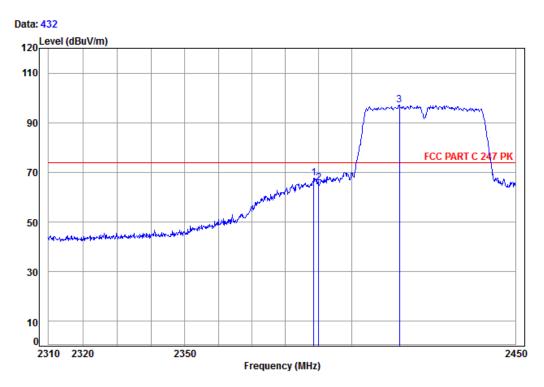

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3796CR

Mode: : 2422 N40 Band edge

		Cable	Ant	Preamp	Kead		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2388.51	4.90	32.34	38.46	68.95	67.73	74.00	-6.27
2	2390.00	4.90	32.35	38.46	66.97	65.76	74.00	-8.24
3 p	p 2414.51	4.93	32.42	38.46	98.36	97.25	74.00	23.25


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600379602

Page: 130 of 137

802.11n(HT40) Test channel: Test mode: Remark: Vertical Lowest Average

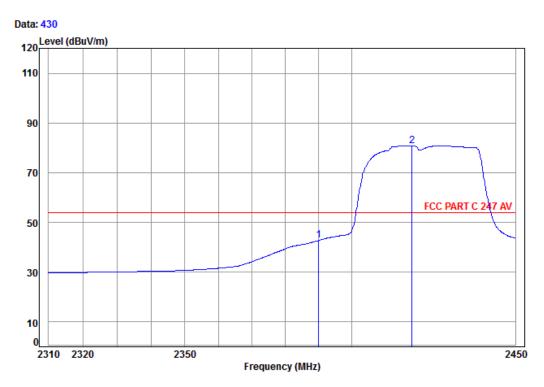

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

: 3796CR

1

Mode: : 2422 N40 Band edge


Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 54.00 -11.14 4.90 38.46 44.07 42.86 2390.00 32.35 4.94 32.42 38.46 81.92 80.82 54.00 26.82 2 pp 2418.35



Report No.: SZEM150600379602

Page: 131 of 137

Test mode: 802.11n(HT40) Test channel: Lowest Remark: Average Horizontal

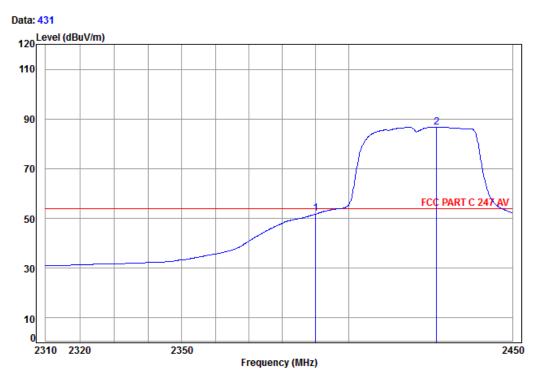

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3796CR

Mode: : 2422 N40 Band edge


Ant Preamp Limit 0ver Read Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 4.90 38.46 53.32 52.11 54.00 2390.00 32.35 -1.89 4.95 32.42 38.46 87.81 86.72 54.00 32.72 2 pp 2426.76



Report No.: SZEM150600379602

Page: 132 of 137

Test mode: 802.11n(HT40) Test channel: Highest Remark: Peak Vertical

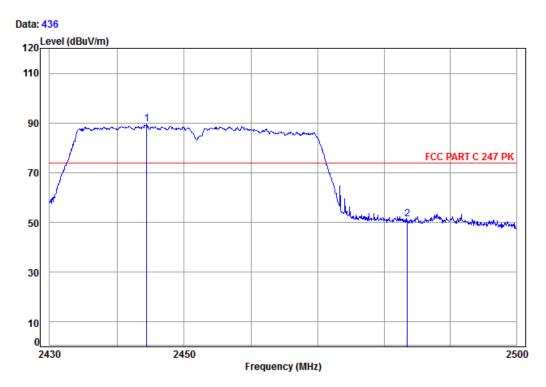

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3796CR

Mode: : 2452 N40 Band edge


Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dΒ dBuV dBuV/m dBuV/m dB 4.98 38.46 90.49 89.44 74.00 15.44 2444.40 32.43 2483.50 5.03 32.44 38.47 52.24 51.24 74.00 -22.76



Report No.: SZEM150600379602

Page: 133 of 137

Test mode: 802.11n(HT40) Test channel: Highest Remark: Peak Horizontal

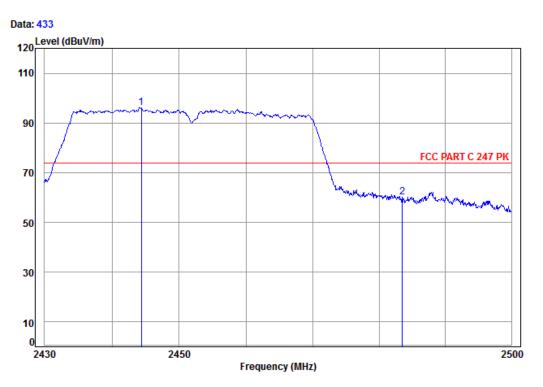

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 3796CR

Mode: : 2452 N40 Band edge


Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dΒ dBuV dBuV/m dBuV/m dB 4.98 38.46 97.17 96.12 74.00 22.12 2444.33 32.43 2483.50 5.03 32.44 38.47 61.11 60.11 74.00 -13.89



Report No.: SZEM150600379602

Page: 134 of 137

Test mode: 802.11n(HT40) Test channel: Highest Remark: Average Vertical

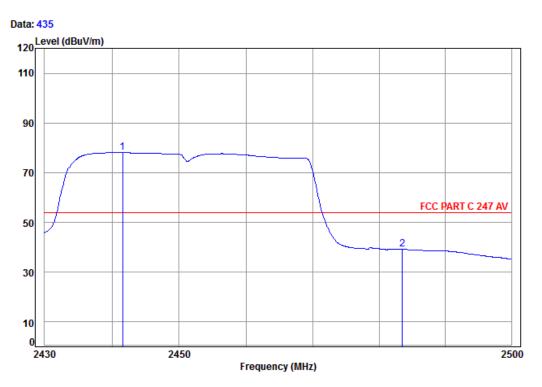

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3796CR

Mode: : 2452 N40 Band edge


Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line Limit MHz dB dB/m dΒ dBuV dBuV/m dBuV/m dB 38.46 79.10 78.04 54.00 24.04 2441.55 4.97 32.43 2483.50 5.03 32.44 38.47 40.13 39.13 54.00 -14.87



Report No.: SZEM150600379602

Page: 135 of 137

Test mode: 802.11n(HT40) Test channel: Highest Remark: Average Horizontal

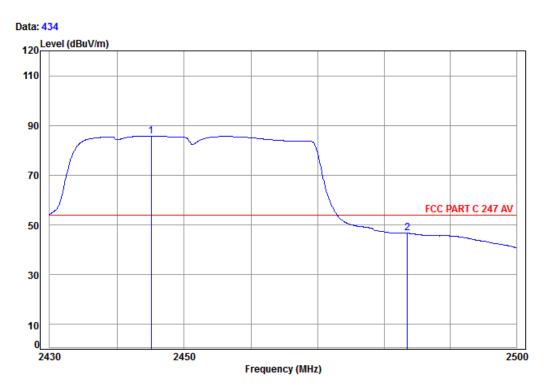

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3796CR

Mode: : 2452 N40 Band edge

Cable Ant Preamp Read Limit 0ver Loss Factor Factor Freq Level Level Line Limit MHz dB dB/m dBuV dBuV/m dBuV/m dB 2445.09 4.98 32.43 38.46 86.74 85.69 54.00 31.69 5.03 32.44 38.47 47.71 46.71 2483.50 54.00

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM150600379602

Page: 136 of 137


#### 7 Photographs - EUT Test Setup

Test model No.: OMNI S6

#### 7.1 Conducted Emission




#### 7.2 Radiated Spurious Emission

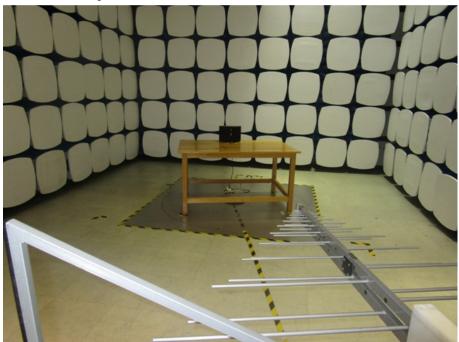



Report No.: SZEM150600379602

Page: 137 of 137

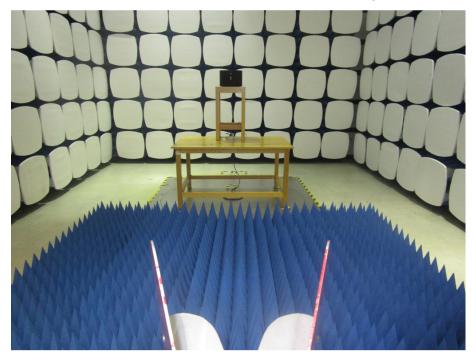

#### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1506003796CR.