

DATE: 01 February 2011

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for


Visonic Ltd.


Equipment under test:

**Wireless PowerCode Digital Ceiling
Mount PIR Detector**

Disc MCW (315)

Written by: 
D. Shidlow, Documentation

Approved by: 
A. Sharabi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written
permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

TABLE OF CONTENTS

1.	GENERAL INFORMATION-----	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility.....	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION -----	7
2.1	Justification	7
2.2	Special Accessories	7
2.3	Equipment Modifications	7
2.4	Configuration of Tested System	7
3.	RADIATED MEASUREMENT TEST SET-UP PHOTO-----	8
4.	AVERAGE FACTOR CALCULATION-----	9
4.1	Test Instrumentation Used	11
5.	PERIODIC OPERATION -----	12
5.1	Specification	12
5.2	Requirements	12
5.3	Results.....	12
6.	FIELD STRENGTH OF FUNDAMENTAL -----	16
6.1	Test Specification	16
6.2	Test Procedure	16
6.3	Measured Data	16
6.4	Test Instrumentation Used, Field Strength of Fundamental.....	20
7.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	21
7.1	Test Specification	21
7.2	Test Procedure	21
7.3	Measured Data	21
7.4	Test Instrumentation Used, Radiated Measurements.....	22
7.5	Field Strength Calculation	22
8.	SPURIOUS RADIATED EMISSION-----	23
8.1	Test Specification	23
8.2	Test Procedure	23
8.3	Test Data	24
8.4	Test Instrumentation Used, Radiated Measurements.....	26
9.	BANDWIDTH-----	27
9.1	Test procedure	27
9.2	Results table.....	28
9.3	Test Equipment Used.....	29
10.	11. APPENDIX A - CORRECTION FACTORS-----	30
10.1	Correction factors for CABLE	30
10.2	Correction factors for CABLE	31
10.3	Correction factors for CABLE	32
10.4	Correction factors for LOG PERIODIC ANTENNA	33
10.5	Correction factors for LOG PERIODIC ANTENNA	34
10.6	Correction factors for BICONICAL ANTENNA.....	35
10.7	Correction factors for ACTIVE LOOP ANTENNA	36
11.	COMPARISON REQUIREMENTS FCC WITH INDUSTRY CANADA -----	37

1. General Information

1.1 Administrative Information

Manufacturer:	Visonic Ltd.
Manufacturer's Address:	24 Habarzel ST. Tel Aviv 69710 Israel Tel: +936-03-645-6789 Fax: +936-03-645-6788
Manufacturer's Representative:	Arik Elshtein
Equipment Under Test (E.U.T):	Wireless PowerCode Digital Ceiling Mount PIR Detector
Equipment Model No.:	Disc MCW (315)
Equipment Serial No.:	Not designated
Date of Receipt of E.U.T:	16/01/11
Start of Test:	19/01/11
End of Test:	20/01/11
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15 Subpart C RSS-210

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The Disc MCW is the smallest 360 deg ceiling mounted passive infrared detector presently marketed.

The Disc MCW is a microprocessor- controlled wireless digital PIR detector, designed for easy installation.

The Disc MCW provides a nearly conical pattern of maximum 10.5m (36ft) diameter, when installed on 3.5m(12ft) ceiling.

The advanced **True Motion Recognition**TM algorithm (patented) allows to distinguish between the true motion of an intruder and any other disturbances which may cause false alarms.

False alarms caused by environmental disturbances are virtually eliminated with alternate polarity pulse counter signal processing and low-noise pyroelectric detector.

1.4 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 *Justification*

Testing was performed in normal installation position (ceiling mounted).

2.2 *Special Accessories*

No special accessories were needed.

2.3 *Equipment Modifications*

No modifications were needed in order to achieve compliance

2.4 *Configuration of Tested System*



Figure 1 Configuration of Tested System

3. Radiated Measurement Test Set-up Photo



Figure 2 Radiated Emission Test Setup

4. Average Factor Calculation

1. Burst duration = 91m sec
2. Time between bursts = 2 × 4.5m sec
3. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

NOTE – [Pulse duration /Pulse period] considered ½ as worst case since unit operates with random ON/OFF keying modulation

$$\text{Average Factor} = 20 \log \left[\frac{1}{2} \times \frac{91}{100} \right] = -6.83\text{dB}$$

11:11:21 JAN 20, 2011

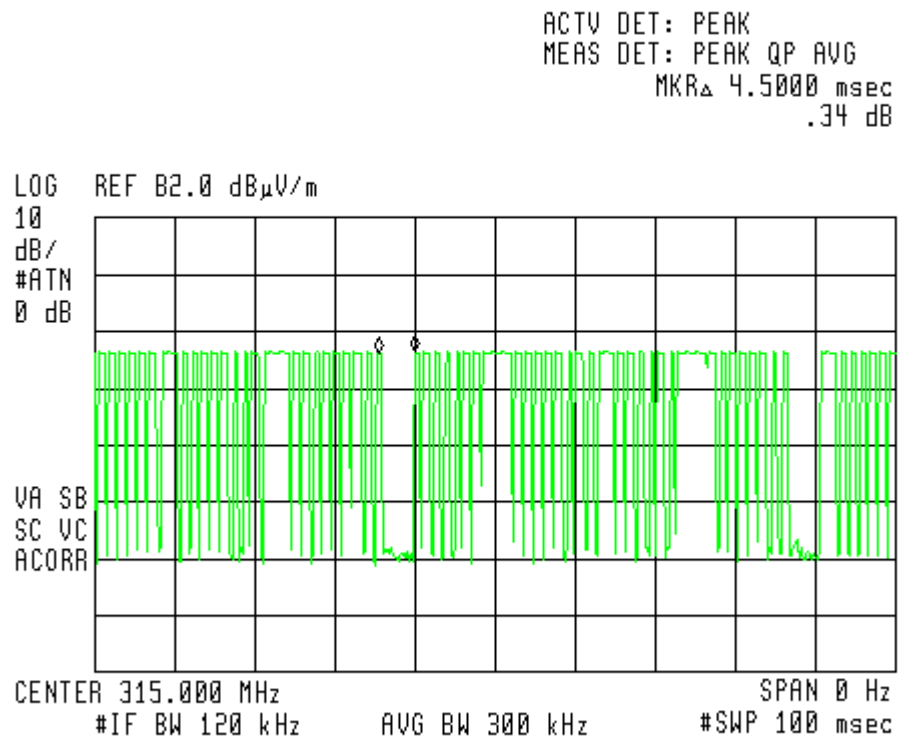


Figure 3. OFF Time within 100msec (#1)

11:12:18 JAN 20, 2011

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ -4.5000 msec
 -.36 dB

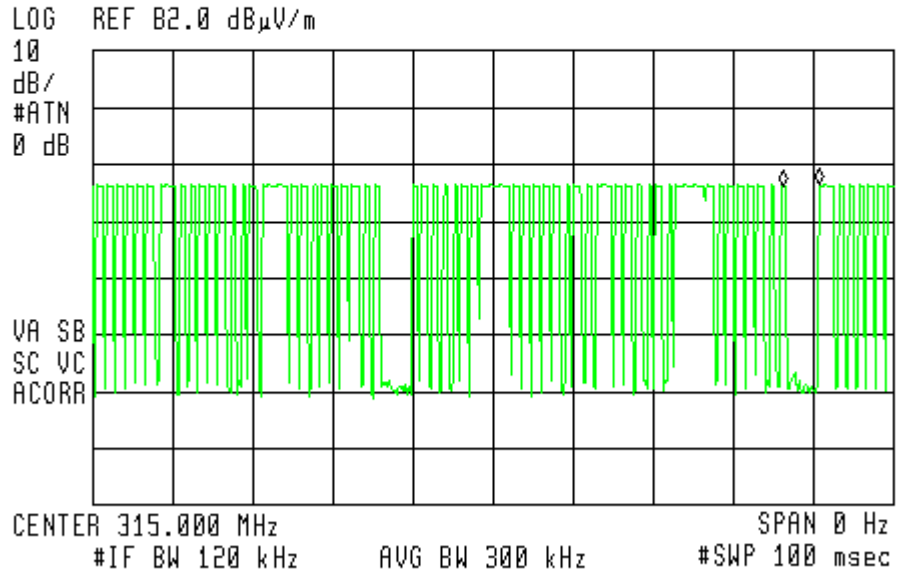


Figure 4. OFF Time within 100msec (#2)

4.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

5. Periodic Operation

5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

5.2 Requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N/A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	N/A.	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	See Figure 5 to Figure 6.	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N/A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	See Figure 7.	Complies

5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature:  _____


Date: 07.02.11

Typed/Printed Name: A. Sharabi

Periodic Operation

E.U.T Description Wireless PowerCode Digital Ceiling
Mount PIR Detector
Type Disc MCW (315)
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

 11:15:23 JAN 20, 2011

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRΔ 2.2875 sec
2.27 dB

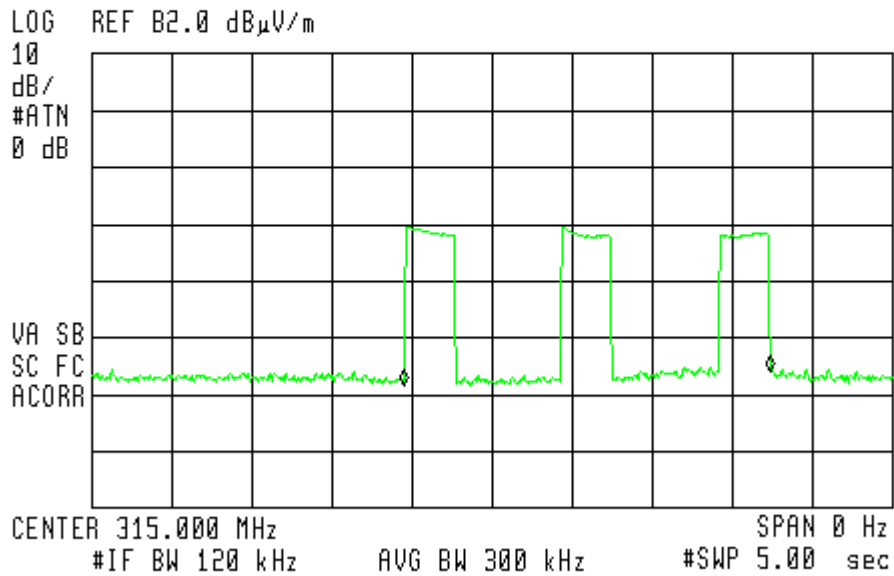


Figure 5. Automatic operated transmission - Alarm signal

11:16:47 JAN 20, 2011

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 2.3125 sec
 -5B dB

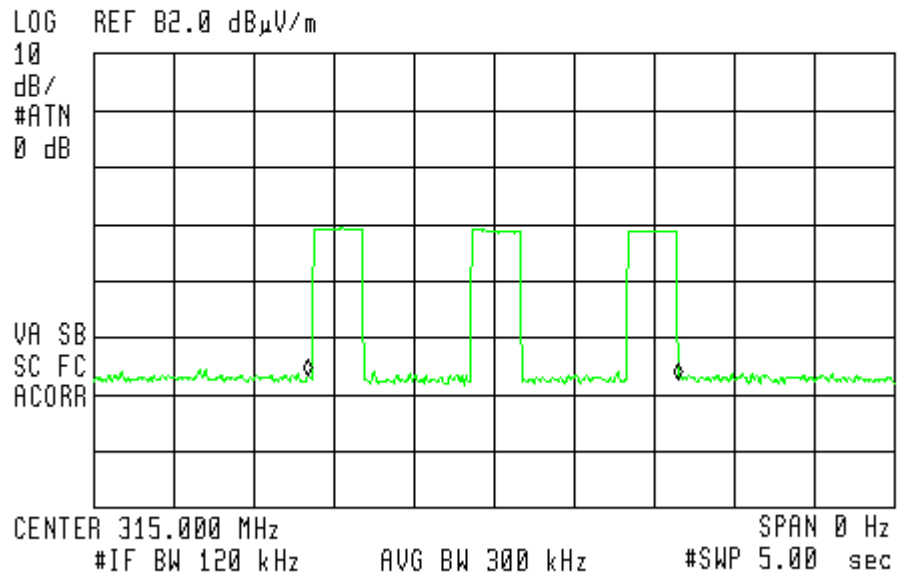


Figure 6. Automatic operated transmission – Tamper signal

12:15:36 JAN 20, 2011

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 300.00 msec
 -.21 dB

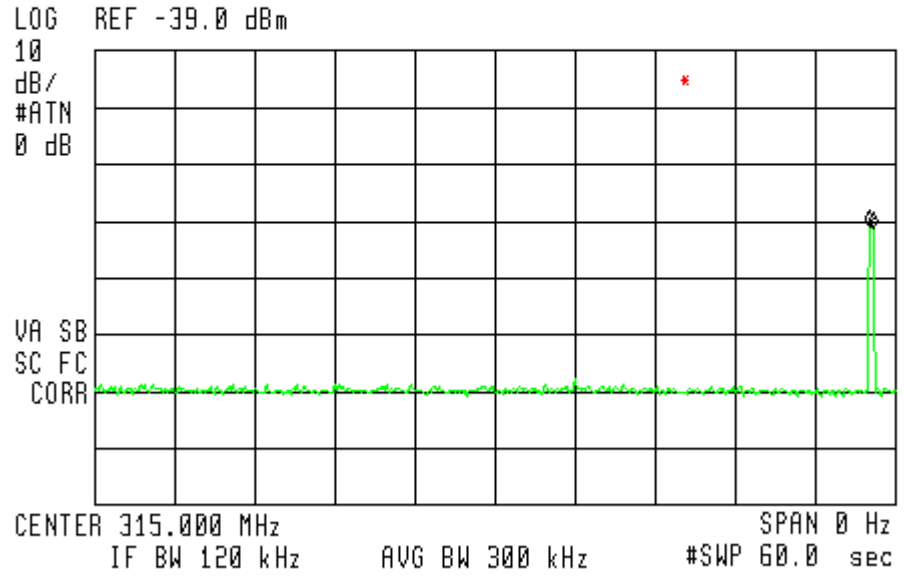


Figure 7. Supervision transmission – (273msec Once an Hour)

6. Field Strength of Fundamental

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.231(b)

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (315.0 MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB μ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)


6.3 Measured Data

JUDGEMENT: Passed by 7.66dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure 8 to Figure 10.

TEST PERSONNEL:

Tester Signature: 

Date: 07.02.11

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Wireless PowerCode Digital Ceiling Mount
PIR Detector
Type Disc MCW (315)
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq. (MHz)	Pol. V/H	Peak Reading (dB μ V/m)	Average Factor (dB)	AVG Result (dB μ V/m)	AVG Specification (dB μ V/m)	Margin (dB)
315.0	H	74.70	-6.74	67.96	75.62	-7.66
315.0	V	63.14	-6.74	56.44	75.62	-19.18

**Figure 8. Field Strength of Fundamental. Antenna Polarization:
HORIZONTAL/VERTICAL.
Detector: Peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading." (dB μ V/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. "Average Result" (dB μ V/m)=Peak Reading (dB μ V/m)+ Average Factor (dB)

Field Strength of Fundamental

E.U.T Description Wireless PowerCode Digital Ceiling
Mount PIR Detector
Type Disc MCW (315)
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)


Antenna Polarization: Horizontal

Test Distance: 3 meters

Detector: Peak

10:48:31 JAN 20, 2011

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 314.988 MHz
74.70 dB μ V/m

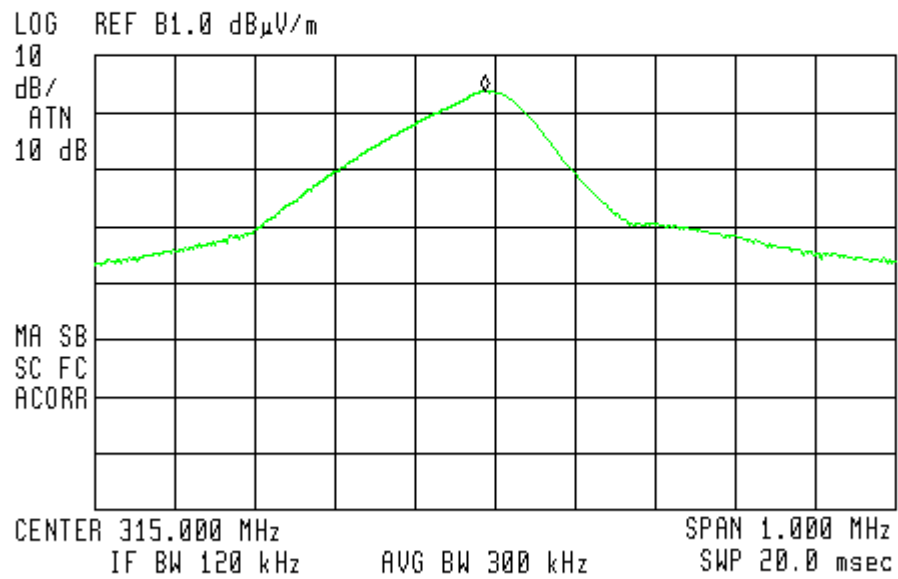

**Figure 9. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL.
Detectors: Peak**

Field Strength of Fundamental


E.U.T Description Wireless PowerCode Digital Ceiling
Mount PIR Detector
Type Disc MCW (315)
Serial Number: Not designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)


Antenna Polarization: Vertical

Test Distance: 3 meters

Detector: Peak

 10:40:53 JAN 20, 2011

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 314.988 MHz
63.14 dB μ V/m

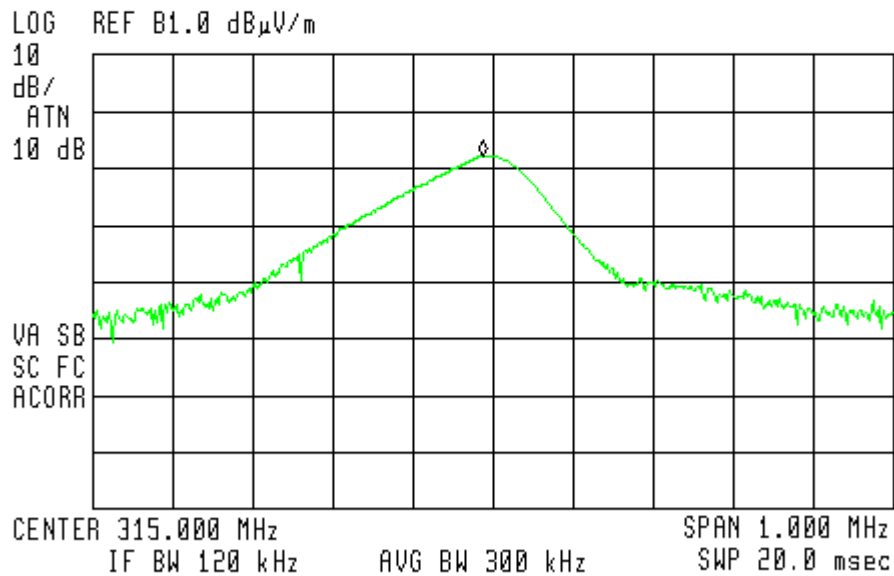

**Figure 10. Field Strength of Fundamental. Antenna Polarization: VERTICAL.
Detectors: Peak**

6.4 *Test Instrumentation Used, Field Strength of Fundamental*

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 315 MHz. This frequency was measured using a peak detector.

7.3 Measured Data

JUDGEMENT: Passed

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

No signals were detected in frequency range 9 kHz-30 MHz.

TEST PERSONNEL:

Tester Signature: _____

Date: 07.02.11

Typed/Printed Name: A. Sharabi

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

- FS: Field Strength [dB μ v/m]
- RA: Receiver Amplitude [dB μ v]
- AF: Receiving Antenna Correction Factor [dB/m]
- CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

8. Spurious Radiated Emission

8.1 Test Specification

30 - 3500 MHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 3.5 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.


8.3 Test Data

JUDGEMENT: Passed by 16.08dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The margin between the emission level and the specification limit was 16.08dB in the worst case at the frequency of 954 MHz, Horizontal polarization.

TEST PERSONNEL:

Tester Signature: _____ 

Date: 07.02.11

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description Wireless PowerCode Digital
Ceiling Mount PIR Detector

Type Disc MCW (315)

Serial Number: Not designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 3500 MHz

Antenna: 3 meters distance Detector: Peak

Frequency (MHz)	Peak Reading (dB μ V/m)	Average Factor (dB μ V/m)	Average Result (dB μ V/m)	Antenna Polarity (H/V)	Average Specification (dB μ V/m)	Margin (dB)
630.00	40.05	-6.83	33.22	H	55.62	-22.4
630.00	36.85	-6.83	30.02	V	55.62	-25.6
945.00	46.37	-6.83	39.54	H	55.62	-16.08
945.00	41.54	-6.83	38.71	V	55.62	-16.91

**Figure 11. Radiated Emission. Antenna Polarization: Horizontal/Vertical
Detector: Peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading." (dB μ V/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. "Average Result" (dB μ V/m)=Peak Reading (dB μ V/m)+ Average Factor (dB)

8.4 Test Instrumentation Used, Radiated Measurements


Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS- 0411N313	013	January 13, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

9. Bandwidth

9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 120 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20Bc points.

The EUT was set up as shown in Figure 1, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

 11:03:44 JAN 20, 2011

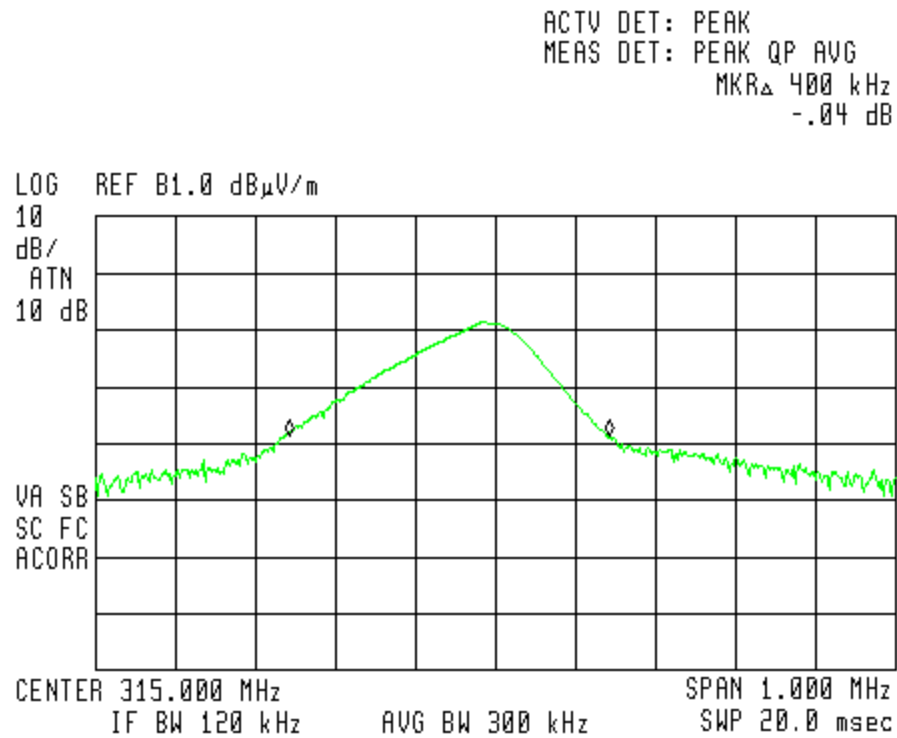


Figure 12 Bandwidth

9.2 Results table


E.U.T Description: Wireless PowerCode Digital Ceiling Mount PIR Detector
 Model: Disc MCW (315)
 Serial Number: Not designated
 Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Bandwidth Reading kHz	Specification (kHz)	Margin (kHz)
400	787.5	-387.5

Figure 13 Bandwidth

JUDGEMENT: Passed by 387.5 kHz

TEST PERSONNEL:

Tester Signature: _____ 

Date: 07.02.11

Typed/Printed Name: A. Sharabi

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

9.3 Test Equipment Used.

Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 14 Test Equipment Used

10. 11. APPENDIX A - CORRECTION FACTORS

10.1 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

10.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9
GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

- 1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.*
- 2. The cable is used for measurements above 2.9 GHz.*
- 3. The overall length of the cable is 10 meters.*

10.4 Correction factors for

LOG PERIODIC ANTENNA

Type LPD 2010/A

at 3 range.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

NOTES:

1. *Antenna serial number is 1038.*
2. *The above lists are located in file number 38M30.ANT for a 3 meter range,*
3. *The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".*

10.5 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**10.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

10.7 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2

11. Comparison requirements FCC with Industry Canada

FCC Specification	According FCC Standard	IC Standard
Periodic Operation	FCC Part 15.231 (a)(1-5)	RSS- 210 Issue 8 Section 2.5 Annex 1, A1.1.1
Field Strength at Fundamental	FCC Part 15.231 (b)	RSS- 210 Annex 1 A1.1.2, Section 2.5
Spurious Emissions and Intermodulation	FCC Part 15.231 (b)	RSS GEN Issue 3 7.2.2(Table3)
Bandwidth	FCC Part 15.231 (c)	RSS- 210 Issue 8 Section 2.5 Annex 1 A1.1.3