



Certificate #4312.01

# FCC TEST REPORT


**Product Name:** Magnetic 3-in-1 Wireless Charger  
**Trade Mark:** NEXT  
**Model No.:** N-2201  
**Add. Model No.:** N-2201W  
**Report Number:** 220525001RFC-1  
**Test Standards:** FCC 47 CFR Part 15 Subpart C  
**FCC ID:** WP8N-2201  
**Test Result:** PASS  
**Date of Issue:** June 20, 2022


Prepared for:


**ZEN FACTORY GROUP (ASIA) LIMITED**  
**A5-B, 12/F, BLOCK A, HONG KONG INDUSTRIAL CENTRE, 489-491**  
**CASTLE PEAK ROAD, KOWLOON, HONG KONG**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and**  
**technology park, Longhua district, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by:   
 Kieron Luo  
 Project Engineer

Reviewed by:   
 Eric Yu  
 Project Supervisor

Approved by:   
 Kevin Liang  
 Assistant Manager

Date: June 20, 2022

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.209-V1.1

**Version**

Version No.	Date	Description
V1.0	June 20, 2022	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)<http://www.uttlab.com>

UTTR-RF-FCCPART15.209-V1.1

## CONTENTS

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
<b>1.1 CLIENT INFORMATION</b> .....	<b>4</b>
<b>1.2 EUT INFORMATION</b> .....	<b>4</b>
1.2.1 GENERAL DESCRIPTION OF EUT .....	4
1.2.2 DESCRIPTION OF ACCESSORIES .....	4
<b>1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD</b> .....	<b>4</b>
<b>1.4 OTHER INFORMATION</b> .....	<b>4</b>
<b>1.5 DESCRIPTION OF SUPPORT UNITS</b> .....	<b>4</b>
<b>1.6 TEST LOCATION</b> .....	<b>5</b>
<b>1.7 TEST FACILITY</b> .....	<b>5</b>
<b>1.8 DEVIATION FROM STANDARDS</b> .....	<b>5</b>
<b>1.9 ABNORMALITIES FROM STANDARD CONDITIONS</b> .....	<b>5</b>
<b>1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER</b> .....	<b>5</b>
<b>1.11 MEASUREMENT UNCERTAINTY</b> .....	<b>6</b>
<b>2. TEST SUMMARY</b> .....	<b>7</b>
<b>3. EQUIPMENT LIST</b> .....	<b>8</b>
<b>4. TEST CONFIGURATION</b> .....	<b>9</b>
<b>4.1 ENVIRONMENTAL CONDITIONS FOR TESTING</b> .....	<b>9</b>
4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....	9
4.1.2 RECORD OF NORMAL ENVIRONMENT.....	9
<b>4.2 TEST CHANNELS</b> .....	<b>9</b>
<b>4.3 EUT TEST STATUS</b> .....	<b>9</b>
<b>4.4 TEST MODES</b> .....	<b>9</b>
<b>4.5 TEST SETUP</b> .....	<b>10</b>
4.5.1 FOR RADIATED EMISSIONS TEST SETUP .....	10
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP .....	11
4.5.3 FOR CONDUCTED RF TEST SETUP .....	11
<b>4.6 SYSTEM TEST CONFIGURATION</b> .....	<b>12</b>
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>13</b>
<b>5.1 REFERENCE DOCUMENTS FOR TESTING</b> .....	<b>13</b>
<b>5.2 ANTENNA REQUIREMENT</b> .....	<b>13</b>
<b>5.3 20DB BANDWIDTH</b> .....	<b>13</b>
<b>5.4 RADIATED SPURIOUS EMISSIONS</b> .....	<b>15</b>
<b>5.5 CONDUCTED EMISSION</b> .....	<b>19</b>
<b>APPENDIX 1 PHOTOS OF TEST SETUP</b> .....	<b>22</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>22</b>

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

<b>Applicant:</b>	ZEN FACTORY GROUP (ASIA) LIMITED
<b>Address of Applicant:</b>	A5-B, 12/F, BLOCK A, HONG KONG INDUSTRIAL CENTRE, 489-491 CASTLE PEAK ROAD, KOWLOON, HONG KONG
<b>Manufacturer:</b>	ZEN FACTORY GROUP (ASIA) LIMITED
<b>Address of Manufacturer:</b>	A5-B, 12/F, BLOCK A, HONG KONG INDUSTRIAL CENTRE, 489-491 CASTLE PEAK ROAD, KOWLOON, HONG KONG

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

<b>Product Name:</b>	Magnetic 3-in-1 Wireless Charger
<b>Model No.:</b>	N-2201
<b>Add. Model No.:</b>	N-2201W
<b>Trade Mark:</b>	NEXT
<b>DUT Stage:</b>	Production Unit
<b>EUT Supports Function:</b>	127.7kHz
<b>Sample Received Date:</b>	May 25, 2022
<b>Sample Tested Date:</b>	June 2, 2022 to June 9, 2022
<b>Note:</b> The additional model N-2201W is identical with the test model N-2201 except the model number for marketing purpose.	

#### 1.2.2 Description of Accessories

Adapter	
<b>Model No.:</b>	JHD-AP024U-120200BA-A
<b>Input:</b>	100-240 V~50/60 Hz 0.55A
<b>Output:</b>	12V=2.0A,
<b>DC Cable:</b>	1.5 Meter, Unshielded without ferrite

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Nominal Operating Frequency:</b>	127.7kHz
<b>Type of Modulation:</b>	ASK
<b>Number of Channels:</b>	1
<b>Antenna Type:</b>	Coil antenna
<b>Maximum Field Strength:</b>	84.65 dBµV/m at 3 meter
<b>Normal Test Voltage:</b>	120 Vac

### 1.4 OTHER INFORMATION

None

### 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

#### 1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Mobile phone	Apple	iphone12	N/A	UnionTrust
Apple watches	Apple	WR-50M	N/A	Client

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.209-V1.1

Cement load	N/A	N/A	N/A	UnionTrust
-------------	-----	-----	-----	------------

2)Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	USB Cable	USB Port	0.3Meter	UnionTrust

## 1.6 TEST LOCATION

---

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109  
 Telephone: +86 (0) 755 2823 0888  
 Fax: +86 (0) 755 2823 0886

---

## 1.7 TEST FACILITY

---

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

**A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**ISED Wireless Device Testing Laboratories**

CAB identifier: CN0032

**FCC Accredited Lab.**

Designation Number: CN1194  
 Test Firm Registration Number: 259480

---

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

### 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB

## 2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203	N/A	PASS
Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Emissions	FCC 47 CFR Part 15 Subpart C Section 15.209	ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6	PASS
20DB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.215(c)	ANSI C63.10-2013	Pass

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.209-V1.1

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3m SAC	ETS-Lindgren	3m	Euroshiedpn-C T001270-1317	Jan. 22, 2021	Jan. 21, 2024
<input checked="" type="checkbox"/>	Loop Antenna	ETS-Lindgren	6502	00202525	Nov. 14, 2020	Nov. 13, 2022
<input checked="" type="checkbox"/>	Receiver	ROHDE & SCHWARZ	ESIB26	100114	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-Lindgren	3142E	00201566	Nov. 11, 2021	Nov. 10, 2023
<input checked="" type="checkbox"/>	Pre-amplifier	HP	8447F	2805A02960	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 11, 2021	Nov. 10, 2023
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Apr. 15, 2022	Apr. 14, 2023
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07 -101181-K3	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		



## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	120	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
AC Power Line Conducted Emission	24.6	45	101.1	David Zhang
20 dB Bandwidth	25.3	50	100.16	Fire Huo
Radiated Emissions	25.3	50	100.16	Fire Huo

## 4.2 TEST CHANNELS

Frequency	Test RF Channel
127.7kHz	Channel 1
	127.7kHz

## 4.3 EUT TEST STATUS

Frequency	Tx Function	Description
127.7kHz	1Tx	1. Keep the EUT in continuously transmitting during the test.

## 4.4 TEST MODES

Test Item	EMI Test Modes
Radiated Emission	Test Mode 1: Wireless charging mode with Mobile phone (7.5W) +USB-A Output(7.5W) Test Mode 2: Wireless charging mode with watch(5W) +USB-A Output(7.5W) <b>Test Mode 3: Wireless charging mode with Mobile phone (7.5W) + Wireless charging mode with watch(5W) +USB-A Output (7.5W)</b> Test Mode 4: Standby
Conducted Emission	Test Mode 1: Wireless charging mode with Mobile phone (7.5W) +USB-A Output(7.5W) <b>Test Mode 2: Wireless charging mode with watch(5W) +USB-A Output(7.5W)</b> Test Mode 3: Wireless charging mode with Mobile phone (7.5W) + Wireless charging mode with watch(5W) +USB-A Output (7.5W) Test Mode 4: Standby
<b>Remark:</b> The above test modes in boldface were the worst cases, only the test data of these modes were reported.	

### 4.5 TEST SETUP

#### 4.5.1 For Radiated Emissions test setup

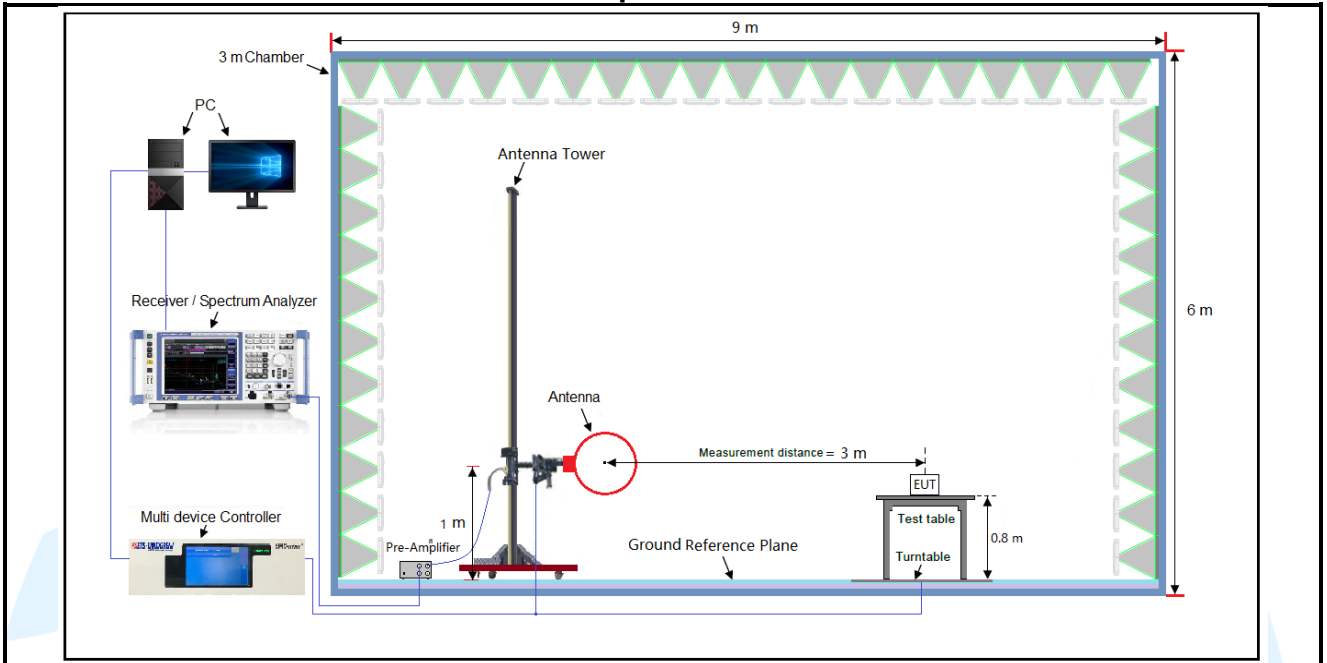


Figure 1. Below 30MHz



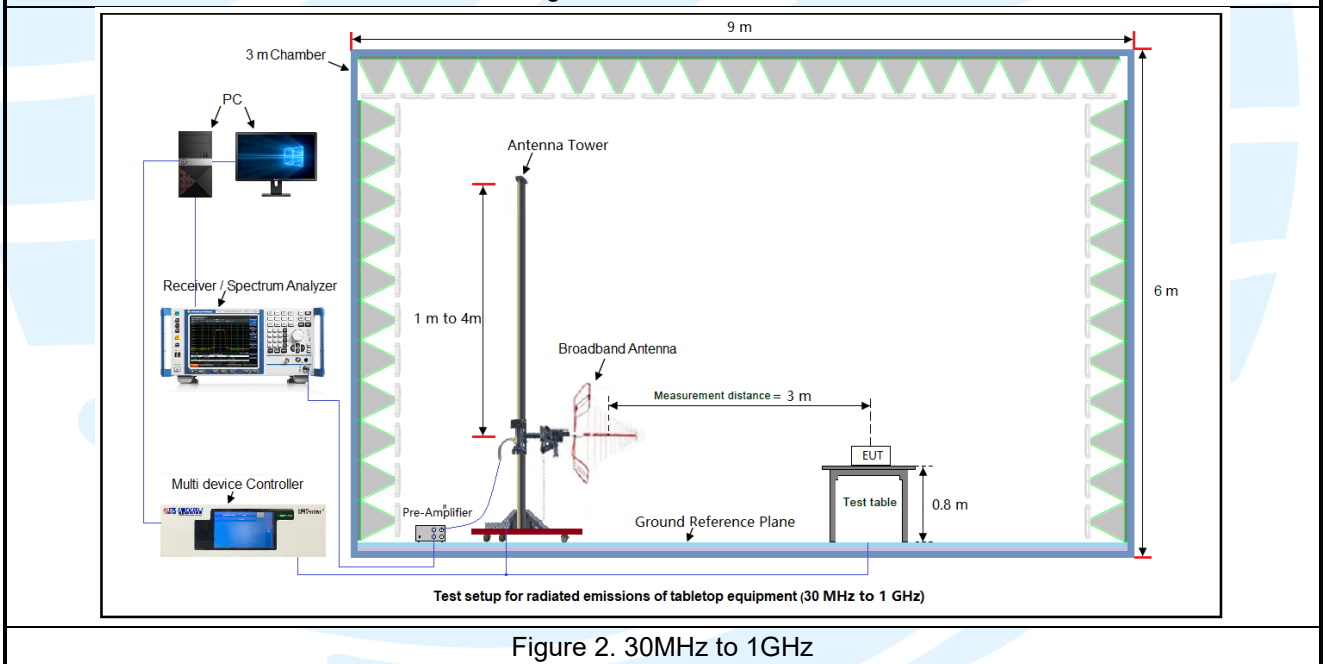


Figure 2. 30MHz to 1GHz

4.5.2 For Conducted Emissions test setup

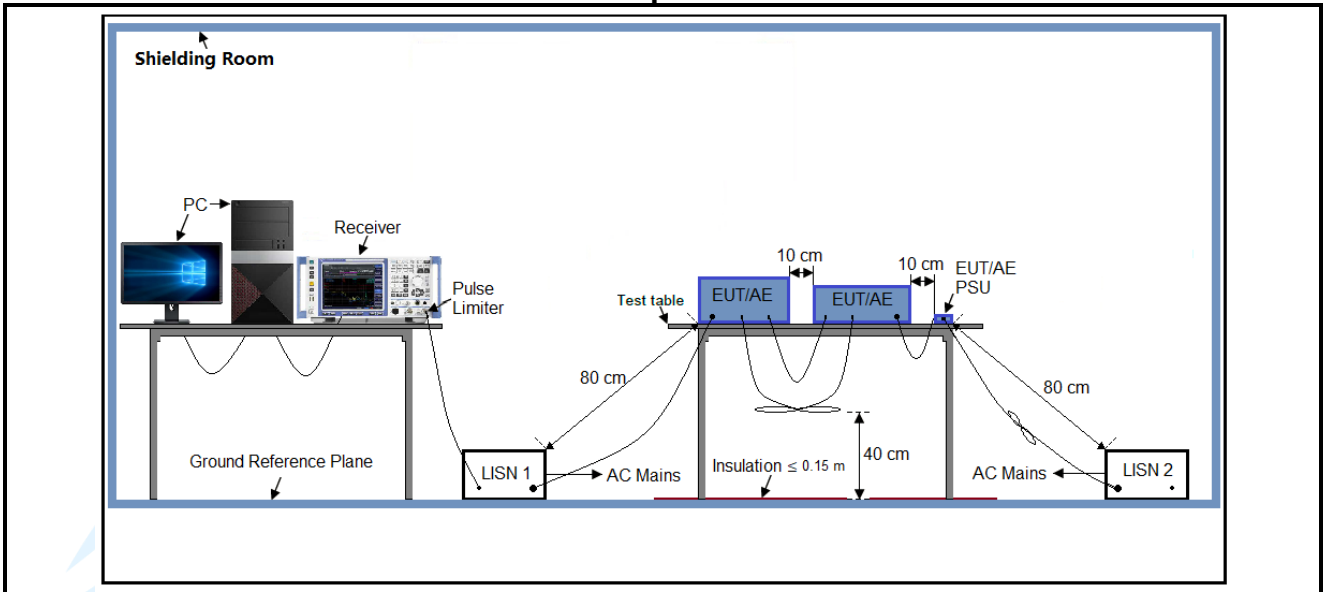

4.5.3 For Conducted RF test setup

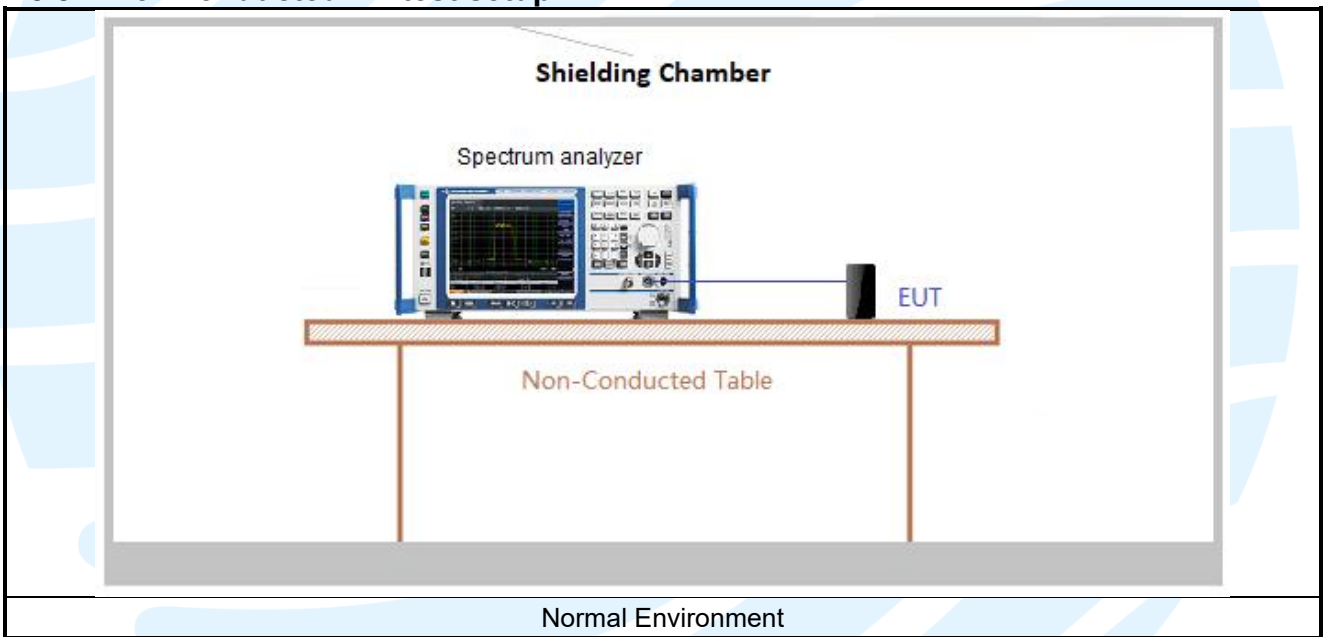

## 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst-case data were recorded in this test report.

All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<p><b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
<p><b>EUT Antenna:</b> This product has a permanent antenna, fulfill the requirement of this section.</p>


### 5.3 20DB BANDWIDTH

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.215 (c)
- Test Method:** ANSI C63.10
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.  
Use the following spectrum analyzer settings:
- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency
  - b) Span = approximately 2 to 5 times the OBW
  - c) RBW = 1% to 5% of the OBW
  - d) VBW  $\geq$  3\*RBW
  - e) Sweep = auto;
  - f) Detector function = peak
  - g) Trace = max hold
  - h) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.4.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Mode:** Transmitter mode
- Test Results:** Pass

**Test Data:**

Frequency (MHz)	20 dB Bandwidth (Hz)	Pass / Fail
0.1277	247	Pass

The test plot as follows:

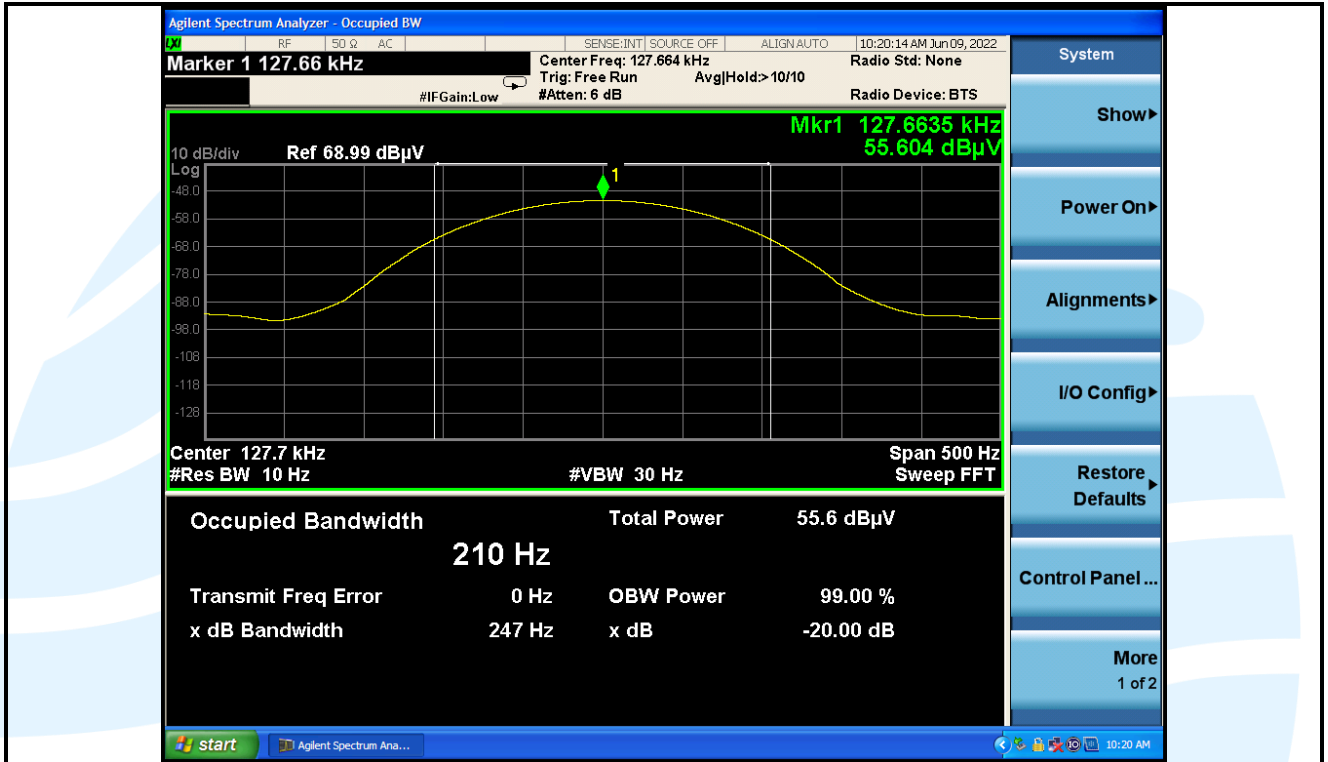

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.209-V1.1

### 5.4 RADIATED SPURIOUS EMISSIONS

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.209

**Test Method:** ANSI C63.10-2013 Section 6.3 & 6.5

**Receiver Setup:**

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

**Limits:**

#### Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBµV/m )	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

**Remark:**

- The lower limit shall apply at the transition frequencies.
- Emission level (dBµV/m) = 20 log Emission level (µV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.
- For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance). the measured field strength was extrapolated to distance 300 meters, using the formula that the limit of field strength varies as the inverse distance square (80dB per decade of distance)

**Example:**

Field strength limit for 125 kHz = 19.2 µV/m at 300m  
 = 25.67 dBµV/m at 300m  
 = 25.67dBµV/m + 40log(300/3) dB at 3m  
 = 105.67 dBµV/m at 3m

**Test Setup:** Refer to section 4.4.1 for details.

**Test Procedures:**

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**



- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 7) The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.(for portable and mobile devices)


**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**Radiated Emission Test Data (9 KHz ~ 30MHz):**


**worst case test data:**

**Test Mode 3 X axes**

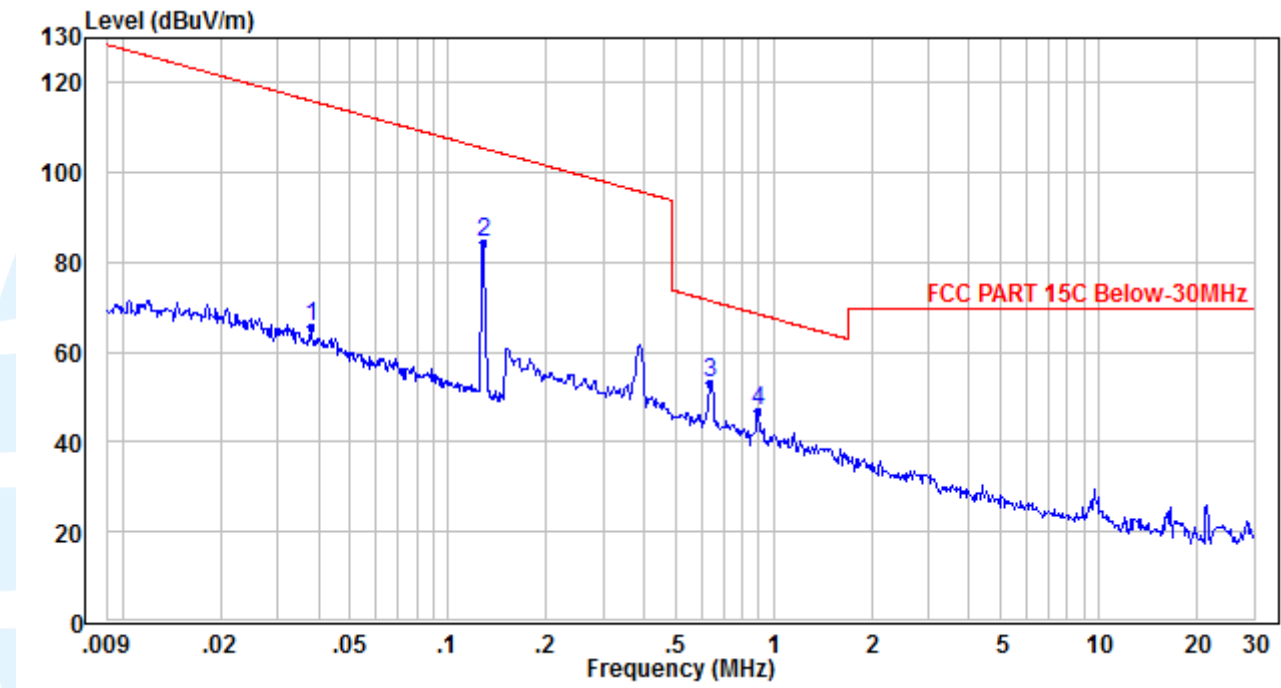

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.038	79.61	-13.87	65.74	116.02	-50.28	AV
2	0.128	101.46	-16.81	84.65	105.45	-20.80	AV
3	0.642	71.32	-18.14	53.18	71.43	-18.25	QP
4	0.902	65.01	-18.01	47.00	68.46	-21.46	QP



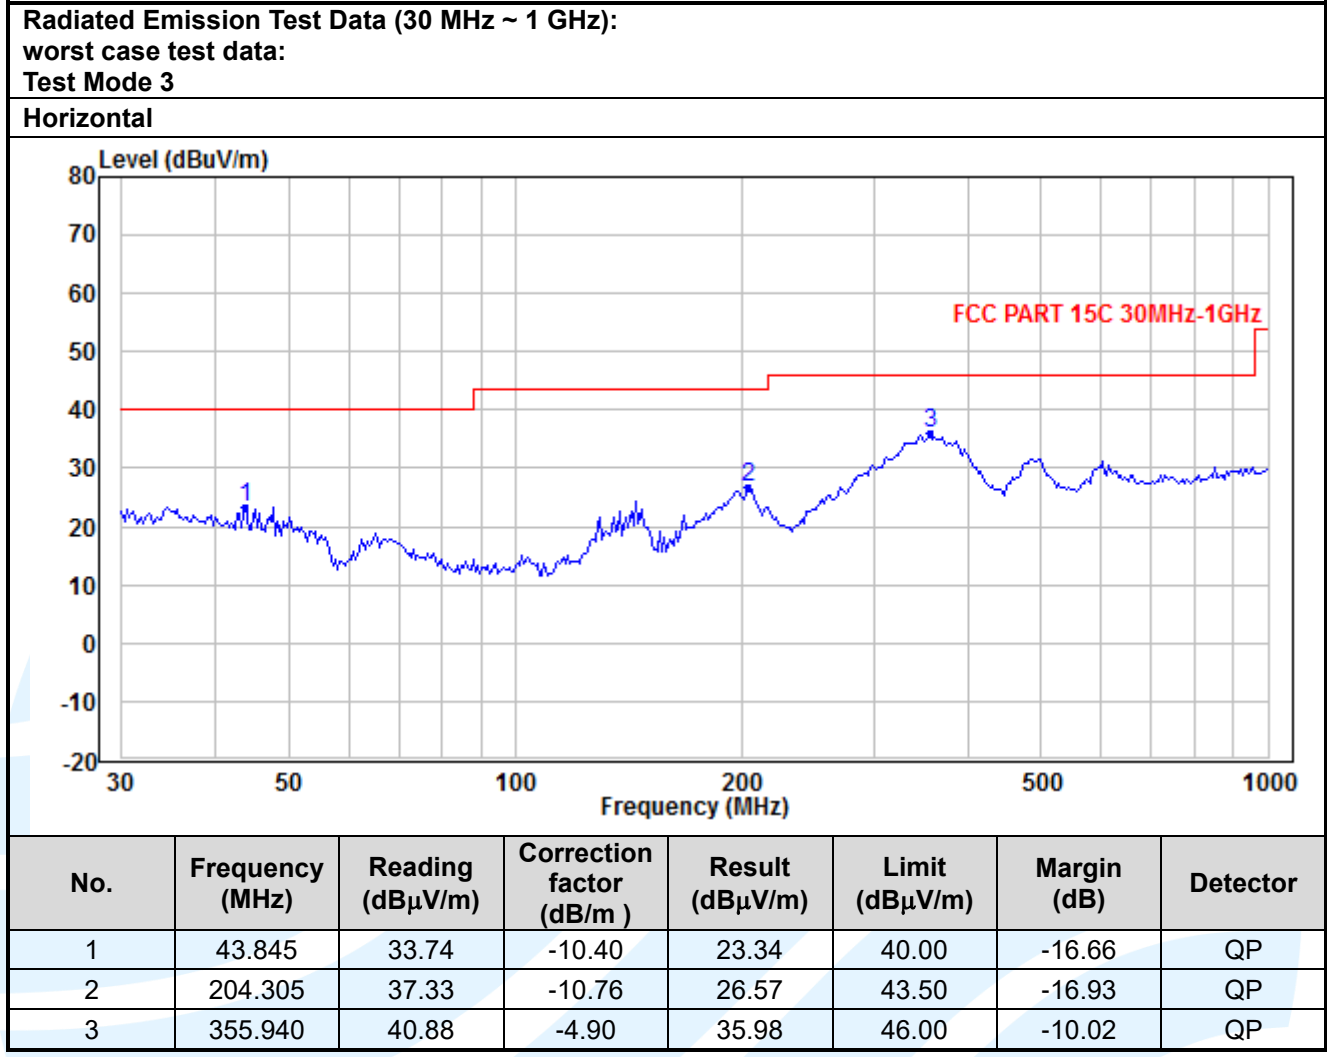

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.209-V1.1

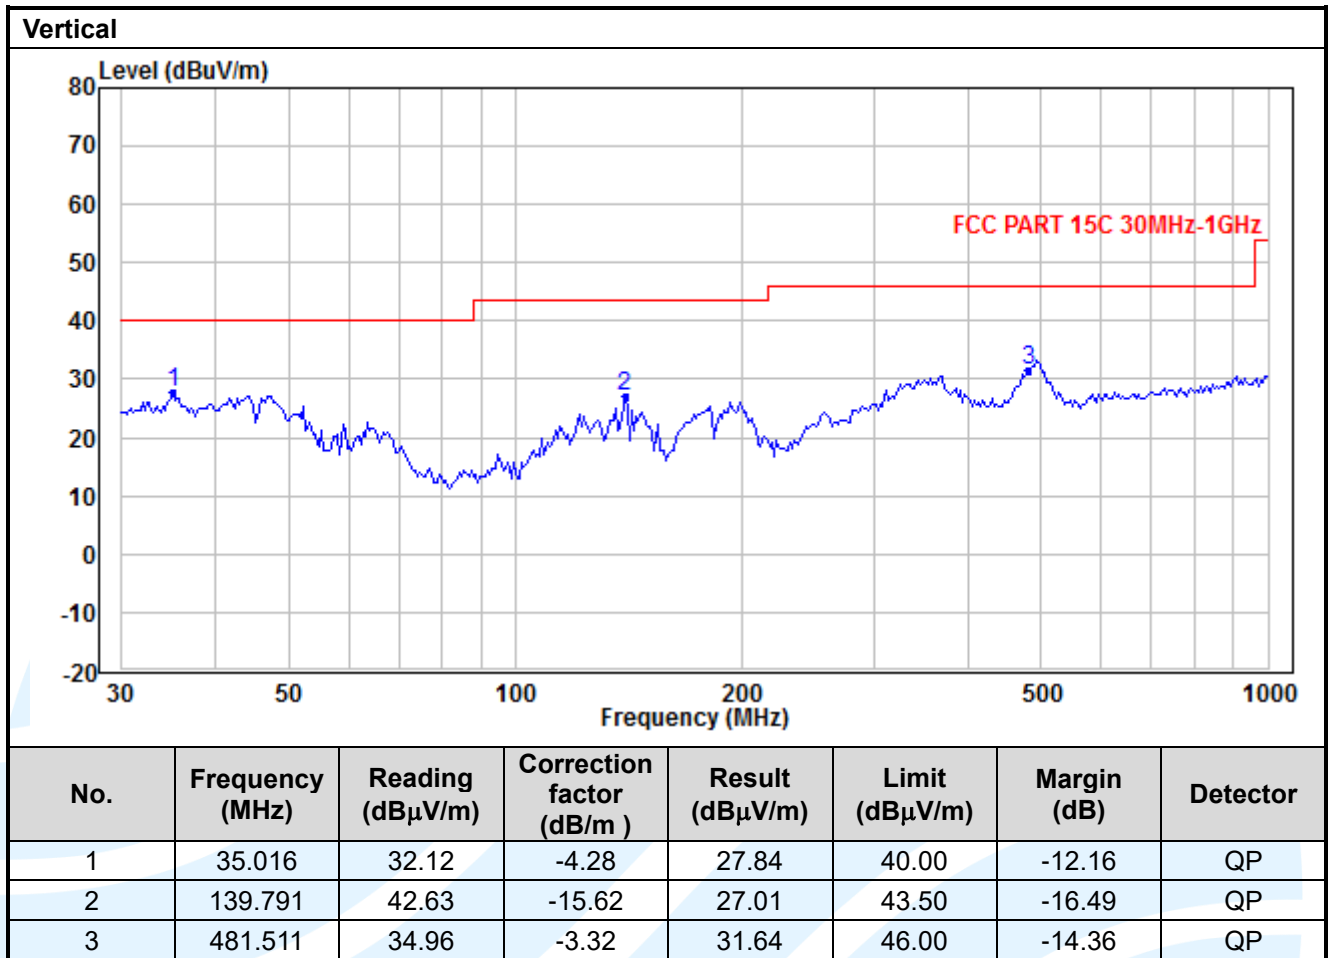

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. All possible modes of operation were investigated, only the worst-case emissions reported.

### 5.5 CONDUCTED EMISSION

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.207

**Test Method:** ANSI C63.10-2013 Section 6.2

**Limits:**

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

**Test Setup:** Refer to section 4.4.2 for details.

**Test Procedures:**

Test frequency range :150KHz-30MHz


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

The measurement data as follows:  
 Quasi Peak and Average:  
 worst case test data:  
 Test Mode 2

Live Line

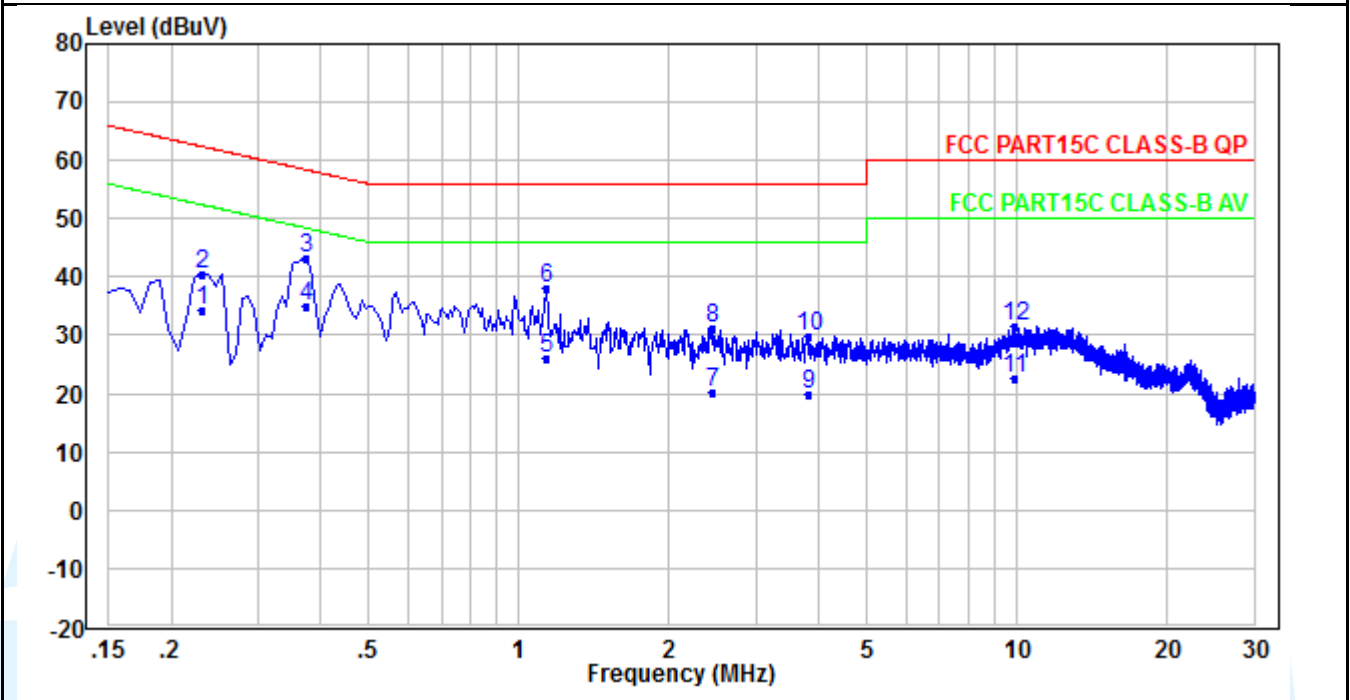

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Correction factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.230	24.34	10.12	34.46	52.45	-17.99	Average
2	0.230	30.34	10.12	40.46	62.45	-21.99	QP
3	0.374	32.97	10.12	43.09	58.41	-15.32	Average
4	0.374	24.97	10.12	35.09	48.41	-13.32	QP
5	1.134	15.68	10.22	25.90	46.00	-20.10	Average
6	1.134	27.68	10.22	37.90	56.00	-18.10	QP
7	2.454	9.88	10.25	20.13	46.00	-25.87	Average
8	2.454	20.88	10.25	31.13	56.00	-24.87	QP
9	3.813	9.63	10.29	19.92	46.00	-26.08	Average
10	3.813	19.63	10.29	29.92	56.00	-26.08	QP
11	9.908	12.00	10.58	22.58	50.00	-27.42	Average
12	9.908	21.00	10.58	31.58	60.00	-28.42	QP

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.209-V1.1

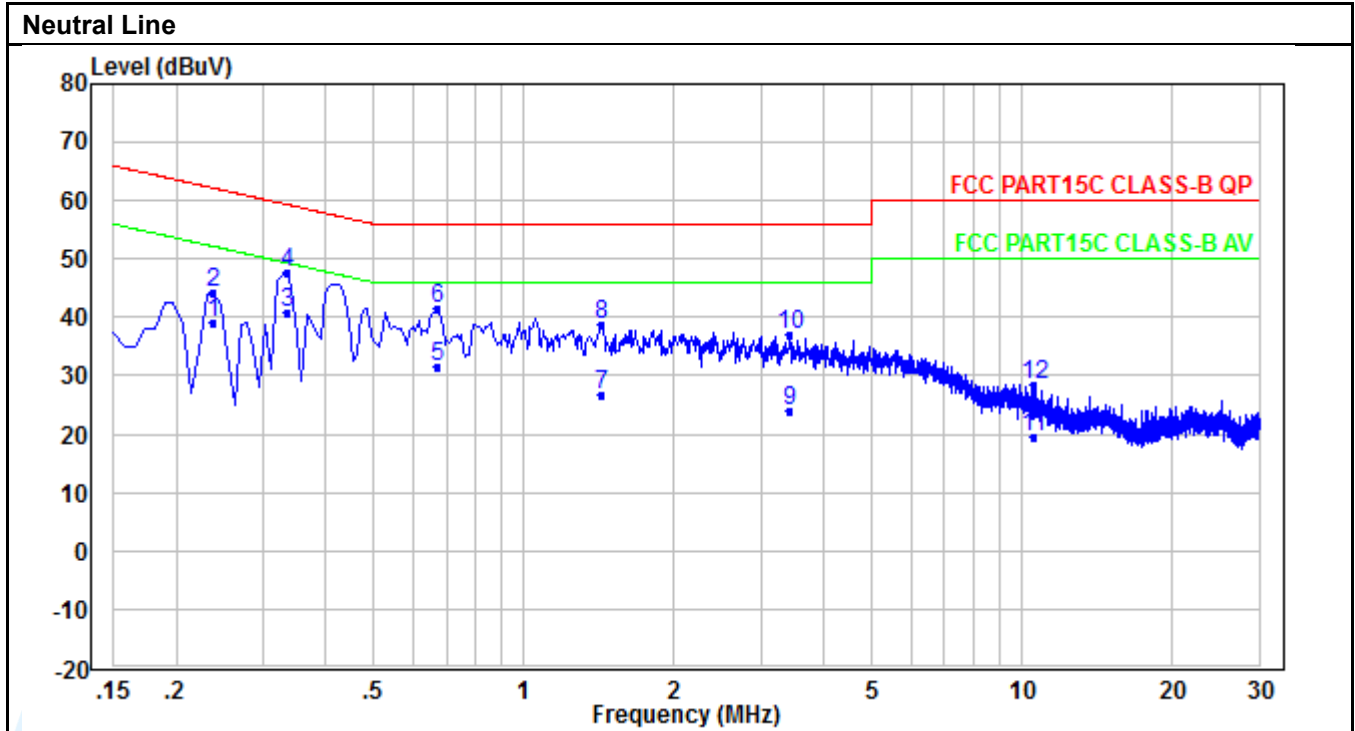

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.238	29.05	10.11	39.16	52.17	-13.01	Average
2	0.238	34.05	10.11	44.16	62.17	-18.01	QP
3	0.334	30.62	10.12	40.74	49.35	-8.61	Average
4	0.334	37.62	10.12	47.74	59.35	-11.61	QP
5	0.670	21.48	10.14	31.62	46.00	-14.38	Average
6	0.670	31.48	10.14	41.62	56.00	-14.38	QP
7	1.430	16.44	10.16	26.60	46.00	-19.40	Average
8	1.430	28.44	10.16	38.60	56.00	-17.40	QP
9	3.429	13.61	10.29	23.90	46.00	-22.10	Average
10	3.429	26.61	10.29	36.90	56.00	-19.10	QP
11	10.548	8.76	10.63	19.39	50.00	-30.61	Average
12	10.548	17.76	10.63	28.39	60.00	-31.61	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, only the worst-case emissions reported.

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.209-V1.1

## APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

## APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

---

---

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.

---

---