

Prüfbericht-Nr.: <i>Test report no.:</i>	CN22YF1T 001	Auftrags-Nr.: <i>Order no.:</i>	168345062	Seite 1 von 23 <i>Page 1 of 23</i>	
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2021-11-25		
Auftraggeber: <i>Client:</i>	Autel Intelligent Tech. Corp., Ltd. 7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan, Shenzhen, 518055, China				
Prüfgegenstand: <i>Test item:</i>	AUTOMOTIVE DIAGNOSTIS & ANALYSIS SYSTEM				
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	MaxiCOM MK808BT, MaxiDAS DS808BT, MaxiPRO MP808BT (Trademark: AUTEL)				
Auftrags-Inhalt: <i>Order content:</i>	Test Report				
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247				
Wareneingangsdatum: <i>Date of sample receipt:</i>	2022-01-28	Please refer to Photo Document			
Prüfmuster-Nr.: <i>Test sample no:</i>	A003191554-005~006 A003191554-017				
Prüfzeitraum: <i>Testing period:</i>	2022-02-23 – 2022-03-08				
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von: <i>tested by:</i>		genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i>	2022-08-25 <small>Signed by: Breeze Jiang</small>	Ausstellungsdatum: <i>Issue date:</i>	2022-08-25 <small>Signed by: Lin Lin</small>		
Stellung / Position:	Assistant Project Manager	Stellung / Position:	Reviewer		
Sonstiges / Other:	FCC ID: WQ8-MK808BT				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft
	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet	
* Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor
	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Test Summary

5.1.1 ANTENNA REQUIREMENT*RESULT: Pass***5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER***RESULT: Pass***5.1.3 99% BANDWIDTH***RESULT: Pass***5.1.4 20DB BANDWIDTH***RESULT: Pass***5.1.5 CARRIER FREQUENCY SEPARATION***RESULT: Pass***5.1.6 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.7 TIME OF OCCUPANCY***RESULT: Pass***5.1.8 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH***RESULT: Pass***5.1.9 RADIATED SPURIOUS EMISSION***RESULT: Pass***5.1.10 CONDUCTED EMISSION***RESULT: Pass*

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM.....	11
5	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Maximum Peak Conducted Output Power.....</i>	<i>14</i>
5.1.3	<i>99% Bandwidth</i>	<i>15</i>
5.1.4	<i>20dB Bandwidth</i>	<i>16</i>
5.1.5	<i>Carrier Frequency Separation.....</i>	<i>17</i>
5.1.6	<i>Number of Hopping Frequency.....</i>	<i>18</i>
5.1.7	<i>Time of Occupancy</i>	<i>19</i>
5.1.8	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth.....</i>	<i>20</i>
5.1.9	<i>Radiated Spurious Emission</i>	<i>21</i>
5.1.10	<i>Conducted Emission.....</i>	<i>22</i>
6	PHOTOGRAPHS OF THE TEST SET-UP.....	23
7	LIST OF TABLES.....	23

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of FCC Part 15C

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2022-09-28
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2022-09-28
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2022-09-28
DC power supply	Keysight	E3642A	MY61276100	2022-09-28
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2022-09-28
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2022-09-28
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2022-08-10
Signal Analyzer	R&S	FSV 40	101439	2022-08-09
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2022-08-09
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2022-08-09
Amplifier	R&S	SCU-18F	180070	2022-08-09
Amplifier	R&S	SCU40A	100475	2022-08-09
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2022-08-10
Artificial Mains Network	R&S	ENV216	101445	2022-08-10
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is AUTOMOTIVE DIAGNOSTIS & ANALYSIS SYSTEM which supports Bluetooth and 2.4GHz Wi-Fi wireless technology.

All models are identical except model no. difference for market strategy.

- Note:1. 2.4G Bluetooth all test data in this report.
 2. 2.4G Bluetooth and 2.4GHz Wi-Fi to simultaneous transmitting test data with Radiated Spurious Emission and Peak Conducted Output Power

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	AUTOMOTIVE DIAGNOSTIS & ANALYSIS SYSTEM
Type Designation:	MaxiCOM MK808BT, MaxiDAS DS808BT, MaxiPRO MP808BT
Trademark:	AUTEL
FCC ID:	WQ8-MK808BT
Operating Voltage:	AC 100~240V, 50/60Hz input via Power Adapter DC 3.7V@5000mAh input via internal battery
Testing Voltage:	Fully charged battery
Power Adapter:	Model: GME10C-050200FUu Input: 100~240V, 50/60Hz, 0.28A Output: DC 5V@2A
Operating Temperature Range:	0 °C ~ +55 °C
Technical Specification of Bluetooth BDR/EDR	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK(BDR), $\pi/4$ -DQPSK(EDR), 8DPSK(EDR)
Channel Number:	79 channels
Channel Separation:	1MHz
Antenna Type:	Ceramic Antenna
Antenna Gain:	0.5 dBi
Technical Specification of Wi-Fi 802.11 b/g/n	
Operating Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20) 2422 - 2452 MHz for 802.11n(HT40)
Type of Modulation:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
Channel Number:	11 channels
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-0.9 dBi

Table 3: RF Channel and Frequency of Bluetooth BDR/EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for Bluetooth.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Transmitting on Hopping channel
- C. On, Normal Operation(BT Link)
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- User Manual
- Block Diagram
- PCB Layout
- ID Label and Location Info
- Operation Description
- Schematics
- Parts List

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

Table 4: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

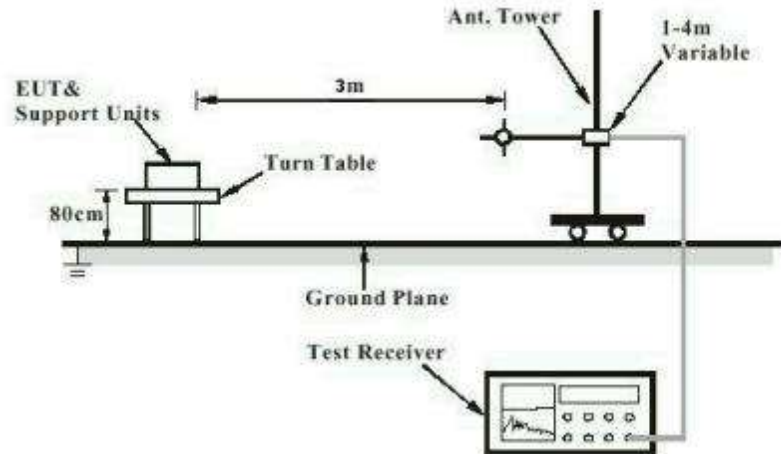


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

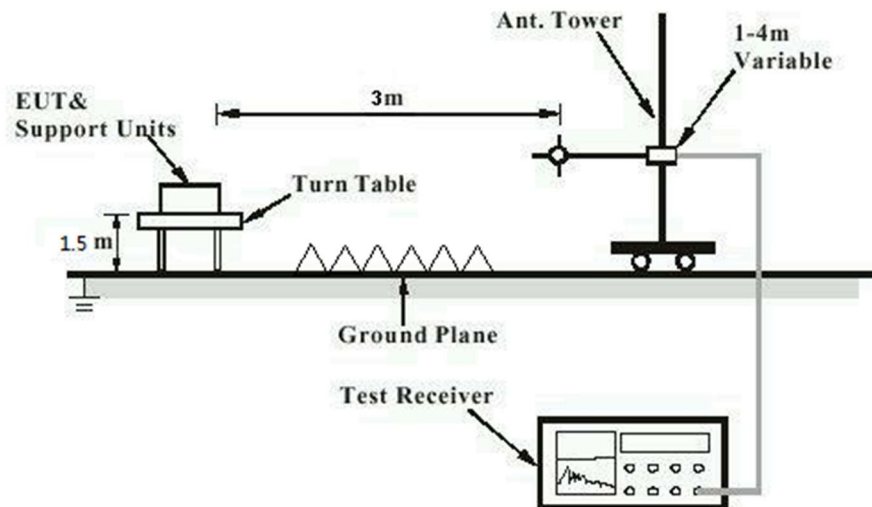


Diagram of Measurement Configuration for Conducted Transmitter Measurement


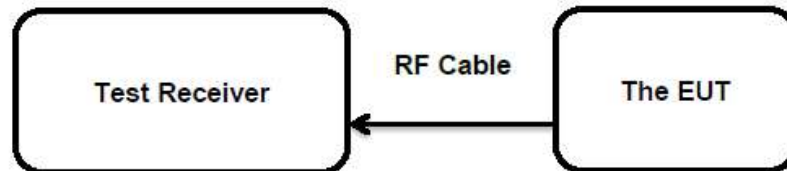


Diagram of Measurement Configuration for Mains Conduction Measurement

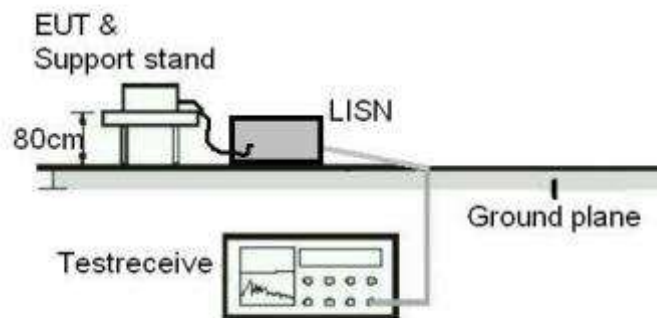

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has an ceramic antenna, the directional gain of antenna is 0.5 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard	: FCC Part 15.247(b)(1)
Basic standard	: ANSI C63.10: 2013
Limits	: FHSS < 0.125 Watts
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-02-23 to 2022-03-07
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 51 %
Atmospheric pressure	: 101 kPa

Table 5: Test Result of Maximum Peak Conducted Output Power
Bluetooth BDR/EDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BDR)	2402.0	1.84	0.0015	< 0.125
	2441.0	4.09	0.0026	
	2480.0	3.75	0.0024	
Maximum Measured Value		4.09	0.0026	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
8DPSK (EDR)	2402.0	-2.10	0.0006	< 0.125
	2441.0	0.17	0.0010	
	2480.0	-0.32	0.0009	
Maximum Measured Value		0.17	0.0010	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 0.5 dBi

2.4G Wi-Fi

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
TX 802.11b	2412.0	15.81	0.038	< 1.0
	2437.0	15.86	0.039	
	2462.0	15.43	0.035	
Maximum Measured Value		15.86	0.039	

Antenna gain(G): -0.9 dBi

Remarks: This WiFi power (max. power) less than GTS original report No.: GTSL202101000019F03

Prüfbericht - Nr.: CN22YF1T 001
Test Report No.:Seite 15 von 23
Page 15 of 23

5.1.3 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-03-07
Input voltage : Fully charged battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.8 °C
Relative humidity : 51 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22YF1T 001

Test Report No.:

Seite 16 von 23

Page 16 of 23

5.1.4 20dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(a)(1)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-03-07
Input voltage : Fully charged battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.8 °C
Relative humidity : 51 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

5.1.5 Carrier Frequency Separation

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or 2/3 of 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-03-07
Input voltage	: Fully charged battery
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 51 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22YF1T 001
Test Report No.:Seite 18 von 23
Page 18 of 23

5.1.6 Number of Hopping Frequency

RESULT:

Pass

Test Specification

Test standard : FCC part 15.247(a)(1)(iii)
Basic standard : ANSI C63.10: 2013
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-03-07
Input voltage : Fully charged battery
Operation mode : B
Ambient temperature : 24.8 °C
Relative humidity : 51 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

5.1.7 Time of Occupancy

RESULT:**Pass****Test Specification**

Test standard	:	FCC part 15.247(a)(1)(iii)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 0.4s
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2022-03-07
Input voltage	:	Fully charged battery
Operation mode	:	B
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	51 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

5.1.8 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-03-07
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 51 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

5.1.9 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	:	3m Semi-anechoic Chamber

Test Setup

Date of testing	:	2022-03-08
Input voltage	:	Fully charged battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

5.1.10 Conducted Emission

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-05-12
Input voltage	: AC 120V, 60Hz
Operation mode	: C
Earthing	: Not connected
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT.....	7
Table 3: RF Channel and Frequency of Bluetooth BDR/EDR.....	8
Table 4: Auxiliary Equipment Used during Test	10
Table 5: Test Result of Maximum Peak Conducted Output Power	14