

# TEST REPORT

**Applicant:** Autel Intelligent Tech. Corp., Ltd.

**Address of Applicant:** 7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan, Shenzhen 518055, China

**Manufacturer:** Autel Intelligent Tech. Corp., Ltd.

**Address of Manufacturer:** 7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan, Shenzhen 518055, China

**Factory:** 1: AUTEL VIETNAM COMPANY LIMITED  
2: Autel Intelligent Technology Corp., Ltd. Guangming Branch

**Address of Factory:** 1: 4th Floor, Factory#6, Land#CN1, An Duong Industrial Zone, Hong Phong Township, An Duong County, Hai Phong, VietNam  
2: 7F&6F, East Wing, Building 2, and 6F of Electronical Building, Yanxiang Industrial Zone, Gaoxin Rd, Dongzhou Community of Guangming New District, Shenzhen

### Equipment Under Test (EUT)

**Product Name:** MX-Sensor

**Model No.:** MX-Sensor 433MHz

**Trade Mark:** AUTEL

**FCC ID:** WQ8301C433

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.231

**Date of sample receipt:** May 20, 2021


**Date of Test:** May 20-21, 2021

**Date of report issued:** May 21, 2021

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

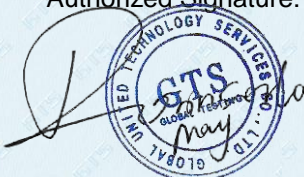


**Robinson Luo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	May 21, 2021	Original

Prepared By:




Date:

May 21, 2021

Project Engineer

Check By:

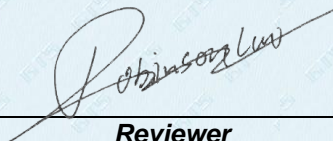  
Reviewer

Date:

May 21, 2021

## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	6
5.3 DESCRIPTION OF SUPPORT UNITS .....	6
5.4 DEVIATION FROM STANDARDS.....	6
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
5.6 TEST FACILITY .....	6
5.7 TEST LOCATION .....	6
5.8 ADDITIONAL INSTRUCTIONS.....	6
6 TEST INSTRUMENTS LIST .....	7
7 TEST RESULTS AND MEASUREMENT DATA .....	9
7.1 ANTENNA REQUIREMENT.....	9
7.2 RADIATED EMISSION METHOD.....	10
7.2.1 <i>Field Strength of The Fundamental Signal</i> .....	12
7.2.2 <i>Spurious emissions</i> .....	13
7.3 20dB OCCUPY BANDWIDTH .....	18
7.4 DWELL TIME & SILENT TIME .....	19
8 TEST SETUP PHOTO .....	20
9 EUT CONSTRUCTIONAL DETAILS.....	20

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
Field strength of the fundamental signal	15.231 (e)	Pass
Spurious emissions	15.231 (e)/15.209	Pass
20dB Bandwidth	15.231 (c)	Pass
Dwell time	15.231 (e)	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

### Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	MX-Sensor
Model No.:	MX-Sensor 433MHz
Test sample(s) ID:	GTS202105000154-1
Sample(s) Status:	Engineer sample
Serial No.:	C440EJ1JAC001142
Hardware version:	V4
Software version:	V1.4.18
Operation Frequency:	433.92MHz
Modulation technology:	FSK or ASK
Antenna Type:	Integral Antenna
Antenna gain:	0dBi (declared by manufacture)
Power supply:	DC 3V by Button battery

*Remark: Though the pre built-in firmware, this TPMS sensor transmit per 30s*

## 5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode. (New battery is used during all test)
-------------------	--

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which only the worst case was shown in this test report .

## 5.3 Description of Support Units

None.
-------

## 5.4 Deviation from Standards

None.
-------

## 5.5 Abnormalities from Standard Conditions

None.
-------

## 5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC —Registration No.: 381383</b> Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.</li> <li>● <b>IC —Registration No.: 9079A</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A</li> <li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0</li> </ul>
---

## 5.7 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

## 5.8 Additional Instructions

Test Software	Continuous transmitter provided by manufacturer
Power level setup	Default

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

<b>RF Conducted Test:</b>						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

<b>General used equipment:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021





## 7 Test results and Measurement Data

### 7.1 Antenna requirement


<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>EUT Antenna:</b>	
The antenna is integral antenna, the best case gain of the antenna is 0dBi, reference to the appendix II for details.	

## 7.2 Radiated Emission Method

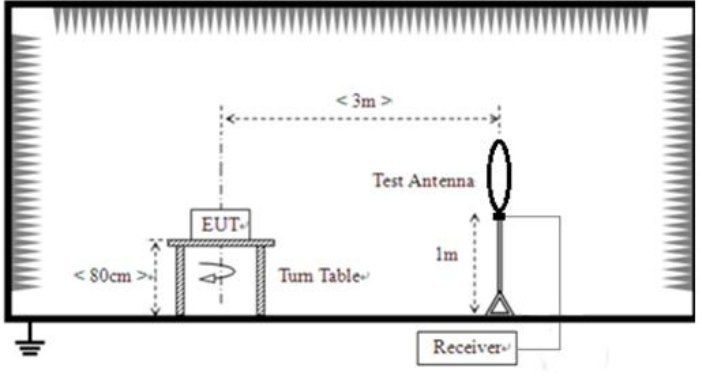Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 6000MHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	433.92MHz	72.87		Average Value	
		92.87		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	PK,AV,QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits a higher field strength.					
Test setup:	<p>Below 30MHz</p>  <p>Below 1GHz</p>				

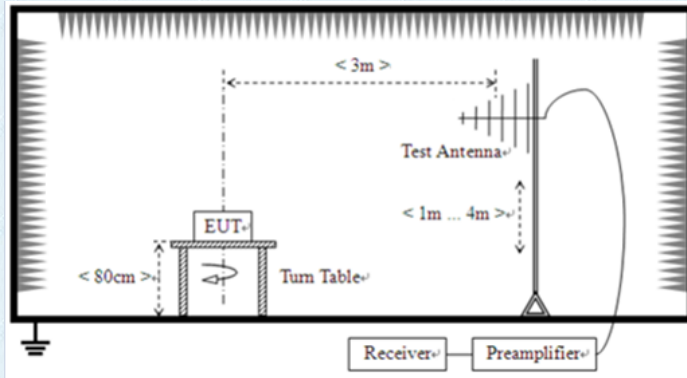

Above 1GHz

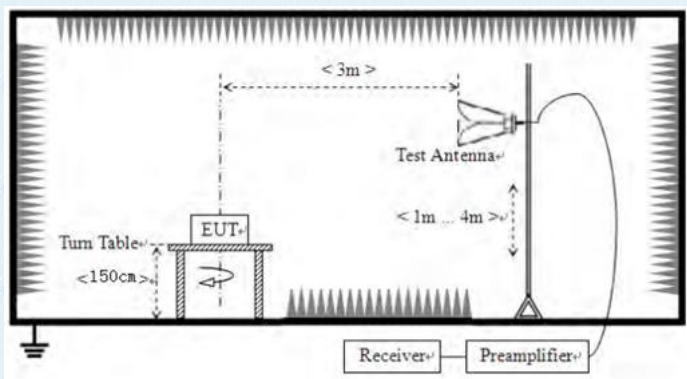

**Test Procedure:**

1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Test Instruments:**

Refer to section 6.0 for details

**Test mode:**

Refer to section 5.2 for details

**Test environment:**

Temp.:	25 °C	Humid.:	50%	Press.:	1 010mbar
--------	-------	---------	-----	---------	-----------

Test results:	Pass
---------------	------

**Measurement data:**

**7.2.1 Field Strength of The Fundamental Signal**

**ASK**

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
433.92	83.45	16.03	3.02	37.52	64.98	92.87	-27.89	Horizontal
433.92	83.26	16.03	3.02	37.52	64.79	92.87	-28.08	Vertical

**FSK**

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
433.92	84.22	16.03	3.02	37.52	65.75	92.87	-27.12	Horizontal
433.92	84.71	16.03	3.02	37.52	66.24	92.87	-26.63	Vertical

## 7.2.2 Spurious emissions


### Below 30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


### Below 1GHz

Vertical:

ASK:

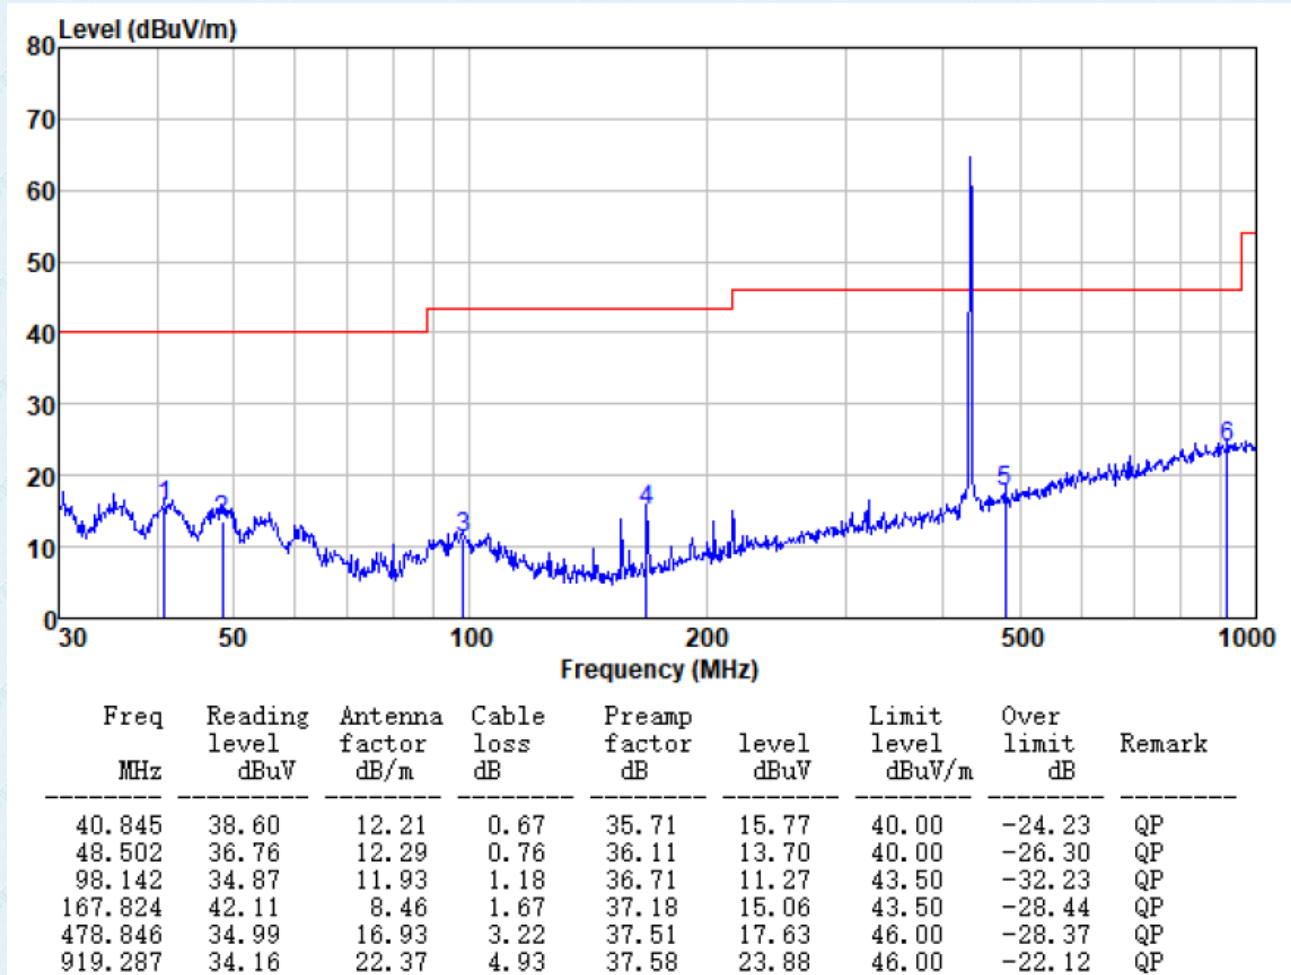


**FSK:**

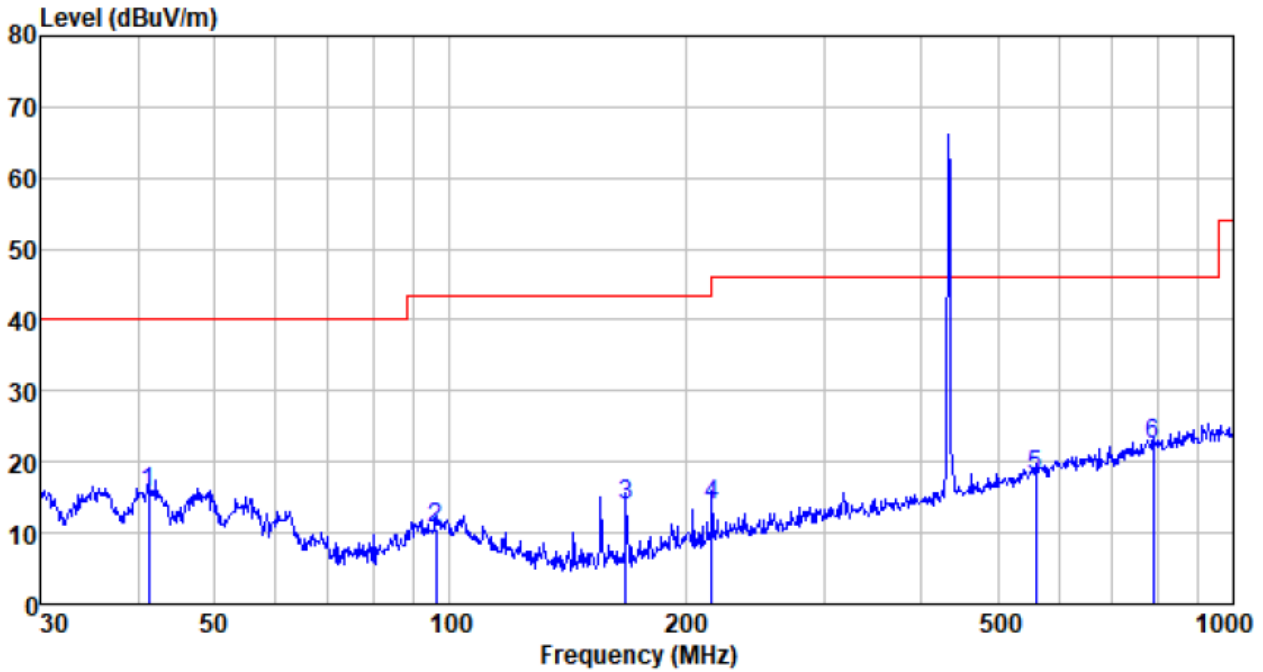


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
41.277	38.37	12.21	0.68	35.74	15.52	40.00	-24.48	QP
96.099	34.36	11.65	1.16	36.69	10.48	43.50	-33.02	QP
167.824	40.80	8.46	1.67	37.18	13.75	43.50	-29.75	QP
216.024	38.39	11.02	1.93	37.35	13.99	46.00	-32.01	QP
558.730	33.26	18.62	3.56	37.53	17.91	46.00	-28.09	QP
790.619	34.41	21.21	4.42	37.62	22.42	46.00	-23.58	QP

Horizontal:

ASK:

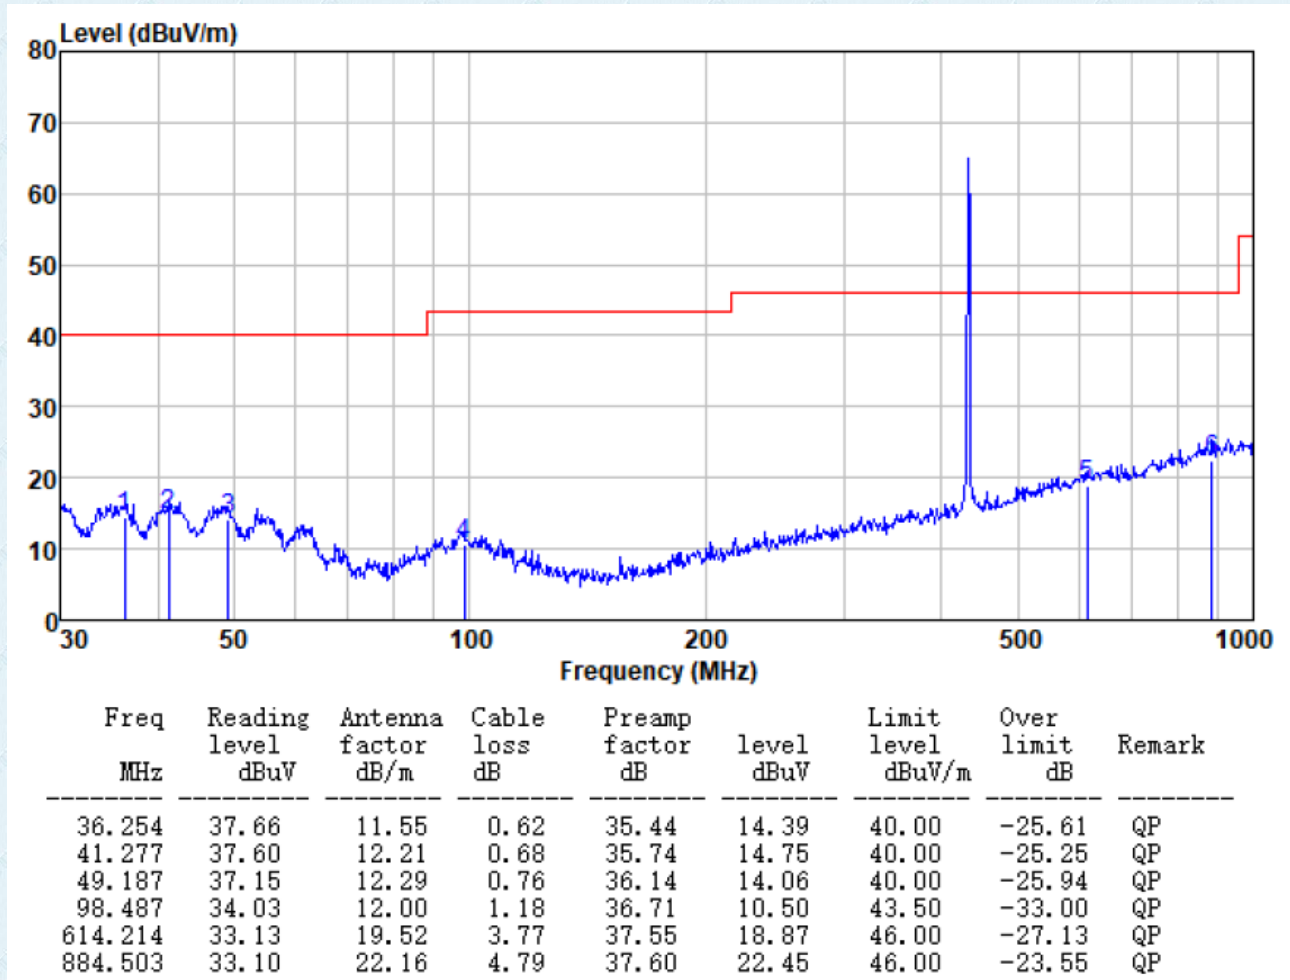

FSK :

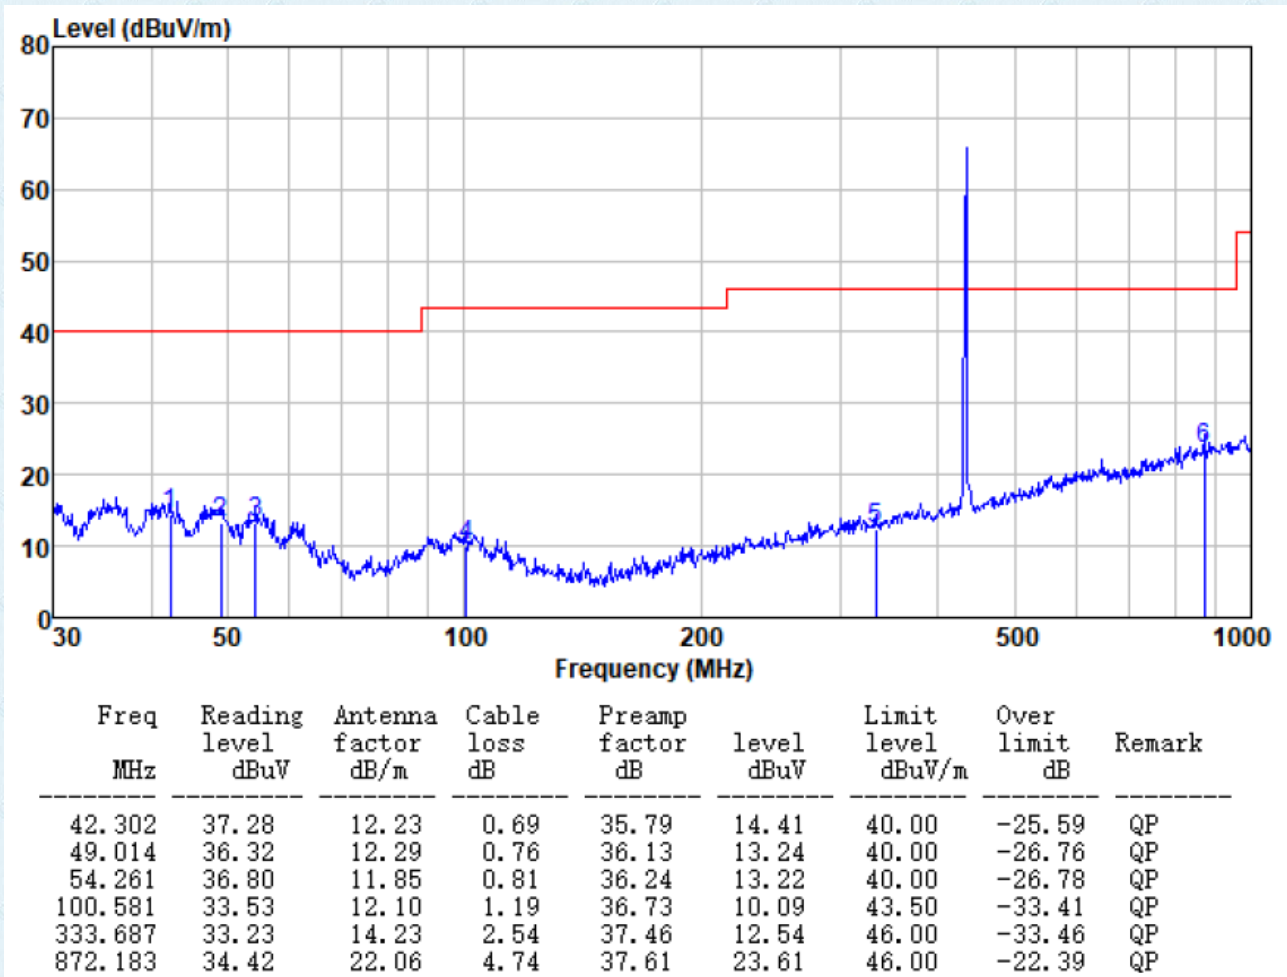



**Above 1G**

**Peak value:**

**ASK:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1400.00	38.94	25.26	4.80	36.09	32.91	74.00	-41.09	Vertical
2160.00	37.63	26.82	5.96	36.65	33.76	74.00	-40.24	Vertical
2805.00	37.17	28.25	6.93	37.17	35.18	74.00	-38.82	Vertical
3595.00	38.29	28.55	8.13	37.36	37.61	74.00	-36.39	Vertical
4140.00	35.50	29.94	8.85	37.46	36.83	74.00	-37.17	Vertical
4745.00	34.31	31.24	9.32	37.71	37.16	74.00	-36.84	Vertical
1670.00	40.96	25.81	5.22	36.29	35.70	74.00	-38.30	Horizontal
2280.00	39.20	27.13	6.14	36.76	35.71	74.00	-38.29	Horizontal
2940.00	38.27	28.49	7.14	37.26	36.64	74.00	-37.36	Horizontal
3375.00	39.44	28.38	7.79	37.34	38.27	74.00	-35.73	Horizontal
4030.00	35.09	29.67	8.76	37.41	36.11	74.00	-37.89	Horizontal
4900.00	34.11	31.52	9.43	37.76	37.30	74.00	-36.70	Horizontal


**FSK:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1450.00	38.50	25.38	4.88	36.13	32.63	74.00	-41.37	Vertical
2075.00	37.96	26.59	5.82	36.57	33.80	74.00	-40.20	Vertical
2720.00	37.81	28.10	6.80	37.11	35.60	74.00	-38.40	Vertical
3740.00	36.20	28.92	8.34	37.38	36.08	74.00	-37.92	Vertical
4255.00	34.40	30.21	8.93	37.51	36.03	74.00	-37.97	Vertical
4570.00	33.96	30.93	9.18	37.64	36.43	74.00	-37.57	Vertical
1525.00	39.36	25.55	5.00	36.19	33.72	74.00	-40.28	Horizontal
2485.00	39.48	27.66	6.45	36.93	36.66	74.00	-37.34	Horizontal
2845.00	37.70	28.32	6.99	37.20	35.81	74.00	-38.19	Horizontal
3700.00	36.19	28.82	8.29	37.37	35.93	74.00	-38.07	Horizontal
4335.00	35.16	30.40	9.00	37.54	37.02	74.00	-36.98	Horizontal
4945.00	34.44	31.60	9.47	37.78	37.73	74.00	-36.27	Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *Average value = Peak value + Duty cycle factor*

### 7.3 20dB Occupy Bandwidth

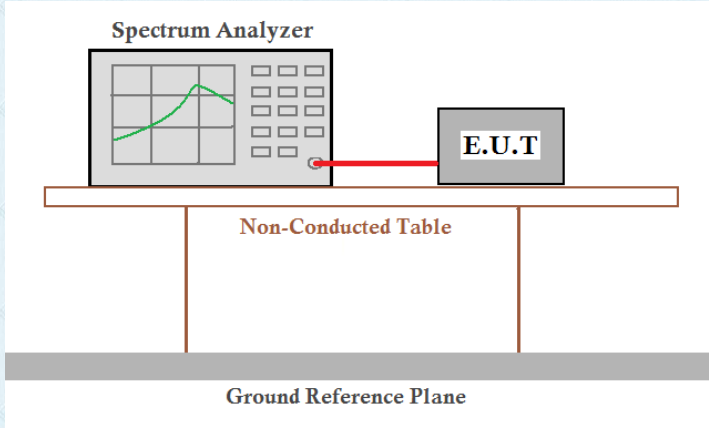Test Requirement:	FCC Part15 C Section 15.231 (c)
Test Method:	ANSI C63.10:2013
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


#### Measurement Data

Modulation	Test Frequency (MHz)	20dB bandwidth (MHz)	Limit (MHz)	Result
ASK	433.92	0.052	1.0848	Pass
FSK	433.92	0.148	1.0848	Pass


Note: Limit= Fundamental frequency×0.25%=433.92×0.25%=1.0848MHz

Test plot as follows:


ASK

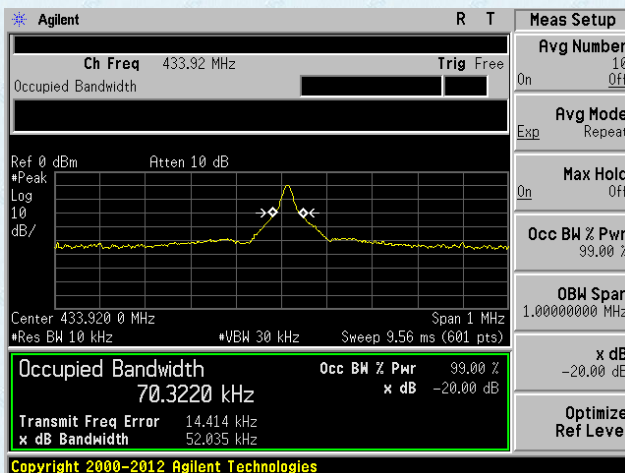

FSK

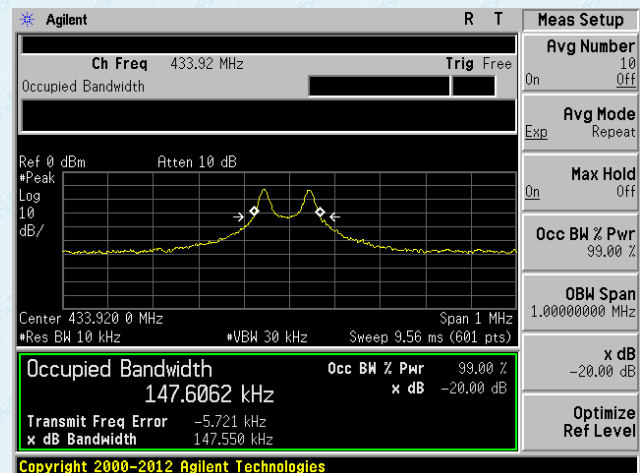

## 7.4 Dwell time & Silent Time

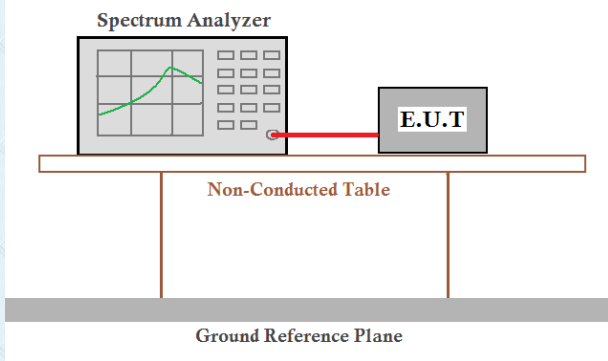Test Requirement:	FCC Part15 C Section 15.231 (e)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, span=0Hz, detector: Peak
Limit:	Dwell Time: Not more than 1s Silent Time: no case less than 10s
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement data:

#### Dwell Time


Modulation	Duration of each TX(second):	Limit (second)	Result
ASK	0.2375	<1.0	Pass
FSK	0.2461	<1.0	Pass

#### Silent Time




Modulation	Silent of each TX(second):	Limit (second)	Result
ASK	31.1	>10	Pass
FSK	30.3	>10	Pass

Test plot as follows:

ASK

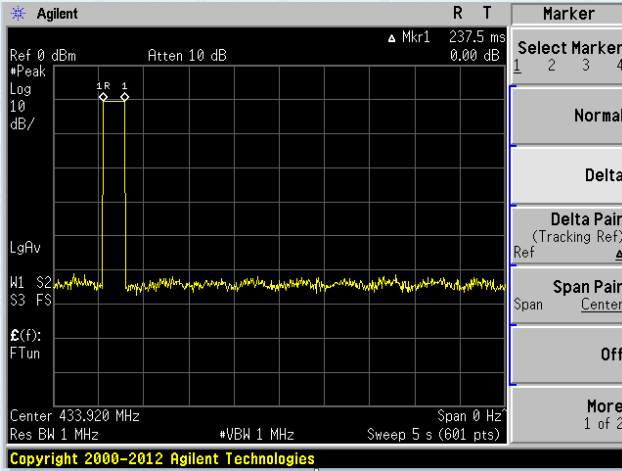

FSK

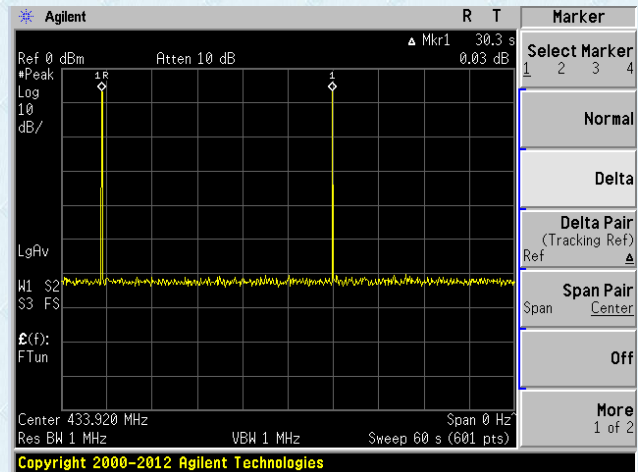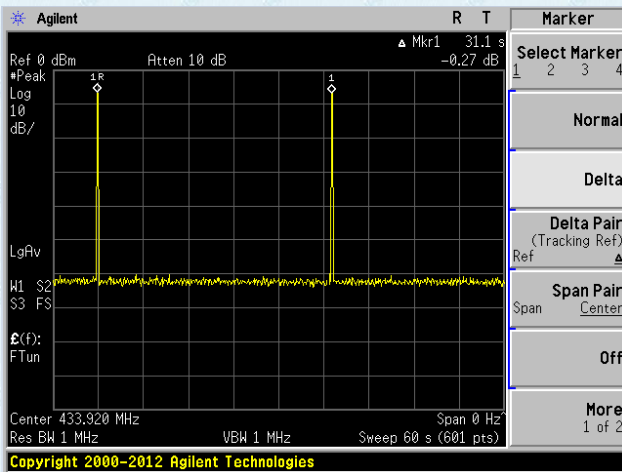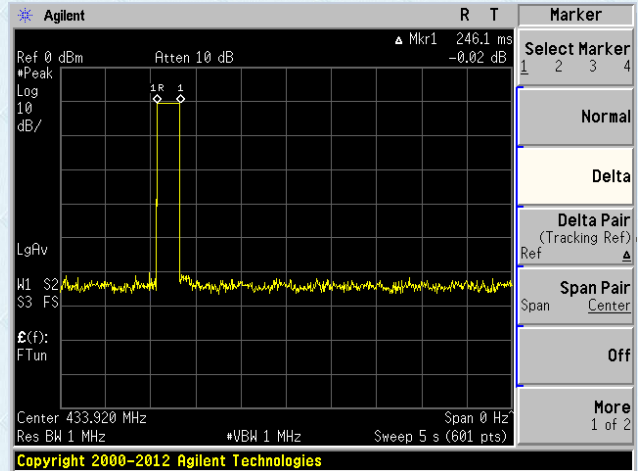

## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----