



Canada

# EMC & RF Test Report

As per

## RSS-247 Issue 2:2017 & FCC Part 15 Subpart 15.247:2015

Unlicensed Intentional Radiators  
(DTS)  
on the

### EB-SMSWV-02

Issued by:

**TÜV SÜD Canada Inc.**  
11 Gordon Collins Dr,  
Gormley, ON, L0H 1G0  
Canada  
Ph: (905) 883-7255

Min Xie,  
Sr. EMC Engineer

Reviewed by:


Amir Emami,  
Project Engineer

Testing produced for




See Appendix A for full  
client & EUT details.



Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Table of Contents

Table of Contents .....	2
Report Scope .....	3
Summary .....	4
Test Results Summary .....	5
Notes, Justifications, or Deviations .....	6
Sample Calculation(s) .....	6
Applicable Standards, Specifications and Methods .....	7
Document Revision Status .....	8
Definitions and Acronyms .....	9
Testing Facility .....	10
Calibrations and Accreditations .....	10
Testing Environmental Conditions and Dates .....	11
Detailed Test Results Section .....	12
6dB Bandwidth of Digitally Modulated Systems .....	13
Maximum Peak Envelope Conducted Power - DM .....	22
Antenna Spurious Conducted Emissions (-20 dBc Requirement) .....	28
Radiated Emissions in Restricted Band .....	33
Power Spectral Density .....	74
Power Line Conducted Emissions .....	80
Appendix A – EUT Summary .....	86

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Report Scope

This report addresses the EMC verification testing and test results of the **Ecobee Inc.'s EB-SMSWV-02**, and is herein referred to as EUT (Equipment Under Test). The EUT was tested for compliance against the following standards:

RSS-247 Issue 2:2017


FCC Part 15 Subpart C 15.247:2015

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc. accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc., unless otherwise stated.


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Summary

The results contained in this report relate only to the item(s) tested.

EUT:	EB-SMSWV-02
FCC Certification #, FCC ID:	WR9EBSMSW1V002
Industry Canada Certification #, IC:	7981A- EBSMSW1V002
EUT passed all tests performed	Yes
Tests conducted by	Min Xie


For testing dates, see "Testing Environmental Conditions and Dates".

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS-GEN (Table 6)	Restricted Bands for intentional operation	QuasiPeak Average	Pass
FCC 15.207 RSS-GEN (Table 3)	Power line conducted emissions	QuasiPeak Average	Pass
FCC 15.209 RSS-GEN (Table 4)	Spurious Radiated emissions	QuasiPeak Average	Pass
FCC 15.247(a)2 RSS-247 5.2 (1)	6 dB Bandwidth	> 500 kHz	Pass
FCC 15.247(b)2 RSS-247 5.4 (4)	Max output power	< 1 Watt	Pass
FCC 15.247(b)(4) RSS-247 5.4 (4)	Antenna Gain	< 6 dBi	Pass See Justifications
FCC 15.247(d) RSS-247 5.5	Antenna conducted spurious	< 20 dBc	Pass
FCC 15.247(e) RSS-247 5.2 (2)	Spectral Density	< 8 dBm (3 kHz BW)	Pass
FCC 15.247(i) RSS-102	Maximum Permissible Exposure	> 20 cm separation.	Pass See justification and calculations
<b>Overall Result</b>			<b>PASS</b>

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '\*'.

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

### **Notes, Justifications, or Deviations**

The following notes, justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS-247 section 5.5), the unit uses a -2.3 dBi monopole flex PCB antenna which is less than 6 dBi gain.

For the Restricted Bands of operation, the EUT is designed to only operate between 2400 – 2483.5 MHz band.

The EUT is not a hybrid system and FCC 15.247 (f) does not apply to it.

For maximum permissible exposure is designed to operate greater than 20 cm from any personnel during normal operation. No testing is required, however worst case calculated exposure compliance follows later in this report.

The EUT contains a 902 – 928 MHz FHSS transmitter and a 2400 – 2483.5 MHz DTS transmitter. The Firmware guarantees simultaneous will not occur. Antenna co-location testing is therefore not applicable.

For maximum permissible exposure, this device operates at less than 1 Watt at 2400 – 2483.5 MHz and is designed to operate greater than 20 cm from any personnel during normal operation. No testing is required, however worst case calculated exposure compliance was shown in the RF Exposure exhibits.

The EUT is an 802.11 complaint transceiver. It have B/G/N protocols. The N protocol operates with 20 MHz bandwidth. Each protocol have multiple modulation schemes and data rates. For each protocol, bandwidth and power were pre-scanned and the worst case results were presented in this report.

### **Sample Calculation(s)**

#### **Radiated Emission Test**

Margin = Limit – (Received Signal + Antenna Factor + Cable Loss – Pre-Amp Gain)

Margin = 50.5dB $\mu$ V/m – (50dB $\mu$ V + 10dB + 2.5dB – 20dB)


Margin = 8.0 dB (pass)

#### **Power Line Conducted Emission Test**

Margin = Limit – (Received Signal + Attenuation Factor + Cable Loss + LISN Factor)


Margin = 73.0dB $\mu$ V – (50dB $\mu$ V + 10dB + 2.5dB + 0.5dB)

Margin = 10.0 dB (pass)

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Applicable Standards, Specifications and Methods


ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10:2013	American National Standard For Testing Unlicensed Wireless Devices
CFR 47 FCC 15 Subpart C:2015	Code of Federal Regulations – Radio Frequency Devices, Intentional Radiators
CISPR 22:2008	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
ICES-003 Issue 6 2016	Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard
RSS-GEN Issue 4 2014	General Requirements and Information for the Certification of Radio Apparatus
RSS-247 Issue 2:2017	Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS 102 Issue 5 2015	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
FCC KDB 447498 v06	RF Exposure Procedures And Equipment Authorization Policies For Mobile And Portable Devices
ISO 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Document Revision Status

Revision 000 - October 2, 2018  
Initial Release



Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Definitions and Acronyms

The following definitions and acronyms are applicable in this report.  
See also ANSI C63.14.

**AE** – Auxiliary Equipment. A digital accessory that feeds data into or receives data from another device (host) that in turn, controls its operation.

**BW** – Bandwidth. Unless otherwise stated, this refers to the 6 dB bandwidth.

**EMC** – Electro-Magnetic Compatibility. The ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

**EMI** – Electro-Magnetic Immunity. The ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.


**EUT** – Equipment Under Test. A device or system being evaluated for compliance that is representative of a product to be marketed.

**ITE** – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

**LISN** – Line Impedance Stabilization Network

**NCR** – No Calibration Required

**RF** – Radio Frequency


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Testing Facility

Testing for EMC on the EUT was carried out at TÜV SÜD Canada labs near Toronto, Ontario. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT that has a maximum width or length of up to 2m and a height of up to 3m. The chamber is equipped with a turntable that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120Vac and 240Vac single phase, or devices that are rated for a 208Vac 3 phase input. DC capability is also available for testing. The chamber is equipped with a mast that controls the polarization and height of the antenna. Control of the mast occurs in the control room adjoining the shielded chamber. Radiated emission measurements are performed using a BiLog antenna and a Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN and using the Vertical Ground plane if applicable.

### **Calibrations and Accreditations**


The 3m semi-anechoic chamber is registered with Federal Communications Commission (FCC, CA6844), Industry Canada (IC, 6844A-3) and Voluntary Control Council for Interference (VCCI, R-4023, G-506, C-4498, and T-1246). This chamber was calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. The NSA data is kept on file at TÜV SÜD Canada. For radiated susceptibility testing, a 16 point field calibration has been performed on the chamber. The field uniformity data is kept on file at TÜV SÜD Canada. TÜV SÜD Canada Inc is accredited to ISO 17025 by A2LA with Testing Certificate #2555.01. The laboratory's current scope of accreditation listing can be found as listed on the A2LA website. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test.

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


### ***Testing Environmental Conditions and Dates***

Following environmental conditions were recorded in the facility during time of testing

<b>Date</b>	<b>Test</b>	<b>Initials</b>	<b>Temperature (°C)</b>	<b>Humidity (%)</b>	<b>Pressure (kPa)</b>
2018/08/20-22	Radiated Emissions	MX	23.8 – 24.6	45.5 - 58.3	101.2 – 101.9
2018/09/06-07	Antenna Conducted Emissions	MX	24.2 – 24.6	43.6 - 48.0	102.1 – 102.3
2018/08/24	Power Line Conducted Emissions	MX	24.8	46.0	102.0

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Detailed Test Results Section**

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## **6dB Bandwidth of Digitally Modulated Systems**

### **Purpose**

The purpose of this test is to ensure that the bandwidth occupied exceeds a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently wide. This also helps prevent corruption of data by ensuring adequate data separation to distinguish the reception of the intended information.

### **Limits and Methods**

The Limit is as specified in FCC Part 15.247 and RSS 247.

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz. This should be measured with a 100 kHz RBW and a 300 kHz VBW.

The method is given in ANSI C63.10 Clause 11.8 DTS bandwidth.


### **Results**

The EUT passed. The minimum measured 6 dB BW was of all modulations were greater than 500 kHz.

Additional 99% bandwidth were measured for information purpose. There is no requirement on 99% bandwidth.

The EUT supports three modes of operation, 802.11 b/g/n. The n-mode only support 20 MHz nominal bandwidth. Three Channels for each mode were measured. The following tables show the 6 dB and 99% bandwidth: The external attenuator and cable loss were accounted for as reference offset in the spectrum analyzer.

<b>Bandwidth - B-Mode</b>					
Channel	Frequency (MHz)	6 dB BW (MHz)	99% BW (MHz)	6 dB BW Limit (MHz)	Pass/Fail
Low	2412	11.830	14.50	0.5	Pass
Mid	2437	11.940	14.66	0.5	Pass
High	2462	12.099	14.50	0.5	Pass


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

<b>Bandwidth G-Mode</b>					
Channel	Frequency (MHz)	6 dB BW (MHz)	99% BW (MHz)	6 dB BW Limit (MHz)	Pass/Fail
Low	2412	16.667	16.60	0.5	Pass
Mid	2437	16.651	16.67	0.5	Pass
High	2462	16.667	16.67	0.5	Pass


<b>Bandwidth N-Mode</b>					
Channel	Frequency (MHz)	6 dB BW (MHz)	99% BW (MHz)	6 dB BW Limit (MHz)	Pass/Fail
Low	2412	17.885	17.88	0.5	Pass
Mid	2437	17.884	17.82	0.5	Pass
High	2462	17.885	17.82	0.5	Pass

### Graph(s)

The graphs shown below show the OBW during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the 6 dB bandwidth of a channel during operation of the EUT. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.


Client	Ecobee Inc.	 Canada
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

6 dB Bandwidth B- Mode  
Mid Channel

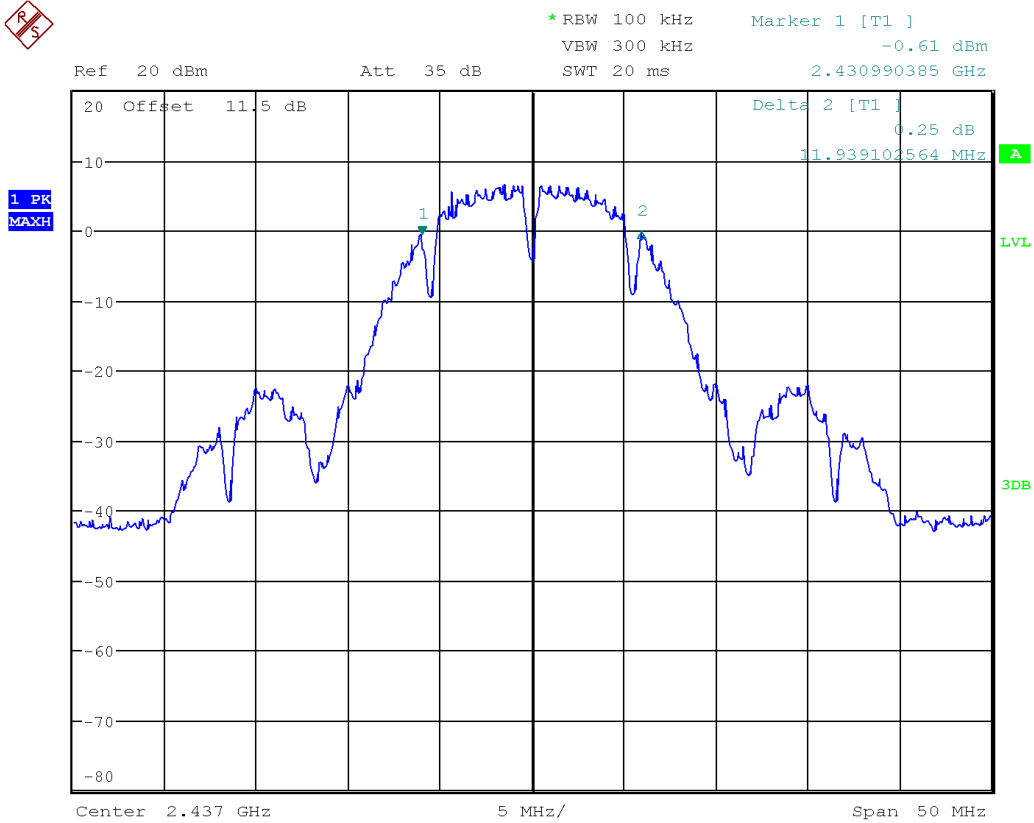


Date: 6.SEP.2018 15:03:11

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.


Client	Ecobee Inc.	 Canada
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

99% Bandwidth B- Mode  
Mid Channel

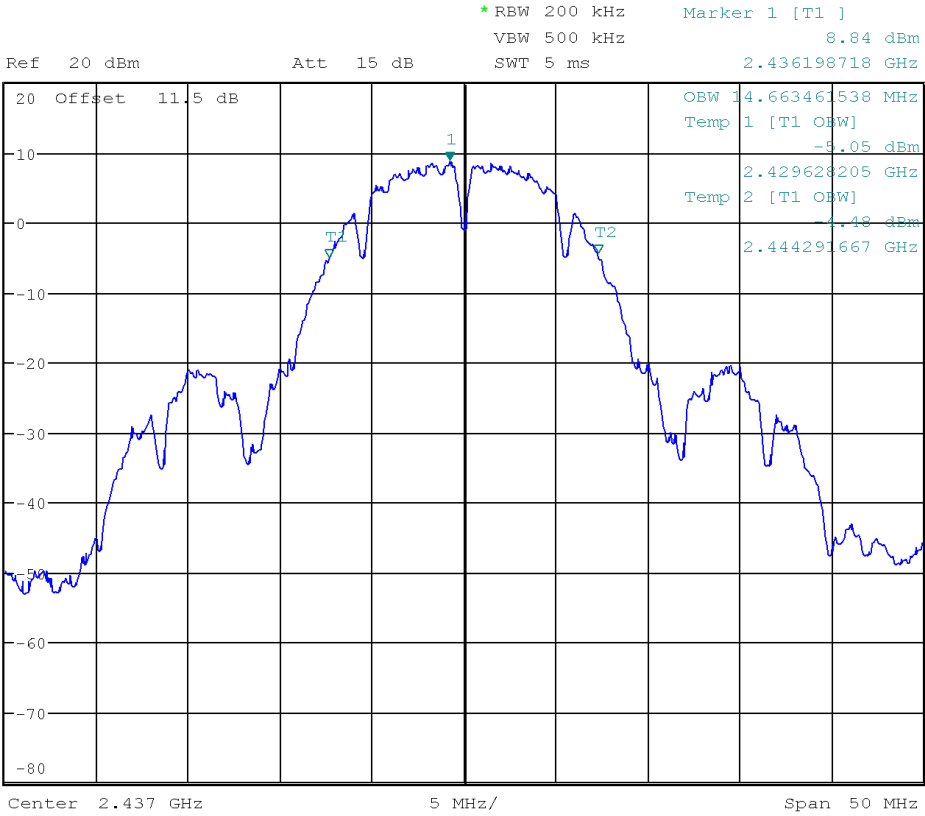


Date: 6.SEP.2018 15:04:55




Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**6 dB Bandwidth, G - Mode  
Mid Channel**

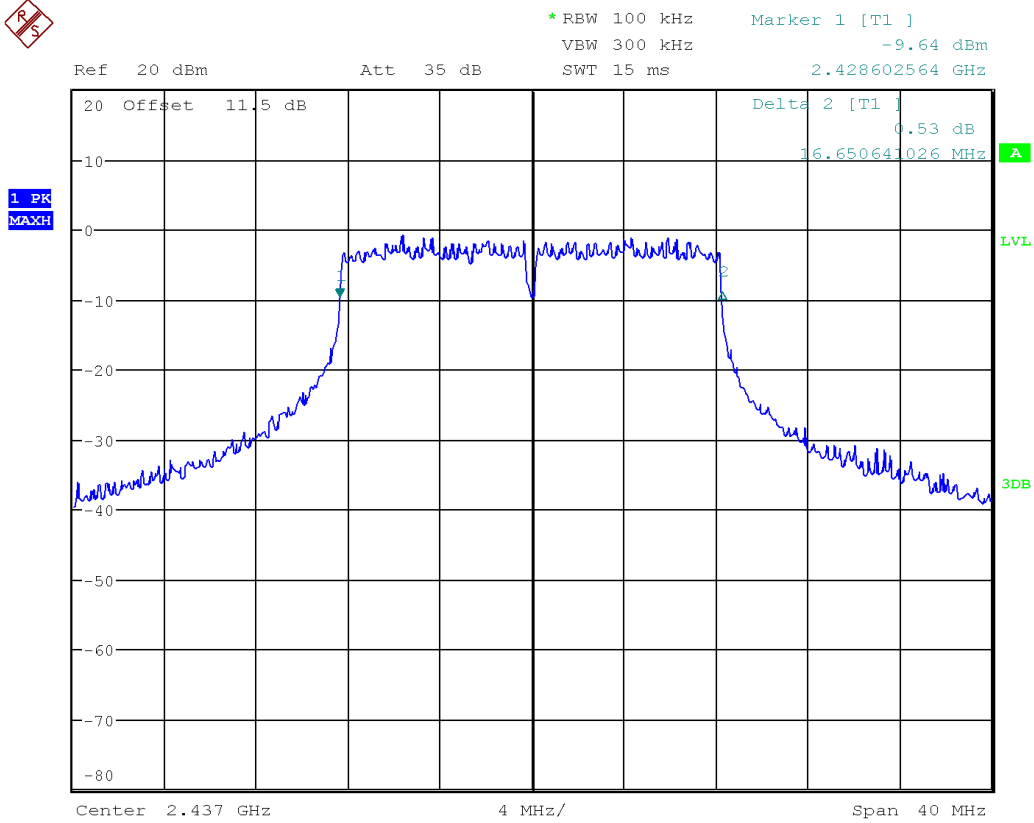


Date: 6.SEP.2018 17:23:39

Client	Ecobee Inc.	 Canada
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


### 99% Bandwidth, G - Mode Mid Channel

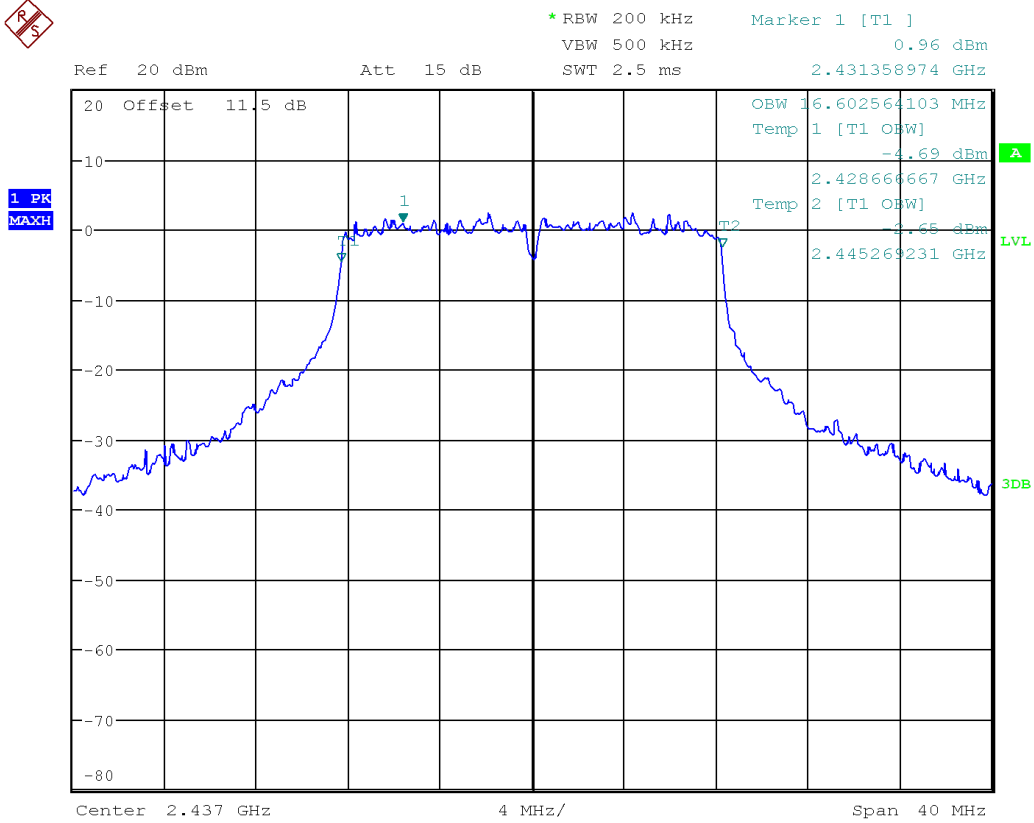


Date: 6.SEP.2018 17:25:24

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


### 6 dB Bandwidth, N-Mode Mid Channel

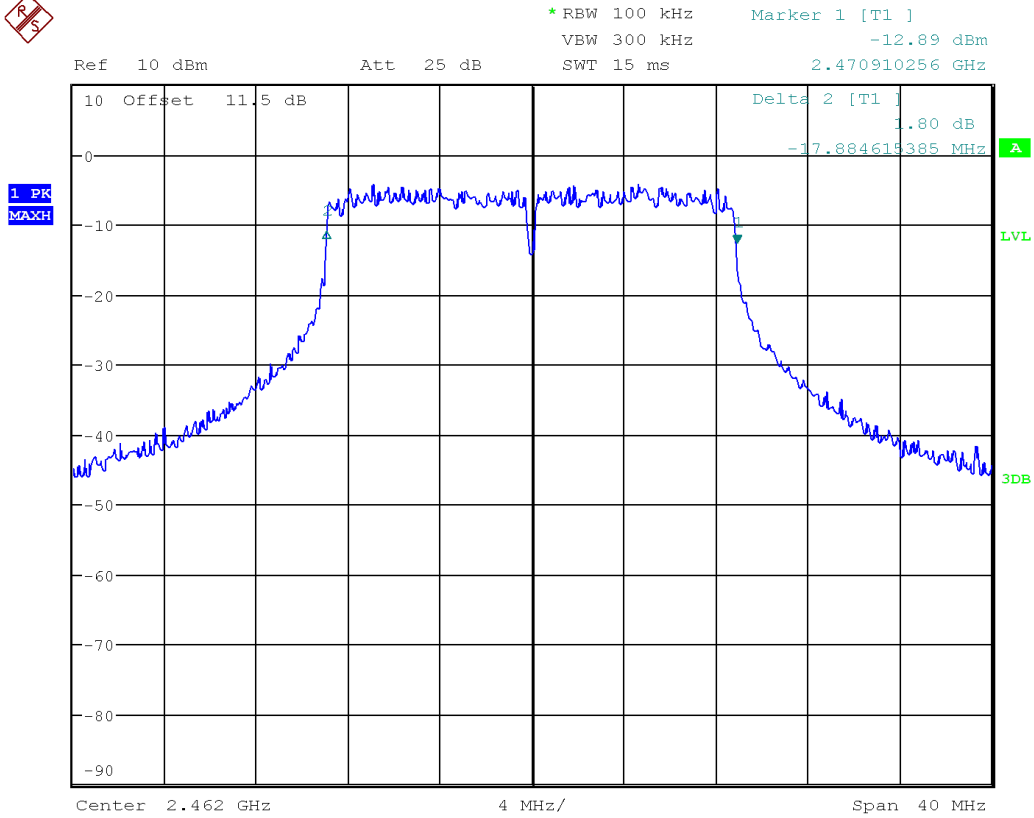

Date: 7.SEP.2018 16:06:40


Client	Ecobee Inc.	 TÜV SÜD Canada
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

### 99% Bandwidth, N-Mode Mid Channel

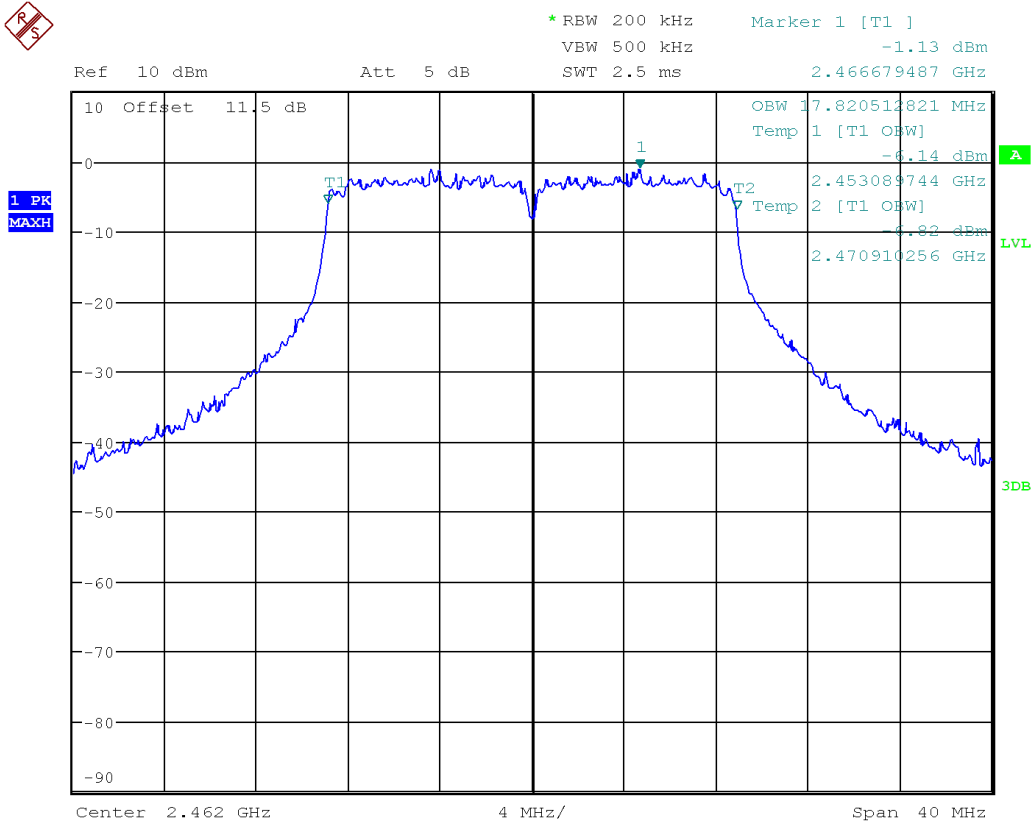

Date: 7.SEP.2018 16:07:28


Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration / Verification date	Next calibration/ Verification due date	Asset #
26.5GHz Spectrum Analyzer	FSQ26	Rohde & Schwarz	Feb-28, 2017	Feb-28, 2019	GEMC 234
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Maximum Peak Envelope Conducted Power - DM

### Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified. This ensures that if the end-user replaces the antenna, that the maximum power does not exceed an amount which may create an excessive power level.

### Limits and Methods

The limits are defined in FCC Part 15.247(b) and RSS 247.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands, the peak limit is 1 watt.


The method is given in ANSI C63.10 Clause 11.9.1.2 Integrated band power method.

### Results

The EUT passed. The EUT was set to transmit at maximum power. The EUT supports three modes of operation, 802.11 b/g/n. The n-mode only support 20 MHz nominal bandwidth. Three Channels for each mode were measured. The following tables show the peak power: The external attenuator and cable loss were accounted for as reference offset in the spectrum analyzer.

Power B-Mode					
Channel	Frequency (MHz)	Power (dBm)	Power (mW)	Limit (mW)	Pass/Fail
Low	2412	20.82	120.78	1000	Pass
Mid	2437	21.10	128.82	1000	Pass
High	2462	20.65	116.14	1000	Pass


Power G-Mode					
Channel	Frequency (MHz)	Power (dBm)	Power (mW)	Limit (mW)	Pass/Fail
Low	2412	19.78	95.06	1000	Pass
Mid	2437	20.83	121.06	1000	Pass
High	2462	20.32	107.65	1000	Pass

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


Power N-Mode					
Channel	Frequency (MHz)	Power (dBm)	Power (mW)	Limit (mW)	Pass/Fail
Low	2412	17.82	60.53	1000	Pass
Mid	2437	18.47	70.31	1000	Pass
High	2462	18.18	65.77	1000	Pass

## Readings

The graphs shown below show the peak power output of the device. This is measured by a max hold on the spectrum analyzer using a RBW of 1MHz. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

Peak Power: B-Mode  
Mid Channel

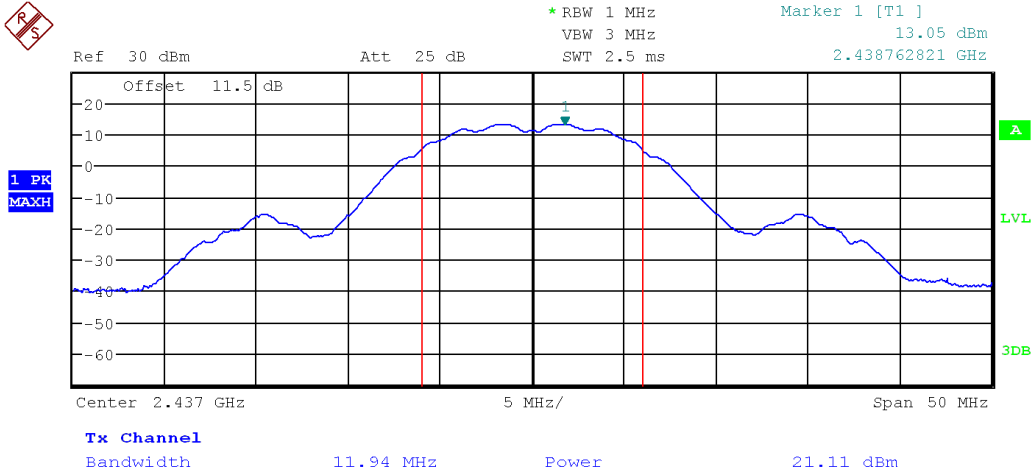


Date: 6.SEP.2018 15:10:56




Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Peak Power: G-Mode  
Mid Channel**

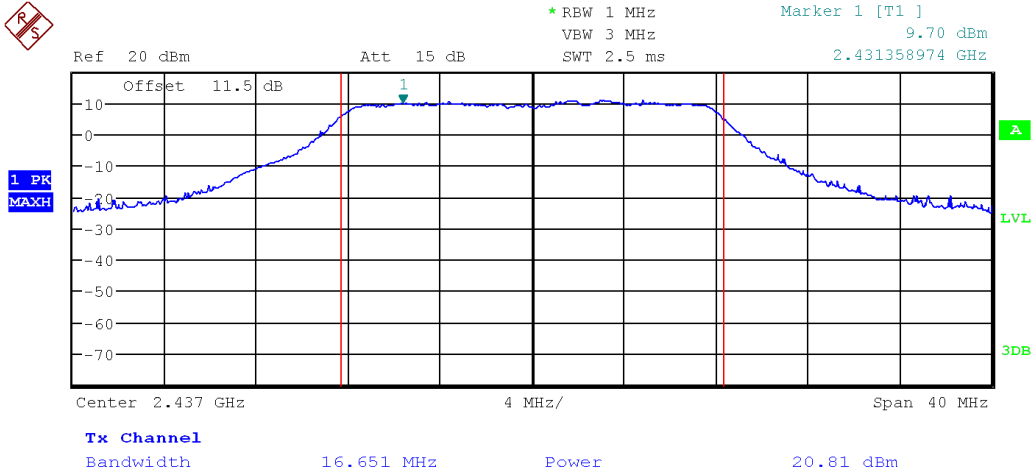

Date: 6.SEP.2018 17:31:00


Client	<b>Ecobee Inc.</b>	 TUV SUD Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Peak Power: N-Mode  
Mid Channel**

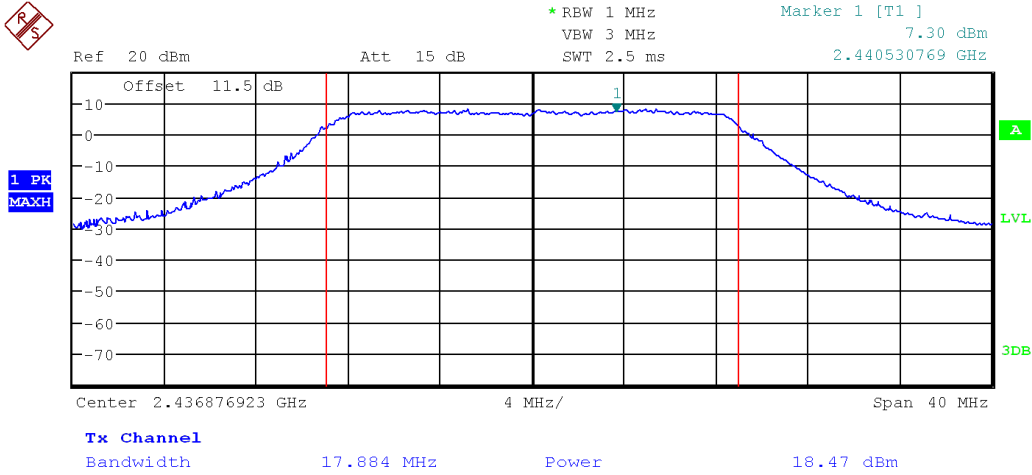

Date: 7.SEP.2018 10:25:02


Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

### Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration / Verification date	Next calibration/ Verification due date	Asset #
26.5GHz Spectrum Analyzer	FSQ26	Rohde & Schwarz	Feb-28, 2017	Feb-28, 2019	GEMC 234
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## ***Antenna Spurious Conducted Emissions (-20 dBc Requirement)***

### **Purpose**

The purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element.

### **Limits and Methods**

The limits are defined in 15.247(d). In any 100 kHz band, the peak spurious harmonics emissions must be at least 20 dB below the fundamental. Spurious Conducted emissions are to be evaluated up to the 10<sup>th</sup> harmonic. This -20 dBc requirement also applies at the 'band edge' or 2.4 GHz and 2.4835 GHz.


The method is given in ANSI C63.10 Clause 11.11 Emissions in nonrestricted frequency bands

### **Results**

The EUT passed.


The EUT was set to transmit at maximum power. The EUT supports three modes of operation, 802.11 b/g/n. The n-mode only support 20 MHz nominal bandwidth. Three Channels for each mode were measured.


Low, middle and high channels were measured. The worst case was presented as a graph for the spectrum. The -20 dBc requirement is shown for the lower band edge at 2.4 GHz in the low band. The -20 dBc requirement is also shown for the higher band edge at 2.4835 GHz in the high band.

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Graph(s)



The graphs shown below shows the peak power spectral density of the device. This is measured by a max hold on the spectrum analyzer using a RBW of 100 kHz. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.

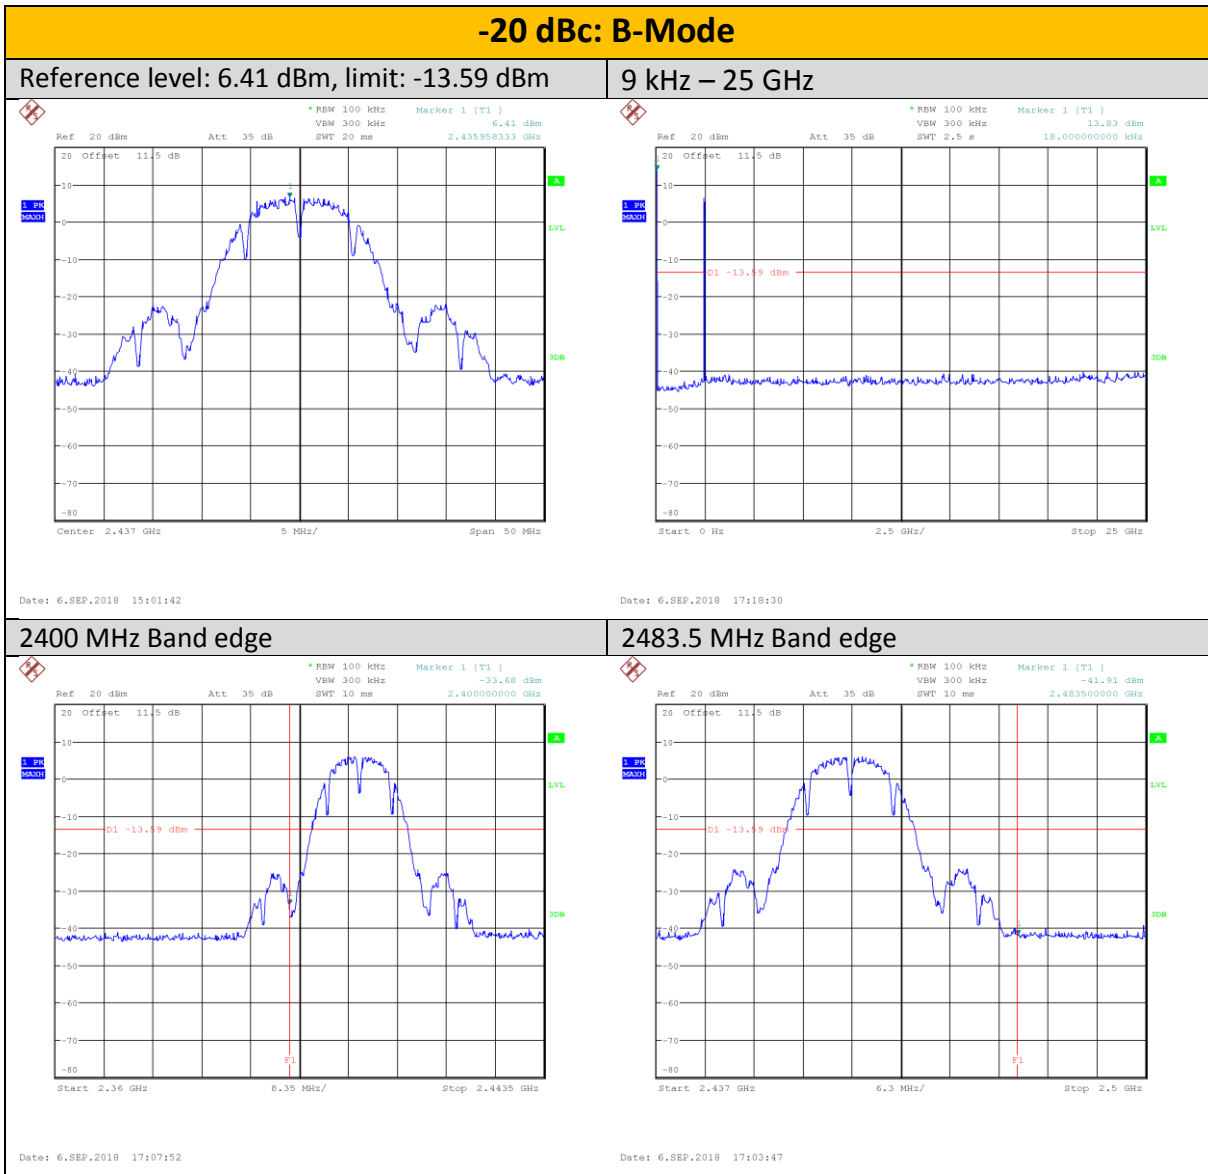

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**-20 dBc: G-Mode**



Reference level: -0.54 dBm, limit: -20.54 dBm      9 kHz – 25 GHz

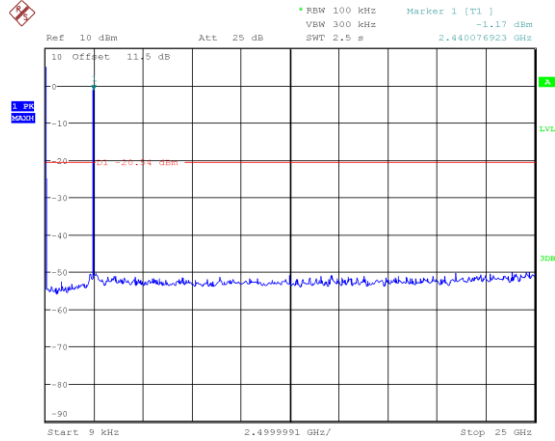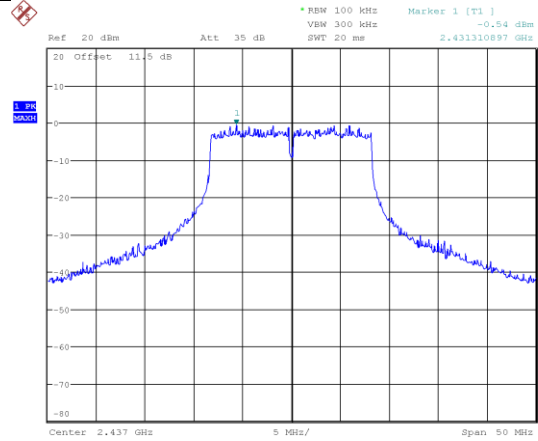

Date: 6.SEP.2018 17:21:21


Date: 6.SEP.2018 17:35:11

**2400 MHz Band edge**      **2483.5 MHz Band edge**

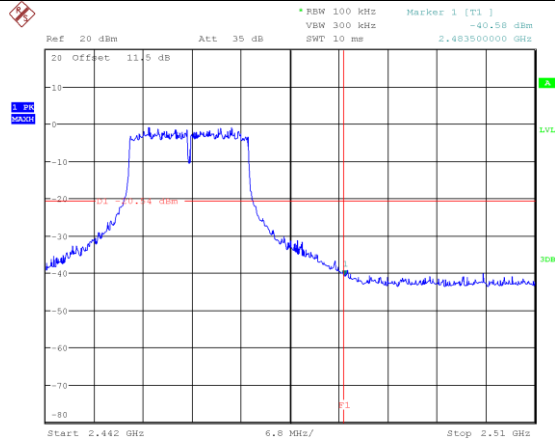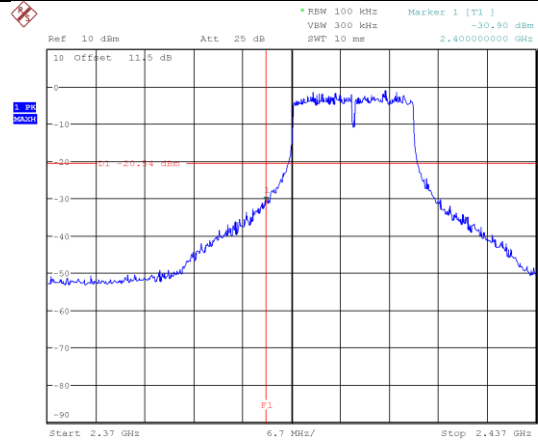



Date: 6.SEP.2018 17:45:06

Date: 6.SEP.2018 18:12:04

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**-20 dBc: N-Mode**



Reference level: -2.60 dBm, limit: -22.60      9 kHz – 25 GHz

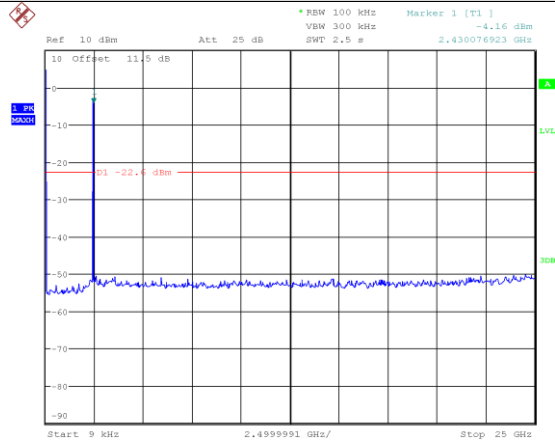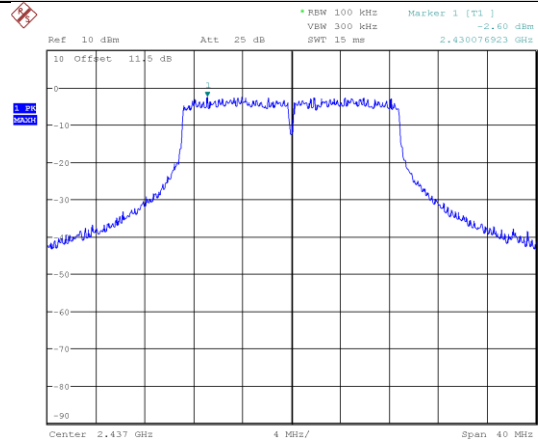

Date: 7.SEP.2018 09:47:49


Date: 7.SEP.2018 09:49:10

2400 MHz Band edge      2483.5 MHz Band edge

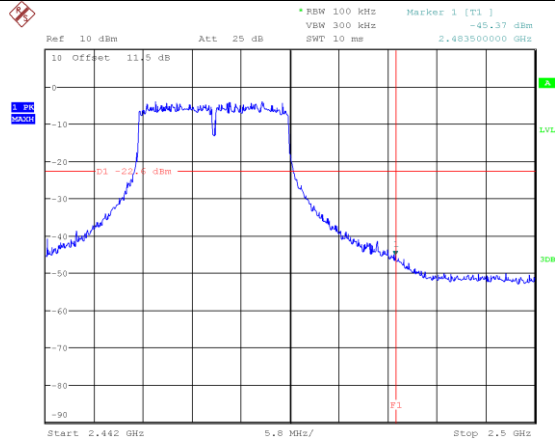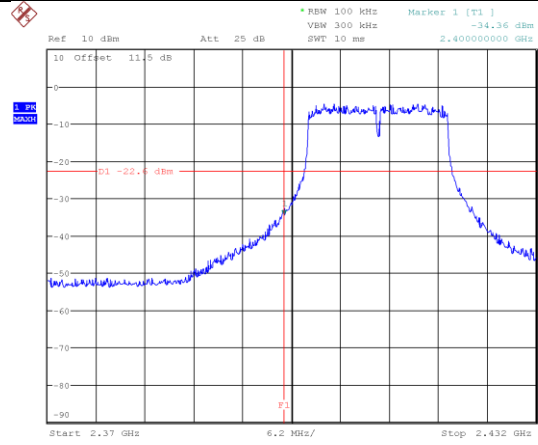

Date: 7.SEP.2018 17:09:41

Date: 7.SEP.2018 11:06:54

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


Note: See ‘Appendix B – EUT & Test Setup Photographs’ for photos showing the test set-up.

### Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration / Verification date	Next calibration/ Verification due date	Asset #
26.5GHz Spectrum Analyzer	FSQ26	Rohde & Schwarz	Feb-28, 2017	Feb-28, 2019	GEMC 234
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

This report module is based on GEMC template “FCC – Power Line Conducted Emissions Class B\_Rev1”



Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## ***Radiated Emissions in Restricted Band***

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

### **Limit and Method**

The method is given in ANSI C 63.10

The limits are as defined in FCC Part 15, Section 15.209 and RSS GEN:

The limits, as defined in 15.247(d) for unintentional radiated emissions apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

All unintentional emissions must also meet the ‘Spurious Conducted Emissions’ requirements of -20 dBc or greater. See also ‘Spurious Conducted Emissions’ for further details.

0.009 MHz – 0.490 MHz, 2400/F (kHz) uV/m at 300 m<sup>1</sup>

0.490 MHz – 1.705 MHz, 24000/F (kHz) uV/m at 30 m<sup>1</sup>

1.705 MHz – 30 MHz, 30 uV/m at 30 m<sup>1</sup>

30 MHz – 88 MHz, 100 uV/m (40.0 dBuV/m<sup>1</sup>) at 3 m

88 MHz – 216 MHz, 150 uV/m (43.5 dBuV/m<sup>1</sup>) at 3 m

216 MHz – 960 MHz, 200 uV/m (46.0 dBuV/m<sup>1</sup>) at 3 m

Above 960 MHz, 500 uV/m (54.0 dBuV/m<sup>1</sup>) at 3 m


Above 1000 MHz, 500 uV/m (54 dBuV/m<sup>2</sup>) at 3m

Above 1000 MHz, 500 uV/m (74 dBuV/m<sup>3</sup>) at 3m


<sup>1</sup>Limit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1

<sup>2</sup>Limit is with 1 MHz measurement bandwidth and using an Average detector

<sup>3</sup>Limit is with 1 MHz measurement bandwidth and using a Peak detector

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

### Typical Radiated Emissions Setup

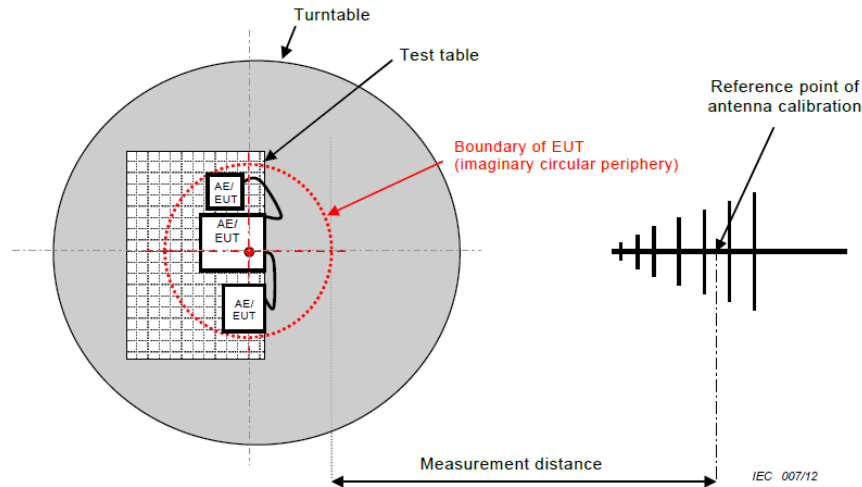

### Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.


### Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360 rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.


In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10<sup>th</sup> harmonic (a minimum of a 24.835 GHz).


Devices scanned may be scanned at alternate test distances, and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz. For example for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.

The EUT was set to transmit at maximum power. The EUT supports three modes of operation, 802.11 b/g/n. Low, middle and high channels in each mode were measured; however the worst case graphs are presented.


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


Band edge measure graphs were shown for illustrations purpose. See final measurement section for all measurements.

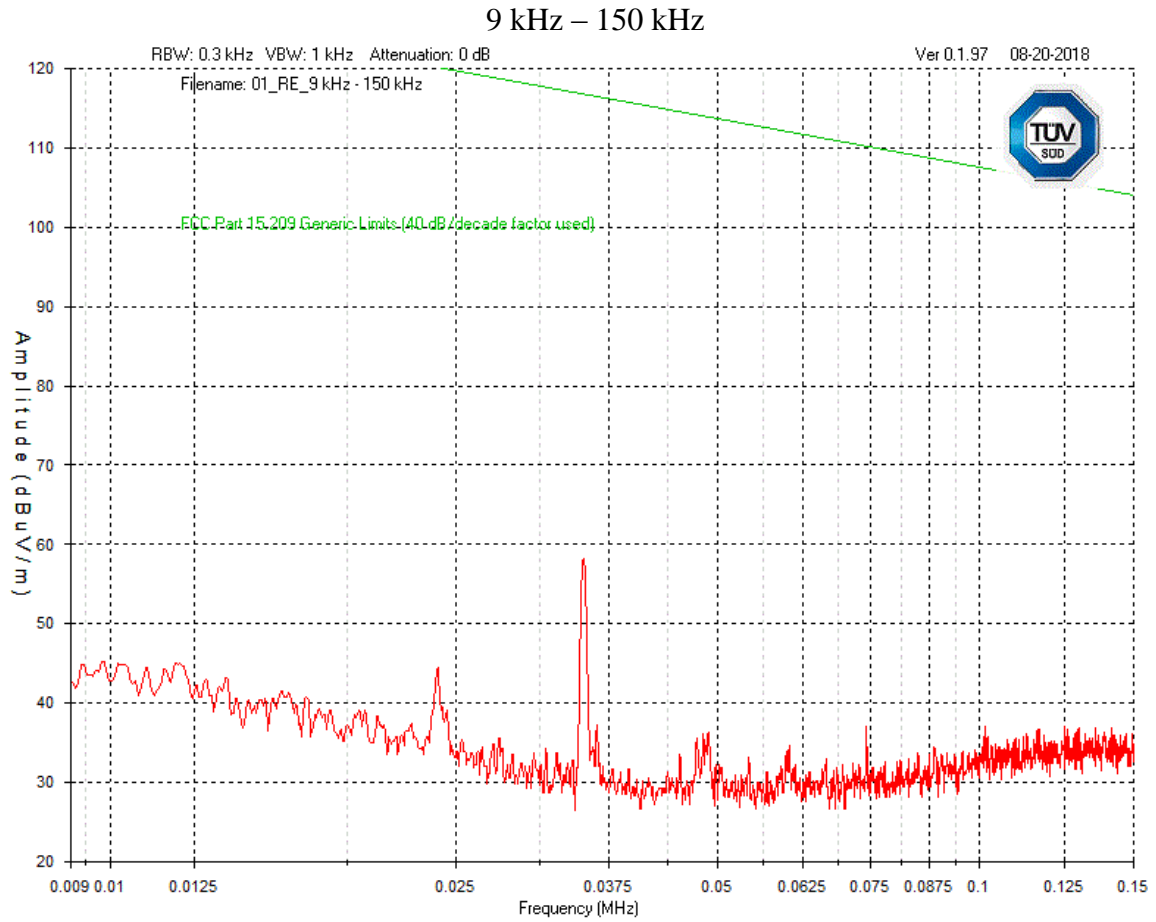


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


150 kHz – 30 MHz

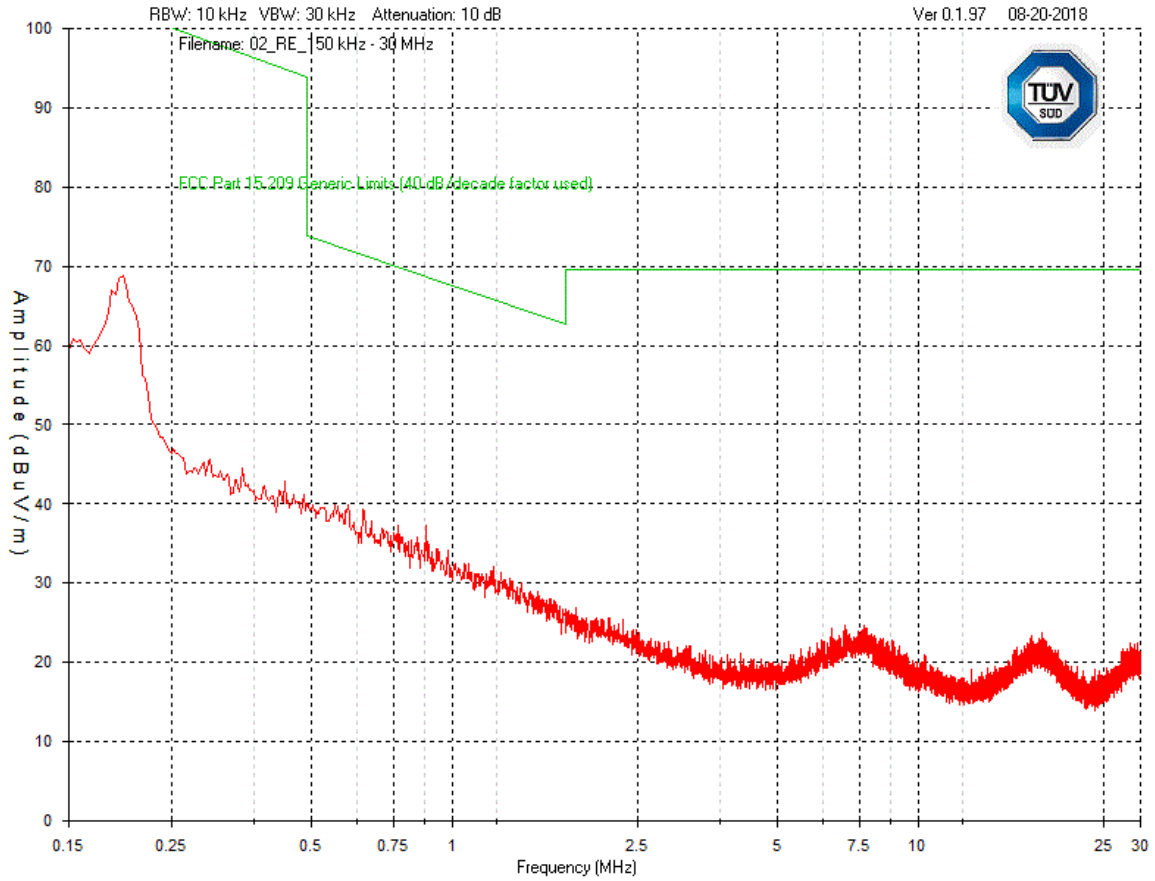


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Mid Channel - 30 MHz – 1 GHz  
Vertical – Peak Emission Graph**

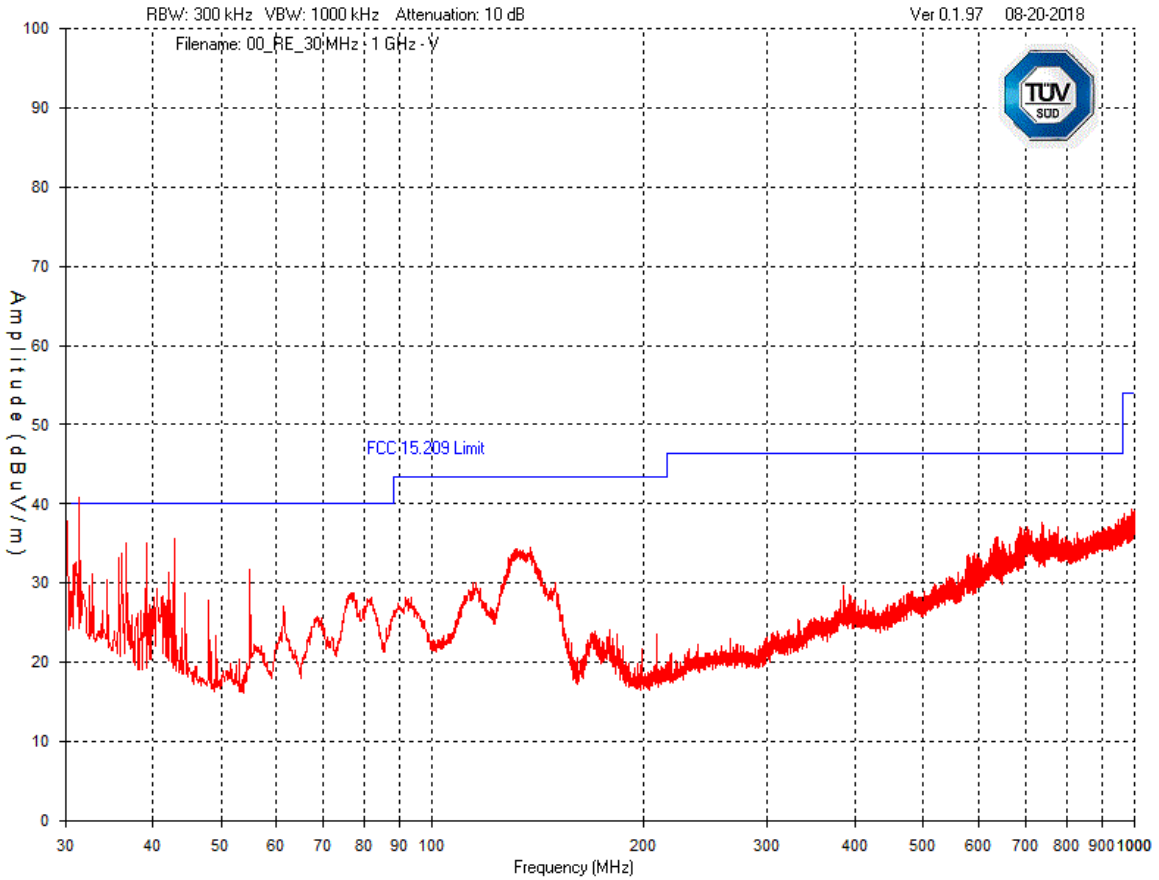


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Mid Channel – 30 MHz – 1 GHz  
Horizontal - Peak Emission Graph**

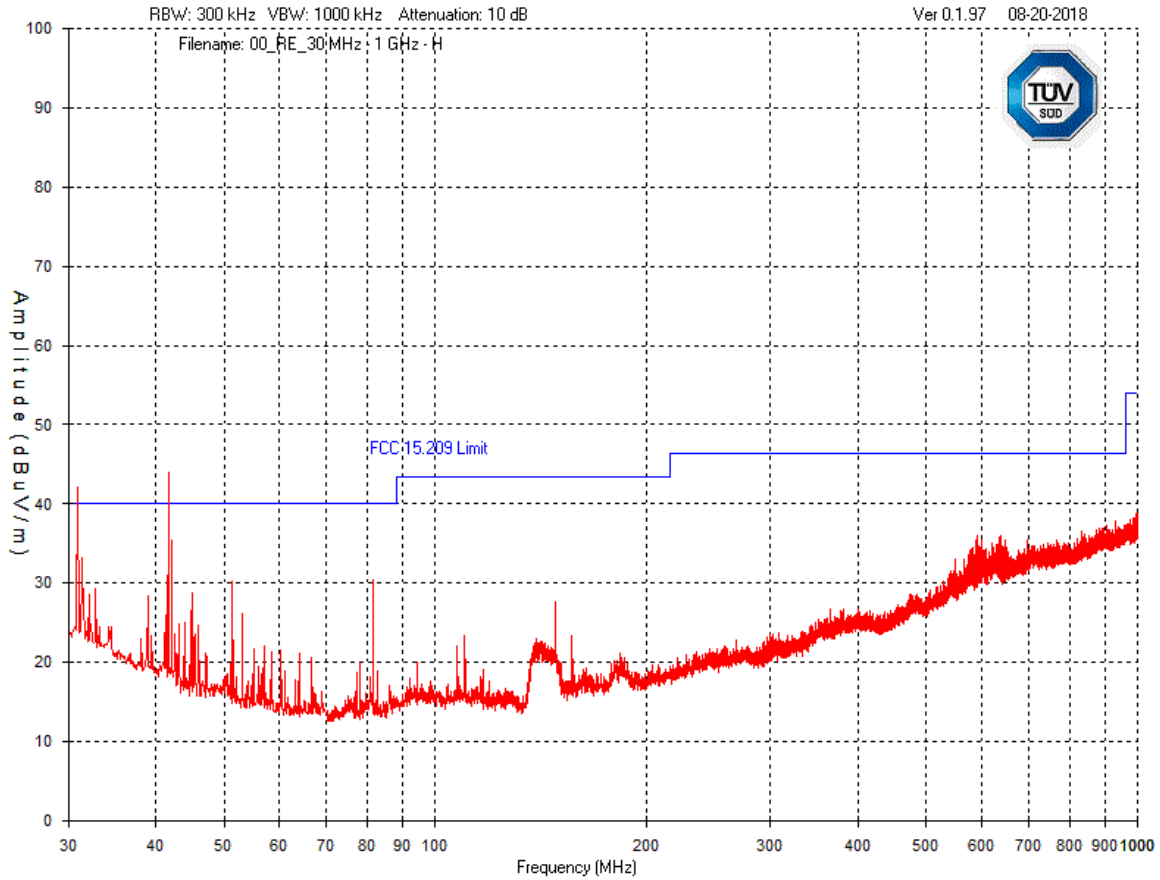


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Mid Channel – 1 GHz – 6 GHz  
Vertical - Peak Emission Graph**

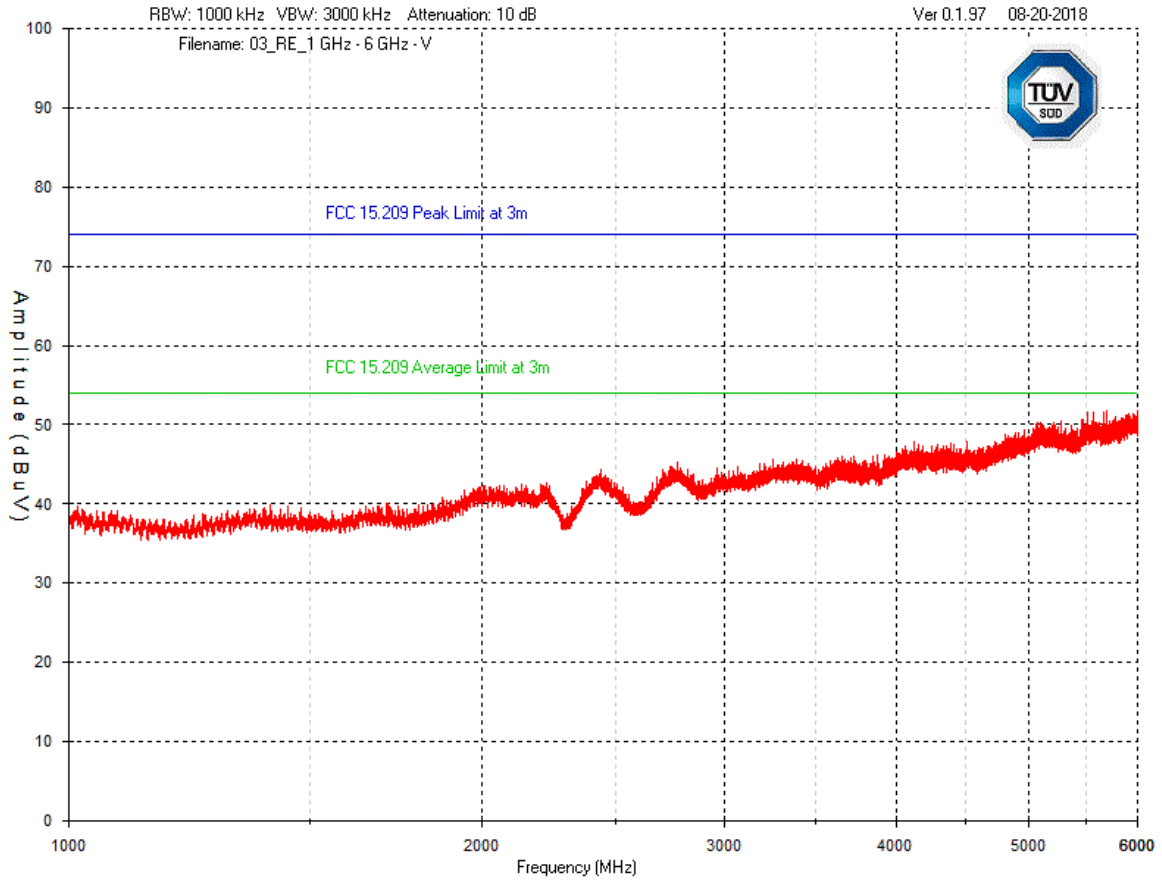


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Mid Channel – 1 GHz – 6 GHz  
Horizontal - Peak Emission Graph**

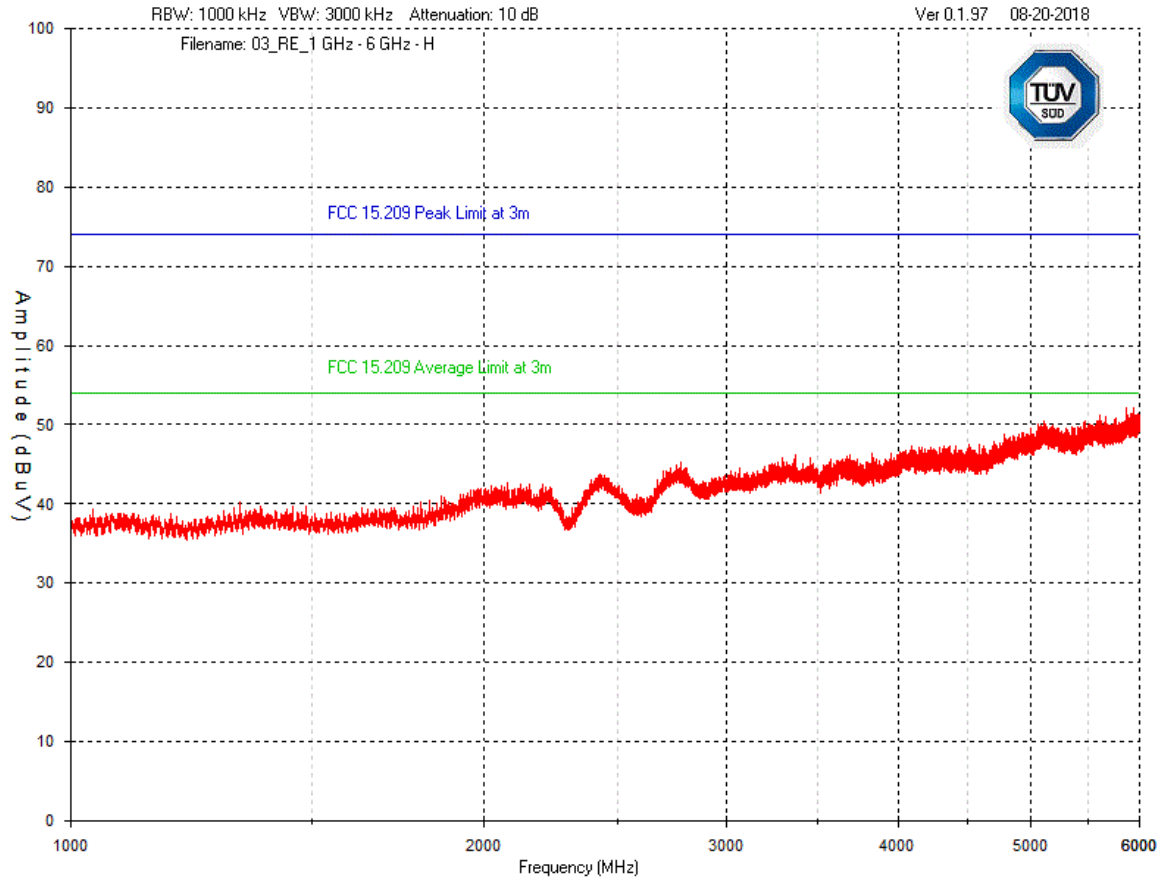




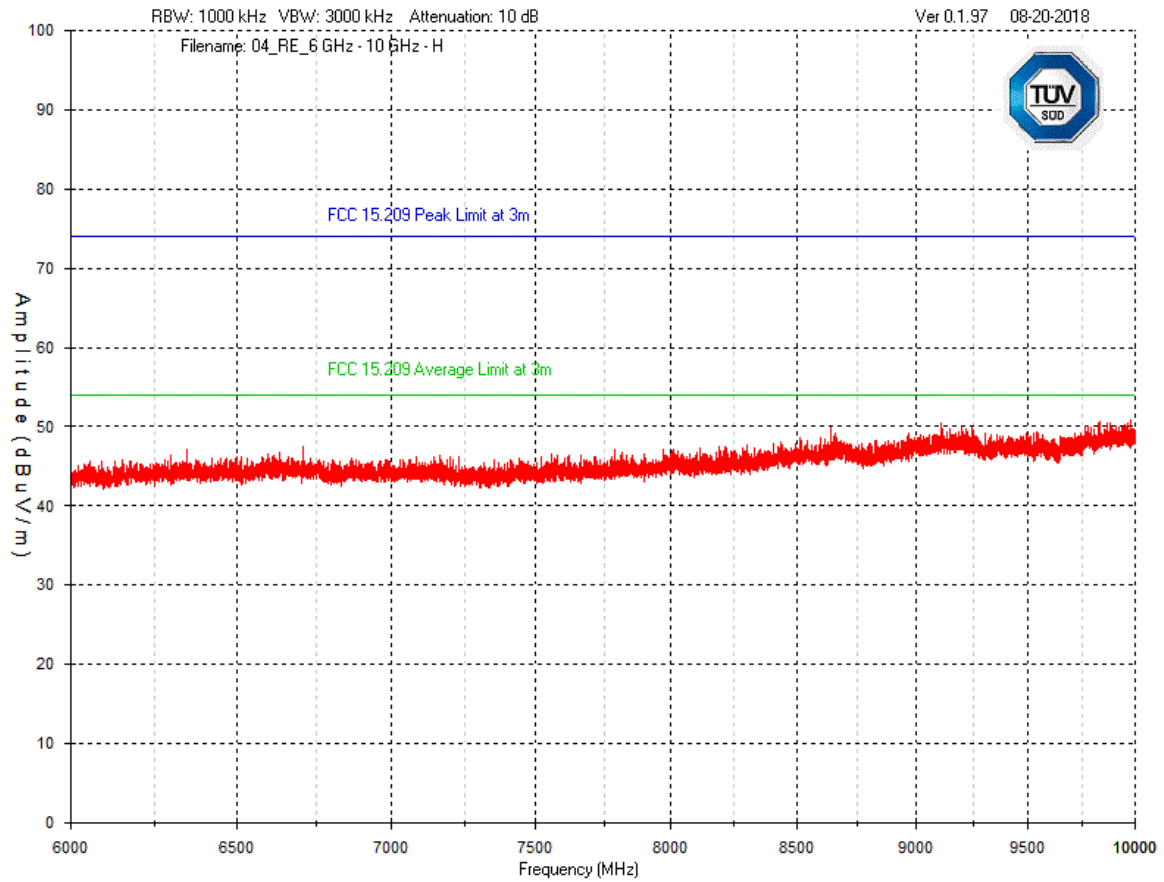
Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Mid Channel – 6 GHz – 10 GHz  
Vertical - Peak Emission Graph**

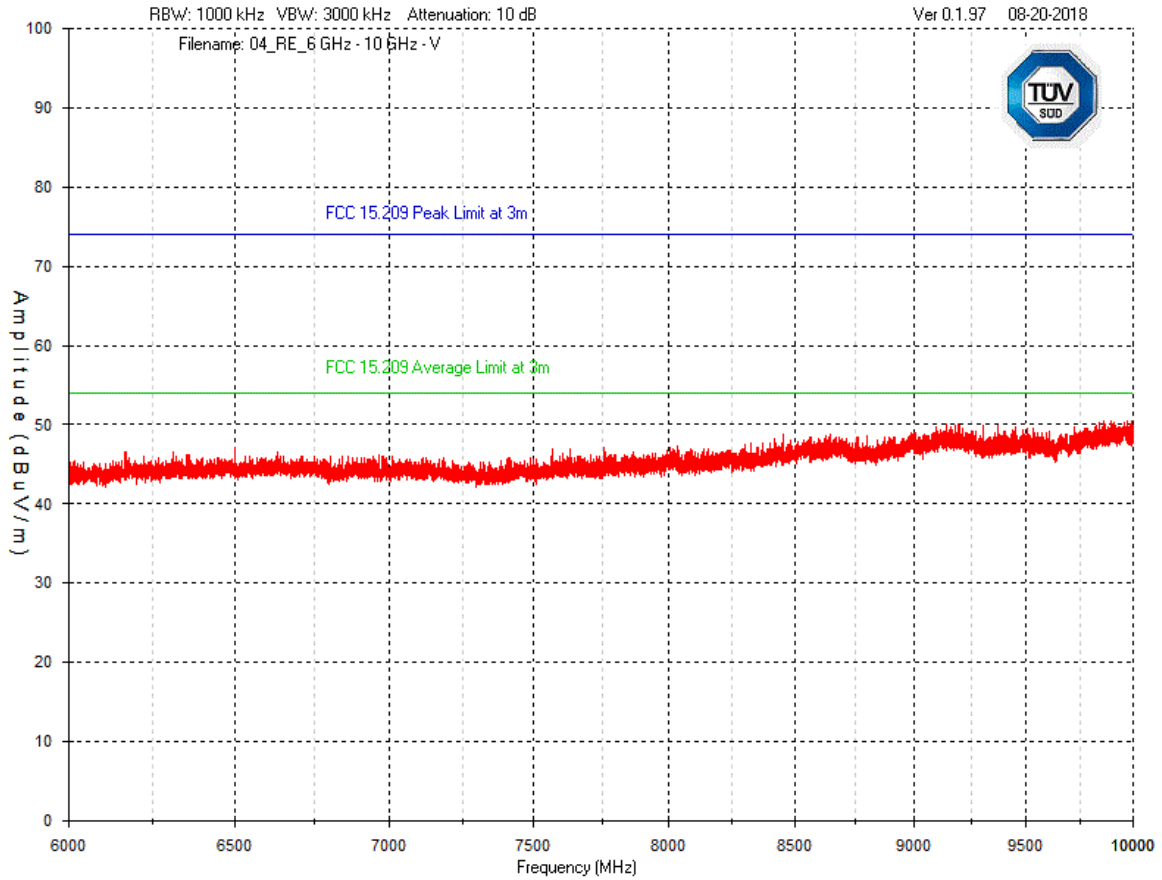


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Mid Channel – 6 GHz – 10 GHz  
Horizontal - Peak Emission Graph**




Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Mid Channel – 10 GHz – 18 GHz  
Vertical - Peak Emission Graph**

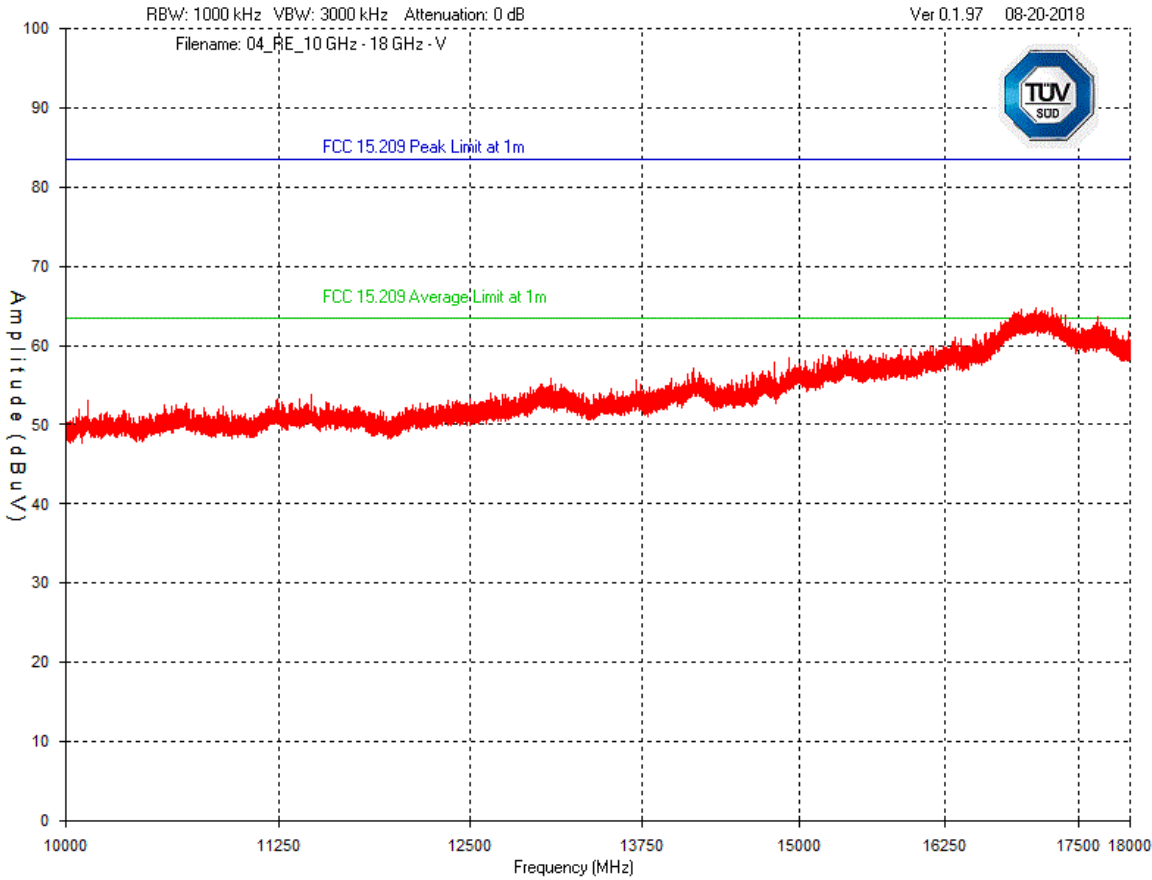

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Mid Channel – 10 GHz – 18 GHz  
Horizontal - Peak Emission Graph**

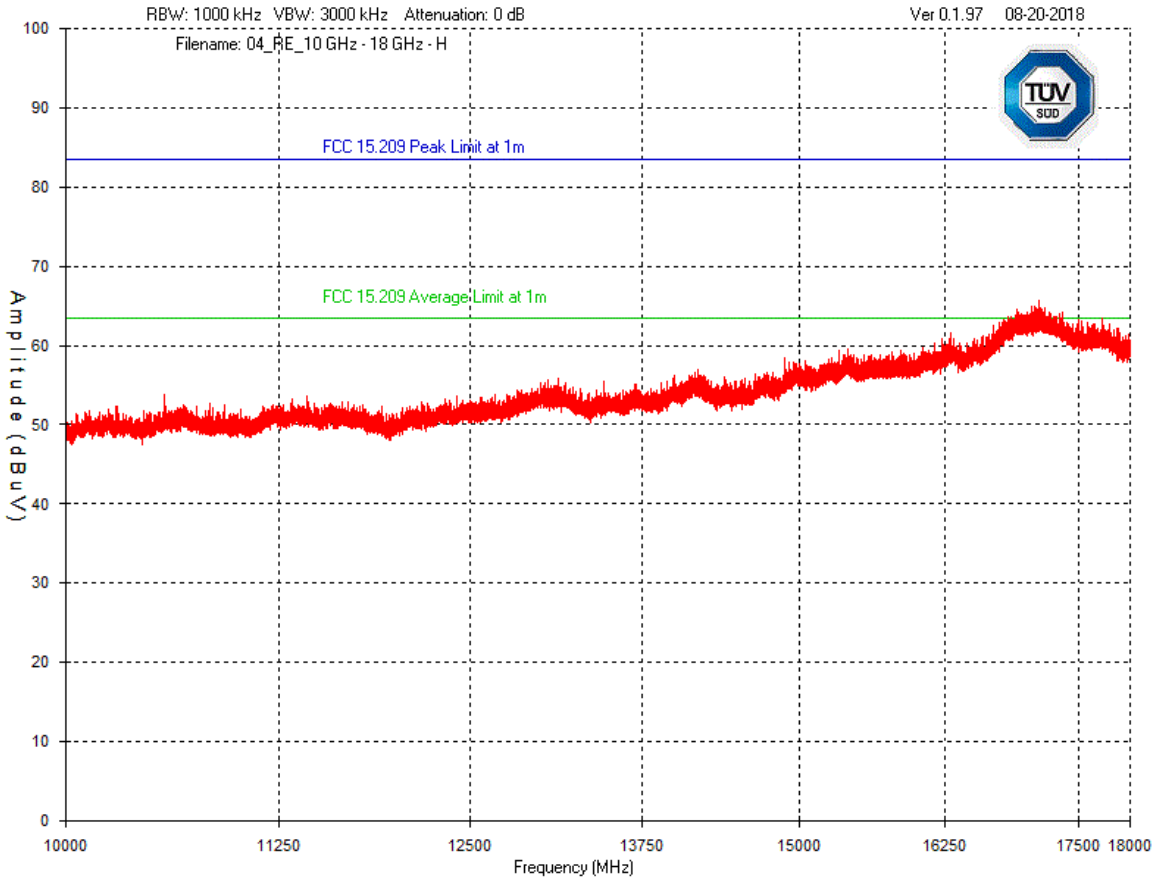


10 GHz – 18 GHz plots were taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

Frequency range was scanned to 25 GHz, with no emissions detected above 18 GHz.

Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


## Band edge measurements – B-Mode

### Band Edge – Low Channel Vertical - Peak Emission

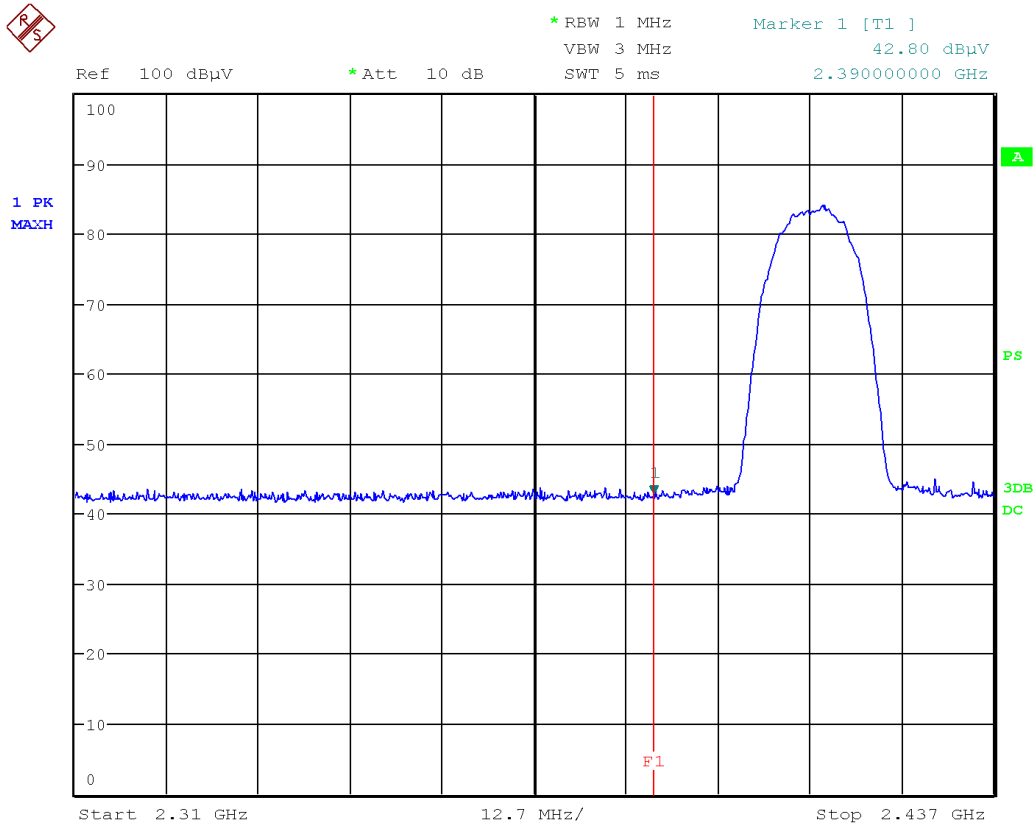


Date: 31.OCT.2017 10:23:21

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Low Channel  
Horizontal - Peak Emission**

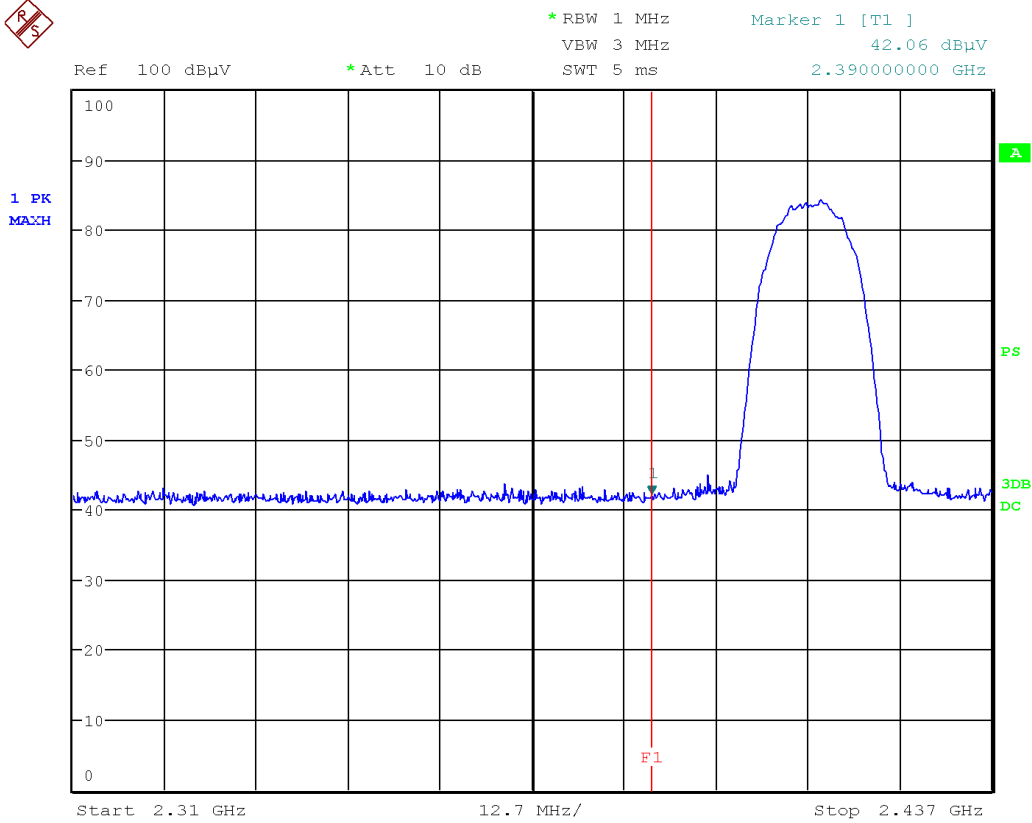


Date: 31.OCT.2017 09:52:17

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Low Channel  
Vertical – Average Emission**

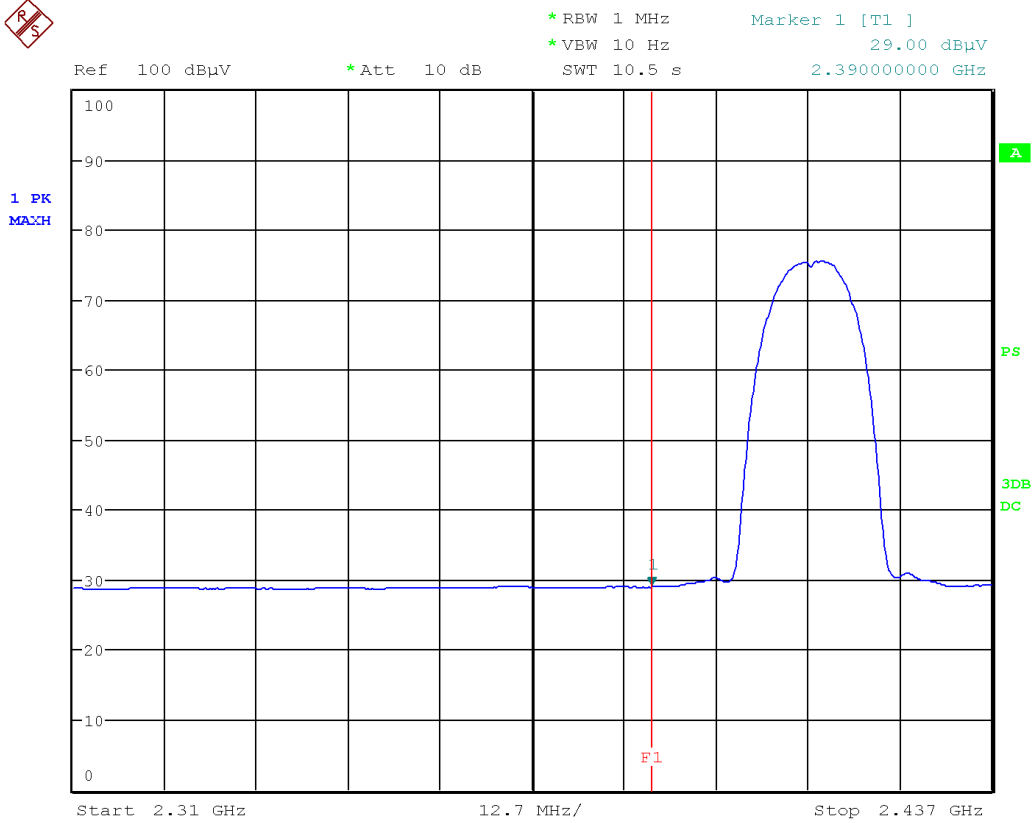


Date: 31.OCT.2017 10:13:16

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Band Edge – Low Channel  
Horizontal - Average Emission**

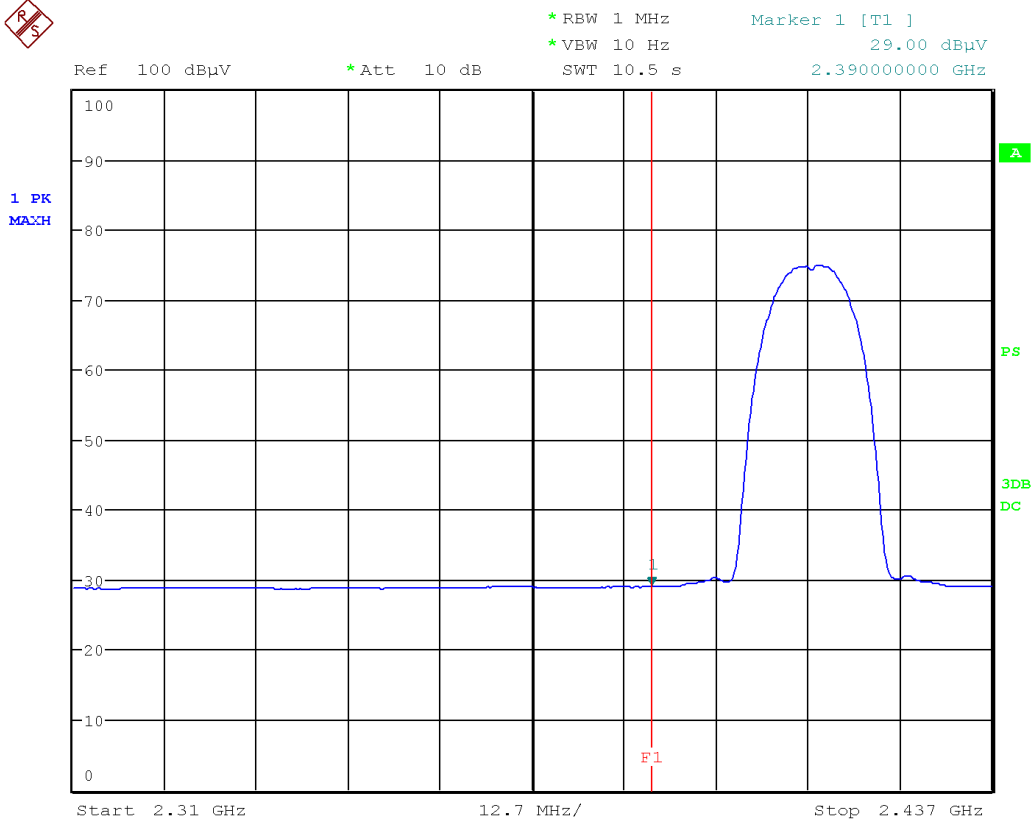


Date: 31.OCT.2017 09:51:11

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.




Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Vertical - Peak Emission**

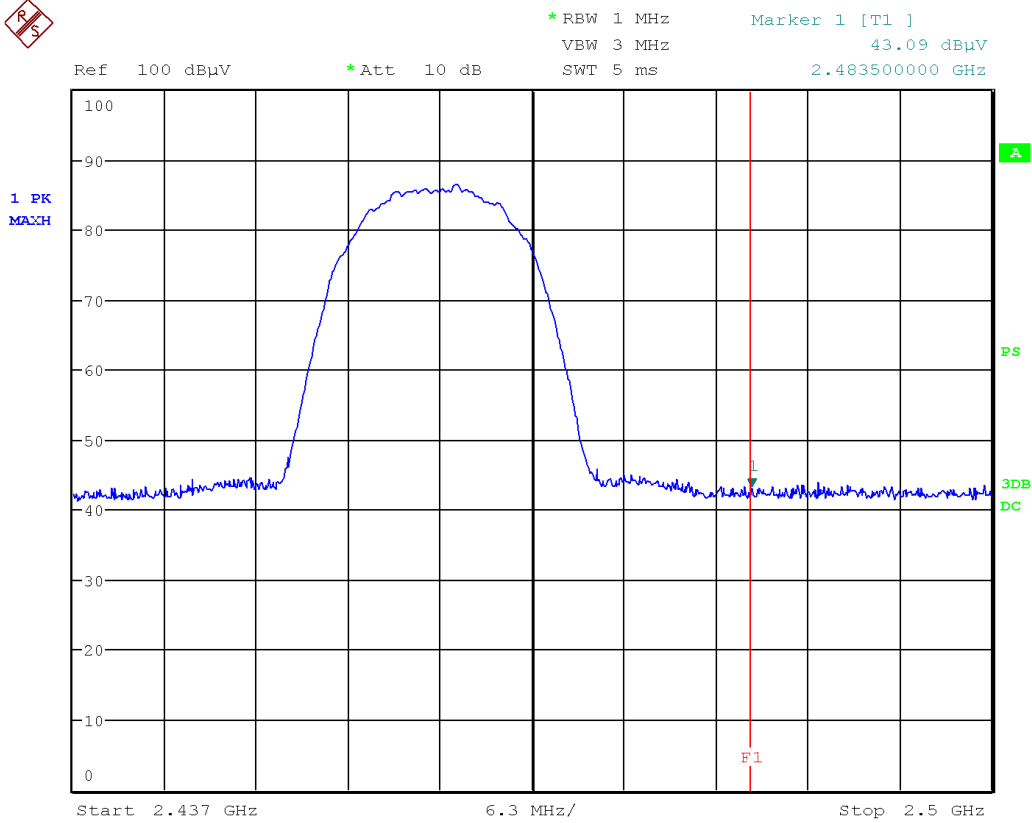


Date: 31.OCT.2017 09:33:30

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Horizontal - Peak Emission**

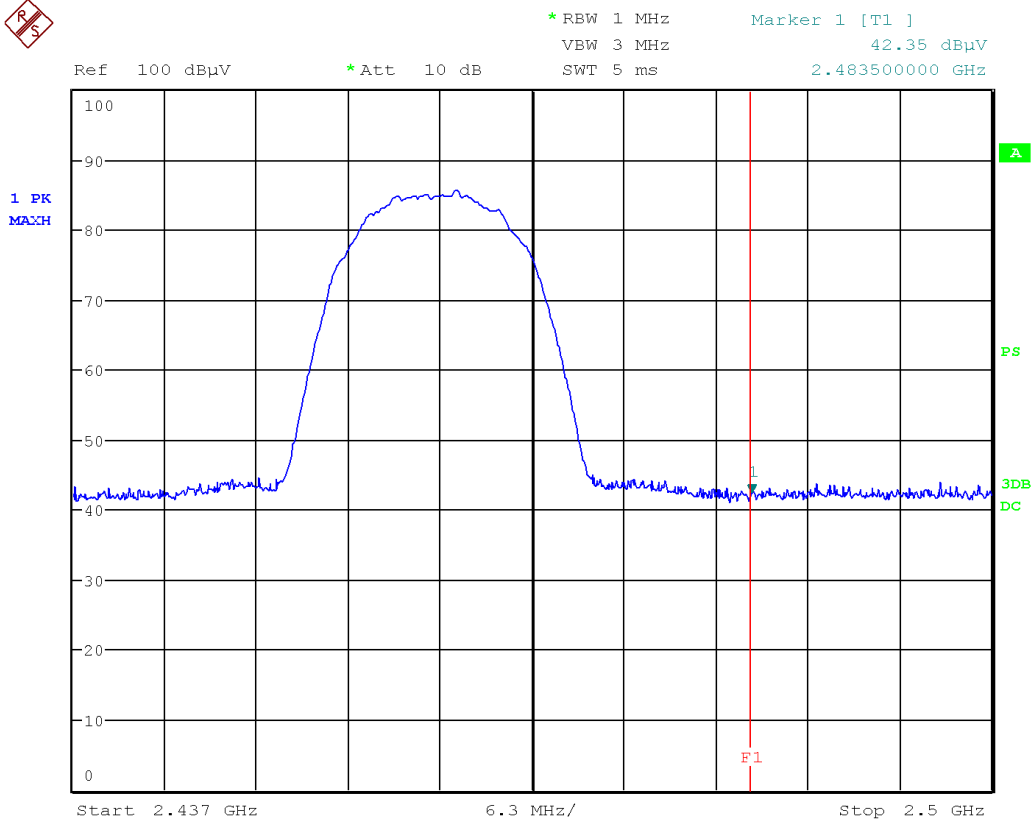


Date: 31.OCT.2017 09:24:57

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Vertical - Average Emission**

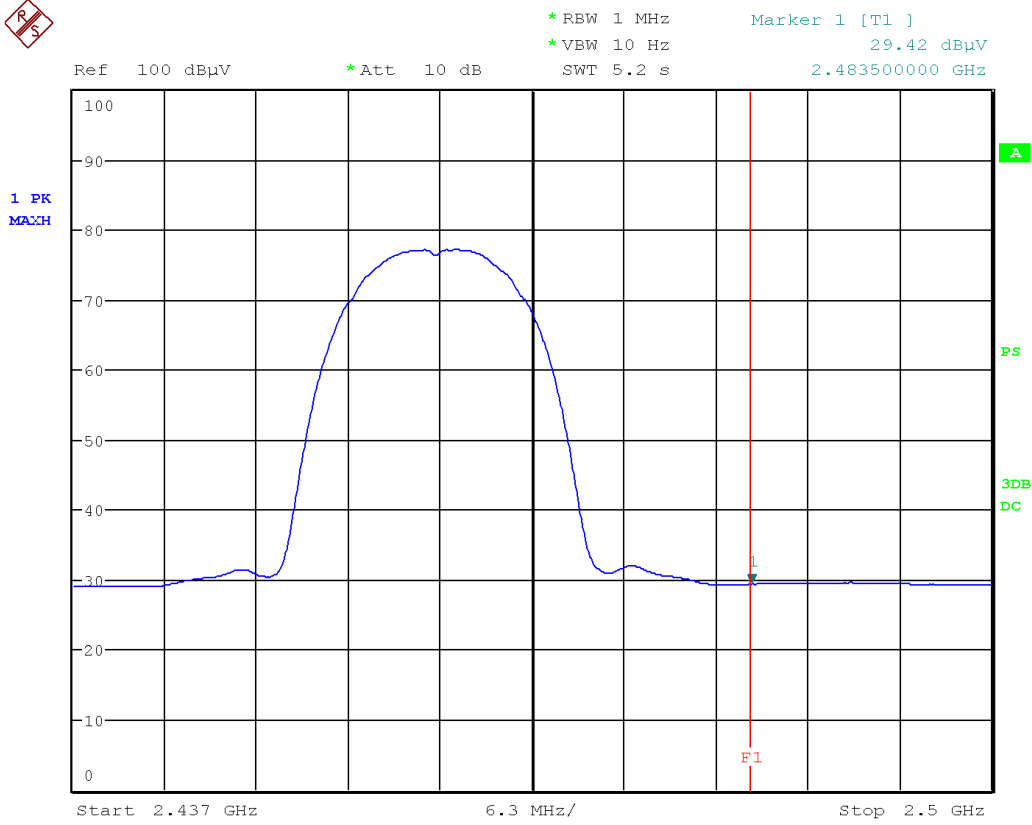

Date: 31.OCT.2017 09:31:31


Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.

Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Horizontal - Average Emission**




\* REW 1 MHz      Marker 1 [T1 ]  
 \* VBW 10 Hz      29.29 dBuV  
 SWT 5.2 s      2.483500000 GHz

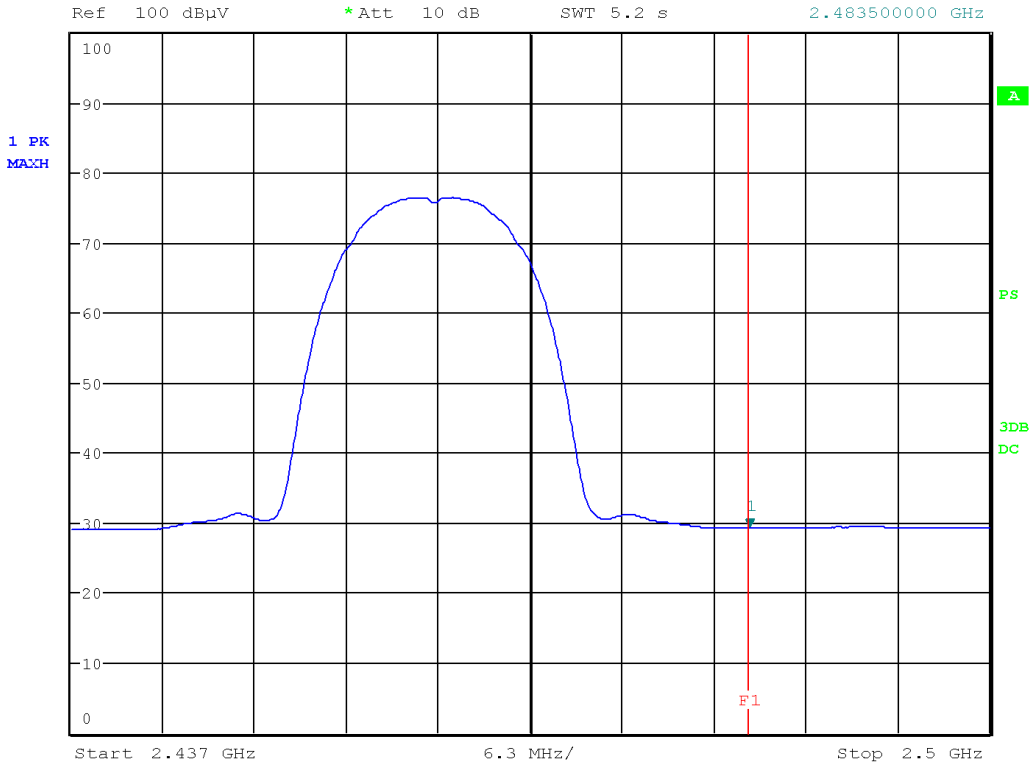


Date: 31.OCT.2017 09:23:27

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.

Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


## Band edge measurements – G-Mode

### Band Edge – Low Channel Vertical - Peak Emission

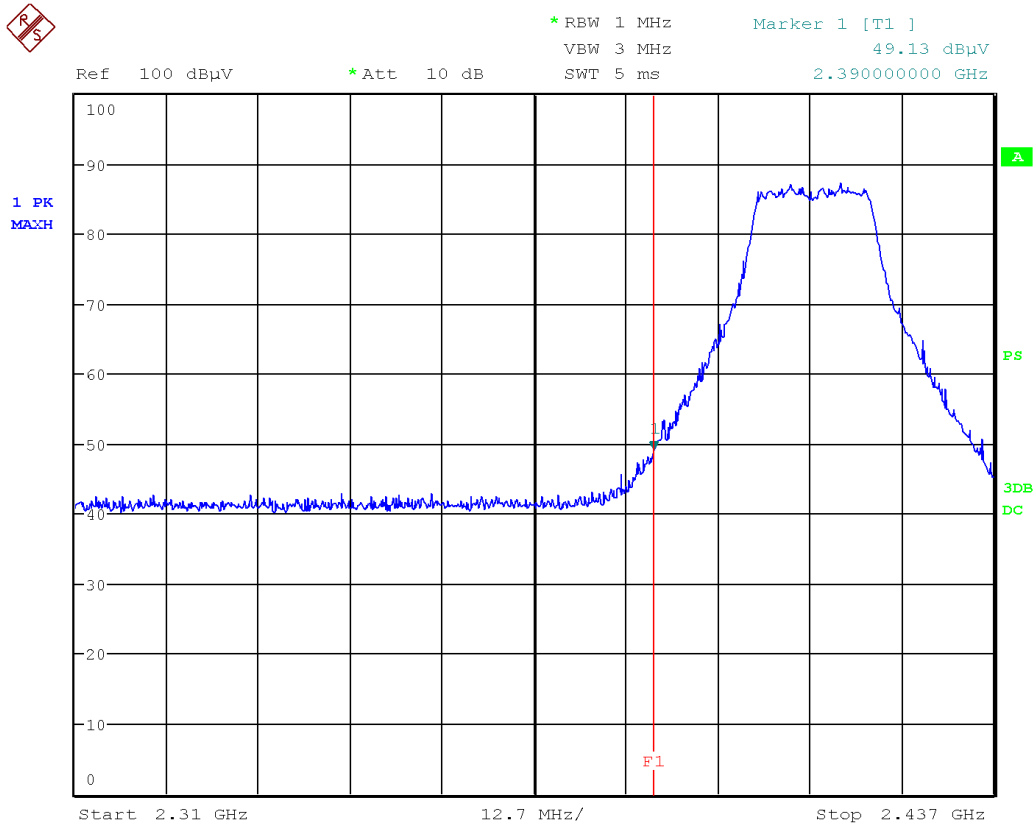


Date: 30.OCT.2017 14:38:46

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Low Channel  
Horizontal - Peak Emission**

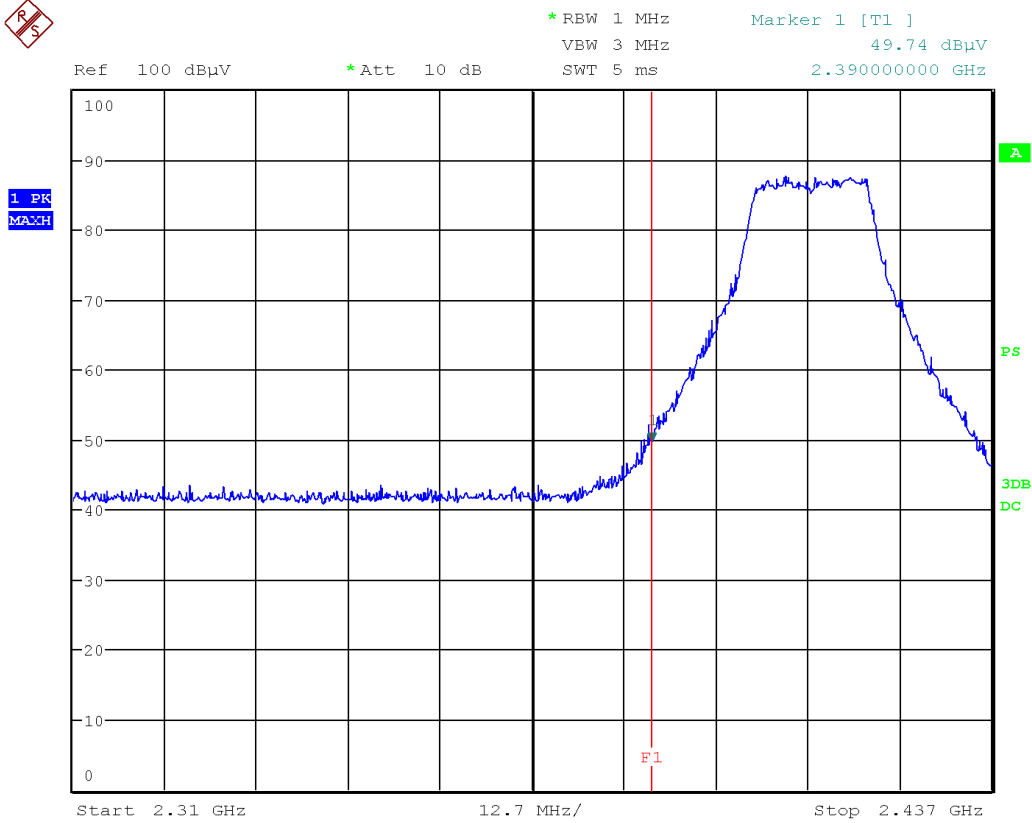


Date: 30.OCT.2017 14:28:46

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Low Channel  
Vertical – Average Emission**

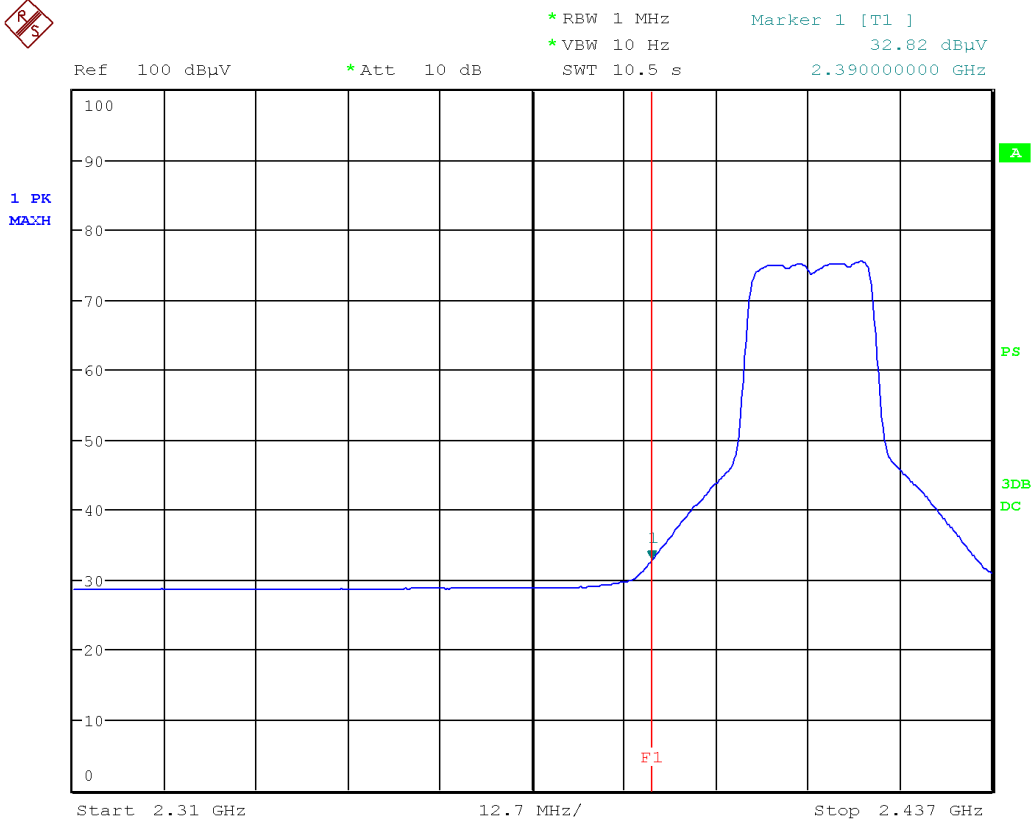


Date: 30.OCT.2017 14:38:08

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Band Edge – Low Channel  
Horizontal - Average Emission**

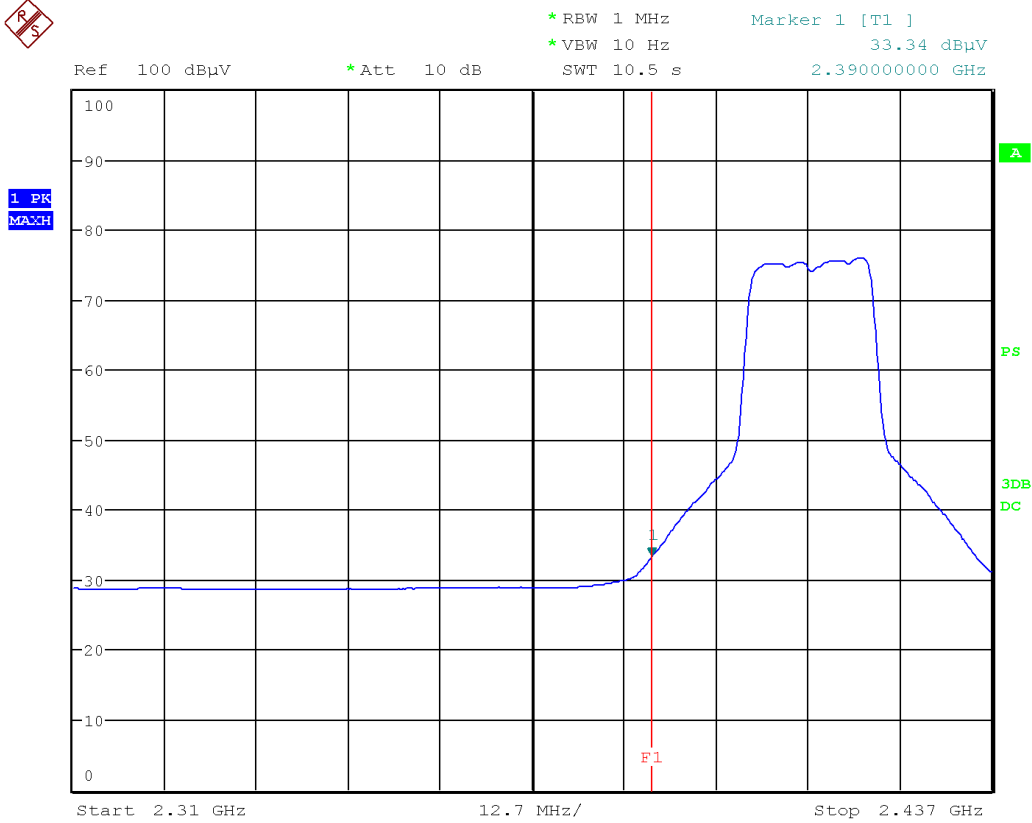


Date: 30.OCT.2017 14:27:02

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.




Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Vertical - Peak Emission**

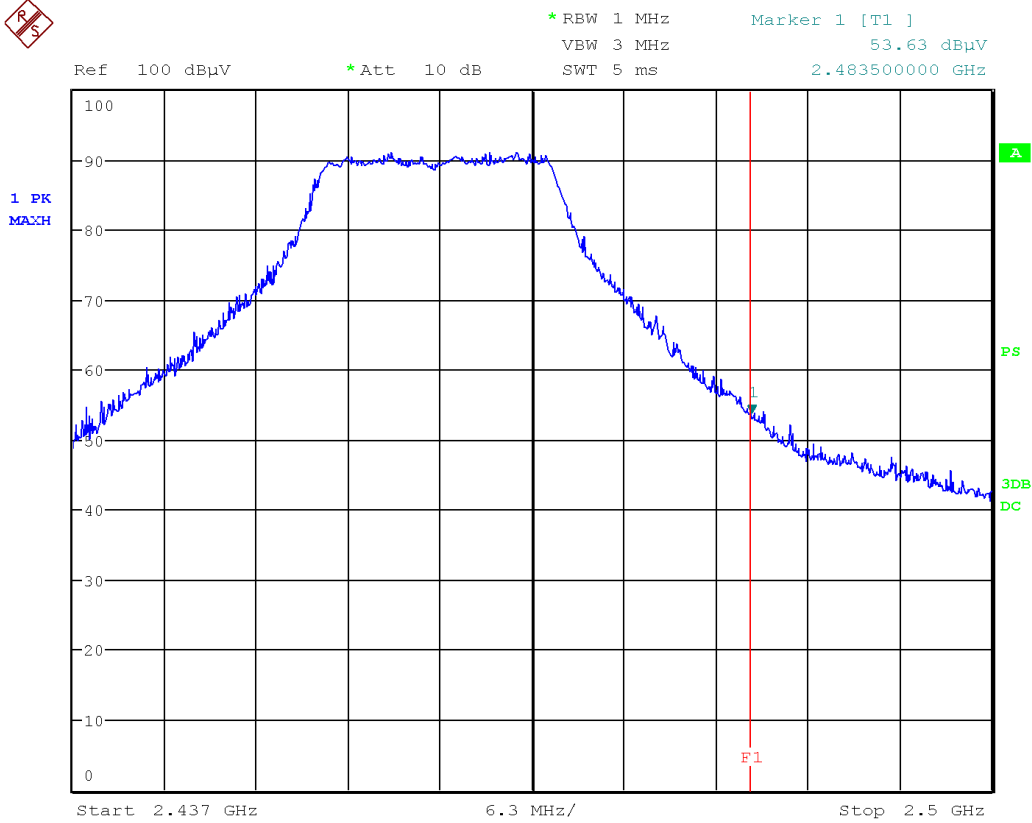


Date: 30.OCT.2017 15:42:16

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Horizontal - Peak Emission**

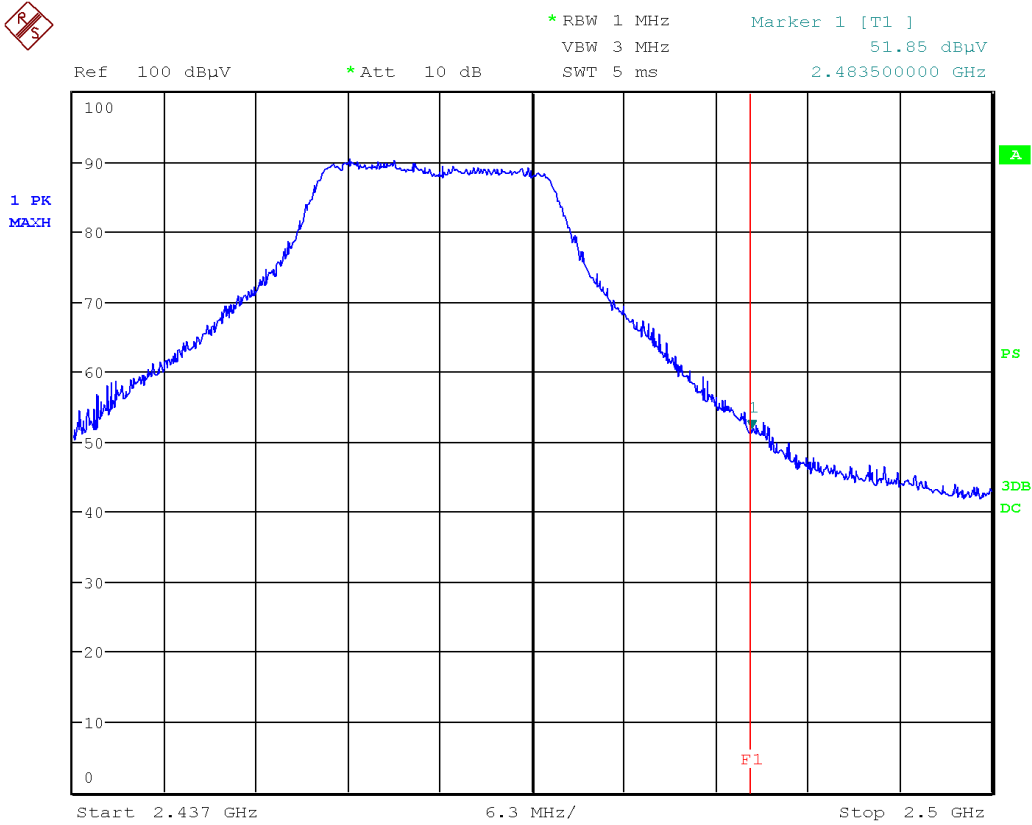


Date: 30.OCT.2017 15:51:40

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

### Band Edge – Hi Channel Vertical - Average Emission

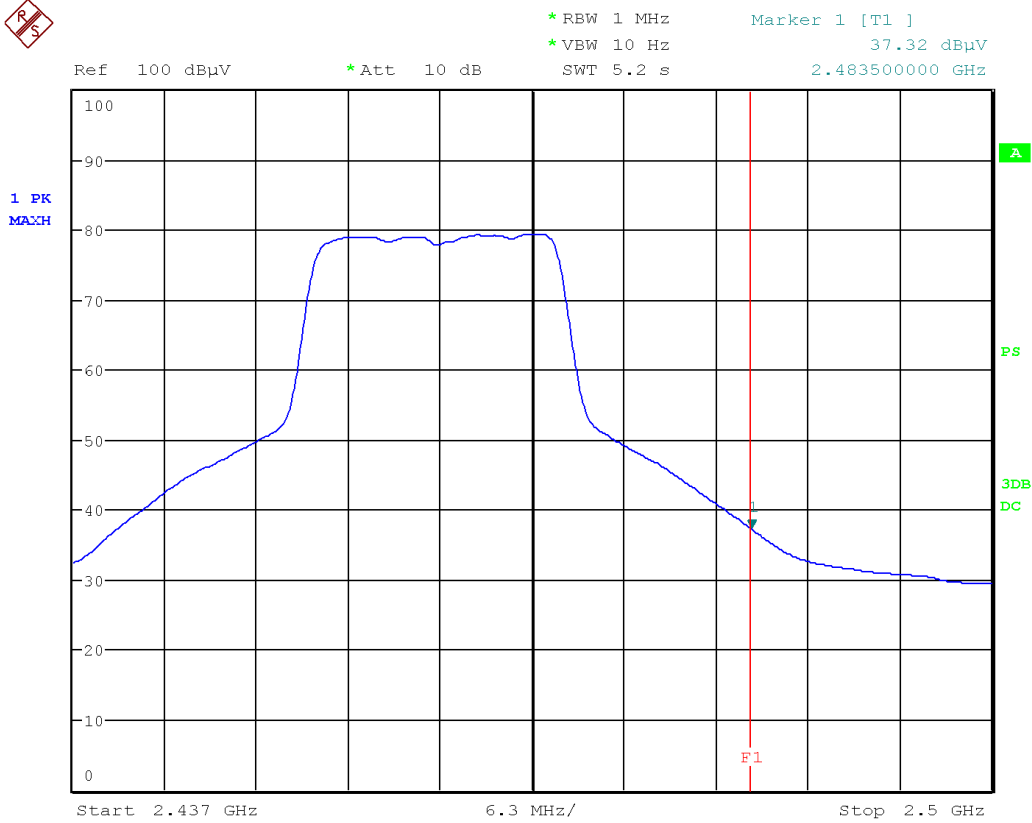


Date: 30.OCT.2017 15:41:34

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Horizontal - Average Emission**

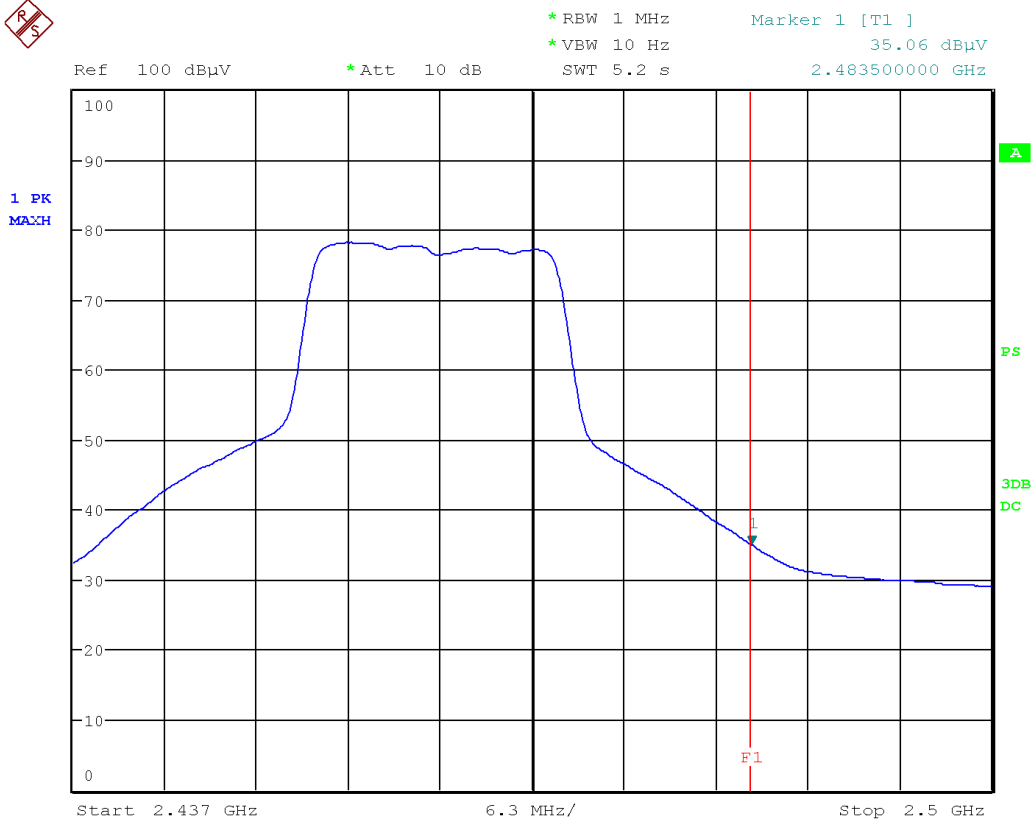


Date: 30.OCT.2017 15:54:11

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.

Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


## Band edge measurements – N-Mode

### Band Edge – Low Channel Vertical - Peak Emission

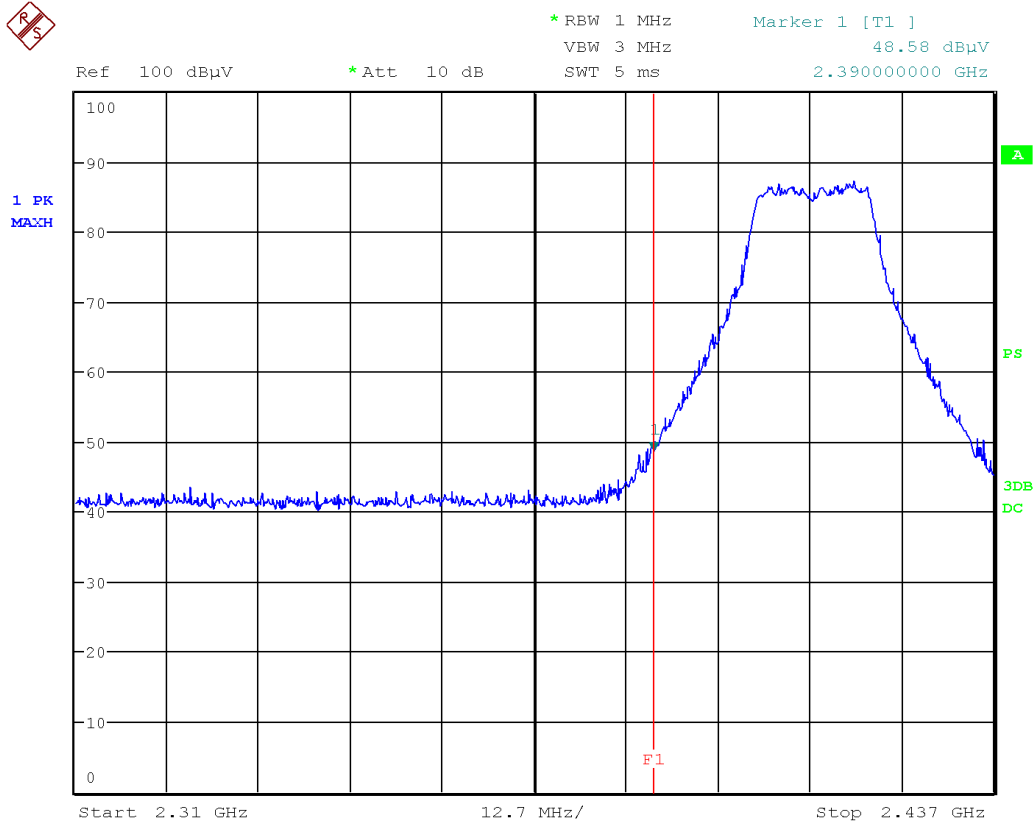


Date: 30.OCT.2017 13:37:22

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Low Channel  
Horizontal - Peak Emission**

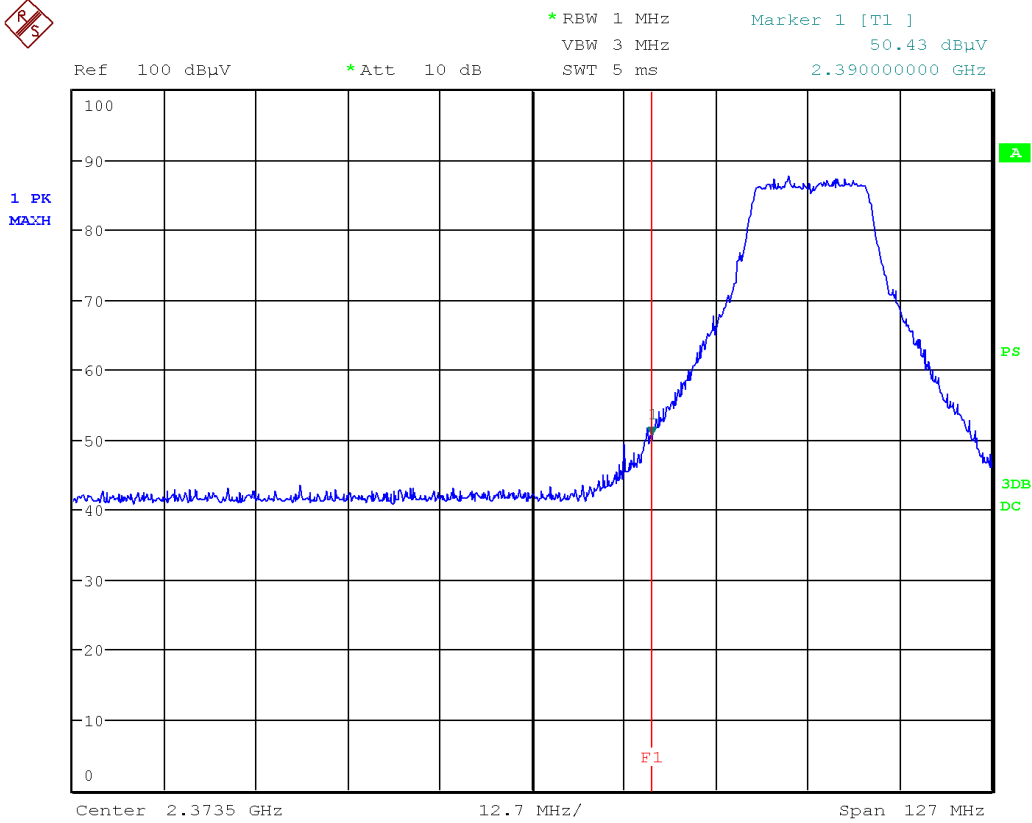


Date: 30.OCT.2017 15:07:23

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Low Channel  
Vertical – Average Emission**

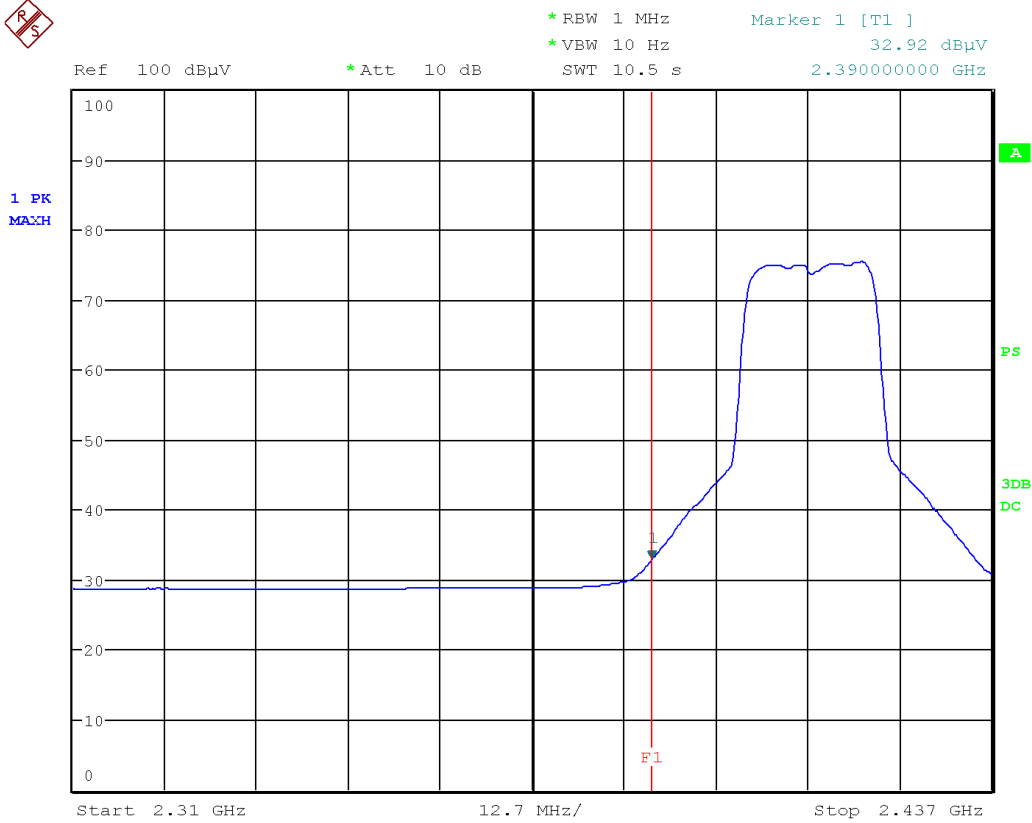


Date: 30.OCT.2017 13:35:42

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Band Edge – Low Channel  
Horizontal - Average Emission**

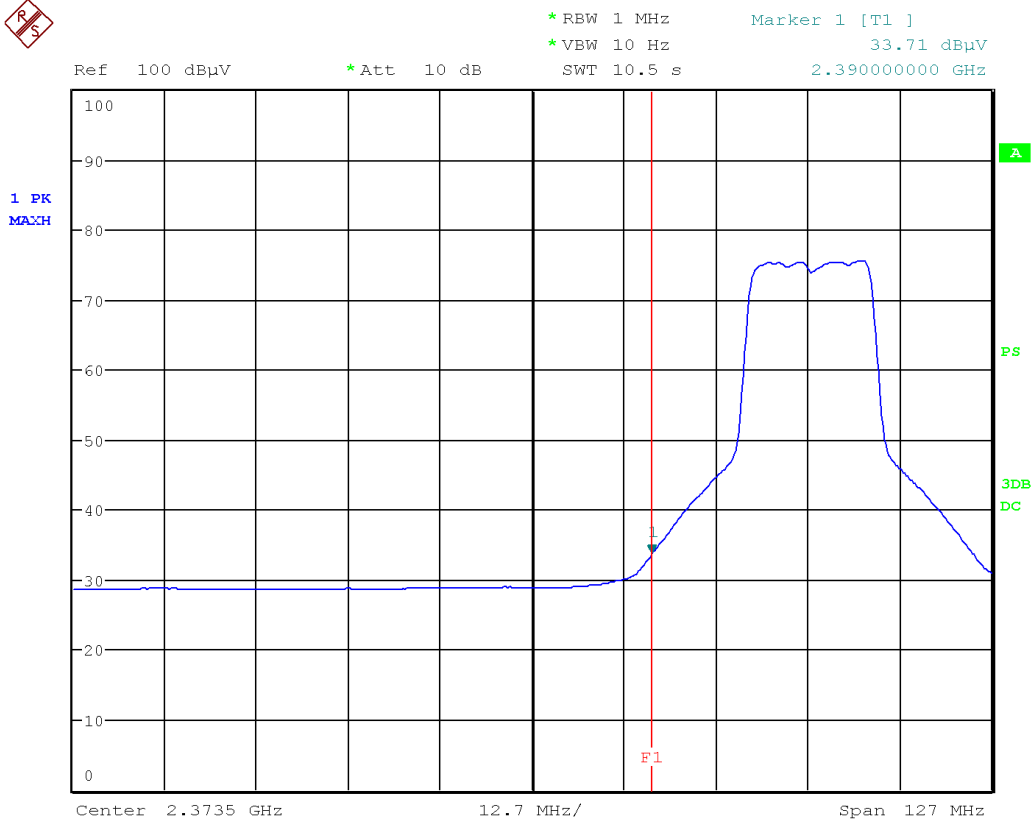


Date: 30.OCT.2017 15:05:33

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.




Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Vertical - Peak Emission**

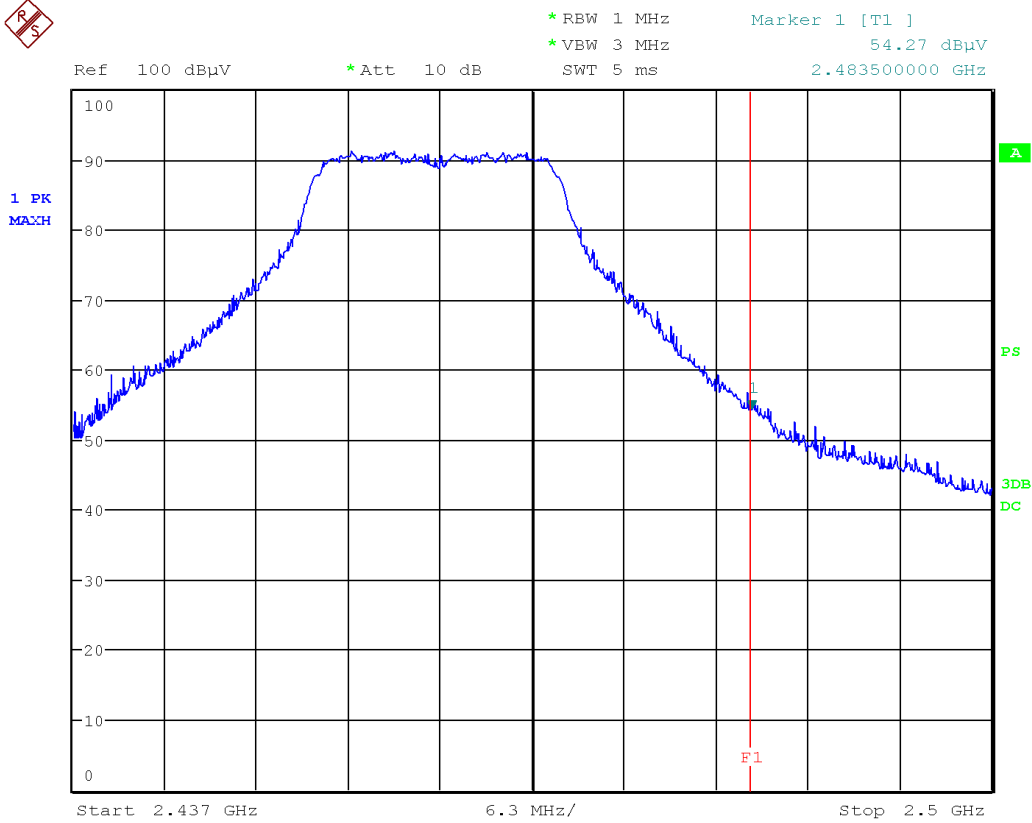


Date: 30.OCT.2017 12:21:26

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Horizontal - Peak Emission**

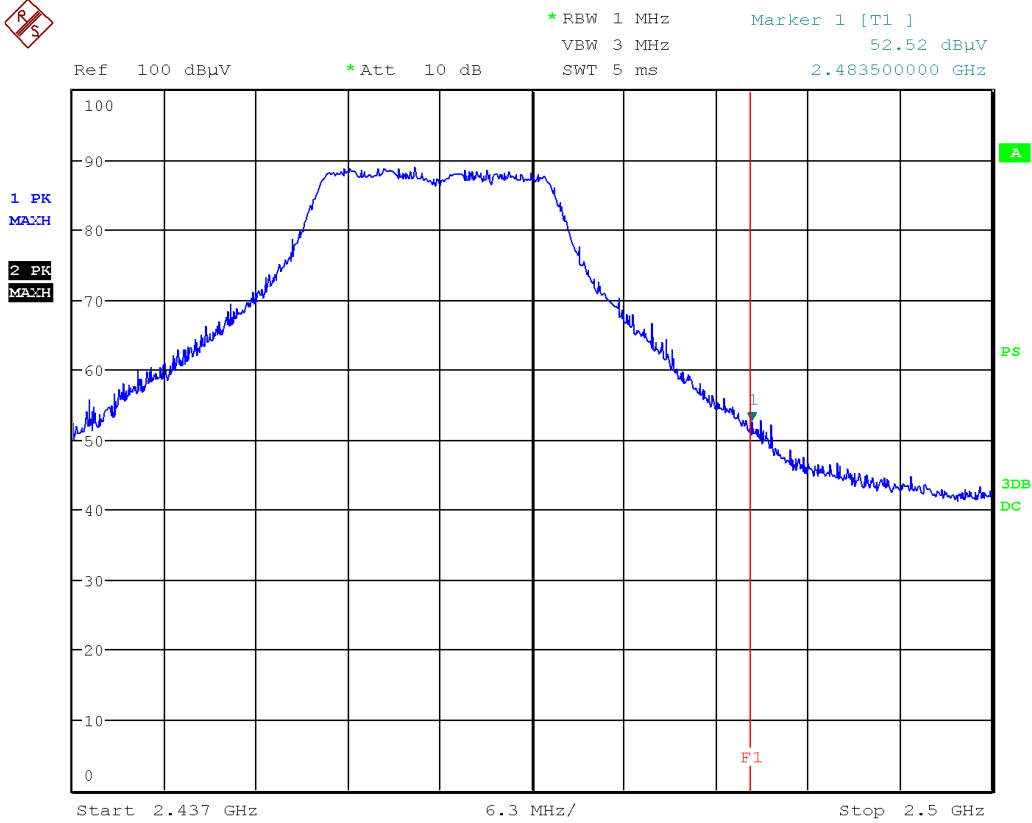


Date: 30.OCT.2017 15:25:37

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Vertical - Average Emission**

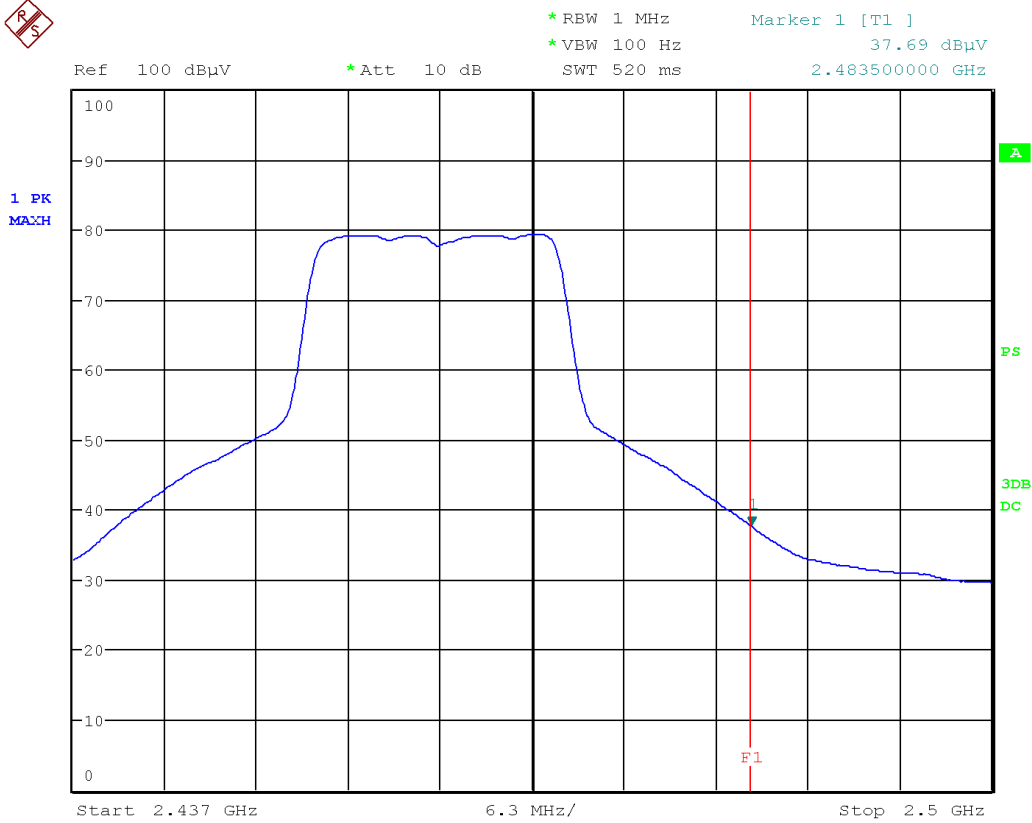


Date: 30.OCT.2017 12:22:20

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.


Client	Ecobee Inc.	
Product	EB-SMSWV-02	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Band Edge – Hi Channel  
Horizontal - Average Emission**

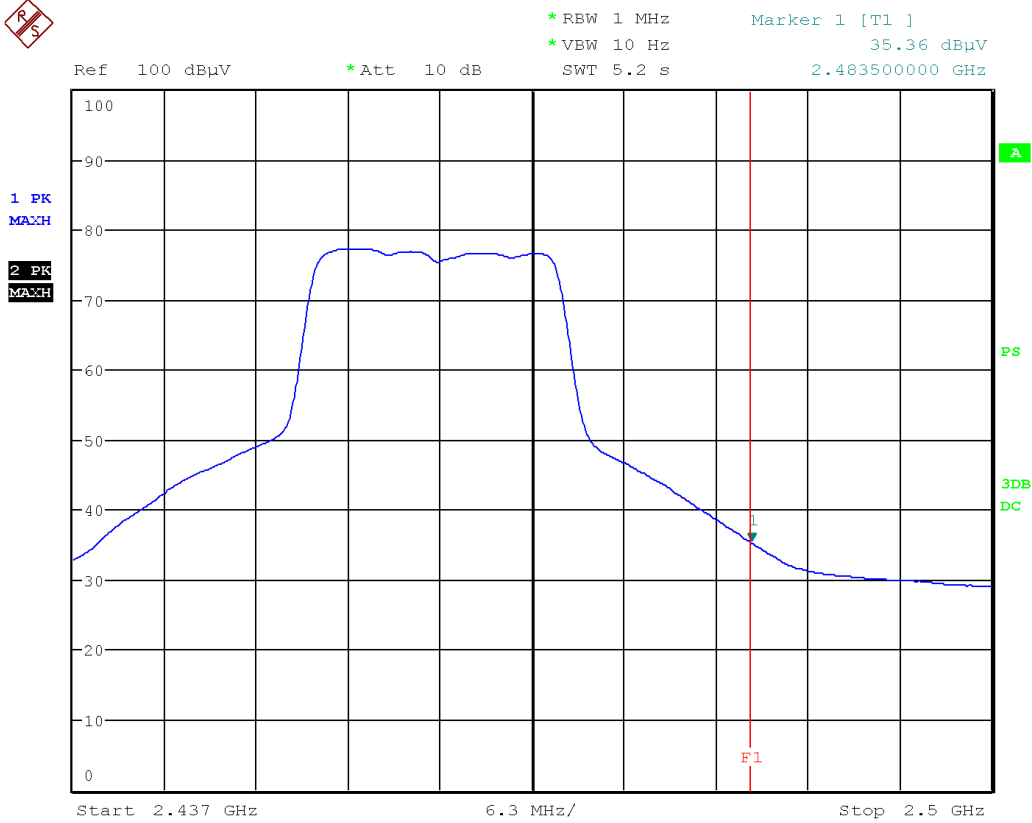

Date: 30.OCT.2017 15:24:33

Note: Band edge plots were taken with 3 m measurements distance. The marker shows the raw value; see Final Measurements and Results section starting on page 69 for corrected values.

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Final Measurements and Results


The EUT passed the limits. Low, middle and high bands were measured.

In accordance with 15.247(d), only frequencies exceeding the 15.209 limit that occur within the bands listed in 15.205, need to be verified with a final detector. Emission outside the restricted bands were measured for information purpose.


The measurements were maximized by rotating the turn table over a full 0-360 rotation and the antenna height was varied from 1 m to 4 m.

All emissions above 18 GHz were instrument noise floor of measurement instrument. No emissions were found in this frequency range.


Product Category	Class B						
Supply	120 Vac 60 Hz						
Vertical Emission Table							
Frequency (MHz)	Detector	Raw (dBuV)	Correction Factors (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
931.741	PEAK	36.8	3.9	40.7	46.4	5.7	Pass
140.011	PEAK	46.4	-14.2	32.2	43.5	11.3	Pass
30.0971	PEAK	34.3	-5.7	28.6	40.0	11.4	Pass
60.1972	PEAK	42.8	-15.0	27.8	40.0	12.2	Pass
95.9289	PEAK	40.7	-13.9	26.8	43.5	16.7	Pass
105.93	PEAK	31.3	-13.8	17.5	43.5	26.0	Pass
Horizontal Emission Table							
931.741	PEAK	36.5	3.9	40.4	46.4	6.0	Pass
624.623	PEAK	34.2	0.2	34.4	46.4	12.0	Pass
31.2623	PEAK	33.5	-5.8	27.7	40.0	12.3	Pass
201.085	PEAK	41.4	-11.7	29.7	43.5	13.8	Pass
30	PEAK	31.6	-5.7	25.9	40.0	14.1	Pass
140.594	PEAK	42.7	-14.2	28.5	43.5	15.0	Pass

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

Project Name / Number		7169003246: Ecobee Hyperion B-Mode									
Test Frequency (MHz)	Detection mode	Antenna polarity (Horz/Vert)	Raw signal dB(µV)	(WBH) Antenna factor dB	(Old Chamber HF) Cable loss dB	Attenuator dB	(GEMC 189) Pre-Amp Gain dB	Received signal dB(µV/m)	Emission limit dB(µV/m)	Margin dB(µV)	Result
Low Channel (1)											
2412	Peak	Horz	84.4	26.4	3.9	9.0	33.4	90.3			PASS
2412	Avg	Horz	75.2	26.4	3.9	9.0	33.4	81.1			PASS
2412	Peak	Vert	84.8	26.4	3.9	9.0	33.4	90.7			PASS
2412	Avg	Vert	75.3	26.4	3.9	9.0	33.4	81.2			PASS
2390	Peak	Horz	42.1	26.4	3.9	9.0	33.4	48.0	74.0	26.0	PASS
2390	Avg	Horz	29.0	26.4	3.9	9.0	33.4	34.9	54.0	19.1	PASS
2390	Peak	Vert	42.8	26.4	3.9	9.0	33.4	48.7	74.0	25.3	PASS
2390	Avg	Vert	29.0	26.4	3.9	9.0	33.4	34.9	54.0	19.1	PASS
Mid Channel (6)											
2437	Peak	Horz	86.6	26.4	3.9	9.0	33.2	92.7			PASS
2437	Avg	Horz	77.3	26.4	3.9	9.0	33.2	83.4			PASS
2437	Peak	Vert	86.6	26.4	3.9	9.0	33.2	92.7			PASS
2437	Avg	Vert	77.2	26.4	3.9	9.0	33.2	83.3			PASS
High Channel (11)											
2462	Peak	Horz	86.0	26.4	3.9	9.0	33.2	92.1			PASS
2462	Avg	Horz	76.3	26.4	3.9	9.0	33.2	82.4			PASS
2462	Peak	Vert	87.1	26.4	3.9	9.0	33.2	93.2			PASS
2462	Avg	Vert	77.2	26.4	3.9	9.0	33.2	83.3			PASS
2483.5	Peak	Horz	42.4	26.4	3.9	9.0	33.2	48.5	74.0	25.6	PASS
2483.5	Avg	Horz	29.3	26.4	3.9	9.0	33.2	35.4	54.0	18.6	PASS
2483.5	Peak	Vert	43.1	26.4	3.9	9.0	33.2	49.2	74.0	24.8	PASS
2483.5	Avg	Vert	29.4	26.4	3.9	9.0	33.2	35.5	54.0	18.5	PASS


Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

Project Name / Number		7169003246: Ecobee Hyperion G-Mode									
Test Frequency (MHz)	Detection mode	Antenna polarity (Horz/Vert)	Raw signal dB(µV)	(WBH) Antenna factor dB	(Old Chamber HF) Cable loss dB	Attenuator dB	(GEMC 189) Pre-Amp Gain dB	Received signal dB(µV/m)	Emission limit dB(µV/m)	Margin dB(µV)	Result
Low Channel (1)											
2412	Peak	Horz	87.3	26.4	3.9	9.0	33.4	93.2			PASS
2412	Avg	Horz	75.9	26.4	3.9	9.0	33.4	81.8			PASS
2412	Peak	Vert	87.5	26.4	3.9	9.0	33.4	93.4			PASS
2412	Avg	Vert	75.3	26.4	3.9	9.0	33.4	81.2			PASS
2390	Peak	Horz	49.7	26.4	3.9	9.0	33.4	55.6	74.0	18.4	PASS
2390	Avg	Horz	33.3	26.4	3.9	9.0	33.4	39.2	54.0	14.8	PASS
2390	Peak	Vert	49.1	26.4	3.9	9.0	33.4	55.0	74.0	19.0	PASS
2390	Avg	Vert	32.8	26.4	3.9	9.0	33.4	38.7	54.0	15.3	PASS
Mid Channel (6)											
2437	Peak	Horz	90.1	26.4	3.9	9.0	33.2	96.2			PASS
2437	Avg	Horz	78.2	26.4	3.9	9.0	33.2	84.3			PASS
2437	Peak	Vert	90.3	26.4	3.9	9.0	33.2	96.4			PASS
2437	Avg	Vert	78.2	26.4	3.9	9.0	33.2	84.3			PASS
High Channel (11)											
2462	Peak	Horz	90.5	26.4	3.9	9.0	33.2	96.6			PASS
2462	Avg	Horz	78.0	26.4	3.9	9.0	33.2	84.1			PASS
2462	Peak	Vert	91.5	26.4	3.9	9.0	33.2	97.6			PASS
2462	Avg	Vert	79.4	26.4	3.9	9.0	33.2	85.5			PASS
2483.5	Peak	Horz	51.9	26.4	3.9	9.0	33.2	58.0	74.0	16.0	PASS
2483.5	Avg	Horz	35.1	26.4	3.9	9.0	33.2	41.2	54.0	12.8	PASS
2483.5	Peak	Vert	53.6	26.4	3.9	9.0	33.2	59.7	74.0	14.3	PASS
2483.5	Avg	Vert	37.3	26.4	3.9	9.0	33.2	43.4	54.0	10.6	PASS

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

Project Name / Number		7169003246: Ecobee Hyperion N-Mode										
Test Frequency (MHz)	Detection mode	Antenna polarity (Horz/Vert)	Raw signal dB(µV)	(WBH) Antenna factor dB	(Old Chamber HF) Cable loss dB	Attenuator dB	(GEMC 189) Pre-Amp Gain dB	Received signal dB(µV/m)	Emission limit dB(µV/m)	Margin dB(µV)	Result	
Low Channel (1)												
2412	Peak	Horz	88.0	26.4	3.9	9.0	33.4	93.9			PASS	
2412	Avg	Horz	75.5	26.4	3.9	9.0	33.4	81.4			PASS	
2412	Peak	Vert	87.5	26.4	3.9	9.0	33.4	93.4			PASS	
2412	Avg	Vert	75.4	26.4	3.9	9.0	33.4	81.3			PASS	
2390	Peak	Horz	50.4	26.4	3.9	9.0	33.4	56.3	74.0	17.7	PASS	
2390	Avg	Horz	33.7	26.4	3.9	9.0	33.4	39.6	54.0	14.4	PASS	
2390	Peak	Vert	48.5	26.4	3.9	9.0	33.4	54.4	74.0	19.6	PASS	
2390	Avg	Vert	32.9	26.4	3.9	9.0	33.4	38.8	54.0	15.2	PASS	
Mid Channel (6)												
2437	Peak	Horz	89.9	26.4	3.9	9.0	33.2	96.0			PASS	
2437	Avg	Horz	78.2	26.4	3.9	9.0	33.2	84.3			PASS	
2437	Peak	Vert	90.2	26.4	3.9	9.0	33.2	96.3			PASS	
2437	Avg	Vert	77.8	26.4	3.9	9.0	33.2	83.9			PASS	
High Channel (11)												
2462	Peak	Horz	89.6	26.4	3.9	9.0	33.2	95.7			PASS	
2462	Avg	Horz	75.3	26.4	3.9	9.0	33.2	81.4			PASS	
2462	Peak	Vert	91.1	26.4	3.9	9.0	33.2	97.2			PASS	
2462	Avg	Vert	79.6	26.4	3.9	9.0	33.2	85.7			PASS	
2483.5	Peak	Horz	50.3	26.4	3.9	9.0	33.2	56.4	74.0	17.6	PASS	
2483.5	Avg	Horz	35.4	26.4	3.9	9.0	33.2	41.5	54.0	12.5	PASS	
2483.5	Peak	Vert	54.3	26.4	3.9	9.0	33.2	60.4	74.0	13.6	PASS	
2483.5	Avg	Vert	37.7	26.4	3.9	9.0	33.2	43.8	54.0	10.2	PASS	




Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU 40	Rohde & Schwarz	Jan. 6, 2016	Jan. 6, 2018	GEMC 233
Loop Antenna	EM 6871	Electro-Metrics	Feb 13, 2017	Feb 13, 2019	GEMC 70
Loop Antenna	EM 6872	Electro-Metrics	Feb 13, 2017	Feb 13, 2019	GEMC 71
BiLog Antenna	HLP-3003C	TDK RF Solutions	Oct. 12, 2016	Oct. 12, 2018	GEMC 231
Horn Antenna 2 – 18 GHz	WBH218HN	Q-par	Feb. 12, 2016	Feb. 12, 2018	GEMC 6375
Horn Antenna 18 GHz - 26.5 GHz	SAS-572	A.H. Systems	Oct 11, 2016	Oct 11, 2018	GEMC 6371
Pre-Amp 1 – 26.5 GHz	HP 8449B	HP	Nov. 27, 2015	Nov. 27, 2017	GEMC 189
2.4GHz-2.5GHz Notch Filter	BRM50702	Micro-Tronics	Jul 16, 2016	Jul 16, 2017	GEMC 230
Attenuator 3 dB	612-03-1	Meca Electronics, Inc	Feb 13, 2017	Feb 13, 2018	GEMC 222
Attenuator 6 dB	FP-50-6	Trilithic	Feb 13, 2017	Feb 13, 2018	GEMC 41
RF Cable 7m	LMR-400-7M- 50Ω-MN-MN	LexTec	Feb 13, 2017	Feb 13, 2018	GEMC 28
RF Cable 10m	LMR-400-10M- 50Ω-MN-MN	LexTec	Feb 13, 2017	Feb 13, 2018	GEMC 27
RF Cable 0.5m	LMR-400- 0.5M-50Ω-MN- MN	LexTec	Feb 13, 2017	Feb 13, 2018	GEMC 31
RF Cable 1m	LMR-400-1M- 50OHM-MN-MN	LexTec	Feb 13, 2017	Feb 13, 2018	GEMC 29
9kHz-1GHz, 28dB preamp and power supply	LNA 6901	Teseq	Feb 2, 2017	Feb 2, 2019	GEMC 168
6 dB attenuator	612-06-1	Meca Electronics, Inc.	NCR	NCR	GEMC 286
BiLog Antenna	3142-C	ETS	Oct 6, 2016	Oct 6, 2018	GEMC 8
Emissions Software	0.1.94	Global EMC	NCR	NCR	GEMC 58

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions\_Rev1.doc"

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Power Spectral Density

### Purpose

The purpose of this test is to ensure that the maximum power spectral density to the radiating element does not exceed the limits specified. This ensures that the modulation is significantly wide enough, or low enough in power that it will allow for co-operation of other wireless devices operating within this frequency allocation.

### Limits and Methods

The limits are defined in 15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


The method is given in ANSI 63.10 11.10.2 Method PKPSD.

### Results

The EUT passed. The EUT was set to transmit at maximum power. The EUT supports three modes of operation, 802.11 b/g/n. The n-mode only support 20 MHz nominal bandwidth. Three Channels for each mode were measured. The following tables show the peak power spectral density: External attenuator and cable loss were accounted for as reference offset in the spectrum analyzer.

PSD: B-Mode				
Channel	Frequency (MHz)	PSD/3kHz (dBm)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-5.63	8	Pass
6	2437	-4.97	8	Pass
11	2462	-4.96	8	Pass

PSD: G-Mode				
Channel	Frequency (MHz)	PSD/3kHz (dBm)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-15.46	8	Pass
6	2437	-14.76	8	Pass
11	2462	-14.88	8	Pass


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

PSD: N-Mode				
Channel	Frequency (MHz)	PSD/3kHz (dBm)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-16.99	8	Pass
6	2437	-15.29	8	Pass
11	2462	-15.72	8	Pass


### Graph(s)

The graphs shown below show the power spectral density of the device. This is measured by a max hold on the spectrum analyzer using a RBW of 3 kHz. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.

Low, middle, and high channel for each mode was investigated in each mode, with the worst case being presented.


Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

### Peak Power Spectral Density: B-Mode High Channel

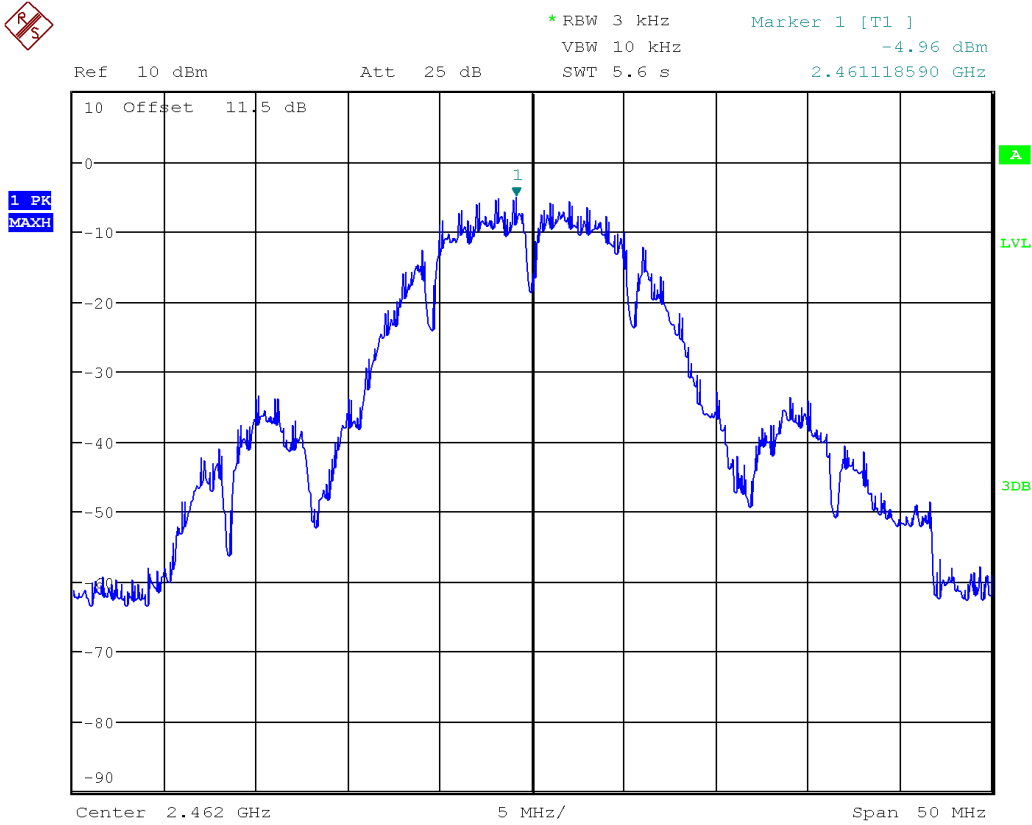


Date: 6.SEP.2018 15:23:46




Client	<b>Ecobee Inc.</b>	 TUV SUD Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Peak Power Spectral Density: N-Mode  
Mid Channel**

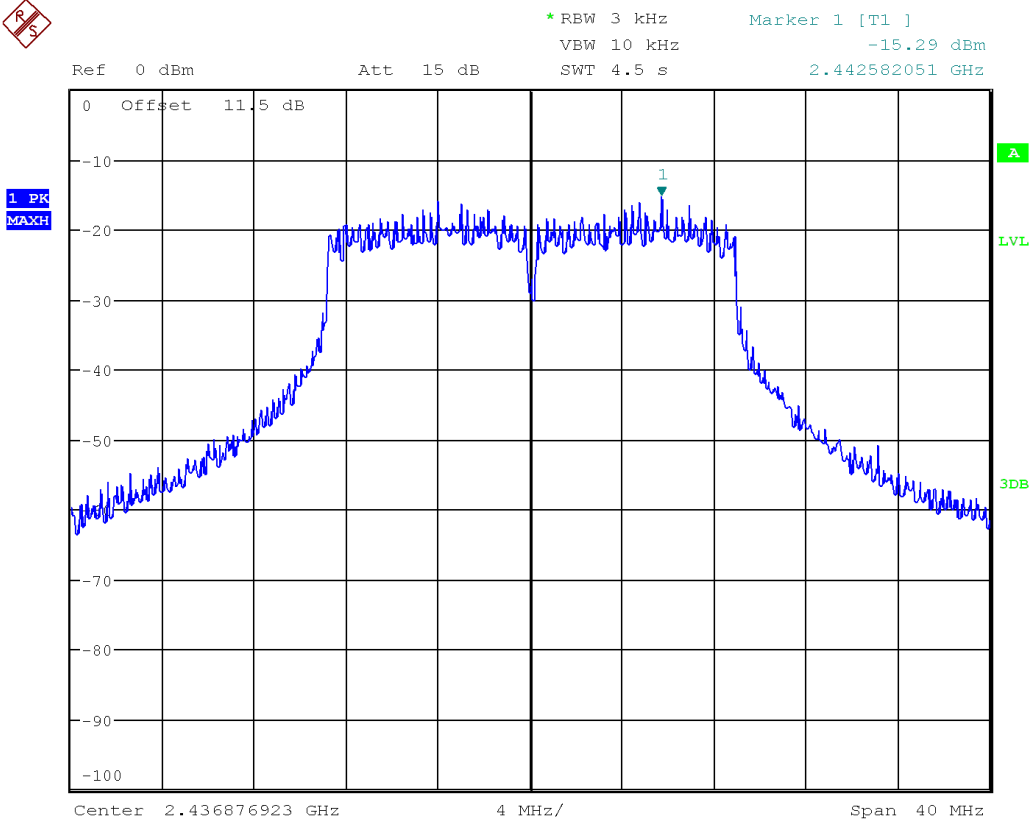

Date: 7.SEP.2018 10:28:58


Note: See ‘Appendix B – EUT & Test Setup Photographs’ for photos showing the test set-up.

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

### Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration / Verification date	Next calibration/ Verification due date	Asset #
26.5GHz Spectrum Analyzer	FSQ26	Rohde & Schwarz	Feb-28, 2017	Feb-28, 2019	GEMC 234
Attenuator 10 dB	8493B	Agilent	NCR	NCR	GEMC 133

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B\_Rev1"

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## **Power Line Conducted Emissions**

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard and measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio, maritime radio, CB radio, and so on, from unwanted interference.

### **Limits & Method**

The method is as defined in ANSI C63.10. The limits are as defined in FCC Part 15 Section 15.207 and RSS-GEN:


<b>Average Limits</b>		<b>Quasi-Peak Limits</b>	
150 kHz – 500 kHz	56 to 46* dB $\mu$ V	150 kHz – 500 kHz	66 to 56* dB $\mu$ V
500 kHz – 5 MHz	46 dB $\mu$ V	500 kHz – 5 MHz	56 dB $\mu$ V
5 MHz – 30 MHz	50 dB $\mu$ V	5 MHz – 30 MHz	60 dB $\mu$ V

\* Decreases linearly with the logarithm of the frequency


Both Quasi-Peak and Average limits are applicable and each is specified as being measured with a resolution bandwidth of 9 kHz. For Quasi-Peak, a video bandwidth at least three times greater than the resolution bandwidth is used.

If the Peak or Quasi-Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.



Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Typical Setup Diagram**

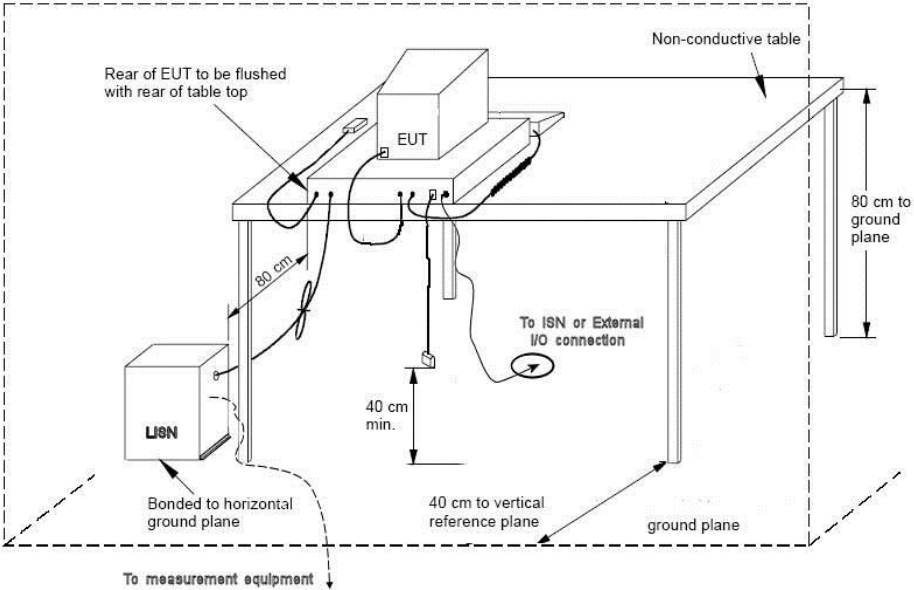


**Measurement Uncertainty**


The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is  $\pm 2.91\text{dB}$  with a 'k=2' coverage factor and a 95% confidence level.


**Preliminary Graphs**

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector. This peaking process is done as a worst case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


**Line (L1) – 120Vac 60Hz**

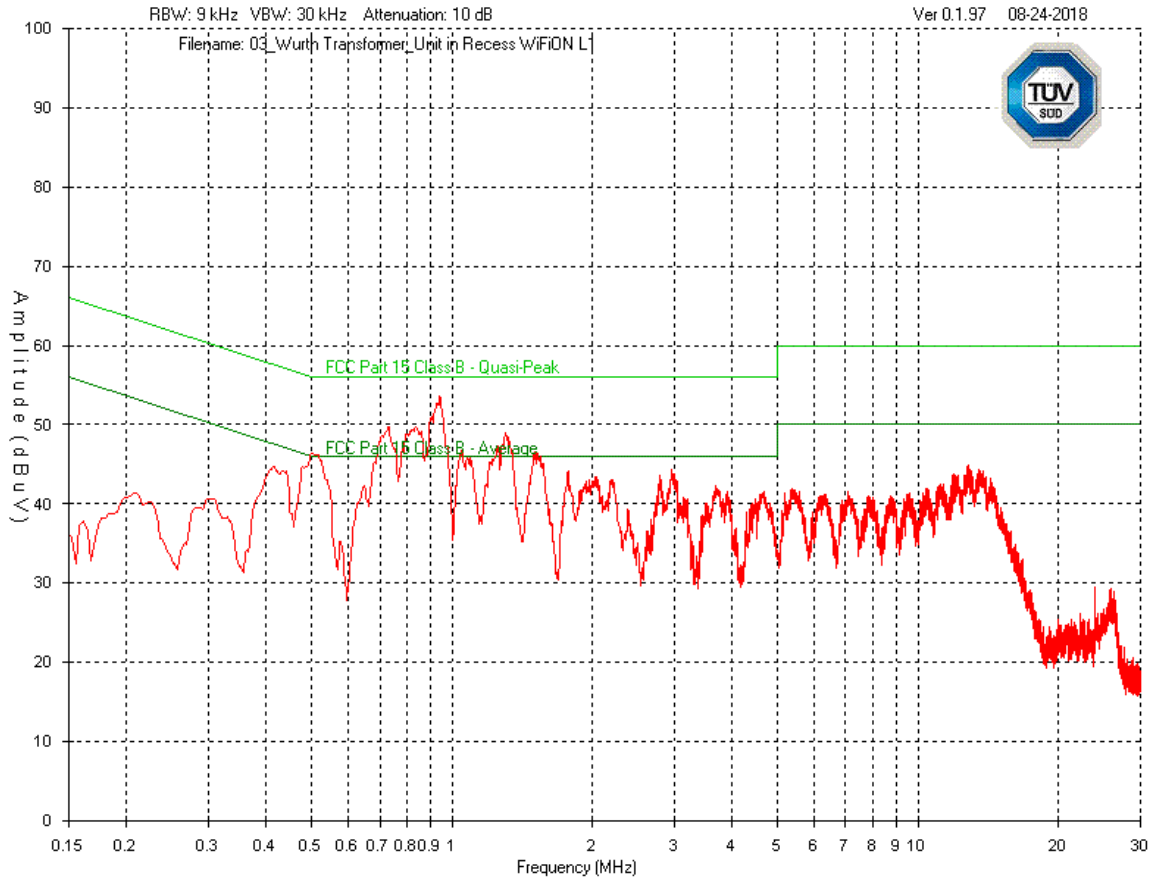

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

**Neutral (L2) – 120Vac 60Hz**

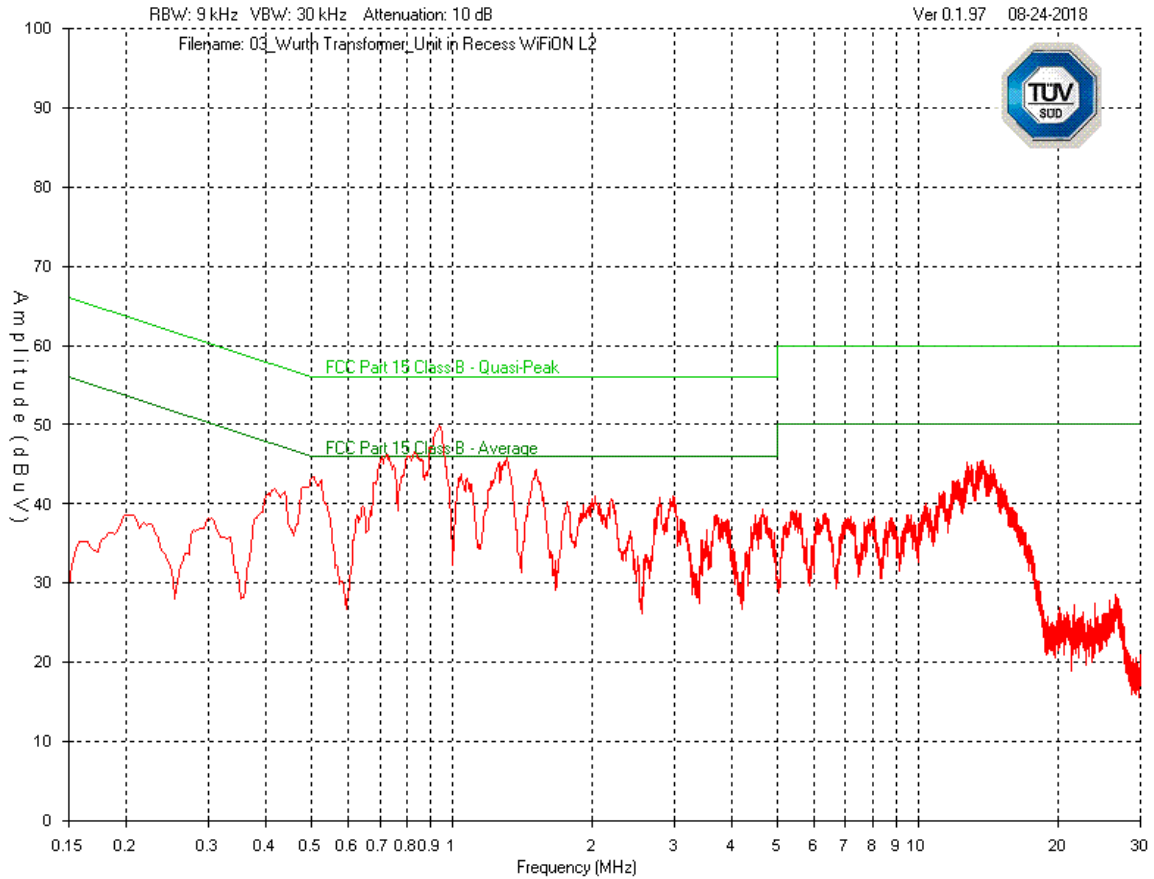


Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Final Measurements

Product Category			Class B								
EUT			EB-SMSWV-02								
Supply			120 Vac 60 Hz								
Frequency (MHz)	Detector	Received Signal (dBµV)	Atten Factor (dB)	Cable Factor (dB)	LISN Factor (dB)	Level (dBµV)	QP Limit (dBµV)	AVG Limit (dBµV)	QP Margin (dB)	AVG Margin (dB)	Pass/Fail
Line											
0.943	AVG	29.1	10	0.1	0.0	39.2	--	46.0	--	6.8	Pass
0.730	AVG	26.0	10	0.1	0.0	36.1	--	46.0	--	9.9	Pass
1.305	AVG	23.8	10	0.1	0.0	33.9	--	46.0	--	12.2	Pass
1.050	AVG	21.6	10	0.1	0.0	31.7	--	46.0	--	14.3	Pass
1.505	AVG	21.9	10	0.1	0.0	32.0	--	46.0	--	14.0	Pass
0.500	AVG	24.3	10	0.1	0.0	34.4	--	46.0	--	11.6	Pass
2.968	AVG	19.9	10	0.1	0.0	30.0	--	46.0	--	16.0	Pass
1.774	AVG	18.4	10	0.1	0.0	28.5	--	46.0	--	17.5	Pass
0.416	AVG	22.8	10	0.1	0.0	32.9	--	47.5	--	14.6	Pass
0.943	QP	38.8	10	0.1	0.0	48.9	56.0	--	7.1	--	Pass
Neutral											
0.937	AVG	28.8	10	0.1	0.0	38.9	--	46.0	--	7.1	Pass
0.727	AVG	25.7	10	0.1	0.0	35.8	--	46.0	--	10.2	Pass
1.314	AVG	23.4	10	0.1	0.0	33.5	--	46.0	--	12.5	Pass
1.520	AVG	21.8	10	0.1	0.0	31.9	--	46.0	--	14.2	Pass
1.044	AVG	20.7	10	0.1	0.0	30.8	--	46.0	--	15.2	Pass
0.503	AVG	23.9	10	0.1	0.0	34.0	--	46.0	--	12.0	Pass


See 'Appendix B – EUT, Peripherals and Test Setup Photos' for photos showing the test set-up for the highest line conducted emission

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	


### Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESL 6	Rohde & Schwarz	Dec. 27, 2017	Dec. 27, 2019	GEMC 160
LISN	FCC-LISN-50/250-16-2-01	FCC	Jan. 10, 2018	Jan. 10, 2020	GEMC 302
RF Cable 3m	LMR-400-3M-50Ω-MN-MN	LexTec	NCR	NCR	GEMC 276
Attenuator 10 dB	612-10-1	Meca Electronics, Inc	NCR	NCR	GEMC 223
Emissions Software	0.1.97	TUV SUD Canada, Inc	NCR	NCR	GEMC 58

This report module is based on report template 'FCC\_ICES003\_CE\_Rev1'

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## Appendix A – EUT Summary


Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

For further details for filing purposes, refer to filing package.

### General EUT Description

<b>Client</b>	
Organization / Address	Ecobee Inc 250 University Avenue, Suite 400 Toronto, ON M5H 3E5
Contact	Kashif Ahmed
Phone	416 987 1048
Email	<a href="mailto:kashif@ecobee.com">kashif@ecobee.com</a>
<b>EUT Details</b>	
EUT Name	EB-SMSWV-02
FCC ID	WR9EBSMSW1V002
Industry Canada #	7981A- EBSMSW1V002
Equipment Category	Low power wireless light switch
Basic EUT Functionality	EUT is a smart light switch that have a 2400 – 2483.5 MHz DTS (802.11 b/g/n) transmitter and a 902 – 928 MHz FHSS transmitter.
Input Voltage and Frequency	120 Vac 60 Hz
Rated Input Current	2 A
Connectors available on EUT	1 (terminals for HVAC control)
Peripherals Required for Test	None
Release type	Final
Intentional Radiator Frequency	2400 – 2483.5 MHz for 802.11 b/g/n DTS 902 – 928 MHz FHSS
EUT Configuration	Wireless configured to transmit continuously at 100% duty cycle

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see ‘Appendix B – EUT and Test Setup Photos’.

Client	<b>Ecobee Inc.</b>	
Product	<b>EB-SMSWV-02</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247:2015	

## EUT Configuration

Please see Appendix B for a picture of the unit running in normal conditions.

- Wireless were configured to transmit at maximum possible duty cycle
- The EUT was mounted in a metal mounting structure to simulate actual use.
- The following commands were used to set the chipset for duty cycle /channel/power/data rate (modulation):  
B mode transmission: "xxxxxxxx --tx tx99 --txfreq 11 --txpwr 20 --txrate 1"  
G mode transmission: "xxxxxxxx --tx tx100 --txfreq 11 --txpwr 20 --txrate 11"  
N mode transmission: "xxxxxxxx --tx tx100 --txfreq 11 --txpwr 20 --txrate 16"

Where xxxxxxxxx is the low level chipset command line program.

## Operational Setup

These devices are required to be attached to the EUT for its normal operation.

- A debug board was connected to the EUT to issue test commands.