



FCC PART 15.247
TEST REPORT

For

Shenzhen Sande Dacom Electronics Co., Ltd.

2/4/5F, Building I, NO.10 East Area of ShangXue, Science&Technology Industrial Park, BanTian street, LongGang district, Shenzhen, China

FCC ID: WTDL02

Report Type: Original Report	Product Type: Sport music Bluetooth Headset
Report Number: RSZ171124006-00B	
Report Date: 2017-12-04	
Reviewed By: Simon Wang RF Engineer	<i>Simon wang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★". This report may contain data were produced under the subcontractor and shall be marked with an asterisk "△".

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	10
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA	22

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....29
APPLICABLE STANDARD29
TEST PROCEDURE29
TEST DATA29

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST35
APPLICABLE STANDARD35
TEST PROCEDURE35
TEST DATA35

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....38
APPLICABLE STANDARD38
TEST PROCEDURE38
TEST DATA38

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT54
APPLICABLE STANDARD54
TEST PROCEDURE54
TEST DATA54

FCC §15.247(d) - BAND EDGES TESTING56
APPLICABLE STANDARD56
TEST PROCEDURE56
TEST DATA56

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen Sande Dacom Electronics Co., Ltd.* 's product, model number: L02/G33 (FCC ID: WTDL02) or the "EUT" in this report is a *Sport music Bluetooth Headset*, which was measured approximately: 162.0 mm (L) * 154.8 mm (W) * 11.7 mm (H), rated with input voltage: DC 3.7 V from battery.

* All measurement and test data in this report was gathered from production sample serial number: 1702589. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-11-24.

Objective

This test report is prepared on behalf of *Shenzhen Sande Dacom Electronics Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.5dB
RF conducted test with spectrum		±1.5dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3°C
Humidity		±6%
Supply voltages		±0.4%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Bay Area Compliance Laboratories Corp. (Shenzhen) has been accredited to ISO/IEC 17025 by CNAS (Lab code: L2408). And accredited to ISO/IEC 17025 by NVLAP (Lab code: 200707-0), the FCC Designation No. CN5001 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Shenzhen) was registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

No exercise software was made to the EUT tested.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SKY	Adapter	N/A	N/A
BULL	Socket	GN-415K	5503290068073

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-Shielding Un-Detachable DC Cable	0.2	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

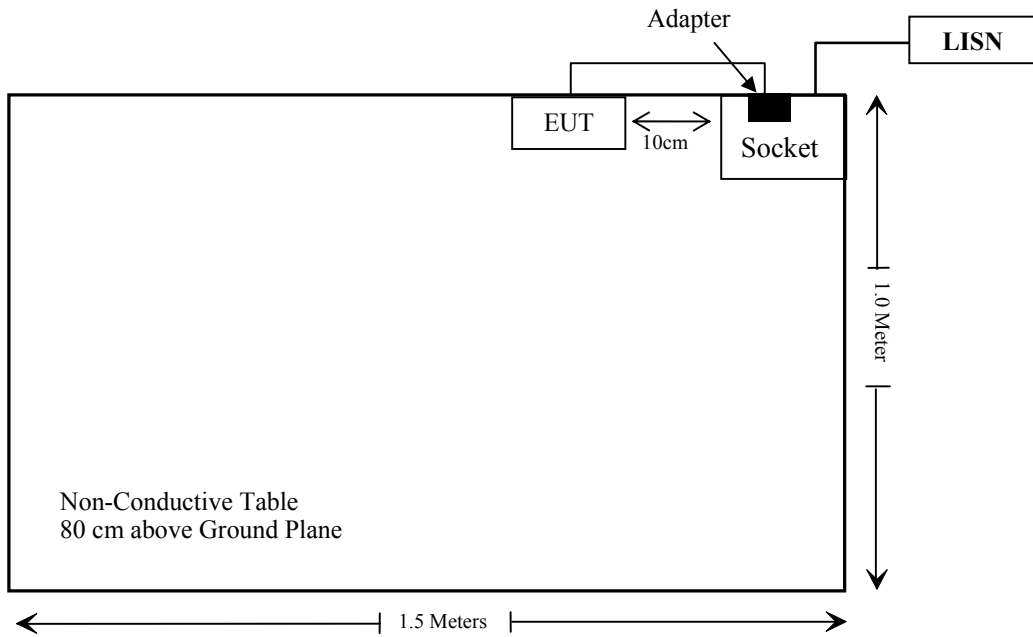

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2016-12-07	2017-12-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-11-19	2018-05-21
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1-0720-504504	2017-11-12	2018-05-12
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2014-12-17	2017-12-16
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2016-12-07	2017-12-07
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2014-12-29	2017-12-28
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	N/A	NCR	NCR
RF Conducted Test					
Agilent	P-Series Power Meter	N1912A	MY5000448	2016-12-05	2017-12-05
Agilent	P-Series Power Meter	N1912A	MY5000448	2017-12-05	2018-12-05
Agilent	Wideband Power Sensor	N1921A	MY54210016	2016-12-05	2017-12-05
Agilent	Wideband Power Sensor	N1921A	MY54210016	2017-12-05	2018-12-05
WEINSCHL	10dB Attenuator	5324	AU 3842	2017-11-23	2018-05-22
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2016-12-05	2017-12-05
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2480	2.5	1.78	5.0	0.561	3.0	Yes

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 2.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

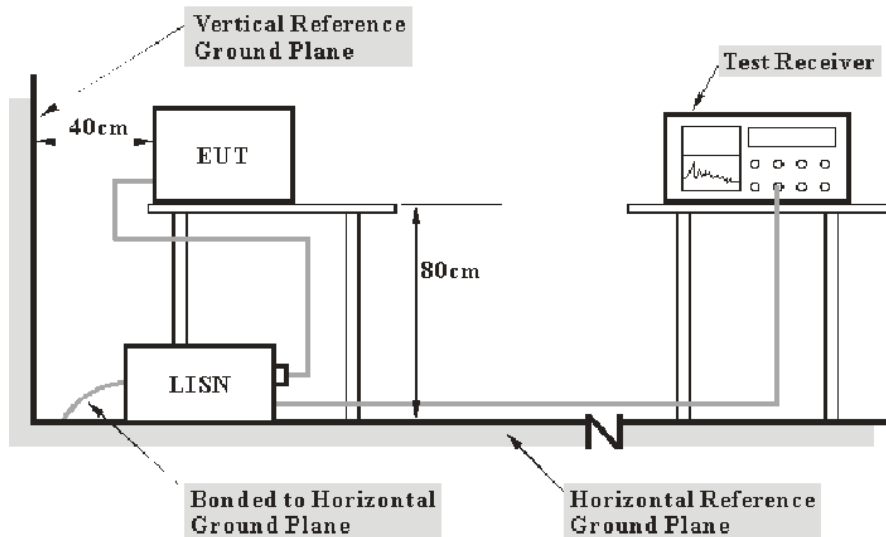

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2017-11-29.


EUT operation mode: Transmitting

AC 120V/60 Hz, Line

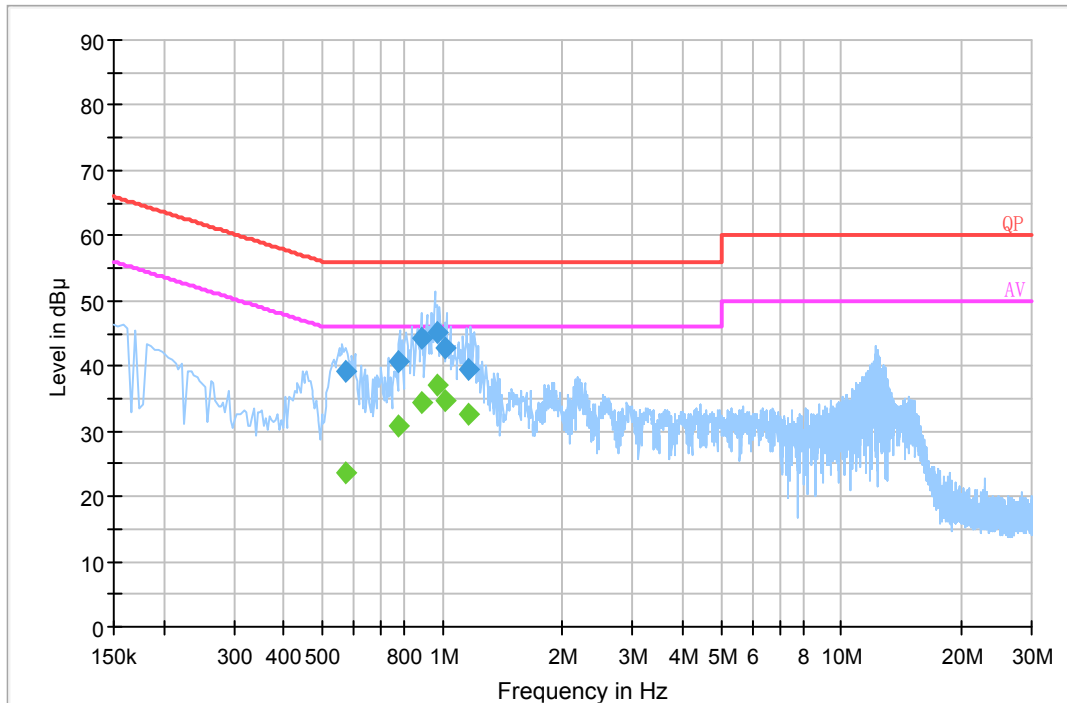

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.570430	39.2	20.1	56.0	16.8	QP
0.778270	40.5	20.0	56.0	15.5	QP
0.884710	44.4	20.1	56.0	11.6	QP
0.972370	45.1	20.1	56.0	10.9	QP
1.018670	42.9	20.1	56.0	13.1	QP
1.164330	39.5	20.1	56.0	16.5	QP
0.570430	23.7	20.1	46.0	22.3	Ave.
0.778270	30.9	20.0	46.0	15.1	Ave.
0.884710	34.5	20.1	46.0	11.5	Ave.
0.972370	37.1	20.1	46.0	8.9	Ave.
1.018670	34.7	20.1	46.0	11.3	Ave.
1.164330	32.7	20.1	46.0	13.3	Ave.

AC 120V/60 Hz, Neutral

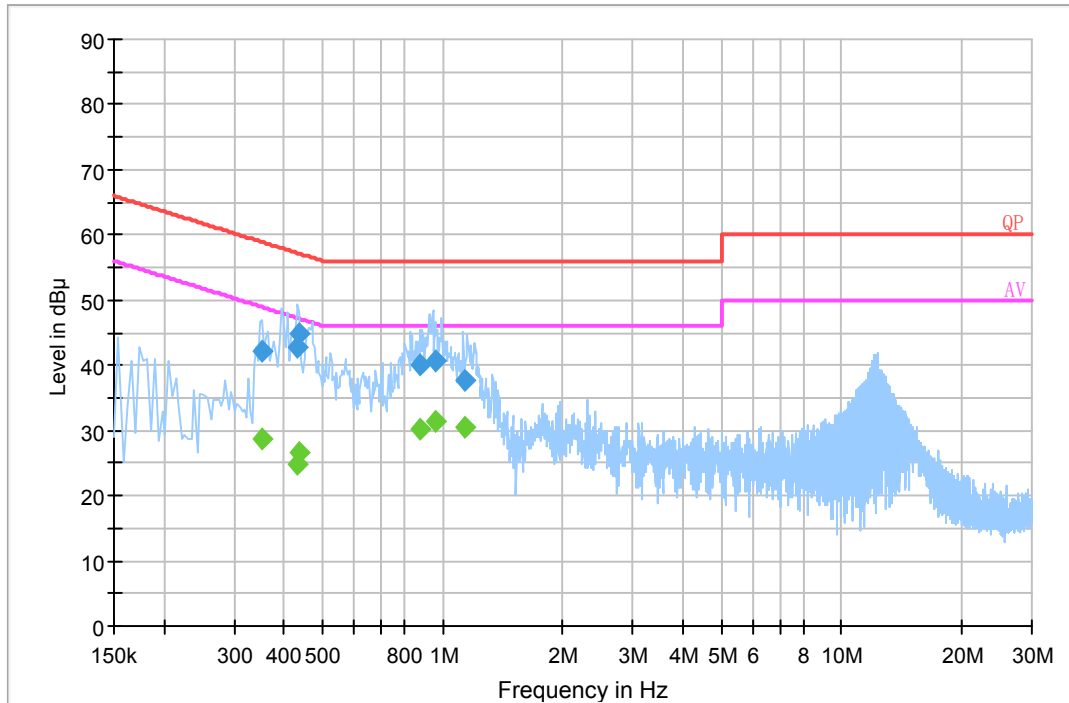

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.352690	42.0	20.2	58.9	16.9	QP
0.431490	42.6	20.2	57.2	14.6	QP
0.436450	45.0	20.2	57.1	12.1	QP
0.872770	39.9	20.1	56.0	16.1	QP
0.955810	40.6	20.1	56.0	15.4	QP
1.133110	37.8	20.1	56.0	18.2	QP
0.352690	28.8	20.2	48.9	20.1	Ave.
0.431490	24.8	20.2	47.2	22.4	Ave.
0.436450	26.7	20.2	47.1	20.4	Ave.
0.872770	30.3	20.1	46.0	15.7	Ave.
0.955810	31.4	20.1	46.0	14.6	Ave.
1.133110	30.6	20.1	46.0	15.4	Ave.

- Note:**
- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
 - 2) Corrected Amplitude = Reading + Correction Factor
 - 3) Margin = Limit - Corrected Amplitude


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

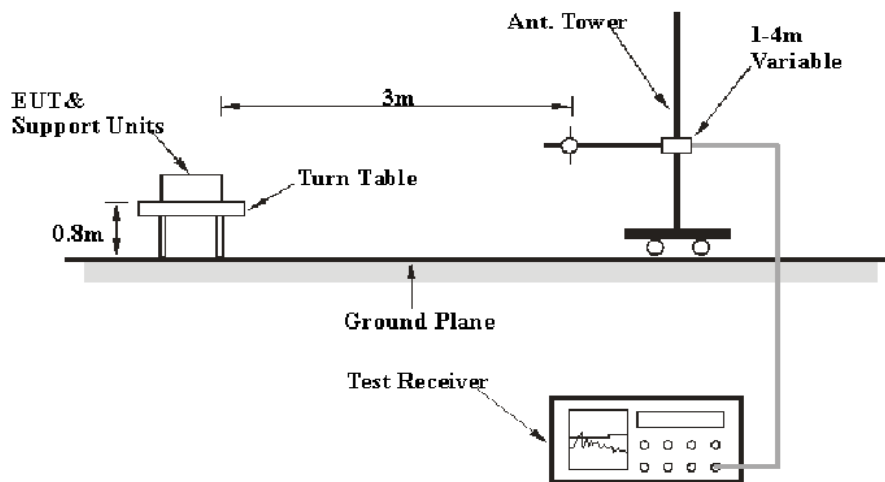

Above 1GHz:

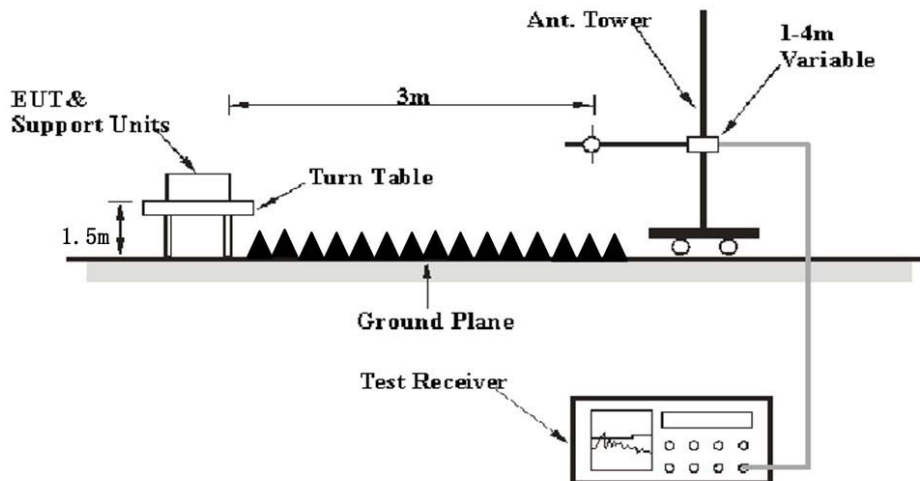

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2017-12-01.

EUT operation mode: Transmitting (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK mode, the worst case was GFSK mode)

30 MHz - 1GHz:

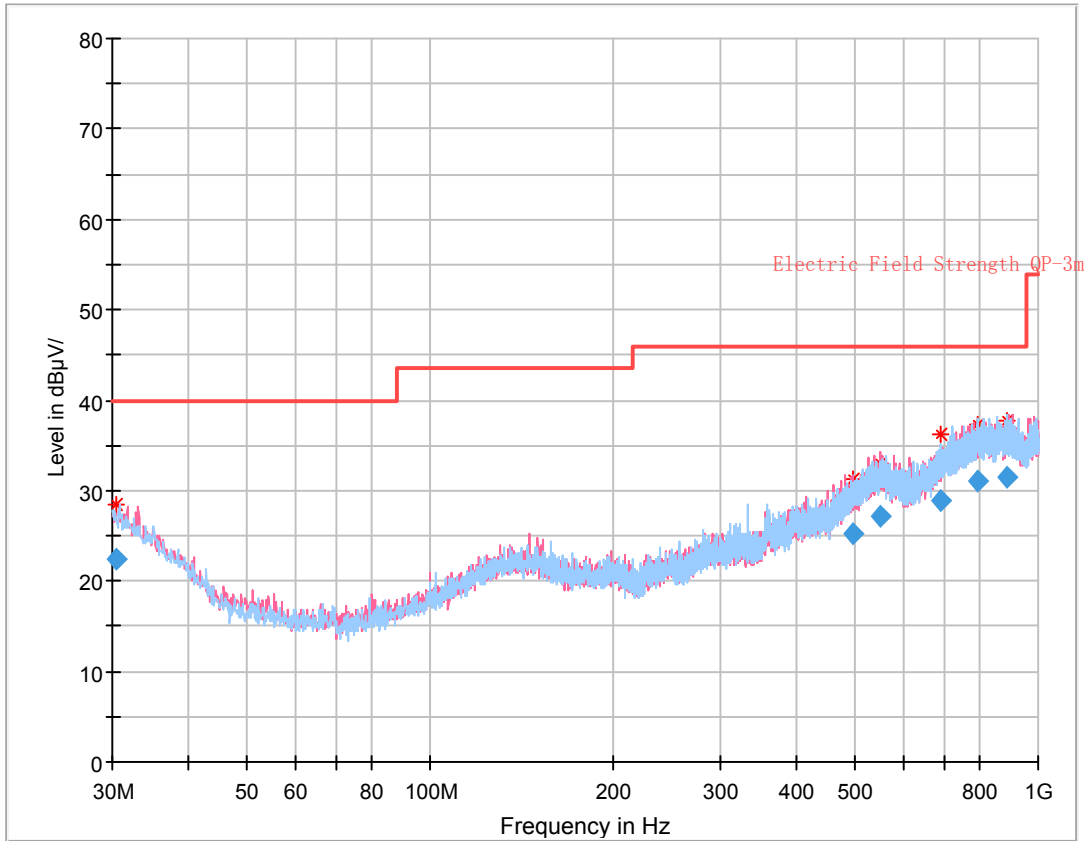

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
30.488500	22.35	113.0	H	52.0	0.0	40.00	17.65
494.901375	25.29	218.0	V	32.0	2.7	46.00	20.71
549.118250	27.10	287.0	V	104.0	4.9	46.00	18.90
693.067500	28.82	260.0	H	0.0	6.4	46.00	17.18
792.650125	31.08	176.0	H	357.0	8.8	46.00	14.92
888.850375	31.45	191.0	H	203.0	9.6	46.00	14.55

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) +cable loss - amplifier factor

Margin = Limit- Corr. Amplitude

1 GHz – 25 GHz:

Frequency (MHz)	Measurement		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.00	70.63	PK	274	2.3	H	33.92	104.55	/	/
2402.00	61.25	Ave.	274	2.3	H	33.92	95.17	/	/
2402.00	68.21	PK	294	1.1	V	33.92	102.13	/	/
2402.00	57.46	Ave.	294	1.1	V	33.92	91.38	/	/
2387.56	26.94	PK	172	1.4	H	33.92	60.86	74	13.14
2387.56	13.22	Ave.	172	1.4	H	33.92	47.14	54	6.86
2489.66	27.34	PK	41	2.0	H	34.08	61.42	74	12.58
2489.66	13.58	Ave.	41	2.0	H	34.08	47.66	54	6.34
4804.00	54.76	PK	11	2.3	H	5.84	60.60	74	13.40
4804.00	36.36	Ave.	11	2.3	H	5.84	42.20	54	11.80
Middle Channel (2441 MHz)									
2441.00	69.27	PK	348	2.2	H	33.92	103.19	/	/
2441.00	58.26	Ave.	348	2.2	H	33.92	92.18	/	/
2441.00	67.05	PK	102	2.0	V	33.92	100.97	/	/
2441.00	56.78	Ave.	102	2.0	V	33.92	90.70	/	/
4882.00	52.82	PK	255	2.1	H	6.21	59.03	74	14.97
4882.00	35.66	Ave.	255	2.1	H	6.21	41.87	54	12.13
High Channel (2480 MHz)									
2480.00	67.18	PK	182	1.3	H	34.08	101.26	/	/
2480.00	56.34	Ave.	182	1.3	H	34.08	90.42	/	/
2480.00	65.87	PK	150	1.4	V	34.08	99.95	/	/
2480.00	55.44	Ave.	150	1.4	V	34.08	89.52	/	/
2352.45	27.33	PK	136	1.5	H	33.92	61.25	74	12.75
2352.45	13.58	Ave.	136	1.5	H	33.92	47.50	54	6.50
2483.51	32.04	PK	90	2.1	H	34.08	66.12	74	7.88
2483.51	16.88	Ave.	90	2.1	H	34.08	50.96	54	3.04
4960.00	52.04	PK	226	2.5	H	7.82	59.86	74	14.14
4960.00	34.65	Ave.	226	2.5	H	7.82	42.47	54	11.53

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude



The other spurious emission which is 20dB to the limit was not recorded.

Prescan with 2480 MHz

Horizontal

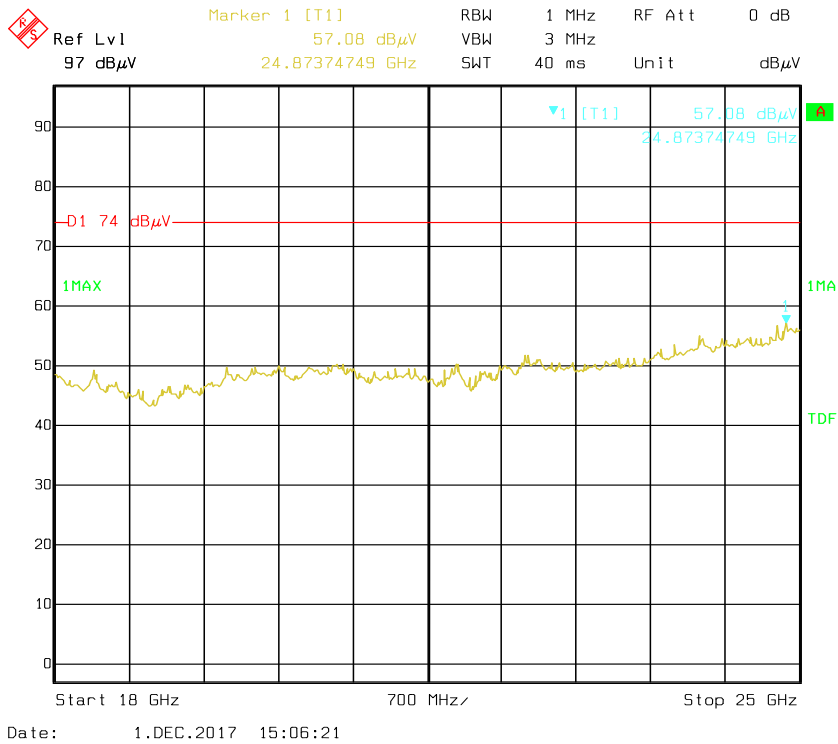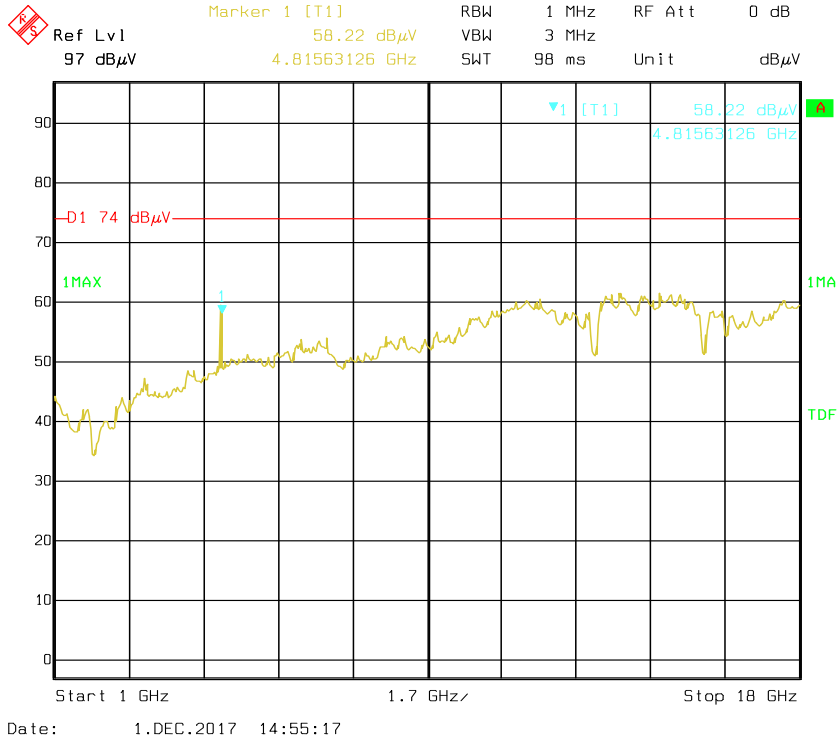

Vertical

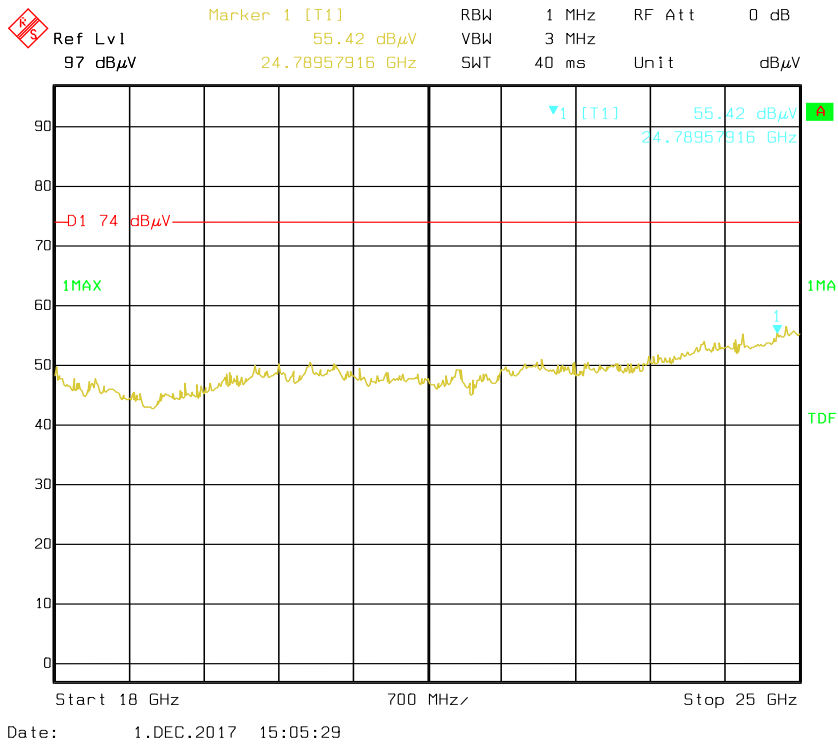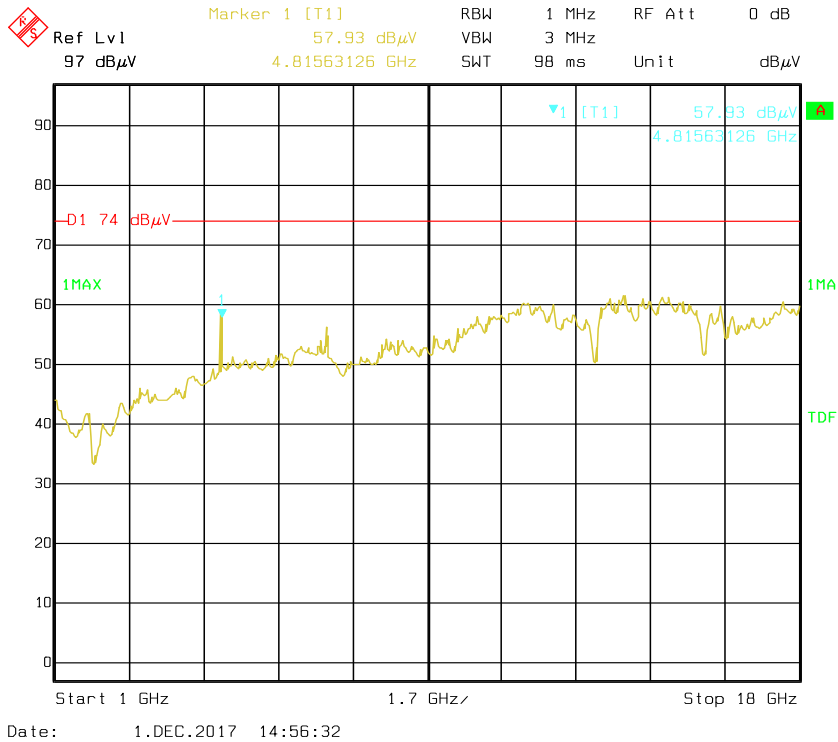

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2017-12-02.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.002	0.617	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.596	Pass
	Adjacent	2442			
	High	2480	0.996	0.597	Pass
	Adjacent	2479			
EDR (π/4-DQPSK)	Low	2402	1.002	0.815	Pass
	Adjacent	2403			
	Middle	2441	1.008	0.811	Pass
	Adjacent	2442			
	High	2480	1.002	0.811	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	0.996	0.808	Pass
	Adjacent	2403			
	Middle	2441	1.008	0.817	Pass
	Adjacent	2442			
	High	2480	1.002	0.808	Pass
	Adjacent	2479			


Note: Limit = 20 dB bandwidth *2/3

BDR (GFSK): Low Channel

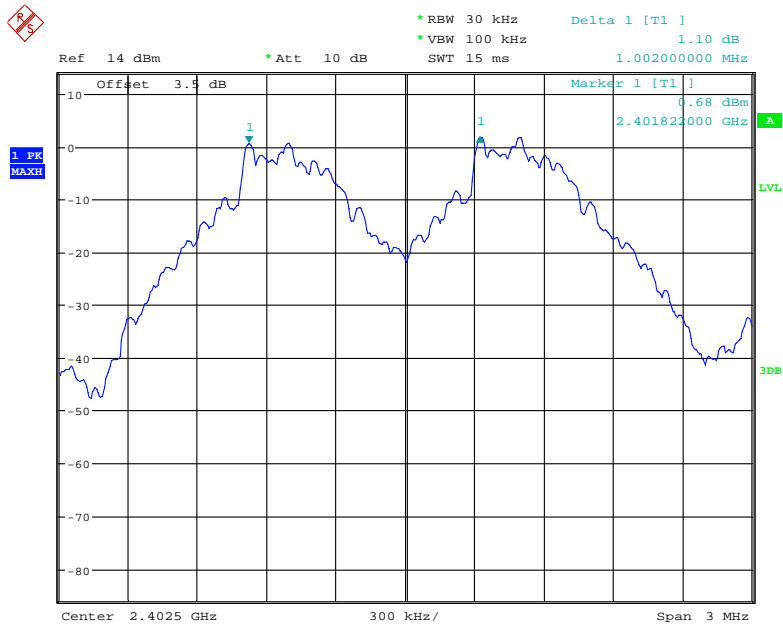


Date: 2.DEC.2017 11:33:56

BDR (GFSK): Middle Channel

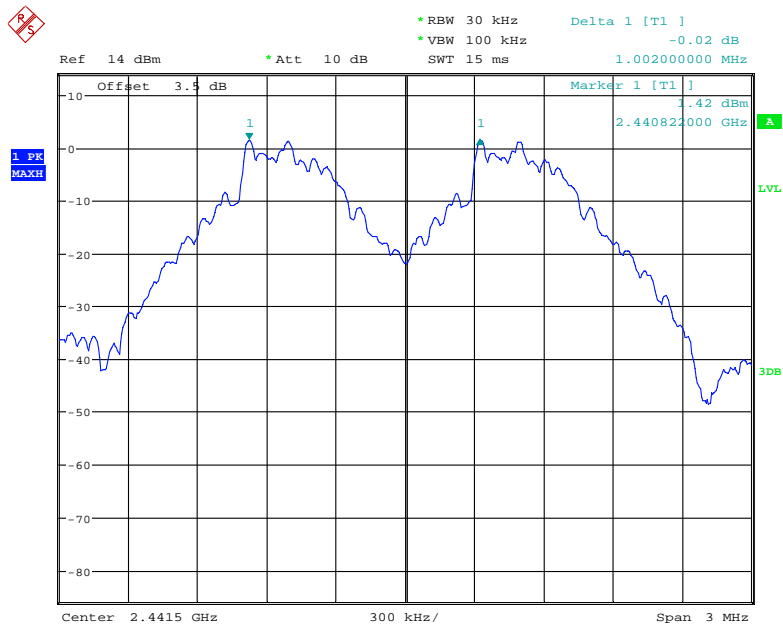


Date: 2.DEC.2017 11:33:04

BDR (GFSK): High Channel

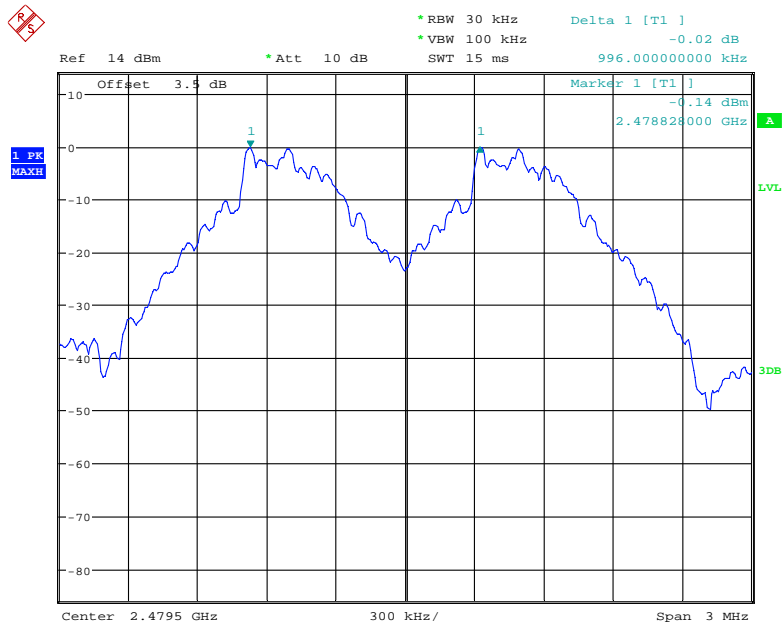


Date: 2.DEC.2017 11:31:51

EDR ($\pi/4$ -DQPSK): Low Channel

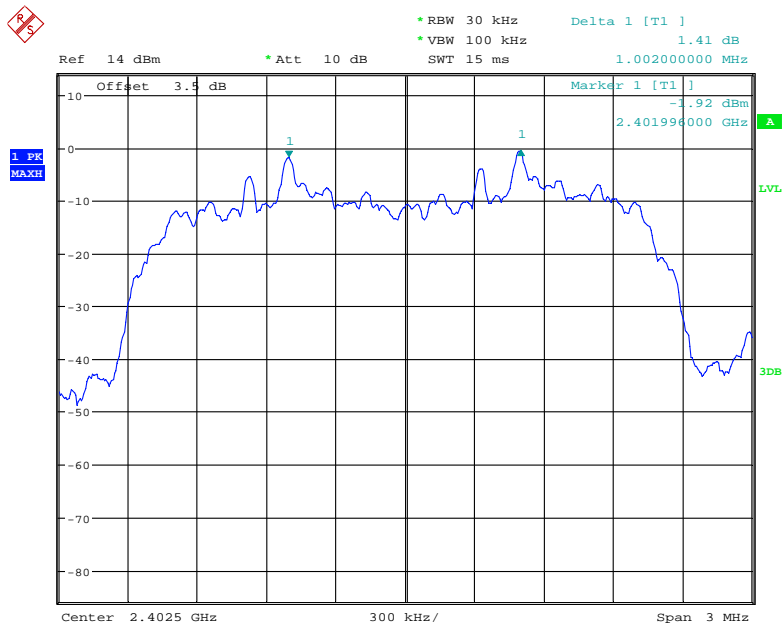


Date: 2.DEC.2017 11:34:52

EDR ($\pi/4$ -DQPSK): Middle Channel

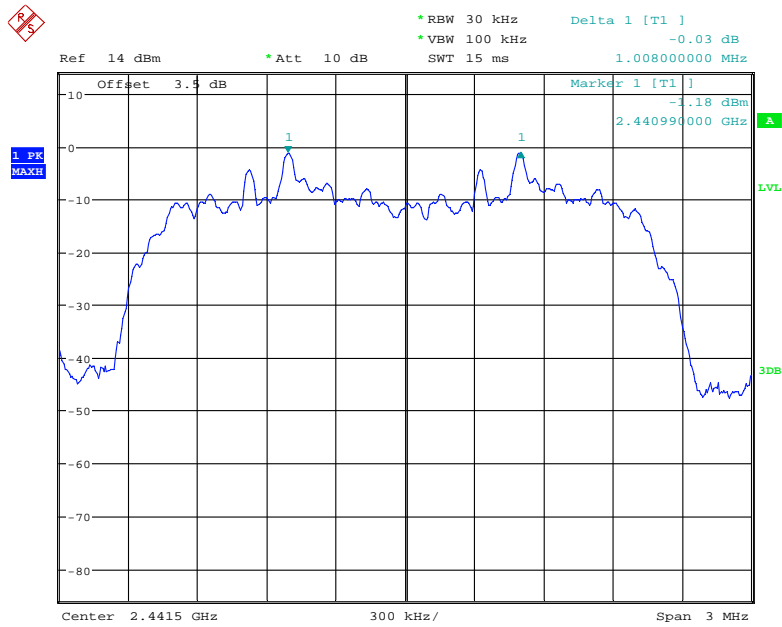


Date: 2.DEC.2017 11:35:24

EDR ($\pi/4$ -DQPSK): High Channel

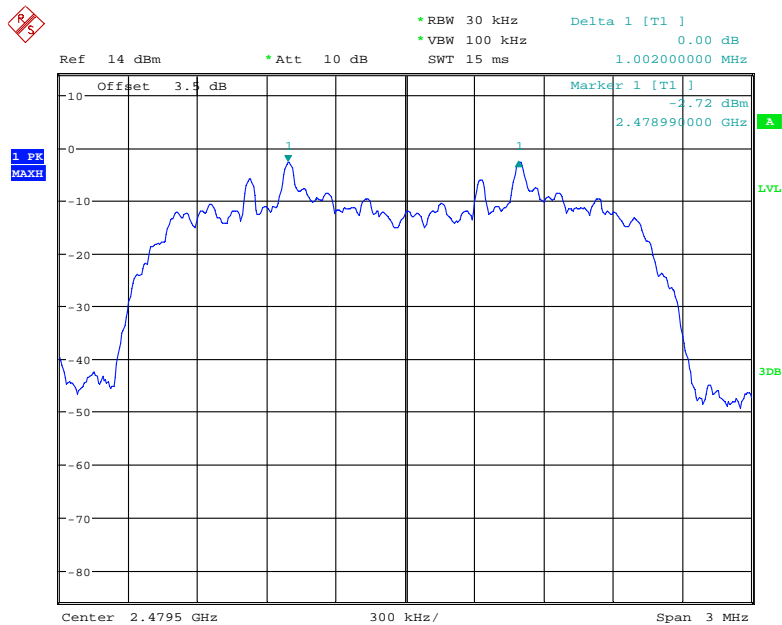


Date: 2.DEC.2017 11:36:34

EDR (8DPSK): Low Channel

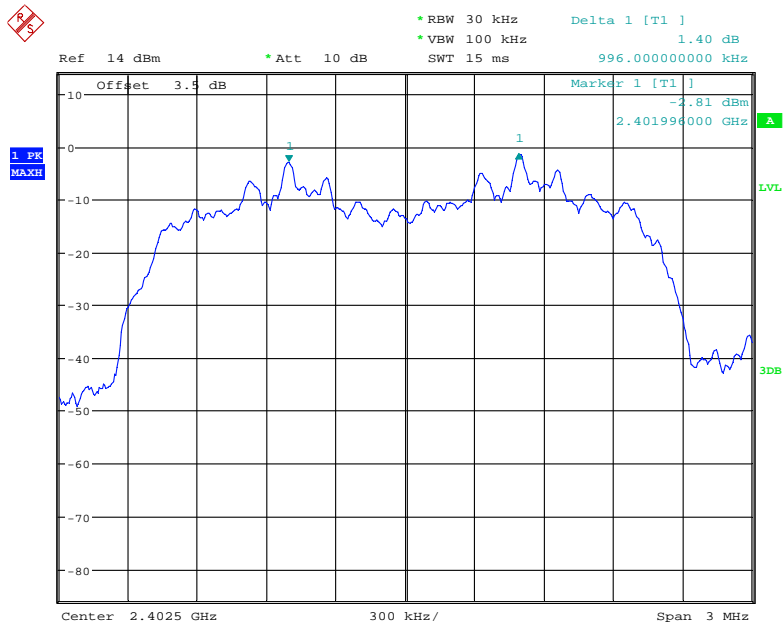


Date: 2.DEC.2017 11:39:16

EDR (8DPSK): Middle Channel

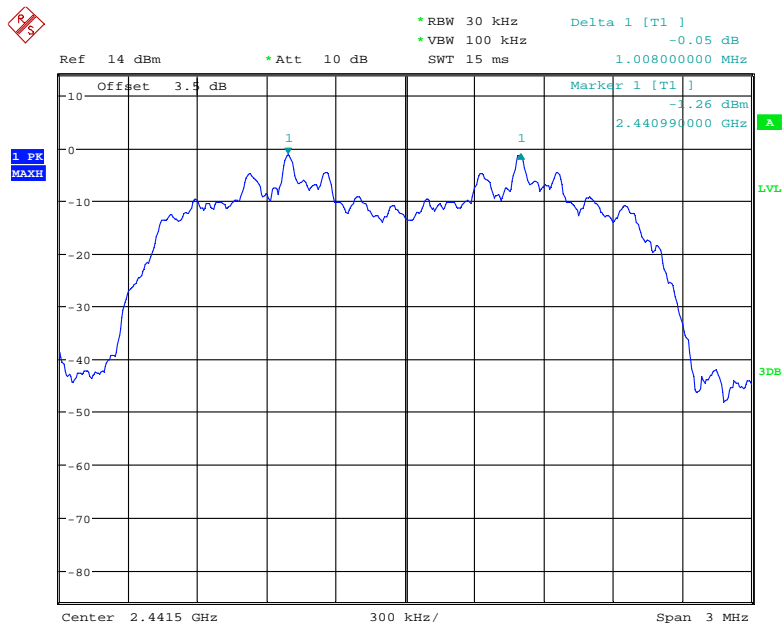

Date: 2.DEC.2017 11:38:20

EDR (8DPSK): High Channel

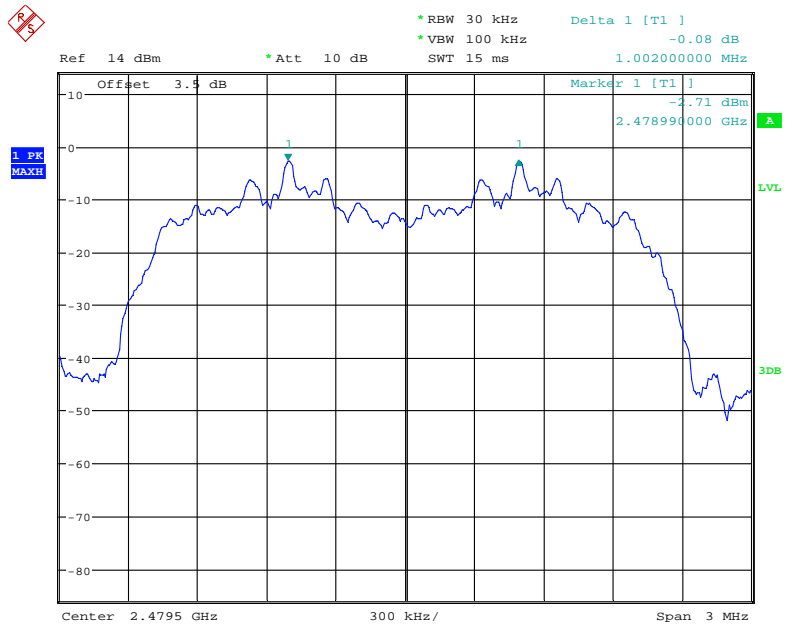

Date: 2.DEC.2017 11:37:38

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Nancy Wang on 2017-12-02.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.926
	Middle	2441	0.894
	High	2480	0.895
EDR ($\pi/4$-DQPSK)	Low	2402	1.222
	Middle	2441	1.216
	High	2480	1.216
EDR (8DPSK)	Low	2402	1.212
	Middle	2441	1.226
	High	2480	1.212

BDR (GFSK): Low Channel

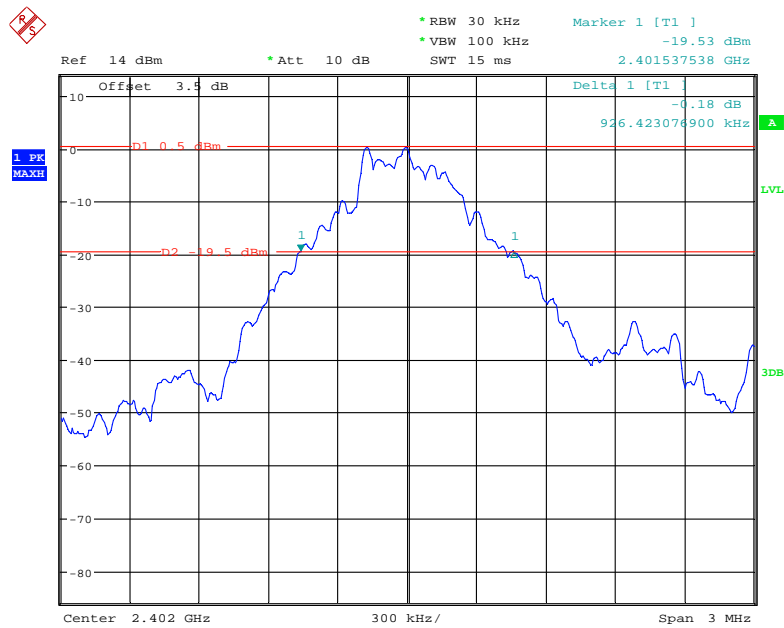


Date: 2.DEC.2017 11:28:00

BDR (GFSK): Middle Channel

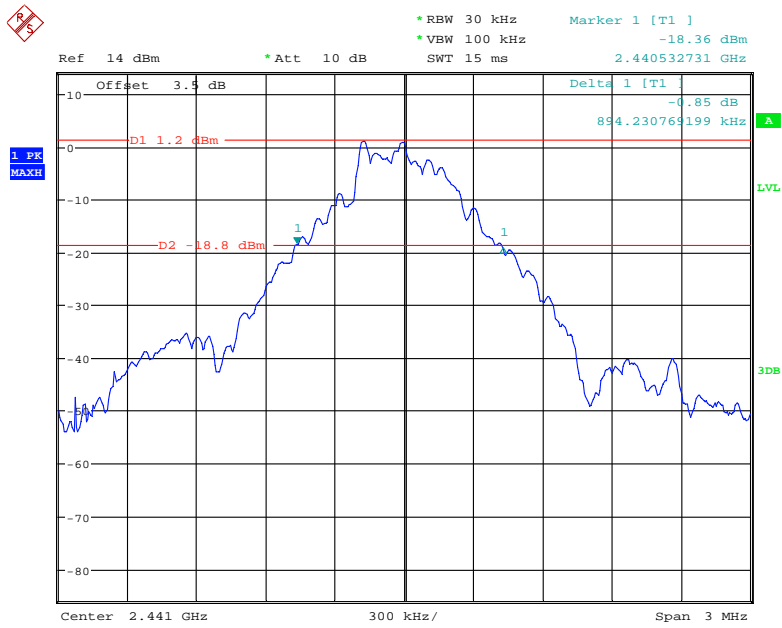


Date: 2.DEC.2017 11:29:11

BDR (GFSK): High Channel

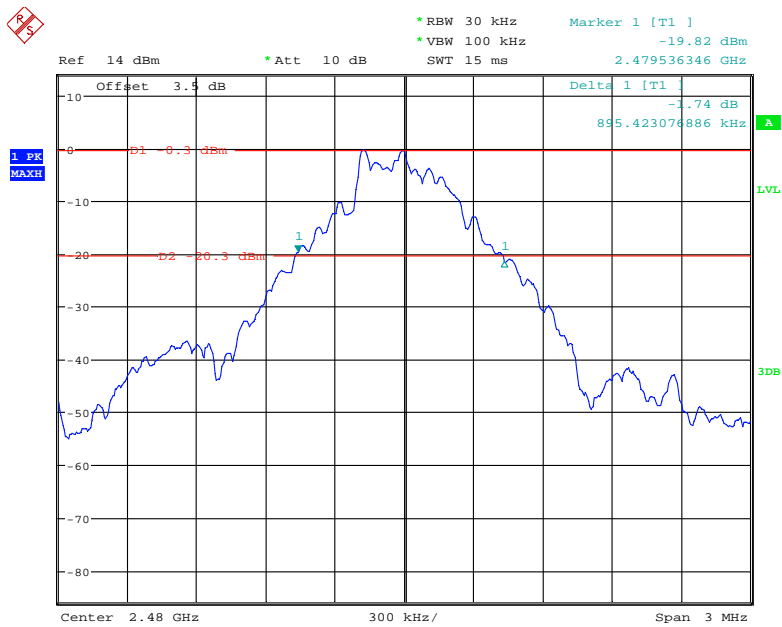


Date: 2.DEC.2017 11:30:22

EDR ($\pi/4$ -DQPSK): Low Channel

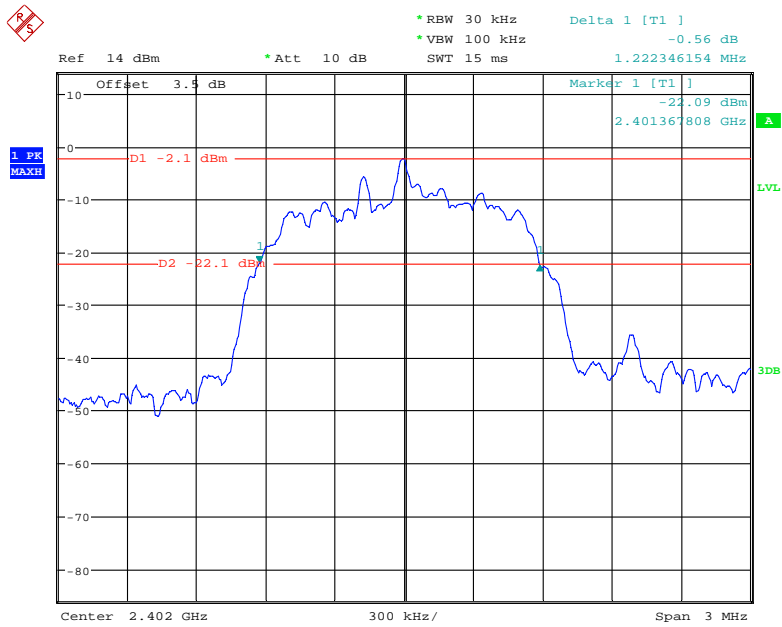


Date: 2.DEC.2017 11:24:41

EDR ($\pi/4$ -DQPSK): Middle Channel

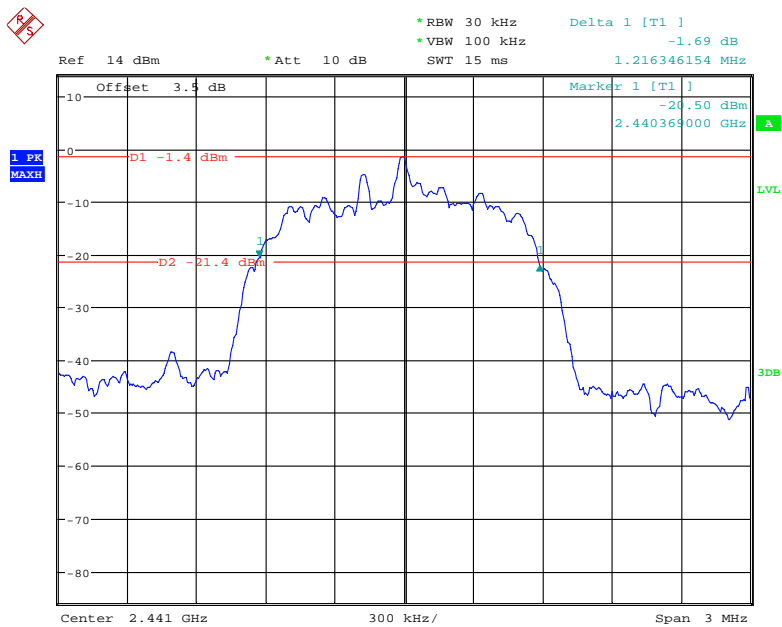


Date: 2.DEC.2017 11:25:33

EDR ($\pi/4$ -DQPSK): High Channel

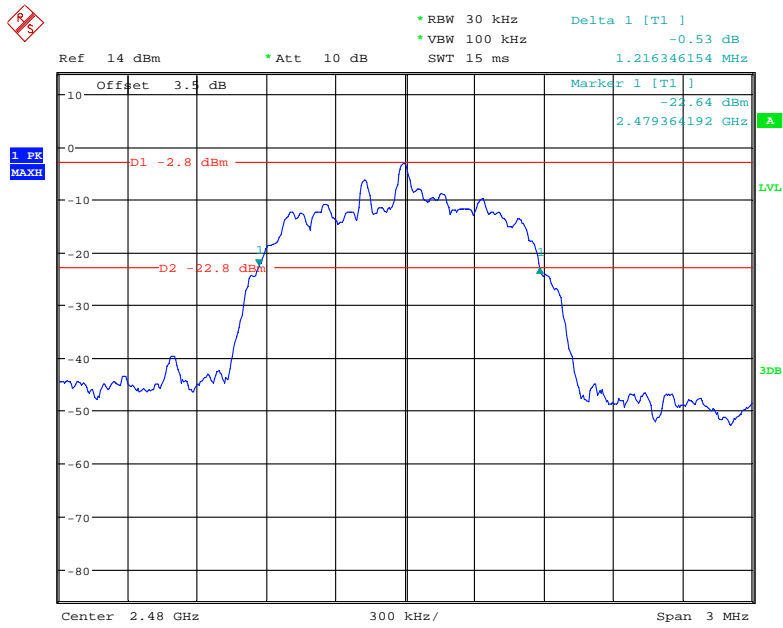


Date: 2.DEC.2017 11:26:35

EDR (8DPSK): Low Channel

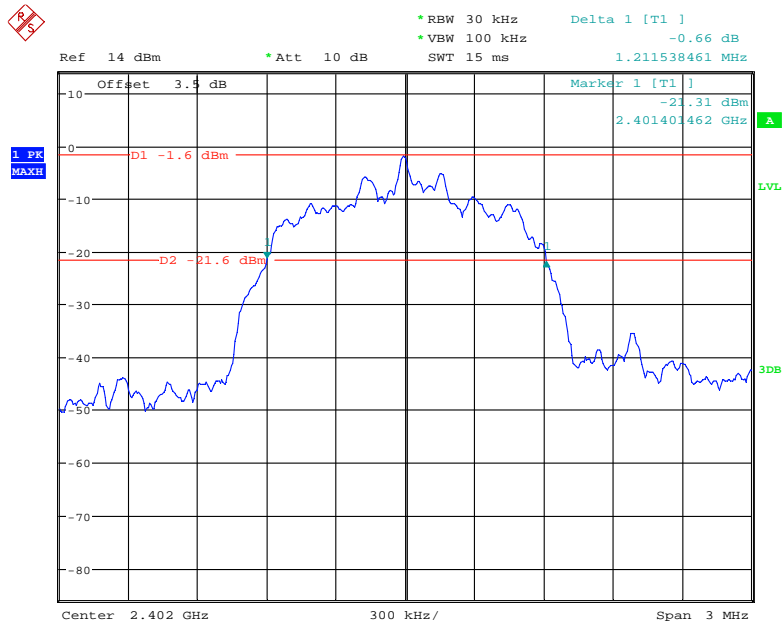


Date: 2.DEC.2017 11:20:50

EDR (8DPSK): Middle Channel

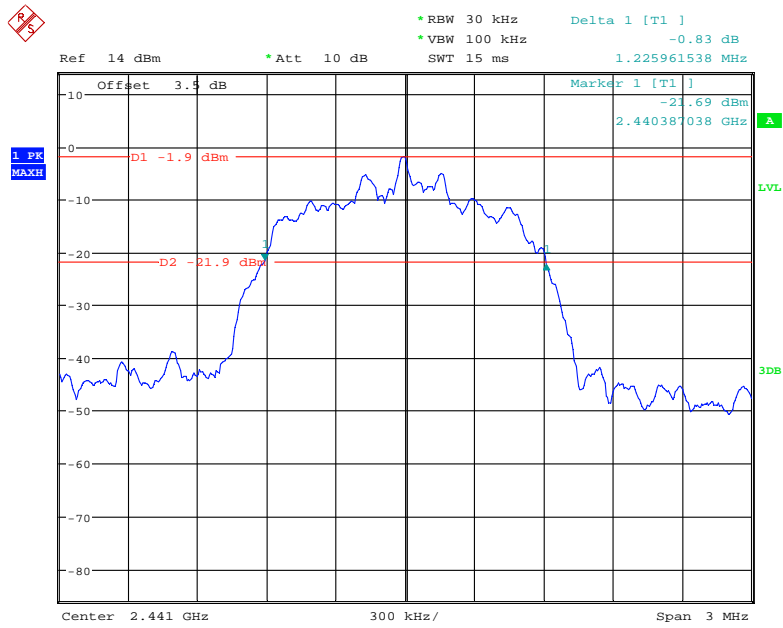

Date: 2.DEC.2017 11:19:38

EDR (8DPSK): High Channel

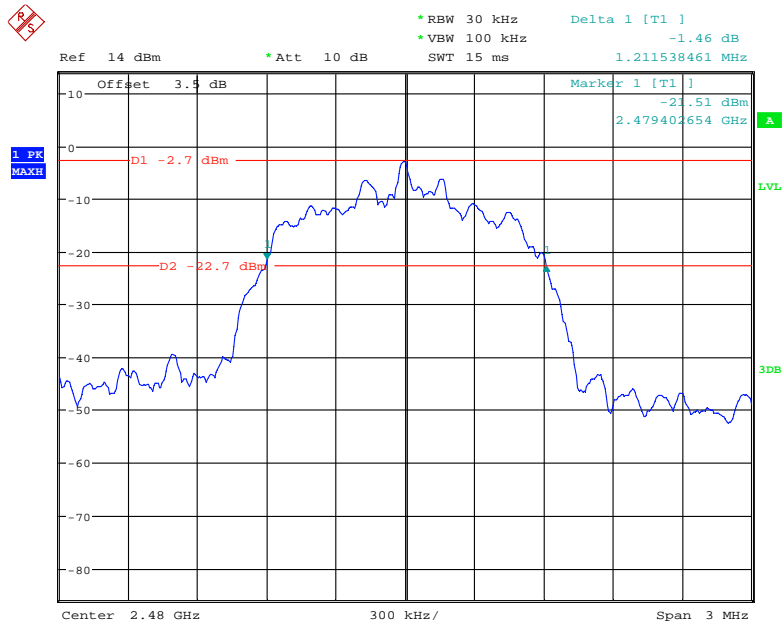

Date: 2.DEC.2017 11:22:00

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Nancy Wang on 2017-12-02.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

BDR (GFSK): Number of Hopping Channels

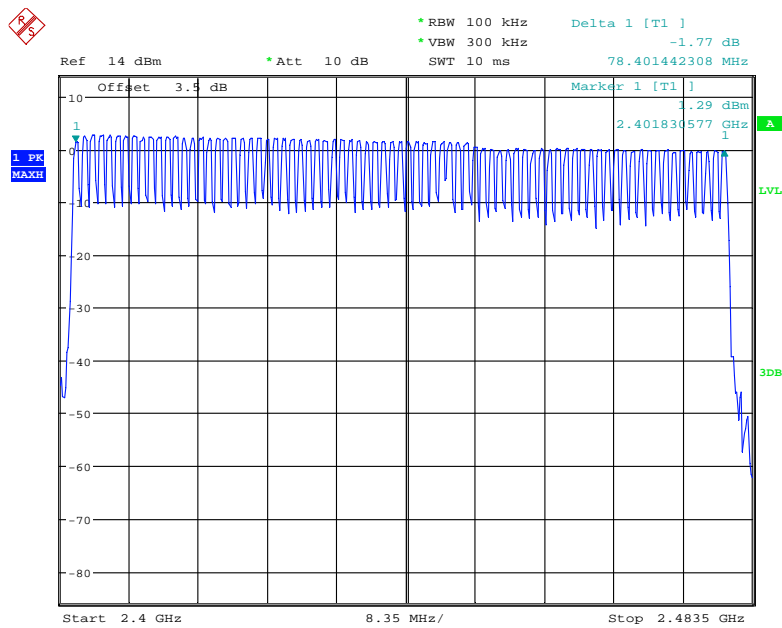


Date: 2.DEC.2017 13:42:33

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

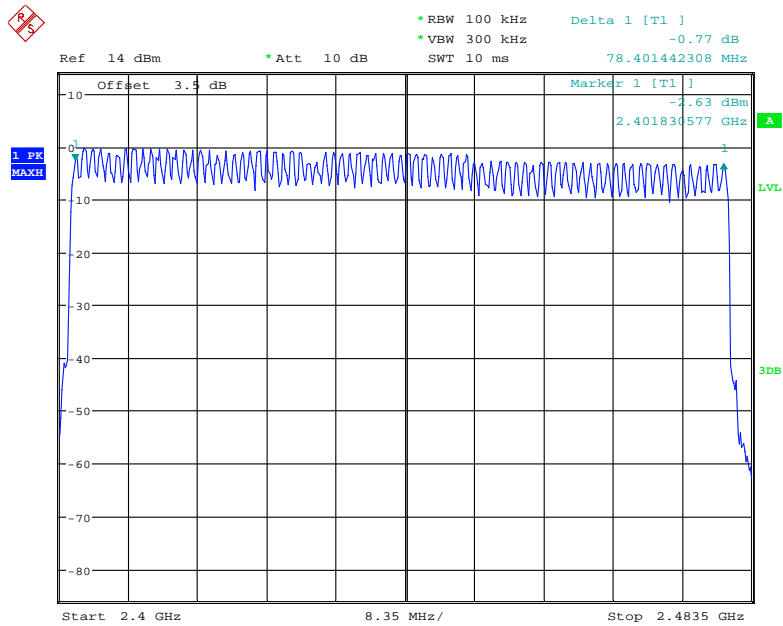

Date: 2.DEC.2017 13:48:32

EDR (8DPSK): Number of Hopping Channels

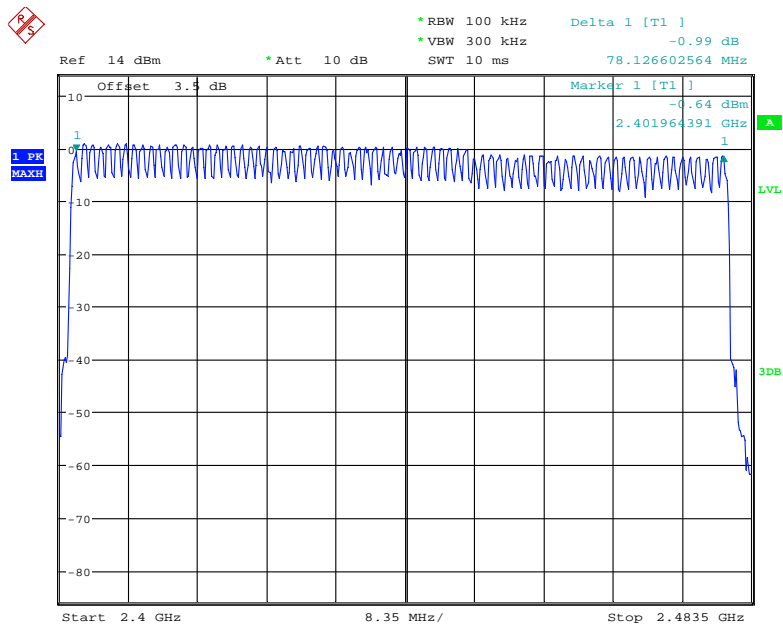

Date: 2.DEC.2017 13:09:25

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data**Environmental Conditions**

Temperature:	25~26 °C
Relative Humidity:	52~53 %
ATM Pressure:	101.0~101.5 kPa


The testing was performed by Nancy Wang on 2017-12-01 and 2017-12-07.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
BDR (GFSK)	DH 1	Low	0.436	0.140	0.4	Pass	
		Middle	0.449	0.144	0.4	Pass	
		High	0.445	0.142	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.730	0.277	0.4	Pass	
		Middle	1.706	0.273	0.4	Pass	
		High	1.706	0.273	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.972	0.317	0.4	Pass	
		Middle	2.972	0.317	0.4	Pass	
		High	2.972	0.317	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
	EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.457	0.146	0.4	Pass
Middle			0.457	0.146	0.4	Pass	
High			0.457	0.146	0.4	Pass	
Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S							
2DH 3		Low	1.730	0.277	0.4	Pass	
		Middle	1.730	0.277	0.4	Pass	
		High	1.730	0.277	0.4	Pass	
Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S							
2DH 5		Low	2.996	0.320	0.4	Pass	
		Middle	2.996	0.320	0.4	Pass	
		High	2.996	0.320	0.4	Pass	
Note:2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S							
EDR (8DPSK)		3DH 1	Low	0.452	0.145	0.4	Pass
	Middle		0.452	0.145	0.4	Pass	
	High		0.452	0.145	0.4	Pass	
	Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	3DH 3	Low	1.730	0.277	0.4	Pass	
		Middle	1.730	0.277	0.4	Pass	
		High	1.730	0.277	0.4	Pass	
	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	3DH 5	Low	2.980	0.318	0.4	Pass	
		Middle	2.980	0.318	0.4	Pass	
		High	2.996	0.320	0.4	Pass	
	Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						

BDR (GFSK): Pulse time, Low Channel, DH1

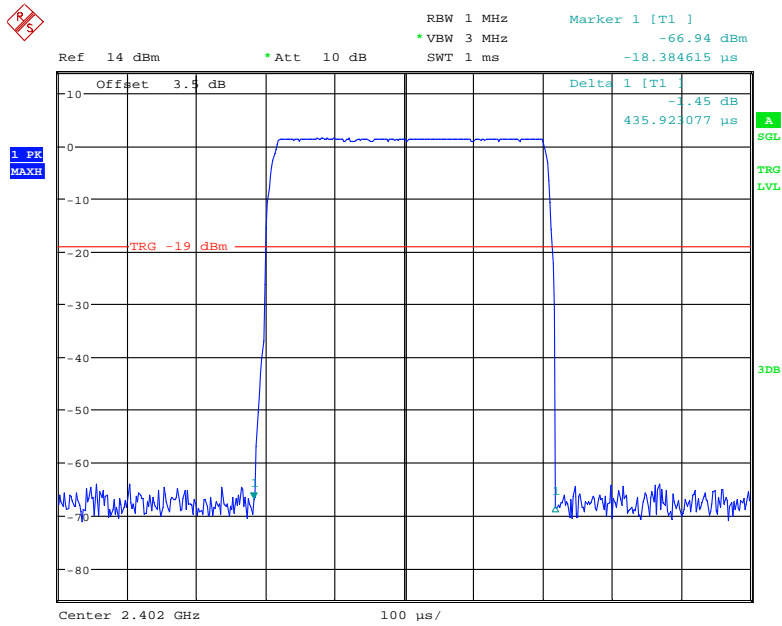


Date: 2.DEC.2017 13:58:19

Pulse time, Middle Channel, DH1

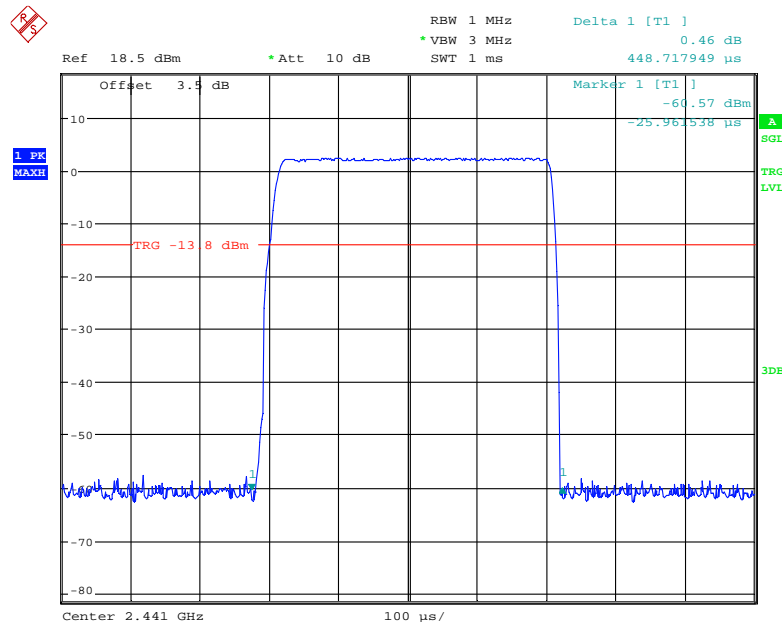


Date: 7.DEC.2017 09:55:49

Pulse time, High Channel, DH1

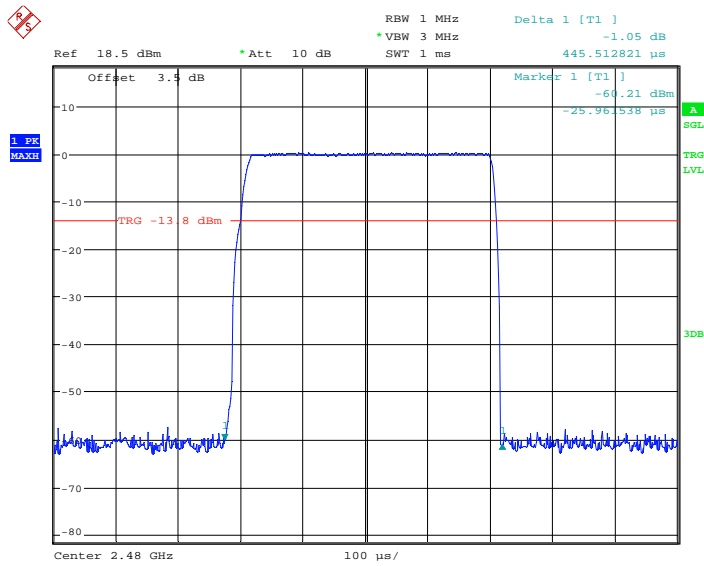


Date: 7.DEC.2017 09:55:15

Pulse time, Low Channel, DH3

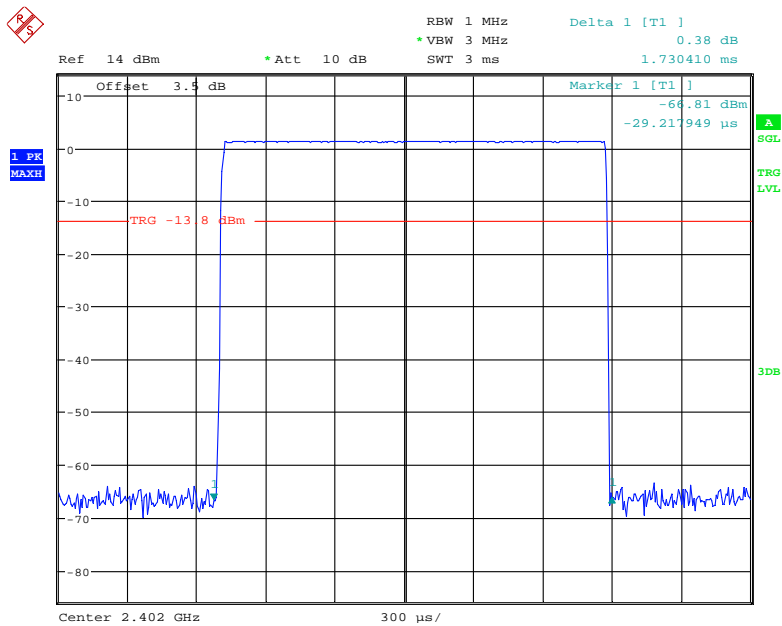


Date: 2.DEC.2017 14:02:51

Pulse time, Middle Channel, DH3

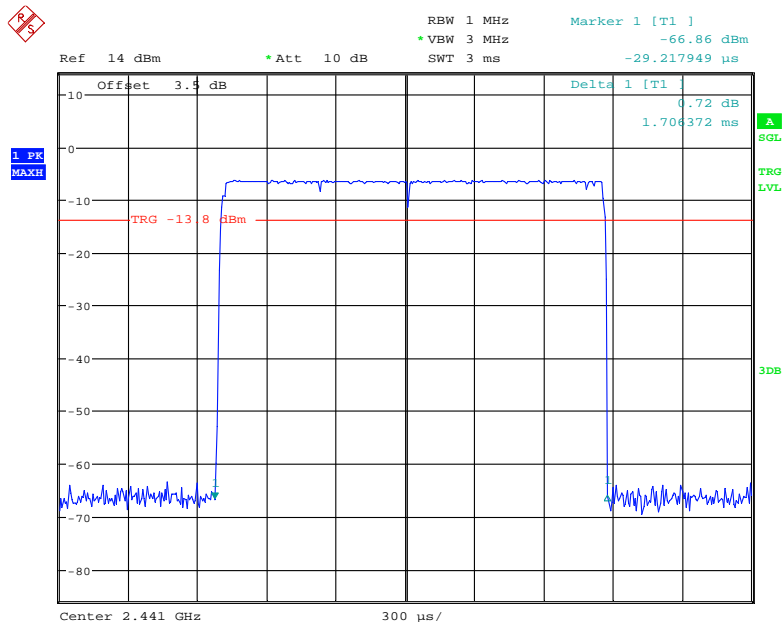


Date: 2.DEC.2017 14:02:18

Pulse time, High Channel, DH3

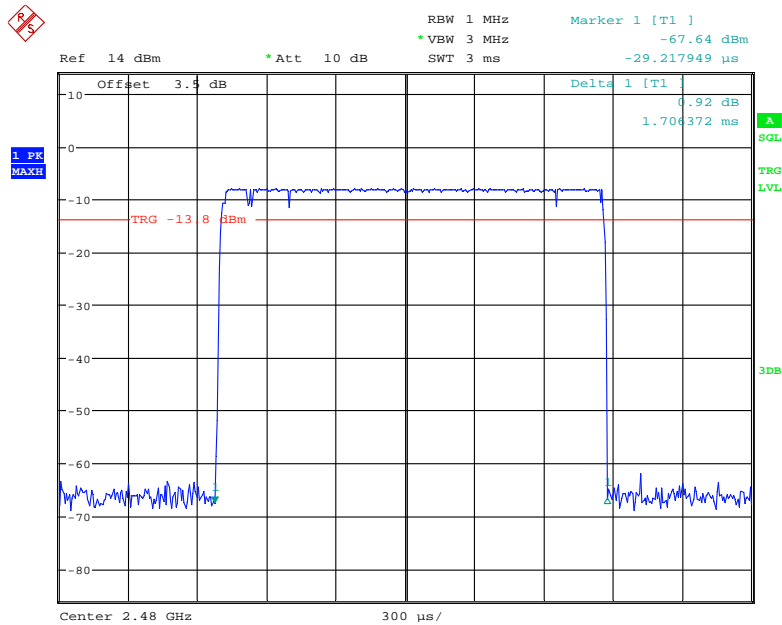


Date: 2.DEC.2017 14:01:49

Pulse time, Low Channel, DH5

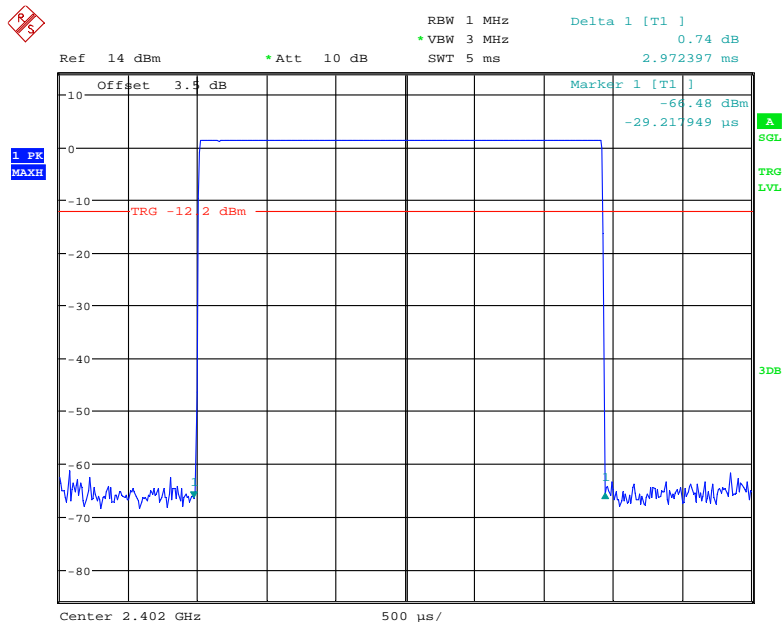


Date: 2.DEC.2017 14:09:33

Pulse time, Middle Channel, DH5

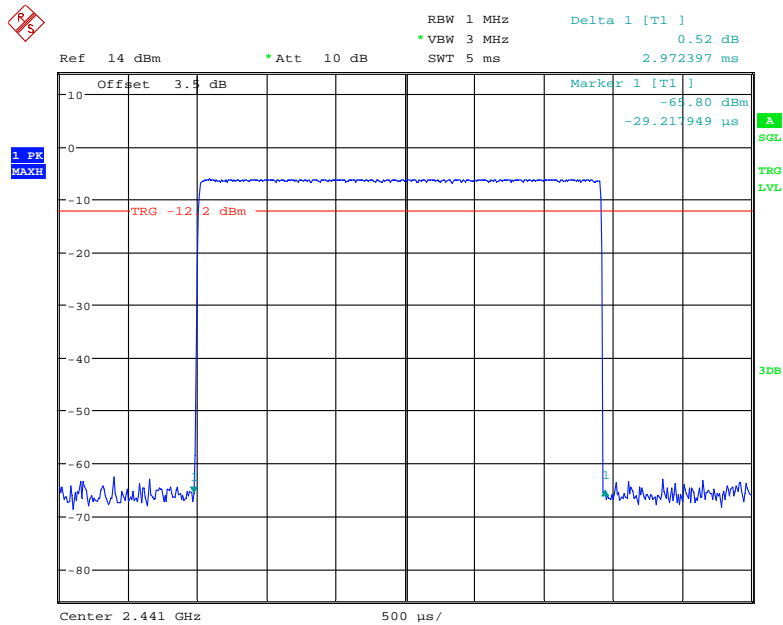


Date: 2.DEC.2017 14:10:03

Pulse time, High Channel, DH5

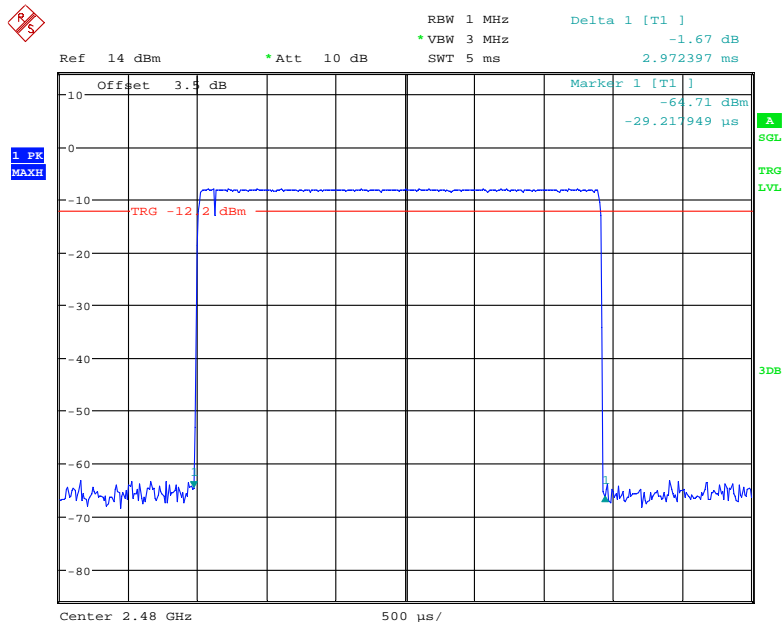


Date: 2.DEC.2017 14:10:17

**EDR ($\pi/4$ -DQPSK):
Pulse time, Low Channel, 2DH1**

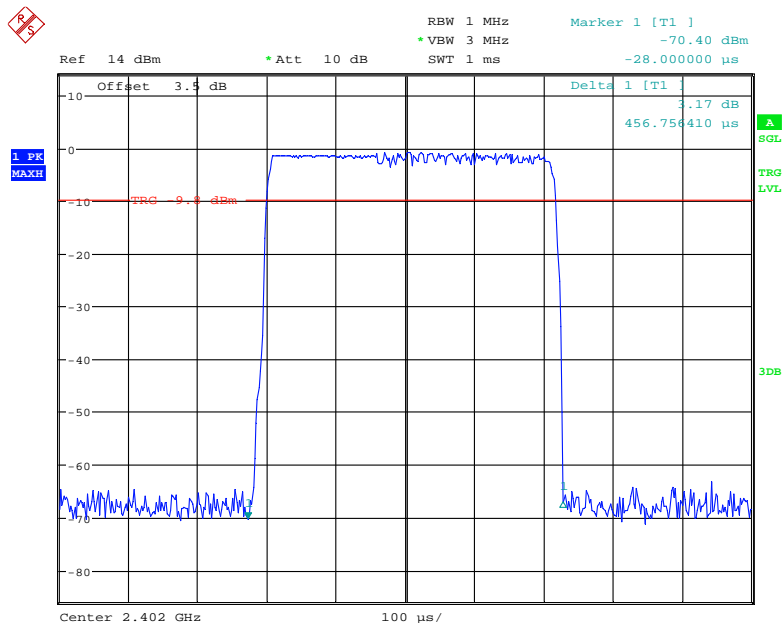


Date: 2.DEC.2017 13:53:48

Pulse time, Middle Channel, 2DH1

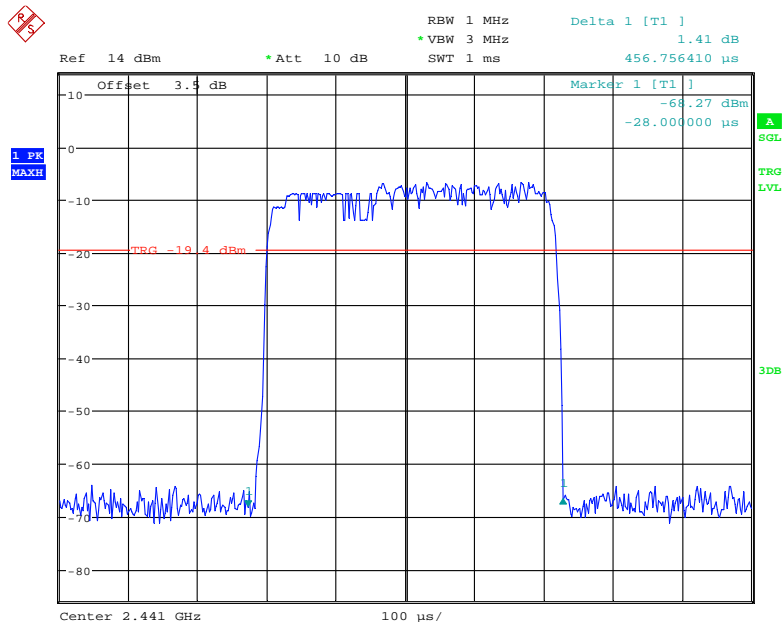


Date: 2.DEC.2017 13:54:50

Pulse time, High Channel, 2DH1

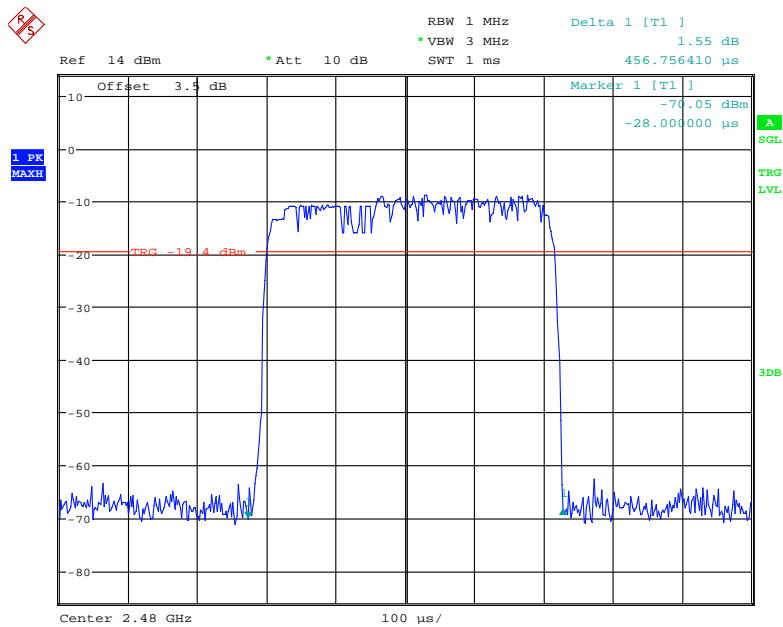


Date: 2.DEC.2017 13:55:12

Pulse time, Low Channel, 2DH3

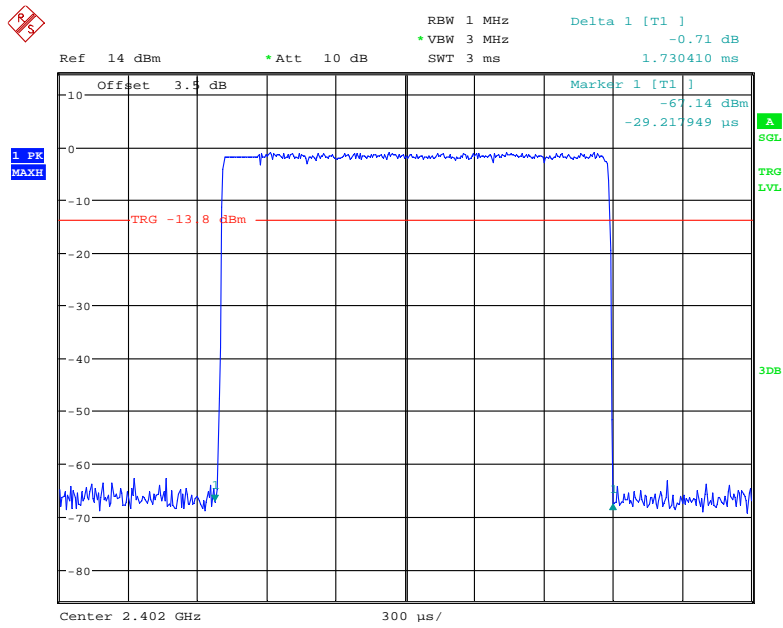


Date: 2.DEC.2017 14:05:09

Pulse time, Middle Channel, 2DH3

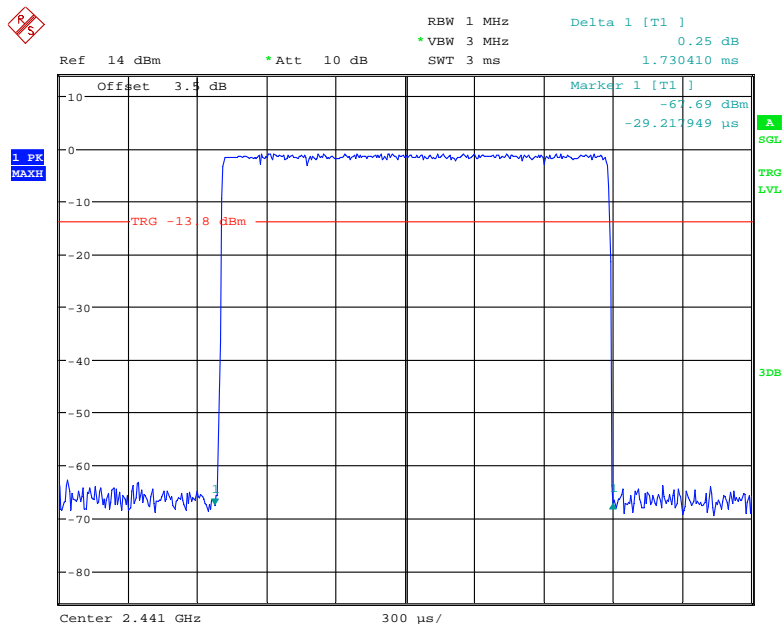


Date: 2.DEC.2017 14:06:03

Pulse time, High Channel, 2DH3

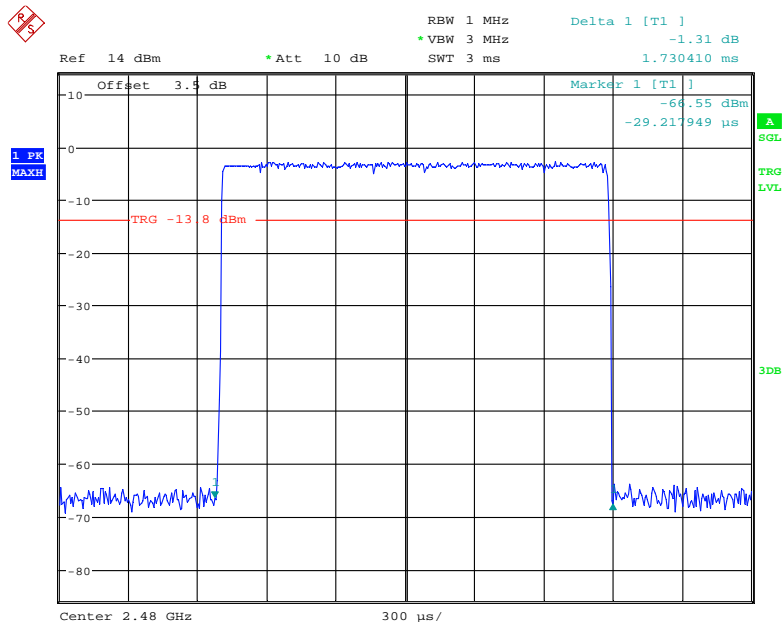


Date: 2.DEC.2017 14:06:21

Pulse time, Low Channel, 2DH5

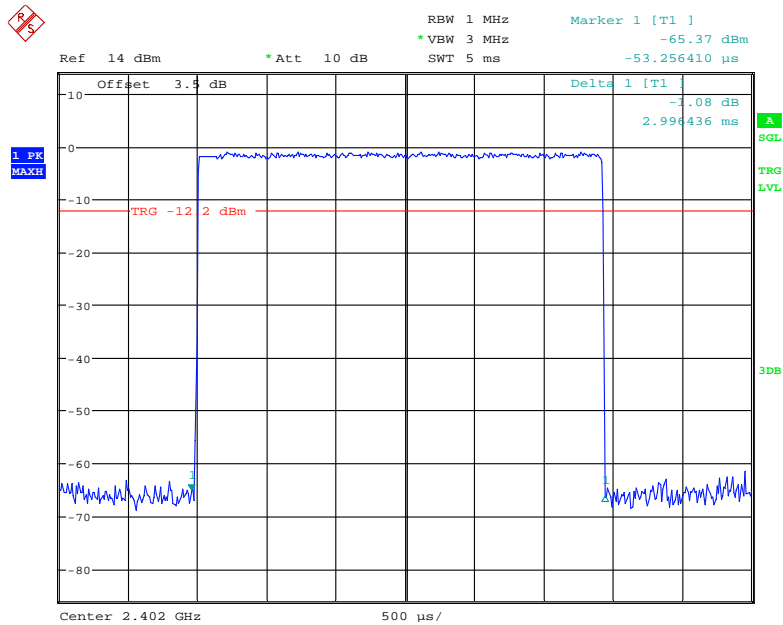


Date: 2.DEC.2017 14:11:45

Pulse time, Middle Channel, 2DH5

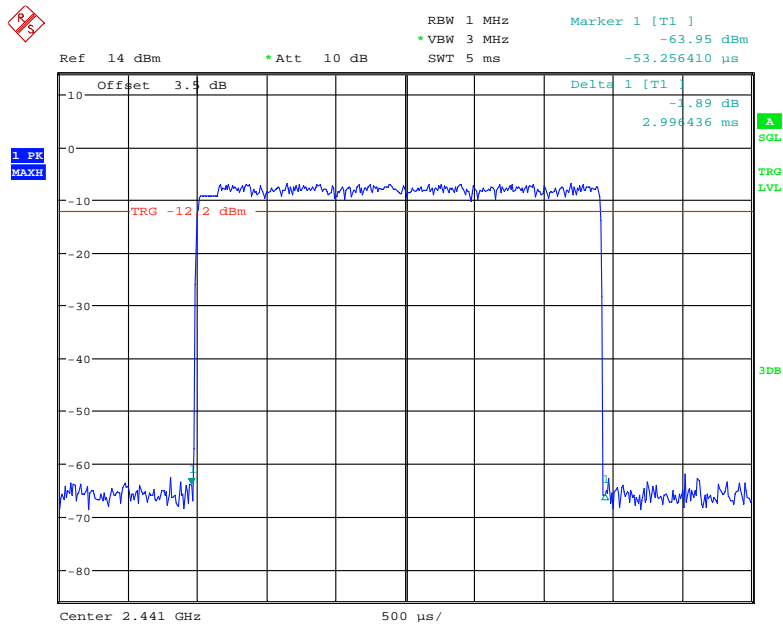


Date: 2.DEC.2017 14:11:29

Pulse time, High Channel, 2DH5

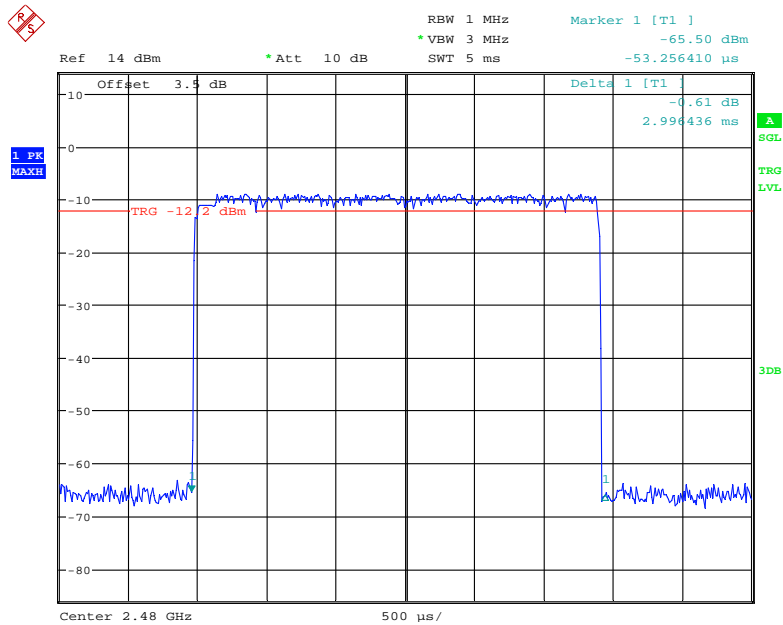


Date: 2.DEC.2017 14:11:02

EDR (8DPSK): Pulse time, Low Channel, 3DH1

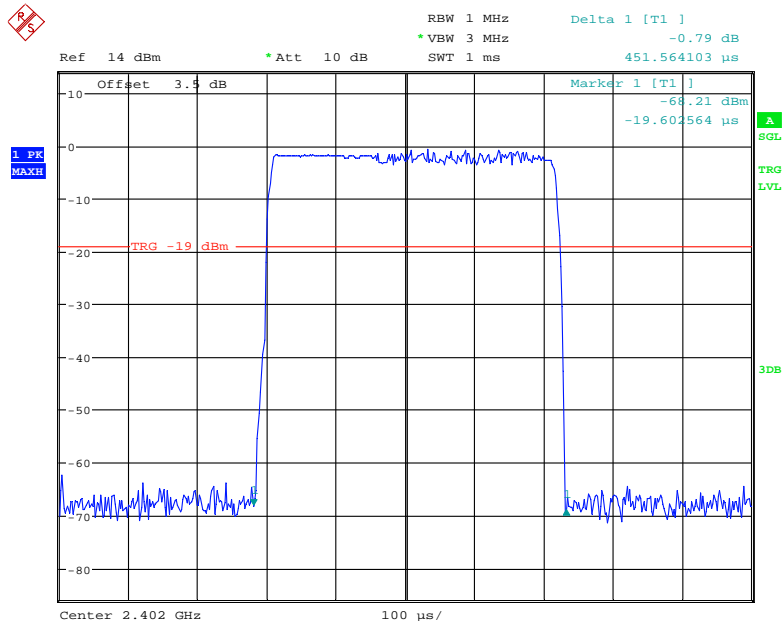


Date: 2,DEC.2017 13:59:24

Pulse time, Middle Channel, 3DH1

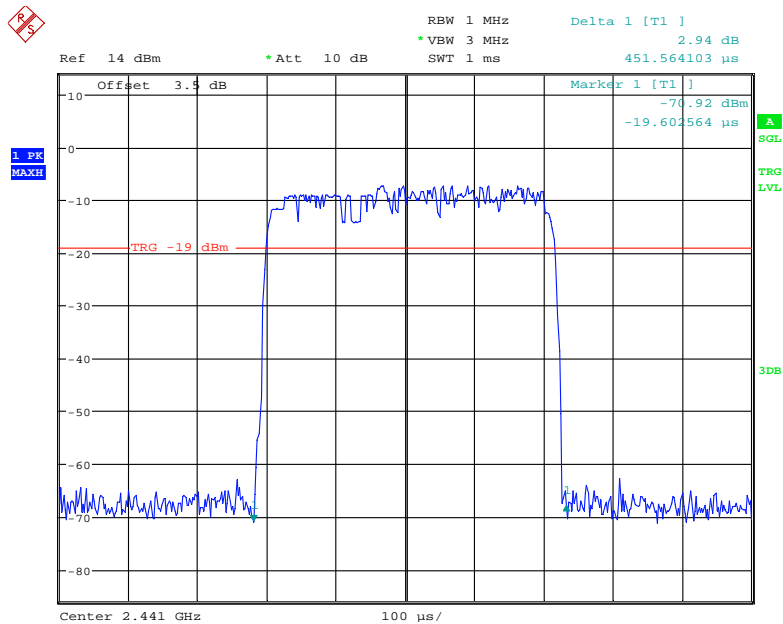


Date: 2,DEC.2017 13:59:48

Pulse time, High Channel, 3DH1

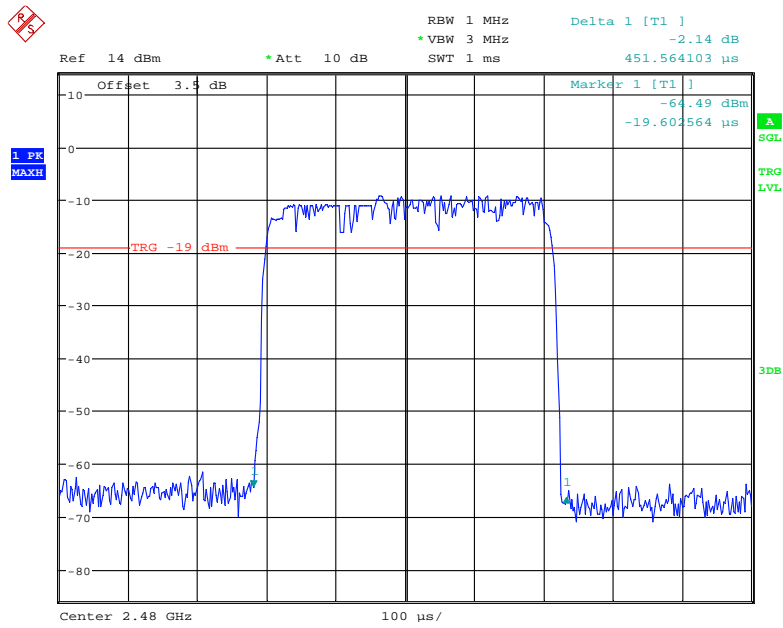


Date: 2.DEC.2017 14:00:13

Pulse time, Low Channel, 3DH3

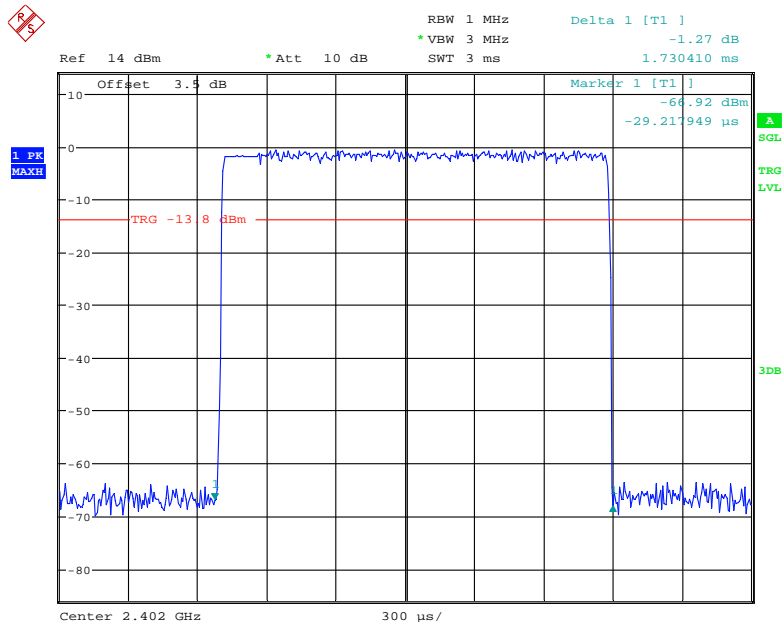


Date: 2.DEC.2017 14:08:06

Pulse time, Middle Channel, 3DH3

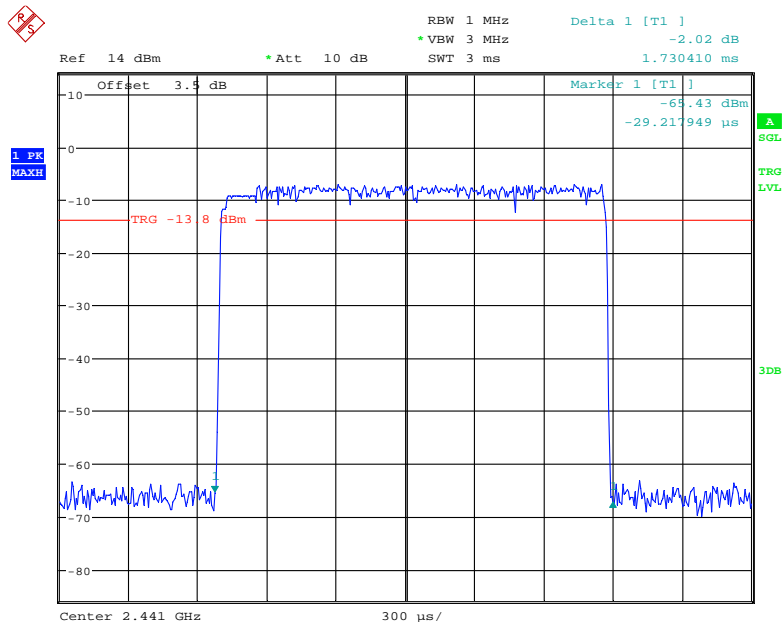


Date: 2.DEC.2017 14:07:53

Pulse time, High Channel, 3DH3

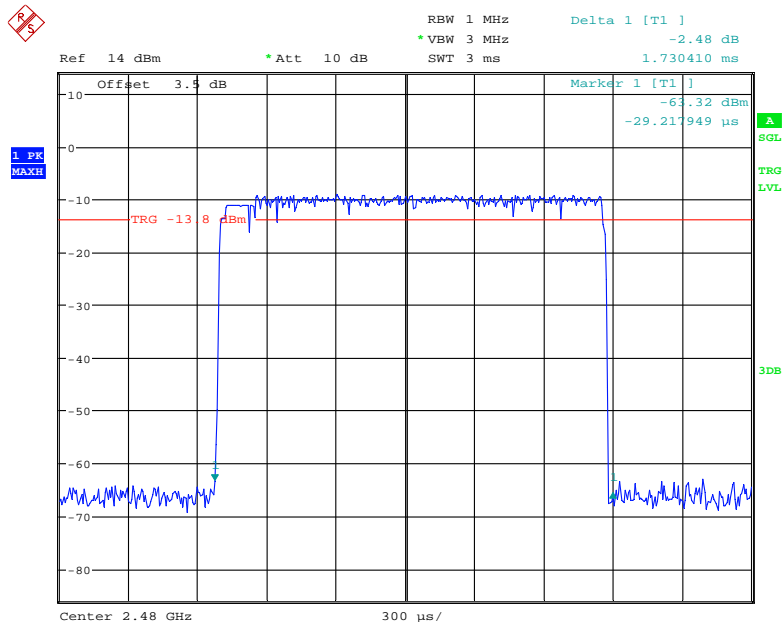


Date: 2.DEC.2017 14:07:34

Pulse time, Low Channel, 3DH5

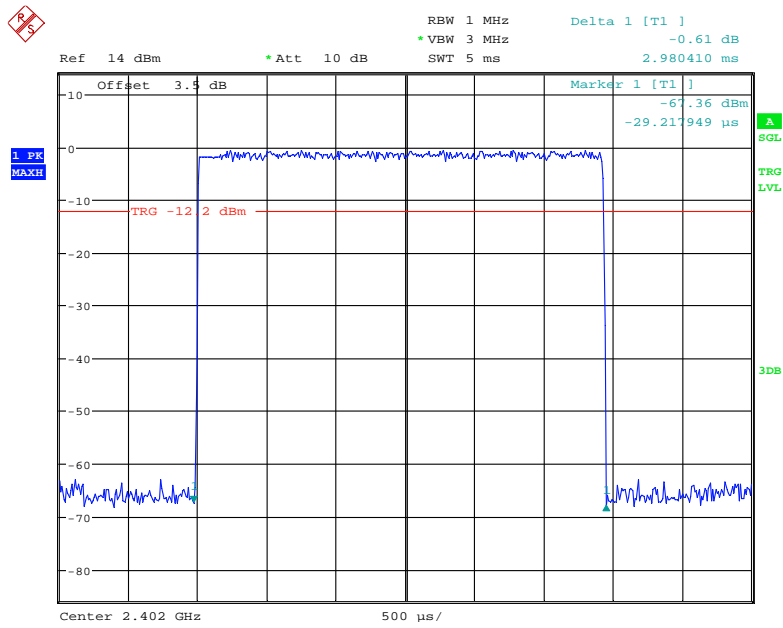


Date: 2.DEC.2017 14:12:35

Pulse time, Middle Channel, 3DH5

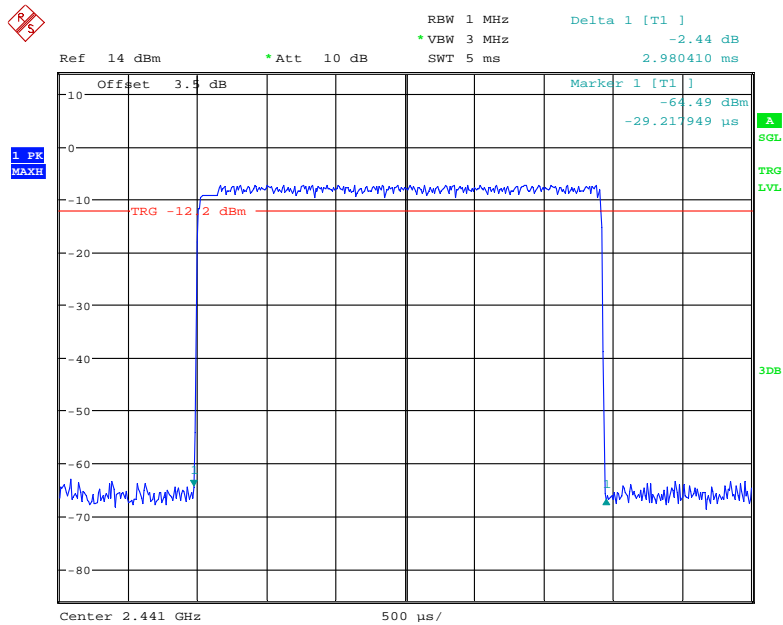

Date: 2.DEC.2017 14:12:54

Pulse time, High Channel, 3DH5

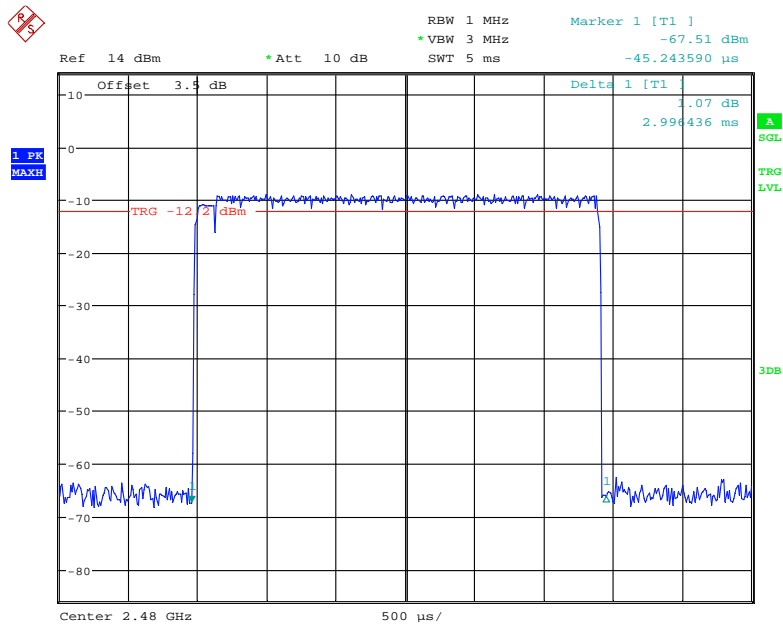

Date: 2,DEC,2017 14:13:24

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2017-12-02.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	2.32	1.706	1000
	Middle	2441	2.13	1.633	1000
	High	2480	0.30	1.072	1000
EDR ($\pi/4$-DQPSK)	Low	2402	2.01	1.589	1000
	Middle	2441	1.91	1.552	1000
	High	2480	0.22	1.052	1000
EDR (8DPSK)	Low	2402	1.99	1.581	1000
	Middle	2441	1.95	1.567	1000
	High	2480	0.23	1.054	1000

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2017-12-02.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.

BDR (GFSK): Band Edge-Left Side

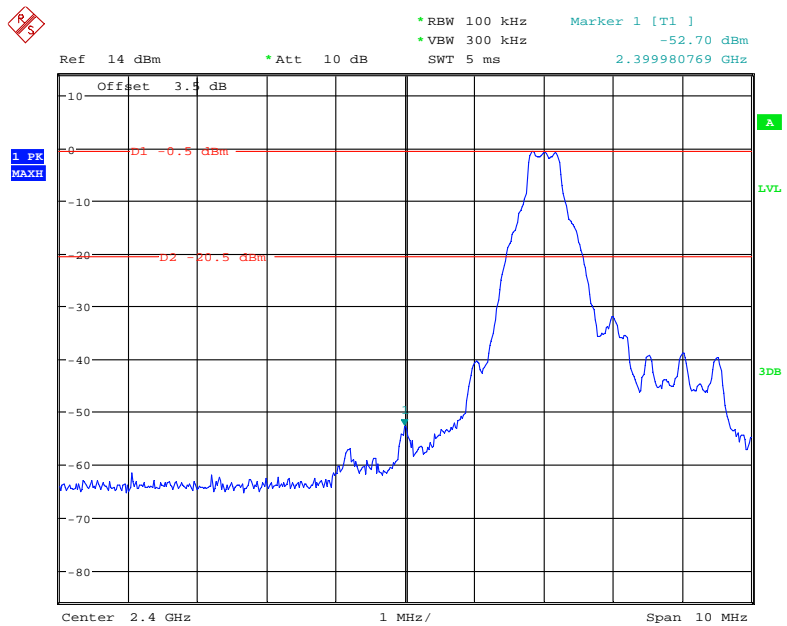


Date: 2.DEC.2017 11:53:03

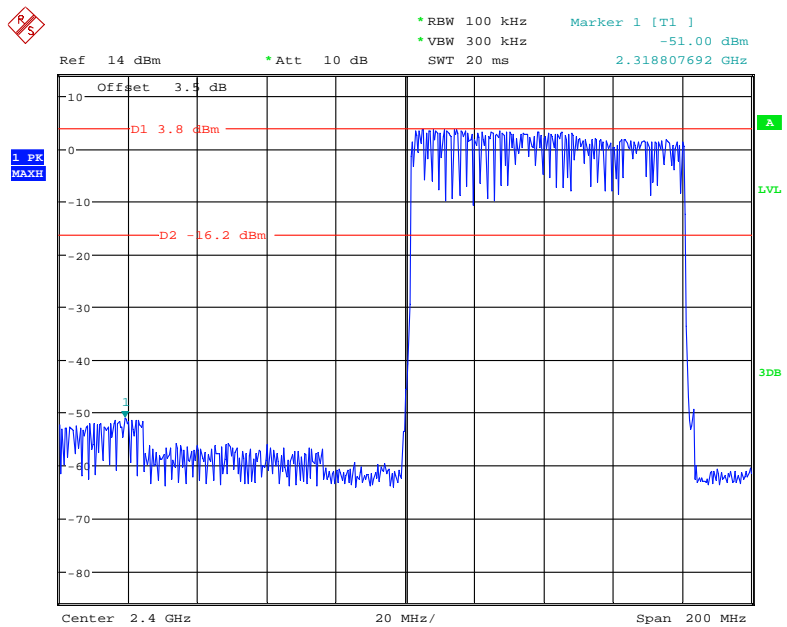


Date: 2.DEC.2017 11:57:12

BDR (GFSK): Band Edge-Right Side

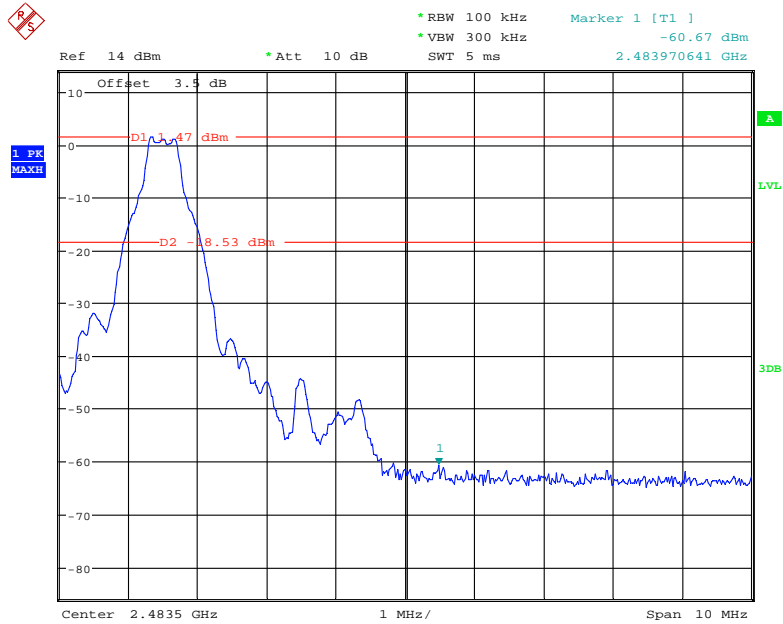


Date: 2.DEC.2017 11:53:53

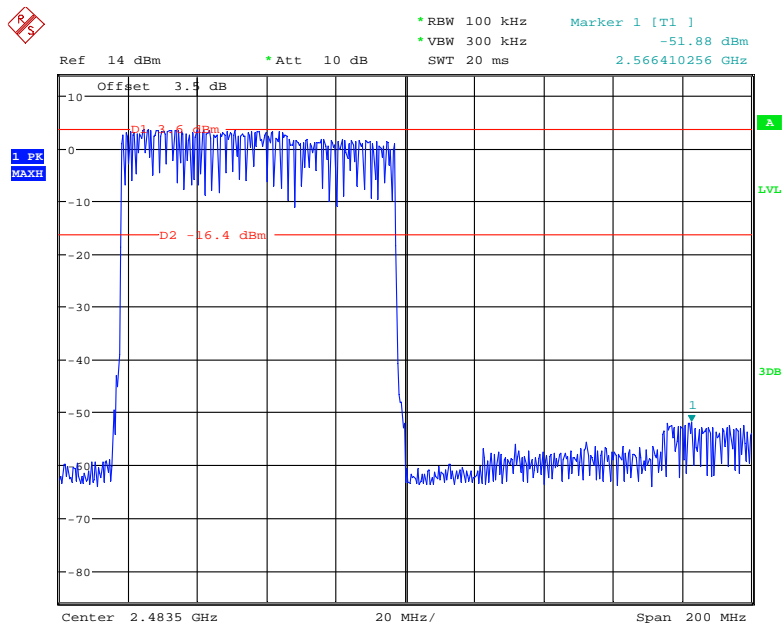


Date: 2.DEC.2017 11:55:41

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

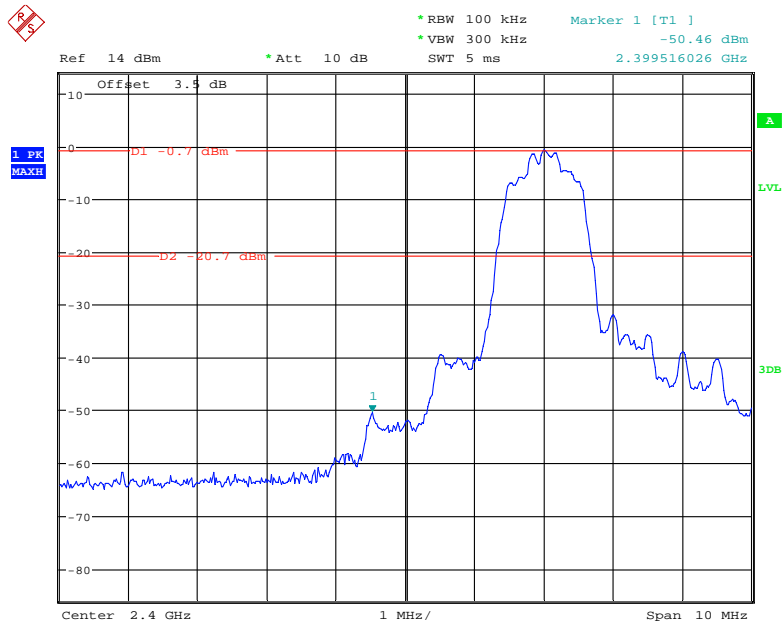


Date: 2.DEC.2017 11:51:43

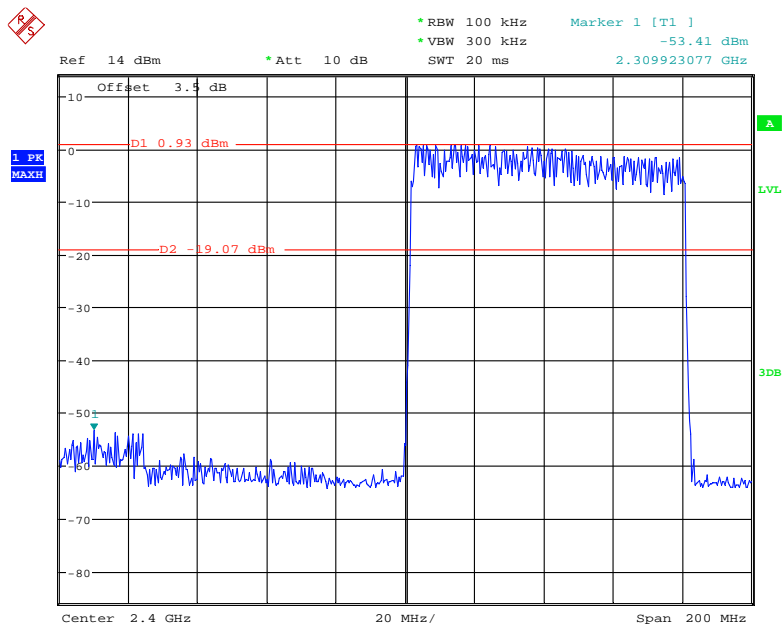


Date: 2.DEC.2017 11:48:16

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

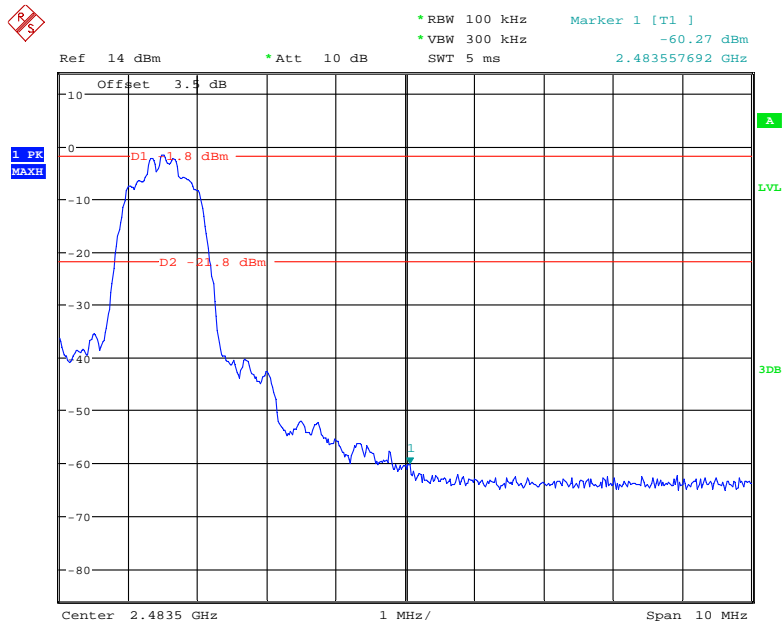


Date: 2.DEC.2017 11:50:45

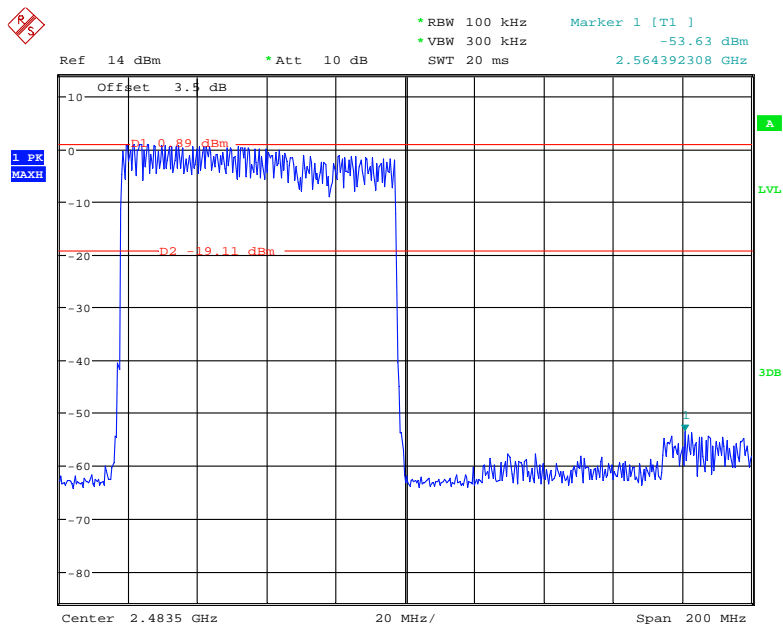


Date: 2.DEC.2017 11:49:47

EDR (8DPSK): Band Edge-Left Side

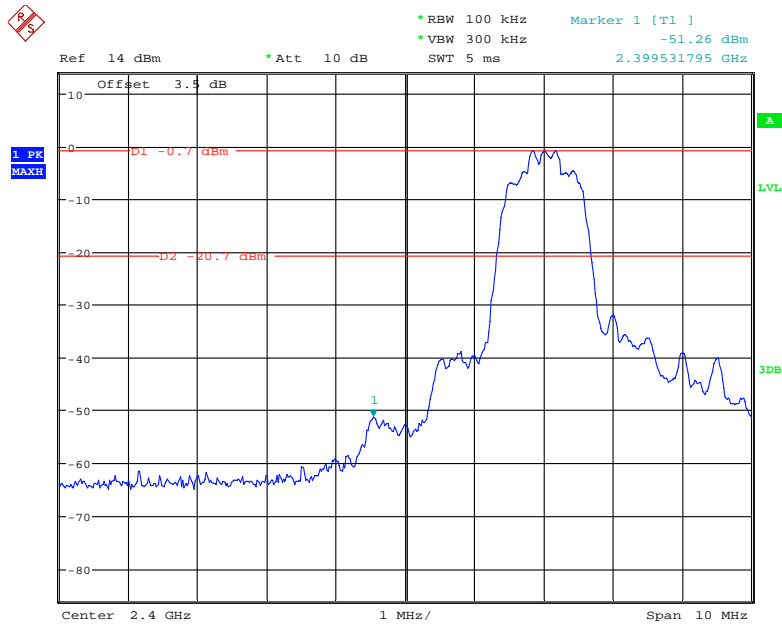


Date: 2.DEC.2017 11:40:58

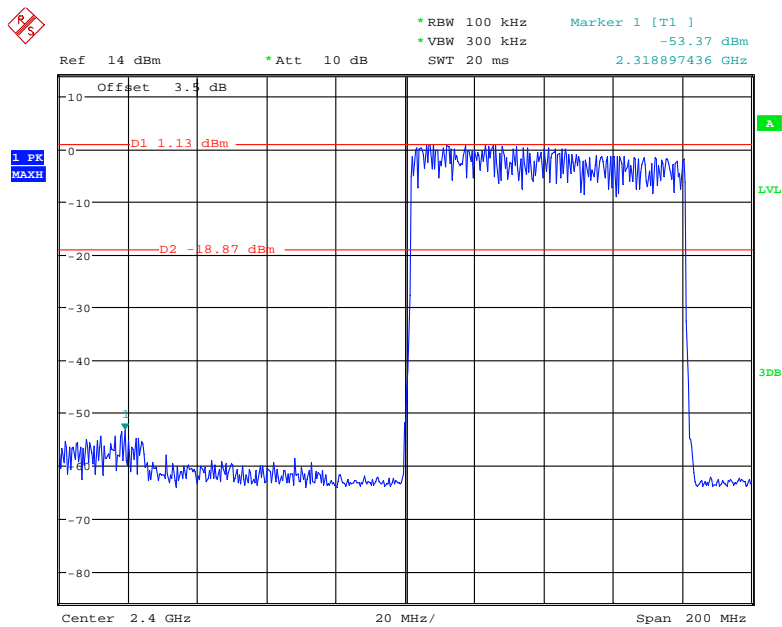


Date: 2.DEC.2017 11:46:40

EDR (8DPSK): Band Edge-Right Side

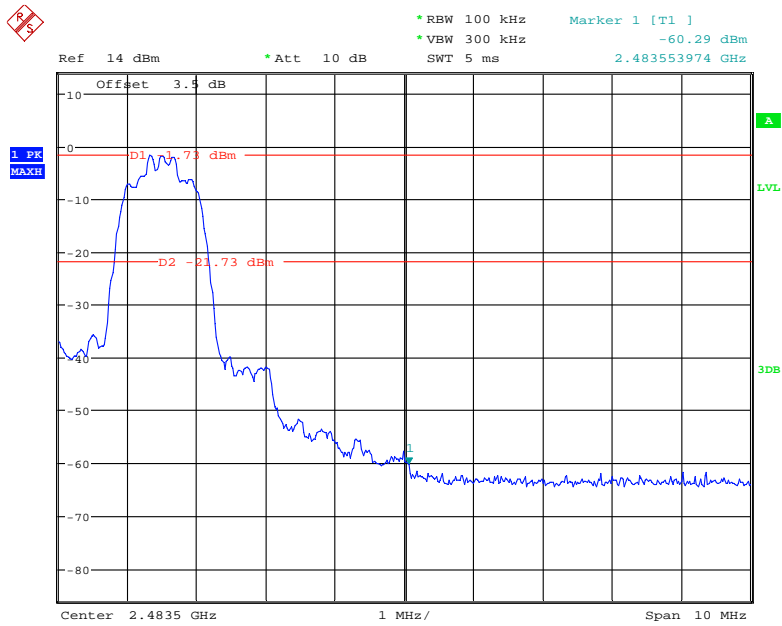

Date: 2.DEC.2017 11:42:12

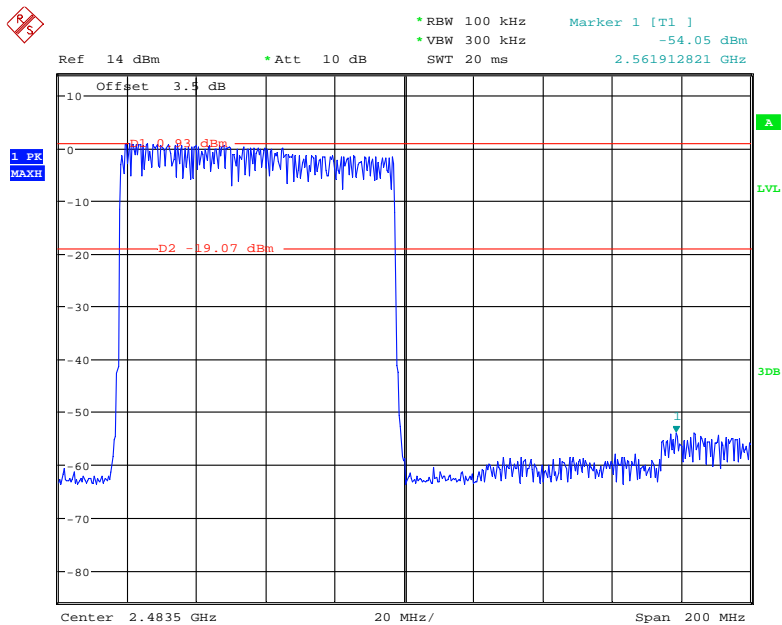

Date: 2.DEC.2017 11:45:28

***** END OF REPORT *****