

TEST REPORT

of

FCC Part 15 Subpart C AND CANADA RSS-210

New Application; Class I PC; Class II PC

Full Modular Approval

Product : 4moms Bluetooth module

Brand: N/A

Model: 4004036

Model Difference: N/A

FCC ID: WTW4004036

IC: 12085A-4004036

FCC Rule Part: §15.247, Cat: DTS

IC Rule Part: RSS-210 issue 8:2010, Annex 8

Applicant: Thorley Industries, LLC

Address: 40 24th Street, 2nd Floor, Pittsburgh,
Pennsylvania, United States

Test Performed by:

<Lung-Tan LAB>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-14LR172FC

Issue Date : 2014/07/16

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.



VERIFICATION OF COMPLIANCE

Applicant: Thorley Industries, LLC
Product Description: 4moms Bluetooth module
Brand Name: N/A
Model No.: 4004036
Model Difference: N/A
FCC ID: WTW4004036
IC: 12085A-4004036
Date of test: 2014/07/04 ~ 2014/07/15
Date of EUT Received: 2014/07/04

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:



Date:

2014/07/16

Dion Chang / Engineer

Prepared By:



Date:

2014/07/16

Eva Kao / Technical Supervisor

Approved By:



Date:

2014/07/16

Vincent Su / Technical Manager

Version

Version No.	Date	Description
00	2014/07/16	Initial creation of document

Table of Contents

1	GENERAL INFORMATION	6
1.1	Related Submittal(s) / Grant (s)	7
1.2	Test Methodology	7
1.3	Test Facility	7
1.4	Special Accessories	7
1.5	Equipment Modifications	7
2	SYSTEM TEST CONFIGURATION	8
2.1	EUT Configuration	8
2.2	EUT Exercise	8
2.3	Test Procedure	8
2.4	Configuration of Tested System	9
3	SUMMARY OF TEST RESULTS	10
4	DESCRIPTION OF TEST MODES	10
5	AC POWER LINE CONDUCTED EMISSION TEST	11
5.1	Standard Applicable:	11
5.2	Measurement Equipment Used:	11
5.3	EUT Setup:	11
5.4	Measurement Procedure:	12
5.5	Measurement Result:	12
6	PEAK OUTPUT POWER MEASUREMENT	15
6.1	Standard Applicable:	15
6.2	Measurement Equipment Used:	16
6.3	Test Set-up:	16
6.4	Measurement Procedure:	16
6.5	Measurement Result:	16
7	6dB Bandwidth & 99% Bandwidth	17
7.1	Standard Applicable:	17
7.2	Measurement Equipment Used:	17
7.3	Test Set-up:	17
7.4	Measurement Procedure:	17
7.5	Measurement Result:	18
8	100KHz BANDWIDTH OF BAND EDGES MEASUREMENT	22
8.1	Standard Applicable:	22
8.2	Measurement Equipment Used:	23
8.3	Test SET-UP:	24
8.4	Measurement Procedure:	25
8.5	Field Strength Calculation:	25
8.6	Measurement Result:	25
9	SPURIOUS RADIATED EMISSION TEST	28
9.1	Standard Applicable	28
9.2	Measurement Equipment Used	28
9.3	Test SET-UP:	28
9.4	Measurement Procedure:	29
9.5	Field Strength Calculation	29
9.6	Measurement Result:	29

10	Peak Power Spectral Density	39
10.1	Standard Applicable:	39
10.2	Measurement Equipment Used:	39
10.3	Test Set-up:	39
10.4	Measurement Procedure:	39
10.5	Measurement Result:	40
11	ANTENNA REQUIREMENT	43
11.1	Standard Applicable:	43
11.2	Antenna Connected Construction:	43
12	RF EXPOSURE	44
12.1	Standard Applicable	44
12.2	Measurement Result:	45

1 GENERAL INFORMATION

General:

Product Name:	4moms Bluetooth module
Brand Name:	N/A
Model Name:	4004036
Model Difference:	N/A
Power Supply:	3.3Vdc

Bluetooth:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V4.0
Channel number:	40 channels, 2MHz step
Modulation type:	GFSK
Transmit Power:	-5.69 dBm Peak
tune-up tolerance:	+/- 2 dB
Dwell Time:	N/A
Antenna Designation:	Fixed Printed Antenna, 5.3 dBi
Type of Emission:	1M56FXD

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: WTW4004036** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and **IC: 12085A-4004036** filing to comply with Industry Canada RSS-210 issue 8: 2010 Annex 8.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). and RSS-Gen: 2010. Radiated testing was performed at an antenna to EUT distance 3 meters. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document:

558074 D01 DTS Meas Guidance v03r02

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd., Lung-Tan Hsiang, Tao Yuan County 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2009. FCC Registration Number is: TW1036, Canada Registration Number: 4067B-3.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” Is still within the 3dB illumination BW of the measurement antenna. According to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.4-2009.

2.4 Configuration of Tested System

Fig. 1 Configuration

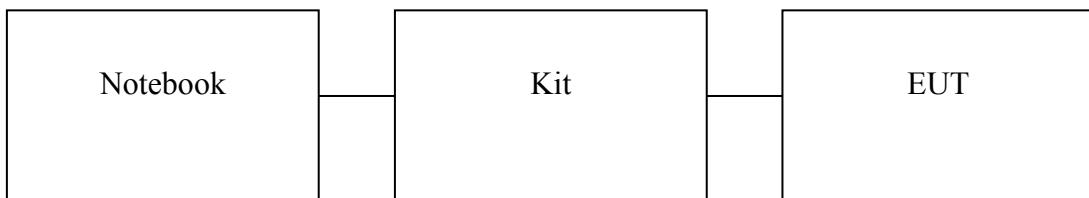


Table 1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	Notebook	Dell	V131	N/A	Shield	Non-shield
2	Kit	N/A	N/A	N/A	Shield	Non-shield

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)/ RSS-Gen §7.2.4	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4))/ RSS-210 §A8.4(4)	Peak Output Power	Compliant
§15.247(a)(2) §A8.2(a) RSS-Gen §4.6.1	6dB Bandwidth & 99% Power Bandwidth	Compliant
§15.247(d)/ RSS-210 §A8.5	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)/ RSS-210 §A8.5	Spurious Emission	Compliant
§15.247(e)/ RSS-210 §A8.2(b) & §A8.3(2)	Peak Power Density	Compliant
§15.203/ RSS-210 issue 8,§A8.4	Antenna Requirement	Compliant
§2.1091 RSS 102 Issue 4	RF EXPOSURE	Compliant

4 DESCRIPTION OF TEST MODES

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

BT LE mode: Channel low (2402MHz), mid (2440MHz) and high (2480MHz) are chosen for full testing.

5 AC POWER LINE CONDUCTED EMISSION TEST

5.1 Standard Applicable:

According to §15.207 and RSS-Gen §7.2.4, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

AC Power Line Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 04-1 Cable	WOKEN	CFD 300-NL	Conduction 04 -1	09/24/2013	09/23/2014
EMI Receiver 16	Rohde & Schwarz	ESCI	101221	05/08/2014	05/07/2015
LISN 18	ROHDE & SCHWARZ	ENV216	101424	03/13/2014	03/12/2015
LISN 19	ROHDE & SCHWARZ	ENV216	101425	03/13/2014	03/12/2015

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2009.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.


Note: Refer to next page for measurement data and plots.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation Mode	Test Date:	2014/07/14
Test By:	Lake		



Address: No.120, Lane 180, San Ho Tsuen, Hsin Ho Road, Lung-Tan Hsiang,
 Tao Yuan Conty, Taiwan R.O.C.
 Tel: 03-4071718

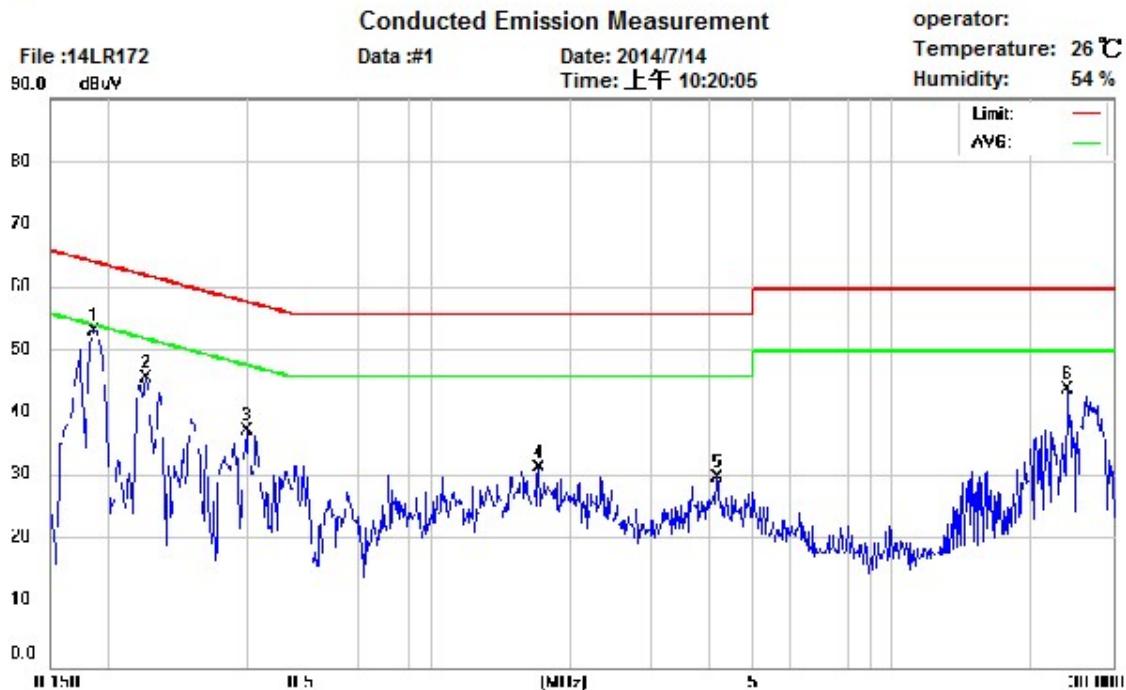

Site: Conduction 04

Phase: L1

Limit: Conduction

Power:

Company:

Witness:

EUT Model:


Execute Program:

Note:

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.186	9.59	49.12	64.21	-15.09	34.81	54.21	-19.40	
2	0.242	9.58	42.61	62.03	-19.42	32.61	52.03	-19.42	
3	0.398	9.59	32.13	57.90	-25.77	22.23	47.90	-25.67	
4	1.710	9.62	25.15	56.00	-30.85	19.17	46.00	-26.83	
5	4.174	9.64	21.37	56.00	-34.63	13.35	46.00	-32.65	
6	23.998	9.97	43.13	60.00	-16.87	27.82	50.00	-22.18	



Address: No.120, Lane 180, San Ho Tsuen, Hsin Ho Road, Lung-Tan Hsiang,
 Tao Yuan Conty, Taiwan R.O.C.
 Tel: 03-4071718

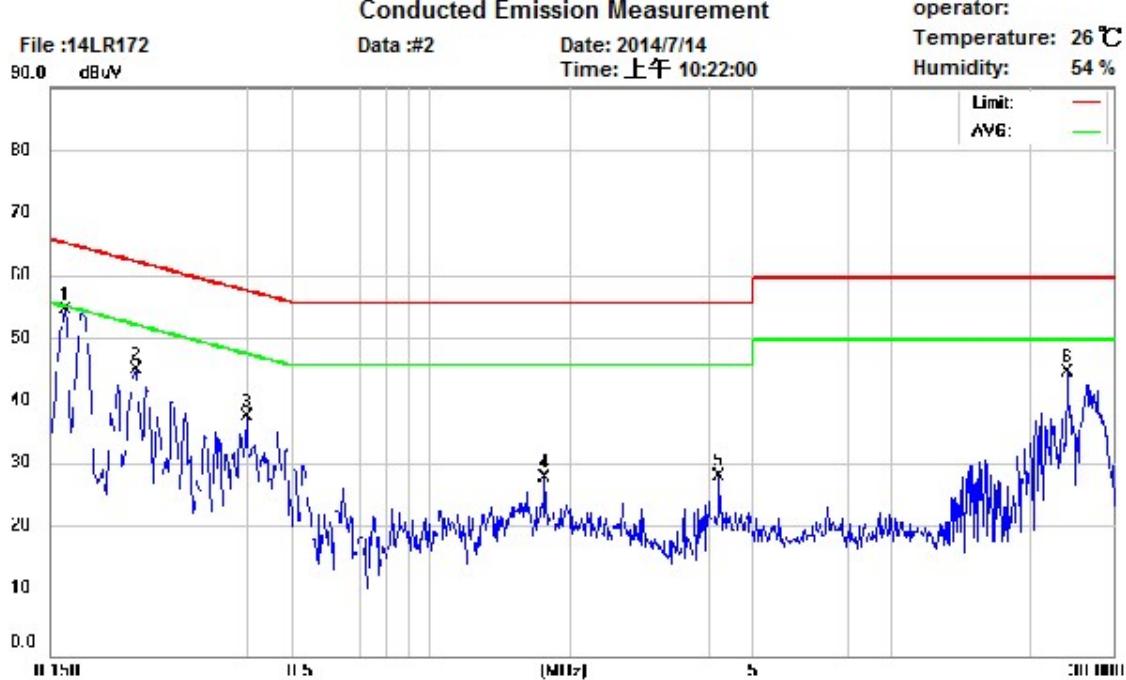

Site: Conduction 04

Phase: *N*

Limit: Conduction

Power:

Company:

Witness:

EUT Model:

Execute Program:

Note:

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.162	9.60	53.66	65.36	-11.70	38.46	55.36	-16.90	
2	0.230	9.60	43.68	62.45	-18.77	29.33	52.45	-23.12	
3	0.398	9.60	31.85	57.90	-26.05	19.92	47.90	-27.98	
4	1.770	9.63	18.94	56.00	-37.06	14.05	46.00	-31.95	
5	4.206	9.66	16.55	56.00	-39.45	7.59	46.00	-38.41	
6	23.998	9.99	42.97	60.00	-17.03	27.67	50.00	-22.33	

6 PEAK OUTPUT POWER MEASUREMENT

6.1 Standard Applicable:

According to §15.247(b)(3),(4)(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

According to RSS-210 issue 8,§A8.4(4), For systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

6.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter 05	Anritsu	ML2495A	1116010	05/08/2014	05/07/2015
Power Sensor 05	Anritsu	MA2411B	34NKF50	05/08/2014	05/07/2015
Temperature Chamber	KSON	THS-B4H100	2287	03/17/2014	03/16/2015
DC Power supply	ABM	51850	N/A	08/16/2013	08/15/2014
AC Power supply	EXTECH	CFC105W	NA	12/19/2013	12/18/2014
Attenuator	Woken	Watt-65m3502	11051601	NA	NA
Splitter	MCLI	PS4-199	12465	12/27/2013	12/26/2014
Spectrum analyzer	Agilent	N9030A	MY51360021	05/02/2014	05/01/2015

6.3 Test Set-up:

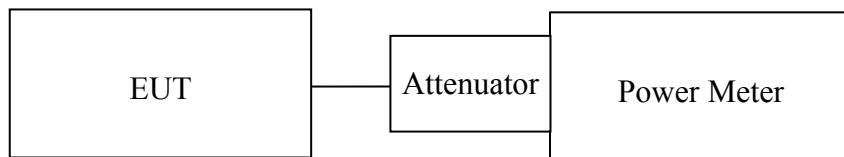

6.4 Measurement Procedure:

Refer to section 9.1.3 and 9.2.3 Peak and Average Conducted Output Power Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r02

6.5 Measurement Result:

LE Mode

Frequency (MHz)	Peak Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	-5.69	0.00	-5.69	0.00027	1
2440.00	-6.72	0.00	-6.72	0.00021	1
2480.00	-7.95	0.00	-7.95	0.00016	1

Note: offset 0.5dB for cable loss.

7 6dB Bandwidth & 99% Bandwidth

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

According to RSS 210 issue 8, §8.2(a) Systems employing digital modulation techniques (which includes direct sequence) can now be certified under RSS-210 provided they comply with the following requirements: The minimum -6 dB bandwidth shall be at least 500 kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

Refer to section 8.1 DTS bandwidth Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r02


1. Set resolution bandwidth (RBW) = 100KHz.
2. Set the video bandwidth (VBW) =300KHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

7.5 Measurement Result:

CH	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (KHZ)
2402.00	0.702	1.560	>500
2440.00	0.714	1.536	>500
2480.00	0.720	1.506	>500


Note: Refer to next page for plots.

6dB Bandwidth Test Data CH-Low

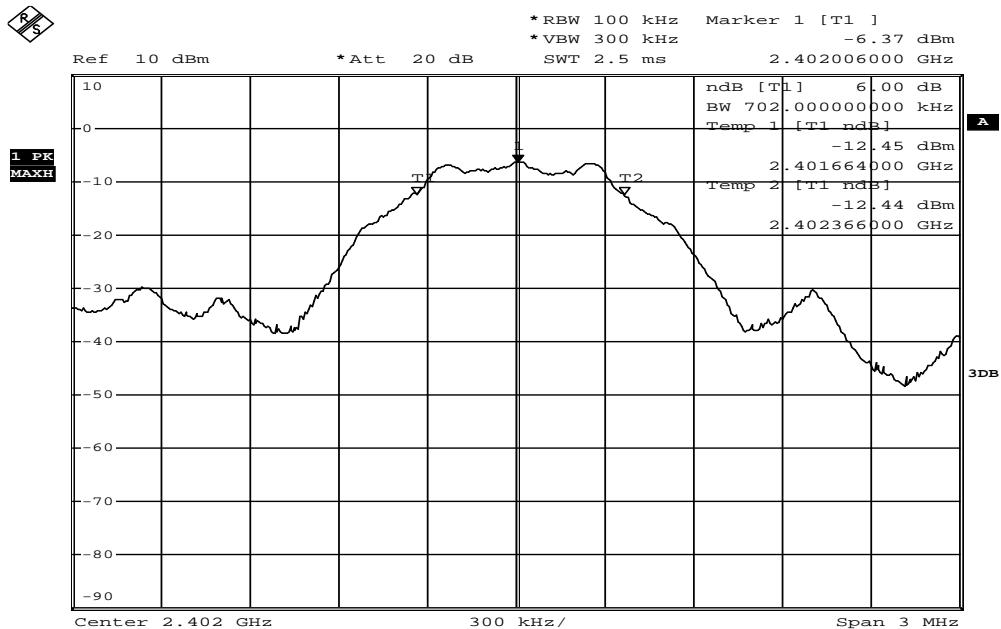


Date: 10.JUL.2014 17:45:04

6dB Bandwidth Test Data CH-Mid

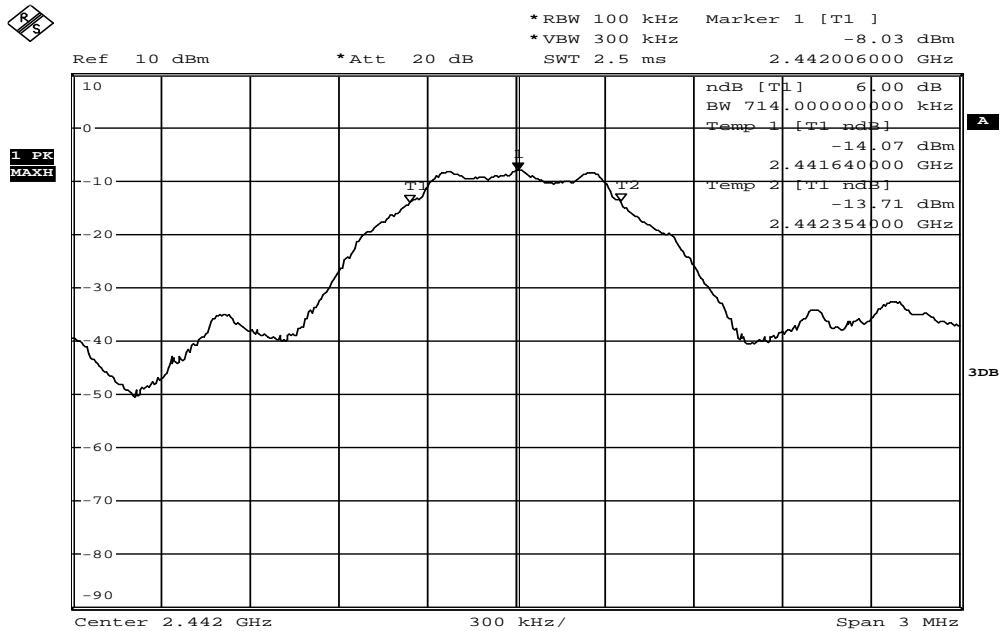


Date: 10.JUL.2014 17:45:43

6dB Bandwidth Test Data CH-High

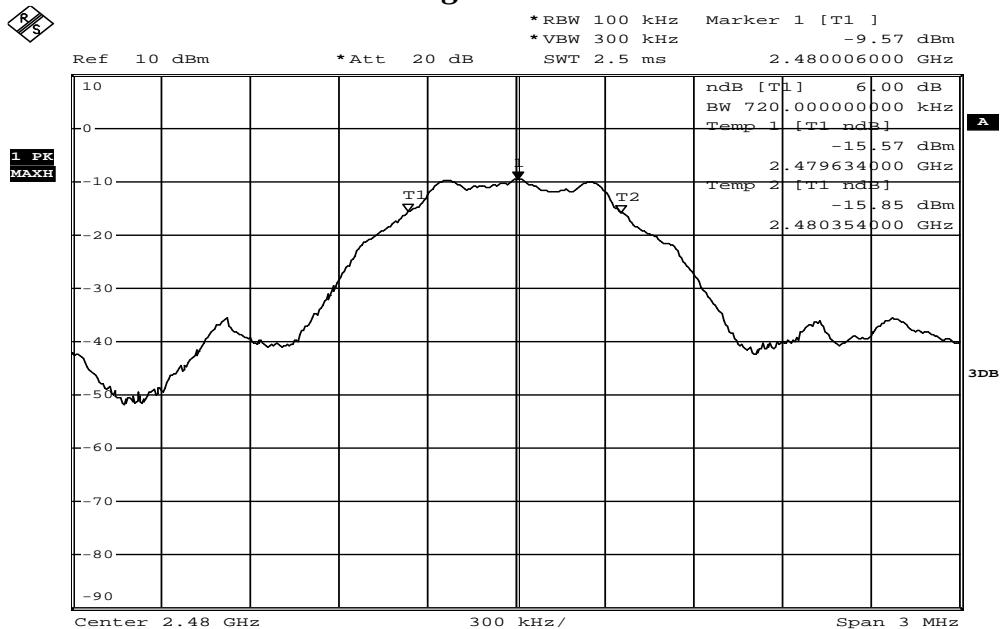


Date: 10.JUL.2014 17:46:23

99% Bandwidth Test Data CH-Low

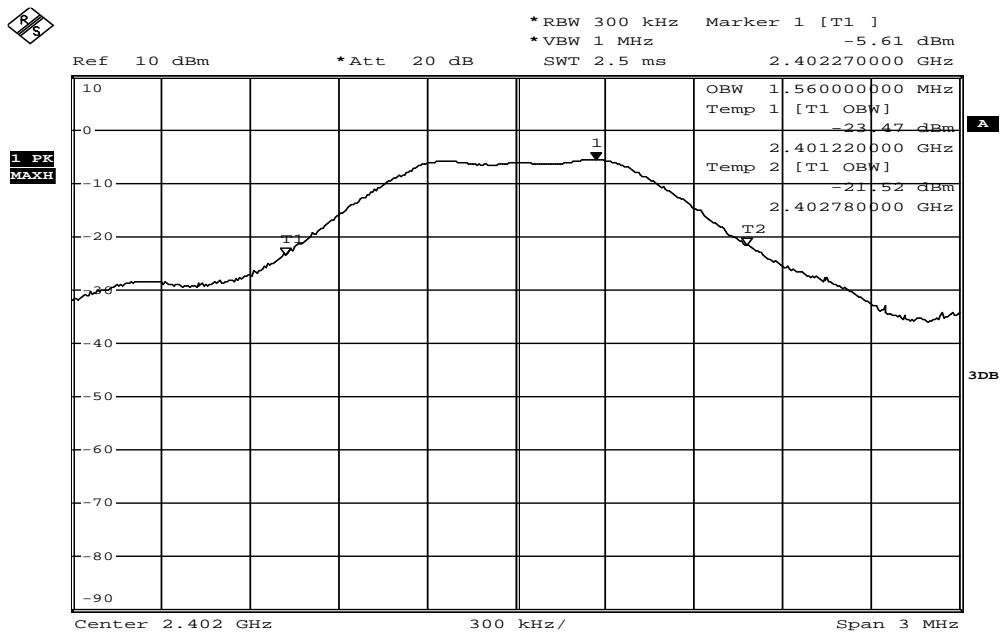


Date: 10.JUL.2014 18:21:38

99% Bandwidth Test Data CH-Mid

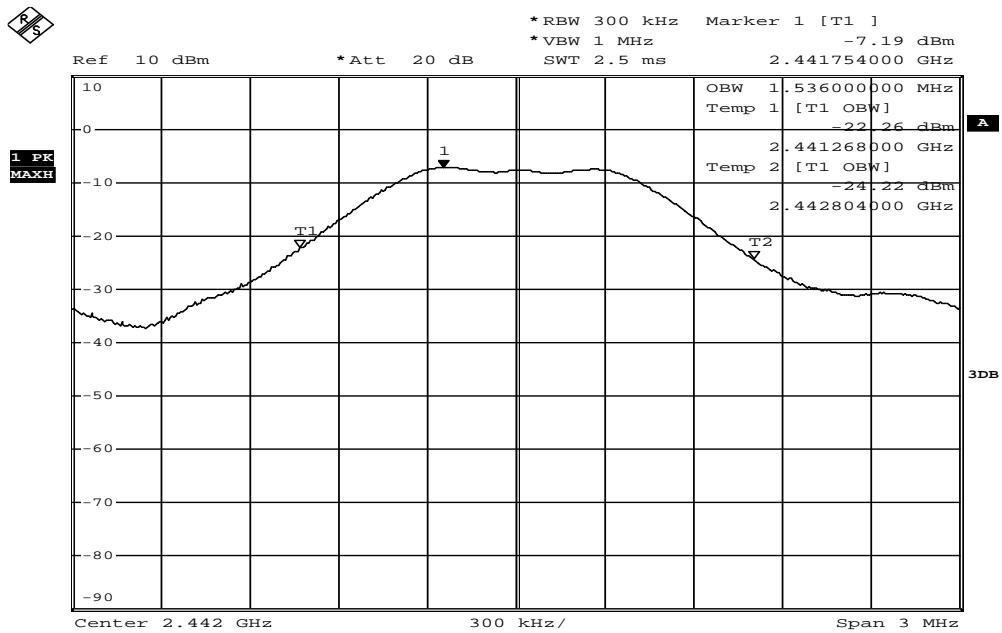

Date: 10.JUL.2014 18:20:54

99% Bandwidth Test Data CH-High

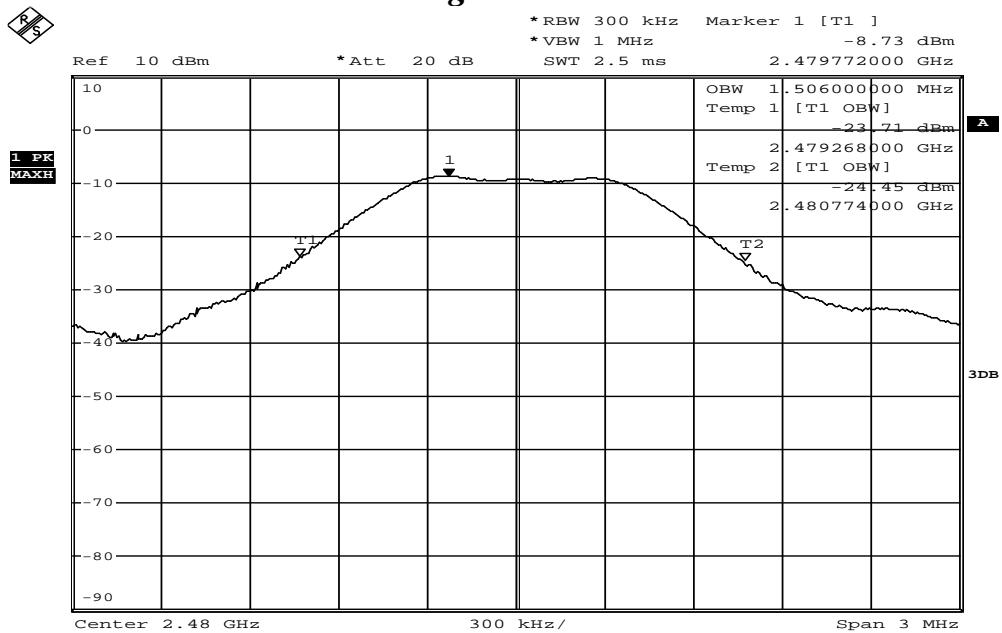

Date: 10.JUL.2014 18:22:11

8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

According to RSS-210 issue 8, §A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2 Radiated emission:

Chamber 14(966)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer 21(26.5GHz)	Agilent	N9010A	MY49060537	07/18/2013	07/17/2014
Spectrum Analyzer 20(6.5GHz)	Agilent	E4443A	MY48250315	05/26/2014	05/25/2015
Spectrum Analyzer 22(43GHz)	R&S	FSU43	100143	05/07/2014	05/06/2015
Loop Antenna9K-30M	A.H.SYSTEM	SAS-564	294	03/07/2013	03/06/2015
Bilog Antenna30-1G	Schaffner	CBL 6112B	2756	01/08/2014	01/07/2015
Horn antenna1-18G(06)	EMCO	3117	0006665	11/04/2013	11/03/2014
Horn antenna26-40G(05)	Com-power	AH-640	100A	01/09/2013	01/08/2015
Horn antenna18-26G(04)	Com-power	AH-826	081001	05/15/2013	05/14/2015
Preamplifier9-1000M	HP	8447D	NA	02/20/2014	02/19/2015
Preamplifier1-18G	MITEQ	AFS44-001018 00-25-10P-44	1329256	07/18/2013	07/17/2014
Preamplifier1-26G	EM	EM01M26G	NA	02/20/2014	02/19/2015
Preamplifier26-40G	MITEQ	JS-26004000-2 7-5A	818471	05/08/2013	05/07/2015
Cable1-18G	HUBER SUHNER	Sucoflex 106	NA	02/17/2014	02/16/2015
Cable UP to 1G	HUBER SUHNER	RG 214/U	NA	10/14/2013	10/13/2014
SUCOFLEX 1GHz~40GHz cable	HUBER SUHNER	Sucoflex 102	27963/2&3742 1/2	10/03/2013	10/02/2015
2.4G Filter	Micro-Tronics	Brm50702	76	12/27/2013	12/26/2014


8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

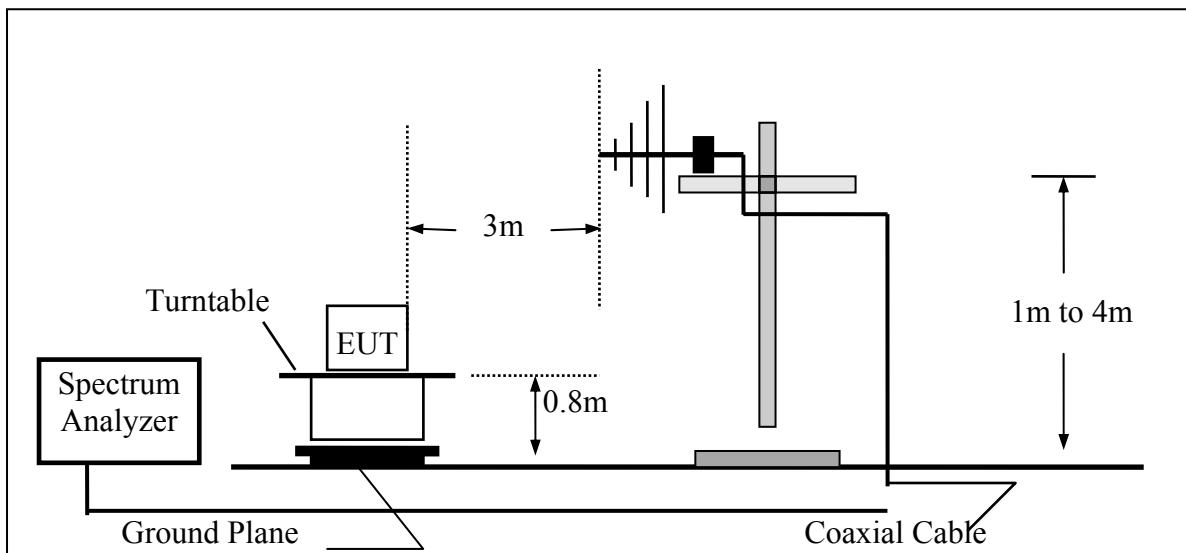

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

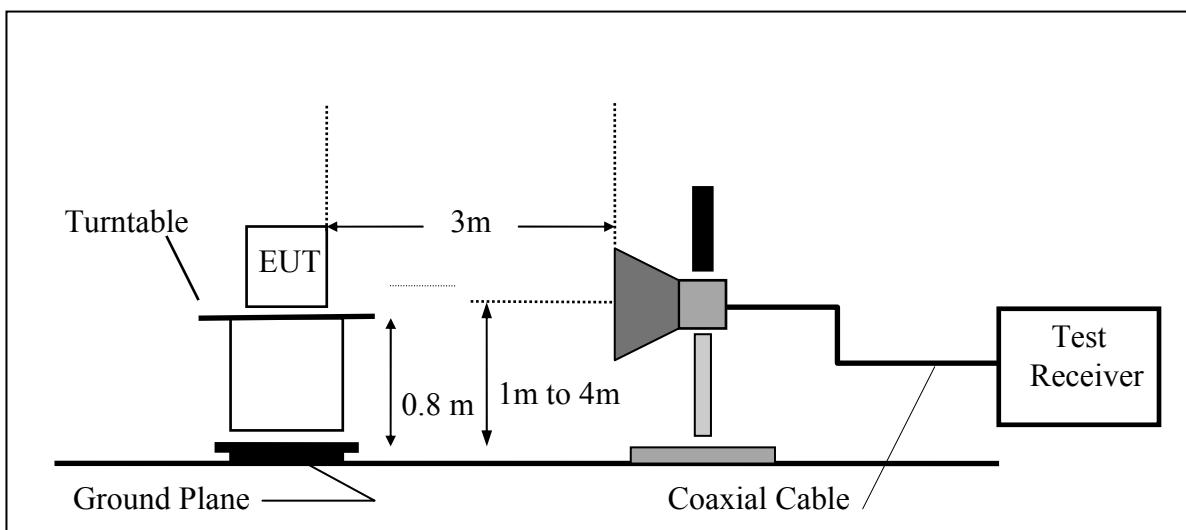

8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

Refer to section 11 and 12 emissions in restricted and non-estricted frequency bands
Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r02

The measurement of unwanted emissions at the edge of the authorized frequency bands can be complicated by the leakage of RF energy from the fundamental emission into the RBW pass band. Thus, for measurements at the band edges, a narrower resolution bandwidth (no less than 10 kHz) can be used within the first 1 MHz beyond the fundamental emission, provided that that measured energy is subsequently integrated over the appropriate reference bandwidth (i.e., 100 kHz or 1 MHz). This integration can be performed using the band power function of the spectrum analyzer or by summing the spectral levels (in linear power units) over the appropriate reference bandwidth.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Band Edges Test Data CH-Low

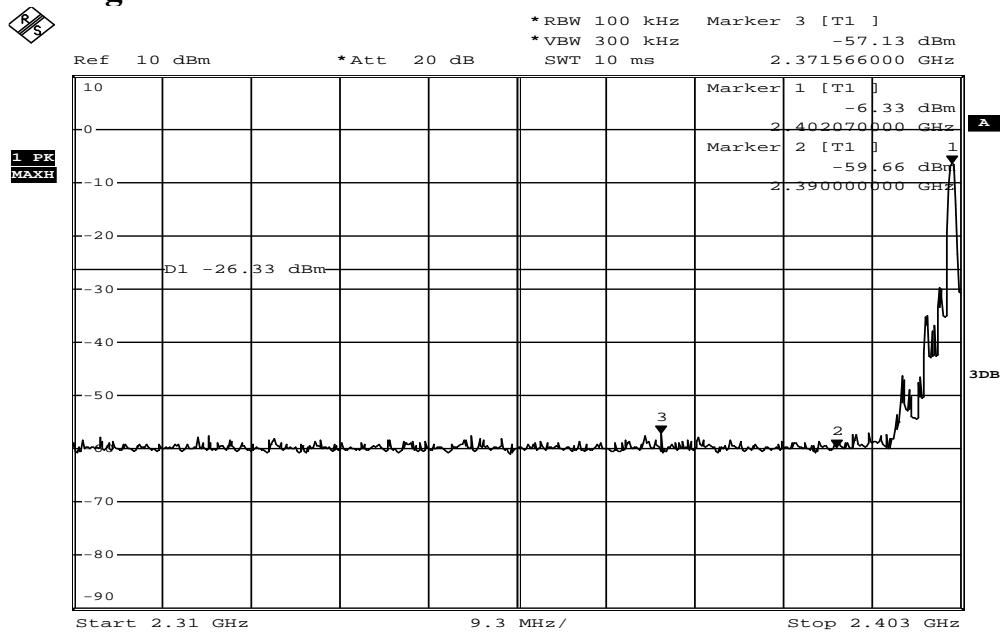

Date: 10.JUL.2014 17:43:04

Band Edges Test Data CH-High

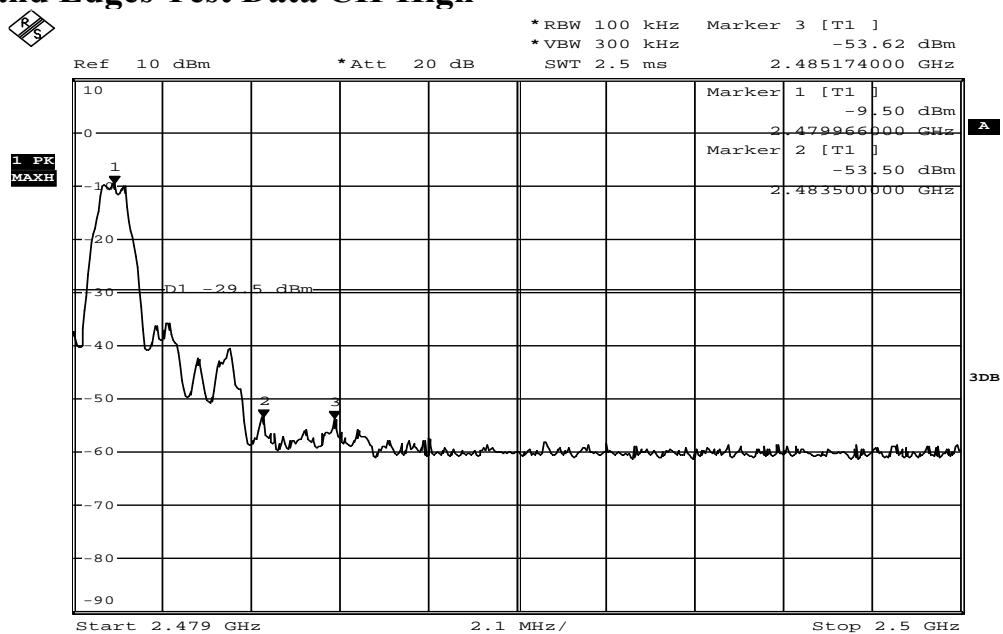

Date: 10.JUL.2014 17:41:17

Radiated Emission:

Operation Mode	TX CH Low	Test Date	2014/07/14
Fundamental Frequency	2402 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2369.28	52.45	-11.11	41.34	74.00	-32.66	Peak	VERTICAL
2	2390.00	50.30	-11.06	39.24	74.00	-34.76	Peak	VERTICAL
1	2312.00	51.64	-11.25	40.39	74.00	-33.61	Peak	HORIZONTAL
2	2390.00	49.84	-11.06	38.78	74.00	-35.22	Peak	HORIZONTAL

Operation Mode	TX CH High	Test Date	2014/07/14
Fundamental Frequency	2480 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	49.53	-10.83	38.70	74.00	-35.30	Peak	VERTICAL
2	2491.80	61.17	-10.83	50.34	74.00	-23.66	Peak	VERTICAL
1	2483.50	53.55	-10.83	42.72	74.00	-31.28	Peak	HORIZONTAL
2	2489.50	58.90	-10.83	48.07	74.00	-25.93	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-210 issue 8, §A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2 Radiated emission:

Refer to section 7.2 for details.

9.3 Test SET-UP:

9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2 Radiated emission:

Refer to section 7.3 for details.

9.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

Refer to section 11 and 12 emissions in restricted and non-estricted frequency bands Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r02

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz

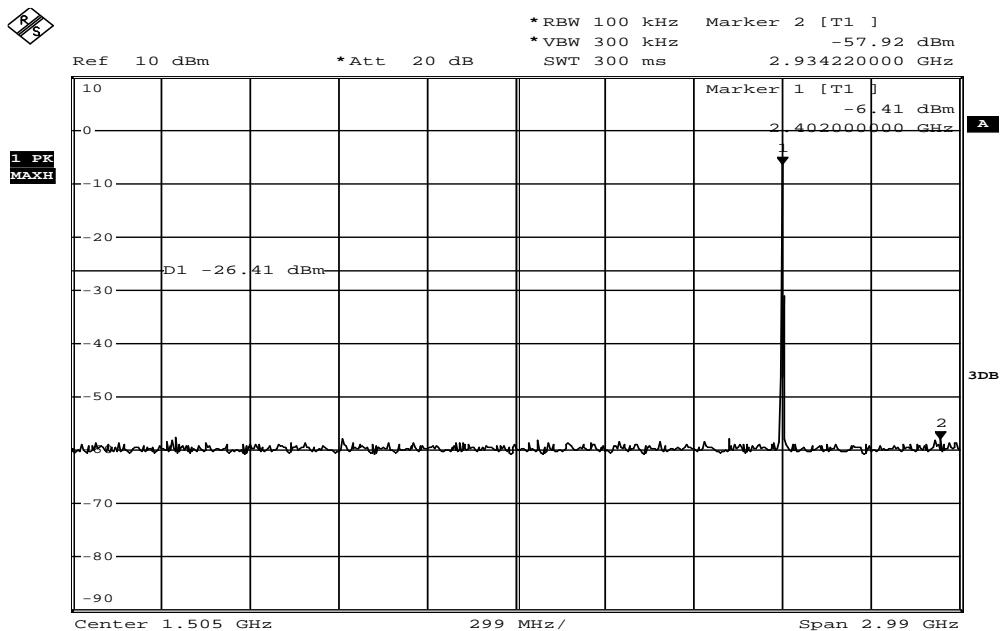


Date: 10.JUL.2014 17:35:12

Ch Low 3GHz – 26.5GHz

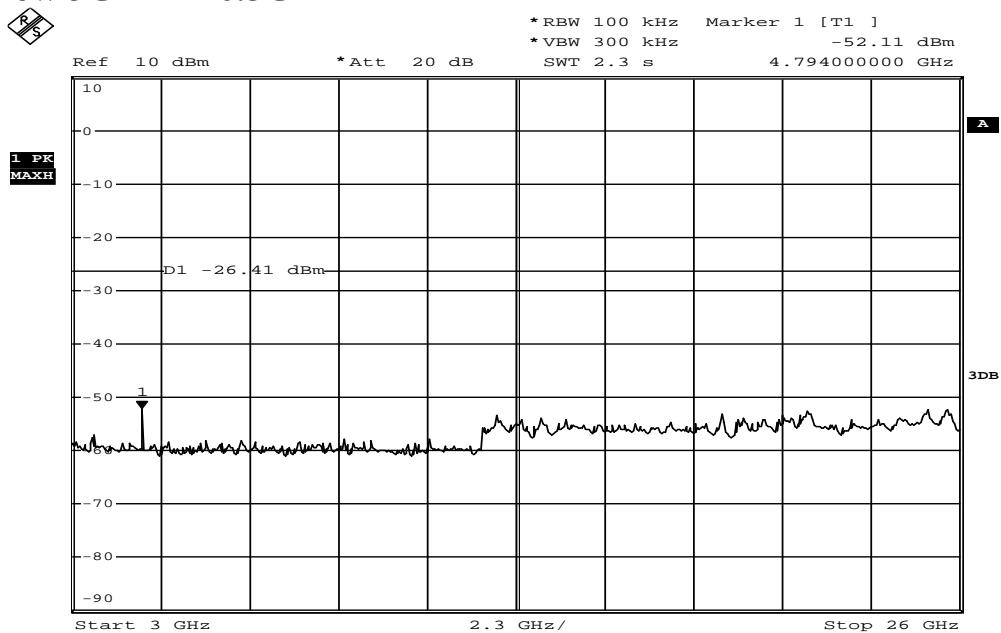


Date: 10.JUL.2014 17:36:19

Ch Mid 30MHz – 3GHz

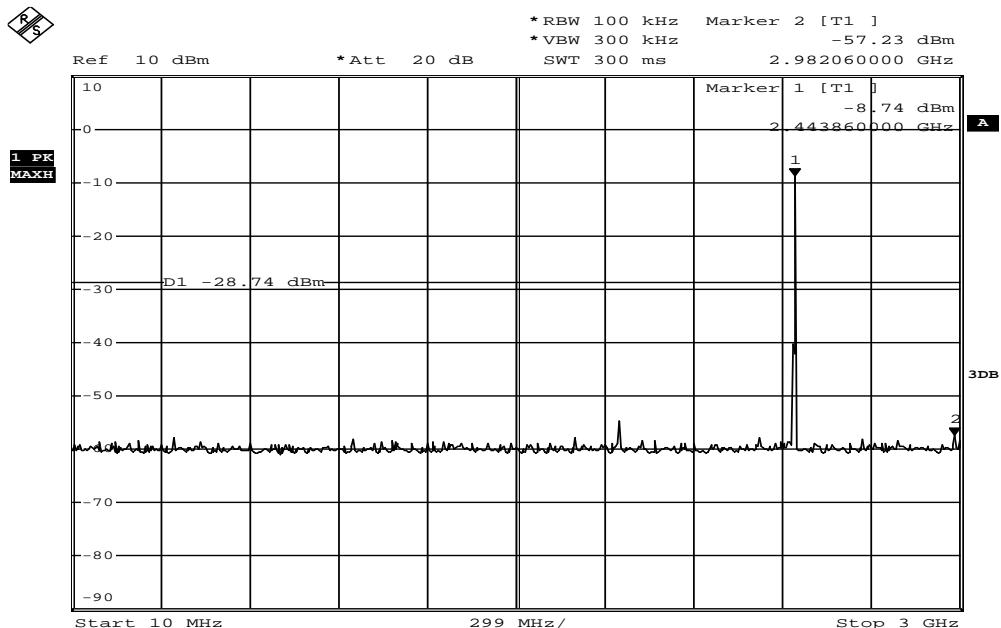


Date: 10.JUL.2014 17:37:17

Ch Mid 3GHz – 26.5GHz

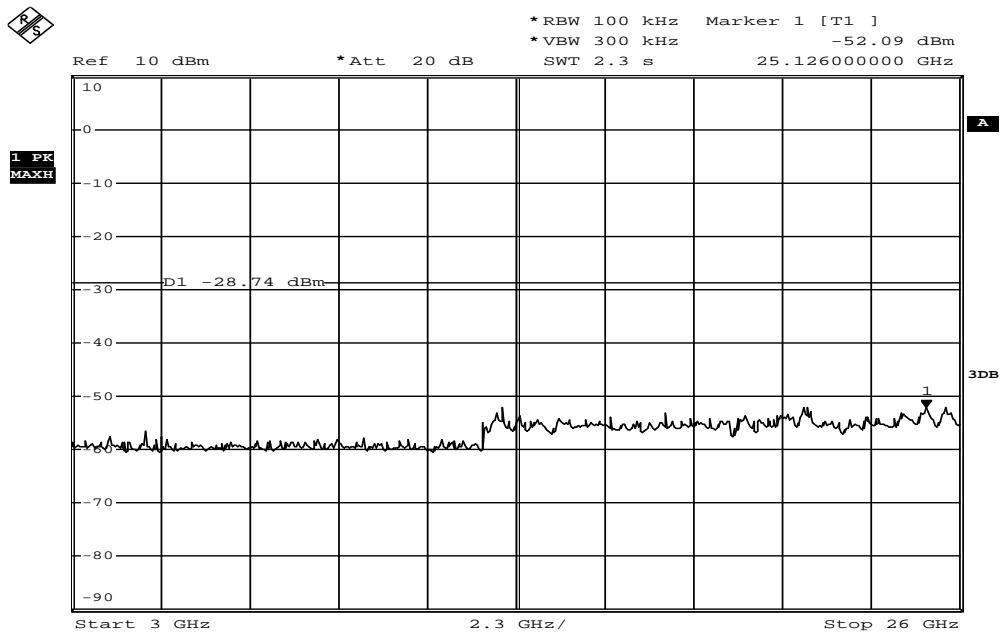


Date: 10.JUL.2014 17:37:45

Ch High 30MHz – 3GHz

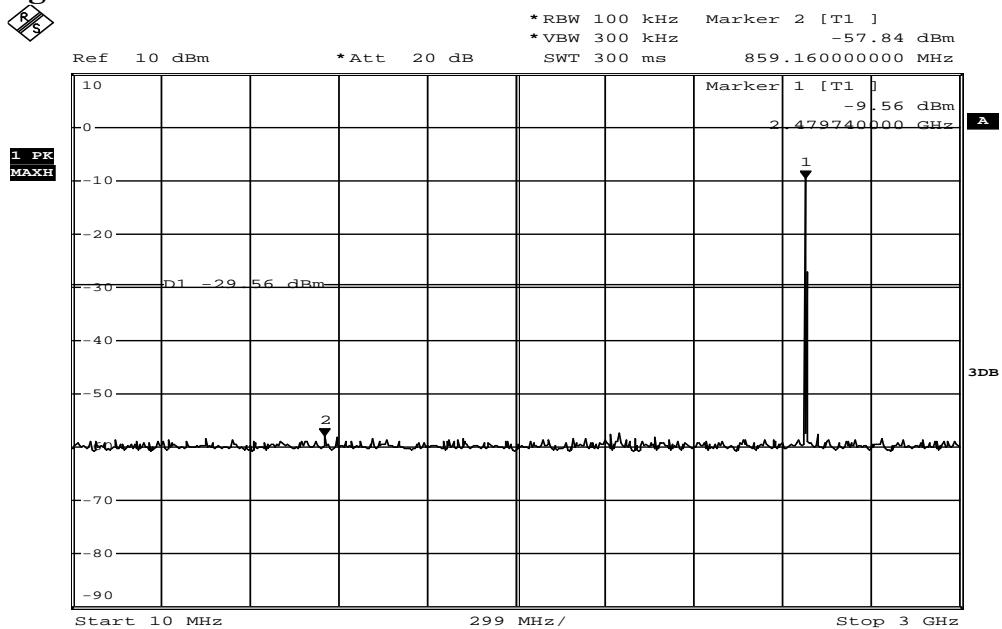

Date: 10.JUL.2014 17:39:18

Ch High 3GHz – 26.5GHz

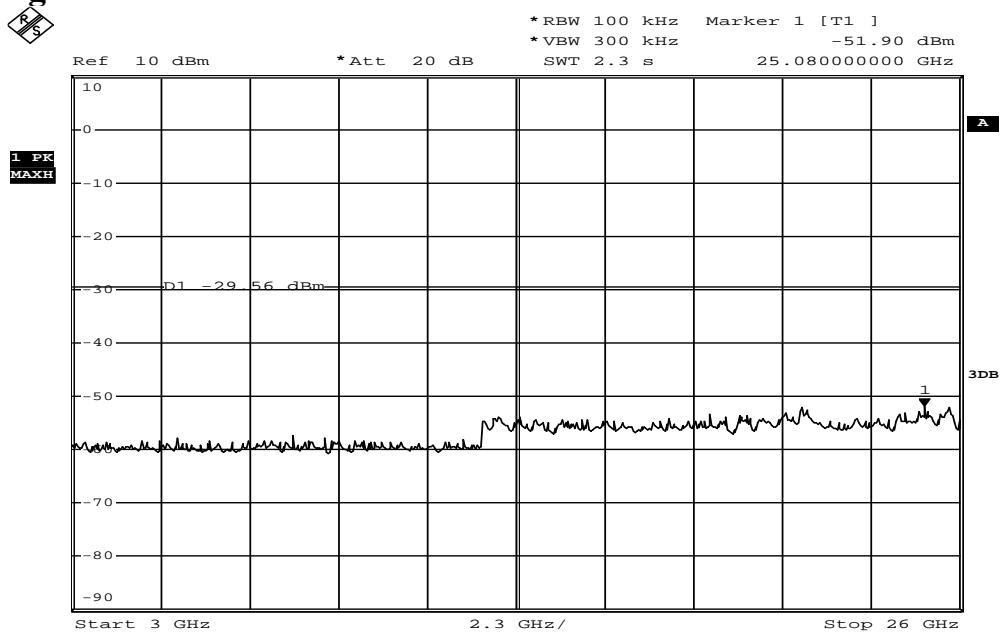

Date: 10.JUL.2014 17:39:39

Radiated Spurious Emission Measurement Result: (below 1GHz)

Operation Mode	TX CH Low	Test Date	2014/07/14
Fundamental Frequency	2402MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	120.21	47.49	-13.63	33.86	43.50	-9.64	Peak	VERTICAL
2	159.01	53.33	-15.37	37.96	43.50	-5.54	Peak	VERTICAL
3	227.88	46.81	-14.53	32.28	46.00	-13.72	Peak	VERTICAL
4	366.59	35.83	-9.81	26.02	46.00	-19.98	Peak	VERTICAL
5	431.58	35.99	-8.94	27.05	46.00	-18.95	Peak	VERTICAL
6	833.16	29.13	-3.46	25.67	46.00	-20.33	Peak	VERTICAL
1	71.71	56.67	-19.76	36.91	40.00	-3.09	Peak	HORIZONTAL
2	180.35	51.85	-16.19	35.66	43.50	-7.84	Peak	HORIZONTAL
3	239.52	51.40	-13.45	37.95	46.00	-8.05	Peak	HORIZONTAL
4	359.80	41.64	-9.94	31.70	46.00	-14.30	Peak	HORIZONTAL
5	527.61	34.83	-7.74	27.09	46.00	-18.91	Peak	HORIZONTAL
6	600.36	34.22	-6.89	27.33	46.00	-18.67	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak / QP detector mode.
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	2014/07/14
Fundamental Frequency	2440MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	158.04	53.80	-15.32	38.48	43.50	-5.02	Peak	VERTICAL
2	227.88	46.28	-14.53	31.75	46.00	-14.25	Peak	VERTICAL
3	312.27	38.71	-11.01	27.70	46.00	-18.30	Peak	VERTICAL
4	432.55	36.26	-8.94	27.32	46.00	-18.68	Peak	VERTICAL
5	563.50	30.24	-7.13	23.11	46.00	-22.89	Peak	VERTICAL
6	833.16	30.05	-3.46	26.59	46.00	-19.41	Peak	VERTICAL
1	71.71	55.93	-19.76	36.17	40.00	-3.83	Peak	HORIZONTAL
2	120.21	51.01	-13.63	37.38	43.50	-6.12	Peak	HORIZONTAL
3	180.35	51.96	-16.19	35.77	43.50	-7.73	Peak	HORIZONTAL
4	240.49	50.11	-13.38	36.73	46.00	-9.27	Peak	HORIZONTAL
5	359.80	40.94	-9.94	31.00	46.00	-15.00	Peak	HORIZONTAL
6	600.36	35.45	-6.89	28.56	46.00	-17.44	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak / QP detector mode.
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH High	Test Date	2014/07/14
Fundamental Frequency	2480MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	120.21	48.56	-13.63	34.93	43.50	-8.57	Peak	VERTICAL
2	159.98	53.83	-15.42	38.41	43.50	-5.09	Peak	VERTICAL
3	227.88	46.03	-14.53	31.50	46.00	-14.50	Peak	VERTICAL
4	312.27	38.42	-11.01	27.41	46.00	-18.59	Peak	VERTICAL
5	408.30	37.90	-9.10	28.80	46.00	-17.20	Peak	VERTICAL
6	832.19	28.87	-3.48	25.39	46.00	-20.61	Peak	VERTICAL
1	71.71	56.36	-19.76	36.60	40.00	-3.40	Peak	HORIZONTAL
2	180.35	53.58	-16.19	37.39	43.50	-6.11	Peak	HORIZONTAL
3	239.52	50.10	-13.45	36.65	46.00	-9.35	Peak	HORIZONTAL
4	359.80	39.53	-9.94	29.59	46.00	-16.41	Peak	HORIZONTAL
5	527.61	33.71	-7.74	25.97	46.00	-20.03	Peak	HORIZONTAL
6	600.36	33.88	-6.89	26.99	46.00	-19.01	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak / QP detector mode.
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	2014/07/14
Fundamental Frequency	2402 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	4804.00	49.02	-1.90	47.12	74.00	-26.88	Peak	VERTICAL
1	4804.00	53.91	-1.90	52.01	74.00	-21.99	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	2014/07/14
Fundamental Frequency	2440 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	4884.00	43.96	-1.59	42.37	74.00	-31.63	Peak	VERTICAL
1	4884.00	50.46	-1.59	48.87	74.00	-25.13	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	2014/07/14
Fundamental Frequency	2480 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	4960.00	38.45	-1.30	37.15	74.00	-36.85	Peak	VERTICAL
1	4960.00	41.13	-1.30	39.83	74.00	-34.17	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-210 issue 8, §A8.2(b) and §A8.3(2), The transmitter power spectral density (into the antenna) shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

Refer to section 10.2 Peak Power Density(PKPPSD) Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r02

- 1 Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2 Set the RBW = 100 kHz.
- 3 Set the VBW \geq 300 kHz.
- 4 Set the span to 5-30 % greater than the EBW.
- 5 Detector = peak.
- 6 Sweep time = auto couple.
- 7 Trace mode = max hold.
- 8 Allow trace to fully stabilize.
- 9 Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 10 Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz}) = -15.2 \text{ dB}$).
- 11 The resulting peak PSD level must be $\leq 8 \text{ dBm}$.


10.5 Measurement Result:

LE mode

Frequency MHz	Power Density Reading (dBm)	Maximum Limit (dBm)
2402	-20.57	8
2442	-22.55	8
2480	-23.72	8


LT mode

Power Spectral Density Test Plot (CH-Low)

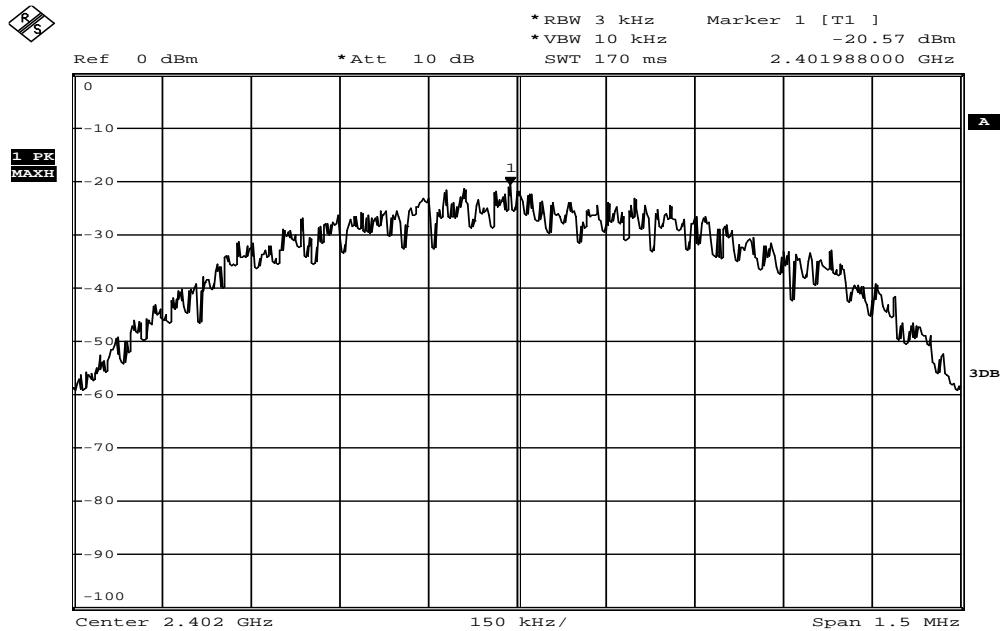


Date: 10.JUL.2014 17:49:24

Power Spectral Density Test Plot (CH-Mid)

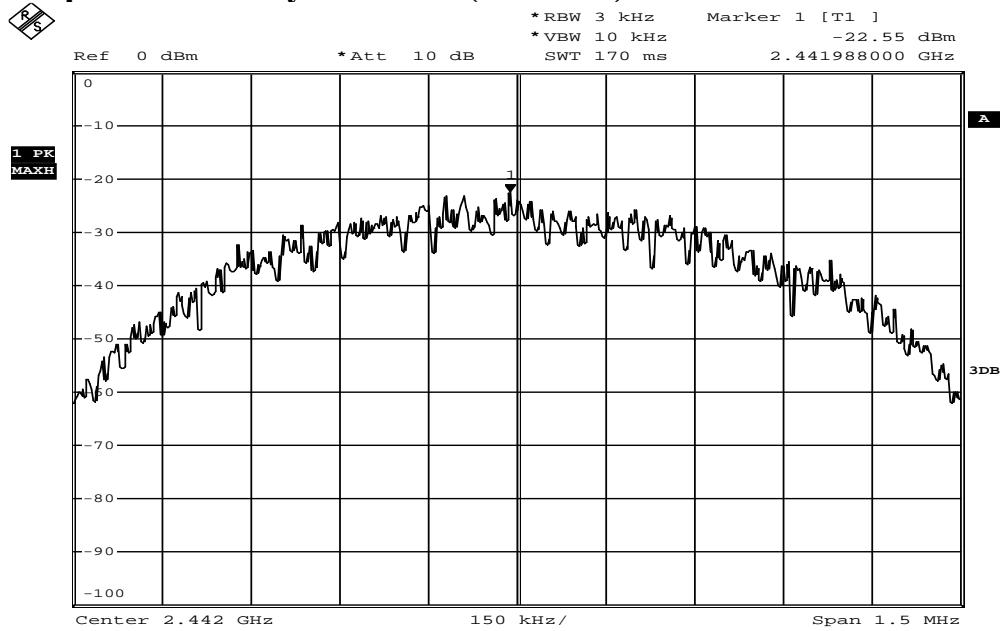

Date: 10.JUL.2014 17:50:09

Power Spectral Density Test Plot (CH-High)

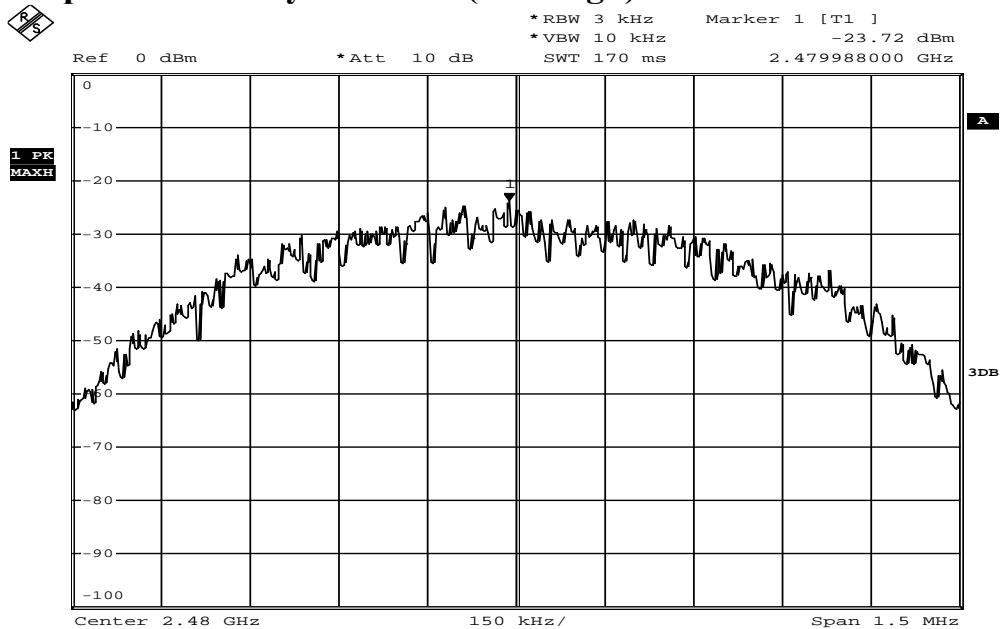

Date: 10.JUL.2014 17:48:35

11 ANTENNA REQUIREMENT

11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

11.2 Antenna Connected Construction:

The directional gain of antenna used for transmitting is 5.3 dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

12 RF EXPOSURE

12.1 Standard Applicable

According to §2.1093 this is a Portable device.

For The radiation source included into the device the output power is taken from a corresponding RF test report. If needed the output power is converted to source based, time –average out power. Finally the output power is compared to FCC and IC low power SAR evaluation exemption level.

FCC SAR test exclusion:

According to KDB 447498 D01 General RF Exposure Guidance v05r02, Appendix A requirement, “The equation and threshold in section 4.3.1 must be applied to determine SAR test exclusion.”

4.3.1. Standalone SAR test exclusion considerations

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition, listed below, is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.²³ The minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander (see 5) of section 4.1). To qualify for SAR test exclusion, the test separation distances applied must be fully explained and justified by the operating configurations and exposure conditions of the transmitter and applicable host platform requirements, typically in the SAR measurement or SAR analysis report, according to the required published RF exposure KDB procedures. When no other RF exposure testing or reporting is required, a statement of justification and compliance must be included in the equipment approval, in lieu of the SAR report, to qualify for the SAR test exclusion. When required, the device specific conditions described in the other published RF exposure KDB procedures must be satisfied before applying these SAR test exclusion provisions; for example, handheld PTT two-way radios, handsets, laptops & tablets etc.²⁴

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, 25 where}$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation 26
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

IC Exemption from Routine Evaluation Limits – SAR Evaluation: RSS 102 Issue 4

SAR evaluation is required if the separation distance between the user and the radiating element of the device is less than or equal to 20 cm, except when the device operates as follows:

above 2.2 GHz and up to 3 GHz inclusively, and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 20 mW for general public use and 100 mW for controlled use;

12.2 Measurement Result:

FCC:

Frequency (MHz)	Max power (dBm)	tune-up tolerance(dB)	Max power (mW)	Min Distance (mm)	Result	Limit (3.0 @ 1g SAR)
2402	-5.69	2	0.427563	5.00	0.132531	3.0
2440	-6.72	2	0.337287	5.00	0.105372	3.0
2480	-7.95	2	0.254097	5.00	0.080031	3.0

$$\text{Max Power(mW)} = 10^{((\text{Max Power(dBm)} + \text{Tune-up tolerance(dB)})/10)}$$

$$\text{Result} = \text{Max Power (mW)} / \text{min. distance(mm)} * \sqrt{f(\text{GHz})}$$

IC:

The Measured Max. peak output power is -5.69dBm (0.0003 W) , which is lower than the threshold power level 20mW in RSS 102 issue 4.

The SAR measurement is not necessary.