



Report No.: EA2004082F 02001

1 of 60

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Dash Cam 2.4G Module

Model No.: BT530024

FCC ID: WUI-BT530024

Trademark: N/A

Report No.: EA2004082F 02001

Issue Date: Apr. 18, 2020

Prepared for

Winplus Co., Ltd.

Suites 6-11, 7th Floor, Corporation Park, 11 On La, Shatin, Hong Kong

Prepared by

Dong Guan Anci Electronic Technology Co., Ltd.

**1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake
Hi-tech Industrial Development Zone, Dongguan City, evelopment Zone,
Dongguan City, Guangdong Pr., China.**

**This report shall not be reproduced, except in full, without the written approval of
Dong Guan Anci Eleaactronic Technology Co., Ltd.**



VERIFICATION OF COMPLIANCE

Applicant:	Winplus Co., Ltd. Suites 6-11, 7th Floor, Corporation Park, 11 On La, Shatin, Hong Kong.
Manufacturer:	Winplus Co., Ltd. Suites 6-11, 7th Floor, Corporation Park, 11 On La, Shatin, Hong Kong
Product Description:	Dash Cam 2.4G Module
Model Number:	BT530024

We hereby certify that:

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2019).

Date of Test : Apr. 13, 2020 to Apr. 17, 2020

Prepared by : Tomas Yang/Supervisor

Reviewer & Authorized Signer : Alan He/Manager



Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	EA2004082F 02001



Table of Contents

- 1. GENERAL INFORMATION 6**
 - 1.1 PRODUCT DESCRIPTION 6
 - 1.2 TEST METHODOLOGY 6
- 2. SYSTEM TEST CONFIGURATION 7**
 - 2.1 EUT CONFIGURATION..... 7
 - 2.2 EUT EXERCISE 7
 - 2.3 TEST PROCEDURE 7
 - 2.4 CONFIGURATION OF TESTED SYSTEM..... 7
- 3. DESCRIPTION OF TEST MODES 9**
- 4. SUMMARY OF TEST RESULTS 9**
- 5. TEST FACILITY 13**
- 6. RADIATED EMISSION TEST..... 14**
 - 6.1 MEASUREMENT PROCEDURE 14
 - 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 15
 - 6.3 MEASUREMENT EQUIPMENT USED..... 16
 - 6.4 RADIATED EMISSION LIMIT..... 17
 - 6.5 MEASUREMENT RESULT 18
- 7. 6DB BANDWIDTH TEST 25**
 - 7.1 MEASUREMENT PROCEDURE 25
 - 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 25
 - 7.3 MEASUREMENT EQUIPMENT USED..... 25
 - 7.4 MEASUREMENT RESULTS 25
- 8. MAXIMUM PEAK OUTPUT POWER TEST 34**
 - 8.1 MEASUREMENT PROCEDURE 34
 - 8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 34
 - 8.3 MEASUREMENT EQUIPMENT USED..... 34
 - 8.4 PEAK POWER OUTPUT LIMIT 34
 - 8.5 MEASUREMENT RESULTS 34
- 9. BAND EDGE TEST..... 35**
 - 9.1 MEASUREMENT PROCEDURE 35
 - 9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 36
 - 9.3 MEASUREMENT EQUIPMENT USED..... 36
 - 9.4 MEASUREMENT RESULTS 36
- 10. POWER DENSITY 43**
 - 10.1 TEST EQUIPMENT 43
 - 10.2 MEASURING INSTRUMENTS AND SETTING..... 43
 - 10.3 TEST PROCEDURES 43
 - 10.4 BLOCK DIAGRAM OF TEST SETUP 43
 - 10.5 LIMIT..... 44
 - 10.6 TEST RESULT 44
- 11. ANTENNA PORT EMISSION 53**
 - 11.1 TEST EQUIPMENT..... 53
 - 11.2 MEASURING INSTRUMENTS AND SETTING 53



11.3 TEST PROCEDURES	53
11.4 BLOCK DIAGRAM OF TEST SETUP	53
11.5 TEST RESULT	53
12. ANTENNA APPLICATION.....	60
12.1 ANTENNA REQUIREMENT	60
12.2 RESULT	60
13. PHOTOS OF EUT	60

1. General Information

1.1 Product Description

Characteristics	Description
Product Name	Dash Cam 2.4G Module
Model number	BT530024
Power Supply	DC 5V, 3A from charger
Test Power Supply	DC 12V, DC 24V
Modulation	802.11b: DSSS(DBPSK/DQPSK/CCK) 802.11g/n: OFDM(BPSK/QPSK/16QAM/64QAM)
Operating Frequency Range	2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40);
Number of Channels	11 channels for 802.11b/g; 11 channels for 802.11n(HT20); 7 channels for 802.11n(HT40);
Transmit Power Max	802.11b: 15.29dBm 802.11g: 15.05dBm 802.11n(HT20): 14.94dBm 802.11n(HT40): 14.07dBm
Antenna Type	Internal antenna
Antenna Gain	6dBi
Product Software Version	13.8.5.23.20200326
Product Hardware version	MG15-GK52-M-V1.0

Note: for more details, please refer to the User's manual of the EUT.

1.2 Test Methodology

All the test program has follow FCC new test procedure KDB 558074 D01 15.247 Meas Guidance v05r02 and in accordance with the procedures given in ANSI C63.10-2013.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System






Table 2-1 Equipment Used in Tested System

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	Dash Cam 2.4G Module	N/A	BT530024	WUI-BT530024	EUT
2.	Adapter	N/A	JM-XTE	N/A	<i>Support Equipment</i>

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3. Description of Test Modes

The EUT has been tested under its typical operating condition and Only the worst case data were reported. The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting mode is programmed. EUT is connected by com port, and transmit the control instruction via test software(SecureCRT V8.1.4).

Frequency and Channel list for 802.11 b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11 n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11 n (HT40):


Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

Operated Mode for Worst Duty cycle:

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
802.11b	2412	99.11	0.04
802.11b	2437	99.29	0.03
802.11b	2462	99.34	0.03
802.11g	2412	99.21	0.03
802.11g	2437	99.23	0.03
802.11g	2462	99.32	0.03
802.11n(HT20)	2412	99.14	0.04
802.11n(HT20)	2437	99.17	0.04
802.11n(HT20)	2462	99.34	0.03
802.11n(HT40)	2422	99.25	0.03
802.11n(HT40)	2437	99.30	0.03
802.11n(HT40)	2452	99.16	0.14


All the modulation modes were tested the data of the worst mode (TX 802.11b) are recorded in the following pages:

Duty Cycle NVNT 802.11b 2412MHz

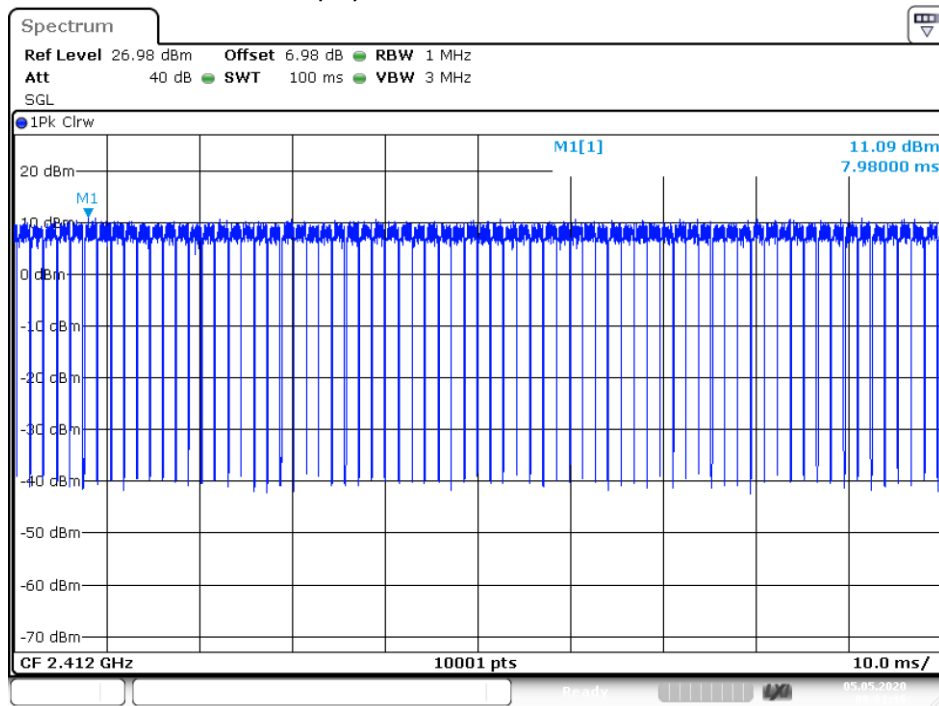


Date: 5.MAY.2020 09:01:15

Duty Cycle NVNT 802.11b 2437MHz

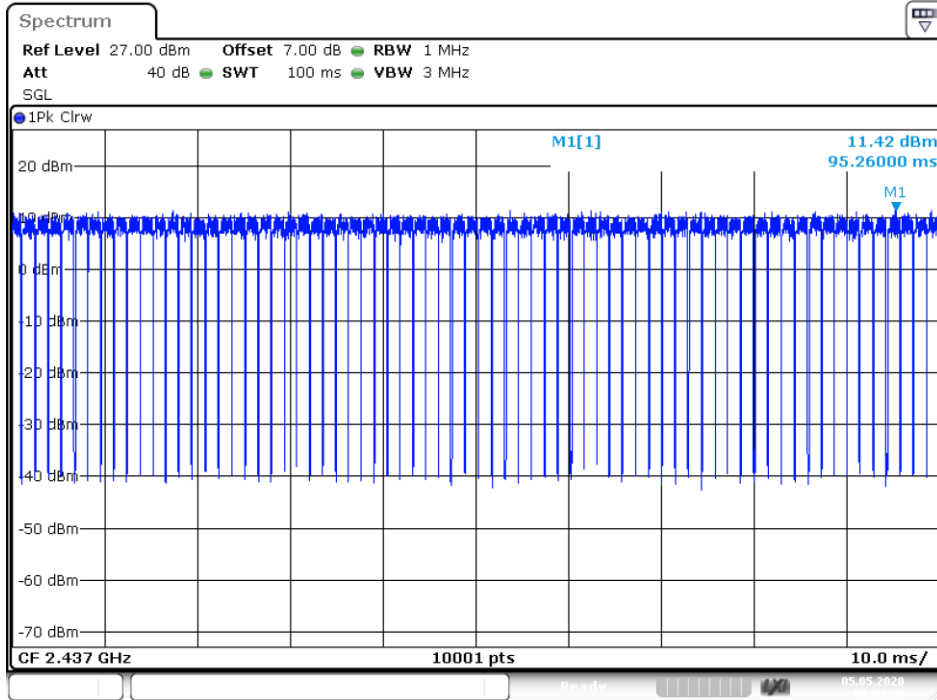

Date: 5.MAY.2020 09:03:24

Duty Cycle NVNT 802.11b 2462MHz

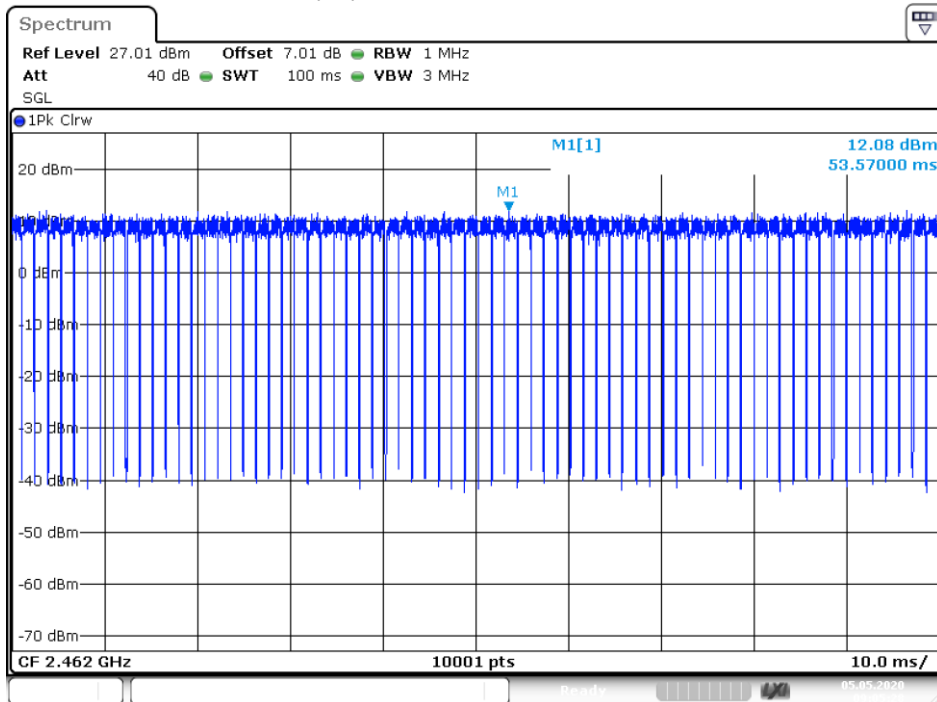

Date: 5.MAY.2020 09:05:28



4. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(b)(3)	Max Peak output Power test	Pass
§15.247(e)	Power density	Pass
§15.247(d)	Band edge test	Pass
§15.207	AC Power Conducted Emission	N/A
§15.247(d), §15.209	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
§15.247(b)&§15.203	Antenna Application	Pass
N/A (Not Applicable).The product is battery powered.		



5. Test Facility

Site Description

EMC Lab : Accredited by CNAS, 2017.06.26
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L0468.

Accredited by A2LA, 2018.03.15
The Certificate Number is 4422.01.

Name of Firm : Dong Guan Anci Electronic Technology Co., Ltd.
Site Location : 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech Industrial Development Zone, Dongguan City, evelopment Zone, Dongguan City, Guangdong Pr., China.

6. Radiated Emission Test

6.1 Measurement Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	AVG
Trace	Max hold

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

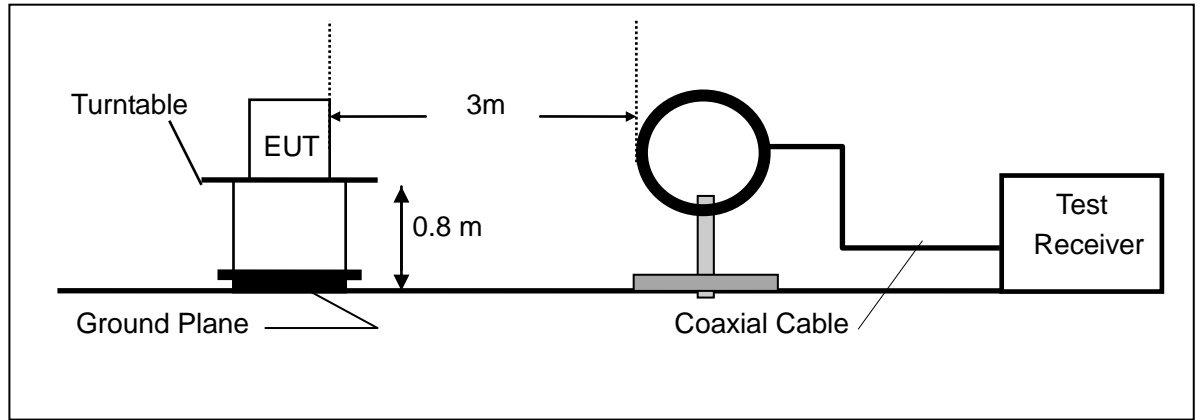

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

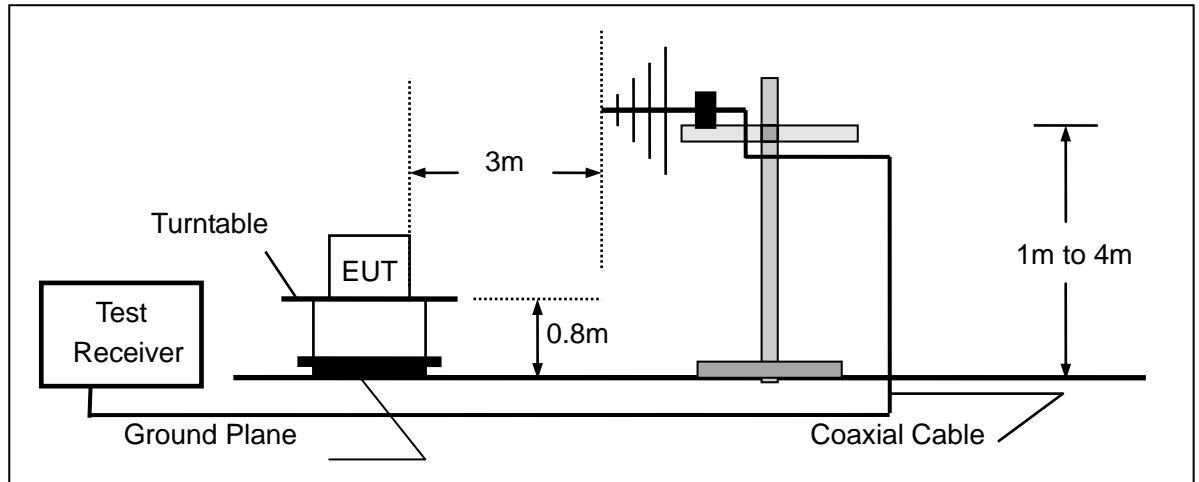

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

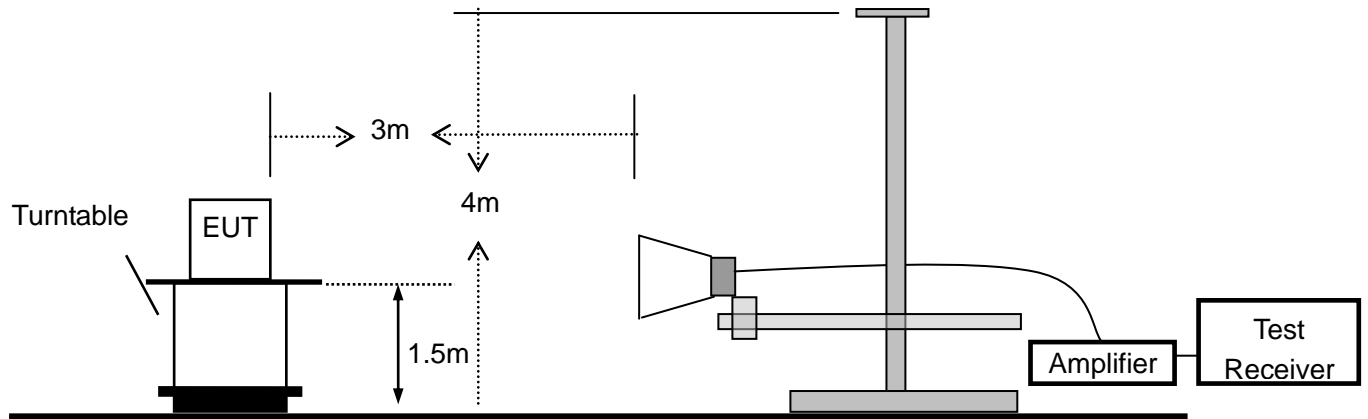

6.3 Measurement Equipment Used

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2020-11-28
2.	Pre-Amplifier	HP	8447D	2727A06172	2020-05-19
3.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2020-05-19
4.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2020-11-28
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
6.	Low noise Amplifiers	A-INFO	LA1018N4009	J101313052400 1	2020-05-19
7.	Horn antenna	A-INFO	LB-10180-SF	J203109061212 3	2020-05-19
8.	Broadband RF Power Amplifier	AEROFLEX	AEROFLEX10 0KHz-40GHz	J101313052400 1	2020-11-28
9.	DRG Horn Antenna	A.H.SYSTEMS	SAS-574	J203109061212 3	2020-11-28
10.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-2m	N/A	2020-11-28
11.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-0.3m	N/A	2020-11-28
12.	RF Cable	N/A	N/A	6#	2020-05-19
13.	RF Cable	N/A	N/A	1-1#	2020-05-19
14.	RF Cable	N/A	N/A	1-2#	2020-05-19
15.	RF Cable	N/A	N/A	7#	2020-05-19
16.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2020-05-19
17.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

- Remark 1. Emission level in dBuV/m=20 log (uV/m)
- : 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.



6.5 Measurement Result

Below 30MHz:

All the modulation modes were tested the data of the test mode are recorded in the following pages.

Operation Mode:	TX Mode	Test Date :	Apr. 14, 2020
Frequency Range:	9KHz~30MHz	Temperature :	26°C
Test Result:	PASS	Humidity :	60 %
Measured Distance:	3m	Test By:	Best

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

Below 1000MHz:

Radiated emission at both DC12V & DC24V is assessed, All the modulation modes were tested the data of the worst mode (TX 802.11b 2412MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following test plots:

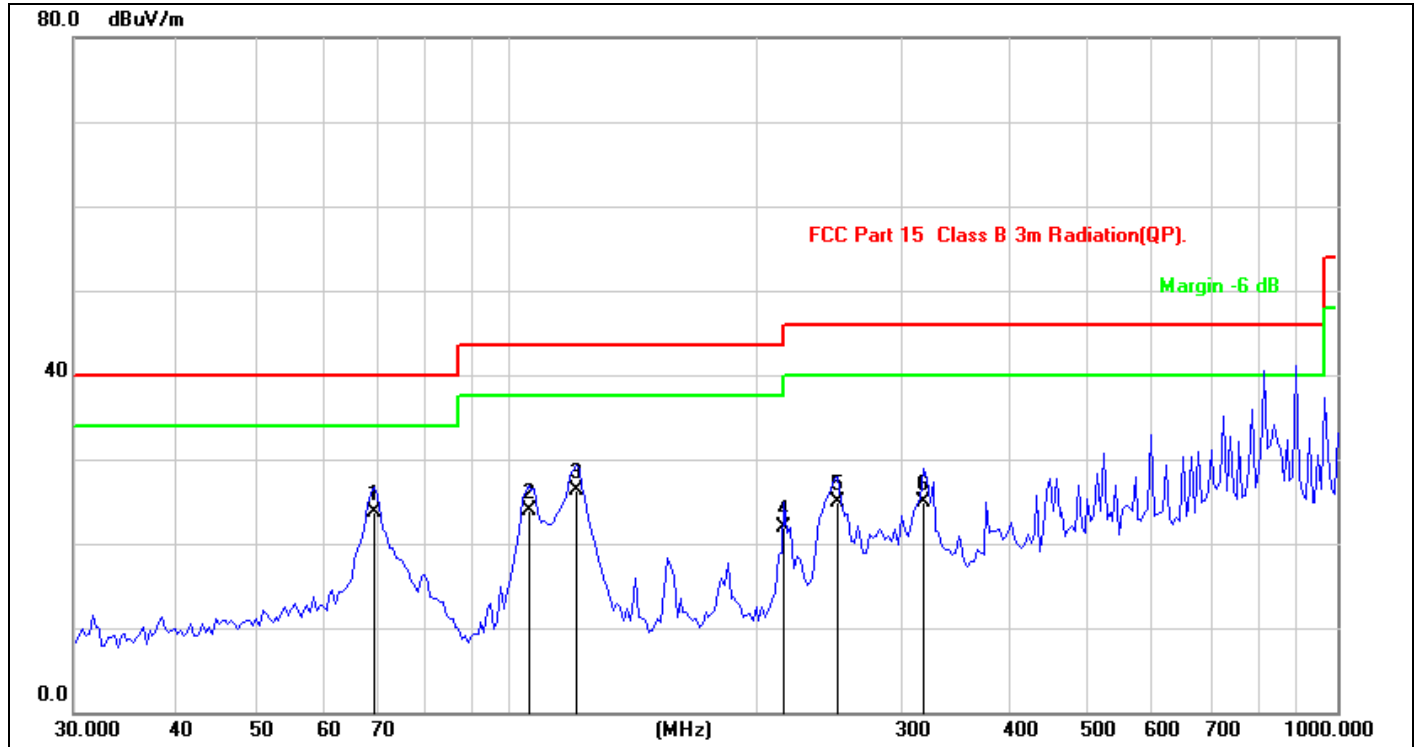

Site:	LAB	Antenna::	Horizontal	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation	Test Time:		Humidity(%):	60%
EUT:	Dash Cam 2.4G Module	Power Rating:		Test Engineer:	Dyson
M/N.:	BT530024				
Mode:	TX2412				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1 *	68.9930	41.63	-17.99	23.64	40.00	-16.36	QP	
2	106.0126	41.59	-17.63	23.96	43.50	-19.54	QP	
3	120.9109	44.49	-18.14	26.35	43.50	-17.15	QP	
4	215.6456	38.35	-16.40	21.95	43.50	-21.55	QP	
5	250.3012	40.05	-15.24	24.81	46.00	-21.19	QP	
6	317.1445	38.42	-13.56	24.86	46.00	-21.14	QP	


Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor

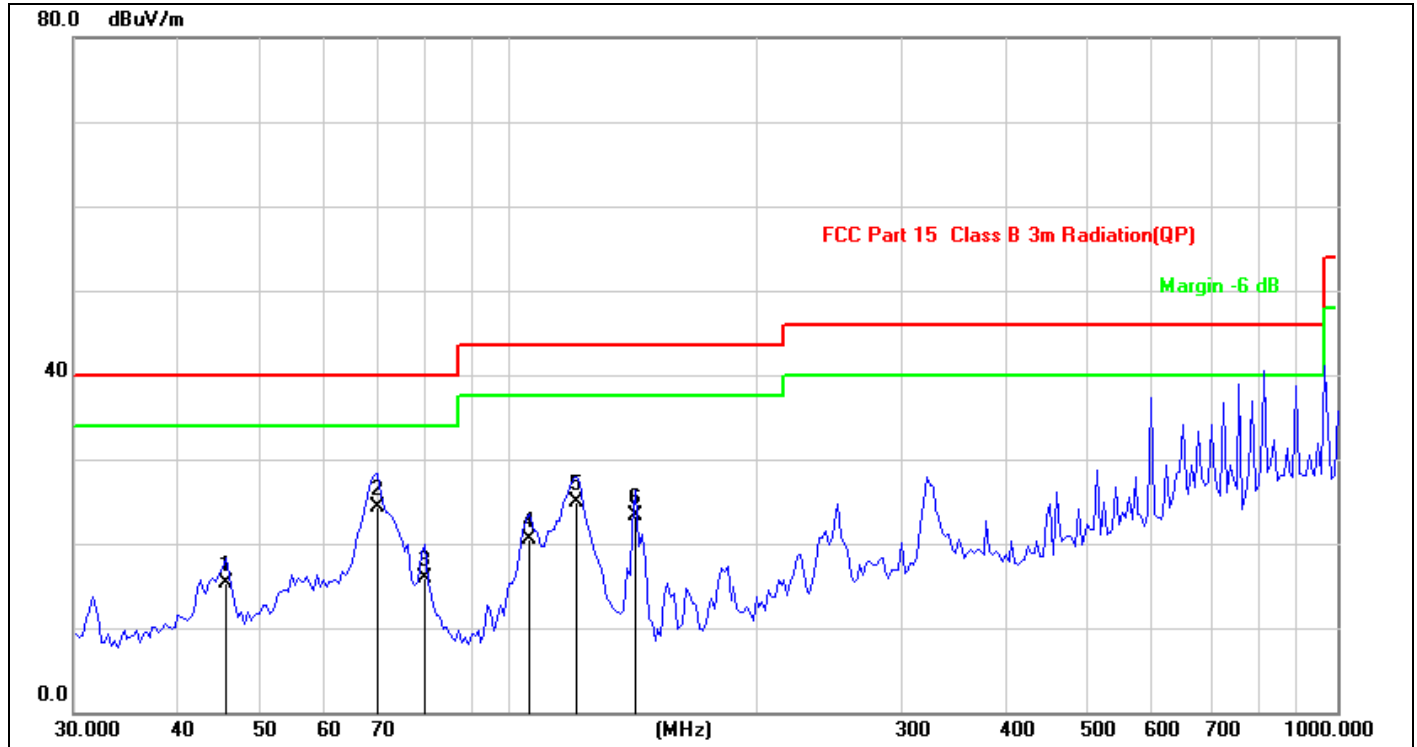

Site:	LAB	Antenna::	Vertical	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation	Test Time:		Humidity(%):	60%
EUT:	Dash Cam 2.4G Module	Power Rating:		Test Engineer:	Dyson
M/N.:	BT530024				
Mode:	TX2412				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	45.6948	32.37	-16.98	15.39	40.00	-24.61	QP	
2 *	69.6005	42.37	-18.13	24.24	40.00	-15.76	QP	
3	79.3816	34.46	-18.56	15.90	40.00	-24.10	QP	
4	106.0126	38.11	-17.63	20.48	43.50	-23.02	QP	
5	120.9109	43.12	-18.14	24.98	43.50	-18.52	QP	
6	142.8243	43.21	-19.89	23.32	43.50	-20.18	QP	


Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor

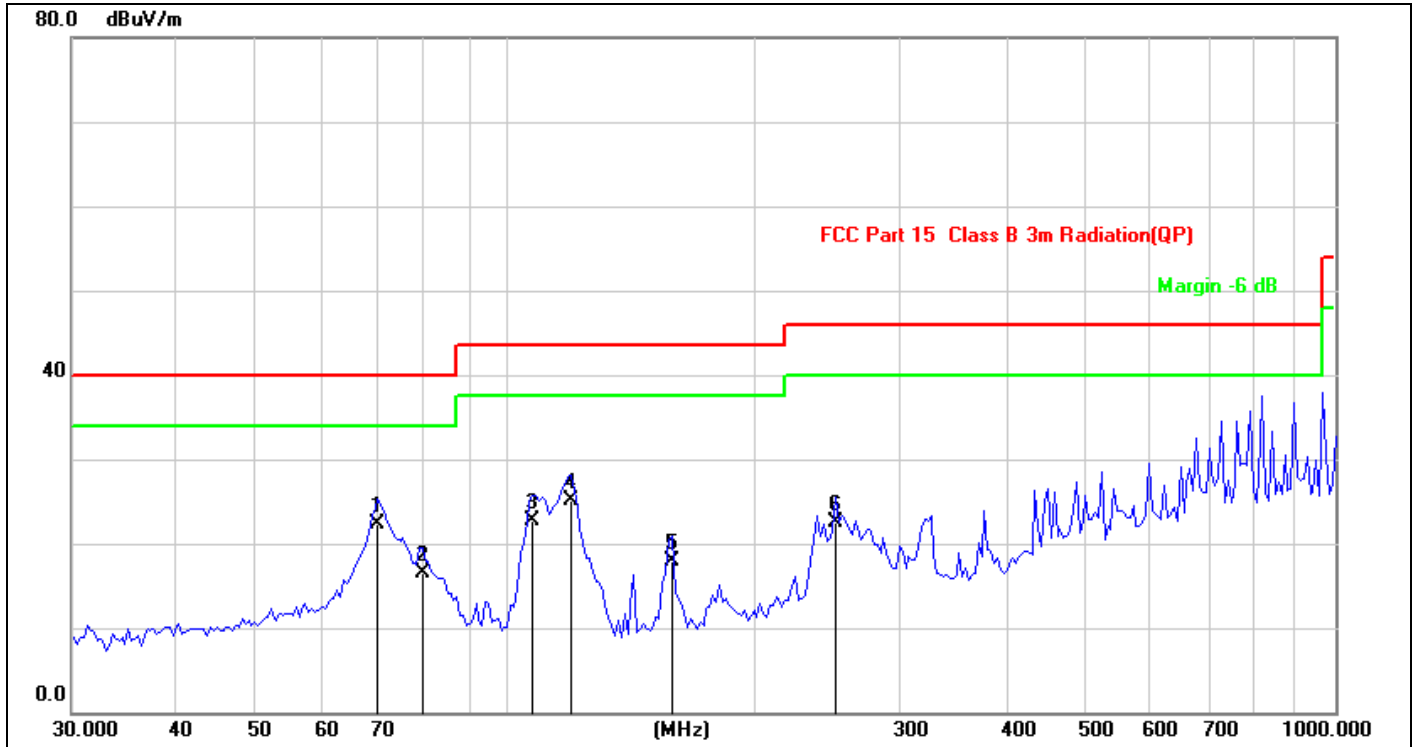

Site:	LAB	Antenna::	Horizontal	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation	Test Time:		Humidity(%):	60%
EUT:	Dash Cam 2.4G Module	Power Rating:		Test Engineer:	Dyson
M/N.:	BT530024				
Mode:	TX2412				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1 *	70.2132	40.59	-18.23	22.36	40.00	-17.64	QP	
2	79.3816	35.07	-18.56	16.51	40.00	-23.49	QP	
3	107.8877	40.14	-17.48	22.66	43.50	-20.84	QP	
4	119.8556	43.19	-18.03	25.16	43.50	-18.34	QP	
5	158.6677	37.08	-19.20	17.88	43.50	-25.62	QP	
6	250.3012	37.66	-15.24	22.42	46.00	-23.58	QP	

Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor

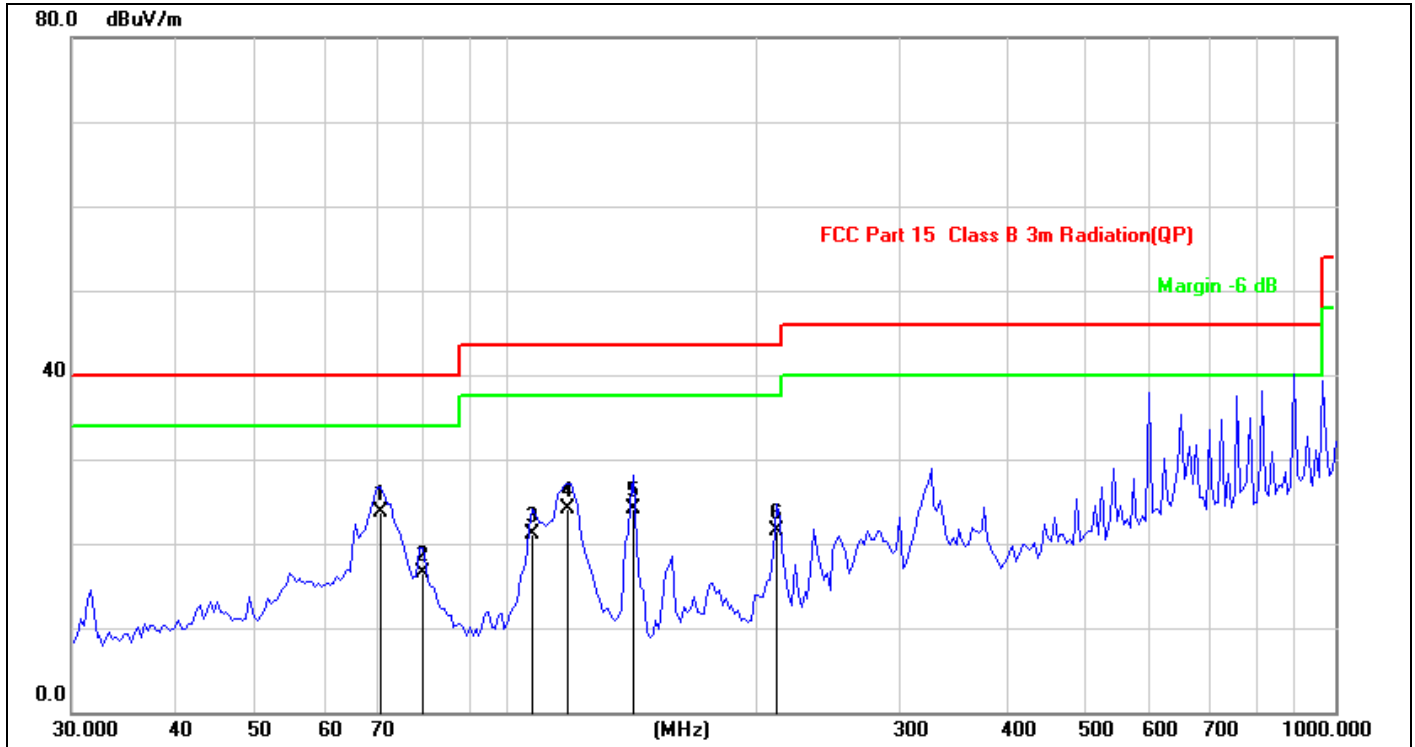

Site:	LAB	Antenna::	Vertical	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation	Test Time:		Humidity(%):	60%
EUT:	Dash Cam 2.4G Module	Power Rating:		Test Engineer:	Dyson
M/N.:	BT530024				
Mode:	TX2412				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1 *	70.8315	42.03	-18.24	23.79	40.00	-16.21	QP	
2	79.3816	35.16	-18.56	16.60	40.00	-23.40	QP	
3	107.8877	38.50	-17.48	21.02	43.50	-22.48	QP	
4	118.8095	42.11	-17.95	24.16	43.50	-19.34	QP	
5	142.8243	43.97	-19.89	24.08	43.50	-19.42	QP	
6	211.8977	38.10	-16.60	21.50	43.50	-22.00	QP	

Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor



Above 1GHz:

All the modulation modes were tested the data of the worst mode (TX 802.11b) are recorded in the following pages and the others modulation methods do not exceed the limits. The frequency range from 1GHz to 25GHz is investigated.

Operation Mode: 802.11b Lowest Test Date : Apr. 14, 2020
Test Voltage: DC 12V Test by: Best

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	65.3	45.69	74	54	-8.7	-8.31
7236	V	60.32	41.36	74	54	-13.68	-12.64
9648	V	58.6	40.66	74	54	-15.4	-13.34
12060	V	55.69	41.25	74	54	-18.31	-12.75
14472	V	55.32	40.25	74	54	-18.68	-13.75
16884	V	55.69	39.58	74	54	-18.31	-14.42
4824	H	65.8	45.96	74	54	-8.2	-8.04
7236	H	60.35	41.58	74	54	-13.65	-12.42
9648	H	58.47	40.23	74	54	-15.53	-13.77
12060	H	57.69	38.71	74	54	-16.31	-15.29
14472	H	55.32	36.48	74	54	-18.68	-17.52
16884	H	56.32	38.69	74	54	-17.68	-15.31

Operation Mode: 802.11b Middle Test Date : Apr. 14, 2020
Test Voltage: DC 12V Test by: Best

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	64.32	44.99	74	54	-9.68	-9.01
7311	V	61.02	42.52	74	54	-12.98	-11.48
9688	V	59.63	40.69	74	54	-14.37	-13.31
12185	V	58.63	40.36	74	54	-15.37	-13.64
14622	V	58.47	40.69	74	54	-15.53	-13.31
17059	V	57.63	38.96	74	54	-16.37	-15.04
4874	H	63.14	64.32	74	54	-10.86	10.32
7311	H	61.23	42.58	74	54	-12.77	-11.42
9688	H	59.65	41.32	74	54	-14.35	-12.68
12185	H	58.47	40.02	74	54	-15.53	-13.98
14622	H	58.78	39.47	74	54	-15.22	-14.53
17059	H	58.18	39.65	74	54	-15.82	-14.35



Operation Mode: 802.11b Highest

Test Date : Apr. 14, 2020

Test Voltage: DC 12V

Test by: Best

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	63.02	43.19	74	54	-10.98	-10.81
7386	V	60.36	41.38	74	54	-13.64	-12.62
9848	V	58.69	40.25	74	54	-15.31	-13.75
12310	V	59.3	40.36	74	54	-14.7	-13.64
14772	V	58.47	39.85	74	54	-15.53	-14.15
17234	V	58.31	39.69	74	54	-15.69	-14.31
4924	H	62.96	43.69	74	54	-11.04	-10.31
7386	H	61.35	42.47	74	54	-12.65	-11.53
9848	H	59.03	40.36	74	54	-14.97	-13.64
12310	H	58.14	39.02	74	54	-15.86	-14.98
14772	H	58.63	39.47	74	54	-15.37	-14.53
17234	H	58.19	39.6	74	54	-15.81	-14.4

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

No others harmonics emissions are higher than 20 dB below the limits of 47 CFR Part 15.247.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ – ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


7. 6dB Bandwidth Test

7.1 Measurement Procedure

The EUT was operating in IEEE 802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40) mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05r02 .

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequency) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2020-11-28
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2020-11-28

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

7.4 Measurement Results

6db Bandwidth Test Data Chart:

Refer to attached data chart.



Report No.: EA2004082F 02001


26 of 60

Spectrum Detector: PK
Test By: Best
Humidity : 60%


Test Date : Apr. 13, 2020
Temperature : 26°C

IEEE 802.11b			
Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)	Result
2412	9.76	>500	Pass
2437	9.16	>500	
2462	9.98	>500	

6dB NVNT 802.11b 2412MHz Ant1

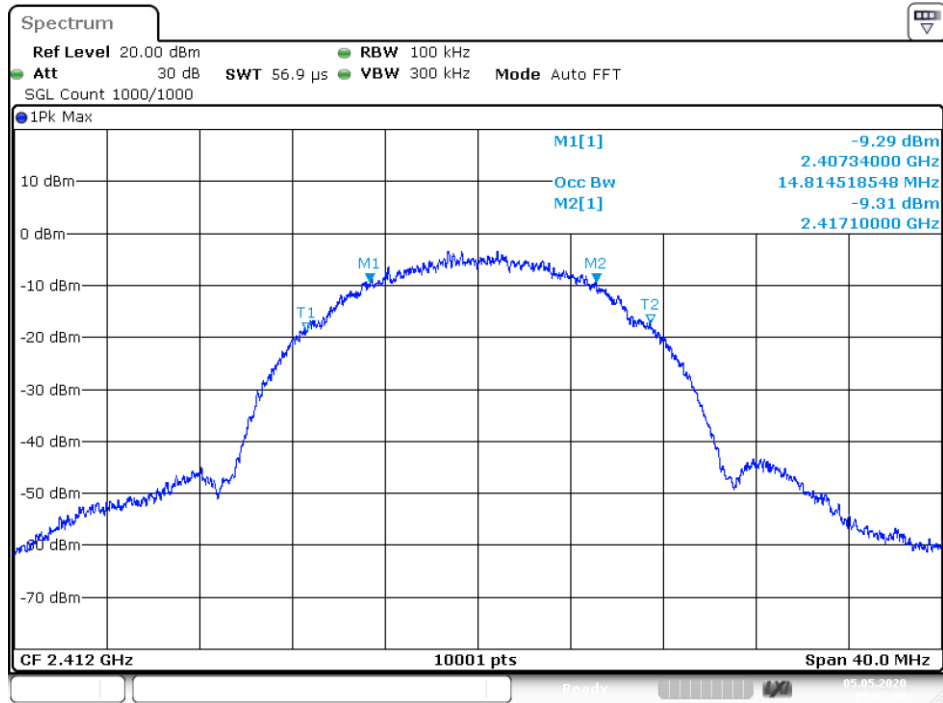


6dB NVNT 802.11b 2437MHz Ant1

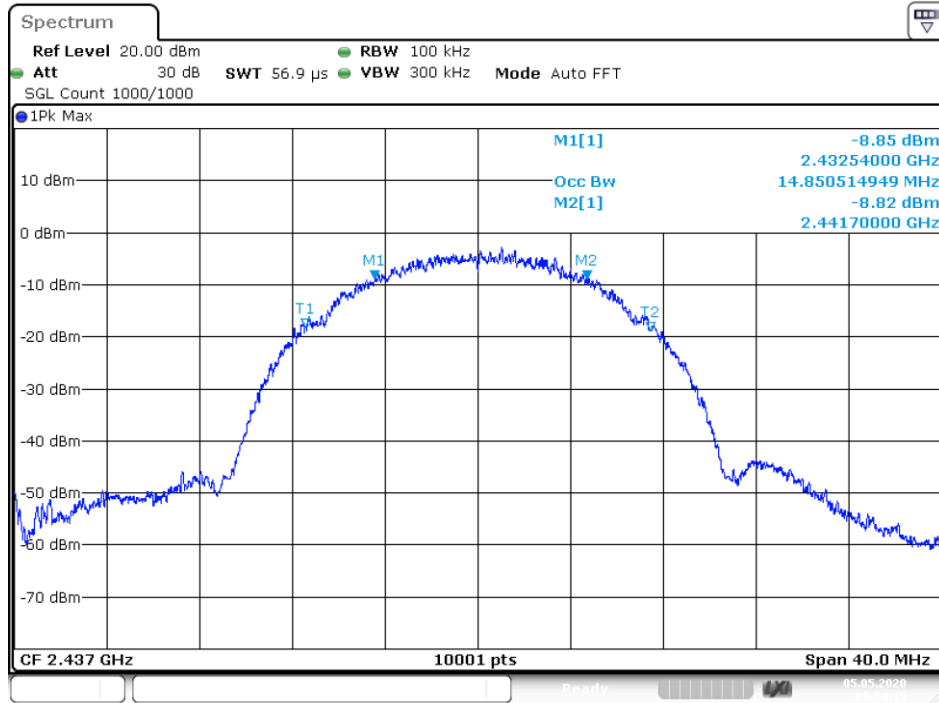

Date: 5.MAY.2020 09:04:15


6dB NVNT 802.11b 2462MHz Ant1

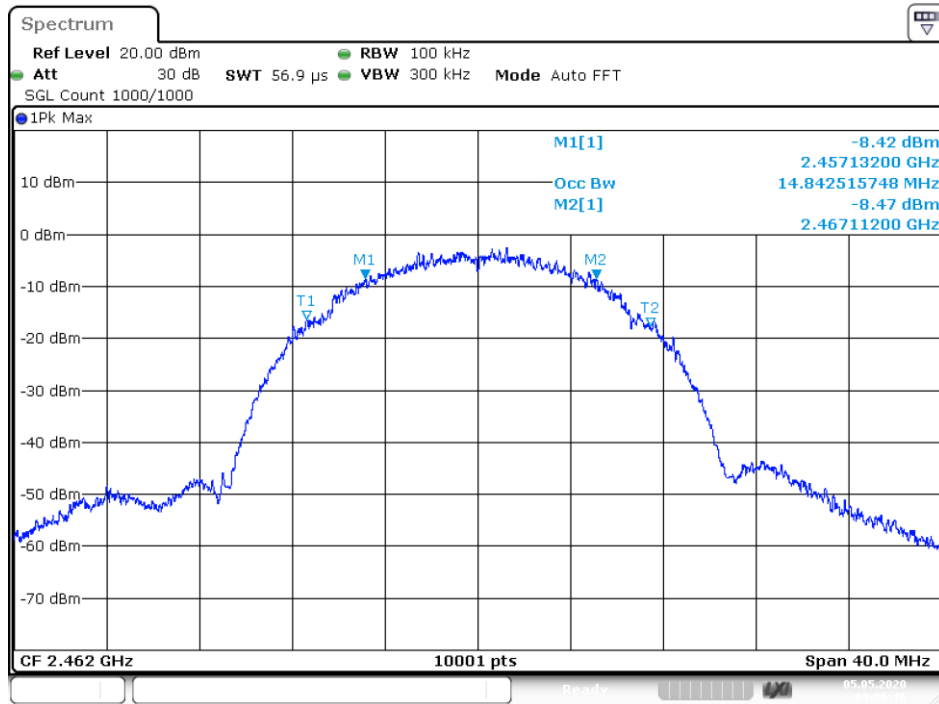

Date: 5.MAY.2020 09:06:16


IEEE 802.11g			
Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)	Result
2412	16.368	>500	Pass
2437	16.364	>500	
2462	16.356	>500	

6dB NVNT 802.11g 2412MHz Ant1

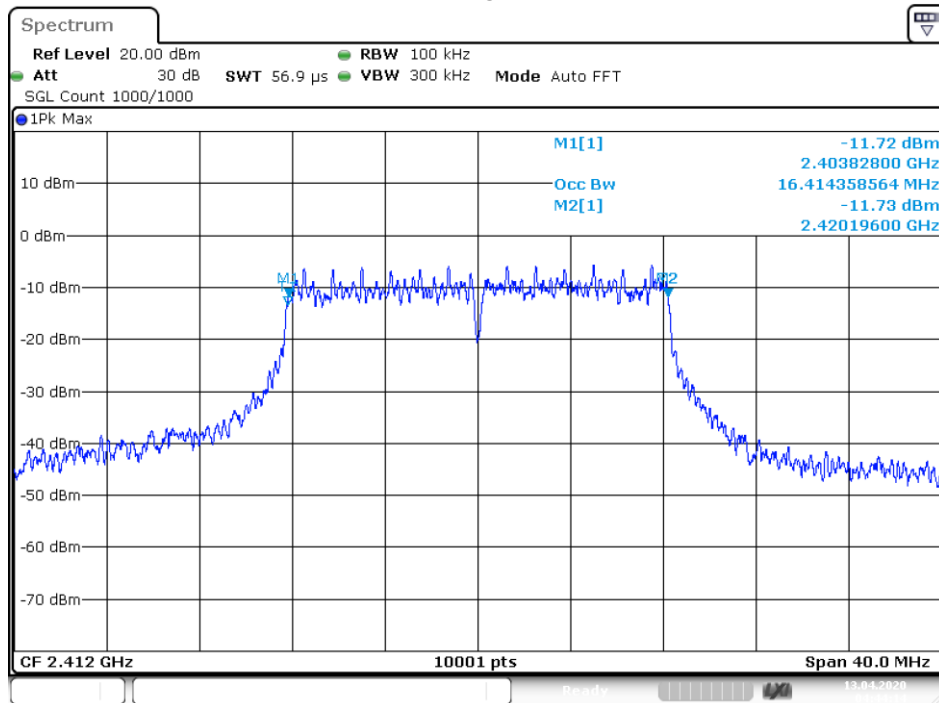


Date: 13.APR.2020 04:44:14

6dB NVNT 802.11g 2437MHz Ant1

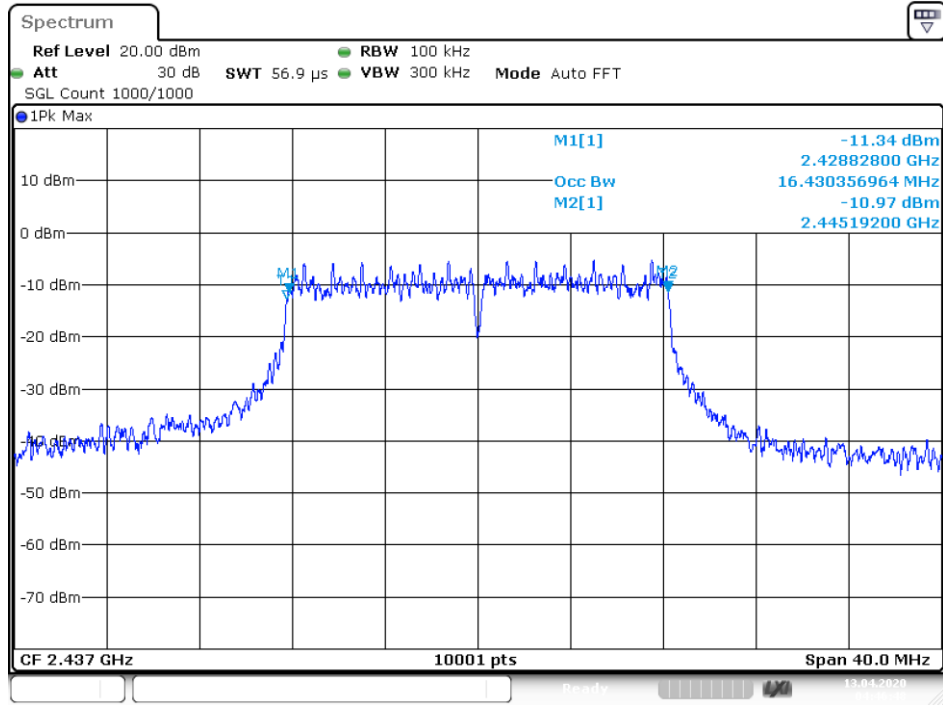


6dB NVNT 802.11g 2462MHz Ant1

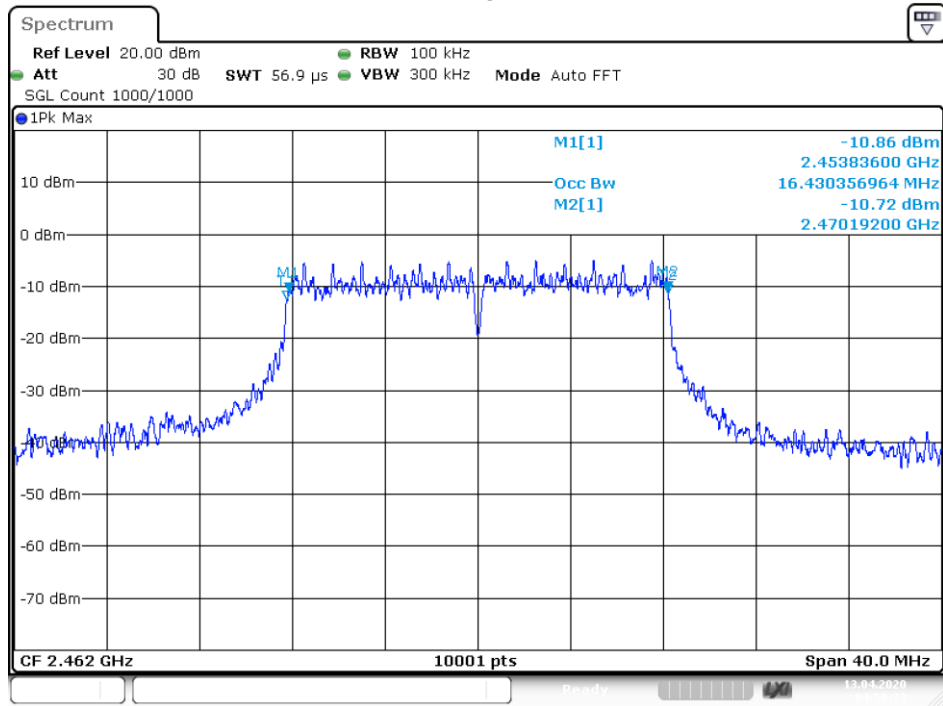


IEEE 802.11n(HT20)			
Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)	Result
2412	16.368	>500	Pass
2437	16.368	>500	
2462	16.360	>500	

6dB NVNT 802.11n(HT20) 2412MHz Ant1

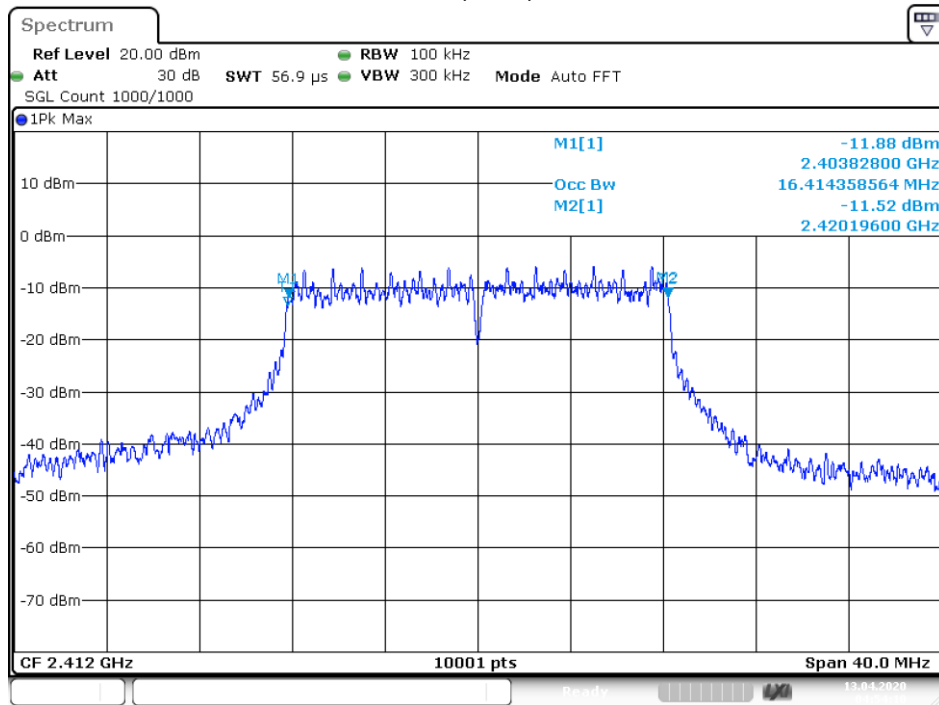


Date: 13.APR.2020 04:54:10


6dB NVNT 802.11n(HT20) 2437MHz Ant1

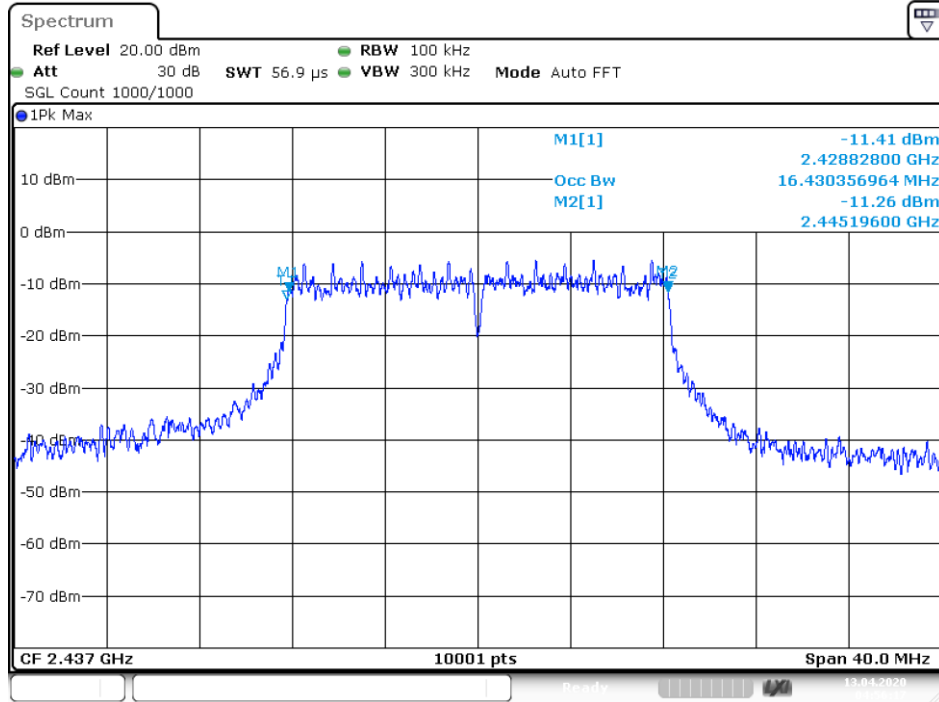

6dB NVNT 802.11n(HT20) 2462MHz Ant1

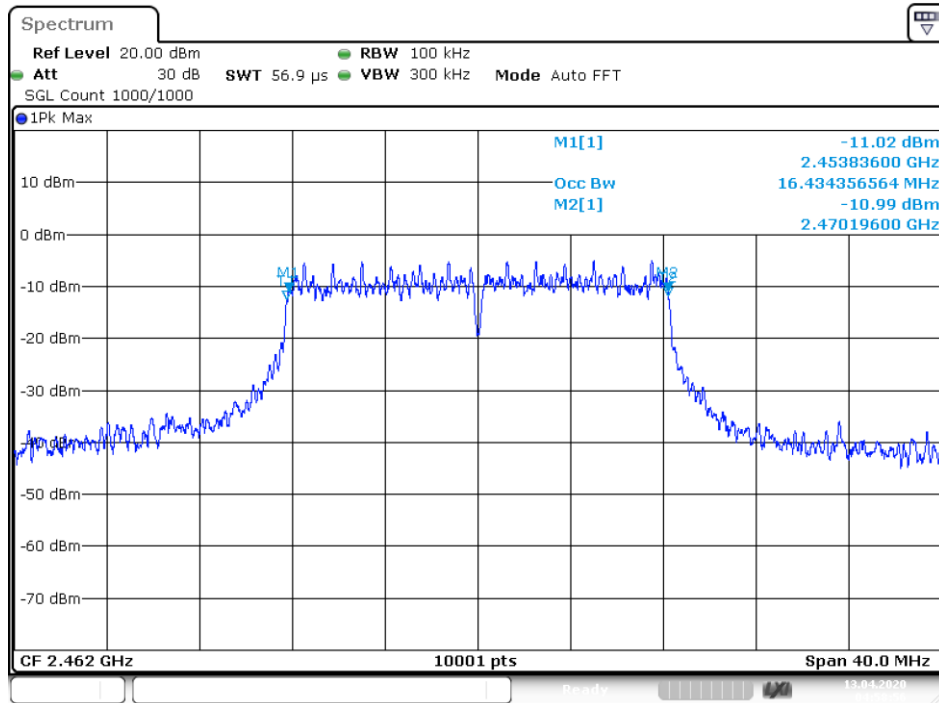


IEEE 802.11n(HT40)			
Channel frequency (MHz)	Measurement level (MHz)	Required Limit (KHz)	Result
2422	35.976	>500	Pass
2437	36.048	>500	
2452	35.064	>500	

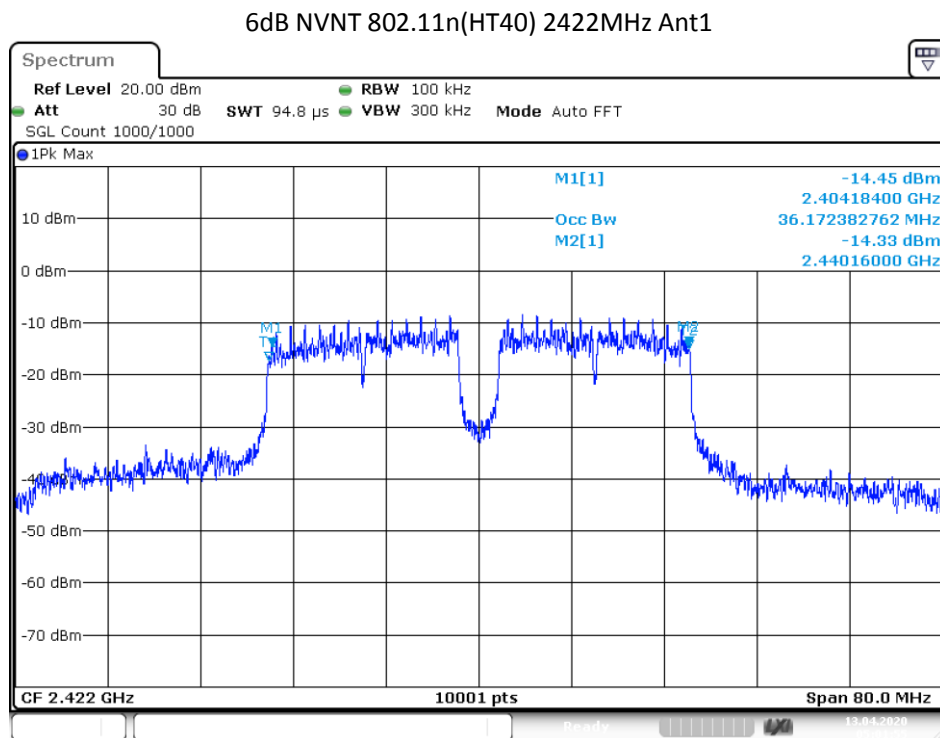


Date: 13.APR.2020 05:01:55

6dB NVNT 802.11n(HT40) 2437MHz Ant1

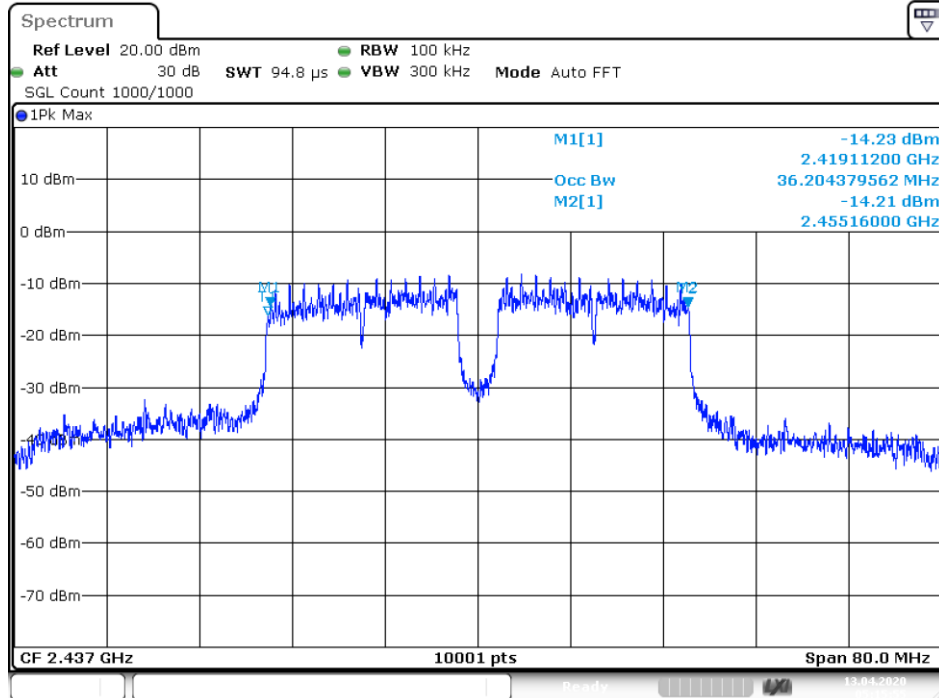

6dB NVNT 802.11n(HT40) 2452MHz Ant1

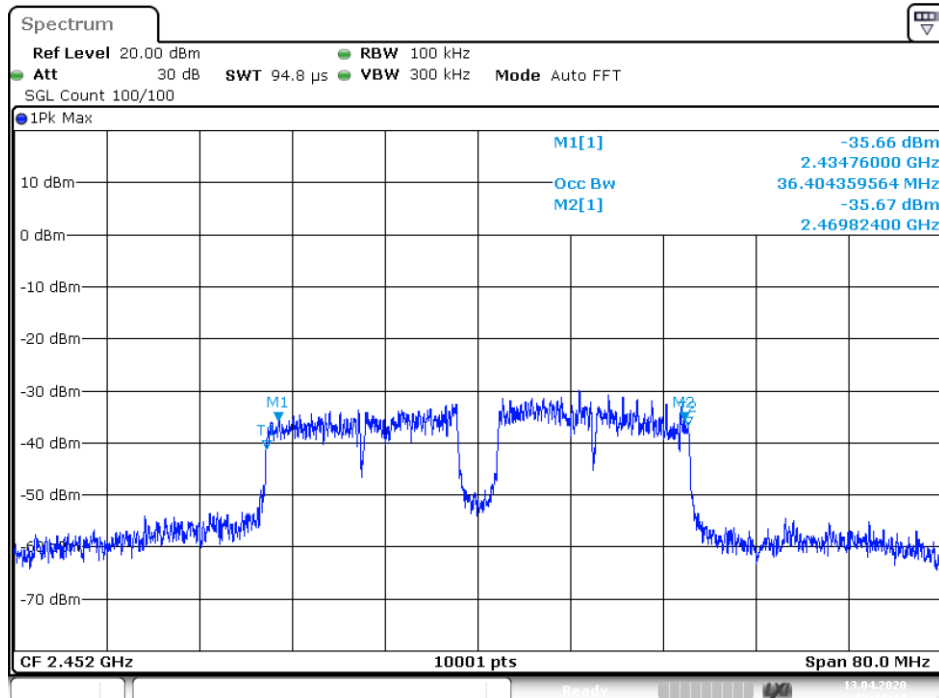

8. Maximum Peak Output Power Test

8.1 Measurement Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05r02. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used

EQUIPMENT TYPE	Manufacturer	Model No.	Serial Number	Calibrated until.
USB RF Power sensor	RadiPower	RPR3006W	17I00015SNO88	2020-11-28
RF Test Software	MAIWEI	MTS 8310	N/A	N/A

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

8.4 Peak Power output limit

The maximum peak power shall be less 1Watt.

8.5 Measurement Results

Spectrum Detector:	PK	Test Date :	Apr. 13, 2020
Test By:	Best	Temperature :	26°C
Test Result:	PASS	Humidity :	60%

Test Channel	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	14.90	14.14	13.95	13.52	30	Pass
Middle	14.84	14.58	14.41	13.79		
Highest	15.29	15.05	14.94	14.07		



9. Band Edge Test

9.1 Measurement Procedure

For Conducted Test

1. The testing follows FCC KDB Publication No. 5558074 D01 15.247 Meas Guidance v05r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For Radiated emission Test

1. The testing follows FCC KDB Publication No. 5558074 D01 15.247 Meas Guidance v05r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Repeat above procedures until all frequency measured were complete.


When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	AVG
Trace	Max hold

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2020-11-28
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2020-11-28


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

9.4 Measurement Results


1. Conducted Test

Please refer to the following pages.


Band Edge 802.11b 2412MHz Ant1 Emission

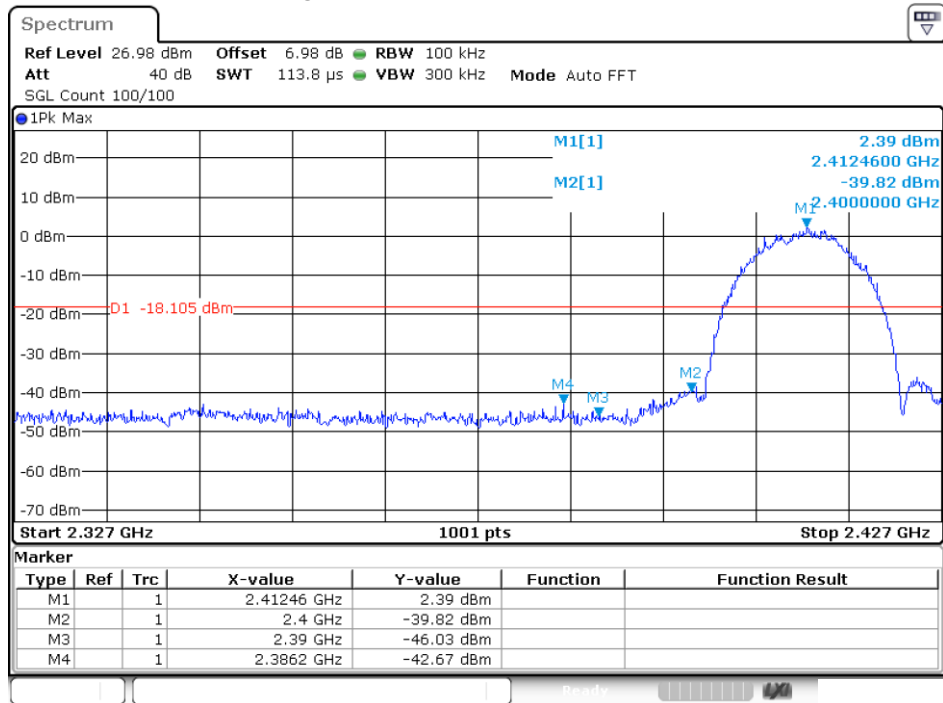


Band Edge 802.11b 2462MHz Ant1 Emission

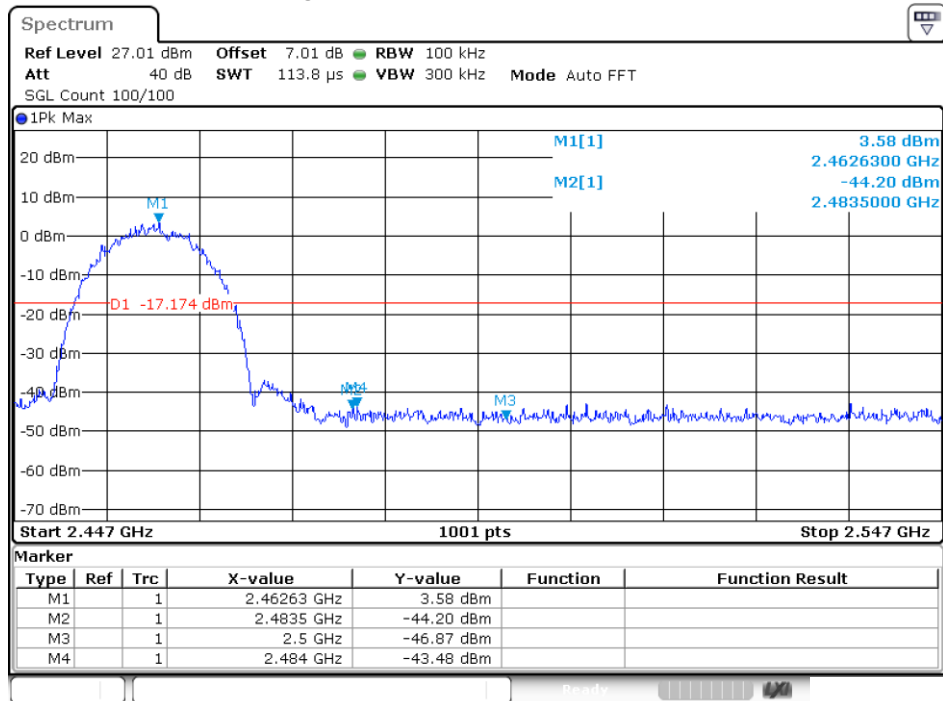


Band Edge 802.11g 2412MHz Ant1 Emission

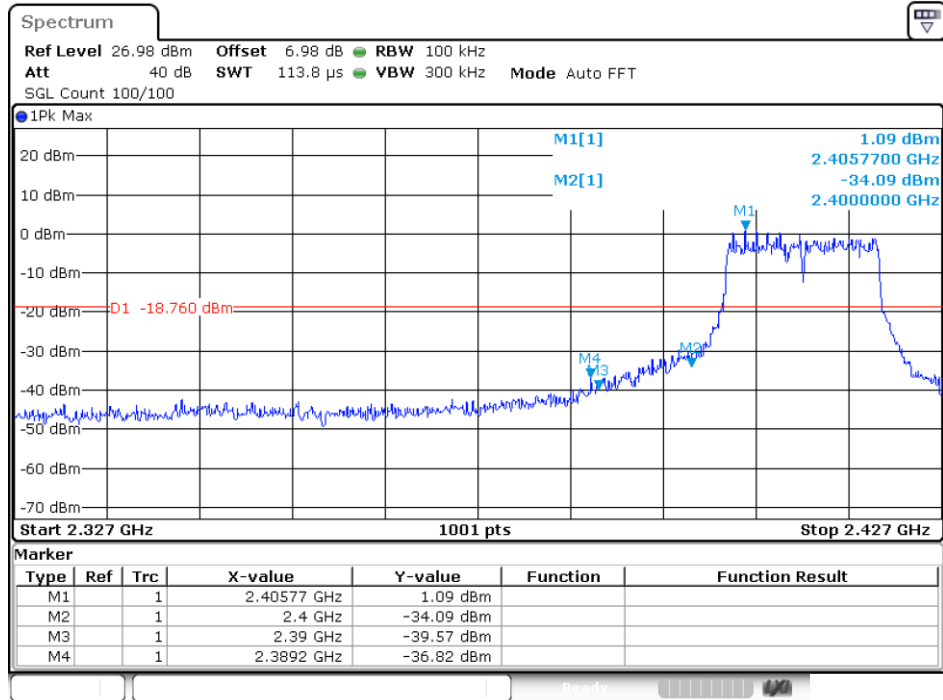


Band Edge 802.11g 2462MHz Ant1 Emission

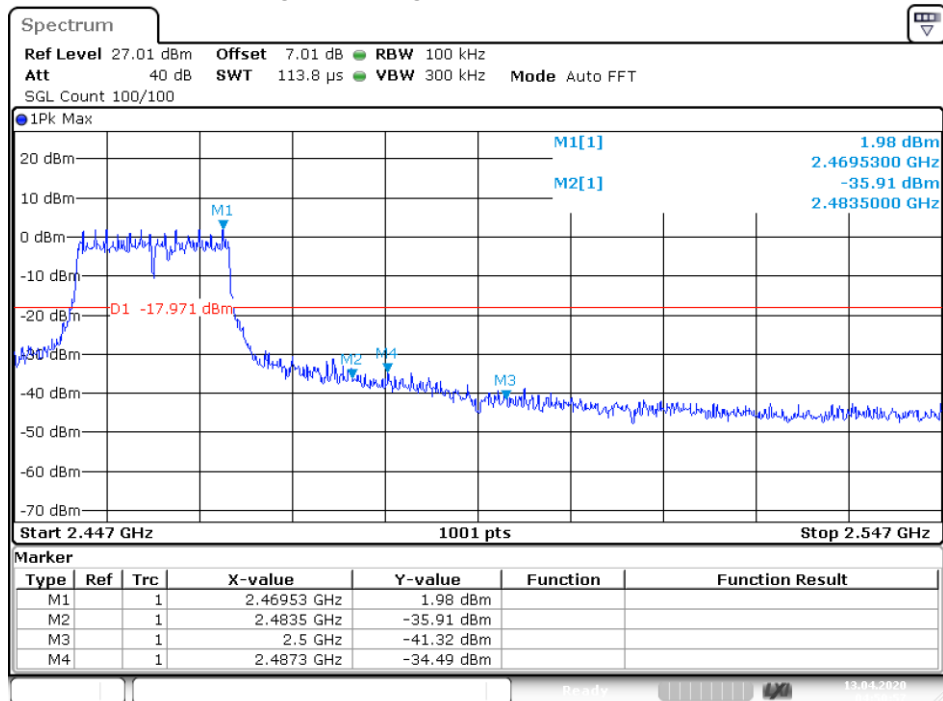


Band Edge 802.11n(HT20) 2412MHz Ant1 Emission

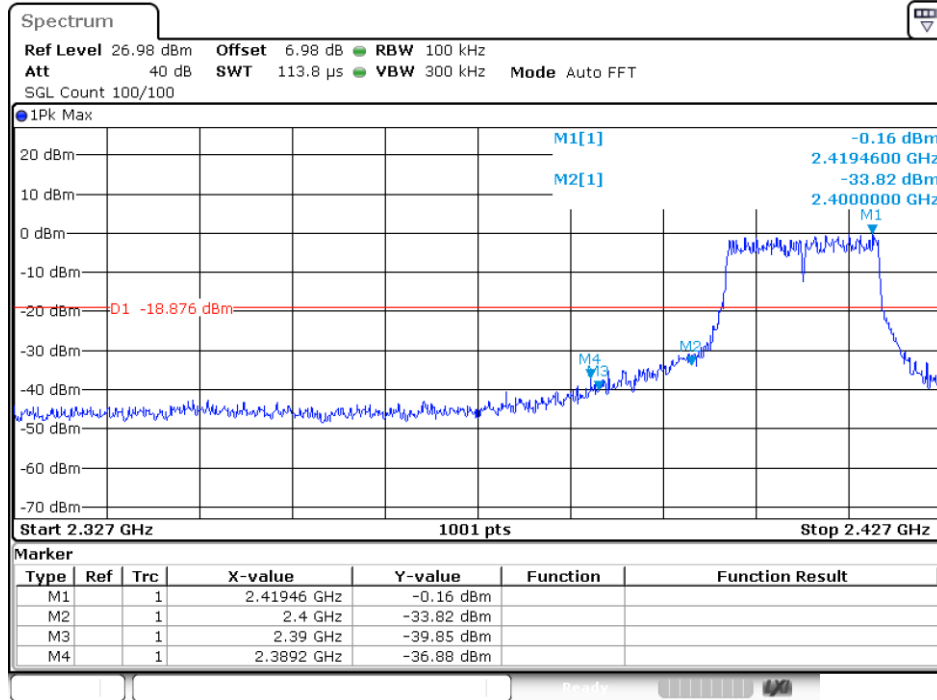


Band Edge 802.11n(HT20) 2462MHz Ant1 Emission

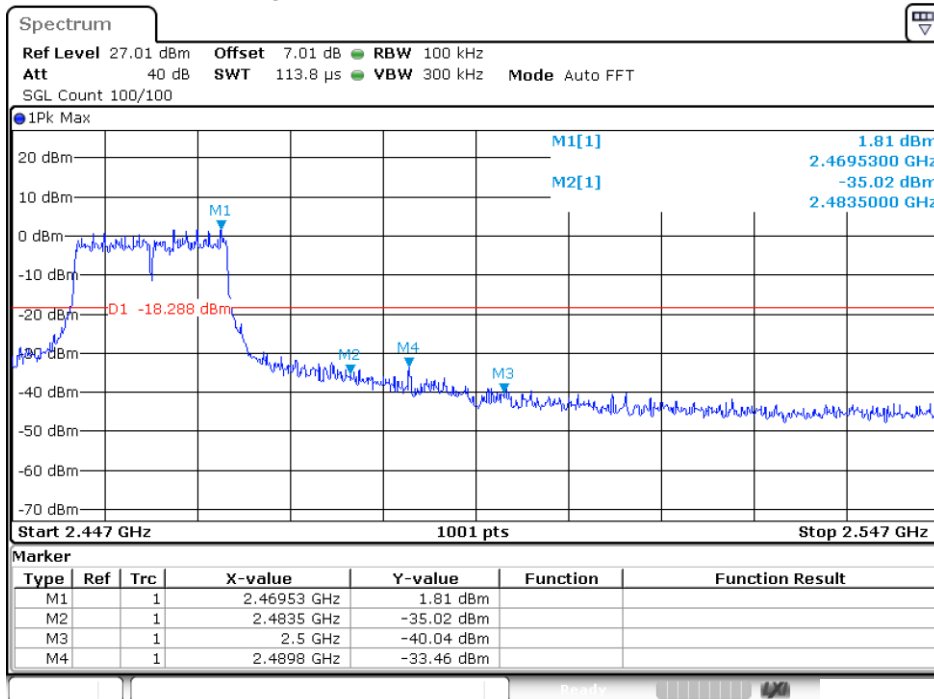

Band Edge 802.11n(HT40) 2422MHz Ant1 Emission

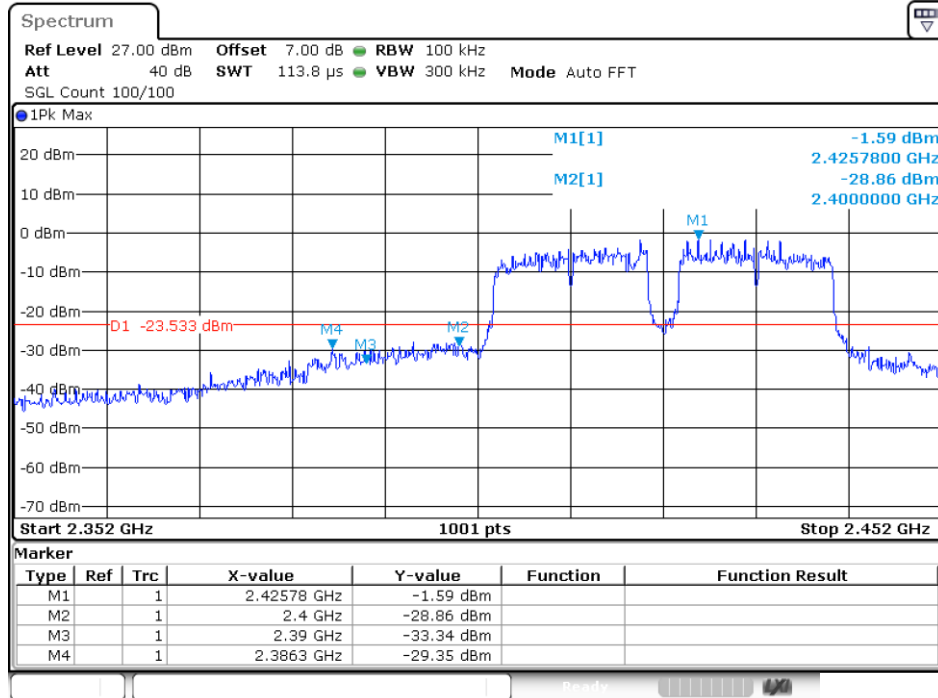

Band Edge 802.11n(HT40) 2452MHz Ant1 Emission

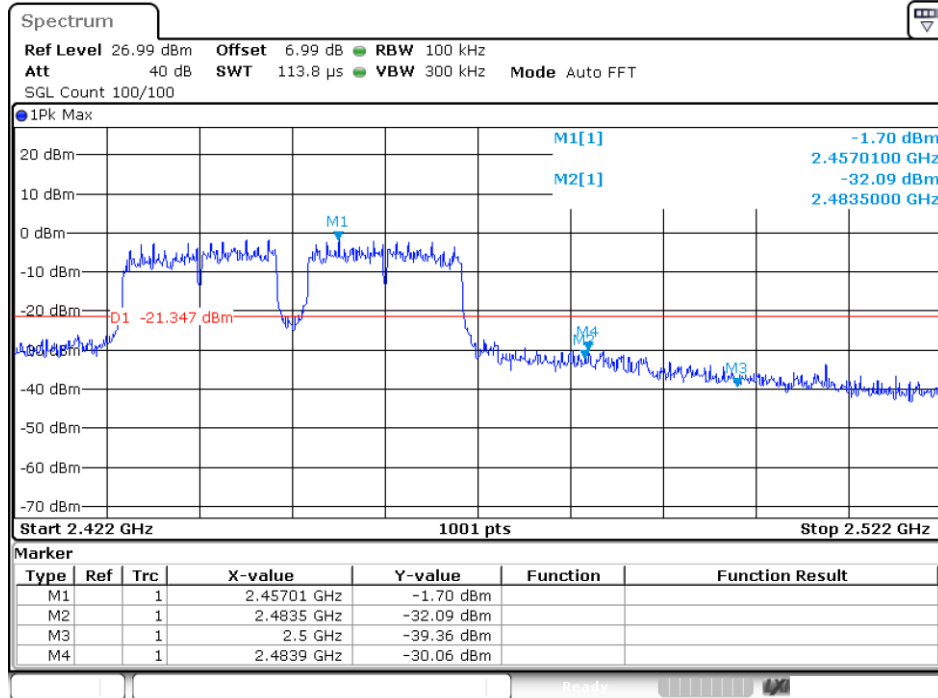



2. Radiated emission Test

Spectrum Detector:

PK/AV

Test Date :

Apr. 14, 2020

Test By:

Best

Temperature :

28 °C

Humidity :

65 %

IEEE 802.11b SISO Ant1										
Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<2400	H	84.36	63.69	-26.3	60.35	42.11	74	54	-13.65	-11.89
<2400	V	85.02	64.32	-26.1	59.55	39.49	74	54	-14.45	-14.51
>2483.5	H	84.36	65.47	-26.3	61.79	41.22	74	54	-12.21	-12.78
>2483.5	V	85.03	64.85	-26.1	60.36	39.08	74	54	-13.64	-14.92

IEEE 802.11g SISO Ant1										
Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<2400	H	84.02	63.36	-26.3	64.15	44.25	74	54	-9.85	-9.75
<2400	V	83.02	63.02	-26.1	60.69	40.69	74	54	-13.31	-13.31
>2483.5	H	84.13	63.18	-26.3	61.59	41.48	74	54	-12.41	-12.52
>2483.5	V	84.58	64.02	-26.1	60.33	42.79	74	54	-13.67	-11.21

IEEE 802.11n(HT20) SISO										
Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<2400	H	83.14	63.69	-26.3	62.97	44.02	74	54	-11.03	-9.98
<2400	V	83.69	64.02	-26.1	60.11	42.15	74	54	-13.89	-11.85
>2483.5	H	83.56	63.78	-26.3	62.46	42.34	74	54	-11.54	-11.66
>2483.5	V	84.03	64.58	-26.1	61.36	41.64	74	54	-12.64	-12.36



IEEE 802.11n(H420) SISO										
Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<2400	H	82.63	63.69	-26.3	62.97	44.02	74	54	-11.03	-9.98
<2400	V	81.12	64.02	-26.1	60.11	42.15	74	54	-13.89	-11.85
>2483.5	H	76.69	63.78	-26.3	62.46	42.34	74	54	-11.54	-11.66
>2483.5	V	75.99	64.58	-26.1	61.36	41.64	74	54	-12.64	-12.36

10. Power Density

10.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2020-11-28
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2020-11-28

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.2 Measuring Instruments and Setting

The following table is the setting of spectrum analyzer.


Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RB	3kHz
VB	10KHz
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

10.3 Test Procedures

The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05r02.

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set analyzer center frequency to DTS channel center frequency.
- c. Set the analyzer span to a minimum of 1.5 times the DTS bandwidth.
- d. Set the RBW \geq 3 kHz. Set the VBW \geq 3 x RBW.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level.

10.4 Block Diagram of Test Setup




10.5 Limit

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

10.6 Test Result


Spectrum Detector:	PK	Test Date :	Apr. 13, 2020
Test By:	Best	Temperature :	26°C
Test Result:	PASS	Humidity :	60%

IEEE 802.11b			
Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-11.86	8	Pass
2437	-10.80		
2462	-10.48		

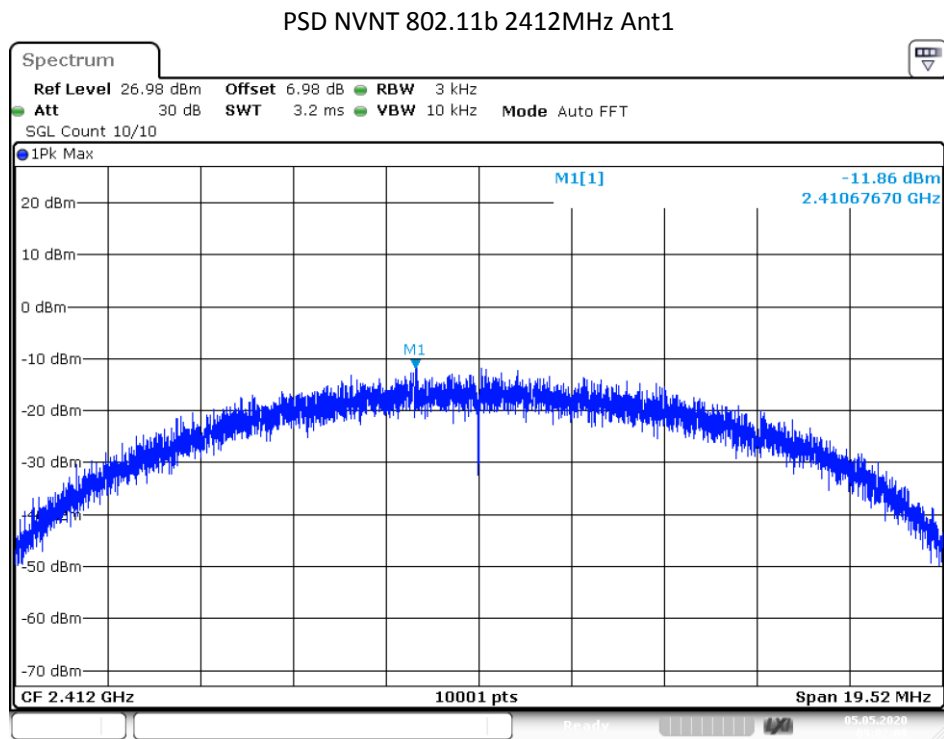


Date: 5.MAY.2020 09:02:08

PSD NVNT 802.11b 2437MHz Ant1

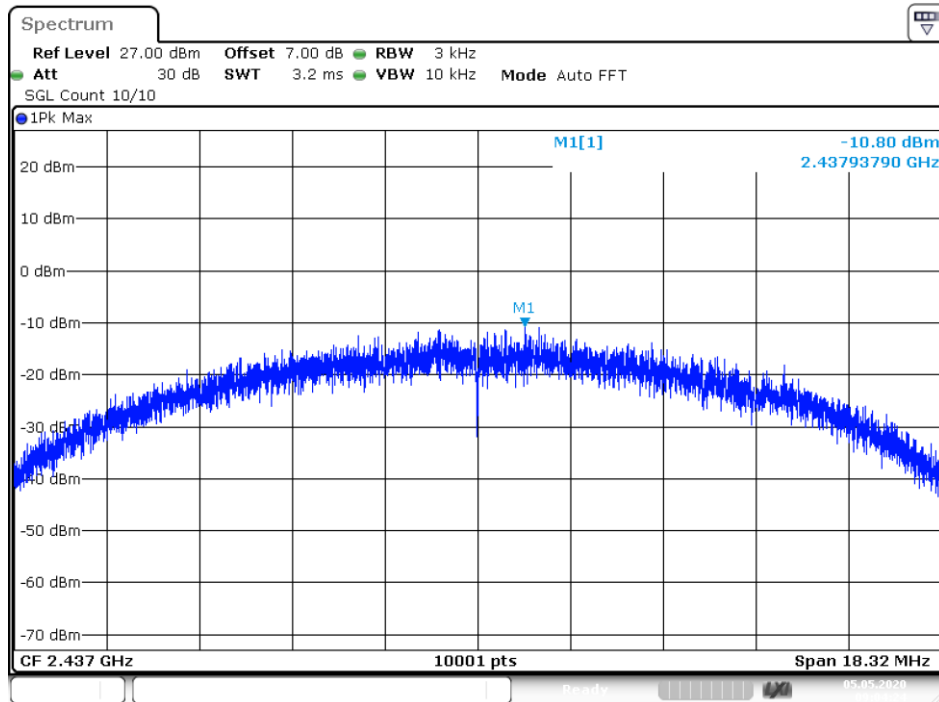


PSD NVNT 802.11b 2462MHz Ant1

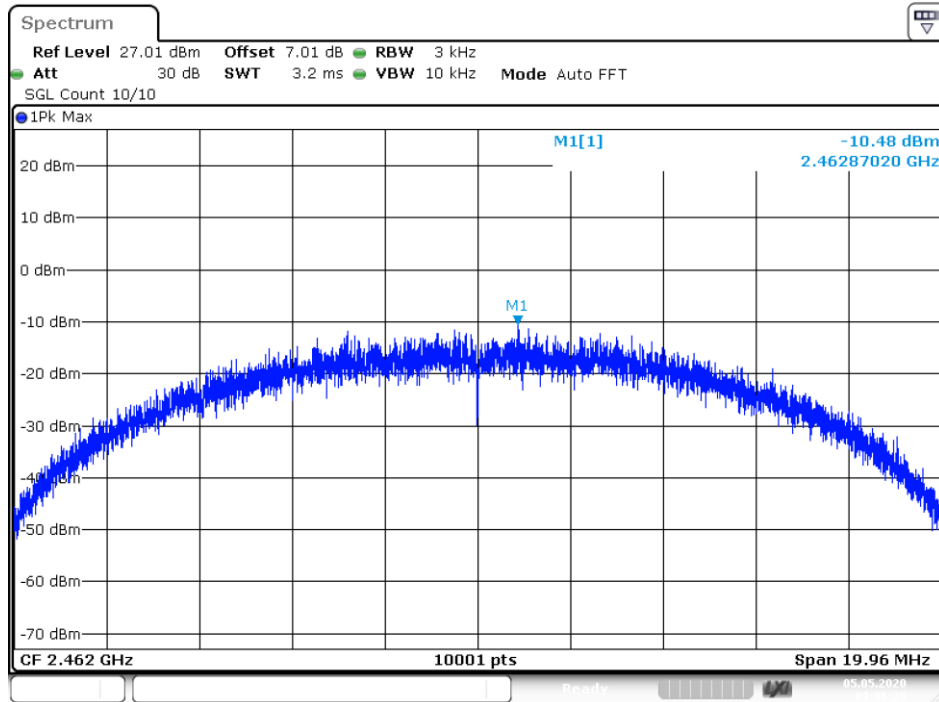


IEEE 802.11g			
Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-13.81	8	Pass
2437	-12.97		
2462	-13.58		

PSD NVNT 802.11g 2412MHz Ant1

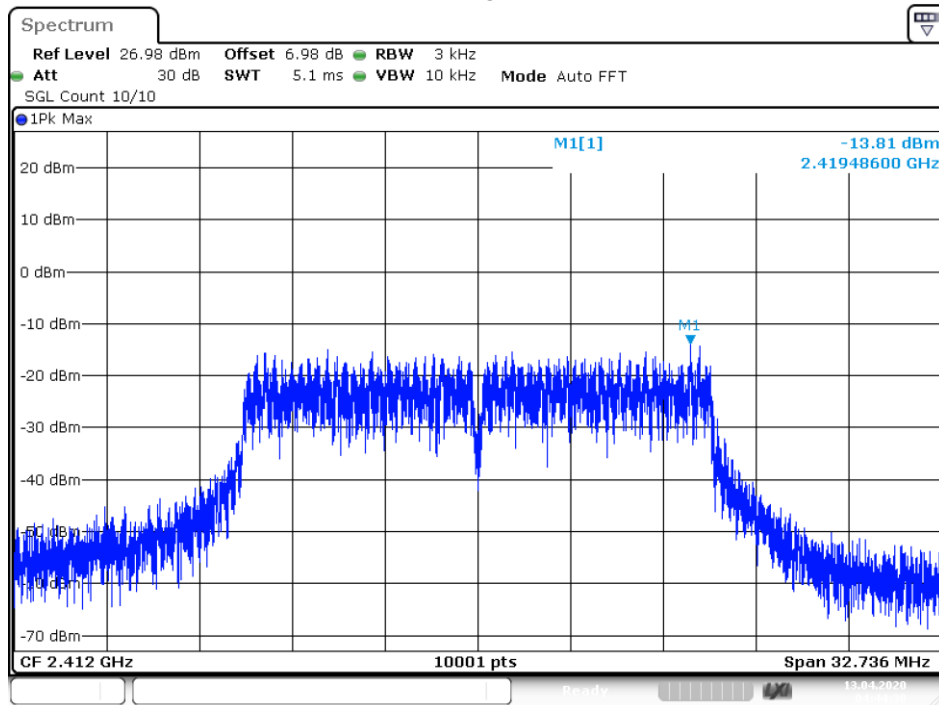


Date: 13.APR.2020 04:44:29

PSD NVNT 802.11g 2437MHz Ant1

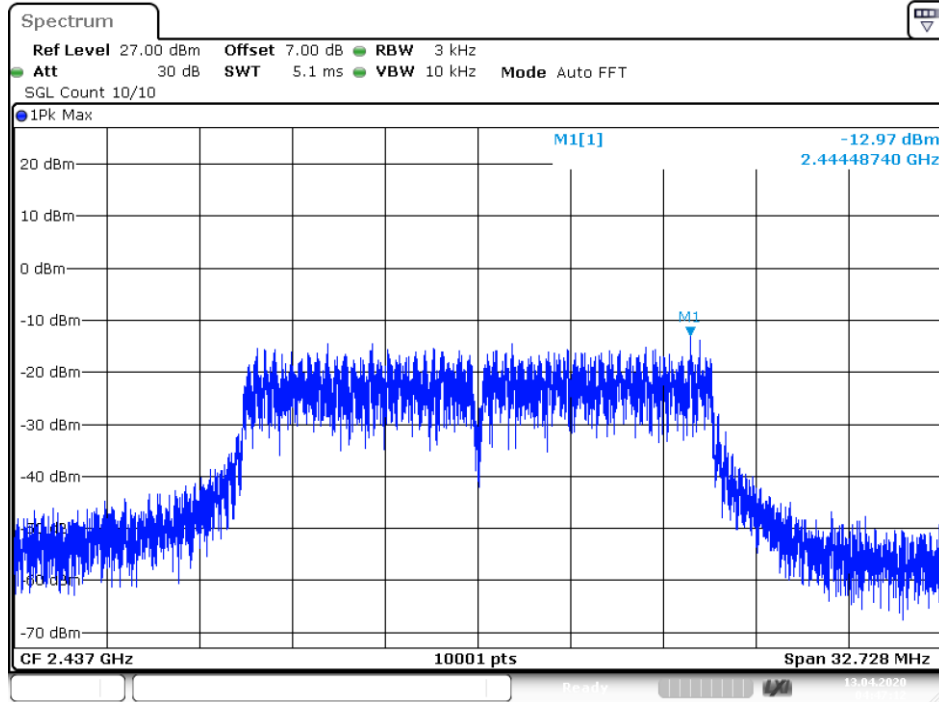


PSD NVNT 802.11g 2462MHz Ant1

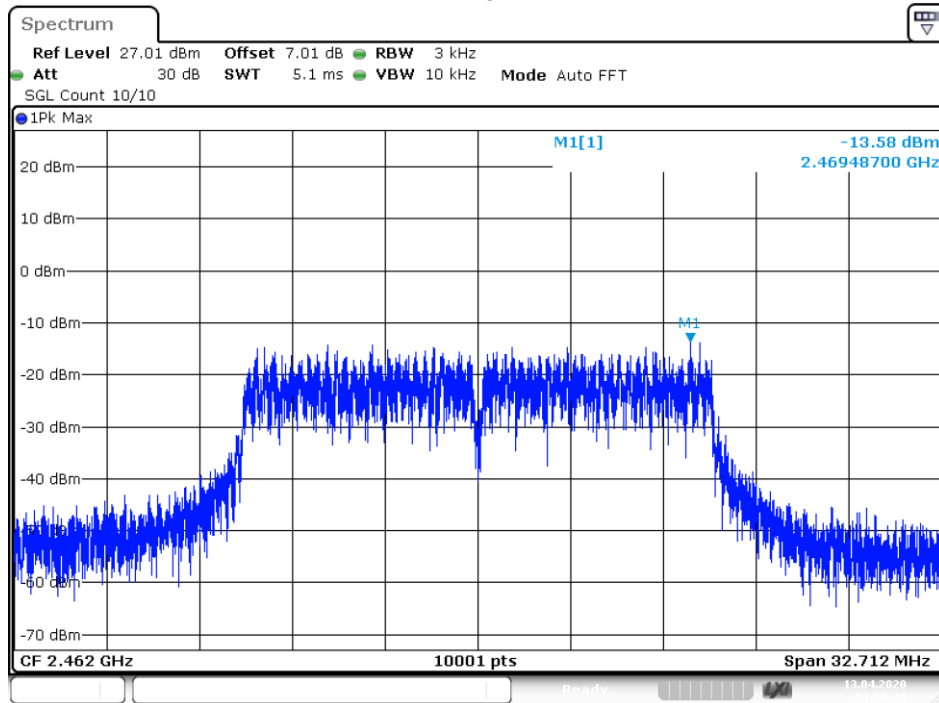


IEEE 802.11n(HT20)			
Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2412	-14.25	8	Pass
2437	-13.79		
2462	-13.25		

PSD NVNT 802.11n(HT20) 2412MHz Ant1

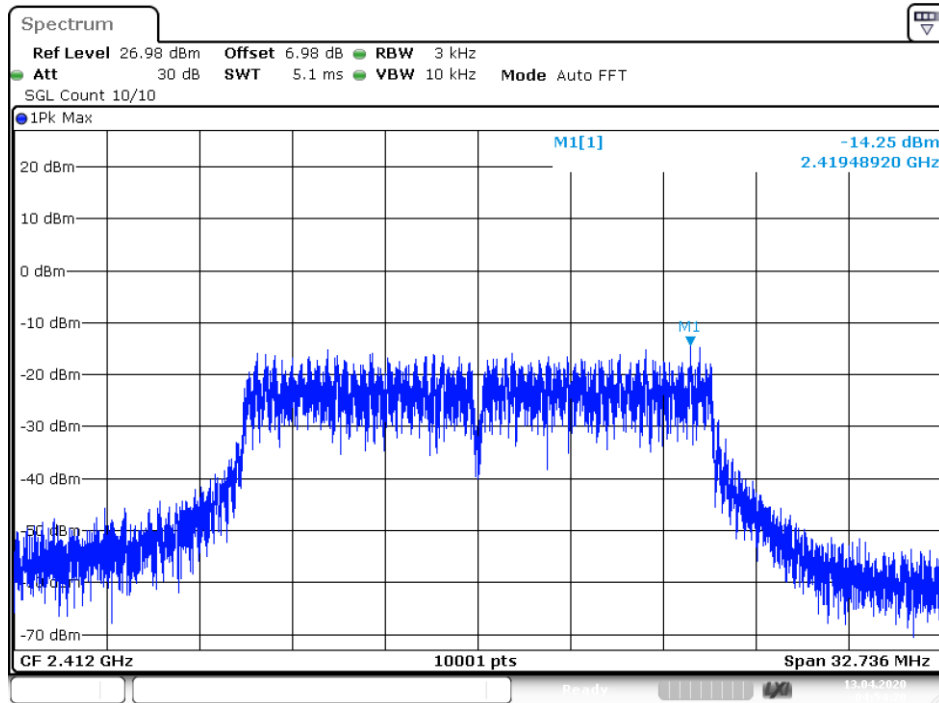


Date: 13.APR.2020 04:54:20

PSD NVNT 802.11n(HT20) 2437MHz Ant1

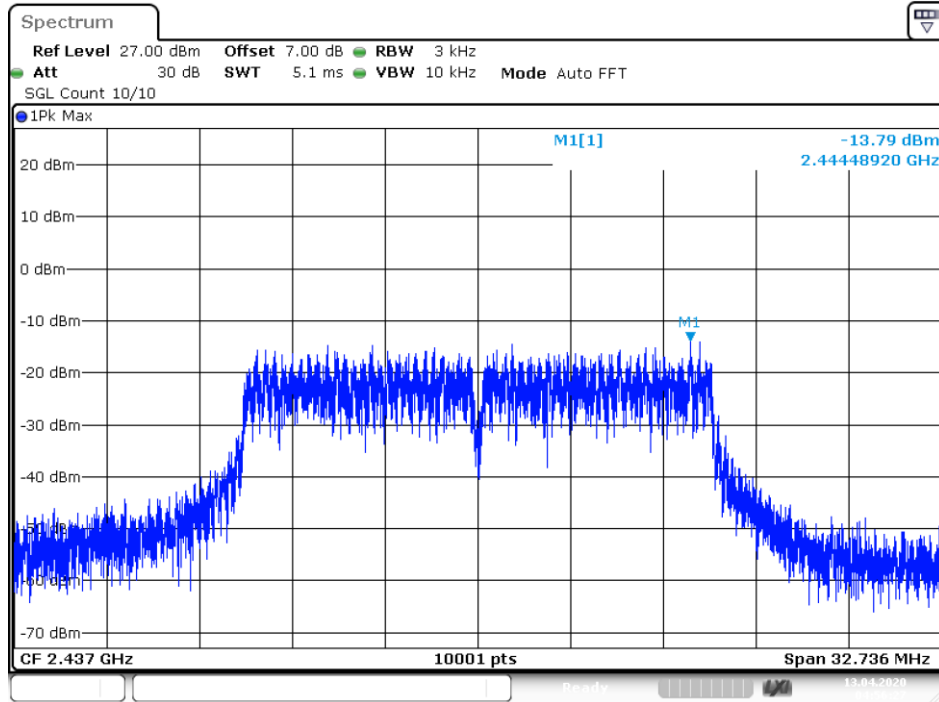


PSD NVNT 802.11n(HT20) 2462MHz Ant1

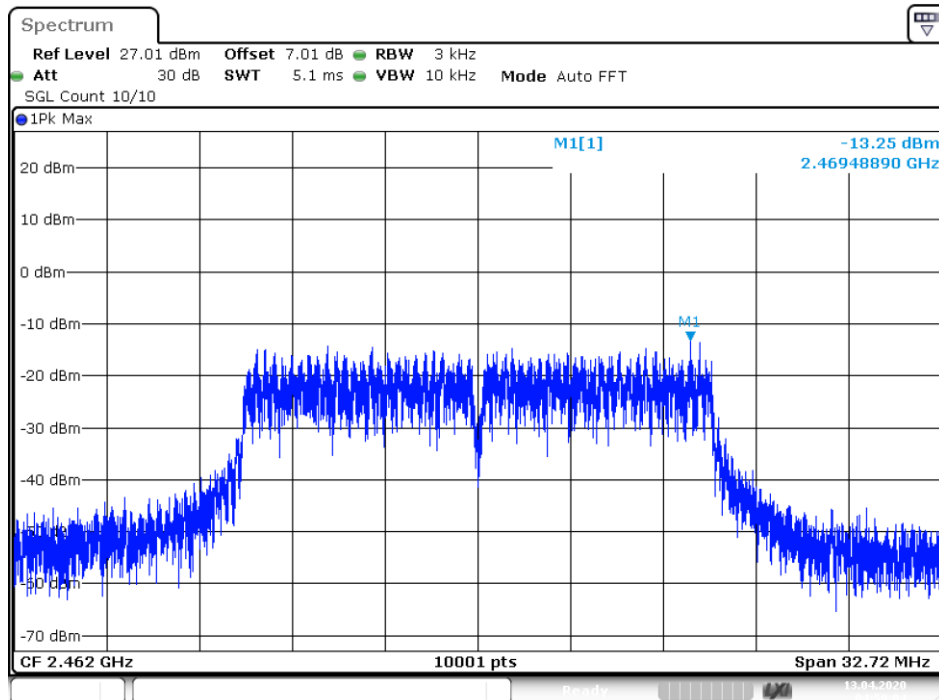


IEEE 802.11n(HT40)			
Channel frequency (MHz)	Measurement level (dBm)	Limit(dBm)	Result
2422	-17.40	8	Pass
2437	-16.97		
2452	-16.96		

PSD NVNT 802.11n(HT40) 2422MHz Ant1

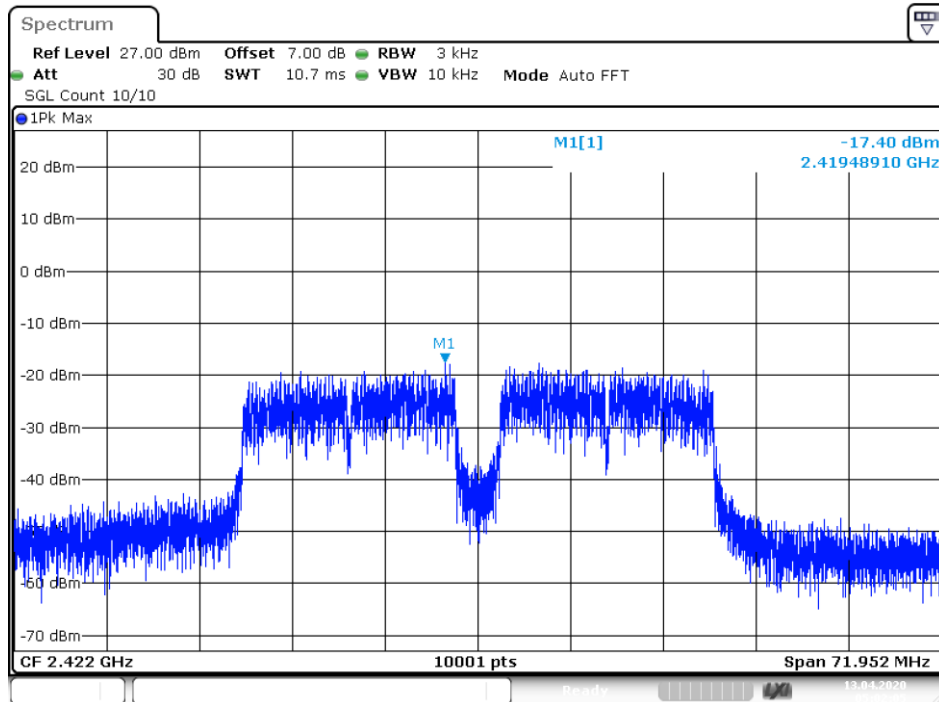


Date: 13.APR.2020 05:02:05

PSD NVNT 802.11n(HT40) 2437MHz Ant1

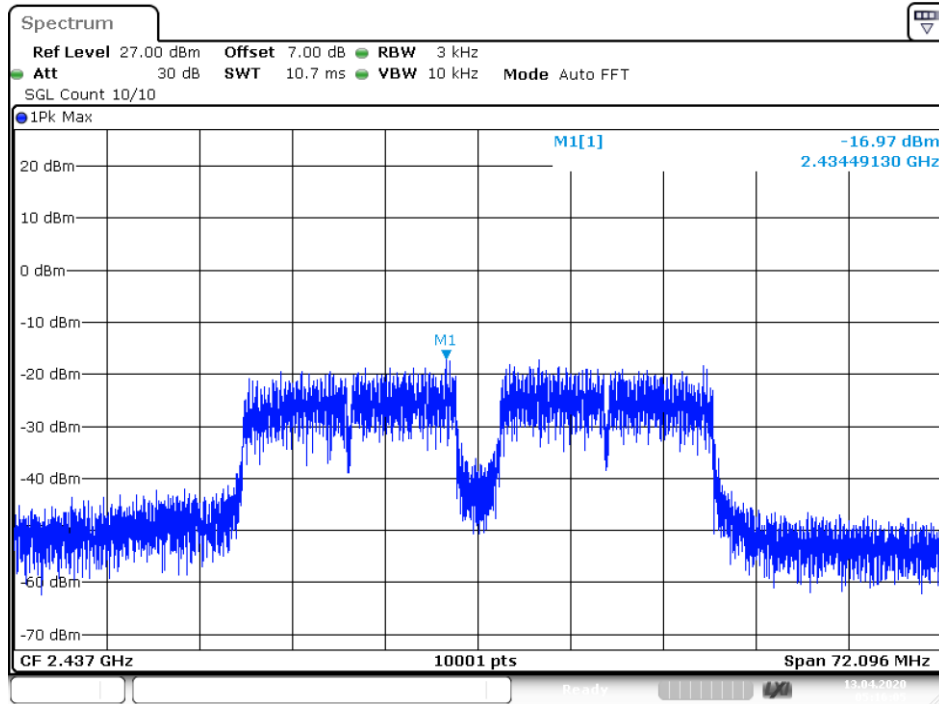

Date: 13.APR.2020 05:16:06

PSD NVNT 802.11n(HT40) 2452MHz Ant1

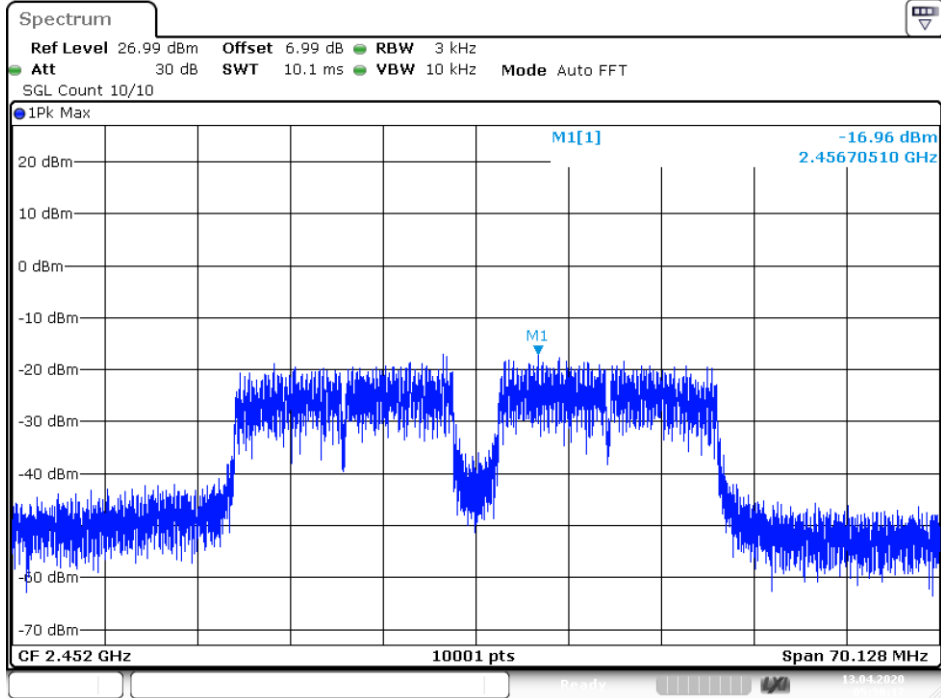

Date: 13.APR.2020 05:30:17

11. Antenna Port Emission

11.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2020-11-28
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2020-11-28
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2020-11-28

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

11.2 Measuring Instruments and Setting

The following table is the setting of spectrum analyzer.


Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

11.3 Test Procedures

The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05r02 .

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, Middle, and high channels, the limit was determined by attenuation 20dB of the RF peak power output.

11.4 Block Diagram of Test setup




11.5 Test Result

PASS.


Please refer to following pages.




Tx. Spurious 802.11b 2412MHz Ant1 Emission

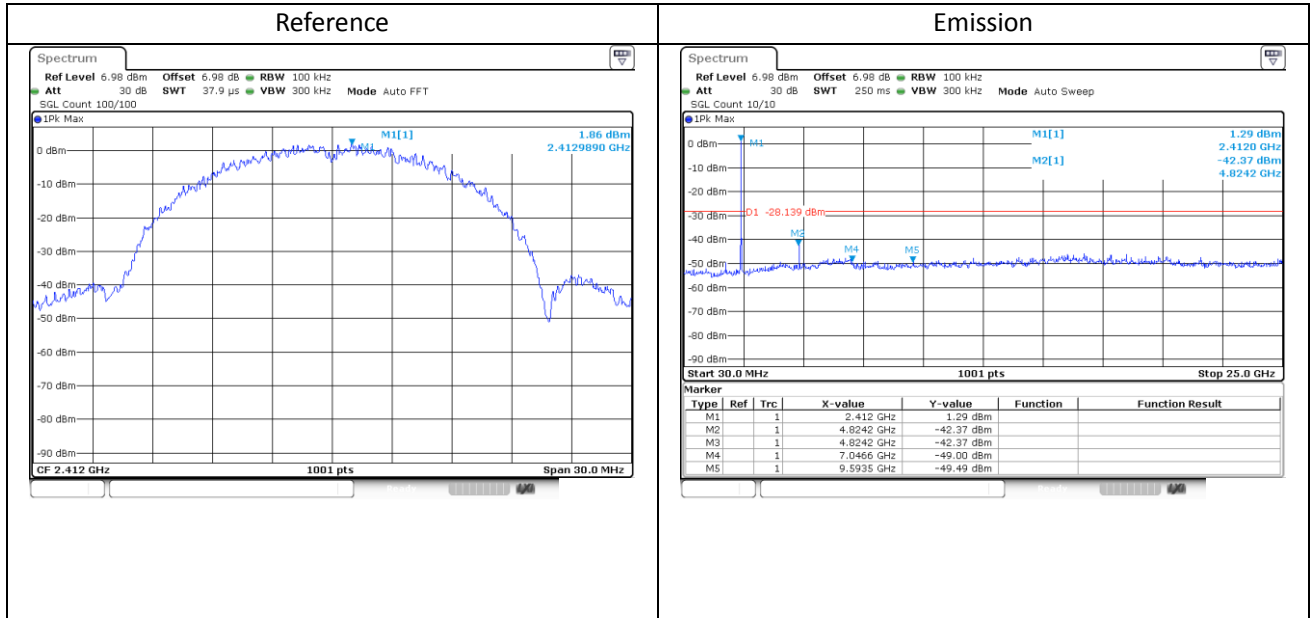


Tx. Spurious 802.11b 2437MHz Ant1 Emission

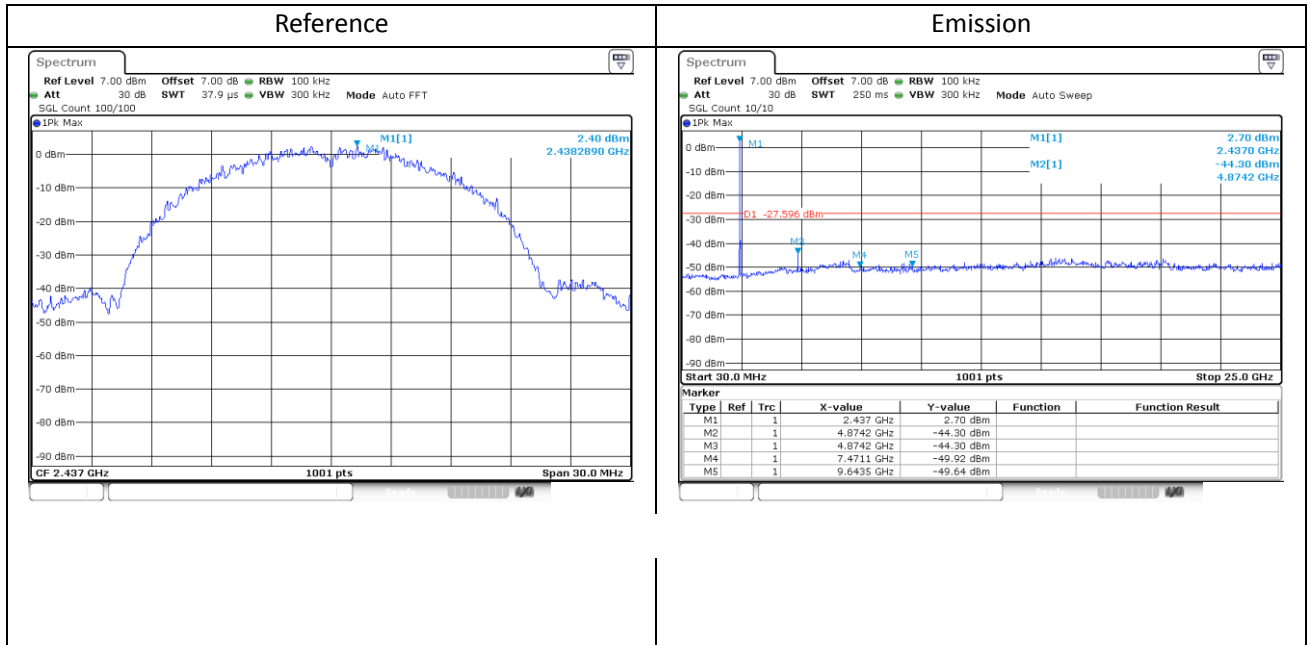


Tx. Spurious 802.11b 2462MHz Ant1 Emission

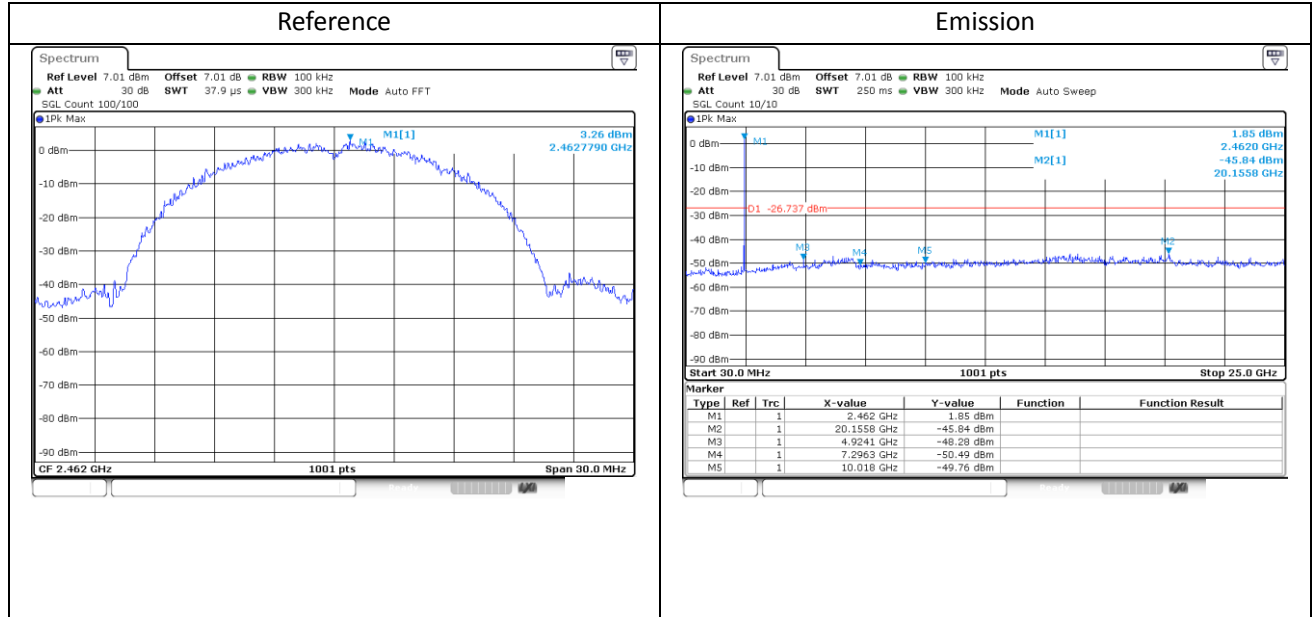


Tx. Spurious 802.11g 2412MHz Ant1 Emission

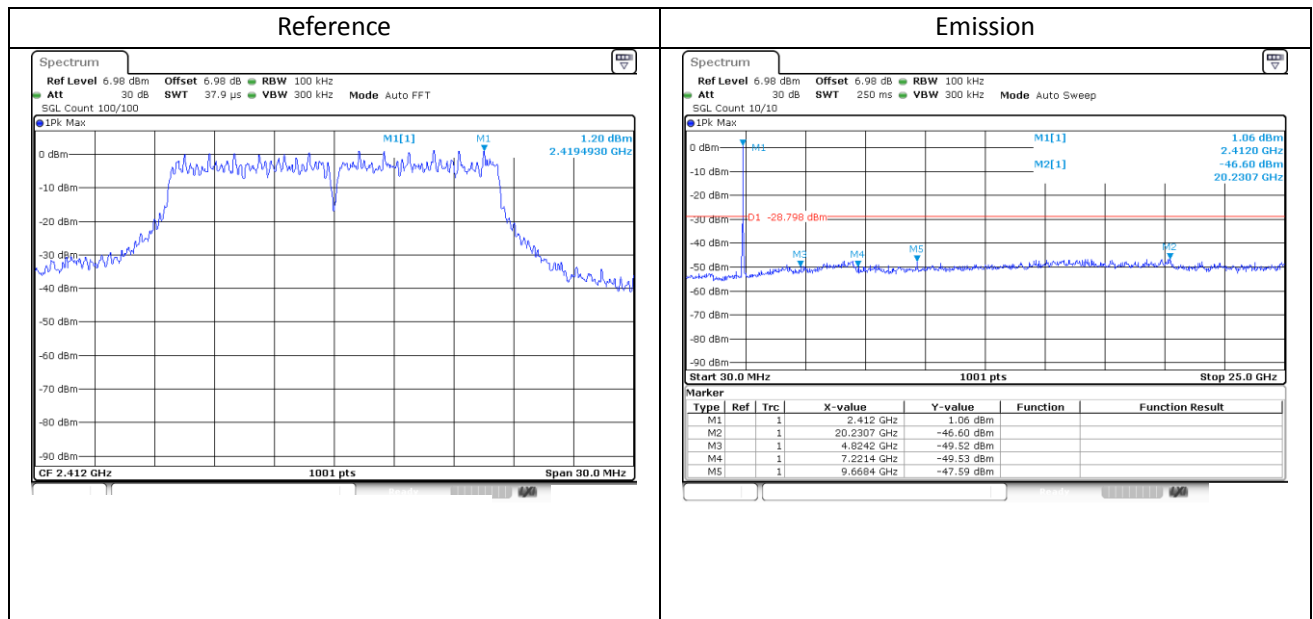


Tx. Spurious 802.11g 2437MHz Ant1 Emission

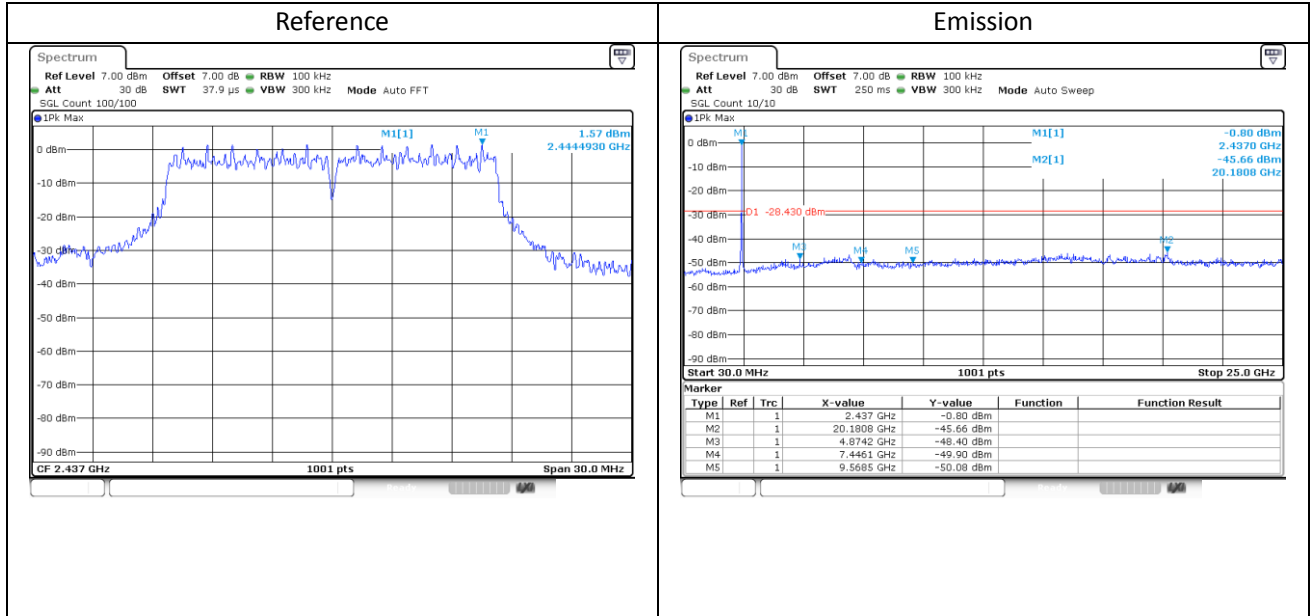


Tx. Spurious 802.11g 2462MHz Ant1 Emission

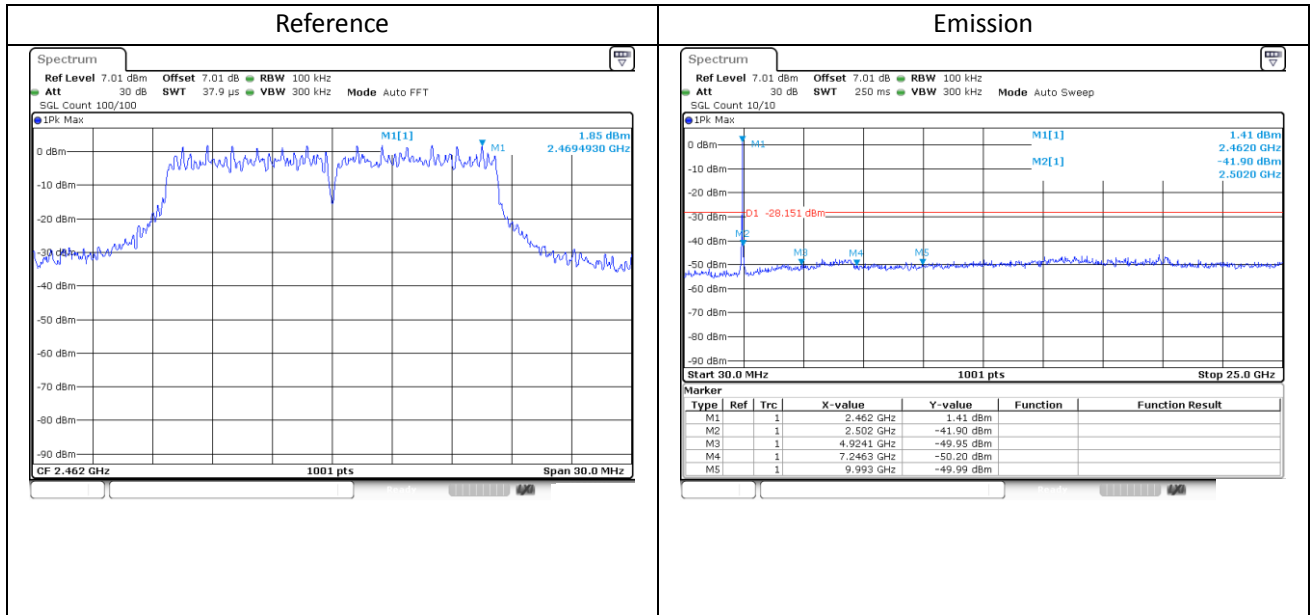


Tx. Spurious 802.11n(HT20) 2412MHz Ant1 Emission

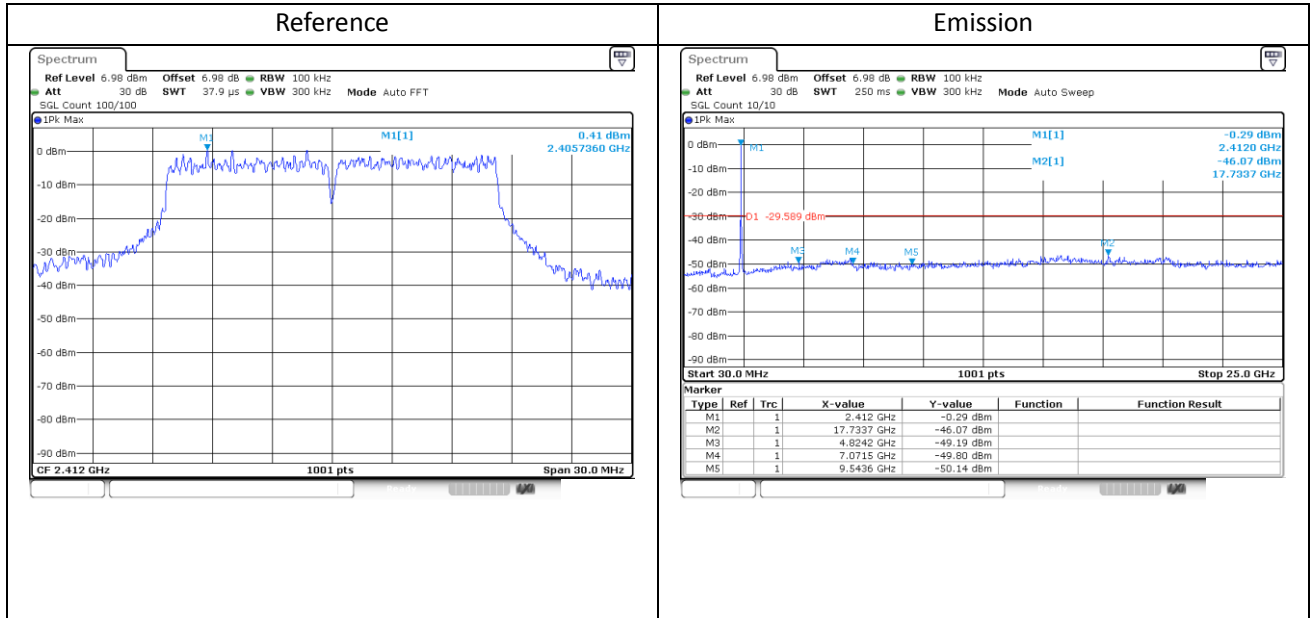


Tx. Spurious 802.11n(HT20) 2437MHz Ant1 Emission

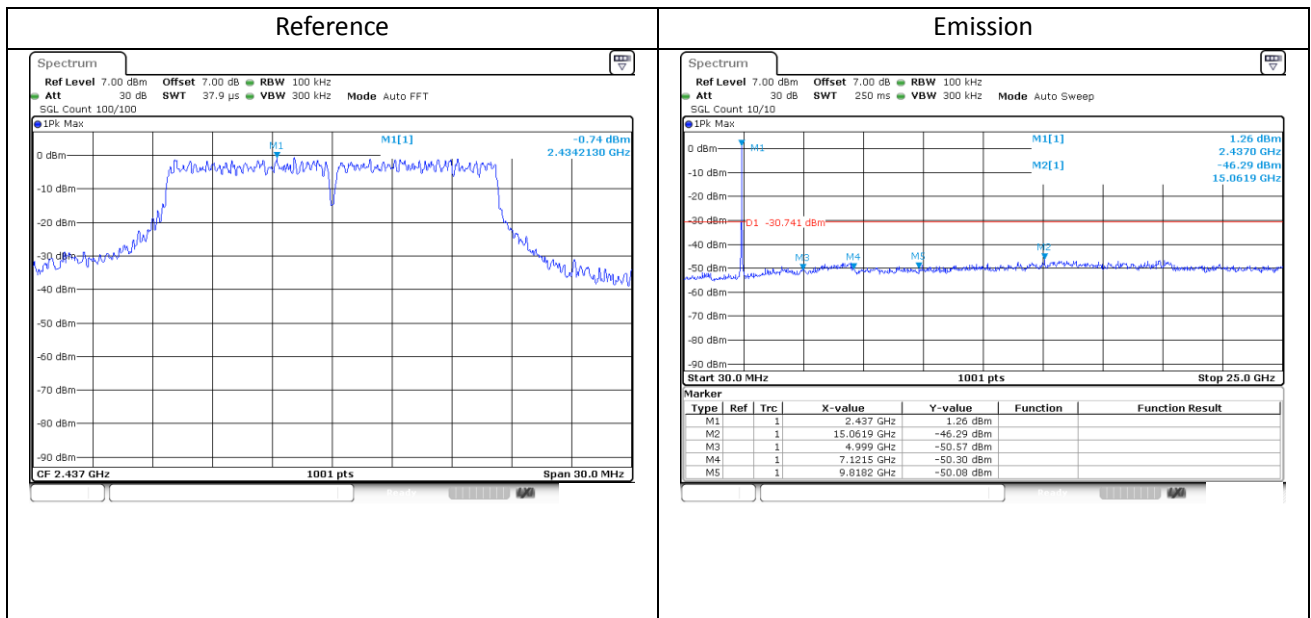


Tx. Spurious 802.11n(HT20) 2462MHz Ant1 Emission

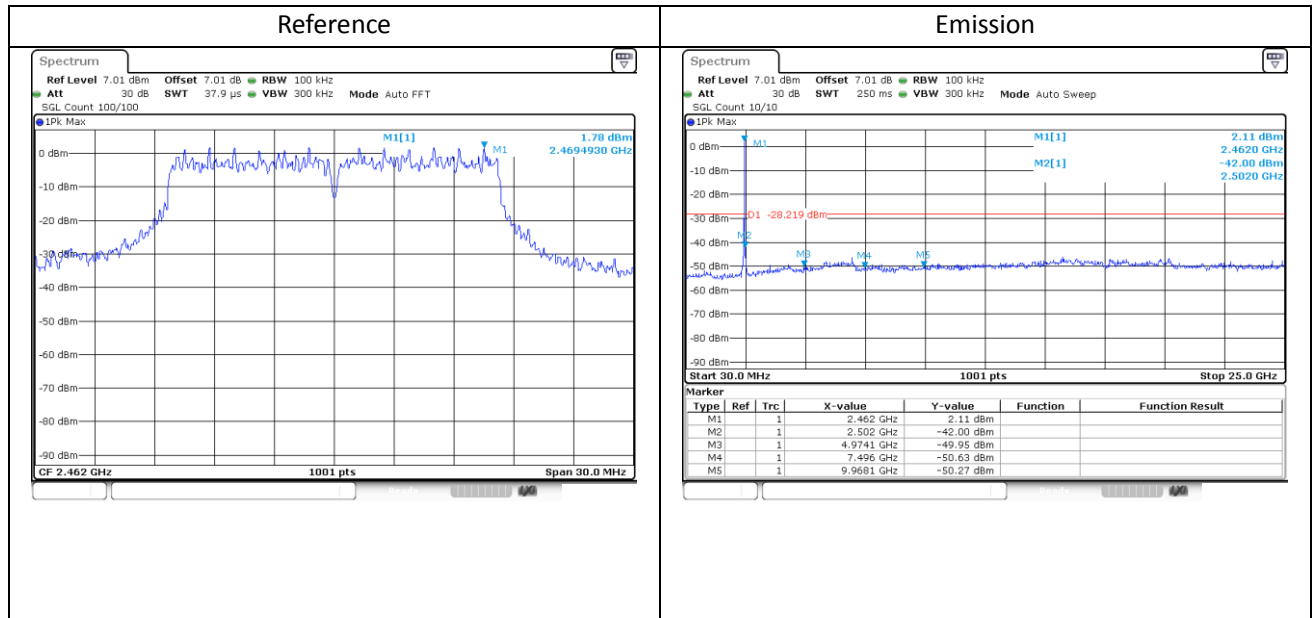


Tx. Spurious 802.11n(HT40) 2422MHz Ant1 Emission

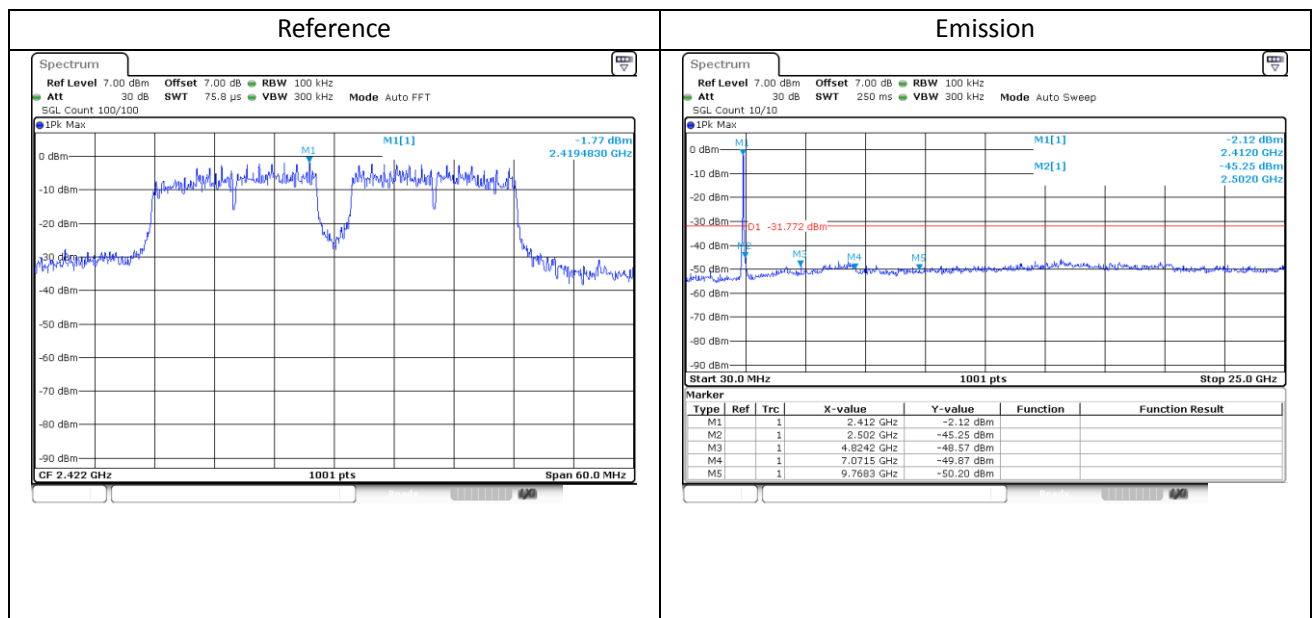

Tx. Spurious 802.11n(HT40) 2437MHz Ant1 Emission

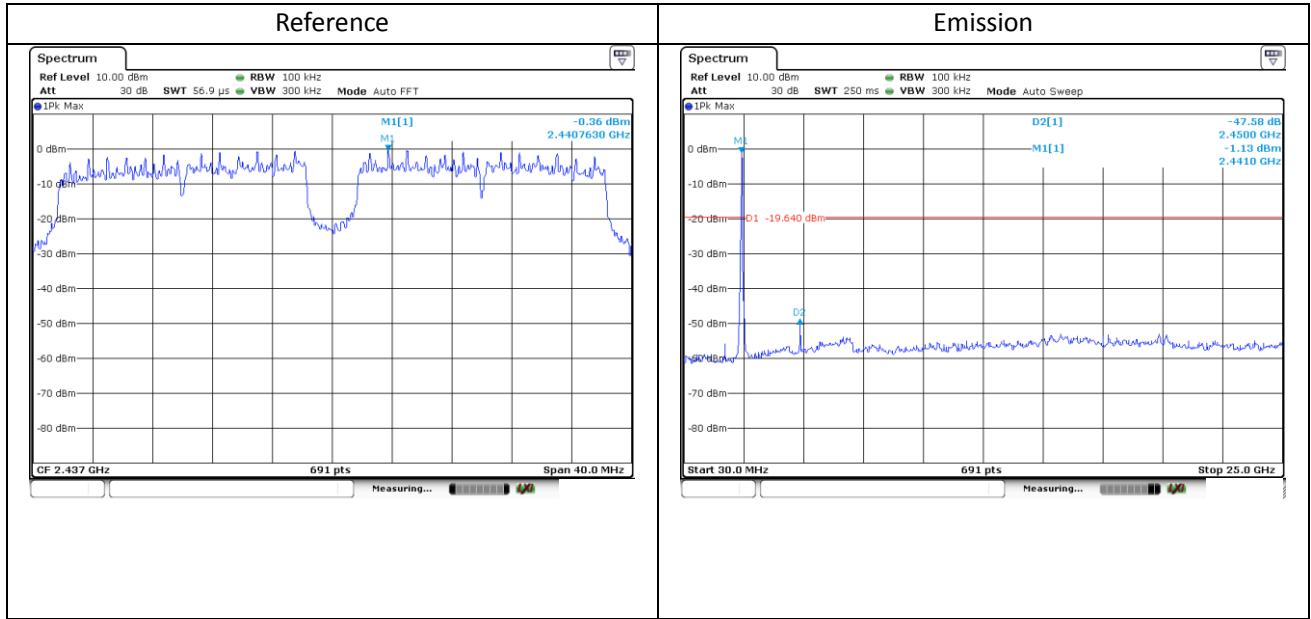

Tx. Spurious 802.11n(HT40) 2452MHz Ant1 Emission

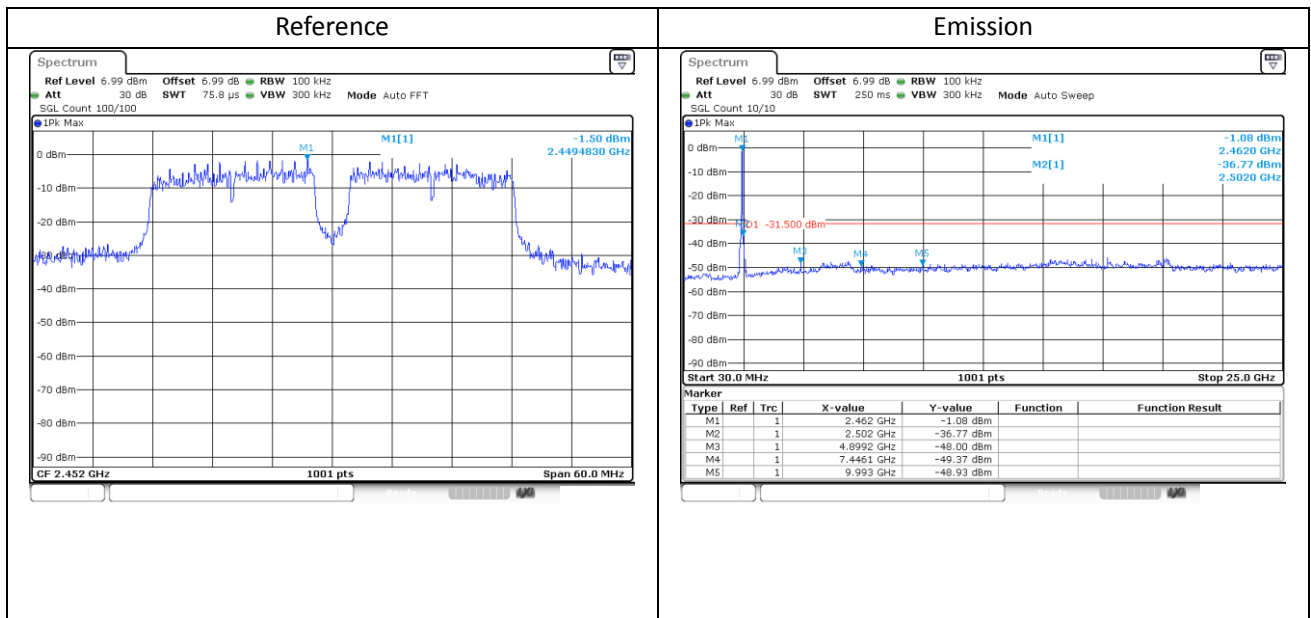

12. Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The module is suitable for host antenna with gain is 6dBi, The Auxiliary test antenna is FPC antenna.

13. Photos of EUT

Please refer to external photos.pdf and internal photos.pdf.