

**FCC/IC - TEST REPORT**

Report Number : **68.940.21.0008.01** Date of Issue: February 2, 2021

Model : **RD030015**

Product Type : **LED LINKABLE SHOPLIGHT**

Applicant : **Winplus Co., Ltd.**

Address : **Suites 6-11, 7th Floor, Corporation Park, 11 On Lai Street, Shatin,**  
**Hong Kong**

Manufacturer : **ADC Solutions Hardware, LLC**

Address : **2975 Red Hill Ave., Ste. 100, Costa Mesa, CA 92626**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **27**

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.*

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval*



# 1 Table of Contents

1 Table of Contents.....	2
2 Details about the Test Laboratory.....	3
3 Description of the Equipment Under Test .....	4
4 Summary of Test Standards.....	5
5 Summary of Test Results .....	6
6 General Remarks .....	7
7 Test setups .....	8
8 Technical Requirement.....	9
8.1 Conducted Emission .....	9
8.2 Field strength of emissions and Restricted bands .....	12
8.3 Out of Band Emissions .....	17
8.4 20dB Bandwidth .....	22
9 Test equipment lists .....	26
10 System Measurement Uncertainty .....	27



## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12&13, Zhiheng Wisdomland Business Park,  
Nantou Checkpoint Road 2, Nanshan District,  
Shenzhen City, 518052,  
P. R. China

FCC Registration Number: 514049

FCC Designation Number: CN5009

ISED#: 10320A

CAB identifier: CN0077

Telephone: 86 755 8828 6998  
Fax: 86 755 8828 5299

### 3 Description of the Equipment Under Test

#### Description of the Equipment Under Test

Product/PMN: LED LINKABLE SHOPLIGHT

Model no./HVIN: RD030015

HMN: 46" LED LINKABLE SHOP LIGHT

FCC ID: WUI-RD030015

IC: 7297A-RD030015

Options and accessories: NIL

Ratings: 7.5-12VDC (Supplied by 46" LED LINKABLE SHOP LIGHT)

RF Transmission Frequency: 5757MHz-5853MHz

Modulation: FMCW

Antenna Type: Integrated Antenna

Antenna Gain: 5.42dBi

Description of the EUT: The product is a LED LINKABLE SHOPLIGHT that operated at 5.8GHz, The TX and RX range is 5757MHz-5853MHz

#### Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	RATINGS	MODEL NO.
46" LED LINKABLE SHOP LIGHT	WINPLUS	120VAC/60Hz, 48W	LM030015

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2019 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5, Amendment 1, March 2019	General Requirements and Information for the Certification of Radio Apparatus
RSS-210 Issue 10 December 2019	RSS-210 — Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

All the test methods were according to ANSI C63.10-2013.

## 5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C 15.249, RSS-Gen, RSS-210					
Test Condition	Pages	Test Site	Test Result		
			Pass	Fail	N/A
15.207 & RSS-Gen A8.8 Conducted emission AC power port	9	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.205(a), §15.209(a), §15.249(a), §15.249(c) & RSS-210 B.10, RSS-GEN 6.13/8.9/8.10 Field strength of emissions and Restricted bands	12	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.249(d), RSS-210 B.10 Out of band emissions	17	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
FCC §15.215(c) 20dB bandwidth & RSS-Gen 6.7 99% Occupied Bandwidth	22	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203, RSS-GEN 6.8 Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Remark 1: N/A- Not Applicable;

Note 1: The EUT used an integral PCB antenna, which gain is 5.42dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.

Note 2: The radio module does not have shielded cover, so it was tested with a host for this modular approve application, the host information as below:

Company name: Winplus Co., Ltd.

Product/PMN: 46" LED LINKABLE SHOP LIGHT

Model no./HVIN: LM030015

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: WUI-RD030015 and IC: 7297A-RD030015 complies with Section 15.207, 15.205, 15.209, 15.249 of the FCC Part 15, Subpart C Rules; RSS-Gen Issue 5 and RSS-210 issue 10.

### SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: January 06, 2021

Testing Start Date: January 06, 2021

Testing End Date: January 26, 2021

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:

Tested by:



Dawi Xu  
EMC Project Manager



Henry Chen  
EMC Project Engineer




Louise Liu  
EMC Test Engineer

## 7 Test setups


### 7.1 AC Power Line Conducted Emission test setups

#### AC Power Line Conducted Emission test setups

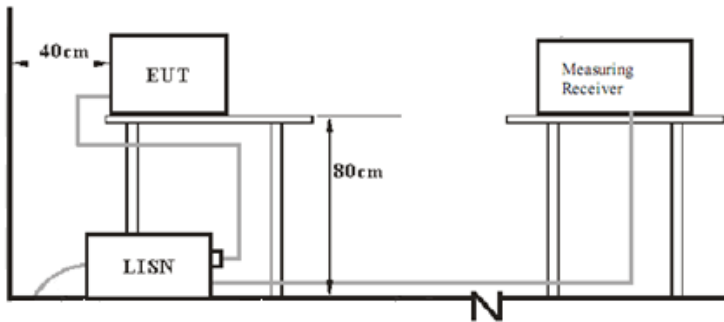


### 7.2 Radiated test setups

#### Below 1GHz

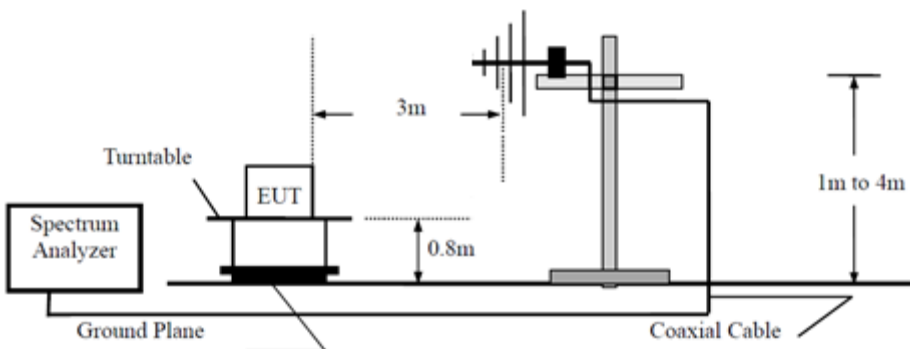

#### Above 1GHz

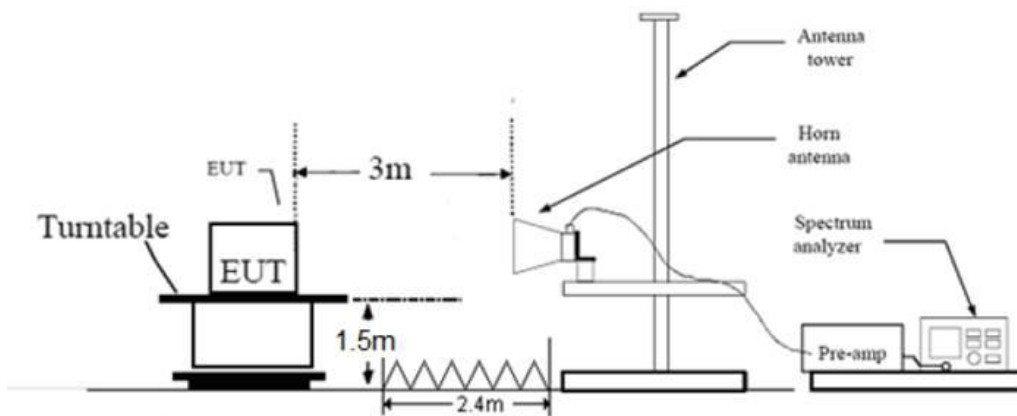

## 8 Technical Requirement

### 8.1 Conducted Emission

#### Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


#### Limit

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

\*Decreasing linearly with logarithm of the frequency.

## Conducted Emission

Product Type : LED LINKABLE SHOPLIGHT  
 M/N : RD030015  
 Operating Condition : Normal working with transmitting  
 Test specification : Live  
 Comment : AC 120V/60Hz (Powered by 46" LED LINKABLE SHOP LIGHT)

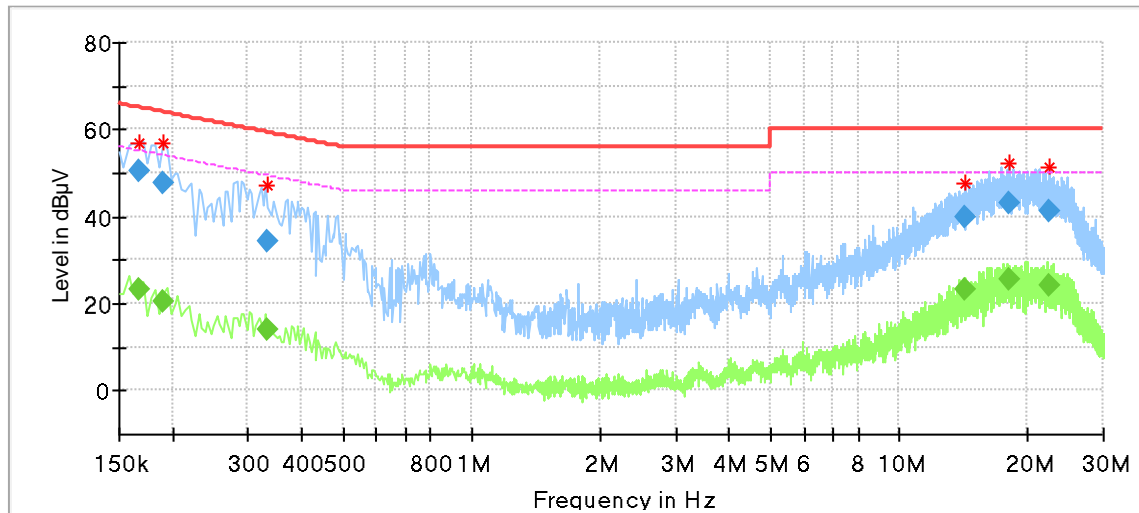

## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.166500	56.89	---	65.36	8.47	L1	9.64
0.189500	56.85	---	64.04	7.19	L1	9.64
0.334500	47.30	---	59.45	12.15	L1	9.64
14.289500	47.89	---	60.00	12.11	L1	9.89
17.997500	52.48	---	60.00	7.52	L1	9.96
22.370500	51.50	---	60.00	8.50	L1	10.06

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.166500	---	23.01	55.13	32.12	L1	9.64
0.166500	50.55	---	65.13	14.58	L1	9.64
0.189500	---	20.41	54.06	33.65	L1	9.64
0.189500	47.83	---	64.06	16.23	L1	9.64
0.334500	---	14.22	49.34	35.12	L1	9.64
0.334500	34.35	---	59.34	24.99	L1	9.64
14.289500	---	23.00	50.00	27.00	L1	9.89
14.289500	39.94	---	60.00	20.06	L1	9.89
17.997500	---	25.60	50.00	24.40	L1	9.96
17.997500	43.00	---	60.00	17.00	L1	9.96
22.370500	---	23.98	50.00	26.02	L1	10.06
22.370500	41.23	---	60.00	18.77	L1	10.06

Remark :


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## Conducted Emission

Product Type : LED LINKABLE SHOPLIGHT  
 M/N : RD030015  
 Operating Condition : Normal working with transmitting  
 Test specification : Neutral  
 Comment : AC 120V/60Hz (Powered by 46" LED LINKABLE SHOP LIGHT)

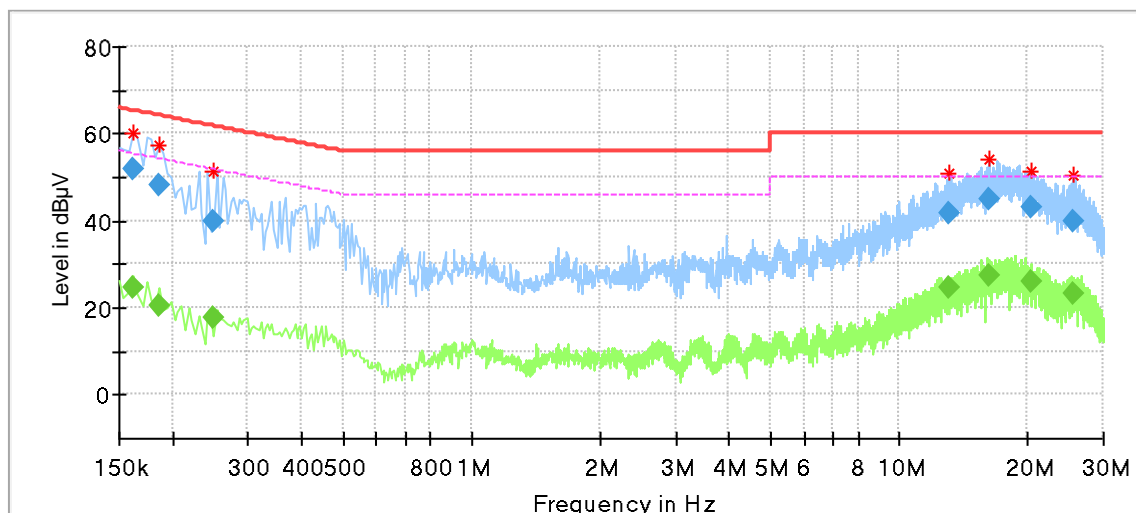

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.161500	60.04	---	65.36	5.32	N	9.62
0.185500	57.23	---	64.21	6.98	N	9.62
0.249500	51.34	---	61.63	10.28	N	9.63
13.122500	50.86	---	60.00	9.14	N	9.88
16.277500	54.17	---	60.00	5.83	N	9.93
20.422500	51.50	---	60.00	8.50	N	10.05
25.653500	50.37	---	60.00	9.63	N	10.09

## Final\_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.161500	---	24.45	55.39	30.93	N	9.62
0.161500	51.67	---	65.39	13.72	N	9.62
0.185500	---	20.38	54.24	33.86	N	9.62
0.185500	48.17	---	64.24	16.07	N	9.62
0.249500	---	17.49	51.77	34.28	N	9.63
0.249500	39.88	---	61.77	21.89	N	9.63
13.122500	---	24.69	50.00	25.31	N	9.88
13.122500	41.86	---	60.00	18.14	N	9.88
16.277500	---	27.51	50.00	22.49	N	9.93
16.277500	44.94	---	60.00	15.06	N	9.93
20.422500	---	26.02	50.00	23.98	N	10.05
20.422500	43.28	---	60.00	16.72	N	10.05
25.653500	---	23.32	50.00	26.68	N	10.09
25.653500	39.69	---	60.00	20.31	N	10.09

Remark :

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## 8.2 Field strength of emissions and Restricted bands

### Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

#### For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak and RMS,  
Trace = max hold.

#### For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 120KHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = QP,  
Trace = max hold.

## Field strength of emissions and Restricted bands

### Limits

According to §15.249 (a) & RSS-210 A2.9(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

According to §15.249 (c) & RSS-210 B.10, Field strength limits are specified at a distance of 3 meters.

According to §15.249 (d) & RSS-210 B.10, Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 & RSS-Gen, whichever is the lesser attenuation.

According to §15.205 and RSS-GEN 8.10 Unwanted emissions falling into restricted bands in §15.205 (a) and RSS-GEN 8.10 Table 7 shall comply with the limits specified in §15.209 and RSS-Gen.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

## Field strength of emissions and Restricted bands

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

EUT: LED LINKABLE SHOPLIGHT

M/N: RD030015

Operating Condition: Tx; 5757MHz

For Peak Value

Radiated Emission								
Value	Emissions Frequency MHz	E-Field Polarity	Reading Level dBμV/m	Correction Factor dB/m	PK Emission dBμV/m	Limit dBμV/m	Margin dBm	Emission Type
PK	87.607222	H	19.33	10.26	29.59	40.00	10.41	Spurious
PK	45.250556	V	14.35	14.26	28.61	40.00	11.39	Spurious
PK	5757.000000	H	63	3.48	66.48	114.00	47.52	Fundamental
PK	5757.000000	V	72.54	3.48	76.02	114.00	37.98	Fundamental
PK	39678.937500	H	39.7	9.24	48.94	74.00	25.06	Spurious
PK	39193.562500	V	42.33	7.72	50.05	74.00	23.95	Spurious

For AV Value

Radiated Emission								
Value	Emissions Frequency MHz	E-Field Polarity	Reading Level dBμV/m	Correction Factor dB/m	AV Emission dBμV/m	Limit dBμV/m	Margin dBm	Emission Type
AV	5757.000000	H	62.18	3.48	65.66	94.00	28.34	Fundamental
AV	5757.000000	V	71.71	3.48	75.19	94.00	18.81	Fundamental
AV	/	H	/	/	/	54.00	/	Spurious
AV	/	V	/	/	/	54.00	/	Spurious

Duty cycle=100%

Remark:

1: Data of measurement within this frequency range shown "/" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

2: "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

3: PK Emission = Reading Level + Correction Factor

Correction Factor=Antenna Factor + Cable Loss (For Below 1GHz)

Correction Factor = Antenna Factor + Cable Loss- Amplifier Gain (For Above 1GHz)

(The Reading Level is recorded by software which is not shown in the sheet)

## Field strength of emissions and Restricted bands

EUT: LED LINKABLE SHOPLIGHT

M/N: RD030015

Operating Condition: Tx; 5817MHz

For Peak Value

Radiated Emission								
Value	Emissions Frequency MHz	E-Field Polarity	Reading Level dBμV/m	Correction Factor dB/m	PK Emission dBμV/m	Limit dBμV/m	Margin dBm	Emission Type
PK	5817.000000	H	64.32	3.80	68.12	114.00	45.88	Fundamental
PK	5817.000000	V	74.75	3.80	78.55	114.00	35.45	Fundamental
PK	39542.125000	H	40.56	8.85	49.41	74.00	24.59	Spurious
PK	39680.312500	V	39.85	9.25	49.10	74.00	24.90	Spurious

For AV Value

Radiated Emission								
Value	Emissions Frequency MHz	E-Field Polarity	Reading Level dBμV/m	Correction Factor dB/m	AV Emission dBμV/m	Limit dBμV/m	Margin dBm	Emission Type
AV	5817.000000	H	63.32	3.80	67.12	94.00	26.88	Fundamental
AV	5817.000000	V	74.15	3.80	77.95	94.00	16.05	Fundamental
AV	/	H	/	/	/	54.00	/	Spurious
AV	/	V	/	/	/	54.00	/	Spurious

Duty cycle=100%

## Remark:

1: Data of measurement within this frequency range shown "/" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

2: "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

3: PK Emission = Reading Level + Correction Factor

Correction Factor=Antenna Factor + Cable Loss (For Below 1GHz)

Correction Factor = Antenna Factor + Cable Loss- Amplifier Gain (For Above 1GHz)

(The Reading Level is recorded by software which is not shown in the sheet)

## Field strength of emissions and Restricted bands

EUT: LED LINKABLE SHOPLIGHT

M/N: RD030015

Operating Condition: Tx; 5853MHz

For Peak Value

Radiated Emission								
Value	Emissions Frequency MHz	E-Field Polarity	Reading Level dBμV/m	Correction Factor dB/m	PK Emission dBμV/m	Limit dBμV/m	Margin dBm	Emission Type
PK	5853.000000	H	61.13	3.96	65.09	114.00	48.91	Fundamental
PK	5853.000000	V	70.87	3.96	74.83	114.00	39.17	Fundamental
PK	39689.250000	H	39.62	9.27	48.89	74.00	25.11	Spurious
PK	36434.625000	V	43.01	6.22	49.23	74.00	24.77	Spurious

For AV Value

Radiated Emission								
Value	Emissions Frequency MHz	E-Field Polarity	Reading Level dBμV/m	Correction Factor dB/m	AV Emission dBμV/m	Limit dBμV/m	Margin dBm	Emission Type
AV	5853.000000	H	60.13	3.96	64.09	94.00	29.91	Fundamental
AV	5853.000000	V	70.27	3.96	74.23	94.00	19.77	Fundamental
AV	/	H	/	/	/	54.00	/	Spurious
AV	/	V	/	/	/	54.00	/	Spurious

Duty cycle=100%

Remark:

1: Data of measurement within this frequency range shown "/" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

2: "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.


3: PK Emission = Reading Level + Correction Factor

Correction Factor=Antenna Factor + Cable Loss (For Below 1GHz)

Correction Factor= Antenna Factor + Cable Loss- Amplifier Gain (For Above 1GHz)

(The Reading Level is recorded by software which is not shown in the sheet)

Duty Cycle: Duty Cycle=100%

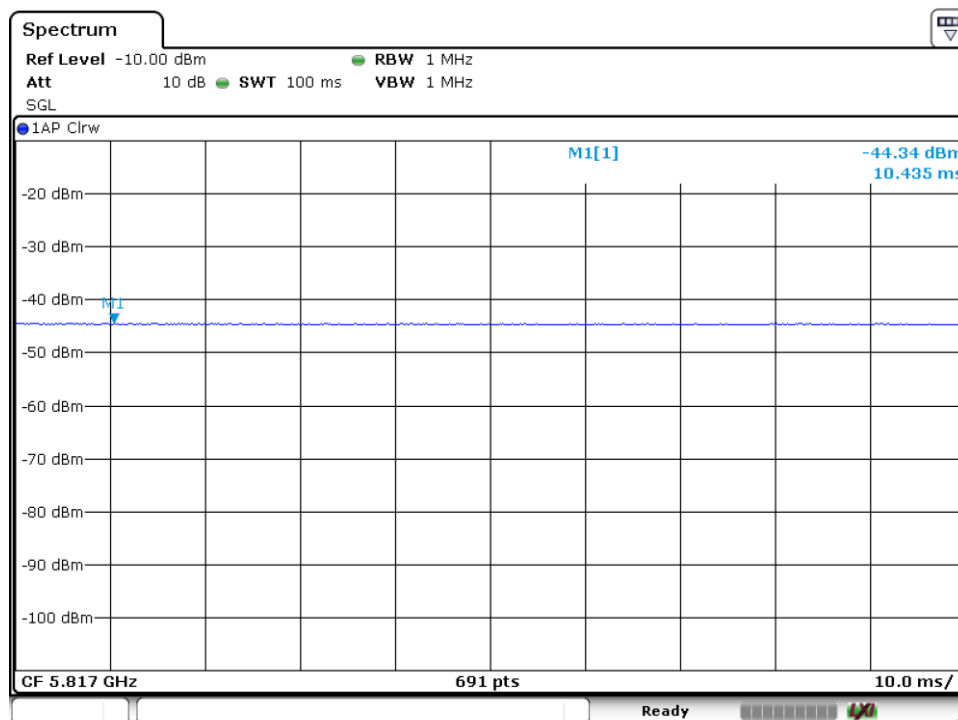

Date: 13.JAN.2021 09:53:43

## 8.3 Out of Band Emissions

### Test Method

- 1 Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

### Limits

According to §15.249(d) & RSS-210 B.10 Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 and RSS-Gen, whichever is the lesser attenuation.


## Out of Band Emissions

EUT: LED LINKABLE SHOPLIGHT

M/N: RD030015

Operating Condition: Tx; 5757MHz

Polarization: Horizontal

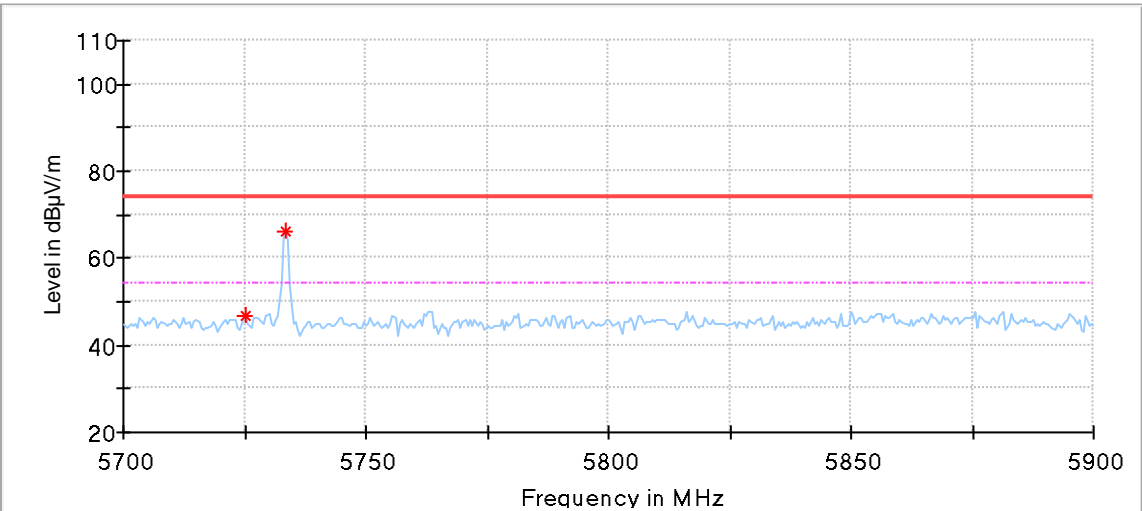

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5725.000000	46.91	74.00	27.09	150.0	H	312.0	3.45
5733.500000	66.26	74.00	7.74	150.0	H	292.0	3.48

Remark:

Level=Reading Level + Correction Factor

Correction Factor=Antenna Factor + Cable Loss – Pre-amplifier

(The Reading Level is recorded by software which is not shown in the sheet)


# Out of Band Emissions

EUT: LED LINKABLE SHOPLIGHT

M/N: RD030015

Operating Condition: Tx; 5757MHz

Polarization: Vertical

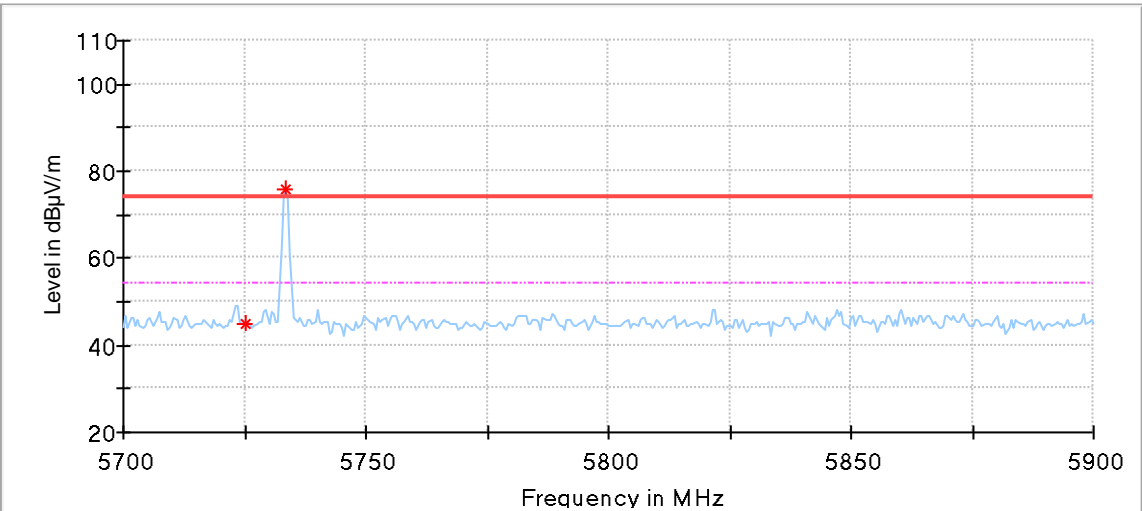

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5725.000000	44.87	74.00	29.13	150.0	V	55.0	3.45
5733.500000	75.63	74.00	-1.63	150.0	V	115.0	3.48

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Antenna Factor + Cable Loss – Pre-amplifier

(The Reading Level is recorded by software which is not shown in the sheet)

# Out of Band Emissions

EUT: LED LINKABLE SHOPLIGHT  
M/N: RD030015  
Operating Condition: Tx; 5853MHz  
Polarization: Horizontal

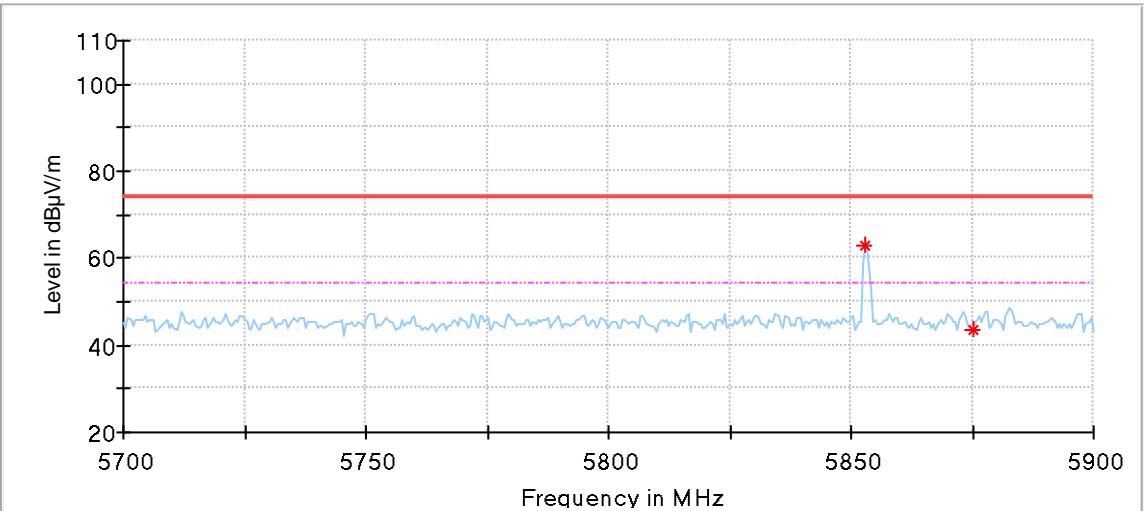

## Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5853.000000	63.09	74.00	10.91	150.0	H	129.0	3.96
5875.000000	43.73	74.00	30.27	150.0	H	82.0	4.05

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Antenna Factor + Cable Loss – Pre-amplifier

(The Reading Level is recorded by software which is not shown in the sheet)

# Out of Band Emissions

EUT: LED LINKABLE SHOPLIGHT  
M/N: RD030015  
Operating Condition: Tx; 5853MHz  
Polarization: Vertical

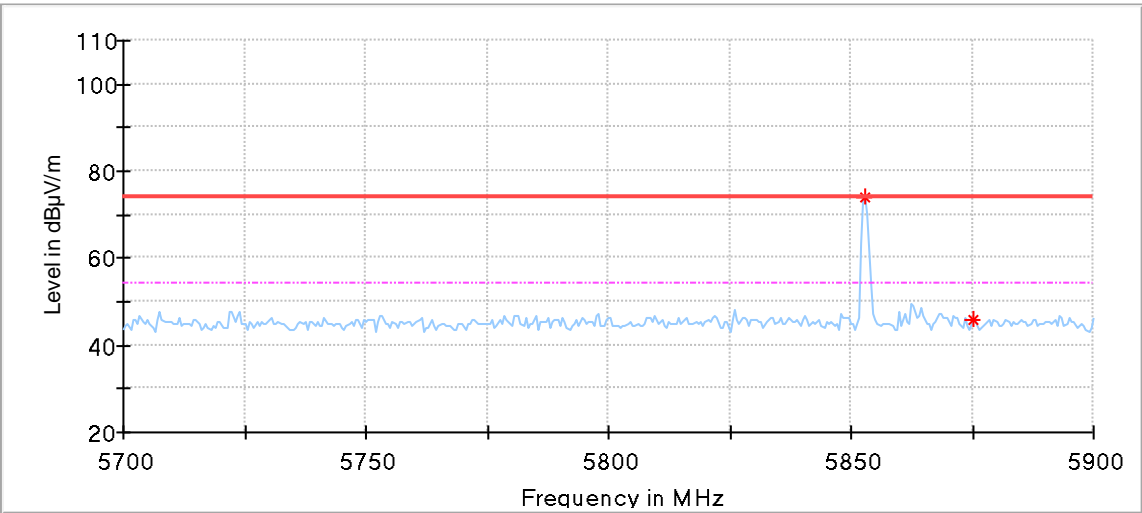

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5853.000000	73.83	74.00	0.17	150.0	V	96.0	3.96
5875.000000	45.78	74.00	28.22	150.0	V	310.0	4.05

Remark:  
Level=Reading Level + Correction Factor  
Correction Factor=Antenna Factor + Cable Loss – Pre-amplifier  
(The Reading Level is recorded by software which is not shown in the sheet)

## 8.4 20dB Bandwidth & 99% Occupied Bandwidth

### Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to spectrum analyser. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.


### Limits:

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

According to RSS-Gen 6.7 when an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

20dB Bandwidth & 99% Occupied Bandwidth

Frequency	20dB Bandwidth	99% Bandwidth	Limit
MHz	MHz	MHz	MHz
5757	0.261	0.217	--

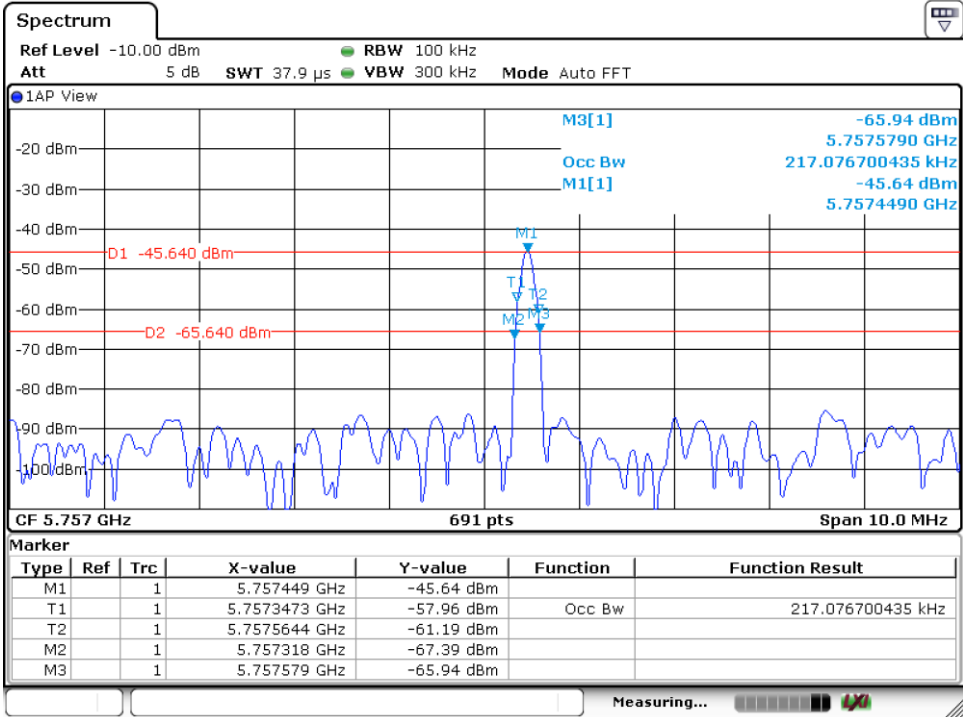


Date: 12.JAN.2021 16:22:32

5757MHz

20dB Bandwidth & 99% Occupied Bandwidth

Frequency	20dB Bandwidth	99% Bandwidth	Limit
MHz	MHz	MHz	MHz
5817	0.260	0.231	--

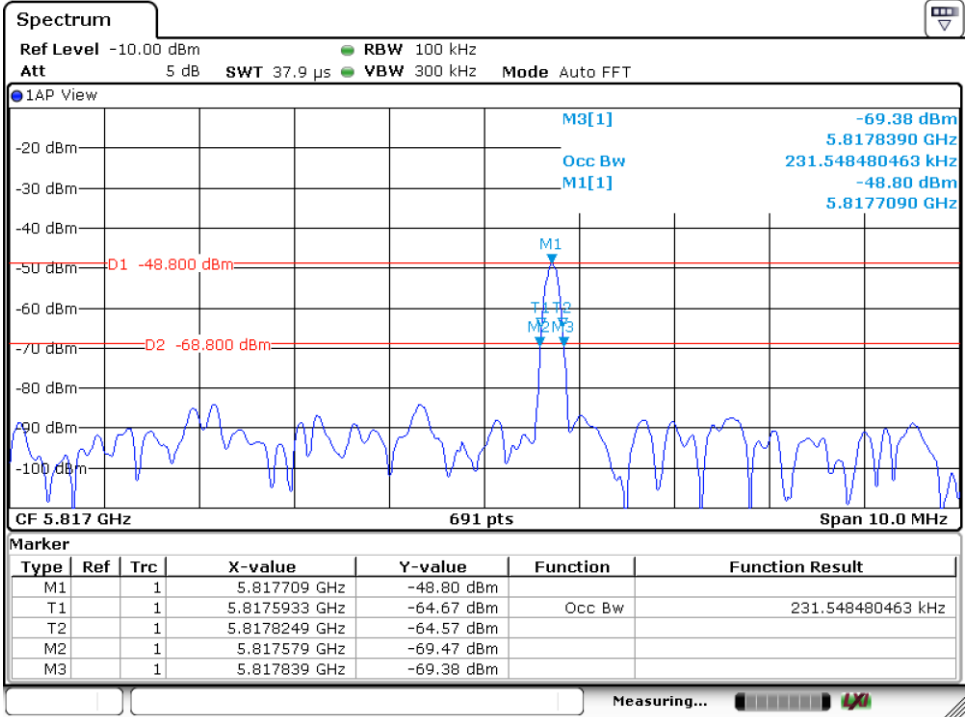


Date: 12.JAN.2021 16:20:20

5817MHz

20dB Bandwidth & 99% Occupied Bandwidth

Frequency	20dB Bandwidth	99% Bandwidth	Limit
MHz	MHz	MHz	MHz
5853	0.246	0.217	--

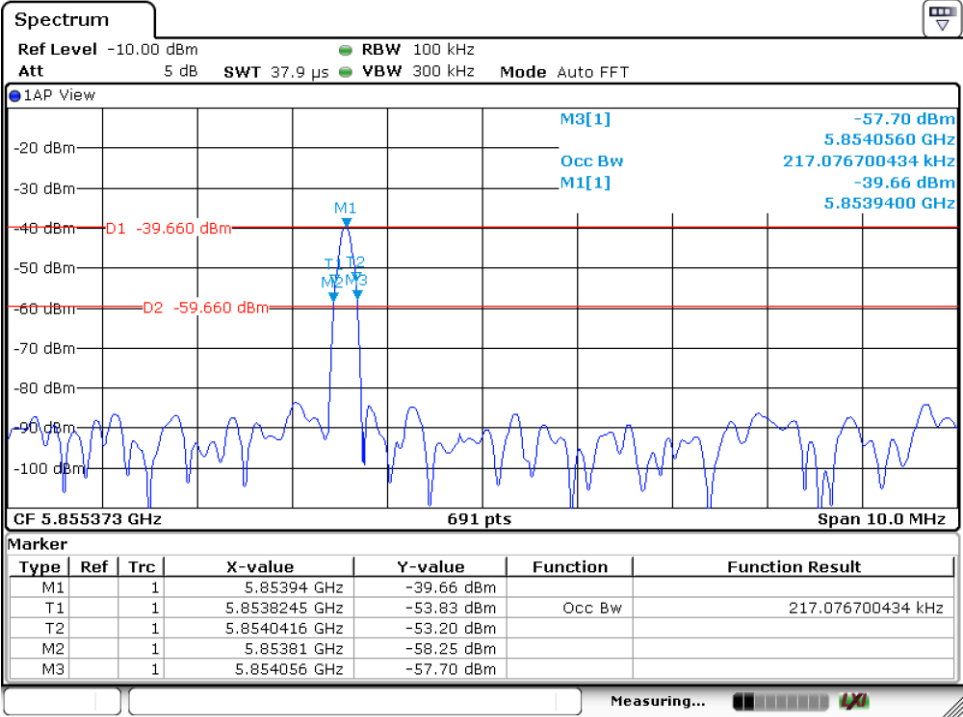

Date: 12.JAN.2021 16:14:38

5853MHz

## 9 Test equipment lists

### Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-14-001	101782	1	2021-6-29
LISN	Rohde & Schwarz	ENV4200	68-4-87-14-001	100249	1	2021-6-12
LISN	Rohde & Schwarz	ENV432	68-4-87-16-001	101318	1	2021-6-12
LISN	Rohde & Schwarz	ENV216	68-4-87-14-002	100326	1	2021-6-12
ISN	Rohde & Schwarz	ENY81	68-4-87-14-003	100177	1	2021-6-12
ISN	Rohde & Schwarz	ENY81-CA6	68-4-87-14-004	101664	1	2021-6-12
High Voltage Probe	Schwarzbeck	TK9420(VT9420)	68-4-27-14-001	9420-584	1	2021-6-23
RF Current Probe	Rohde & Schwarz	EZ-17	68-4-27-14-002	100816	1	2021-6-28
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2021-6-21
Test software	Rohde & Schwarz	EMC32	68-4-90-14-003-A10	Version9.15.00	N/A	N/A
Shielding Room	TDK	CSR #1	68-4-90-19-004	----	1	2020-11-07

### Radiated Emission 1# Test Site

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2021-6-29
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	68-4-80-14-002	707	1	2021-8-4
Horn Antenna	Rohde & Schwarz	HF907	68-4-80-14-005	102294	1	2021-7-14
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2021-9-2
Pre-amplifier	Rohde & Schwarz	SCU 18	68-4-29-14-001	102230	1	2021-6-21
Attenuator	Agilent	8491A	68-4-81-16-001	MY39264334	1	2021-6-21
3m Semi-anechoic chamber	TDK	9X6X6	68-4-90-14-001	----	3	2022-10-28
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

### Radiated Emission 2# Test Site

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2021-6-29
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2021-2-24
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2021-6-15
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2020-12-14
Pre-amplifier	Rohde & Schwarz	SCU 08F2	68-4-29-19-004	08400018	1	2020-12-14
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2021-8-5
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2021-7-30
3m Semi-anechoic chamber	TDK	9X6X6	68-4-90-19-006	----	3	2022-12-29
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

## 10 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV432 or ENV4200)	3.21dB
Uncertainty for Radiated Emission in 3m chamber 30MHz-1000MHz	Horizontal: 5.12dB; Vertical: 5.10dB;
Uncertainty for Radiated Spurious Emission 1000MHz-3000MHz	Horizontal: 4.81dB; Vertical: 4.89dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.69dB; Vertical: 4.68dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.89dB; Vertical: 4.87dB;