



Radio Test Report

FCC ID: WXADF320

This report concerns (check one) : Original Grant Class II Change

Issued Date : Oct. 22, 2010
Project No. : R1009001A
Equipment : Mifare/DESFire EV1 Module, Starter Kit
Model Name : DF320; DF320U; DF320R; DF320L;
DF20; DF20SK

Applicant : GIGA-TMS INC.
8F, No. 31, Lane 169, Kang-Ning St.,
Hsi-Chih, Taipei, Taiwan

Tested by: Neutron Engineering Inc. EMC Laboratory
Date of Receipt: Oct. 11, 2010
Date of Test: Oct. 11, 2010 ~ Oct. 14, 2010

Testing Engineer: Rush Kao
(Rush Kao)

Technical Manager: Jeff Yang
(Jeff Yang)

Authorized Signatory: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.
B1, No. 37, Lane 365, YangGuang St.,
NeiHu District 114, Taipei, Taiwan.
TEL: +886-2-2657-3299
FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	4
2 . SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS	10
3.5 RADIATED EMISSION MEASUREMENT	11
3.5.1 RADIATED EMISSION LIMITS	11
3.5.2 MEASUREMENT INSTRUMENTS LIST	12
3.5.3 TEST PROCEDURE	12
3.5.4 DEVIATION FROM TEST STANDARD	12
3.5.5 TEST SETUP	13
3.5.6 EUT OPERATING CONDITIONS	13
3.5.7 TEST RESULTS- FCC PART 15.209	14
3.5.8 TEST RESULTS- FCC PART 15.225	16
3.6 FREQUENCY STABILITY MEASUREMENT	18
3.6.1 FREQUENCY STABILITY LIMITS	18
3.6.2 MEASUREMENT INSTRUMENTS LIST	18
3.6.3 TEST PROCEDURE	18
3.6.4 DEVIATION FROM TEST STANDARD	18
3.6.5 EUT OPERATING CONDITIONS	18
3.6.6 TEST RESULTS	19
4 . EUT TEST PHOTO	20



1. CERTIFICATION

Equipment : Mifare/DESFire EV1 Module, Starter Kit
Brand Name : GIGATEK; PROMAG; ProxData
Model Name : DF320; DF320U; DF320R; DF320L; DF20; DF20SK
Applicant : GIGA-TMS INC.
Data of Test : Oct. 11, 2010 ~ Oct. 14, 2010
Standards : FCC Part15, Subpart C
 ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-R1009001A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards: (Antenna to EUT distance is 3 m)

FCC Part15, Subpart C		
Standard	Test Item	Remark
15.207	Conducted Emission	N/A
15.35 / 15.205 / 15.209 / 15.225	Radiated Emission	PASS
15.225(e)	Frequency Stability	PASS
15.203	Antenna Requirement	PASS

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

- C01:** (VCCI RN: C-2918; T-1666)
No.132-1, Lane 329, Sec. 2, Palian Road, Shijr City, Taipei, Taiwan.
- CB08:** (VCCI RN: G-91; FCC RN: 614388)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)
C01	ANSI	150 KHz ~ 30MHz	1.94

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
OS-02	ANSI	30MHz ~ 200MHz	V	2.48
		30MHz ~ 200MHz	H	2.16
		200MHz ~ 1,000MHz	V	2.50
		200MHz ~ 1,000MHz	H	2.66
CB08	ANSI	30MHz ~ 200MHz	V	3.22
		30MHz ~ 200MHz	H	3.35
		200MHz ~ 1,000MHz	V	3.24
		200MHz ~ 1,000MHz	H	3.11
		1000MHz ~ 1800MHz	V	4.05
		1000MHz ~ 1800MHz	H	3.97
		18000MHz ~ 40000MHz	V	4.04
18000MHz ~ 40000MHz	H	4.01		



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Mifare/DESFire EV1 Module, Starter Kit
Brand Name	GIGATEK; PROMAG; ProxData
Model Name	DF320; DF320U; DF320R; DF320L; DF20; DF20SK
OEM Brand/Model Name	N/A
Model Difference	N/A
Product Description	The EUT is a Mifare/DESFire EV1 Module, Starter Kit.
	Operation Frequency: 13.56MHz
	Product Class: 1
	Receiver Class: 3
	Modulation Type: ASK
	Number Of Channel 1CH(13.56MHz)
	Antenna Designation: Loop
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Power Source	DC Voltage supplied from PC Power Supply.
Power Rating	Please refer to the User's Manual
Connecting I/O Port(s)	Please refer to the User's Manual
Products Covered	N/A
EUT Modification(s)	N/A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. There are some models based on similar electrical circuit except the difference of list below:

Model No.		Explanation	Interface	PCB Layout
DF20		Module		PCB-T4090
DF320	DF320R	DF20 Module Kit	RS232 Transmit interface	PCB-T4096
	DF320L	DF20 Module Kit	TTL Transmit interface	PCB-T4096
	DF320U/DF20SK	DF20 Module Kit	USB Transmit interface	PCB-T4097

All the above models were tested, and the model: DF320R was found to be the worst case during the pr-scanning test. This model of the worst case was used for final testing and collecting test data included in this report.



3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX

For Radiated Test	
Final Test Mode	Description
Mode 1	TX



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

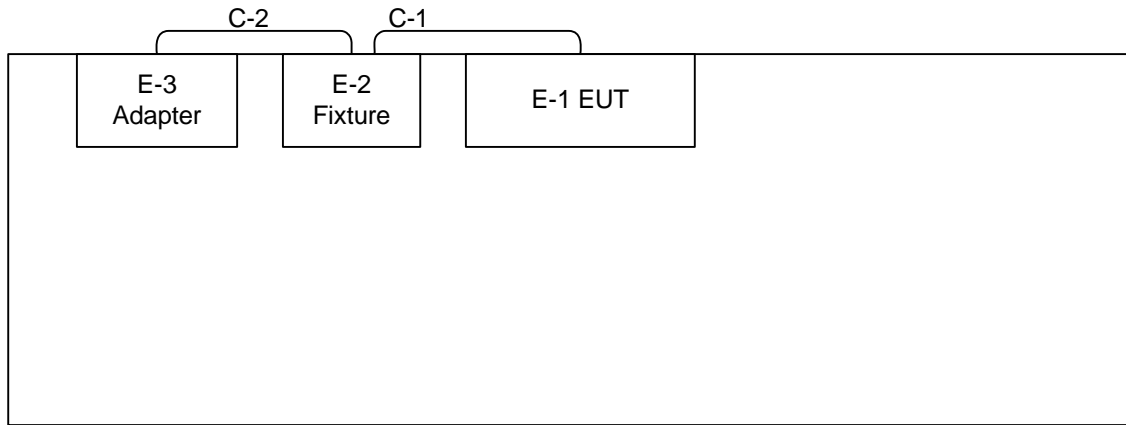

C-1 Data Cable
C-2 Power Cable



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Mifare/DESFire EV1 Module, Starter Kit	GIGATEK	DF320	WXADF320	N/A	EUT
E-2	Fixture	N/A	N/A	N/A	N/A	
E-3	ADAPTER	LB	M2-15US12R-D	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	1.0M	
C-2	NO	YES	0.6M	

Note:

- (1) The support equipment was authorized by Declaration of Conformity.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 RADIATED EMISSION MEASUREMENT

3.5.1 RADIATED EMISSION LIMITS (Frequency Range 30MHz-1000MHz)

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500
FCC Part 15.225(a)/(b)/(c)				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
13.553 – 13.567	15,848	30 m	15,848*100	124
13.567 – 13.710	334	30 m	334*100	90.5
13.110 – 13.410 13.710 – 14.010	106	30 m	106*100	80.5

Notes:

- (1) The tighter limit shall apply at the boundary between two frequency range.
- (2) Limitation expressed in dBuV/m is calculated by 20log Emission Level (uV/m).
- (3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d_2/d_1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as $L_{d1} = L_1 = 30uV/m * (10)^2 = 100 * 30 uV/m$



3.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011
2	Microflex Cable	N/A	N/A	1m	May. 19, 2011
3	Test Cable	N/A	LMR-400	966_12m	Jun. 17, 2011
4	Test Cable	N/A	LMR-400	966_3m	Jun. 17, 2011
5	Pre-Amplifier	EMC	EMC-330	980001	Jun. 03, 2011
6	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 17, 2011
7	Loop Ant.	EMCO	6502	00042960	Jan. 13, 2011

Remark: " N/A" denotes No Model Name / Serial No. and No Calibration specified.

3.5.3 TEST PROCEDURE


- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.5.4 DEVIATION FROM TEST STANDARD


No deviation

3.5.5 TEST SETUP

Radiated Emission Test Set-Up Frequency 30 - 1000MHz

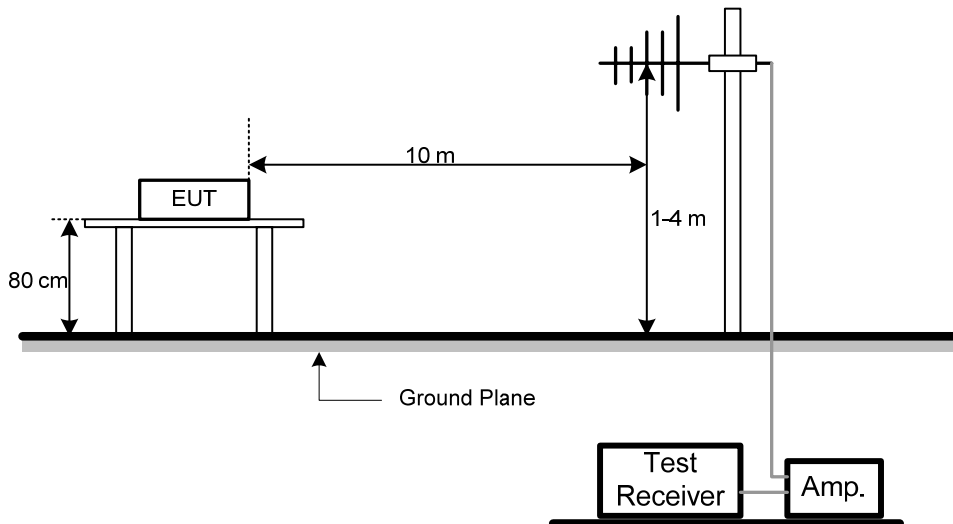

Radiated Emission Test Set-Up Frequency Above 1 GHz

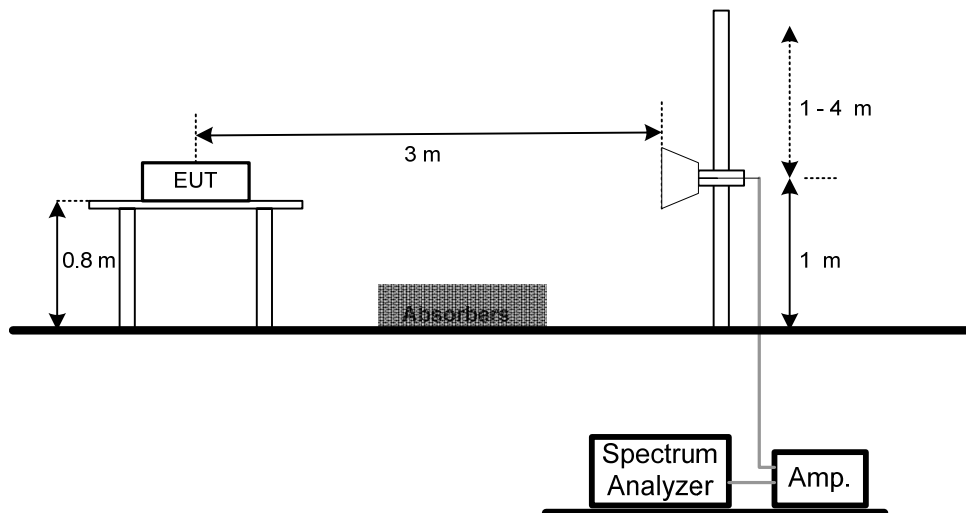

3.5.6 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated emission measurement was designed to exercise the various system components in a manner similar to a typical use.

The EUT has been programmed to continuously transmit during test.




3.5.7 TEST RESULTS- FCC PART 15.209

E.U.T :	Mifare/DESFire EV1 Module, Starter Kit	Model Name :	DF320
Temperature :	23 ° C	Relative Humidity :	43%
Test Voltage :	DC 5V(Supply from AC/DC Power System)		
Test Mode :	TX		

Freq. (MHz)	Ant. Pol. H/V	Detector Mode (PK/AV)	Reading (dBUV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBUV/m)	Limit-3m (dBUV/m)	Safe Margins (dBUV/m)	Note
61.04	V	Peak	47.50	- 17.67	29.83	40.00	- 10.17	
338.46	V	Peak	48.90	- 14.30	34.60	46.00	- 11.40	
392.78	V	Peak	42.95	- 13.45	29.50	46.00	- 16.50	
447.10	V	Peak	42.11	- 11.97	30.14	46.00	- 15.86	
474.26	V	Peak	44.35	- 11.46	32.89	46.00	- 13.11	
922.40	V	Peak	38.37	- 3.70	34.67	46.00	- 11.33	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦

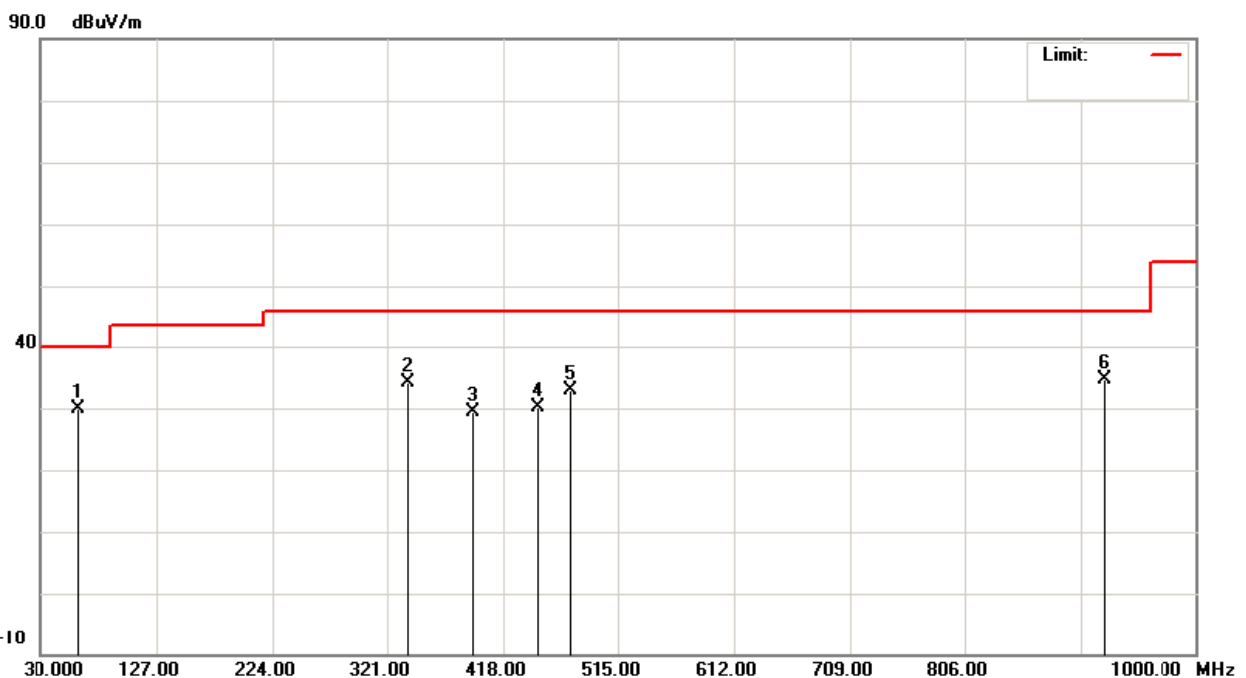




E.U.T :	Mifare/DESFire EV1 Module, Starter Kit	Model Name :	DF320
Temperature :	24 °C	Relative Humidity :	51%
Test Voltage :	DC 5V(Supply from AC/DC Power System)		
Test Mode :	TX		

Freq. (MHz)	Ant.Pd. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
130.88	H	Peak	46.42	- 17.70	28.72	43.50	- 14.78	
338.46	H	Peak	48.02	- 14.83	33.19	46.00	- 12.81	
732.28	H	Peak	38.03	- 6.89	31.14	46.00	- 14.86	
922.40	H	Peak	42.01	- 3.70	38.31	46.00	- 7.69	
949.56	H	Peak	40.33	- 3.34	36.99	46.00	- 9.01	
976.72	H	Peak	37.58	- 2.99	34.59	54.00	- 19.41	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦

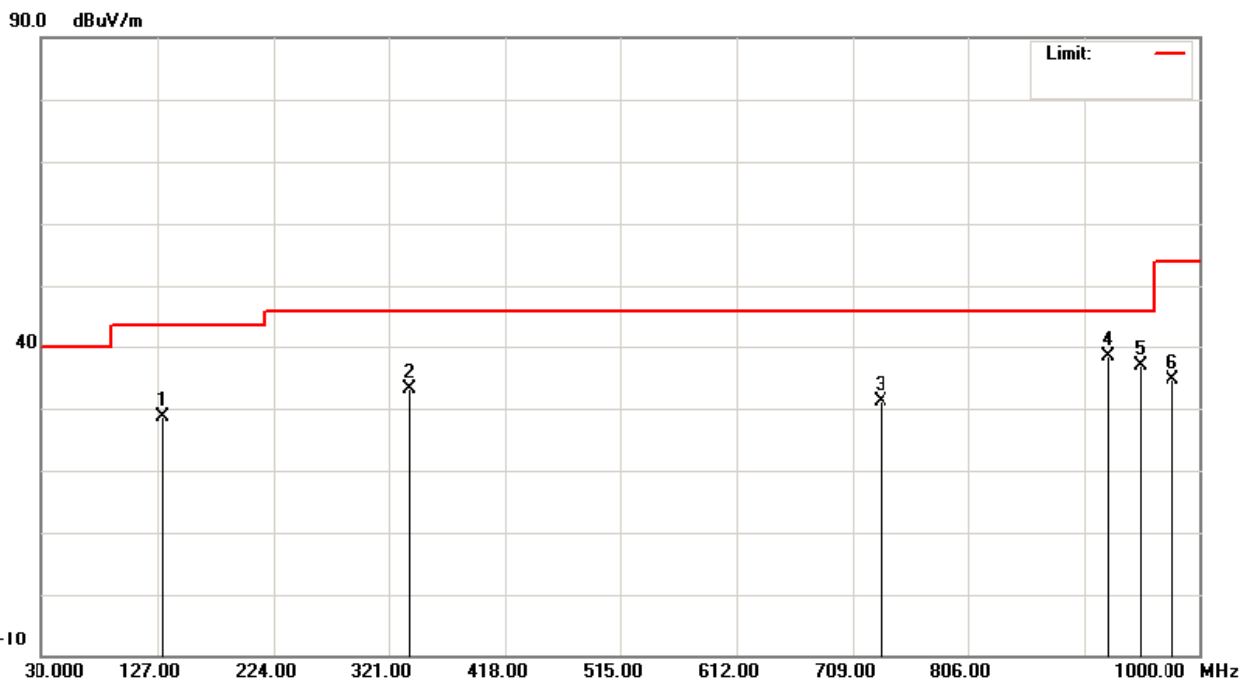





3.5.8 TEST RESULTS- FCC PART 15.225

E.U.T :	Mifare/DESFire EV1 Module, Starter Kit	Model Name :	DF320
Temperature :	24 ° C	Relative Humidity :	43%
Test Voltage :	DC 5V(Supply from AC/DC Power System)		
Test Mode :	TX		

Freq. (MHz)	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
13.56	Peak	47.19	10.92	58.11	124.00	- 65.89	
27.12	Peak	15.34	9.27	24.61	69.54	- 44.93	

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) The Log-Bicon Antenna will use to test frequency range from 30MHz to 1000MHz and the Loop Antenna will use to test frequency below 30MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦

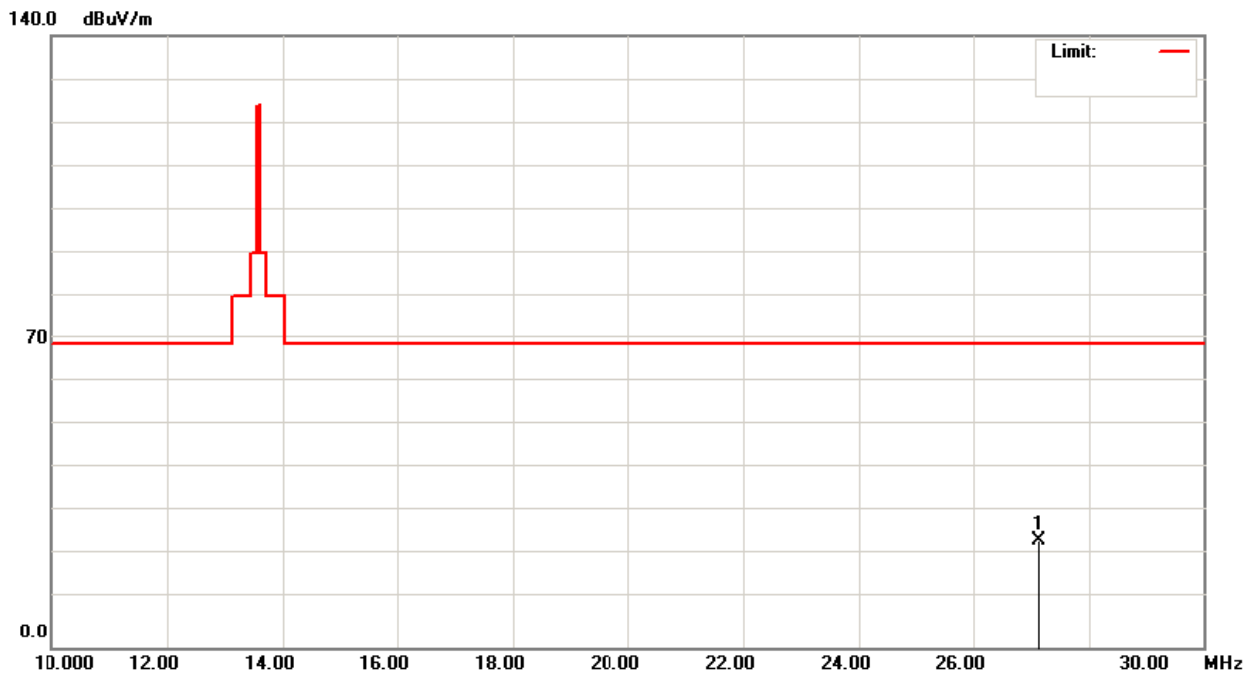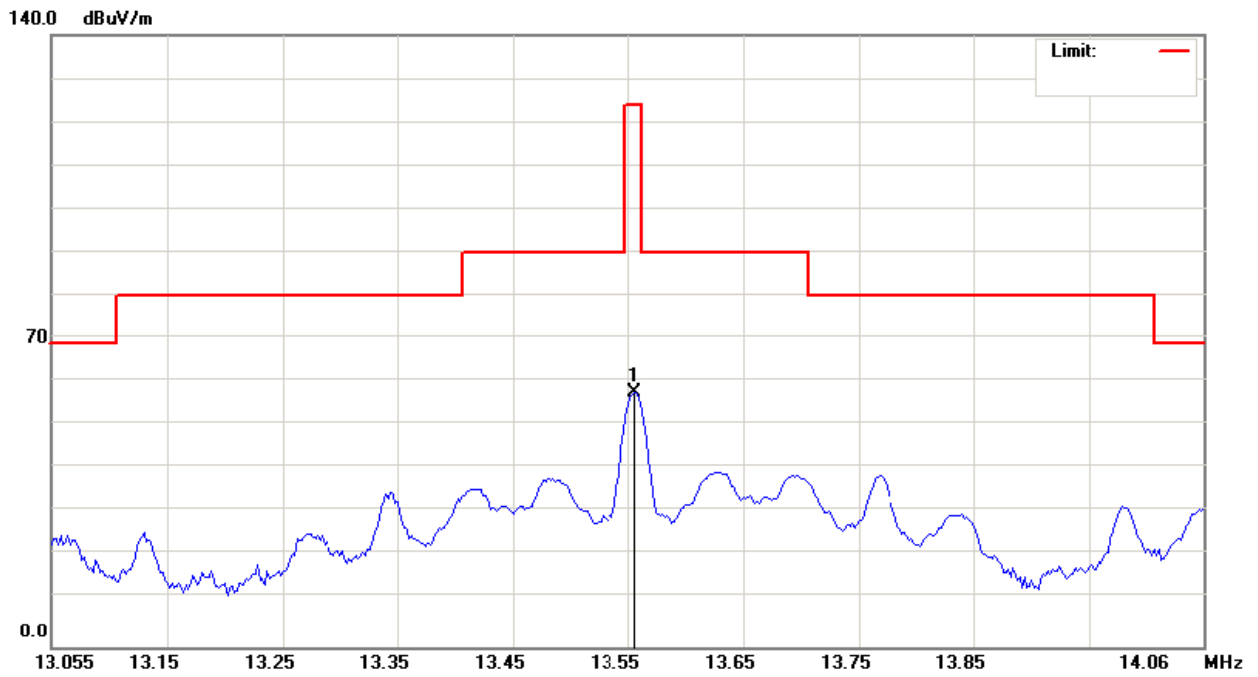



3.6 FREQUENCY STABILITY MEASUREMENT

3.6.1 FREQUENCY STABILITY LIMITS

FCC Part 15.225(e)
the frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

3.6.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.

3.6.3 TEST PROCEDURE

- a. The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber.
After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.
- b. At room temperature (25±5°C), an external variable AC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.
- c. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.6.4 DEVIATION FROM TEST STANDARD

No deviation

3.6.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.



3.6.6 TEST RESULTS

E.U.T :	Mifare/DESFire EV1 Module, Starter Kit	Model Name :	DF320
Temperature :	23 °C	Relative Humidity :	50%
Test Voltage :	DC 5V(Supply from AC/DC Power System)		
Test Mode :	TX		

Frequency Stability Versus Environmental Temperature						
	Temperature (°C)	Voltage (Vac)	Frequency (MHz)	Freq Error (KHz)	Limit (KHz)	Results
	20	120V	13.56036			
0 min	50	120V	13.56032	-0.040	+/- 1.356	PASS
	-20	120V	13.56044	0.080	+/- 1.356	PASS
2 min	50	120V	13.56032	-0.040	+/- 1.356	PASS
	-20	120V	13.56046	0.100	+/- 1.356	PASS
5 min	50	120V	13.56032	-0.040	+/- 1.356	PASS
	-20	120V	13.56044	0.080	+/- 1.356	PASS
10 min	50	120V	13.56032	-0.040	+/- 1.356	PASS
	-20	120V	13.56046	0.100	+/- 1.356	PASS

Frequency Stability Versus Input Voltage						
Temperature (°C)	Voltage (Vac)		Frequency (MHz)	Freq Error (KHz)	Limit (KHz)	Results
20	V-nom	120	13.56036			
20	V-min	102	13.56036	0	+/- 1.356	PASS
20	V-max	138	13.56038	0.02	+/- 1.356	PASS