
FCC Test Report

Report No: WD-RF-R-230169-A0

Product Name : RFID Reader
Model No. : ER750A
Multi-listing Model No. : ER750A-10, ER755A-00, ER755A-10, ER750A-00
FCC ID : WXAER750A
Applicant : GIGA-TMS INC
Received Date : May 22, 2023
Tested Date : Jun. 01, 2023 ~ Jun. 15, 2023
Applicable Standard : 47 CFR FCC Part 15, Subpart C (Section 15.225)
ANSI C63.10 : 2013



Wendell Industrial Co., Ltd
Wendell EMC & RF Laboratory

Caution:

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Wendell Industrial Co., Ltd..

Test Report

Issued Date: June 15, 2023

Project No.: 23Q050801


Product Name	RFID Reader
Trade Name	PROMAG, GIGATEK, ProxData
Model No.	ER750A
Multi-listing Model No.	ER750A-10, ER755A-00, ER755A-10, ER750A-00
FCC ID	WXAER750A
Applicant	GIGA-TMS INC
Manufacturer	GIGA-TMS INC
EUT Rated Voltage	POE 48V & DC 9~24V
EUT Test Voltage	POE 48V
EUT Supports Radios Application	RFID 13.56 MHz
Applicable Standard	47 CFR FCC Part 15, Subpart C (Section 15.225) ANSI C63.10 : 2013
Test Result	Complied

Documented :



(Specialist / Emma Lu)

Technical Engineer :



(Section Manager / Jack Chang)

Approved :



(Project Manager / Gary Wu)

Table of Contents

Document Revision History	4
Summary of Test Result	5
1 Generation Information	6
1.1 Applicant	6
1.2 Manufacturer	6
1.3 Description of Equipment under Test	6
1.4 Configuration of Tested System	9
1.5 EUT Exercise Software	9
1.6 Tested System Details	10
1.7 Test Facility	11
1.8 Measurement Uncertainty	12
1.9 List of Test Equipment	13
2 Test Result	17
2.1 Antenna Requirement	17
2.1.1 Applicable Standard	17
2.1.2 Antenna Connected Construction	17
2.2 20dB Spectrum Bandwidth Measurement	18
2.2.1 Limit	18
2.2.2 Test Setup	18
2.2.3 Test Procedure	18
2.2.4 Test Result	19
2.3 Frequency Stability Measurement	20
2.3.1 Limit	20
2.3.2 Test Setup	20
2.3.3 Test Procedure	20
2.3.4 Test Result	21
2.4 Field Strength of Fundamental Emissions Measurement	23
2.4.1 Limit	23
2.4.2 Test Setup	24
2.4.3 Test Procedure	24
2.4.4 Test Result	25
2.5 Radiated Emissions Measurement	27
2.5.1 Limit	27
2.5.2 Test Setup	27
2.5.3 Test Procedure	28
2.5.4 Test Result	29
2.6 AC Conducted Emissions Measurement	33
2.6.1 Limit	33
2.6.2 Test Setup	33
2.6.3 Test Procedure	34
2.6.4 Test Result	35
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

Document Revision History

Report No.	Issue date	Description
WD-RF-R-230169-A0	June 15, 2023	Initial report

Summary of Test Result

Ref. Std. Clause	Test Items	Result
15.203	Antenna Requirement	Pass
15.215(c)	20dB Spectrum Bandwidth	Pass
15.225(e)	Frequency Stability	Pass
15.225 (a)(b)(c)	Field Strength of Fundamental Emissions	Pass
15.225(d)	Radiated Spurious Emissions	Pass
15.207	AC Conducted Emission	Pass

1 Generation Information

1.1 Applicant

GIGA-TMS INC
 8F. NO31, Lane 169, Kang-Ning St., His-Chih, New Taipei City 22180, Taiwan

1.2 Manufacturer

GIGA-TMS INC
 8F. NO31, Lane 169, Kang-Ning St., His-Chih, New Taipei City 22180, Taiwan

1.3 Description of Equipment under Test

Product Name	RFID Reader
Model No.	ER750A
Multi-listing Model No.	ER750A-10, ER755A-00, ER755A-10, ER750A-00
Model Difference	Refer to the table “Series Difference List”
FCC ID	WXAER750A
Frequency Range	13.56 MHz
Type of Modulation	ASK
Antenna Information	Refer to the table “Antenna List”
EUT Supports Radios Application	RFID 13.56 MHz
EUT Rated Voltage	POE 48V & DC 9~24V
EUT Test Voltage	POE 48V

Series Difference List

Model Differences	Model No.	Multi-listing Model No.			
	ER750A	ER750A-10	ER755A-10	ER750A-00	ER755A-00
POE	The model name of this project is collectively called as ER750A.	V	V	--	--
DC		V	V	V	V
Mifare UID		V	V	V	V
Mifare Sector Data		--	V	--	V

Note 1: Hardware differences: POE & DC.

Note 2: Firmware differences: Mifare UID & Mifare Sector Data.

Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	N/A	PCB-T2891A	PCB Antenna	N/A

Channel List

Channel	Frequency (MHz)
01	13.56

Test Frequencies in each operating band

Frequency range over which the device operates in each operating band (Note 1)	Number of test frequencies required	Location of test frequencies inside the operating frequency range (Note 1,2)
≤ 1 MHz	1	near centre
> 1 MHz and ≤ 10 MHz	2	1 near high end, 1 near low end
> 10 MHz	3	1 near high end, 1 near centre, and 1 near low end

Note 1: The frequency range over which the device operates in a given operating band is the difference between the highest and lowest frequencies on which the device can be tuned within that given operating band. The frequency range can be smaller than or equal to the operating band, but cannot be greater than the operating band.

Note 2: In the third column of table 1, “near” means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

Firmware / Software Version

1	Product Name	RFID Reader
2	Model No.	ER750A
3	Test SW Version	N/A
4	RF power setting in TEST SW	<input checked="" type="checkbox"/> RF power setting was not able to alter during testing. <input type="checkbox"/> RF power setting was able to alter during testing. (See the following table)

Parameters of test software setting

Type of Modulation	Channel	Frequency (MHz)	Set Value
ASK	01	13.56	Default

The EUT has been pre-tested under the following test modes, and test mode3 was the worst case for final test.

The DUT has the following different models, and the difference is shown in the series difference. After laboratory evaluation, the worst mode must be found by pre-test results of radiation 30M-1GHz.

Pretest Mode

Mode 1 : ER750A-00(DC)
Mode 2 : ER750A-10(DC)
Mode 3 : ER750A-10(PoE)
Mode 4 : ER755A-00(DC)
Mode 5 : ER755A-10(DC)
Mode 6 : ER755A-10(PoE)

Test Mode


Mode 3 : ER750A-10(PoE)_Transmit

Note:


1. This device is a RFID Reader with a built-in RFID transceiver.
2. These tests were performed on a sample of equipment to demonstrate compliance with 47 CFR FCC Part 15, Subpart C (Section 15.225).
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the X axis worst case is shown in the report.

1.4 Configuration of Tested System

Radiation

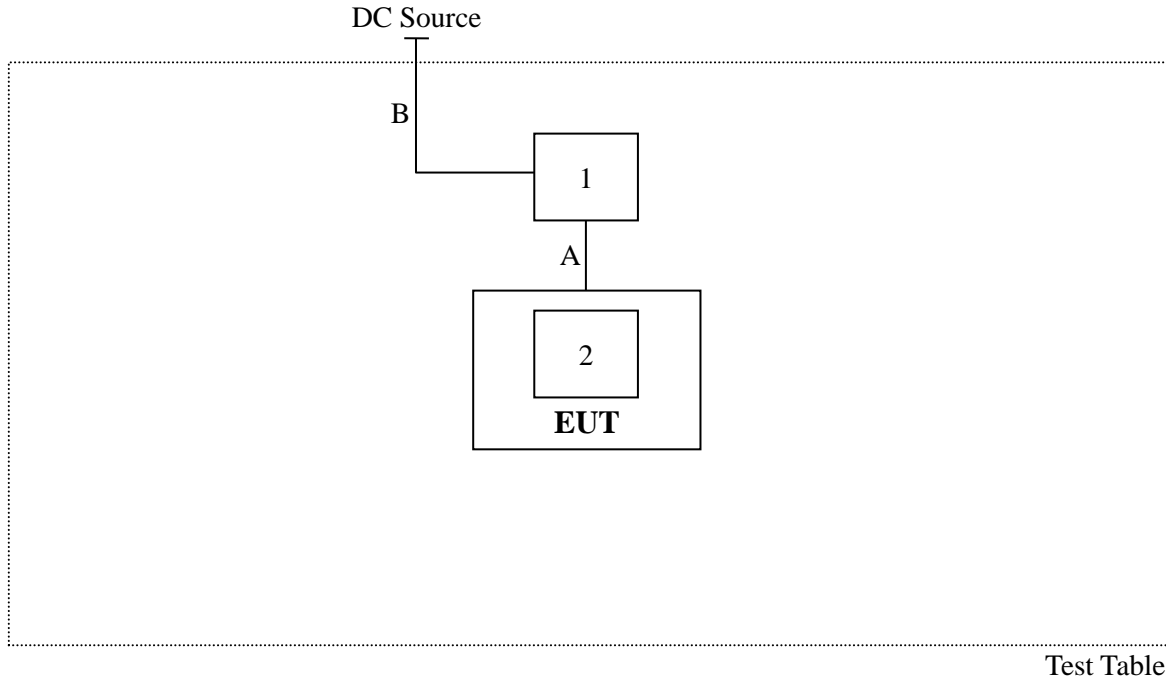

AC Conduction

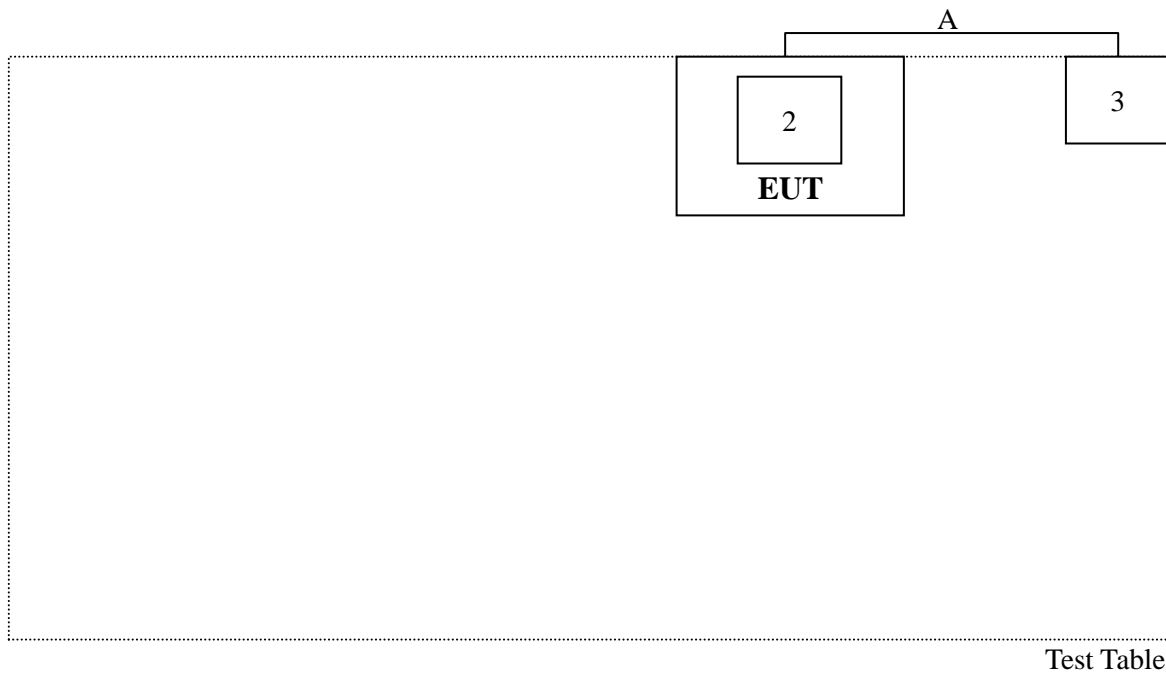

1.5 EUT Exercise Software

1. Setup the EUT as shown in Section 1.4
2. Turn on the power of all equipment.
3. Using tag to trigger RFID continuous transmission.
4. Verify that the EUT works properly.

1.6 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	PoE Injector	WD	PoE-01	N/A	N/A
2	PoE Injector	POE-S48V2	S48V2	N/A	N/A

No.	Signal Cable Type	Signal cable Description
A	LAN Cable	Non-shielded, Non-Core, 1.0m
B	DC Power Cable	Non-shielded, Non-Core, 1m

1.7 Test Facility

Items	Required (IEC 60068-1)
Temperature (°C)	15-35
Humidity (% RH)	25-75
Barometric pressure (mbar)	860-1060

Description: Accredited by TAF
Accredited Number: 2965

Issued by: Wendell Industrial Co., Ltd

Lab Address: 6F/6F-1, No.188, Baoqiao Rd., Xindian Dist.,
New Taipei City 23145, Taiwan R.O.C

Test Lab: Wendell EMC & RF Laboratory

Test Location: No. 119, Wugong 3rd Rd., Wugu Dist.,
New Taipei City 248, Taiwan (R.O.C.)

Designation Number: TW0025

Test Firm Registration Number: 665221

1.8 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence (level based on a coverage factor K=2)

Measurement Project	Condition	Expended Uncertainty
AC Conducted Emission	0.150 ~ 30 MHz	± 2.64 dB
Radiated Emission	0.009 ~ 30 MHz	± 3.7 dB
	30 ~ 1000 MHz	± 3.9 dB
	1000 ~ 18000 MHz	± 4.5 dB
	18000 ~ 40000 MHz	± 4.3 dB
RF Power, Conducted	Conducted Measuring	± 0.75 dB
Occupied Bandwidth	Conducted Measuring	± 2.4 %
Power Density	Conducted Measuring	± 1.2 dB
Duty Cycle and Dwell Time	Conducted Measuring	± 0.9 %
Conducted Unwanted Emission Strength	Conducted Measuring	± 1.4 dB
DC Power Supply	--	± 2.0 %
Temperature	--	± 0.55 °C
Humidity	--	± 3.1 %

Note: Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

1.9 List of Test Equipment

For Conducted measurements / W08-Conducted Measurement

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ Spectrum analyzer	Keysight	N9010A	SG50420005	2022/08/01	2023/07/31
Wideband Peak Power Meter	Anritsu	ML2495A	1733007	2022/09/06	2023/09/05
Pulse Power Sensor + Precision Adaptor	Anritsu	MA2411B	1726022	2022/09/06	2023/09/05
✓ Temperature Chamber	TAICHY	MHK-225LK	1061121	2023/04/24	2024/04/23
Wireless Connectivity Tester	R&S	CMW270	101307	2023/05/29	2024/05/28
Attenuator	MVE	MVE2211-10	CT-9-056	2022/08/10	2023/08/09
Attenuator	MVE	MVE2211-20	CT-9-057	2022/08/10	2023/08/09
Attenuator	MVE	MVE2211-30	CT-9-058	2022/08/10	2023/08/09
Power Divider	MVE	MVE8546	170826003	2022/08/10	2023/08/09
Power Splitter	MVE	MVE8547	170302047	2022/08/11	2023/08/10
DC Power Supply	GW INSTEK	GPC-3060D	GER817636	2022/08/09	2023/08/08

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.

For AC Conduction measurements / W08-CE

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	EMI Test Receiver	R&S	ESR3	102309	2022/6/15	2023/6/14
✓	2-Line V-Network LISN	R&S	ENV216	101185	2022/6/20	2023/6/19
✓	LISN	SCHWARZBECK	NSLK 8127RC	05028	2022/6/20	2023/6/19
✓	Transient Limiter	EM Electronics Corporation	EM-7600	857	2022/6/20	2023/6/19
✓	50ohm Cable	EMCI	EMCCFD300-BM-BM-5000	170612	2022/6/17	2023/6/16
✓	50 ohm terminal impedance	HUBER+SUHNER	50 ohm terminal impedance	CT-1-109-1	2022/6/17	2023/6/16

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.EMC-CON 3A1

For Radiated measurements / W08-996-2

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ EMI Receiver	Keysight	N9038A	MY51210173	2022/08/17	2023/08/16
✓ Spectrum Analyzer	Keysight	N9010A	MY52220228	2022/08/16	2023/08/15
✓ Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	00033	2023/05/08	2024/05/07
✓ TRILOG super broad Antenna	Schwarzbeck	VULB 9168	VULB 9168-700 & 20E03	2022/08/12	2023/08/11
Horn Antenna	Schwarzbeck	BBHA 9120D	01767	2022/08/24	2023/08/23
Horn Antenna	Schwarzbeck	BBHA 9170	703	2022/08/29	2023/08/28
✓ Pre-Amplifier	EMEC	EMC330	060774	2022/08/17	2023/08/16
Pre-Amplifier	EMEC	EM01G18G	060648	2022/08/18	2023/08/17
Pre-Amplifier	JPT	JPA0118-55-303K	1910001800055003	2022/08/18	2023/08/17
Pre-Amplifier	EMCI	EMC184045SE	980515	2022/08/18	2023/08/17
✓ Cable	EMEC	EM-CB400	105060103	2022/08/18	2023/08/17
✓ Cable	EMEC	EM-CB400	105060102	2022/08/18	2023/08/17
✓ Cable	EMEC	EM-CB400	105060101	2022/08/18	2023/08/17
RF Cable	HUBER+SUHNER	SF102	MY2752/2	2022/08/17	2023/08/16
RF Cable	MVE	280280.LL266.1200	B60028C	2022/08/17	2023/08/16
RF Cable	EMCI	EMC102-KM-KM-600	190646	2022/08/17	2023/08/16
RF Cable	MVE	140140.LL404.700	B90014C	2022/07/28	2023/07/27
RF Cable	MVE	140140.LL404.300	B90006C	2022/08/17	2023/08/16
RF Filter	EMEC	BRF-2400-2500	002	2022/08/17	2023/08/16
RF Filter	EMEC	BRF-5150-5350	104	2022/08/17	2023/08/16
RF Filter	EMEC	BRF-5470-5725	092	2022/08/17	2023/08/16
RF Filter	EMEC	BRF-5725-5875	091	2022/08/17	2023/08/16
RF Filter	EMEC	HPF-2800	002	2022/08/17	2023/08/16
RF Filter	EMEC	HPF-5850	059	2022/08/17	2023/08/16
SMA Notch Filter	MVE	MFN-902.928.S1	190604001	2022/08/17	2023/08/16

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.WD-03A1-1

2 Test Result

2.1 Antenna Requirement

2.1.1 Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

2.1.2 Antenna Connected Construction

Non-standard antenna connector is used.

2.2 20dB Spectrum Bandwidth Measurement

2.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB emission bandwidth in the specific band 13.553~13.567MHz.

2.2.2 Test Setup




2.2.3 Test Procedure

Refer to ANSI C63.10 : 2013 clause 6.9

2.2.4 Test Result

Operating Frequency Band : 13.553~13.567 MHz

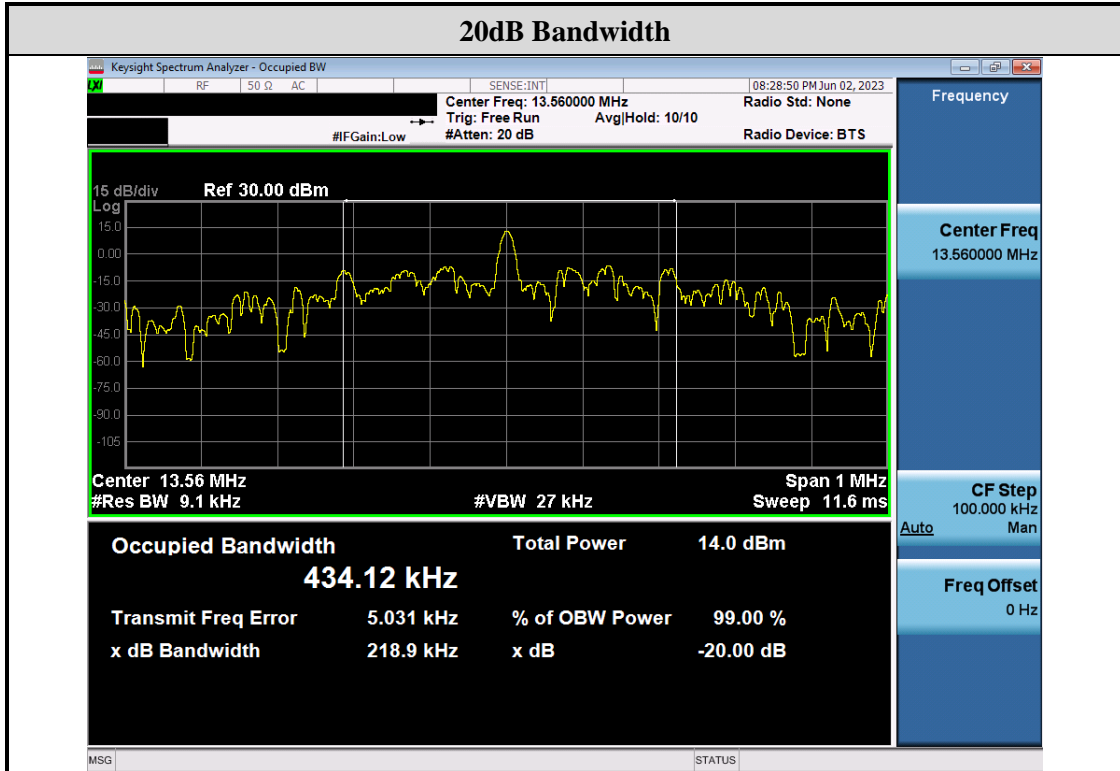


2.3 Frequency Stability Measurement

2.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (100ppm) of the operating frequency over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C .

2.3.2 Test Setup

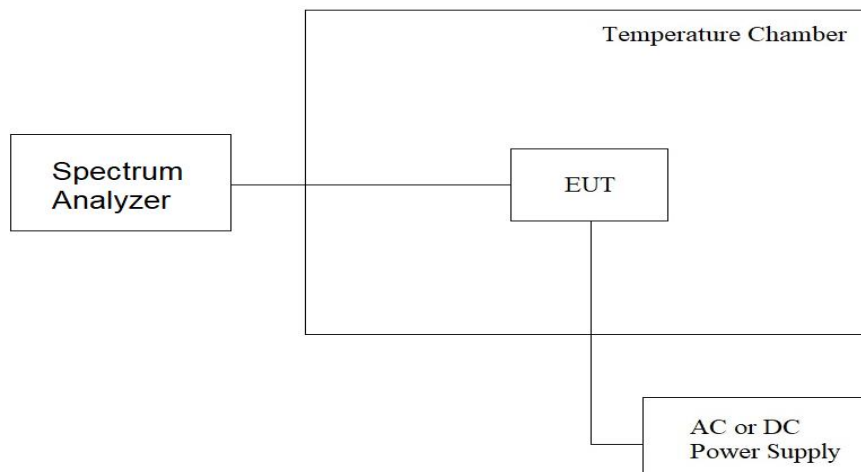

2.3.3 Test Procedure

1. Set the spectrum analyzer span to view the entire emissions bandwidth.
2. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
3. Extreme temperature rule is $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

2.3.4 Test Result

Temperature (°C)	Voltage	Observe Time	Frequency	Delta Frequency (Hz)	Delta Frequency (%)	Limit (%)	Result
20	Normal	start	13.560110	110	0.0008	±0.01%	Pass
		2 min	13.559360	-640	-0.0047	±0.01%	Pass
		5 min	13.559860	-140	-0.0010	±0.01%	Pass
		10 min	13.560160	160	0.0012	±0.01%	Pass
20	High(+15%)	start	13.559840	-160	-0.0012	±0.01%	Pass
		2 min	13.560070	70	0.0005	±0.01%	Pass
		5 min	13.560510	510	0.0038	±0.01%	Pass
		10 min	13.560900	900	0.0066	±0.01%	Pass
20	Low(-15%)	start	13.560980	980	0.0072	±0.01%	Pass
		2 min	13.559540	-460	-0.0034	±0.01%	Pass
		5 min	13.559500	-500	-0.0037	±0.01%	Pass
		10 min	13.560880	880	0.0065	±0.01%	Pass
50	Normal	start	13.559190	-810	-0.0060	±0.01%	Pass
		2 min	13.560760	760	0.0056	±0.01%	Pass
		5 min	13.559110	-890	-0.0066	±0.01%	Pass
		10 min	13.560080	80	0.0006	±0.01%	Pass
40	Normal	start	13.559160	-840	-0.0062	±0.01%	Pass
		2 min	13.560750	750	0.0055	±0.01%	Pass
		5 min	13.560450	450	0.0033	±0.01%	Pass
		10 min	13.560140	140	0.0010	±0.01%	Pass
30	Normal	Start	13.560620	620	0.0046	±0.01%	Pass
		2 min	13.559980	-20	-0.0001	±0.01%	Pass
		5 min	13.561000	1000	0.0074	±0.01%	Pass
		10 min	13.560210	210	0.0015	±0.01%	Pass
10	Normal	Start	13.560340	340	0.0025	±0.01%	Pass
		2 min	13.559860	-140	-0.0010	±0.01%	Pass
		5 min	13.559720	-280	-0.0021	±0.01%	Pass
		10 min	13.560350	350	0.0026	±0.01%	Pass
0	Normal	start	13.560510	510	0.0038	±0.01%	Pass
		2 min	13.559040	-960	-0.0071	±0.01%	Pass
		5 min	13.560850	850	0.0063	±0.01%	Pass
		10 min	13.559420	-580	-0.0043	±0.01%	Pass

-10	Normal	start	13.559560	-440	-0.0032	±0.01%	Pass
		2 min	13.559240	-760	-0.0056	±0.01%	Pass
		5 min	13.559010	-990	-0.0073	±0.01%	Pass
		10 min	13.559730	-270	-0.0020	±0.01%	Pass
-20	Normal	star	13.561000	1000	0.0074	±0.01%	Pass
		2 min	13.560310	310	0.0023	±0.01%	Pass
		5 min	13.560530	530	0.0039	±0.01%	Pass
		10 min	13.560930	930	0.0069	±0.01%	Pass

2.4 Field Strength of Fundamental Emissions Measurement

2.4.1 Limit

Rules and specifications	FCC Part 15 Subpart C Paragraph 15.225 Limits		
Freq. of Emission (MHz)	Field Strength ($\mu\text{V/m}$) at 30m	Field Strength ($\text{dB}\mu\text{V/m}$) at 30m	Field Strength ($\text{dB}\mu\text{V/m}$) at 3m
13.553~13.567	15848	84.0	124.0
13.410 – 13.553 and 13.567 – 13.710	334	50.5	90.5
13.110 – 13.410 and 13.710 – 14.010	106	40.5	80.5
Outside of the 13.110 – 14.010	See 15.209 Limits		

Remark:


1. Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an quasi-peak detector.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remark:

1. Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
2. In the Above Table, the tighter limit applies at the band edges.
3. The emission limit in this paragraph is based on a measurement frequency below 1GHz instrumentation employing a quasi-peak detector.

2.4.2 Test Setup

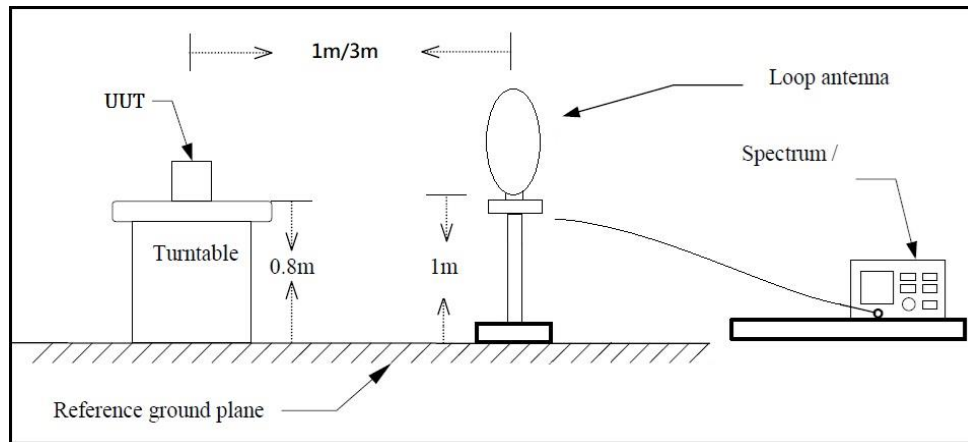


2.4.3 Test Procedure

1. For Fundamental emissions, use the receiver to measure QP reading.
2. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
4. Compliance with the spectrum mask is tested with RBW = 9kHz.

2.4.4 Test Result

Test Mode :	Mode 3 : ER750A-10(PoE)_Transmit	Test Date :	2023/06/02
Test Frequency :	13.56 MHz	Temperature :	20.4 °C
Polarization :	Horizontal ; X axis	Relative Humidity :	44 %

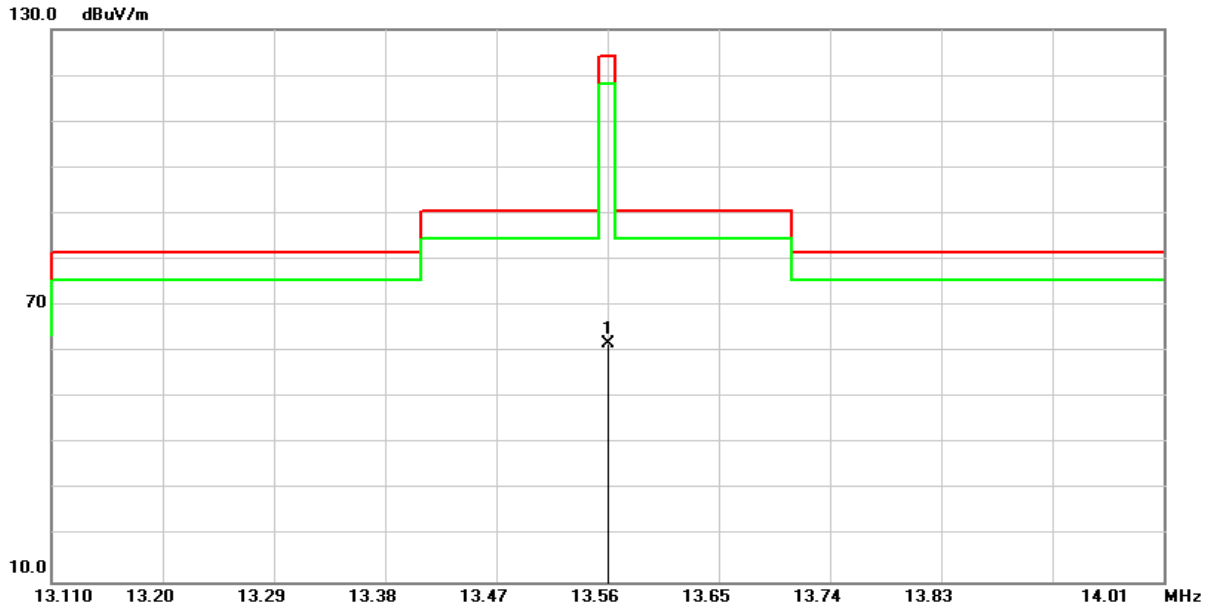


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.5600	40.59	21.26	61.85	124.00	-62.15	peak

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value

Test Mode :	Mode 3 : ER750A-10(PoE)_Transmit	Test Date :	2023/06/02
Test Frequency :	13.56 MHz	Temperature :	20.4 °C
Polarization :	Vertical ; X axis	Relative Humidity :	44 %

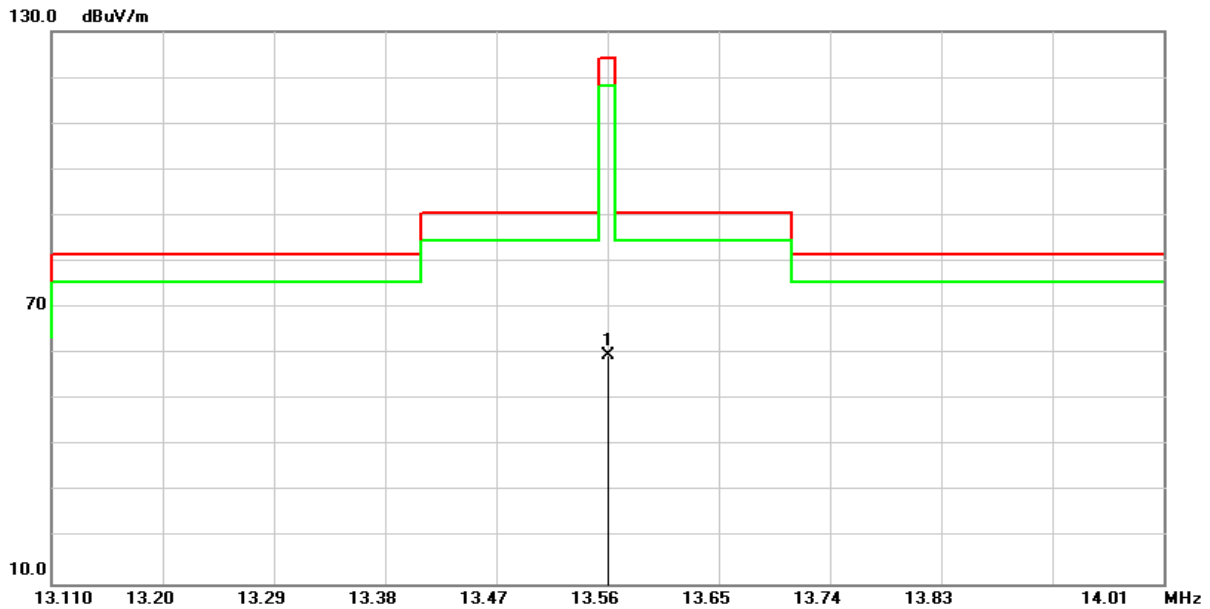

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.5600	38.25	21.26	59.51	124.00	-64.49	peak

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value


2.5 Radiated Emissions Measurement

2.5.1 Limit


The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in Section 15.209. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209

2.5.2 Test Setup

Below 30MHz

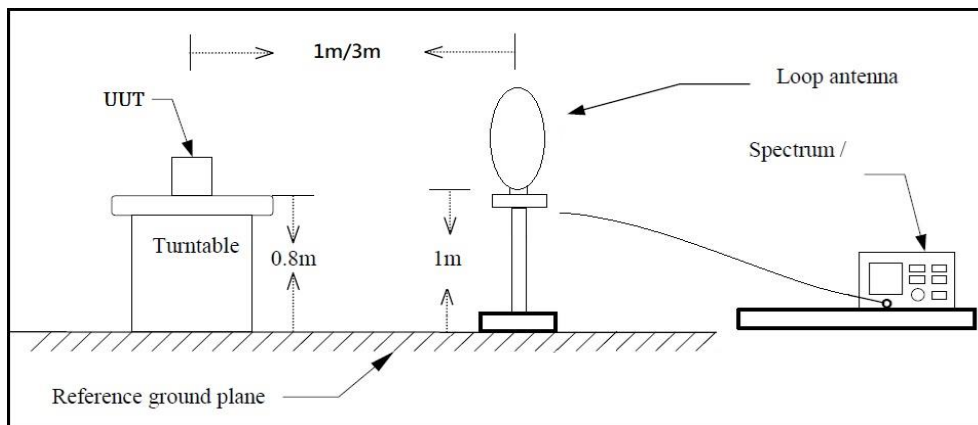

Above 30MHz

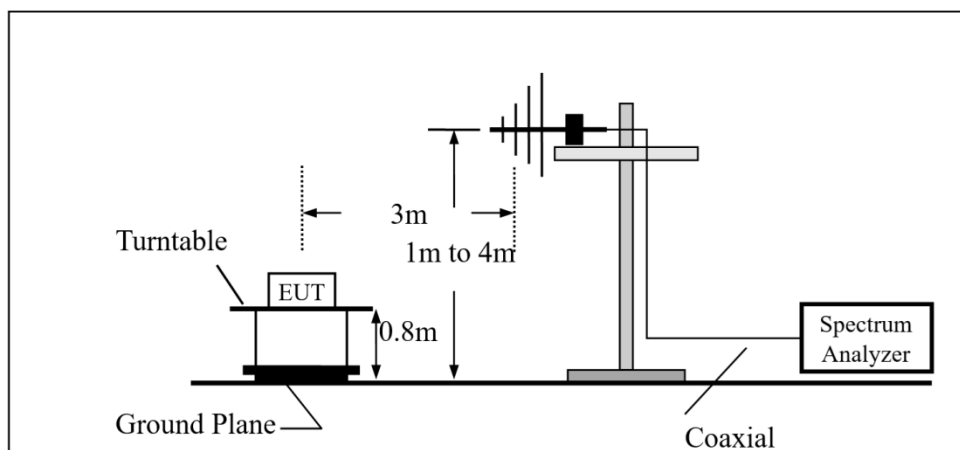

2.5.3 Test Procedure

The EUT was setup according to ANSI C63.10, 2013 for compliance to FCC 47CFR 15.225 requirements.

For Radiated emission below 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.


For Radiated emission Above 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

2.5.4 Test Result

Below 30 MHz Data

Test Mode :	Mode 3 : ER750A-10(PoE)_Transmit	Test Date :	2023/06/02
Test Frequency :	13.56 MHz	Temperature :	20.4 °C
Polarization :	Horizontal ; X axis	Relative Humidity :	44 %

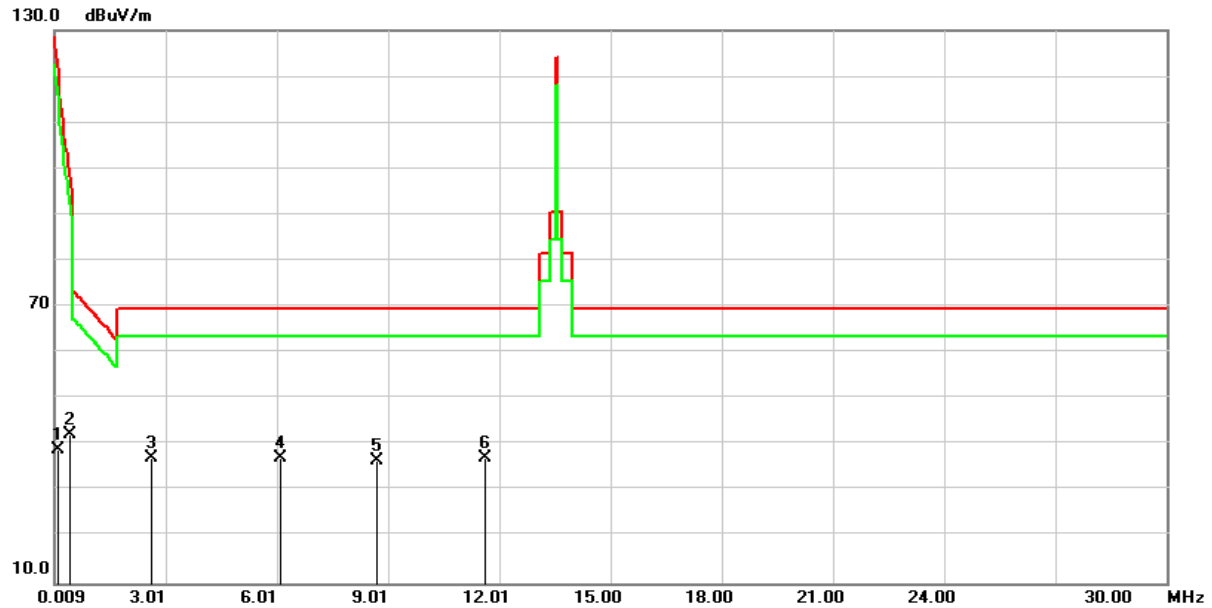


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0964	20.29	18.65	38.94	107.92	-68.98	QP
2	0.4187	23.06	19.28	42.34	95.17	-52.83	AVG
3	2.5977	17.81	19.20	37.01	69.54	-32.53	QP
4	6.0901	16.17	20.87	37.04	69.54	-32.50	QP
5	8.6870	15.92	20.74	36.66	69.54	-32.88	QP
6	11.6124	15.71	21.45	37.16	69.54	-32.38	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value
- (4) The other emission levels were very low against the limit

Test Mode :	Mode 3 : ER750A-10(PoE)_Transmit	Test Date :	2023/06/02
Test Frequency :	13.56 MHz	Temperature :	20.4 °C
Polarization :	Vertical ; X axis	Relative Humidity :	44 %

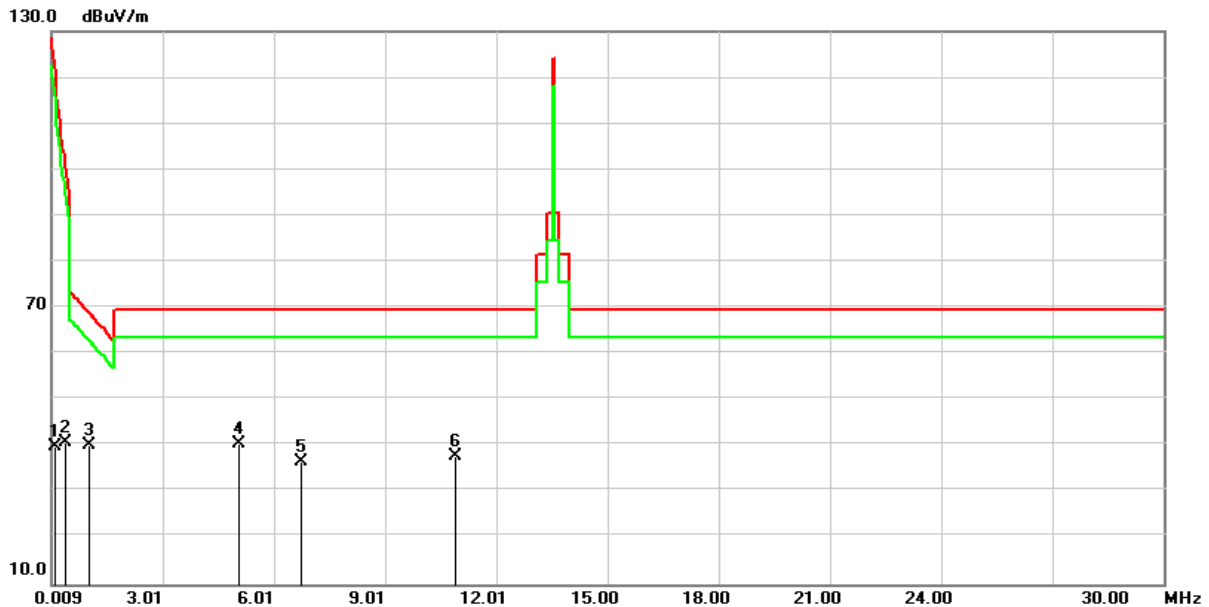


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0963	21.35	18.65	40.00	107.93	-67.93	QP
2	0.3888	21.38	19.28	40.66	95.81	-55.15	AVG
3	1.0156	20.86	19.30	40.16	67.47	-27.31	QP
4	5.0752	20.63	19.75	40.38	69.54	-29.16	QP
5	6.7170	15.84	20.83	36.67	69.54	-32.87	QP
6	10.8960	16.33	21.36	37.69	69.54	-31.85	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value
- (4) The other emission levels were very low against the limit

Above 30MHz Data

Test Mode :	Mode 3 : ER750A-10(PoE)_Transmit	Test Date :	2023/06/02
Test Frequency :	13.56 MHz	Temperature :	20.4 °C
Polarization :	Horizontal	Relative Humidity :	44 %

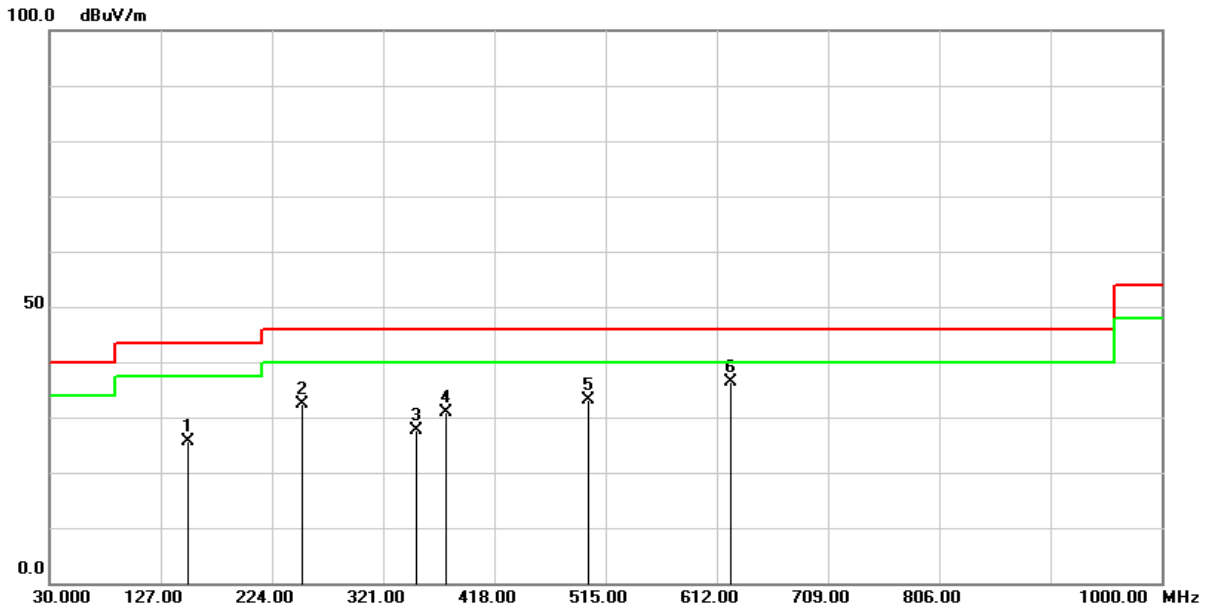


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	150.2800	36.71	-10.96	25.75	43.50	-17.75	QP
2	250.1900	44.32	-11.95	32.37	46.00	-13.63	QP
3	350.1000	36.37	-8.79	27.58	46.00	-18.42	QP
4	375.3200	38.73	-7.94	30.79	46.00	-15.21	QP
5	500.4500	37.89	-4.81	33.08	46.00	-12.92	QP
6	624.6100	38.06	-1.66	36.40	46.00	-9.60	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value
- (4) The other emission levels were very low against the limit

Test Mode :	Mode 3 : ER750A-10(PoE)_Transmit	Test Date :	2023/06/02
Test Frequency :	13.56 MHz	Temperature :	20.4 °C
Polarization :	Vertical	Relative Humidity :	44 %

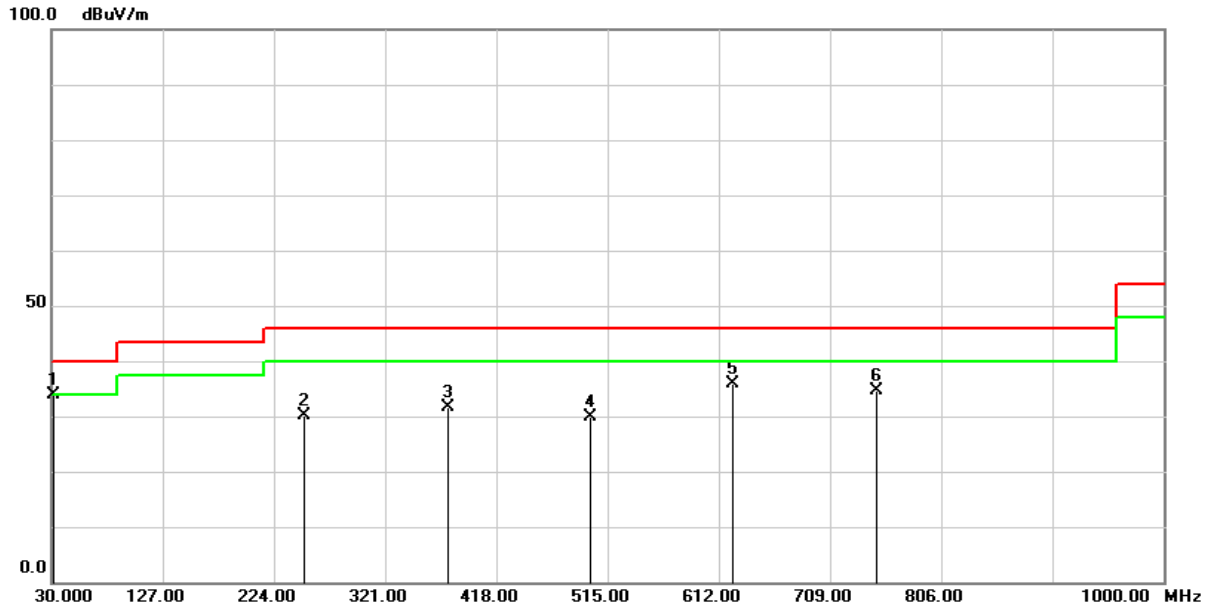

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	46.18	-12.32	33.86	40.00	-6.14	QP
2	250.1900	42.06	-11.95	30.11	46.00	-15.89	QP
3	375.3200	39.56	-7.94	31.62	46.00	-14.38	QP
4	500.4500	34.65	-4.81	29.84	46.00	-16.16	QP
5	624.6100	37.51	-1.66	35.85	46.00	-10.15	QP
6	749.7400	33.59	0.94	34.53	46.00	-11.47	QP

Remark :

- (1) Correction Factor = Antenna factor + Cable loss – Amplifier gain
- (2) Result Value = Reading Level + Correct Factor
- (3) Margin Level = Measurement Value – Limit Value
- (4) The other emission levels were very low against the limit


2.6 AC Conducted Emissions Measurement

2.6.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*Decreases with the logarithm of the frequency

2.6.2 Test Setup

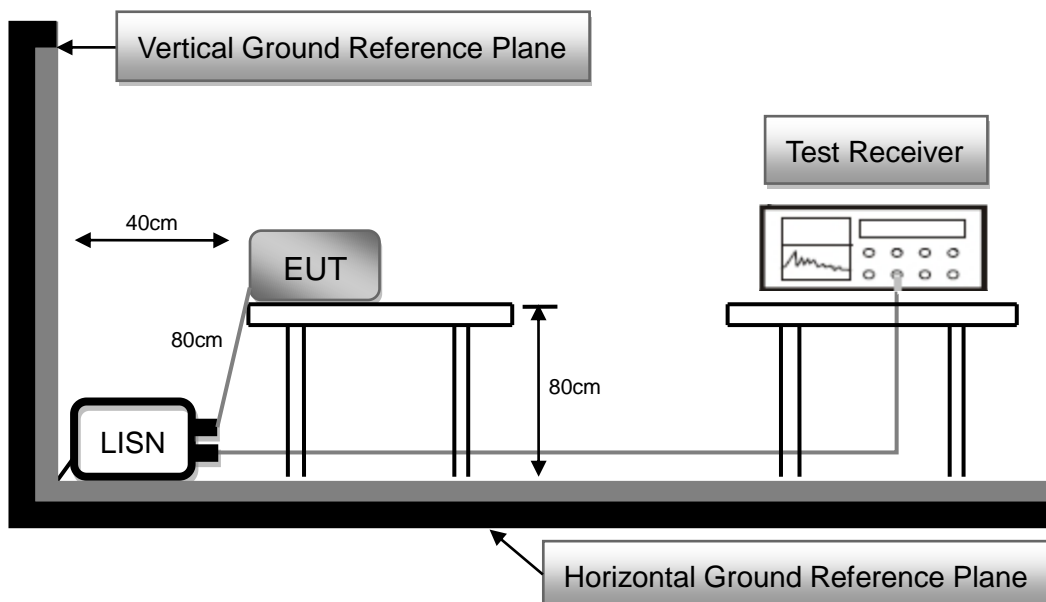


2.6.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The Test Data of the worst case was recorded.

Note: For a device with a permanent or detachable antenna operating at or below 30 MHz, the FCC will accept measurements performed with a suitable dummy load in lieu of the antenna.

2.6.4 Test Result

Test Voltage :	110Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Mode 3 : ER750A-10(PoE)_Transmit	6dB Bandwidth :	9 kHz
Test Date :	2023/06/01	Phase :	L
Temperature :	24.6°C	Humidity :	44 %

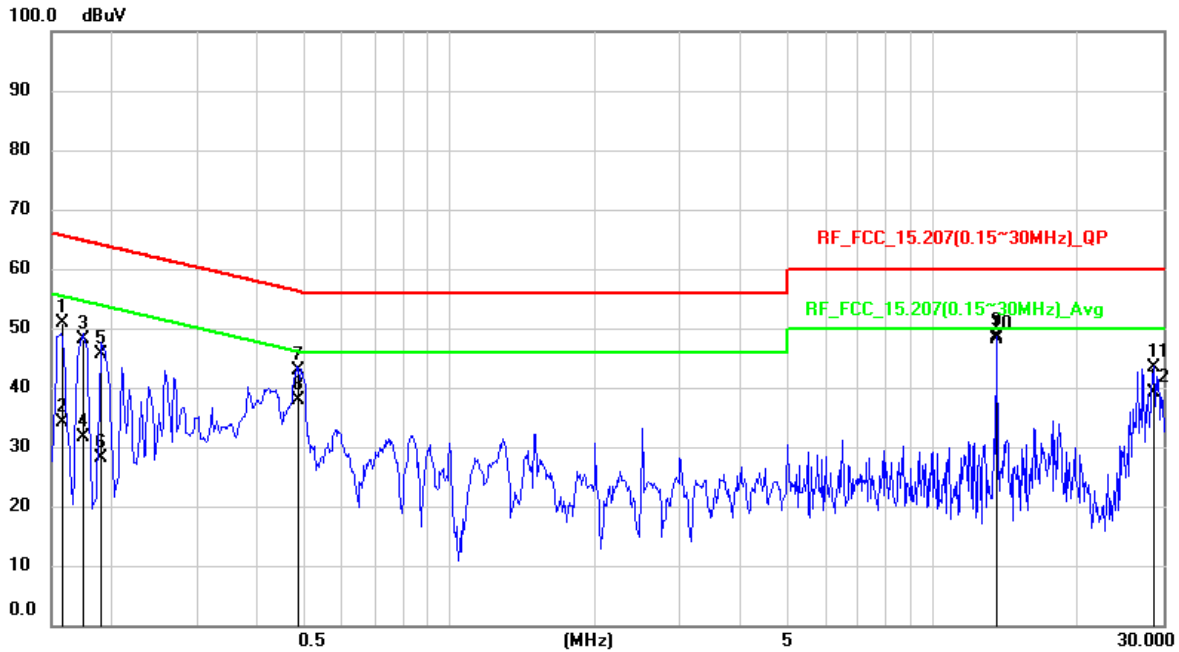


No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1584	41.03	9.83	50.86	65.55	-14.69	QP
2	0.1584	24.3	9.83	34.13	55.55	-21.42	AVG
3	0.174	38.27	9.83	48.1	64.77	-16.67	QP
4	0.174	21.85	9.83	31.68	54.77	-23.09	AVG
5	0.1887	35.69	9.82	45.51	64.09	-18.58	QP
6	0.1887	18.31	9.82	28.13	54.09	-25.96	AVG
7	0.4864	33.03	9.83	42.86	56.23	-13.37	QP
8	0.4864	27.94	9.83	37.77	46.23	-8.46	AVG
9	13.5609	38.46	10.12	48.58	60	-11.42	QP
*10	13.5609	38.05	10.12	48.17	50	-1.83	AVG
11	28.6856	33.05	10.45	43.5	60	-16.5	QP
12	28.6856	28.67	10.45	39.12	50	-10.88	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value
5. * = The test frequency 13.56MHz is RF Tx

Test Voltage :	110Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Mode 3 : ER750A-10(PoE)_Transmit	6dB Bandwidth :	9 kHz
Test Date :	2023/06/01	Phase :	N
Temperature :	24.6°C	Humidity :	44 %

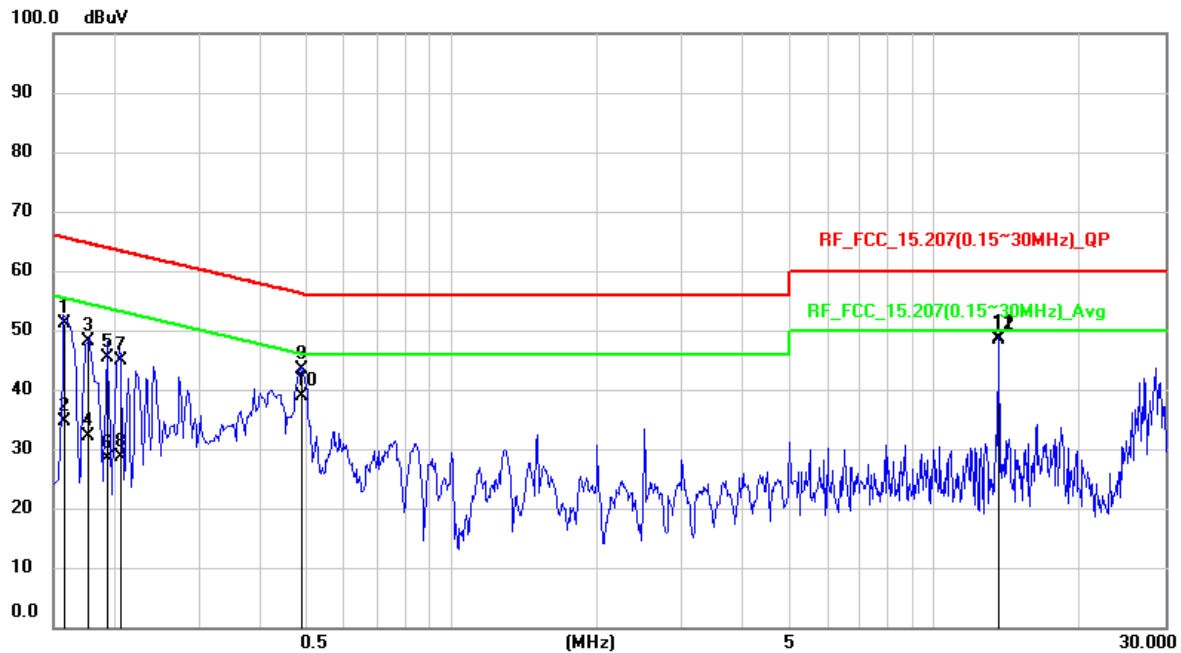

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1587	41.24	9.81	51.05	65.53	-14.48	QP
2	0.1587	24.76	9.81	34.57	55.53	-20.96	AVG
3	0.176	38.43	9.8	48.23	64.67	-16.44	QP
4	0.176	22.28	9.8	32.08	54.67	-22.59	AVG
5	0.1942	35.5	9.8	45.3	63.85	-18.55	QP
6	0.1942	18.63	9.8	28.43	53.85	-25.42	AVG
7	0.207	35.1	9.8	44.9	63.32	-18.42	QP
8	0.207	18.93	9.8	28.73	53.32	-24.59	AVG
9	0.4889	33.67	9.81	43.48	56.19	-12.71	QP
10	0.4889	29.11	9.81	38.92	46.19	-7.27	AVG
11	13.5609	38.66	10.09	48.75	60	-11.25	QP
*12	13.5609	38.22	10.09	48.31	50	-1.69	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value - Limit Value
5. * = The test frequency 13.56MHz is RF Tx

--- END ---