
FCC Test Report

Report No: WD-RF-R-230052-C0

Product Name : Dual Frequency RFID Multi-ISO Protocol Modules
Model Name : QD60
FCC ID : WXAQD60
Applicant : GIGA-TMS INC.
Received Date : Dec. 06, 2022
Tested Date : Feb. 22, 2023 ~ Mar. 13, 2023
Applicable Standard : 47 CFR FCC Part 15, Subpart C (Section 15.31)
47 CFR FCC Part 2, Subpart J (Section 2.947(f))
ANSI C63.10 : 2013



Wendell Industrial Co., Ltd
Wendell EMC & RF Laboratory

Caution:

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Wendell Industrial Co., Ltd..

Test Report

Issued Date: March 14, 2023

Project No.: 22Q120603

Product Name	Dual Frequency RFID Multi-ISO Protocol Modules
Trade Name	PROMAG
Model Name	QD60
FCC ID	WXAQD60
Applicant	GIGA-TMS INC.
Manufacturer	GIGA-TMS INC.
EUT Rated Voltage	DC 5V
EUT Test Voltage	AC 120V / 60Hz
EUT Supports Radios Application	RFID 13.56 MHz RFID 125 kHz
Applicable Standard	47 CFR FCC Part 15, Subpart C (Section 15.31) 47 CFR FCC Part 2, Subpart J (Section 2.947(f)) ANSI C63.10 : 2013
Test Result	Complied

Documented :




(Specialist / Emma Lu)

Technical Engineer :



(Section Manager / Jack Chang)

Approved :



(Project Manager / Gary Wu)

Table of Contents

Document Revision History	4
Summary of Test Result.....	5
1 Generation Information	6
1.1 Applicant.....	6
1.2 Manufacturer.....	6
1.3 Description of Equipment under Test.....	6
1.4 Test Mode Applicability.....	7
1.5 Configuration of Tested System	8
1.6 EUT Exercise Software	8
1.7 Tested System Details.....	9
1.8 Test Facility	10
1.9 Measurement Uncertainty	11
1.10 List of Test Equipment.....	12
2 Test Result	15
2.1 Spurious Emission Measurement.....	15
2.1.1 Limit	15
2.1.2 Test Setup.....	15
2.1.3 Test Procedure.....	17
2.1.4 Test Result of Radiated Spurious Emission Measurement	18
2.2 AC Conducted Emissions Measurement.....	23
2.2.1 Limit	23
2.2.2 Test Setup.....	23
2.2.3 Test Procedure.....	24
2.2.4 Test Result	25

Document Revision History

Report No.	Issue date	Description
WD-RF-R-230052-C0	March 14, 2023	Initial report

Summary of Test Result

Ref. Std. Clause	Test Items	Result
15.247(d)	Radiated Spurious Emission	Pass
15.207	AC Conducted Emission	Pass

1 Generation Information

1.1 Applicant

GIGA-TMS INC.
8F, NO.31, LANE 169, KANG-NING ST.,HSI-CHIH, NEW TAIPEI CITY, Taiwan

1.2 Manufacturer

GIGA-TMS INC.
8F, NO.31, LANE 169, KANG-NING ST.,HSI-CHIH, NEW TAIPEI CITY, Taiwan

1.3 Description of Equipment under Test

Product Name	Dual Frequency RFID Multi-ISO Protocol Modules
Model No.	QD60
FCC ID	WXAQD60
Frequency Range	13.56 MHz 125 kHz
Type of Modulation	ASK
Antenna Information	Refer to the table “Antenna List”
EUT Supports Radios Application	RFID 13.56 MHz RFID 125 kHz
EUT Rated Voltage	DC 5V
EUT Test Voltage	AC 120V / 60Hz

Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain	Remark
1	N/A	N/A	PCB Antenna	N/A	For 13.56 MHz
2	Shenzhen Xinlifeng Technology Co., Ltd	ANT-T044	Loop Antenna	N/A	For 125kHz

1.4 Test Mode Applicability


1. These tests were performed on equipment samples to demonstrate compliance with the 15.31(k) chapter simultaneous launch requirements.
2. Select the combination of the highest power transmission mode, only the worst case is shown in the report.
3. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report.

Test Mode

Mode 1: RFID 13.56 MHz + RFID 125kHz


1.5 Configuration of Tested System

Radiation

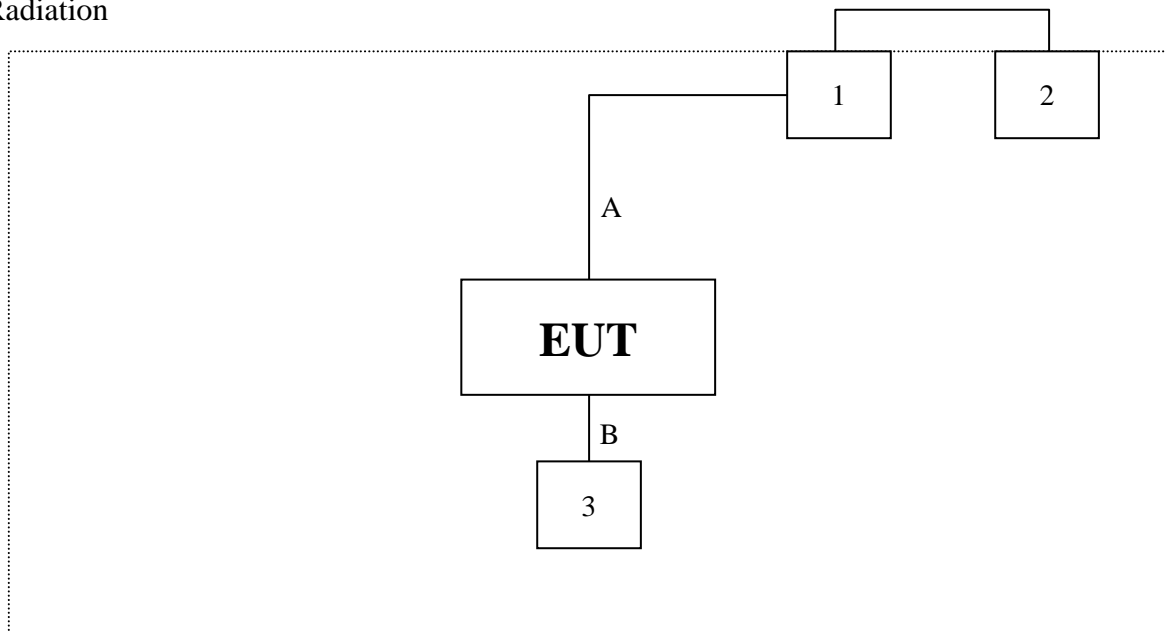

Test Table

AC Conduction

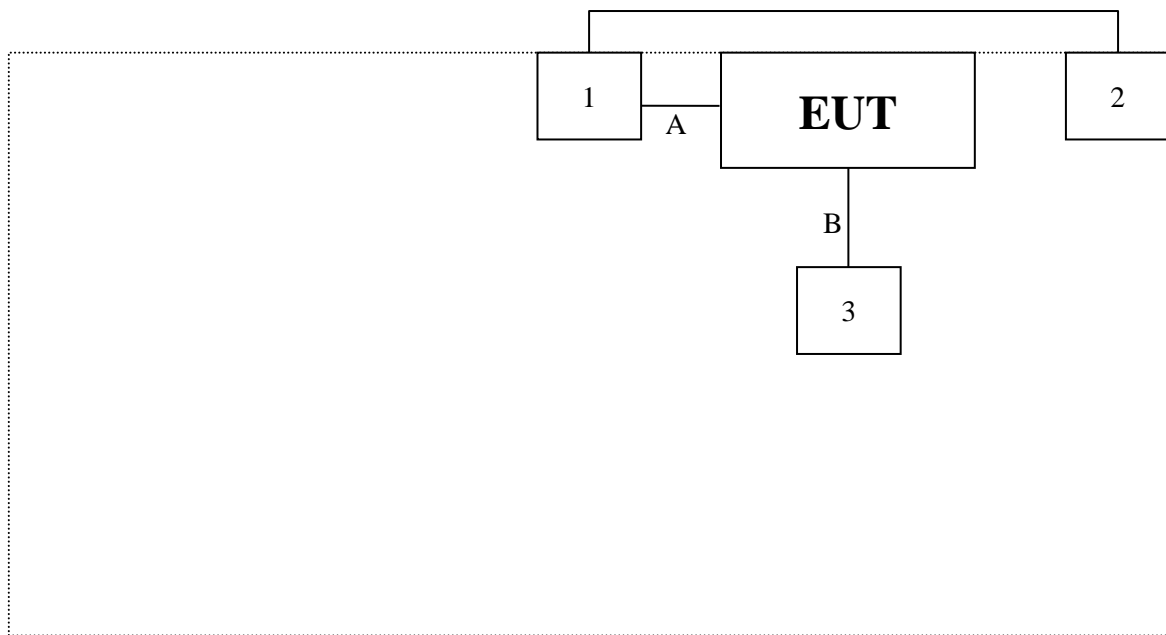

Test Table

1.6 EUT Exercise Software

1. Setup the EUT as shown in Section 1.6
2. Configure the test mode, the test channel, and the data rate.
3. Press “OK” to start the continuous transmit.
4. Verify that the EUT works properly.

1.7 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	acer	N17W3	NXVJ7TA00302301D496600	N/A
2	Adapter	Acer	W15-045N4A	KP045H00694601969PH05	Non-shielded, 1 Core, 1.6m
3	13.56 MHz Antenna	N/A	N/A	N/A	N/A
	125 kHz Antenna	Shenzhen Xinlifeng Technology Co., Ltd	ANT-T044	N/A	N/A

No.	Signal Cable Type	Signal cable Description
A	USB Cable	Non-shielded, Non-Core, 0.35m
B	Data Cable	Non-shielded, Non-Core, 0.16m

1.8 Test Facility

Items	Required (IEC 60068-1)
Temperature (°C)	15-35
Humidity (% RH)	25-75
Barometric pressure (mbar)	860-1060

Description: Accredited by TAF
Accredited Number: 2965

Issued by: Wendell Industrial Co., Ltd

Lab Address: 6F/6F-1, No.188, Baoqiao Rd., Xindian Dist.,
New Taipei City 23145, Taiwan R.O.C

Test Lab: Wendell EMC & RF Laboratory

Test Location: No.67-9, Shimen Rd., Tucheng Dist.,
New Taipei City 236, Taiwan R.O.C

Designation Number: TW0025

Test Firm Registration Number: 665221

1.9 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence (level based on a coverage factor K=2)

Measurement Project	Condition	Expanded Uncertainty
AC Conducted Emission	0.150 ~ 30 MHz	± 2.64 dB
Radiated Emission	0.009 ~ 30 MHz	± 3.7 dB
	30 ~ 1000 MHz	± 3.9 dB
	1000 ~ 18000 MHz	± 4.5 dB
	18000 ~ 40000 MHz	± 4.3 dB
RF Power, Conducted	Conducted Measuring	± 0.75 dB
Occupied Bandwidth	Conducted Measuring	± 2.4 %
Power Density	Conducted Measuring	± 1.2 dB
Duty Cycle and Dwell Time	Conducted Measuring	± 0.9 %
Conducted Unwanted Emission Strength	Conducted Measuring	± 1.4 dB
DC Power Supply	--	± 0.062 ppm
Temperature	--	± 2.0 %
Humidity	--	± 0.55 °C

Note: Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

1.10 List of Test Equipment

For AC Conduction measurements / Conducted Room

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ EMI Test Receiver	R&S	ESR3	102309	2022/6/15	2023/6/14
✓ 2-Line V-Network LISN	R&S	ENV216	101185	2022/6/20	2023/6/19
✓ LISN	SCHWARZBECK	NSLK 8127RC	05028	2022/6/20	2023/6/19
✓ Transient Limiter	EM Electronics Corporation	EM-7600	857	2022/6/20	2023/6/19
✓ 50ohm Cable	EMCI	EMCCFD300-BM-BM-5000	170612	2022/6/17	2023/6/16
✓ 50 ohm terminal impedance	HUBER+SUHNER	50 ohm terminal impedance	CT-1-109-1	2022/6/17	2023/6/16

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.EMC-CON 3A1

For Radiated measurements / 9x6x6 Semi Anechoic Room

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ EMI Receiver	Keysight	N9038A	MY51210173	2022/08/17	2023/08/16
✓ Spectrum Analyzer	Keysight	N9010A	MY52220228	2022/08/16	2023/08/15
✓ Loop Antenna	EMCI	LPA600	277	2022/08/22	2023/08/21
✓ TRILOG super broad Antenna	Schwarzbeck	VULB 9168	VULB 9168-700 & 20E03	2022/08/12	2023/08/11
✓ Horn Antenna	Schwarzbeck	BBHA 9120D	01767	2022/08/24	2023/08/23
✓ Horn Antenna	Schwarzbeck	BBHA 9170	703	2022/08/29	2023/08/28
✓ Pre-Amplifier	EMEC	EMC330	060774	2022/08/17	2023/08/16
✓ Pre-Amplifier	EMEC	EM01G18G	060648	2022/08/18	2023/08/17
✓ Pre-Amplifier	JPT	JPA0118-55-303K	1910001800055003	2022/08/18	2023/08/17
✓ Pre-Amplifier	EMCI	EMC184045SE	980515	2022/08/18	2023/08/17
✓ Cable	EMEC	EM-CB400	105060103	2022/08/18	2023/08/17
✓ Cable	EMEC	EM-CB400	105060102	2022/08/18	2023/08/17
✓ Cable	EMEC	EM-CB400	105060101	2022/08/18	2023/08/17
✓ RF Cable	HUBER+SUHNER	SF102	MY2752/2	2022/08/17	2023/08/16
✓ RF Cable	MVE	280280.LL266.1200	B60028C	2022/08/17	2023/08/16
✓ RF Cable	EMCI	EMC102-KM-KM-600	190646	2022/08/17	2023/08/16
✓ RF Cable	MVE	140140.LL404.700	B90014C	2022/07/28	2023/07/27
✓ RF Cable	MVE	140140.LL404.300	B90006C	2022/08/17	2023/08/16
✓ RF Filter	EMEC	BRF-2400-2500	002	2022/08/17	2023/08/16
✓ RF Filter	EMEC	BRF-5150-5350	104	2022/08/17	2023/08/16
✓ RF Filter	EMEC	BRF-5470-5725	092	2022/08/17	2023/08/16
✓ RF Filter	EMEC	BRF-5725-5875	091	2022/08/17	2023/08/16
✓ RF Filter	EMEC	HPF-2800	002	2022/08/17	2023/08/16
✓ RF Filter	EMEC	HPF-5850	059	2022/08/17	2023/08/16
SMA Notch Filter	MVE	MFN-902.928.S1	190604001	2022/08/17	2023/08/16

Remark:

1. All equipments are calibrated every one year.

2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.WD-03A1-1

2 Test Result

2.1 Spurious Emission Measurement

2.1.1 Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remarks:


1. RF Voltage (dBuV) = $20 \log \text{RF Voltage}(\mu\text{V})$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

2.1.2 Test Setup


Below 30MHz

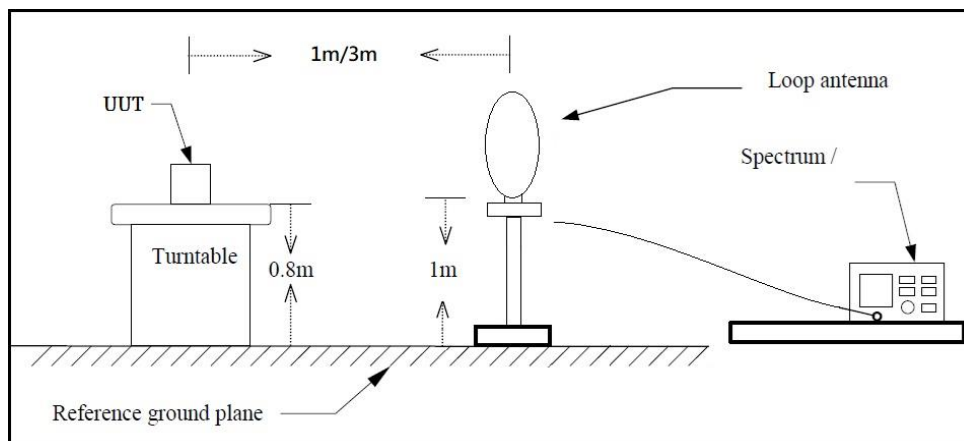

30MHz~1GHz

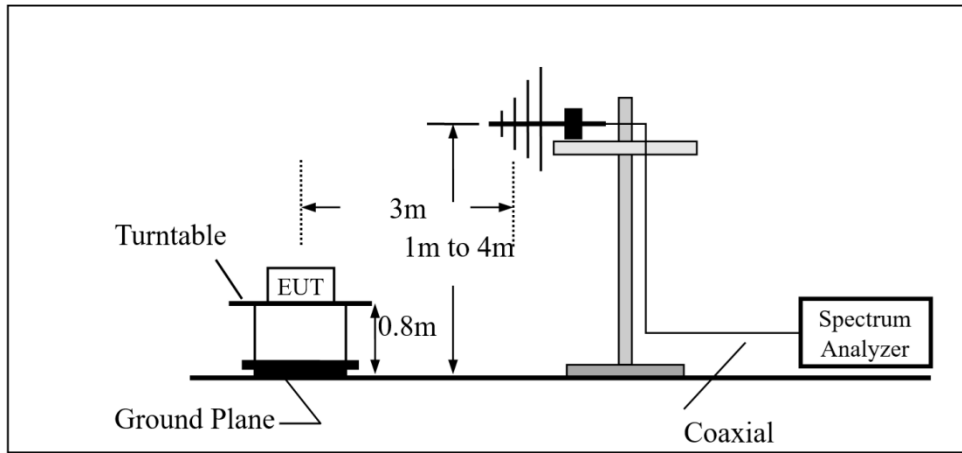

Above 1GHz

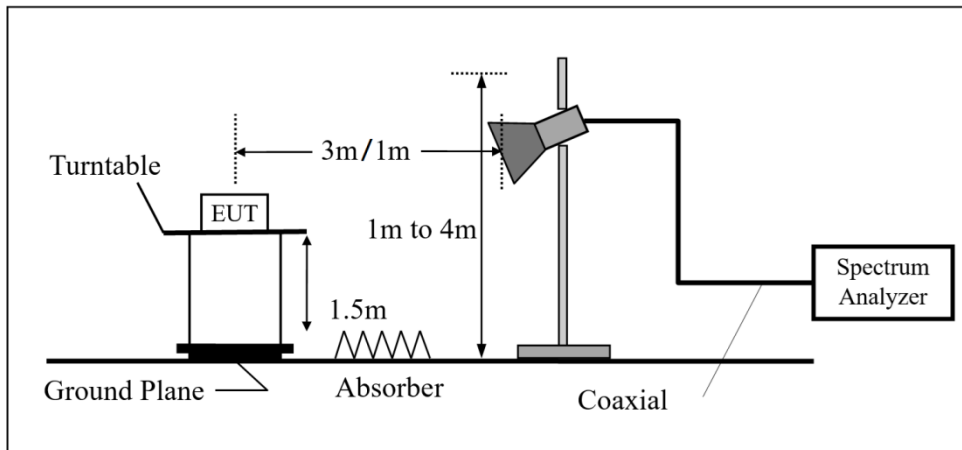

2.1.3 Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

For Radiated emission below 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

For Radiated emission Above 30MHz


- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

2.1.4 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 26.5G/40GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Above 1GHz Data

Test Mode :	Mode 1: RFID 13.56 MHz + RFID 125kHz	Test Date :	2023/02/22
Test Voltage :	AC 120V/60Hz	Temperature :	20.1 °C
Polarization :	Horizontal	Relative Humidity :	43.1 %

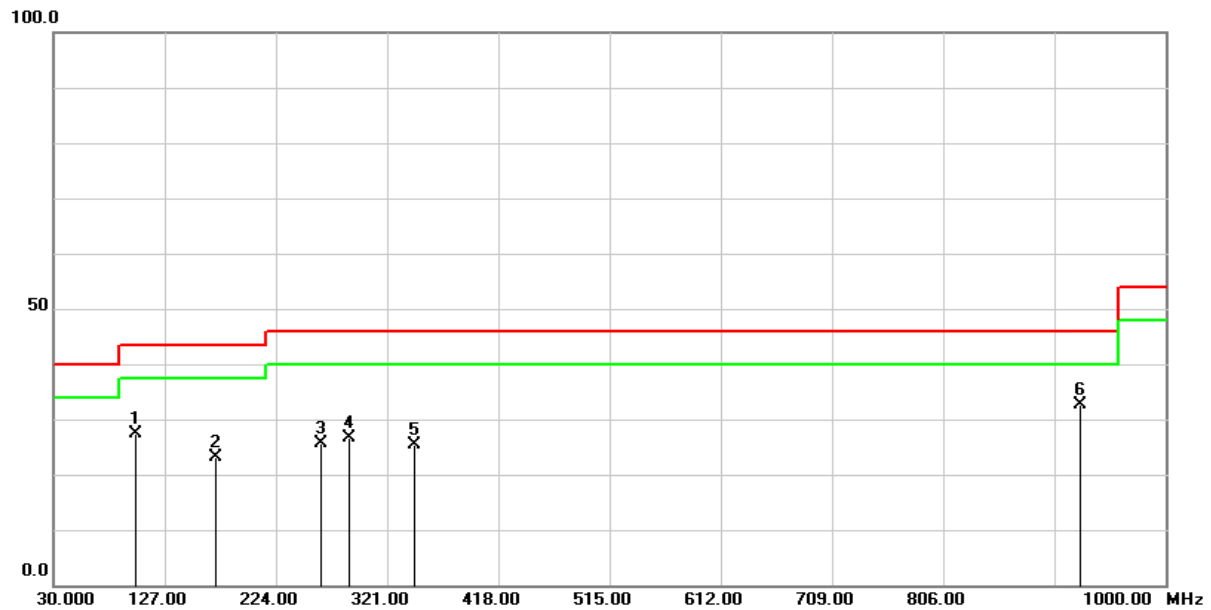


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	101.7800	43.00	-15.52	27.48	43.50	-16.02	QP
2	171.6200	34.58	-11.56	23.02	43.50	-20.48	QP
3	263.7700	36.85	-11.26	25.59	46.00	-20.41	QP
4	288.0200	37.10	-10.39	26.71	46.00	-19.29	QP
5	345.2500	34.30	-8.82	25.48	46.00	-20.52	QP
6	925.3100	28.77	3.82	32.59	46.00	-13.41	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1: RFID 13.56 MHz + RFID 125kHz	Test Date :	2023/02/22
Test Voltage :	AC 120V/60Hz	Temperature :	20.1 °C
Polarization :	Vertical	Relative Humidity :	43.1 %

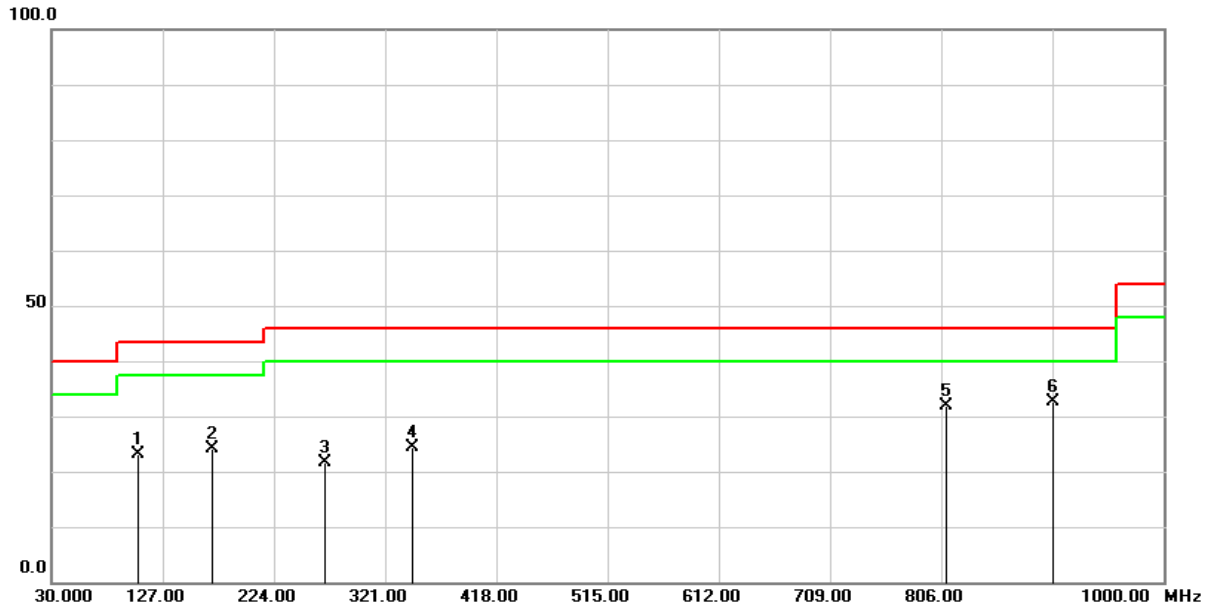


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	105.6600	37.94	-14.83	23.11	43.50	-20.39	QP
2	169.6800	35.72	-11.55	24.17	43.50	-19.33	QP
3	268.6200	32.61	-11.08	21.53	46.00	-24.47	QP
4	345.2500	33.13	-8.82	24.31	46.00	-21.69	QP
5	809.8800	29.99	1.82	31.81	46.00	-14.19	QP
6	903.9700	29.38	3.15	32.53	46.00	-13.47	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Below 1GHz Data

Test Mode :	Mode 1: RFID 13.56 MHz + RFID 125kHz	Test Date :	2023/02/22
Test Voltage :	AC 120V/60Hz	Temperature :	20.1 °C
Polarization :	Horizontal	Relative Humidity :	43.1 %

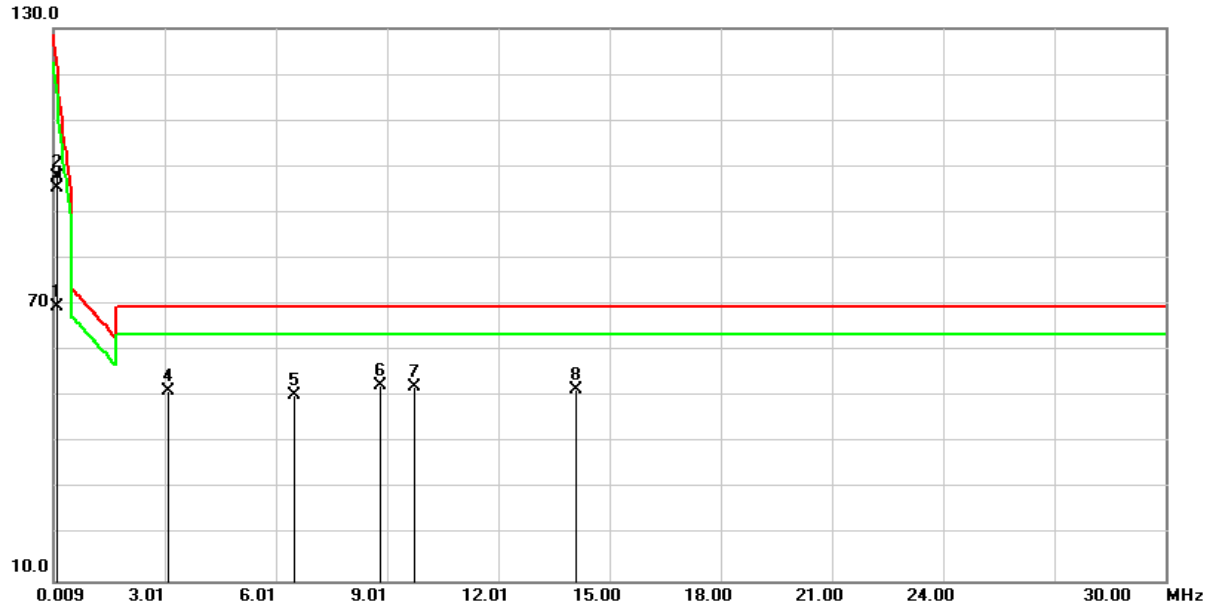


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0973	12.0500	57.6200	69.6700	107.8420	-38.1720	QP
2	0.1250	41.5100	56.2200	97.7300	125.6700	-27.9400	PEAK
3	0.1250	39.0500	56.2200	95.2700	105.6660	-10.3960	AVG
4	3.1052	14.0000	37.2400	51.2400	69.5424	-18.3024	QP
5	6.4782	13.2100	37.2200	50.4300	69.5424	-19.1124	QP
6	8.8065	14.4500	38.1100	52.5600	69.5424	-16.9824	QP
7	9.7020	13.5600	38.4500	52.0100	69.5424	-17.5324	QP
8	14.0900	13.4000	38.0900	51.4900	69.5424	-18.0524	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Mode 1: RFID 13.56 MHz + RFID 125kHz	Test Date :	2023/02/22
Test Voltage :	AC 120V/60Hz	Temperature :	20.1 °C
Polarization :	Vertical	Relative Humidity :	43.1 %

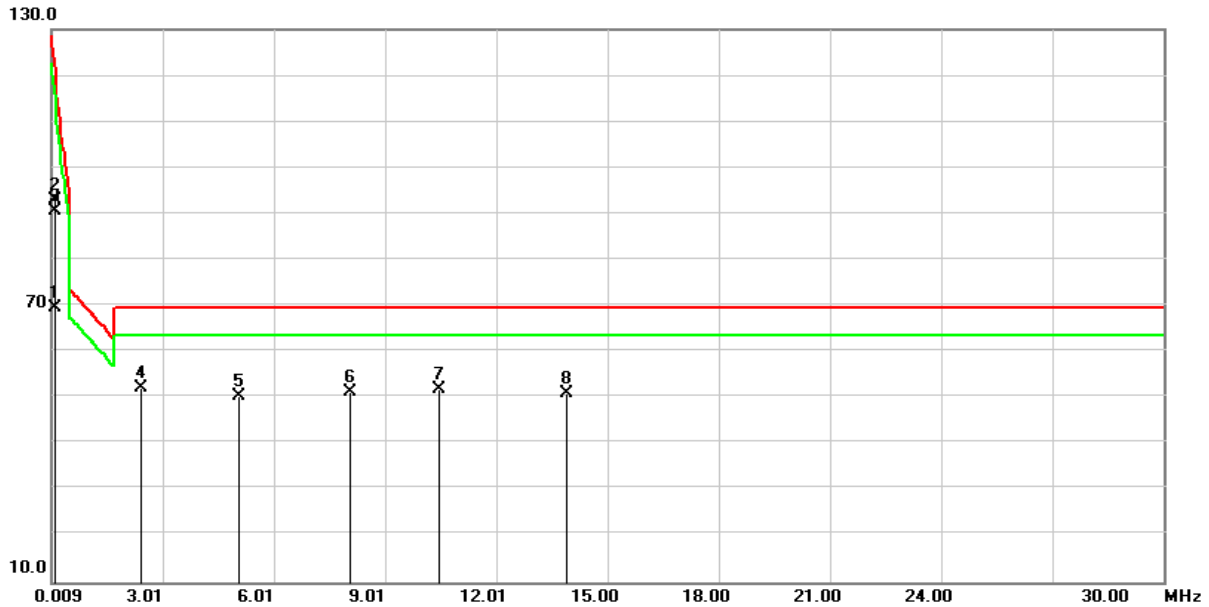

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0964	11.9100	57.7500	69.6600	107.9227	-38.2627	QP
2	0.1250	36.8300	56.2200	93.0500	125.6700	-32.6200	PEAK
3	0.1250	34.4100	56.2200	90.6300	105.6660	-15.0360	AVG
4	2.4186	13.6600	38.4800	52.1400	69.5424	-17.4024	QP
5	5.0752	13.5100	36.6900	50.2000	69.5424	-19.3424	QP
6	8.0304	13.3300	37.8200	51.1500	69.5424	-18.3924	QP
7	10.4781	13.2900	38.5200	51.8100	69.5424	-17.7324	QP
8	13.8810	12.8100	38.1200	50.9300	69.5424	-18.6124	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.2 AC Conducted Emissions Measurement

2.2.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*Decreases with the logarithm of the frequency

2.2.2 Test Setup

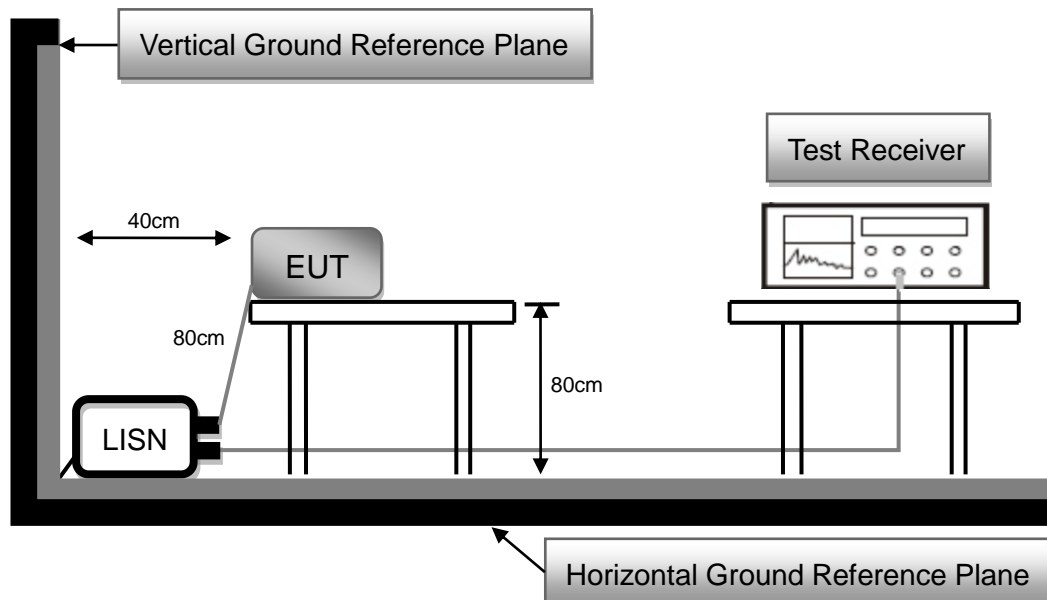


2.2.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The test data of the worst case was recorded.

2.2.4 Test Result

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Mode 1: RFID 13.56 MHz + RFID 125kHz	6dB Bandwidth :	9 kHz
Test Date :	2023/03/07	Phase :	L
Temperature :	22.1°C	Humidity :	45 %

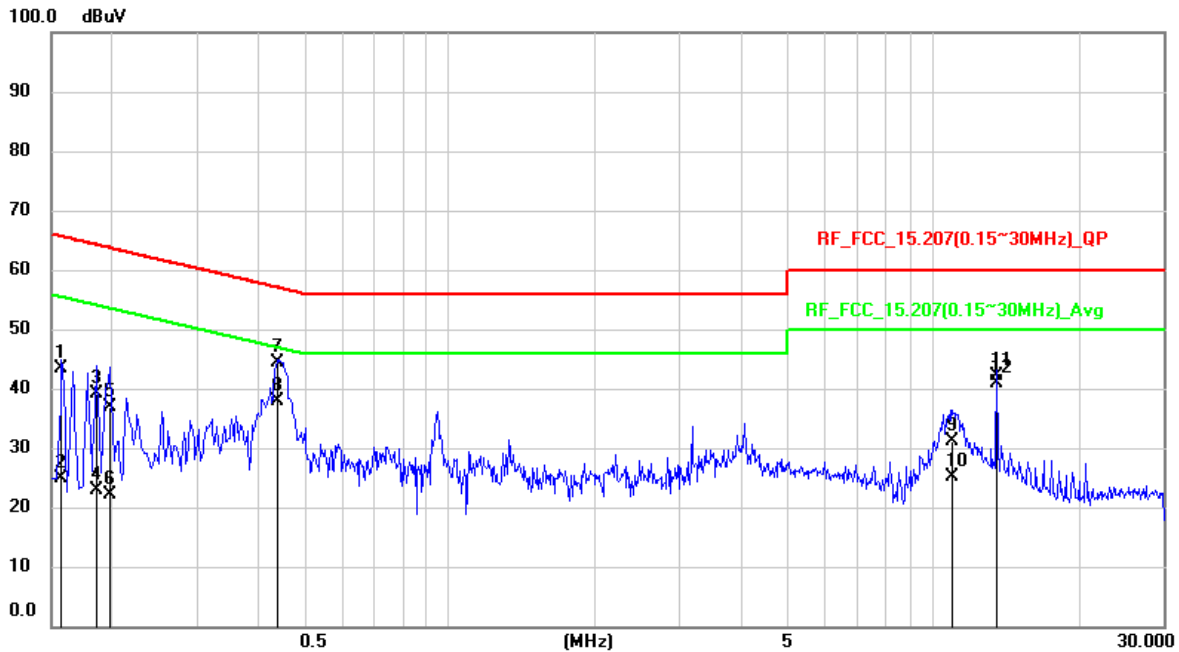


No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1562	33.52	9.81	43.33	65.66	-22.33	QP
2	0.1562	15.12	9.81	24.93	55.66	-30.73	AVG
3	0.1856	29.32	9.8	39.12	64.23	-25.11	QP
4	0.1856	13.12	9.8	22.92	54.23	-31.31	AVG
5	0.198	27.12	9.8	36.92	63.69	-26.77	QP
6	0.198	12.24	9.8	22.04	53.69	-31.65	AVG
7	0.442	34.58	9.81	44.39	57.02	-12.63	QP
8	0.442	28.11	9.81	37.92	47.02	-9.1	AVG
9	10.9814	21.08	10.04	31.12	60	-28.88	QP
10	10.9814	15.1	10.04	25.14	50	-24.86	AVG
11	13.561	32.07	10.09	42.16	60	-17.84	QP
12	13.561	30.79	10.09	40.88	50	-9.12	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Mode 1: RFID 13.56 MHz + RFID 125kHz	6dB Bandwidth :	9 kHz
Test Date :	2023/03/07	Phase :	N
Temperature :	22.1°C	Humidity :	45 %

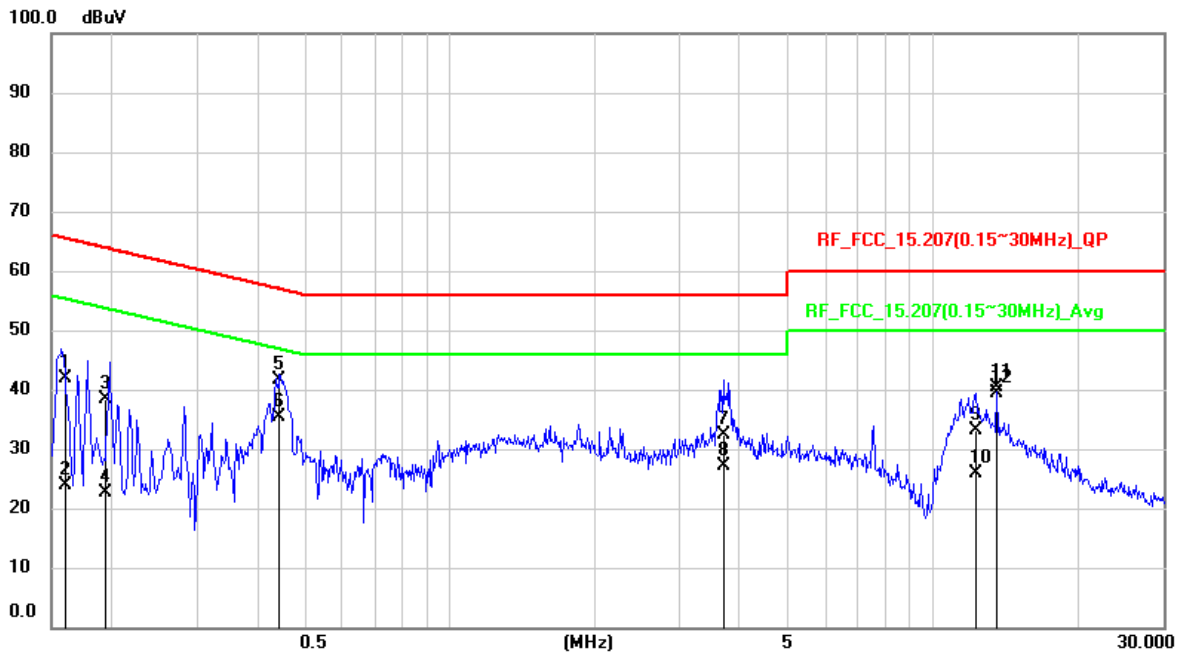

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1602	32.06	9.81	41.87	65.45	-23.58	QP
2	0.1602	14.12	9.81	23.93	55.45	-31.52	AVG
3	0.1945	28.59	9.8	38.39	63.84	-25.45	QP
4	0.1945	12.71	9.8	22.51	53.84	-31.33	AVG
5	0.446	31.82	9.81	41.63	56.95	-15.32	QP
6	0.446	25.45	9.81	35.26	46.95	-11.69	AVG
7	3.6939	22.36	9.92	32.28	56	-23.72	QP
8	3.6939	17.09	9.92	27.01	46	-18.99	AVG
9	12.281	22.95	10.06	33.01	60	-26.99	QP
10	12.281	15.79	10.06	25.85	50	-24.15	AVG
11	13.5612	30.29	10.09	40.38	60	-19.62	QP
12	13.5612	29.38	10.09	39.47	50	-10.53	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value - Limit Value

--- END ---