



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement..... 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 30

 3.6 AC Conducted Emission Measurement..... 34

 3.7 Antenna Requirements 36

4 LIST OF MEASURING EQUIPMENT 37

5 UNCERTAINTY OF EVALUATION 39

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR210804C	Rev. 01	Initial issue of report	Mar. 07, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.02 dB at 2389.950 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.06 dB at 0.502 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Remark: Not required means after assessing, test items are not necessary to carry out.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Sonim Technologies, Inc.

6500 River Place Blvd. Building 7, Suite 250, Austin, TX 78730, USA

1.2 Manufacturer

Sonim Technologies, Inc.

6500 River Place Blvd. Building 7, Suite 250, Austin, TX 78730, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM, WCDMA, LTE Cell Phone
Brand Name	Sonim
Model Name	XP5900(P14500) XP5900(P14600) XP5900(P14510) XP5900(P14610) XP5900(P14501) XP5900(P14601)
FCC ID	WYPP14510
IMEI Code	Conducted: 357855510003391/357855510008390 Conduction: 016107000012711 Radiation: 016107000012646 for Sample 1 004400152020002 for Sample 2
HW Version	1.0
SW Version	5P.2.0-01-11.0.0-10.22.14
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The different model names are for different market purpose.
3. There are two types of EUT, the sample 1 is 1st source with different Carriers and the sample 2 is 2nd source with different Carriers. The difference could refer to the XP5900_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we evaluate the sample 1 to perform full test and the sample 2 is verified for RSE testing.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 14.05 dBm (0.0254 W) 802.11g : 20.13 dBm (0.1030 W) 802.11n HT20 : 20.36 dBm (0.1086 W) 802.11n HT40 : 22.95 dBm (0.1972 W)
99% Occupied Bandwidth	802.11b : 14.14MHz 802.11g : 17.58MHz 802.11n HT20 : 18.73MHz 802.11n HT40 : 36.56MHz
Antenna Type / Gain	PIFA Antenna type with gain 0.25 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS 03CH04-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	03CH04-KS	AUDIX	E3	6.2009-8-24a
3.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link (2.4G)+Adapter+ Earphone
Remark:	
<ol style="list-style-type: none"> For Radiated Test Cases, The tests were performed with Adapter, Earphone. All test modes of the Radiated Spurious Emission (RSE) were tested; only the worst data in each bandwidth are shown in the reported. 	

Simultaneous transmission
802.11b CH 11(2462MHz)+LTE_B13(BW=5M) for sample 1 BLE CH 39 (2480MHz)+LTE_B13(BW=5M) for sample 1 802.11n HT40 CH03(2422MHz)+LTE_B13(BW=5M) for sample 2 BLE CH 39 (2480MHz)+LTE_B13(BW=5M) for sample 2

2.3 Connection Diagram of Test System

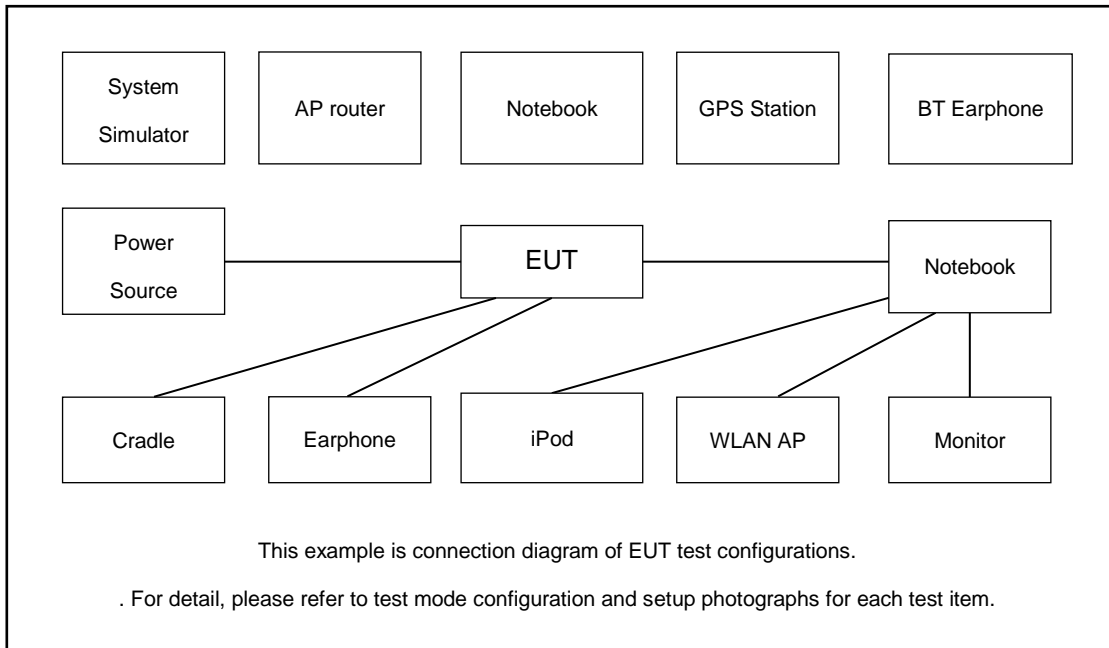

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	SD Card	Kingston	8GB	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	N/A	N/A
6.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.0 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} . \\ &= 6.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

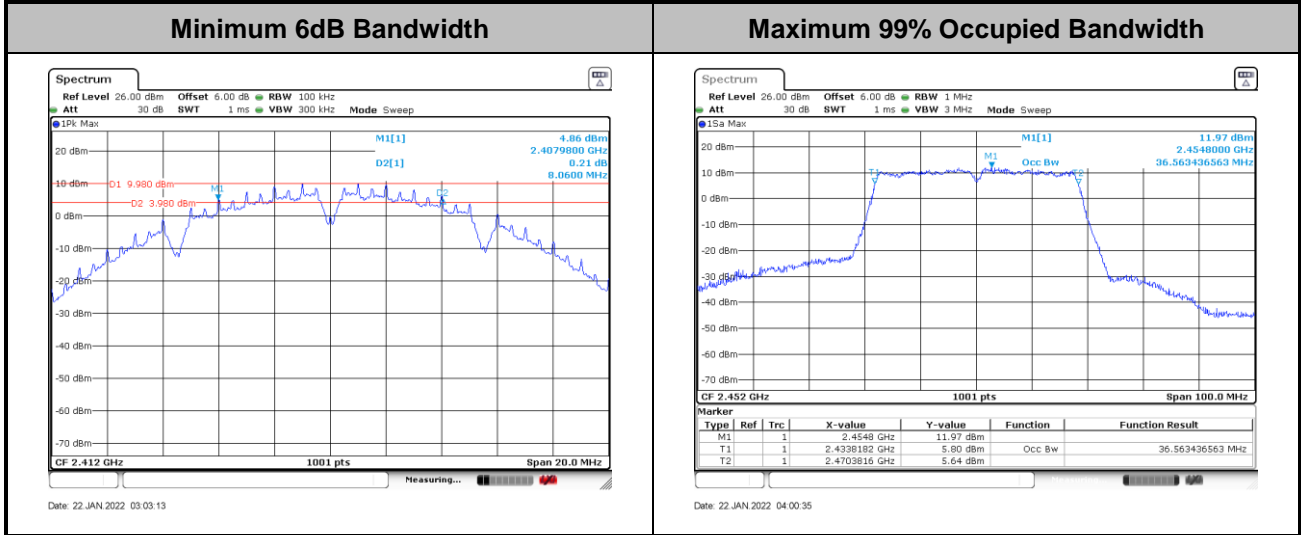

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1
Peak power meter
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

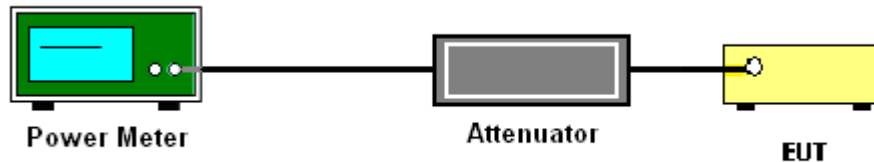

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

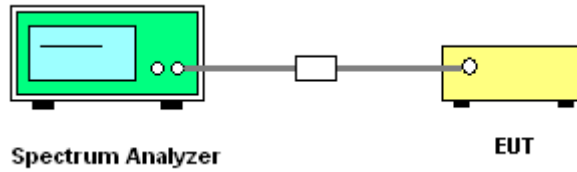

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

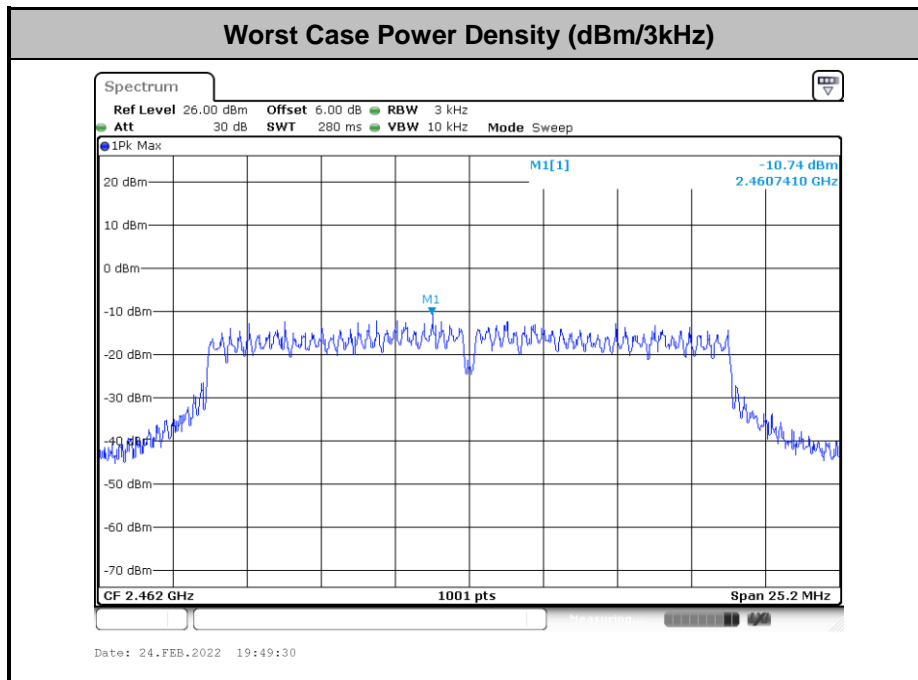

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer : Alan He	Temperature :	21~25°C
	Relative Humidity :	51~54%



Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

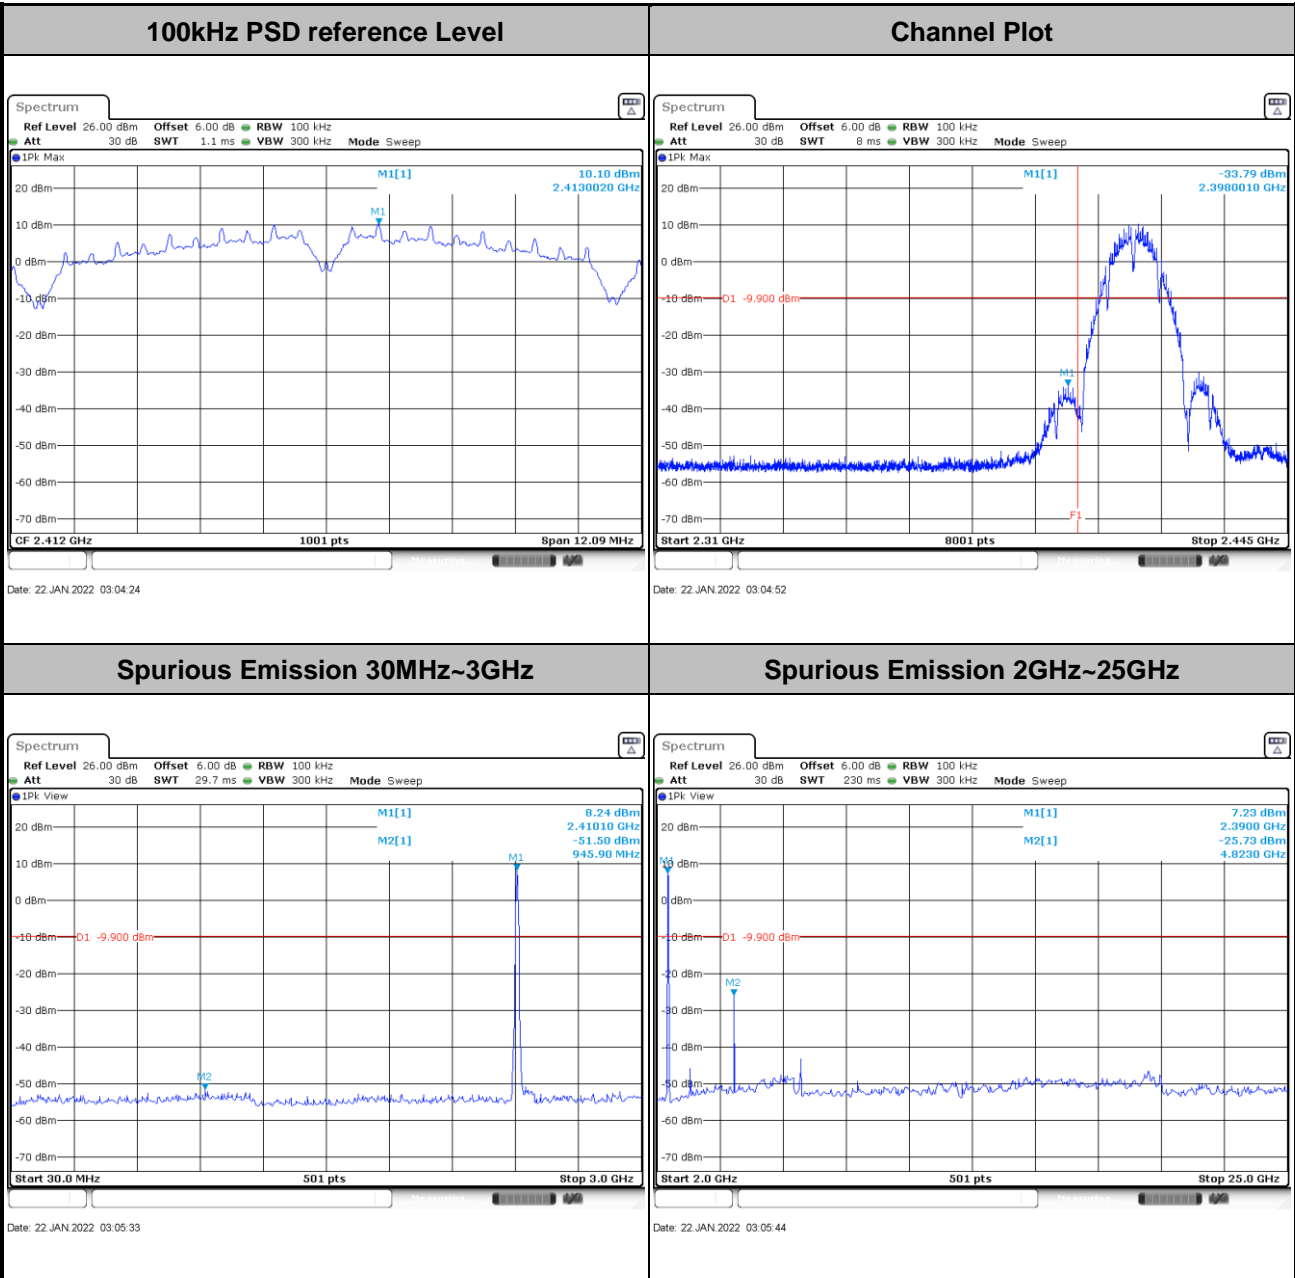





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

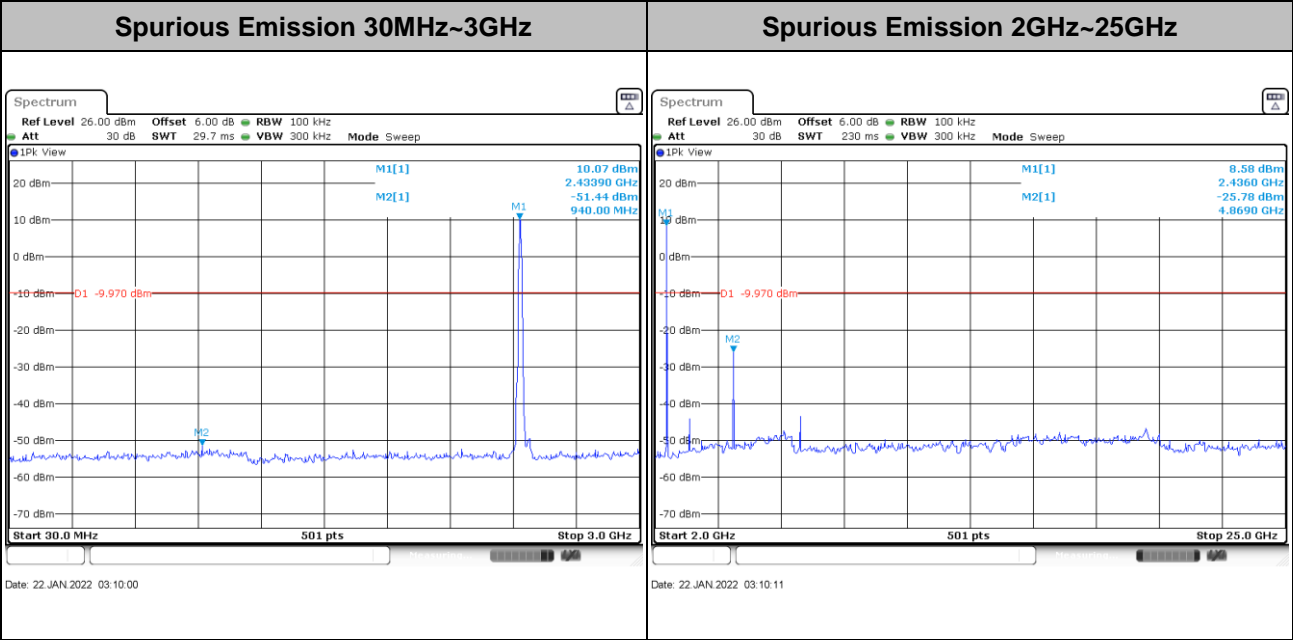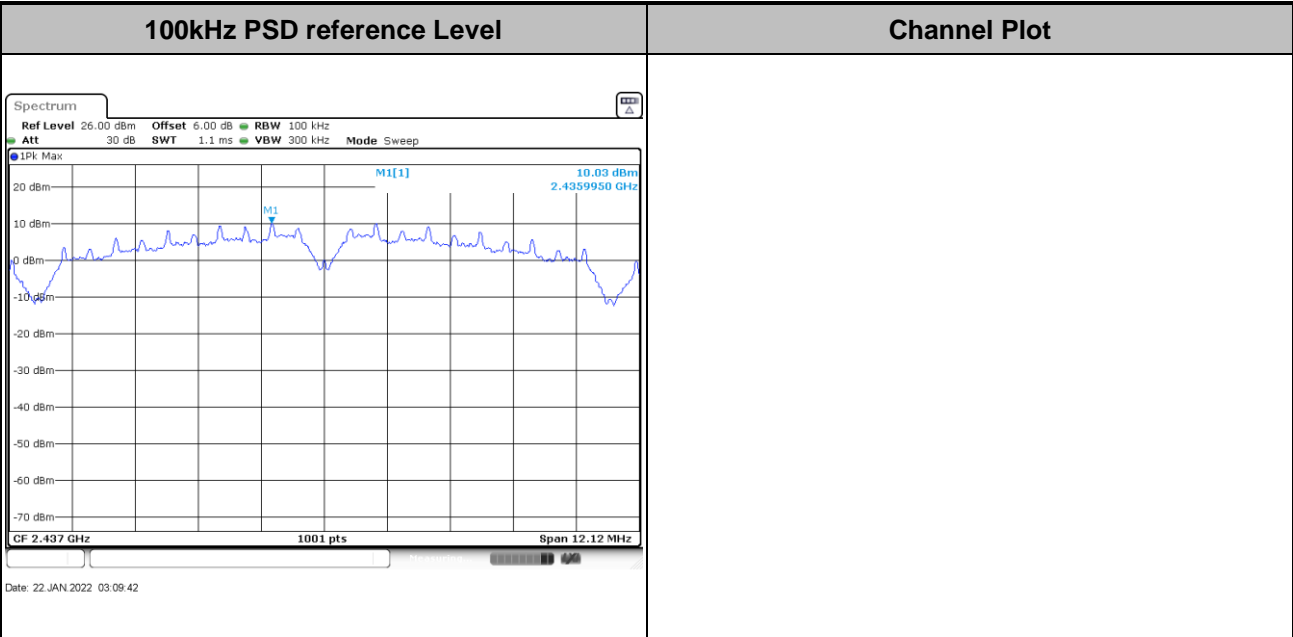





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

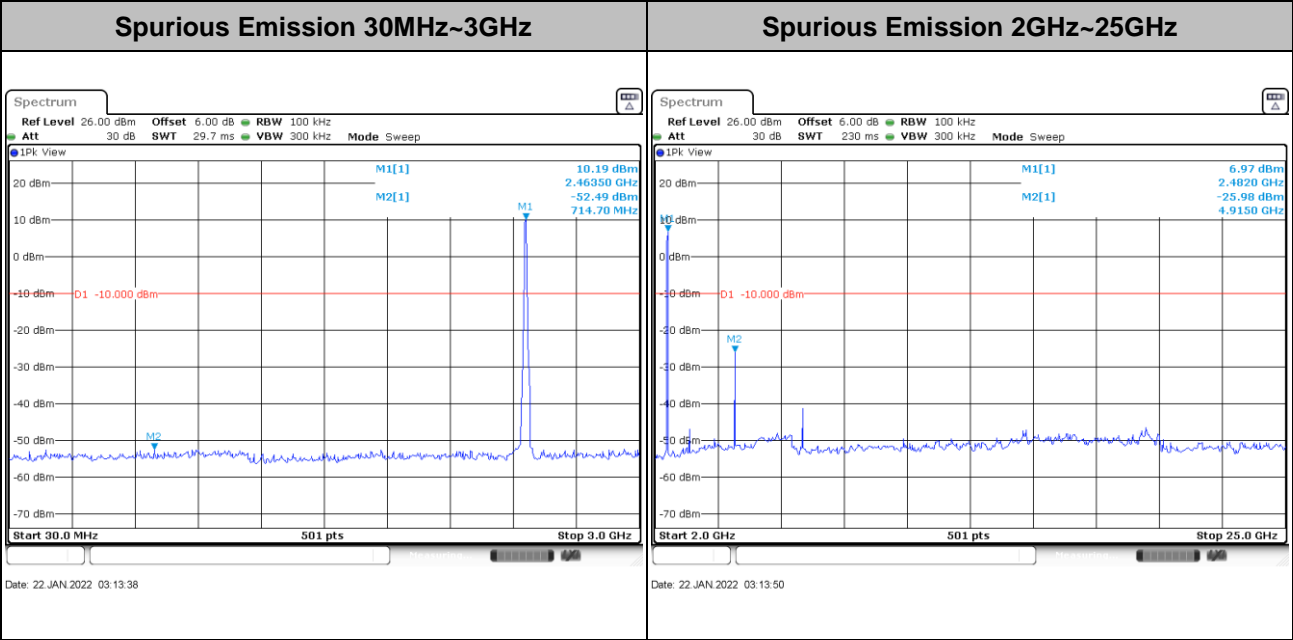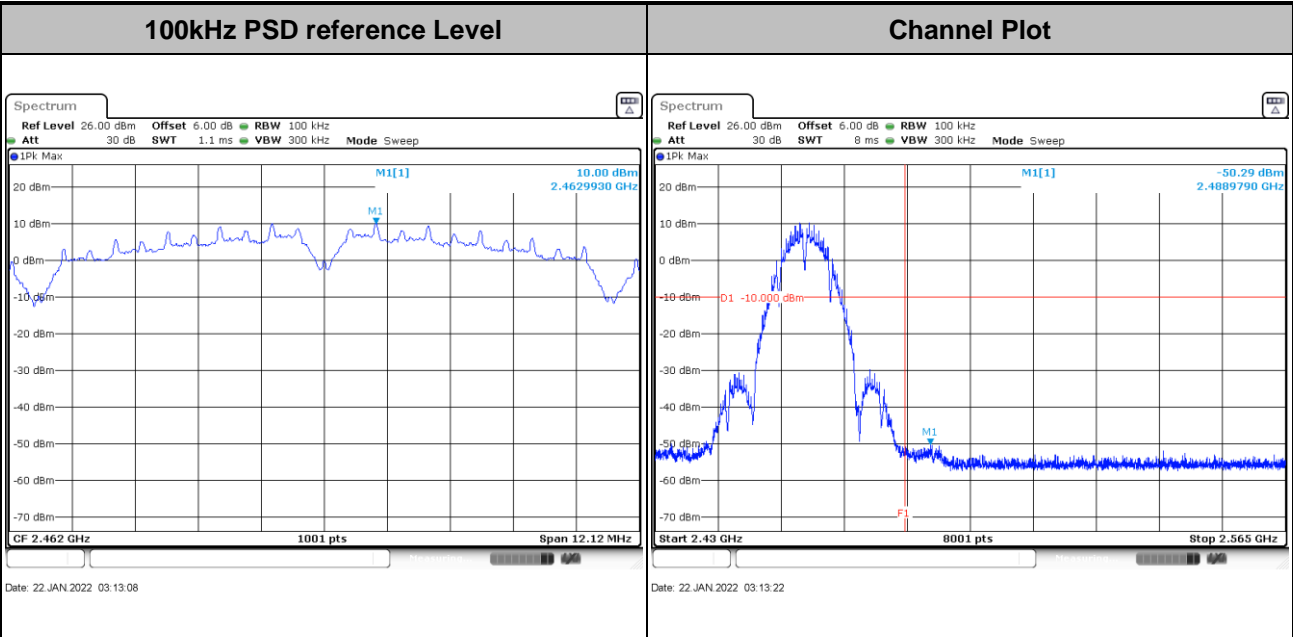





Test Mode : 802.11g Test Channel : 01

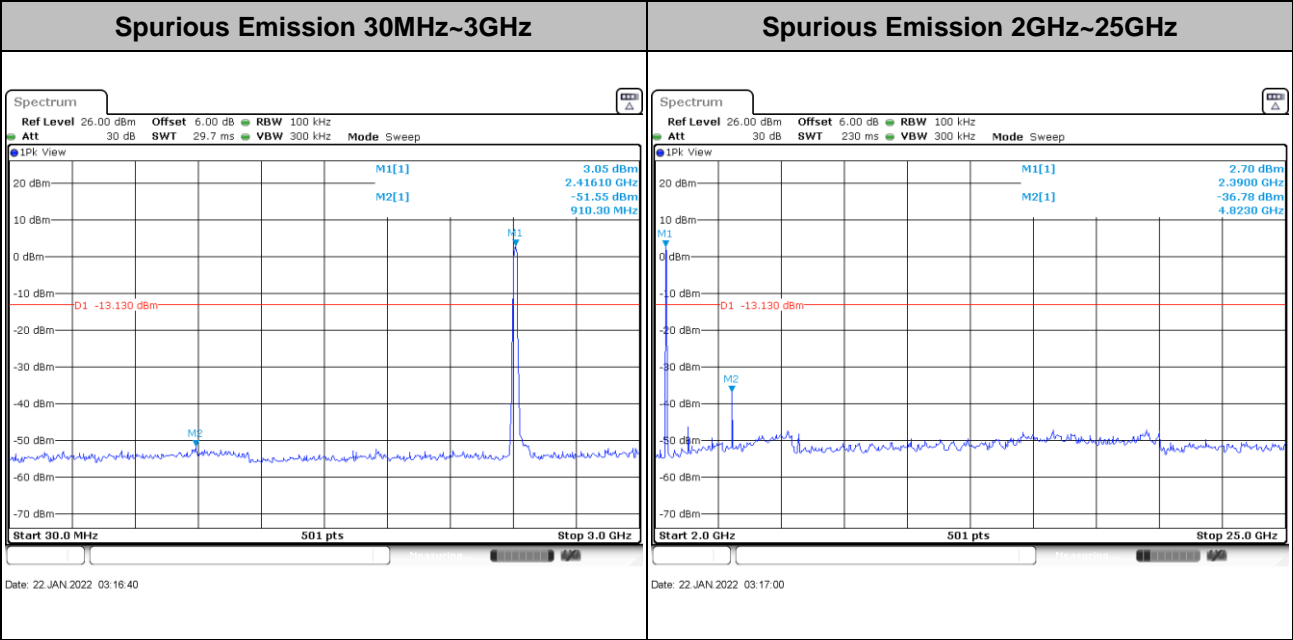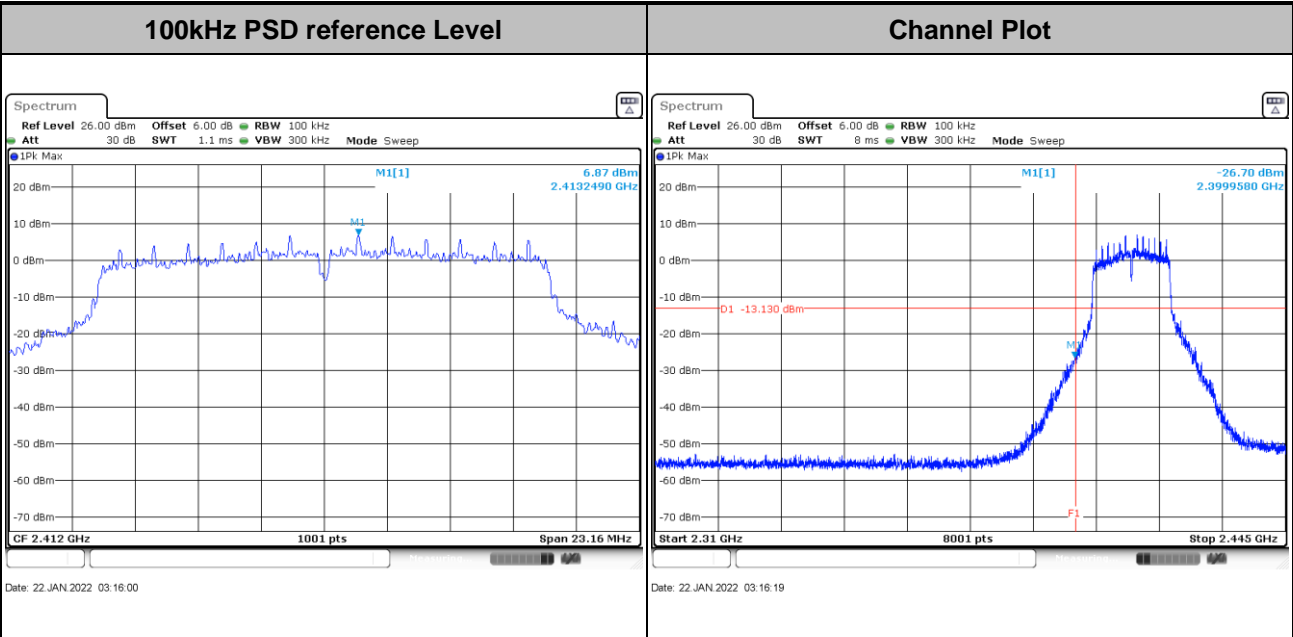





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

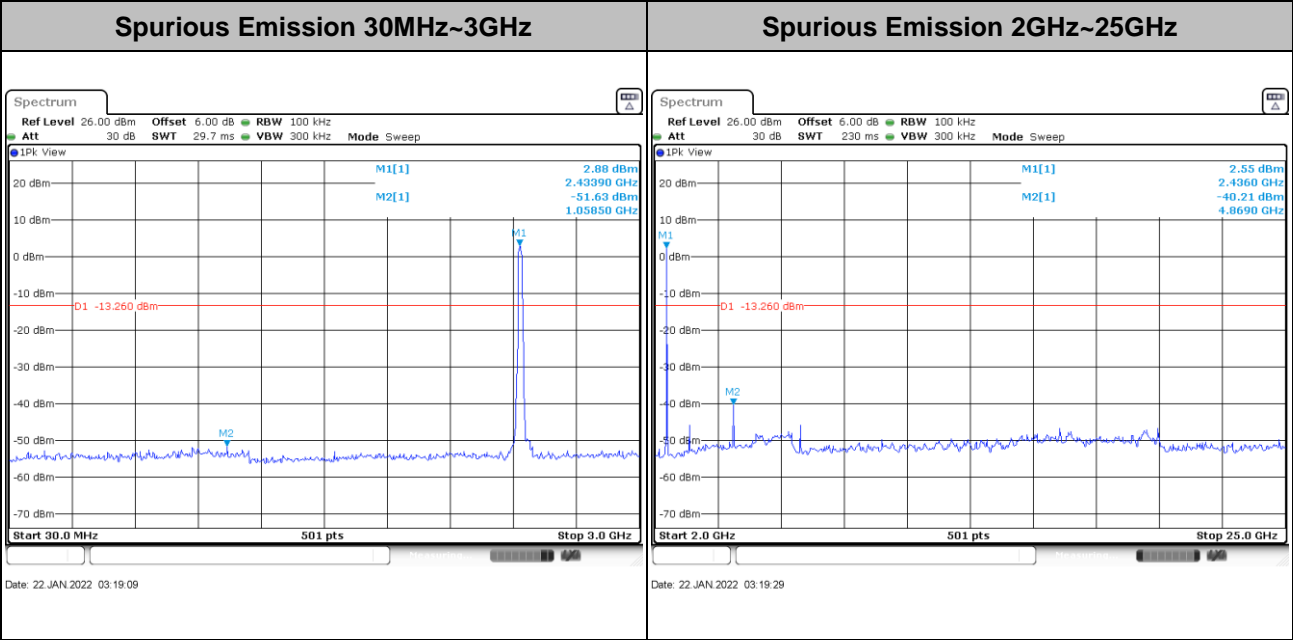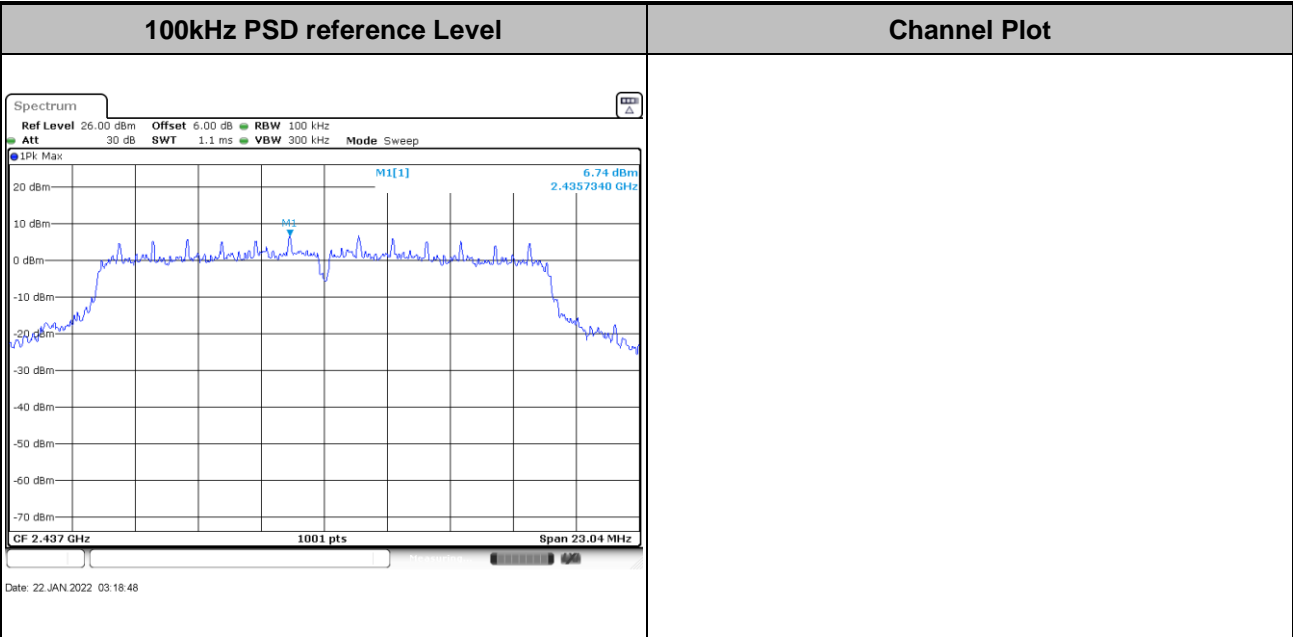







Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

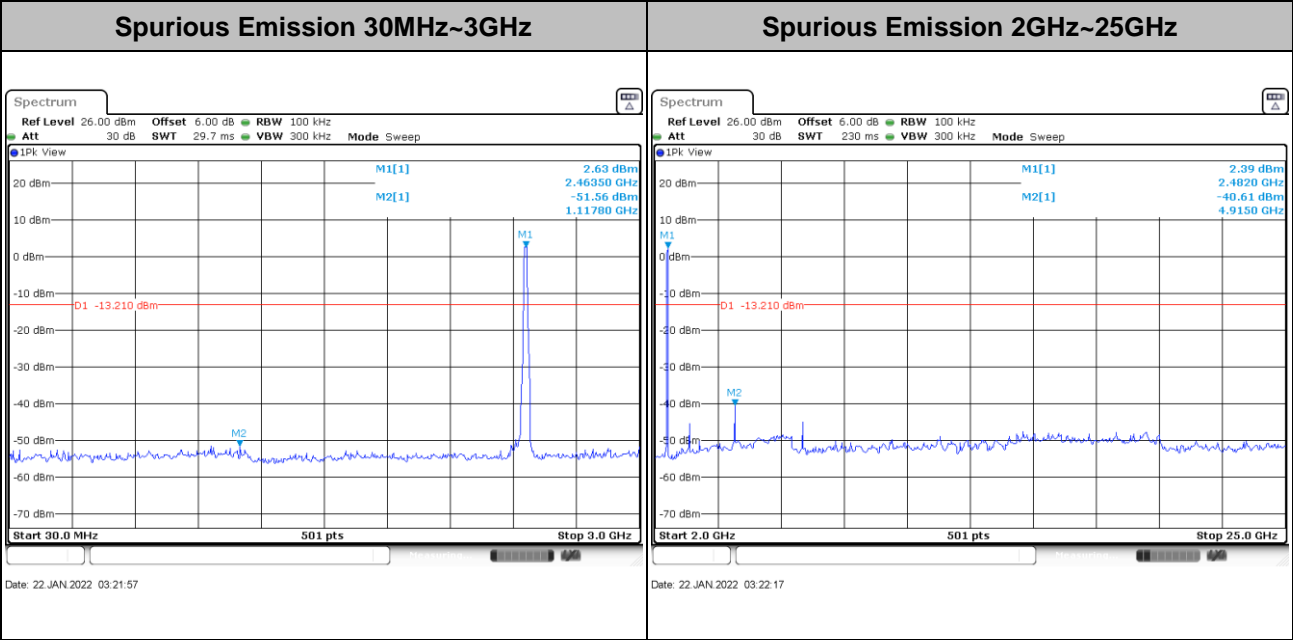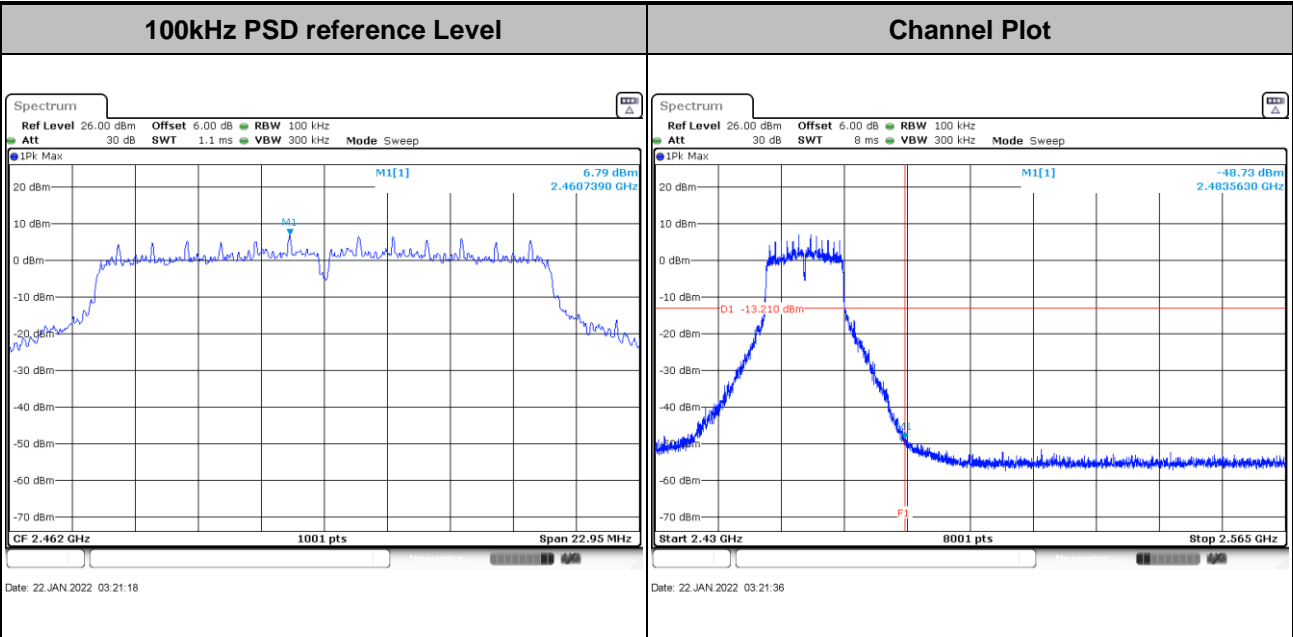





Test Mode : 802.11n HT20 Test Channel : 01

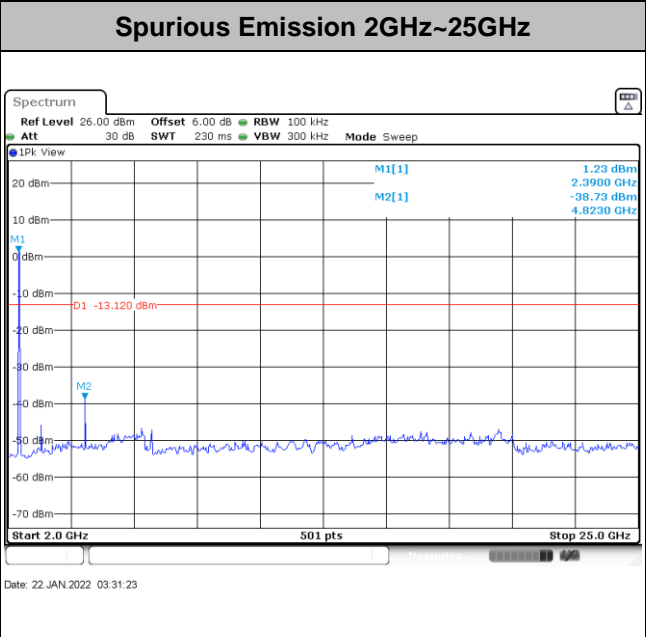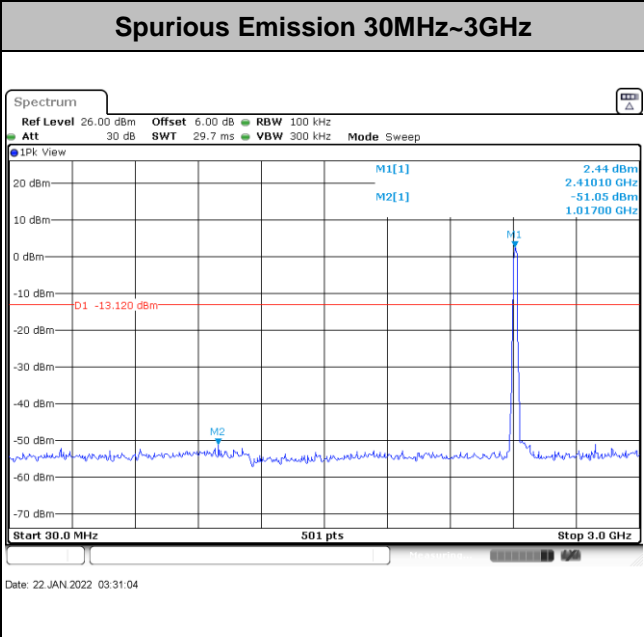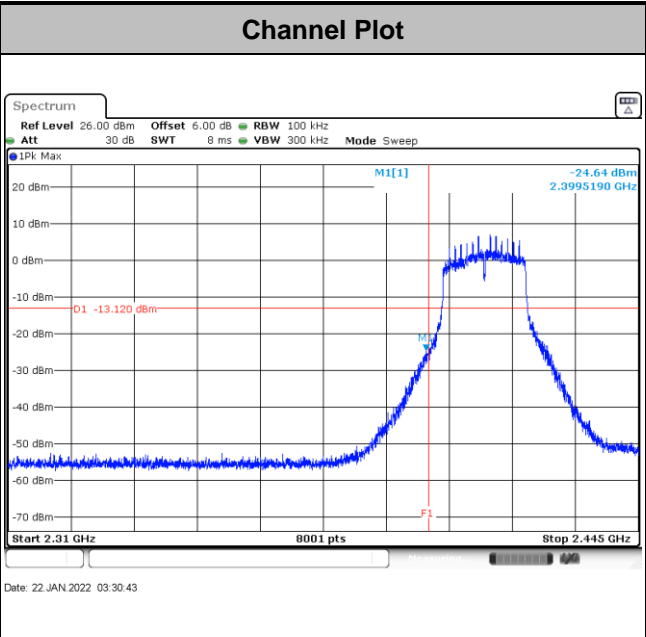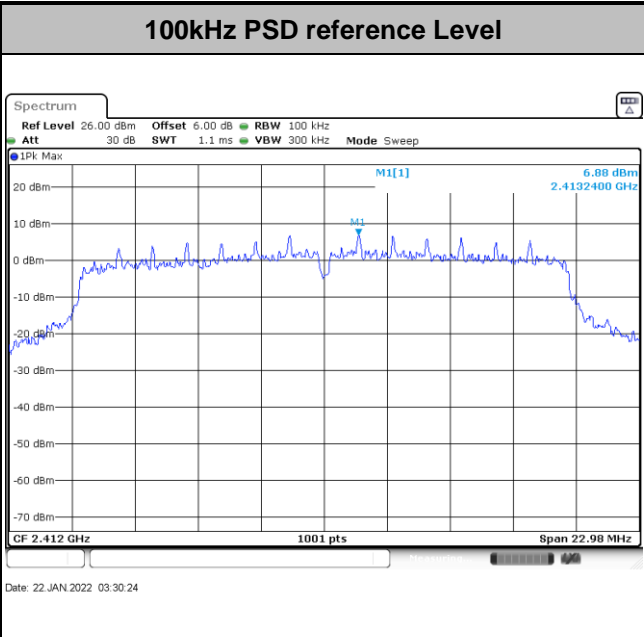





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

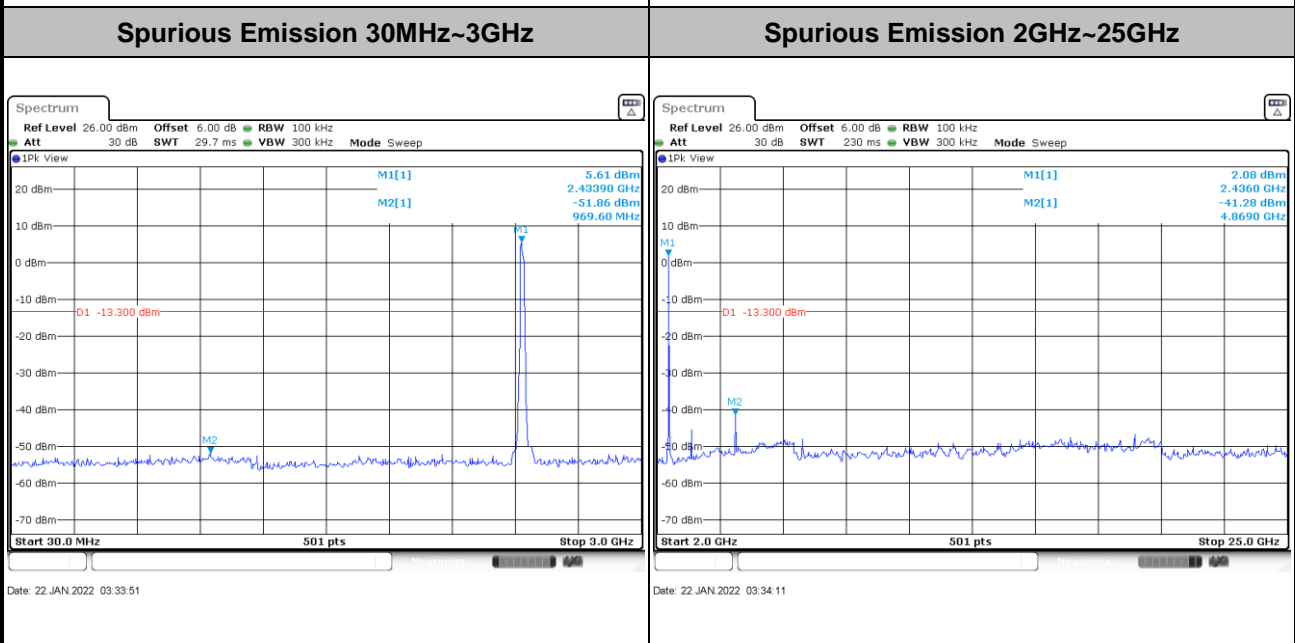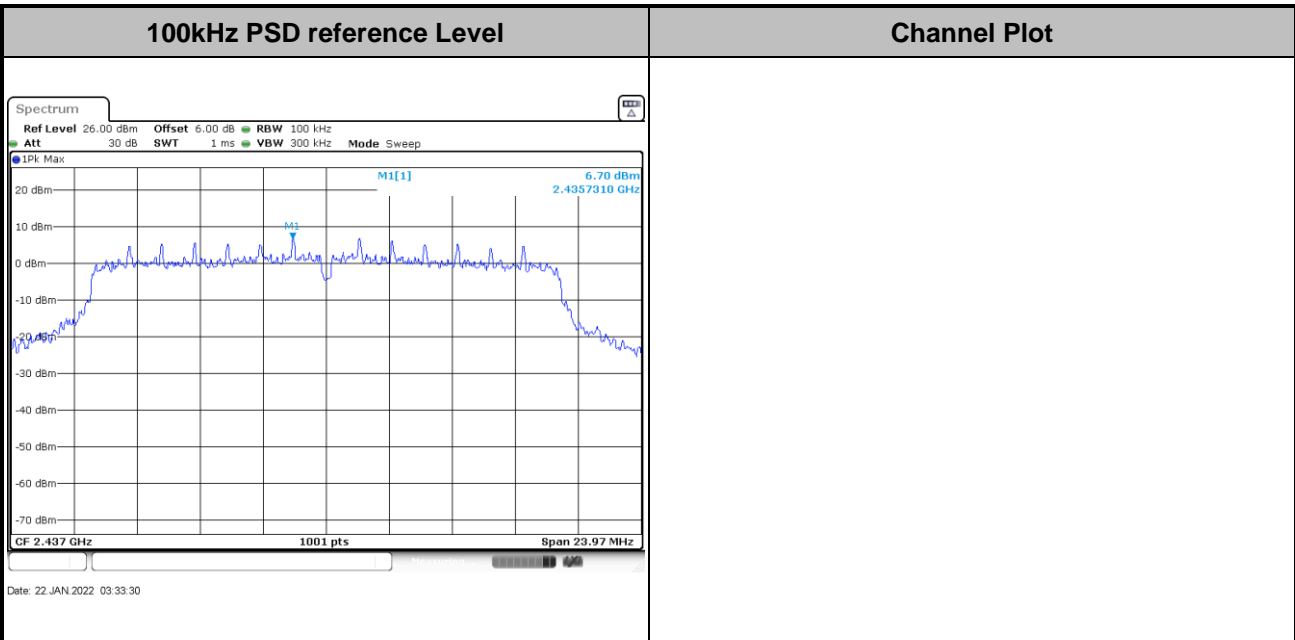





Test Mode : 802.11n HT20 Test Channel : 11

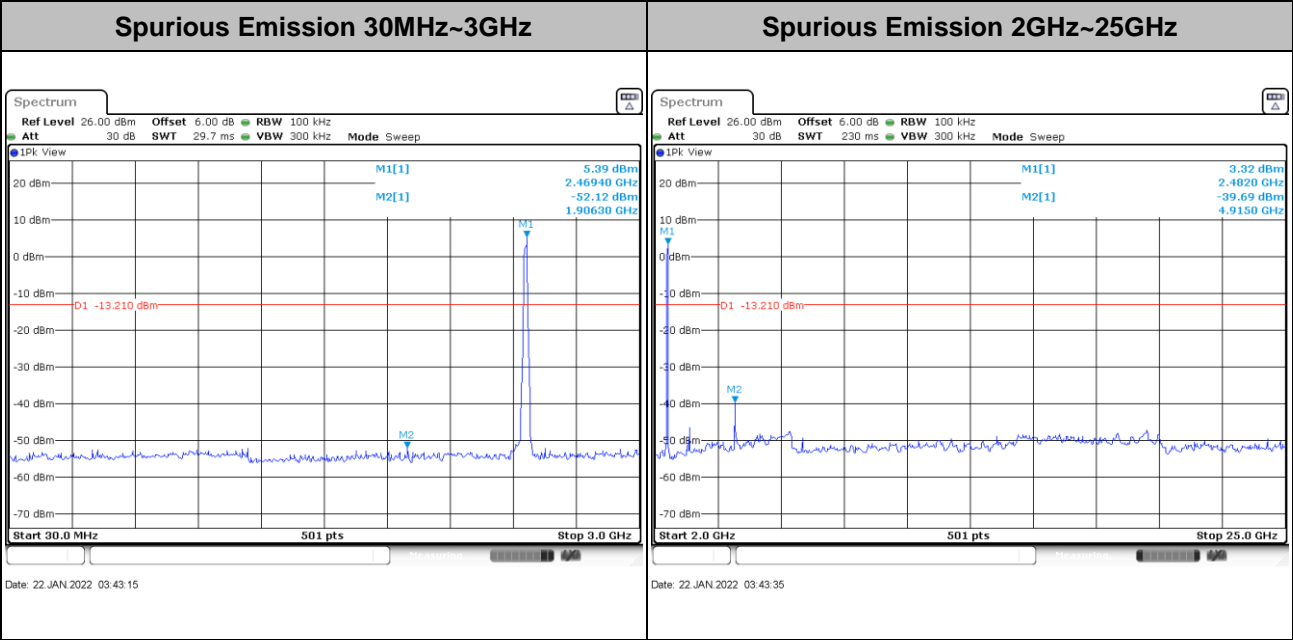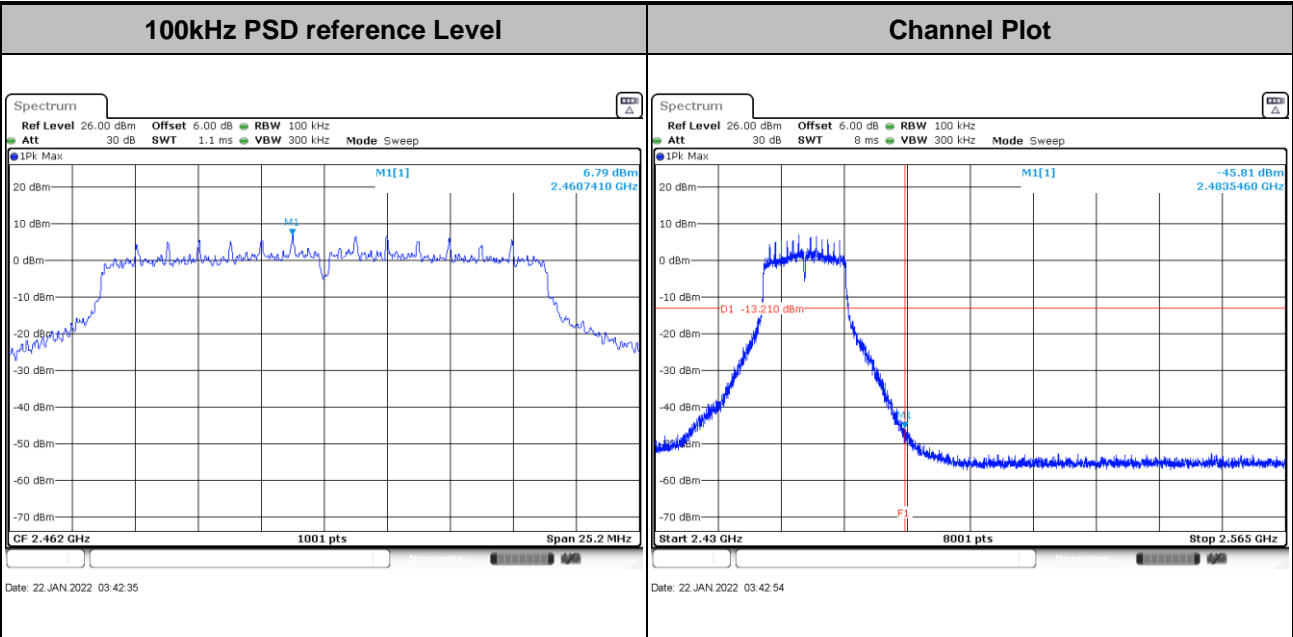





Test Mode : 802.11n HT40 Test Channel : 03

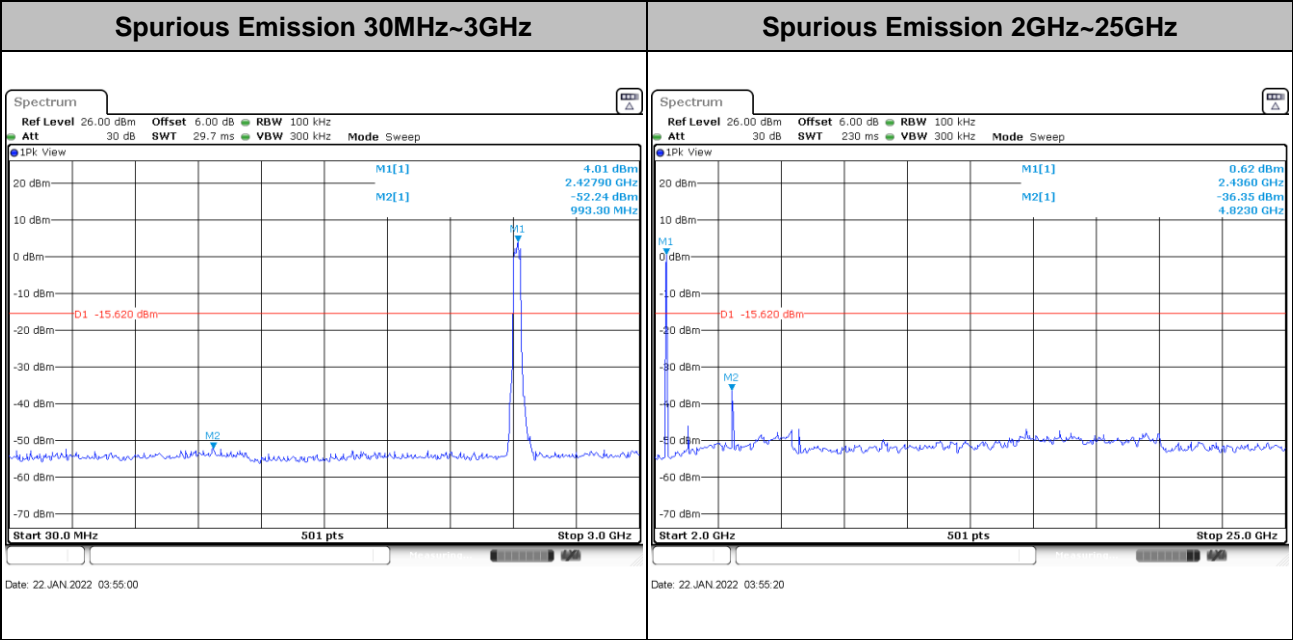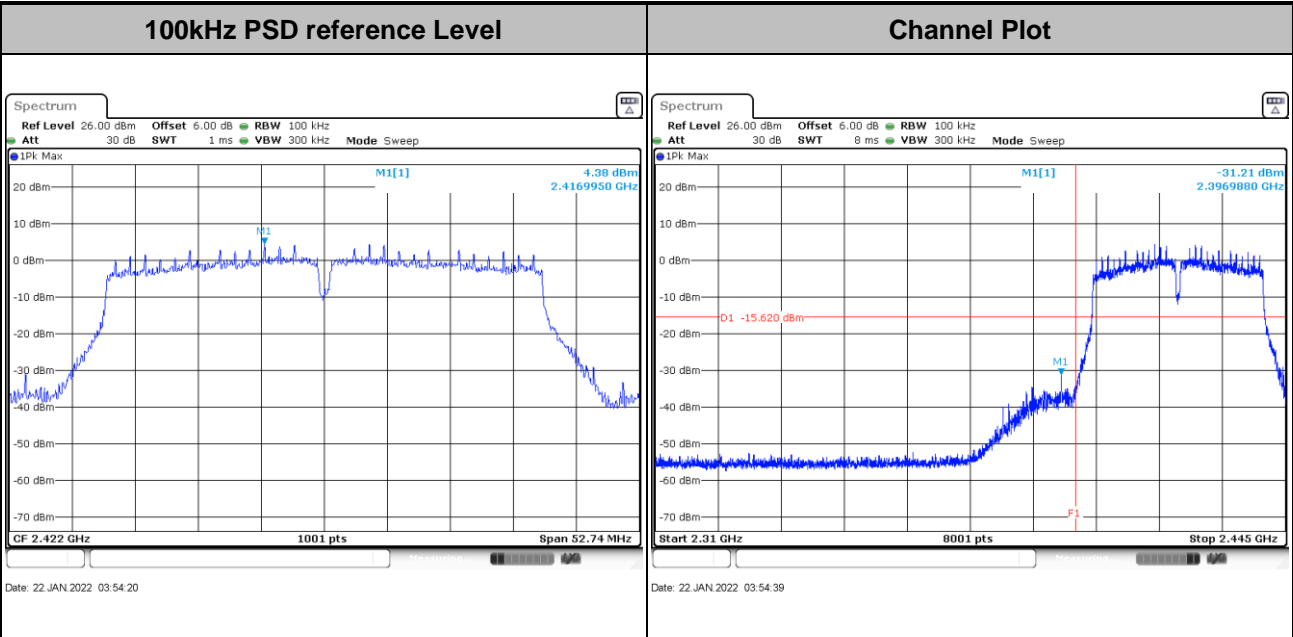





Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

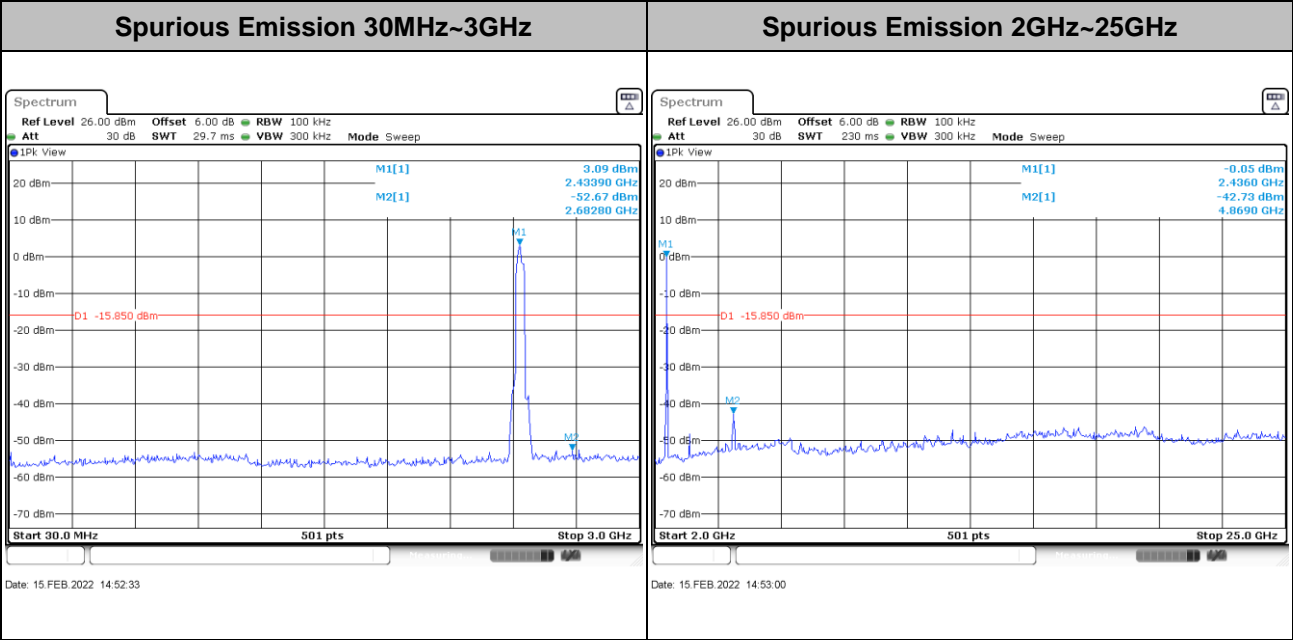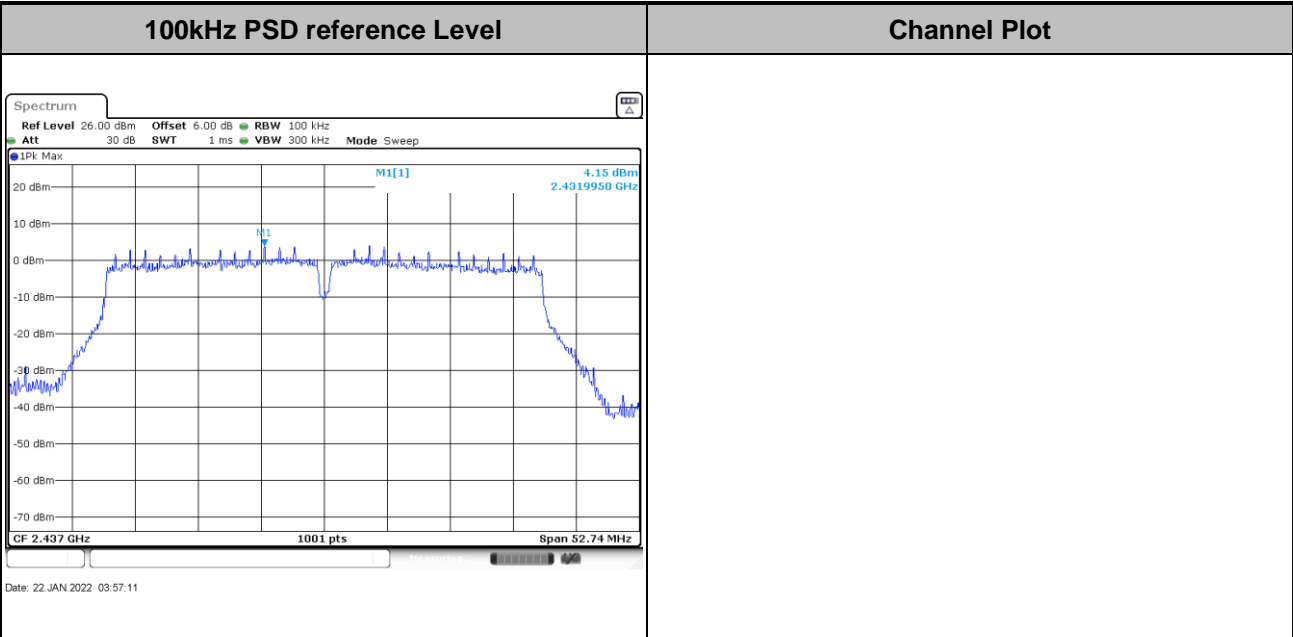



Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----

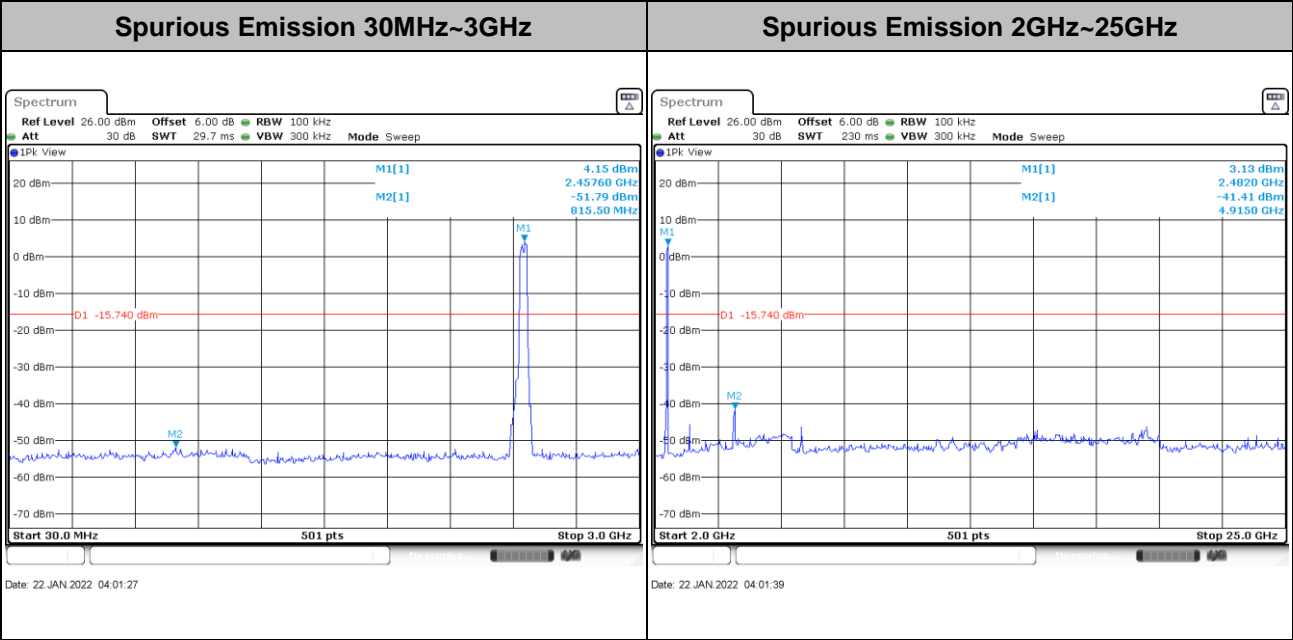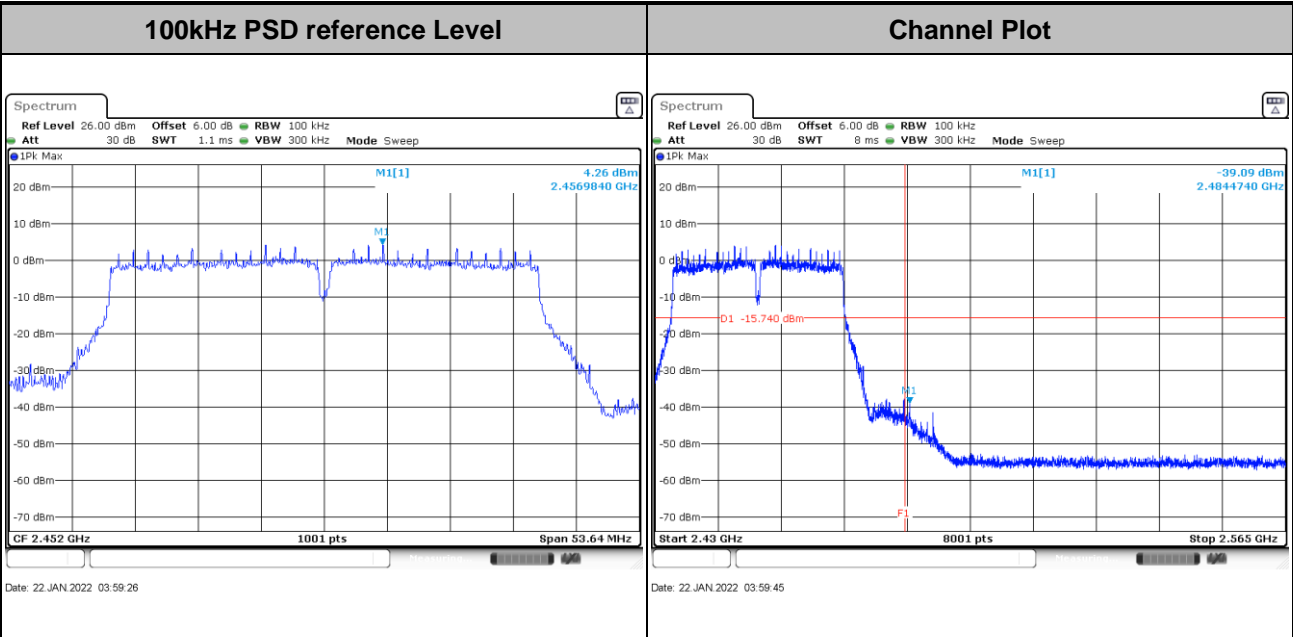



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

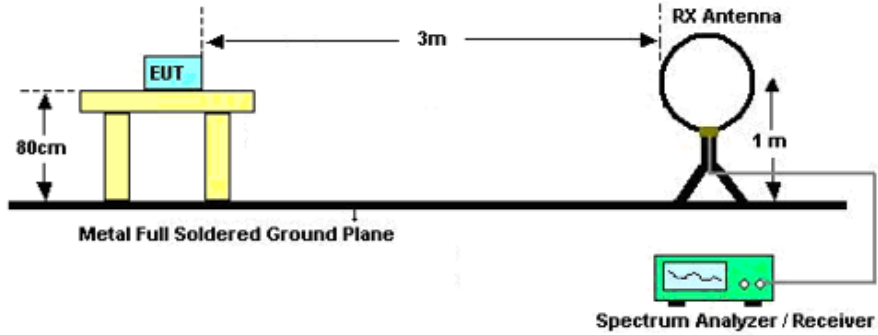

For radiated emissions from 30MHz to 1GHz

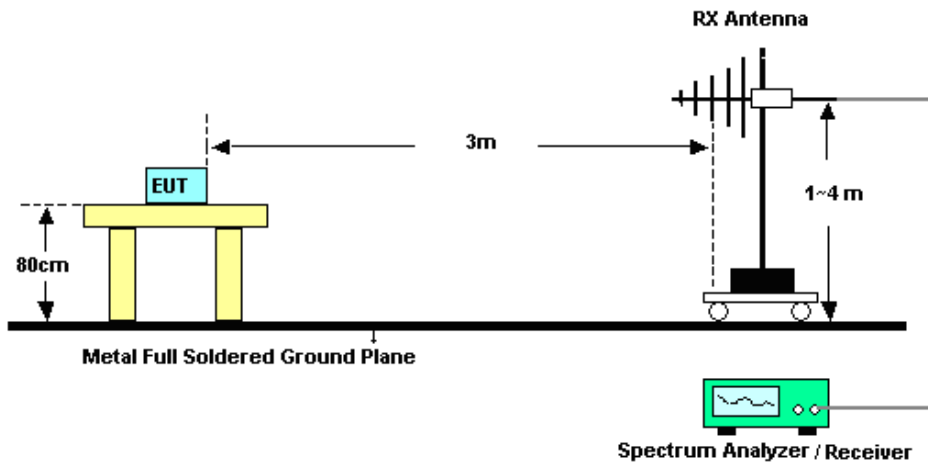

For radiated emissions above 1GHz

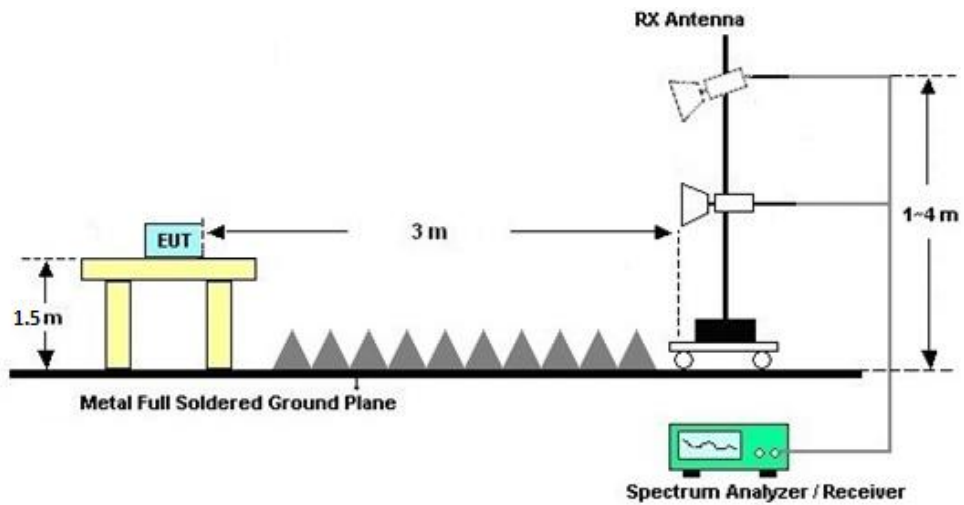



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jan. 22, 2022~ Feb. 24, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jan. 22, 2022~ Feb. 24, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jan. 22, 2022~ Feb. 24, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Jan. 06, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 16, 2021	Jan. 06, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jan. 06, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Jan. 06, 2022	Dec. 21, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Jan. 06, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-001 01800-30-10 P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jan. 06, 2022	Jul. 29, 2022	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jan. 06, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Apr. 13, 2021	Jan. 06, 2022	Apr. 12, 2022	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jan. 06, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Jan. 06, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Jan. 06, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 06, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 06, 2022	NCR	Radiation (03CH02-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 12, 2021	Jan. 06, 2022	Jul. 11, 2022	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr.13, 2021	Jan. 06, 2022	Apr. 12, 2022	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jan. 06, 2022	Oct. 29, 2022	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 30, 2021	Jan. 06, 2022	May 29, 2022	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 18, 2021	Jan. 06, 2022	Apr. 17, 2022	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jan. 06, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Nov. 01, 2021	Jan. 06, 2022	Oct 31, 2022	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Jan. 06, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-001 01800-30-10 P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jan. 06, 2022	Jul. 29, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 12, 2021	Jan. 06, 2022	Oct. 11, 2022	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F10409000 4	N/A	NCR	Jan. 06, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 06, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 06, 2022	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Feb. 01, 2022	Apr. 20, 2022	Conduction (CO01-KS)



AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Feb. 01, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Apr. 13, 2021	Feb. 01, 2022	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Feb. 01, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

03CH02-KS:

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

03CH04-KS:

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Report Number : FR210804C

A1 - DTS Part

Test Engineer:	Alan He	Temperature:	21~25	°C
Test Date:	2022.1.22~2022.2.24	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	14.04	8.06	0.50	Pass
11b	1Mbps	1	6	2437	14.09	8.08	0.50	Pass
11b	1Mbps	1	11	2462	14.14	8.08	0.50	Pass
11g	6Mbps	1	1	2412	17.33	15.44	0.50	Pass
11g	6Mbps	1	6	2437	17.58	15.36	0.50	Pass
11g	6Mbps	1	11	2462	17.58	15.30	0.50	Pass
HT20	MCS0	1	1	2412	18.58	15.32	0.50	Pass
HT20	MCS0	1	6	2437	18.68	15.98	0.50	Pass
HT20	MCS0	1	11	2462	18.73	16.80	0.50	Pass
HT40	MCS0	1	3	2422	36.16	35.16	0.50	Pass
HT40	MCS0	1	6	2437	36.46	35.16	0.50	Pass
HT40	MCS0	1	9	2452	36.56	35.76	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	12.69	30.00	0.25	12.94	36.00	Pass
11b	1Mbps	1	6	2437	13.73	30.00	0.25	13.98	36.00	Pass
11b	1Mbps	1	11	2462	14.05	30.00	0.25	14.30	36.00	Pass
11g	6Mbps	1	1	2412	17.94	30.00	0.25	18.19	36.00	Pass
11g	6Mbps	1	6	2437	20.13	30.00	0.25	20.38	36.00	Pass
11g	6Mbps	1	11	2462	19.11	30.00	0.25	19.36	36.00	Pass
HT20	MCS0	1	1	2412	20.05	30.00	0.25	20.30	36.00	Pass
HT20	MCS0	1	6	2437	20.36	30.00	0.25	20.61	36.00	Pass
HT20	MCS0	1	11	2462	20.28	30.00	0.25	20.53	36.00	Pass
HT40	MCS0	1	3	2422	20.04	30.00	0.25	20.29	36.00	Pass
HT40	MCS0	1	6	2437	22.95	30.00	0.25	23.20	36.00	Pass
HT40	MCS0	1	9	2452	22.54	30.00	0.25	22.79	36.00	Pass


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-15.73	0.25	8.00	Pass
11b	1Mbps	1	6	2437	-14.35	0.25	8.00	Pass
11b	1Mbps	1	11	2462	-15.66	0.25	8.00	Pass
11g	6Mbps	1	1	2412	-13.06	0.25	8.00	Pass
11g	6Mbps	1	6	2437	-11.16	0.25	8.00	Pass
11g	6Mbps	1	11	2462	-11.31	0.25	8.00	Pass
HT20	MCS0	1	1	2412	-11.16	0.25	8.00	Pass
HT20	MCS0	1	6	2437	-11.89	0.25	8.00	Pass
HT20	MCS0	1	11	2462	-10.74	0.25	8.00	Pass
HT40	MCS0	1	3	2422	-15.51	0.25	8.00	Pass
HT40	MCS0	1	6	2437	-12.01	0.25	8.00	Pass
HT40	MCS0	1	9	2452	-13.65	0.25	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line

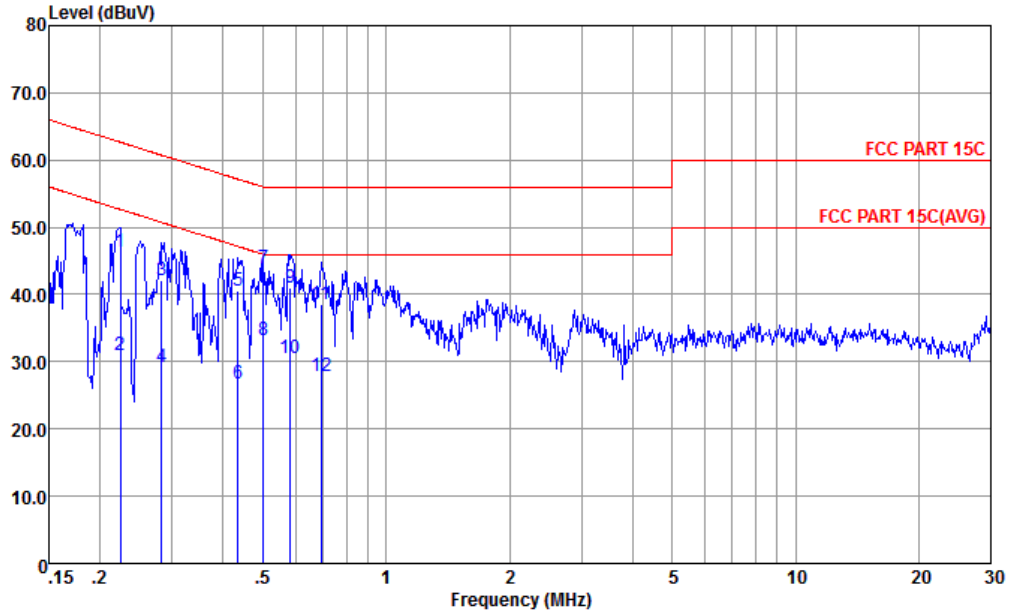


Site : CO01-KS
 Condition : FCC PART 15C LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.224	46.30	-16.36	62.66	35.90	0.05	10.35	QP
2	0.224	31.00	-21.66	52.66	20.60	0.05	10.35	Average
3	0.283	42.18	-18.54	60.72	31.79	0.07	10.32	QP
4	0.283	29.18	-21.54	50.72	18.79	0.07	10.32	Average
5	0.435	40.55	-16.60	57.15	30.21	0.09	10.25	QP
6	0.435	26.65	-20.50	47.15	16.31	0.09	10.25	Average
7 *	0.502	43.94	-12.06	56.00	33.60	0.10	10.24	QP
8	0.502	33.14	-12.86	46.00	22.80	0.10	10.24	Average
9	0.582	40.94	-15.06	56.00	30.60	0.10	10.24	QP
10	0.582	30.54	-15.46	46.00	20.20	0.10	10.24	Average
11	0.694	38.55	-17.45	56.00	28.20	0.11	10.24	QP
12	0.694	27.95	-18.05	46.00	17.60	0.11	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

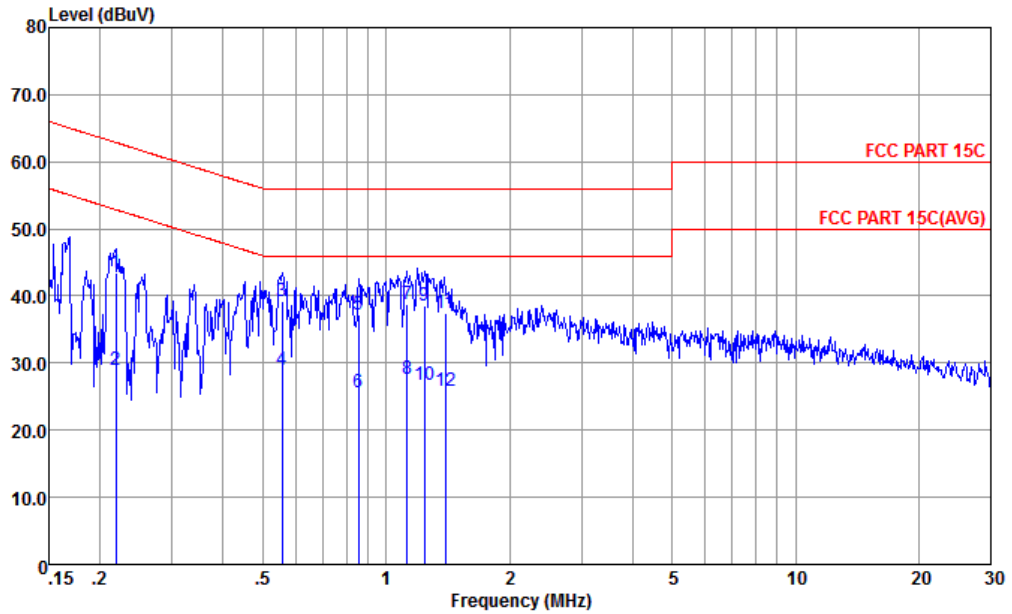

Site : CO01-KS
 Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.219	43.35	-19.53	62.88	32.90	0.10	10.35	QP
2	0.219	28.95	-23.93	52.88	18.50	0.10	10.35	Average
3 *	0.558	39.15	-16.85	56.00	28.80	0.11	10.24	QP
4	0.558	28.95	-17.05	46.00	18.60	0.11	10.24	Average
5	0.857	37.15	-18.85	56.00	26.79	0.12	10.24	QP
6	0.857	25.55	-20.45	46.00	15.19	0.12	10.24	Average
7	1.123	38.86	-17.14	56.00	28.51	0.12	10.23	QP
8	1.123	27.56	-18.44	46.00	17.21	0.12	10.23	Average
9	1.242	38.56	-17.44	56.00	28.20	0.13	10.23	QP
10	1.242	26.66	-19.34	46.00	16.30	0.13	10.23	Average
11	1.396	37.46	-18.54	56.00	27.10	0.13	10.23	QP
12	1.396	25.96	-20.04	46.00	15.60	0.13	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b---Sample 1 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz	*	2462	99.33	-	-	92.29	30.49	7.29	30.74	126	76	P	H
	*	2460	95.96	-	-	88.92	30.49	7.29	30.74	126	76	A	H
		2490.7	55.32	-18.68	74	48.09	30.55	7.35	30.67	126	76	P	H
		2485.42	44.04	-9.96	54	36.87	30.52	7.32	30.67	126	76	A	H
	*	2462	92.98	-	-	85.94	30.49	7.29	30.74	102	134	P	V
	*	2464	89.77	-	-	82.73	30.49	7.29	30.74	102	134	A	V
		2489.2	54.95	-19.05	74	47.72	30.55	7.35	30.67	102	134	P	V
		2493.76	43.78	-10.22	54	36.48	30.55	7.35	30.6	102	134	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11b---Sample 1 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz		4920	52.21	-21.79	74	72.84	33.76	10.4	64.79	100	128	P	H
		4920	50.93	-3.07	54	71.56	33.76	10.4	64.79	100	128	A	H
		7380	40.38	-33.62	74	56.48	35.4	12.74	64.24	300	0	P	H
		4920	50.98	-23.02	74	71.61	33.76	10.4	64.79	100	0	P	V
		7380	40.16	-33.84	74	56.26	35.4	12.74	64.24	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g---Sample 1 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2388.78	58.57	-15.43	74	51.91	30.38	7.18	30.9	149	258	P	H
		2389.95	47.82	-6.18	54	41.14	30.38	7.18	30.88	149	258	A	H
	*	2414	106.36	-	-	99.62	30.41	7.21	30.88	149	258	P	H
	*	2412	100.38	-	-	93.64	30.41	7.21	30.88	149	258	A	H
		2389.43	54.82	-19.18	74	48.16	30.38	7.18	30.9	100	34	P	V
		2389.82	44.27	-9.73	54	37.59	30.38	7.18	30.88	100	34	A	V
	*	2414	100.81	-	-	94.07	30.41	7.21	30.88	100	34	P	V
	*	2412	93	-	-	86.26	30.41	7.21	30.88	100	34	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11g---Sample 1 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4830	63.3	-10.7	74	84.23	33.58	10.24	64.75	100	132	P	H
		4830	50.88	-3.12	54	71.81	33.58	10.24	64.75	100	132	A	H
		4830	60.84	-13.16	74	81.77	33.58	10.24	64.75	142	200	P	V
		4830	47.35	-6.65	54	68.28	33.58	10.24	64.75	142	200	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40---Sample 1 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.95	60.08	-13.92	74	53.4	30.38	7.18	30.88	185	251	P	H
		2389.95	50.9	-3.1	54	44.22	30.38	7.18	30.88	185	251	A	H
	*	2426	103.24	-	-	96.37	30.44	7.24	30.81	185	251	P	H
	*	2418	95.19	-	-	88.38	30.41	7.21	30.81	185	251	A	H
		2483.68	56.69	-17.31	74	49.52	30.52	7.32	30.67	185	251	P	H
		2483.8	45.4	-8.6	54	38.23	30.52	7.32	30.67	185	251	A	H
		2389.82	58.35	-15.65	74	51.67	30.38	7.18	30.88	319	279	P	V
		2389.82	48.76	-5.24	54	42.08	30.38	7.18	30.88	319	279	A	V
	*	2420	98.78	-	-	91.91	30.44	7.24	30.81	319	279	P	V
	*	2420	91.16	-	-	84.29	30.44	7.24	30.81	319	279	A	V
		2485.06	55.5	-18.5	74	48.33	30.52	7.32	30.67	319	279	P	V
		2488.48	44.71	-9.29	54	37.48	30.55	7.35	30.67	319	279	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40---Sample 1 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		4845	55.46	-18.54	74	76.34	33.61	10.27	64.76	120	8	P	H
		4845	47	-7	54	67.88	33.61	10.27	64.76	120	8	A	H
		7305	40.69	-33.31	74	56.71	35.39	12.71	64.12	300	0	P	H
		4845	54.01	-19.99	74	74.89	33.61	10.27	64.76	101	124	P	V
		4845	45.59	-8.41	54	66.47	33.61	10.27	64.76	101	124	A	V
		7305	42.6	-31.4	74	58.62	35.39	12.71	64.12	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b---Sample 2 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 06 2437MHz		4875	51.13	-22.87	74	71.91	33.67	10.32	64.77	306	12	P	H
		4875	50.87	-3.13	54	71.65	33.67	10.32	64.77	306	12	A	H
		7305	40.68	-33.32	74	56.7	35.39	12.71	64.12	300	0	P	H
		4875	47.35	-26.65	74	68.13	33.67	10.32	64.77	100	0	P	V
		7305	40.69	-33.31	74	56.71	35.39	12.71	64.12	100	0	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20---Sample 2 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 11 2462MHz	*	2462	101.08	-	-	94.04	30.49	7.29	30.74	293	229	P	H
	*	2464	92.83	-	-	85.79	30.49	7.29	30.74	293	229	A	H
		2487.4	55.33	-18.67	74	48.16	30.52	7.32	30.67	293	229	P	H
		2483.5	44.72	-9.28	54	37.55	30.52	7.32	30.67	293	229	A	H
	*	2462	103.93	-	-	96.89	30.49	7.29	30.74	340	40	P	V
	*	2464	95.66	-	-	88.62	30.49	7.29	30.74	340	40	A	V
		2487.22	56.58	-17.42	74	49.41	30.52	7.32	30.67	340	40	P	V
		2483.5	45.78	-8.22	54	38.61	30.52	7.32	30.67	340	40	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20---Sample 2 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 11 2462MHz		4920	63	-11	74	83.63	33.76	10.4	64.79	175	358	P	H
		4920	50.57	-3.43	54	71.2	33.76	10.4	64.79	175	358	A	H
		7380	39.89	-34.11	74	55.99	35.4	12.74	64.24	300	0	P	H
		4920	57.82	-16.18	74	78.45	33.76	10.4	64.79	248	78	P	V
		4920	46.81	-7.19	54	67.44	33.76	10.4	64.79	248	78	A	V
		7380	39.63	-34.37	74	55.73	35.4	12.74	64.24	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40---Sample 2 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.56	59.17	-14.83	74	52.51	30.38	7.18	30.9	287	101	P	H
		2389.95	50.1	-3.9	54	43.42	30.38	7.18	30.88	287	101	A	H
	*	2426	102.54	-	-	95.67	30.44	7.24	30.81	287	101	P	H
	*	2424	93.89	-	-	87.02	30.44	7.24	30.81	287	101	A	H
		2485.66	60.99	-13.01	74	53.82	30.52	7.32	30.67	287	101	P	H
		2483.92	45.52	-8.48	54	38.35	30.52	7.32	30.67	287	101	A	H
		2389.82	60.78	-13.22	74	54.1	30.38	7.18	30.88	100	107	P	V
		2389.95	50.98	-3.02	54	44.3	30.38	7.18	30.88	100	107	A	V
	*	2426	104.58	-	-	97.71	30.44	7.24	30.81	100	107	P	V
	*	2426	95.99	-	-	89.12	30.44	7.24	30.81	100	107	A	V
		2488.36	55.51	-18.49	74	48.28	30.55	7.35	30.67	100	107	P	V
		2484.28	45.92	-8.08	54	38.75	30.52	7.32	30.67	100	107	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40---Sample 2 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		4845	55.8	-18.2	74	76.68	33.61	10.27	64.76	182	357	P	H
		4845	46.78	-7.22	54	67.66	33.61	10.27	64.76	182	357	A	H
		7305	40.96	-33.04	74	56.98	35.39	12.71	64.12	300	0	P	H
		4845	49.25	-24.75	74	70.13	33.61	10.27	64.76	100	0	P	V
		7305	41.21	-32.79	74	57.23	35.39	12.71	64.12	100	0	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz 802.11n HT40 LF		36.79	25.15	-14.85	40	36.17	21.2	0.82	33.04	-	-	P	H
		73.65	21.35	-18.65	40	40.53	12.56	1.22	32.96	-	-	P	H
		107.6	21.89	-21.61	43.5	37.02	16.44	1.51	33.08	-	-	P	H
		258.92	32.74	-13.26	46	43.36	19.8	2.36	32.78	-	-	P	H
		356.89	28.4	-17.6	46	37.88	20.48	2.77	32.73	-	-	P	H
		936.95	29.98	-16.02	46	27.19	30.44	4.48	32.13	-	-	P	H
		36.79	27.51	-12.49	40	38.53	21.2	0.82	33.04	-	-	P	V
		103.72	24.77	-18.73	43.5	40.21	16.17	1.48	33.09	-	-	P	V
		155.13	23.07	-20.43	43.5	37.79	16.46	1.81	32.99	-	-	P	V
		258.92	25.04	-20.96	46	35.66	19.8	2.36	32.78	-	-	P	V
		448.07	26.35	-19.65	46	32.61	22.83	3.11	32.2	-	-	P	V
		927.25	29.17	-16.83	46	26.75	30.12	4.45	32.15	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<Simultaneous transmission>

2.4GHz 2400~2483.5MHz---Sample 1

WIFI 802.11b&Part 27F---LTE_B13_BW_5M (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz	*	2484.88	52.11	-21.89	74	51.16	32.12	8.33	39.5	306	66	P	H
	*	2483.5	41.22	-12.78	54	40.27	32.12	8.33	39.5	306	66	A	H
		2462	99.23	---	---	98.34	32.1	8.29	39.5	306	66	P	H
		2460	96.02	---	---	95.14	32.1	8.28	39.5	306	66	A	H
	*	2499.64	52.02	-21.98	74	51.01	32.15	8.36	39.5	100	355	P	V
	*	2485.06	41.1	-12.9	54	40.14	32.12	8.34	39.5	100	355	A	V
		2464	93.16	---	---	92.27	32.1	8.29	39.5	100	355	P	V
		2464	89.84	---	---	88.95	32.1	8.29	39.5	100	355	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz---Sample 1

WIFI 802.11b&Part 27F---LTE_B13_BW_5M (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz		4920	53.84	-20.16	74	74.3	34.1	10.88	65.44	108	124	P	H
		4920	50.26	-3.74	54	70.72	34.1	10.88	65.44	108	124	A	H
		7380	42.34	-31.66	74	58.35	35.8	13.48	65.29	100	0	P	H
		4920	50.07	-23.93	74	70.53	34.1	10.88	65.44	100	0	P	V
		7380	40.16	-33.84	74	56.17	35.8	13.48	65.29	100	0	P	V
Remark	5. No other spurious found. 6. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

2.4GHz 2400~2483.5MHz---Sample 1

BLE&Part 27F---LTE_B13_BW_5M (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz	*	2483.62	61.39	-12.61	74	60.44	32.12	8.33	39.5	349	71	P	H
	*	2483.5	48.09	-5.91	54	47.14	32.12	8.33	39.5	349	71	A	H
		2480	103.72	---	---	102.77	32.12	8.33	39.5	349	71	P	H
		2480	103.01	---	---	102.06	32.12	8.33	39.5	349	71	A	H
	*	2483.5	60.84	-13.16	74	59.89	32.12	8.33	39.5	158	130	P	V
	*	2483.5	47.88	-6.12	54	46.93	32.12	8.33	39.5	158	130	A	V
		2480	103.79	---	---	102.84	32.12	8.33	39.5	158	130	P	V
		2480	102.96	---	---	102.01	32.12	8.33	39.5	158	130	A	V
Remark	5. No other spurious found. 6. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz---Sample 1

BLE&Part 27F---LTE_B13_BW_5M (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		4965	39.57	-34.43	74	60.03	34.1	10.89	65.45	100	360	P	H
		7440	42.69	-31.31	74	58.67	35.8	13.55	65.33	100	360	P	H
		4960	39.36	-34.64	74	59.82	34.1	10.89	65.45	100	360	P	V
		7440	42.34	-31.66	74	58.32	35.8	13.55	65.33	100	360	P	V
Remark	7. No other spurious found. 8. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz---Sample 2

WIFI 802.11n HT40&Part 27F---LTE_B13_BW_5M (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.95	59.06	-14.94	74	58.38	32	8.16	39.48	354	82	P	H
		2389.95	50.74	-3.26	54	50.06	32	8.16	39.48	354	82	A	H
	*	2424	104.4	---	---	103.63	32.05	8.22	39.5	354	82	P	H
	*	2420	96.28	---	---	95.51	32.05	8.22	39.5	354	82	A	H
		2494	53.36	-20.64	74	52.36	32.15	8.35	39.5	354	82	P	H
		2484.88	41.88	-12.12	54	40.93	32.12	8.33	39.5	354	82	A	H
		2389.56	60.16	-13.84	74	59.48	32	8.16	39.48	301	128	P	V
		2389.95	50.28	-3.72	54	49.6	32	8.16	39.48	301	128	P	V
	*	2424	103.9	---	---	103.13	32.05	8.22	39.5	301	128	P	V
	*	2424	95.49	---	---	94.72	32.05	8.22	39.5	301	128	A	V
		2493.94	52.84	-21.16	74	51.84	32.15	8.35	39.5	301	128	P	V
		2488.12	42.16	-11.84	54	41.17	32.15	8.34	39.5	301	128	A	V
Remark	5. No other spurious found. 6. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz---Sample 2

WIFI 802.11n HT40&Part 27F---LTE_B13_BW_5M (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4845	49.27	-24.73	74	69.74	34.1	10.86	65.43	100	0	P	H
HT40		7260	42.96	-31.04	74	58.87	35.8	13.5	65.21	100	0	A	H
CH 03		4845	46.06	-27.94	74	66.53	34.1	10.86	65.43	100	0	P	V
2422MHz		7260	42.92	-31.08	74	58.83	35.8	13.5	65.21	100	0	P	V
Remark	5. No other spurious found. 6. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz---Sample 2

BLE&Part 27F---LTE_B13_BW_5M (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2483.5	59.61	-14.39	74	58.66	32.12	8.33	39.5	351	85	P	H
	*	2483.5	47.02	-6.98	54	46.07	32.12	8.33	39.5	351	85	A	H
		2480	102.63	---	---	101.68	32.12	8.33	39.5	351	85	P	H
		2480	102.01	---	---	101.06	32.12	8.33	39.5	351	85	A	H
	*	2483.56	58.91	-15.09	74	57.96	32.12	8.33	39.5	156	27	P	V
	*	2483.5	46.13	-7.87	54	45.18	32.12	8.33	39.5	100	27	A	V
		2480	101.14	---	---	100.19	32.12	8.33	39.5	100	27	P	V
		2480	100.55	---	---	99.6	32.12	8.33	39.5	100	27	A	V
Remark	7. No other spurious found. 8. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz---Sample 2
BLE&Part 27F---LTE_B13_BW_5M(Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4965	39.53	-34.47	74	59.99	34.1	10.89	65.45	100	0	P	H
		7440	42.5	-31.5	74	58.48	35.8	13.55	65.33	100	0	P	H
		4965	39.55	-34.45	74	60.01	34.1	10.89	65.45	100	0	P	V
		7440	41.98	-32.02	74	57.96	35.8	13.55	65.33	100	0	P	V
Remark	9. No other spurious found. 10. All results are PASS against Peak and Average limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.66	-	-	10Hz
802.11g	98.28	-	-	10Hz
802.11n HT20	98.16	-	-	10Hz
802.11n HT40	94.93	0.949	1.053	1.1KHz




802.11b

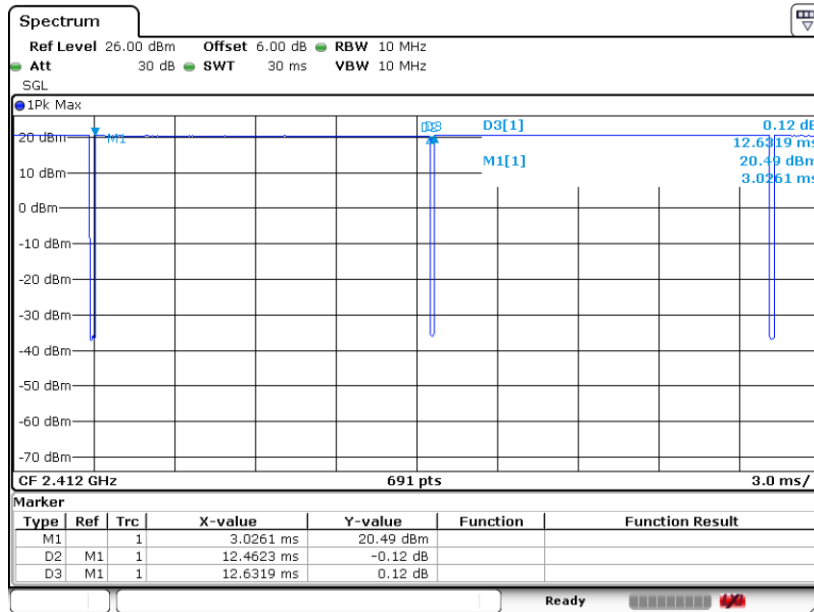

Date: 19 JAN 2022 01:56:47


802.11g

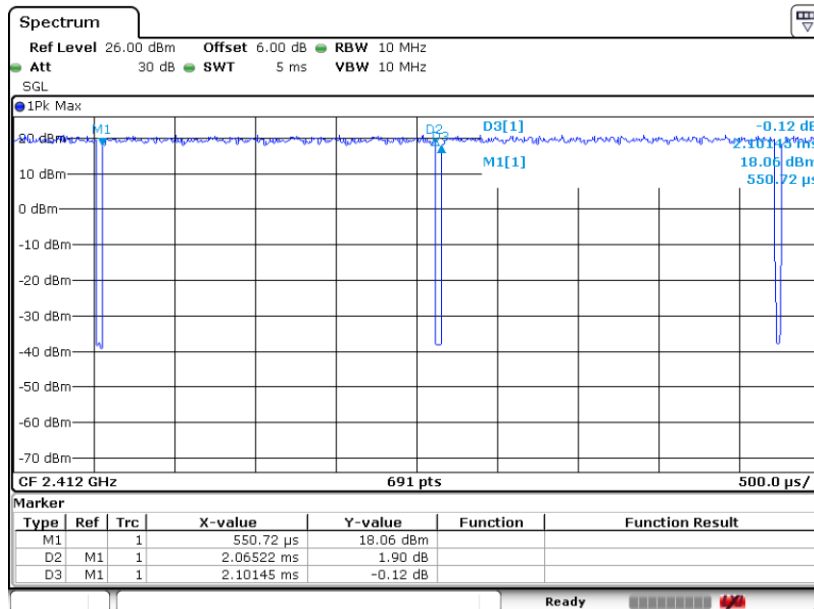

Date: 19 JAN 2022 02:01:12




802.11n HT20

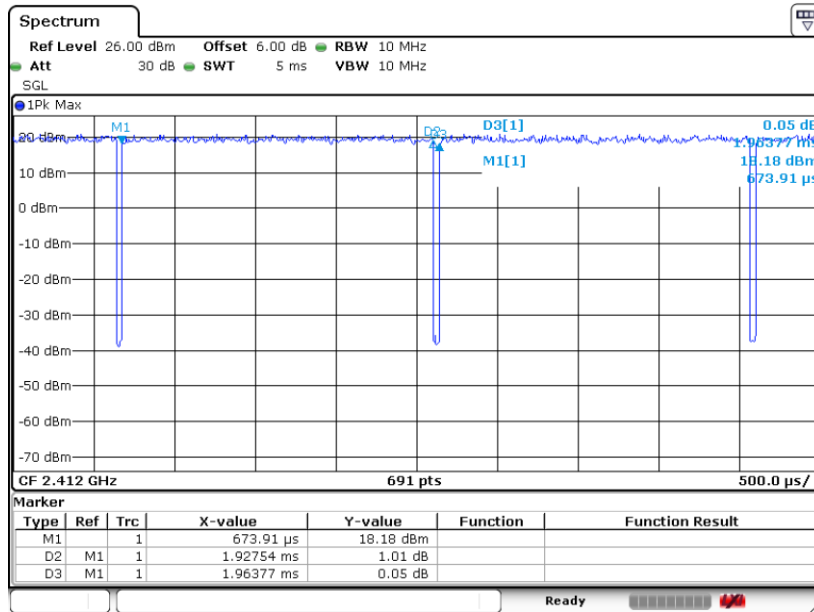

Date: 19 JAN 2022 02:04:19

802.11n HT40

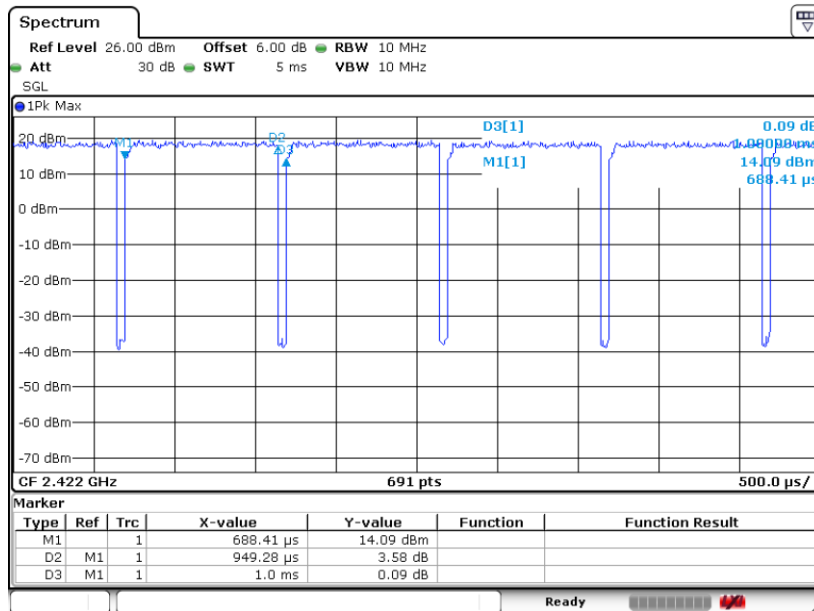

Date: 19 JAN 2022 02:07:06