



# TEST REPORT

**APPLICANT** : Sonim Technologies, Inc.  
**PRODUCT NAME** : 5G smartphone  
**MODEL NAME** : P200  
**BRAND NAME** : Sonim  
**FCC ID** : WYPP200  
**STANDARD(S)** : 47 CFR Part 2  
47 CFR Part 90, Subpart S&R  
**RECEIPT DATE** : 2023-12-21  
**TEST DATE** : 2024-01-05 to 2024-03-27  
**ISSUE DATE** : 2024-05-27



Edited by: Peng Mi  
Peng Mi (Rapporteur)  
Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator ..... 4**
- 1.4. Test Standards and Results ..... 5**
- 1.5. Environmental Conditions ..... 6**
- 2. 47 CFR Part 2, Part 90S&R Requirements ..... 7**
- 2.1. Transmitter Conducted Output Power and E.R.P./E.I.R.P. .... 7**
- 2.2. Occupied Bandwidth ..... 20**
- 2.3. Frequency Stability ..... 32**
- 2.4. Conducted Spurious Emissions ..... 34**
- 2.5. Band Edge ..... 38**
- 2.6. Radiated Spurious Emissions ..... 44**
- Annex A Test Uncertainty ..... 54**
- Annex B Testing Laboratory Information ..... 55**

Change History		
Version	Date	Reason for change
1.0	2024-05-27	First edition



# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Sonim Technologies, Inc.
<b>Applicant Address:</b>	4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA
<b>Manufacturer:</b>	Sonim Technologies, Inc.
<b>Manufacturer Address:</b>	4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	5G smartphone	
<b>Sample No.:</b>	21#	
<b>Hardware Version:</b>	V1.0	
<b>Software Version:</b>	P200.AT01.30D	
<b>Modulation Type:</b>	QPSK, 16QAM, 64QAM	
<b>Operation Band:</b>	Band 14 / 26	
<b>Carrier Aggregation(UL):</b>	CA_12A-66A, CA_14A-66A, CA_2A-12A, CA_2A-14A, CA_2A-5A, CA_5A-66A, CA_2A-66A	
<b>Frequency Range:</b>	LTE Band 14	Tx: 788MHz–798MHz Rx: 758MHz–768MHz
	LTE Band 26	Tx: 814MHz–824MHz Rx: 859MHz–869MHz
<b>Channel Bandwidth</b>	LTE Band 14	5MHz, 10MHz
	LTE Band 26	1.4MHz, 3MHz, 5MHz, 10MHz
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	LTE Band 14	ANT 2: -3.65dBi
	LTE Band 26	ANT 2: -3.19dBi



<b>Accessory Information:</b>	Battery	
	Brand Name:	N/A
	Model No.:	BAT-05000-11S
	Serial No.:	N/A
	Capacity:	5000mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	HUIZHOU PUAN ELECTRONICS CO.,LTD
	AC Adapter	
	Brand Name:	N/A
	Model No.:	1-CHUSQ302-097
	Serial No.:	N/A
	Rated Output:	5V=3A or 9V=2A or 12V=1.5A
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	HUIZHOU PUAN ELECTRONICS CO.,LTD

**Note 1:** For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.

### 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

LTE Band 14	Maximum E.R.P./E.I.R.P. (W)			Emission Designator (99%OBW)		
	BW(MHz)	QPSK	16QAM	64QAM	QPSK	16QAM
10	0.050	0.040	0.033	8M98G7D	9M00W7D	8M98W7D
5	0.050	0.042	0.033	4M54G7D	4M53W7D	4M51W7D
LTE Band 26	Maximum E.R.P./E.I.R.P. (W)			Emission Designator (99%OBW)		
	BW(MHz)	QPSK	16QAM	64QAM	QPSK	16QAM
10	0.049	0.039	0.034	8M95G7D	8M95W7D	8M95W7D
5	0.049	0.041	0.034	4M48G7D	4M48W7D	4M49W7D
3	0.050	0.043	0.033	2M71G7D	2M72W7D	2M73W7D
1.4	0.051	0.042	0.032	1M11G7D	1M11W7D	1M11W7D



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to Part 2 and Part 90 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 90	Miscellaneous Wireless Communications Services

Test detailed items/section required by FCC rules and results are as below:

Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
2.1046, 90.541(d) 90.635(b)	Transmitter Conducted Output Power and E.R.P./E.I.R.P.	Jan. 05, 2024	Shen Biaohong Gan Jing	PASS	No deviation
2.1049	Occupied Bandwidth	Jan. 05, 2024	Gan Jing	PASS	No deviation
2.1055, 90.543	Frequency Stability	Feb. 29, 2024	Gan Jing	PASS	No deviation
2.1051, 90.691(a) 90.543(f)	Conducted Spurious Emissions	Jan. 05, 2024	Gan Jing	PASS	No deviation
2.1051, 90.691(a) 90.543(e)	Band Edge	Jan. 05, 2024	Gan Jing	PASS	No deviation
2.1053, 90.691(a) 90.543(f)	Radiated Spurious Emissions	Jan. 12, 2024 to Mar. 27, 2024	Gao Jianrou	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03 and ANSI/TIA-603-E-2016.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 24.5dB contains two parts that cable loss 14.5dB and Attenuator 10dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.



**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

## 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

## 2.47 CFR Part 2, Part 90S&R Requirements

### 2.1. Transmitter Conducted Output Power and E.R.P./E.I.R.P.


#### 2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

According to FCC section 90.542(a)(7) for LTE Band 14, portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

According to FCC section 90.635(b) for LTE Band 26, the maximum output power of the transmitter for mobile stations is 100 watts.

#### 2.1.2. Test Description

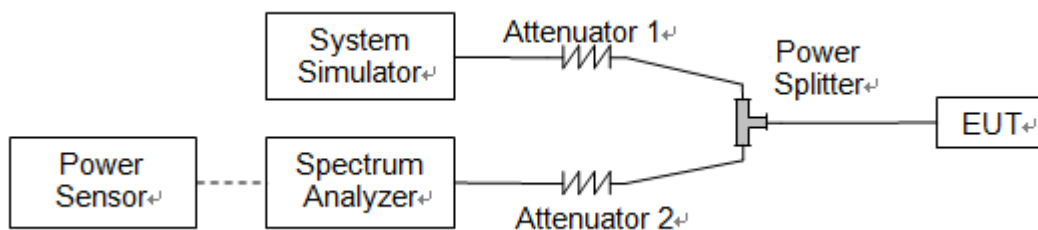

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

#### 2.1.3. Test procedure

KDB 971168 D01v03 Section 5.2 and ANSI/TIA-603-E-2016.

$EIRP \text{ (dBm)} = \text{Conducted Output Power (dBm)} + \text{Antenna Gain (dBi)}$

$ERP \text{ (dBm)} = EIPR \text{ (dBm)} - 2.15$



2.1.4. Result

Conducted Output Power

LTE Band 14						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				/	23330	/
Frequency (MHz)				/	793	/
10	QPSK	1	0	/	22.79	/
10	QPSK	1	25	/	22.75	/
10	QPSK	1	49	/	22.69	/
10	QPSK	25	0	/	21.78	/
10	QPSK	25	12	/	21.65	/
10	QPSK	25	25	/	21.72	/
10	QPSK	50	0	/	21.75	/
10	16QAM	1	0	/	21.87	/
10	16QAM	1	25	/	21.84	/
10	16QAM	1	49	/	21.81	/
10	16QAM	25	0	/	20.74	/
10	16QAM	25	12	/	20.79	/
10	16QAM	25	25	/	20.87	/
10	16QAM	50	0	/	20.66	/
10	64QAM	1	0	/	20.95	/
10	64QAM	1	25	/	20.75	/
10	64QAM	1	49	/	20.76	/
10	64QAM	25	0	/	19.84	/
10	64QAM	25	12	/	19.80	/
10	64QAM	25	25	/	19.82	/
10	64QAM	50	0	/	19.75	/





LTE Band 14						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				23305	23330	23355
Frequency (MHz)				790.5	793	795.5
5	QPSK	1	0	22.71	22.76	22.73
5	QPSK	1	12	22.66	22.69	22.70
5	QPSK	1	24	22.66	22.66	22.65
5	QPSK	12	0	21.66	21.74	21.72
5	QPSK	12	7	21.73	21.62	21.70
5	QPSK	12	13	21.67	21.66	21.67
5	QPSK	25	0	21.72	21.56	21.80
5	16QAM	1	0	21.99	22.02	22.00
5	16QAM	1	12	21.80	21.90	21.86
5	16QAM	1	24	21.82	21.88	21.96
5	16QAM	12	0	20.70	20.95	20.79
5	16QAM	12	7	20.68	20.87	20.66
5	16QAM	12	13	20.74	20.68	20.75
5	16QAM	25	0	20.80	20.85	20.89
5	64QAM	1	0	20.94	20.91	20.97
5	64QAM	1	12	20.78	20.76	20.76
5	64QAM	1	24	20.89	20.88	20.76
5	64QAM	12	0	19.94	19.95	19.75
5	64QAM	12	7	19.78	19.81	19.83
5	64QAM	12	13	19.84	19.74	19.76
5	64QAM	25	0	19.76	19.75	19.84



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				/	26740	/
Frequency (MHz)				/	819.0	/
10	QPSK	1	0	/	22.11	/
10	QPSK	1	25	/	21.95	/
10	QPSK	1	49	/	22.22	/
10	QPSK	25	0	/	21.11	/
10	QPSK	25	12	/	21.31	/
10	QPSK	25	25	/	21.23	/
10	QPSK	50	0	/	21.16	/
10	16QAM	1	0	/	21.25	/
10	16QAM	1	25	/	21.25	/
10	16QAM	1	49	/	21.23	/
10	16QAM	25	0	/	20.25	/
10	16QAM	25	12	/	20.39	/
10	16QAM	25	25	/	20.19	/
10	16QAM	50	0	/	20.33	/
10	64QAM	1	0	/	20.71	/
10	64QAM	1	25	/	20.12	/
10	64QAM	1	49	/	20.69	/
10	64QAM	25	0	/	19.12	/
10	64QAM	25	12	/	19.31	/
10	64QAM	25	25	/	19.52	/
10	64QAM	50	0	/	19.42	/



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26715	26740	26765
Frequency (MHz)				816.5	819.0	821.5
5	QPSK	1	0	22.08	21.82	22.04
5	QPSK	1	12	22.21	22.04	22.25
5	QPSK	1	24	22.07	21.97	22.07
5	QPSK	12	0	21.22	21.17	20.92
5	QPSK	12	7	20.84	21.04	21.21
5	QPSK	12	13	21.26	20.96	21.26
5	QPSK	25	0	21.59	21.18	21.07
5	16QAM	1	0	21.26	21.34	21.37
5	16QAM	1	12	21.31	21.13	21.17
5	16QAM	1	24	21.51	21.17	21.31
5	16QAM	12	0	20.16	20.02	20.63
5	16QAM	12	7	20.10	20.16	20.22
5	16QAM	12	13	20.23	20.21	20.25
5	16QAM	25	0	20.29	20.08	20.43
5	64QAM	1	0	20.23	20.71	20.10
5	64QAM	1	12	20.53	20.35	20.22
5	64QAM	1	24	20.19	19.97	20.42
5	64QAM	12	0	19.29	19.08	19.11
5	64QAM	12	7	19.13	19.29	19.30
5	64QAM	12	13	19.21	19.15	19.20
5	64QAM	25	0	18.97	19.17	19.23



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26705	26740	26775
Frequency (MHz)				815.5	819.0	822.5
3	QPSK	1	0	22.37	22.09	22.17
3	QPSK	1	8	22.17	22.15	22.19
3	QPSK	1	14	22.00	22.00	21.95
3	QPSK	8	0	21.14	21.12	21.00
3	QPSK	8	4	21.10	21.25	21.18
3	QPSK	8	7	21.00	21.12	21.22
3	QPSK	15	0	21.53	21.18	21.22
3	16QAM	1	0	21.66	21.26	21.44
3	16QAM	1	8	21.37	21.29	21.35
3	16QAM	1	14	21.40	21.27	21.34
3	16QAM	8	0	20.13	20.07	19.95
3	16QAM	8	4	20.73	20.19	20.23
3	16QAM	8	7	20.05	20.16	20.22
3	16QAM	15	0	20.17	20.15	20.30
3	64QAM	1	0	20.03	20.22	20.26
3	64QAM	1	8	20.24	20.17	20.18
3	64QAM	1	14	20.18	20.15	20.58
3	64QAM	8	0	19.21	19.11	19.03
3	64QAM	8	4	19.19	19.12	19.22
3	64QAM	8	7	19.27	19.05	19.31
3	64QAM	15	0	19.54	19.62	19.28



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26697	26740	26783
Frequency (MHz)				814.7	819.0	823.3
1.4	QPSK	1	0	22.10	22.43	21.89
1.4	QPSK	1	3	21.95	22.12	22.16
1.4	QPSK	1	5	22.11	22.08	22.06
1.4	QPSK	3	0	22.11	22.05	22.10
1.4	QPSK	3	1	22.11	22.10	22.07
1.4	QPSK	3	3	21.99	22.12	22.03
1.4	QPSK	6	0	21.17	21.48	21.20
1.4	16QAM	1	0	21.21	21.27	21.25
1.4	16QAM	1	3	21.32	21.50	21.29
1.4	16QAM	1	5	21.32	21.27	21.35
1.4	16QAM	3	0	21.05	20.99	21.00
1.4	16QAM	3	1	21.33	21.59	21.40
1.4	16QAM	3	3	21.25	21.22	21.50
1.4	16QAM	6	0	20.07	20.13	19.93
1.4	64QAM	1	0	20.03	20.14	20.34
1.4	64QAM	1	3	20.10	20.09	20.43
1.4	64QAM	1	5	20.10	20.12	20.17
1.4	64QAM	3	0	20.23	20.13	20.34
1.4	64QAM	3	1	20.22	20.18	20.24
1.4	64QAM	3	3	20.40	20.11	20.22
1.4	64QAM	6	0	19.08	19.20	19.17



**Effective Radiated Power and Effective Isotropic Radiated Power:**

LTE Band 14				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				/		23330		/	
Frequency (MHz)				/		793		/	
				/	/	dBm	W	/	/
10	QPSK	1	0	/	/	16.99	0.050	/	/
10	QPSK	1	25	/	/	16.95	0.050	/	/
10	QPSK	1	49	/	/	16.89	0.049	/	/
10	QPSK	25	0	/	/	15.98	0.040	/	/
10	QPSK	25	12	/	/	15.85	0.038	/	/
10	QPSK	25	25	/	/	15.92	0.039	/	/
10	QPSK	50	0	/	/	15.95	0.039	/	/
10	16QAM	1	0	/	/	16.07	0.040	/	/
10	16QAM	1	25	/	/	16.04	0.040	/	/
10	16QAM	1	49	/	/	16.01	0.040	/	/
10	16QAM	25	0	/	/	14.94	0.031	/	/
10	16QAM	25	12	/	/	14.99	0.032	/	/
10	16QAM	25	25	/	/	15.07	0.032	/	/
10	16QAM	50	0	/	/	14.86	0.031	/	/
10	64QAM	1	0	/	/	15.15	0.033	/	/
10	64QAM	1	25	/	/	14.95	0.031	/	/
10	64QAM	1	49	/	/	14.96	0.031	/	/
10	64QAM	25	0	/	/	14.04	0.025	/	/
10	64QAM	25	12	/	/	14.00	0.025	/	/
10	64QAM	25	25	/	/	14.02	0.025	/	/
10	64QAM	50	0	/	/	13.95	0.025	/	/



LTE Band 14				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				23305		23330		23355	
Frequency (MHz)				790.5		793		795.5	
				dBm	W	dBm	W	dBm	W
5	QPSK	1	0	16.91	0.049	16.96	0.050	16.93	0.049
5	QPSK	1	12	16.86	0.049	16.89	0.049	16.90	0.049
5	QPSK	1	24	16.86	0.049	16.86	0.049	16.85	0.048
5	QPSK	12	0	15.86	0.039	15.94	0.039	15.92	0.039
5	QPSK	12	7	15.93	0.039	15.82	0.038	15.90	0.039
5	QPSK	12	13	15.87	0.039	15.86	0.039	15.87	0.039
5	QPSK	25	0	15.92	0.039	15.76	0.038	16.00	0.040
5	16QAM	1	0	16.19	0.042	16.22	0.042	16.20	0.042
5	16QAM	1	12	16.00	0.040	16.10	0.041	16.06	0.040
5	16QAM	1	24	16.02	0.040	16.08	0.041	16.16	0.041
5	16QAM	12	0	14.90	0.031	15.15	0.033	14.99	0.032
5	16QAM	12	7	14.88	0.031	15.07	0.032	14.86	0.031
5	16QAM	12	13	14.94	0.031	14.88	0.031	14.95	0.031
5	16QAM	25	0	15.00	0.032	15.05	0.032	15.09	0.032
5	64QAM	1	0	15.14	0.033	15.11	0.032	15.17	0.033
5	64QAM	1	12	14.98	0.031	14.96	0.031	14.96	0.031
5	64QAM	1	24	15.09	0.032	15.08	0.032	14.96	0.031
5	64QAM	12	0	14.14	0.026	14.15	0.026	13.95	0.025
5	64QAM	12	7	13.98	0.025	14.01	0.025	14.03	0.025
5	64QAM	12	13	14.04	0.025	13.94	0.025	13.96	0.025
5	64QAM	25	0	13.96	0.025	13.95	0.025	14.04	0.025



LTE Band 26				Measured E.R.P.			
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.	Middle Ch. / Freq.		High Ch. / Freq.
Channel				/	26740		/
Frequency (MHz)				/	819		/
				/	dBm	W	/
10	QPSK	1	0	/	16.77	0.048	/
10	QPSK	1	25	/	16.61	0.046	/
10	QPSK	1	49	/	16.88	0.049	/
10	QPSK	25	0	/	15.77	0.038	/
10	QPSK	25	12	/	15.97	0.040	/
10	QPSK	25	25	/	15.89	0.039	/
10	QPSK	50	0	/	15.82	0.038	/
10	16QAM	1	0	/	15.91	0.039	/
10	16QAM	1	25	/	15.91	0.039	/
10	16QAM	1	49	/	15.89	0.039	/
10	16QAM	25	0	/	14.91	0.031	/
10	16QAM	25	12	/	15.05	0.032	/
10	16QAM	25	25	/	14.85	0.031	/
10	16QAM	50	0	/	14.99	0.032	/
10	64QAM	1	0	/	15.37	0.034	/
10	64QAM	1	25	/	14.78	0.030	/
10	64QAM	1	49	/	15.35	0.034	/
10	64QAM	25	0	/	13.78	0.024	/
10	64QAM	25	12	/	13.97	0.025	/
10	64QAM	25	25	/	14.18	0.026	/
10	64QAM	50	0	/	14.08	0.026	/





LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26715		26740		26765	
Frequency (MHz)				816.5		819.0		821.5	
				dBm	W	dBm	W	dBm	W
5	QPSK	1	0	16.74	0.047	16.48	0.044	16.70	0.047
5	QPSK	1	12	16.87	0.049	16.70	0.047	16.91	0.049
5	QPSK	1	24	16.73	0.047	16.63	0.046	16.73	0.047
5	QPSK	12	0	15.88	0.039	15.83	0.038	15.58	0.036
5	QPSK	12	7	15.50	0.035	15.70	0.037	15.87	0.039
5	QPSK	12	13	15.92	0.039	15.62	0.036	15.92	0.039
5	QPSK	25	0	16.25	0.042	15.84	0.038	15.73	0.037
5	16QAM	1	0	15.92	0.039	16.00	0.040	16.03	0.040
5	16QAM	1	12	15.97	0.040	15.79	0.038	15.83	0.038
5	16QAM	1	24	16.17	0.041	15.83	0.038	15.97	0.040
5	16QAM	12	0	14.82	0.030	14.68	0.029	15.29	0.034
5	16QAM	12	7	14.76	0.030	14.82	0.030	14.88	0.031
5	16QAM	12	13	14.89	0.031	14.87	0.031	14.91	0.031
5	16QAM	25	0	14.95	0.031	14.74	0.030	15.09	0.032
5	64QAM	1	0	14.89	0.031	15.37	0.034	14.76	0.030
5	64QAM	1	12	15.19	0.033	15.01	0.032	14.88	0.031
5	64QAM	1	24	14.85	0.031	14.63	0.029	15.08	0.032
5	64QAM	12	0	13.95	0.025	13.74	0.024	13.77	0.024
5	64QAM	12	7	13.79	0.024	13.95	0.025	13.96	0.025
5	64QAM	12	13	13.87	0.024	13.81	0.024	13.86	0.024
5	64QAM	25	0	13.63	0.023	13.83	0.024	13.89	0.024



LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26705		26740		26775	
Frequency (MHz)				815.5		819.0		822.5	
				dBm	W	dBm	W	dBm	W
3	QPSK	1	0	17.03	0.050	16.75	0.047	16.83	0.048
3	QPSK	1	8	16.83	0.048	16.81	0.048	16.85	0.048
3	QPSK	1	14	16.66	0.046	16.66	0.046	16.61	0.046
3	QPSK	8	0	15.80	0.038	15.78	0.038	15.66	0.037
3	QPSK	8	4	15.76	0.038	15.91	0.039	15.84	0.038
3	QPSK	8	7	15.66	0.037	15.78	0.038	15.88	0.039
3	QPSK	15	0	16.19	0.042	15.84	0.038	15.88	0.039
3	16QAM	1	0	16.32	0.043	15.92	0.039	16.10	0.041
3	16QAM	1	8	16.03	0.040	15.95	0.039	16.01	0.040
3	16QAM	1	14	16.06	0.040	15.93	0.039	16.00	0.040
3	16QAM	8	0	14.79	0.030	14.73	0.030	14.61	0.029
3	16QAM	8	4	15.39	0.035	14.85	0.031	14.89	0.031
3	16QAM	8	7	14.71	0.030	14.82	0.030	14.88	0.031
3	16QAM	15	0	14.83	0.030	14.81	0.030	14.96	0.031
3	64QAM	1	0	14.69	0.029	14.88	0.031	14.92	0.031
3	64QAM	1	8	14.90	0.031	14.83	0.030	14.84	0.030
3	64QAM	1	14	14.84	0.030	14.81	0.030	15.24	0.033
3	64QAM	8	0	13.87	0.024	13.77	0.024	13.69	0.023
3	64QAM	8	4	13.85	0.024	13.78	0.024	13.88	0.024
3	64QAM	8	7	13.93	0.025	13.71	0.023	13.97	0.025
3	64QAM	15	0	14.20	0.026	14.28	0.027	13.94	0.025




LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26697		26740		26783	
Frequency (MHz)				814.7		819.0		823.3	
				dBm	W	dBm	W	dBm	W
1.4	QPSK	1	0	16.76	0.047	17.09	0.051	16.55	0.045
1.4	QPSK	1	3	16.61	0.046	16.78	0.048	16.82	0.048
1.4	QPSK	1	5	16.77	0.048	16.74	0.047	16.72	0.047
1.4	QPSK	3	0	16.77	0.048	16.71	0.047	16.76	0.047
1.4	QPSK	3	1	16.77	0.048	16.76	0.047	16.73	0.047
1.4	QPSK	3	3	16.65	0.046	16.78	0.048	16.69	0.047
1.4	QPSK	6	0	15.83	0.038	16.14	0.041	15.86	0.039
1.4	16QAM	1	0	15.87	0.039	15.93	0.039	15.91	0.039
1.4	16QAM	1	3	15.98	0.040	16.16	0.041	15.95	0.039
1.4	16QAM	1	5	15.98	0.040	15.93	0.039	16.01	0.040
1.4	16QAM	3	0	15.71	0.037	15.65	0.037	15.66	0.037
1.4	16QAM	3	1	15.99	0.040	16.25	0.042	16.06	0.040
1.4	16QAM	3	3	15.91	0.039	15.88	0.039	16.16	0.041
1.4	16QAM	6	0	14.73	0.030	14.79	0.030	14.59	0.029
1.4	64QAM	1	0	14.69	0.029	14.80	0.030	15.00	0.032
1.4	64QAM	1	3	14.76	0.030	14.75	0.030	15.09	0.032
1.4	64QAM	1	5	14.76	0.030	14.78	0.030	14.83	0.030
1.4	64QAM	3	0	14.89	0.031	14.79	0.030	15.00	0.032
1.4	64QAM	3	1	14.88	0.031	14.84	0.030	14.90	0.031
1.4	64QAM	3	3	15.06	0.032	14.77	0.030	14.88	0.031
1.4	64QAM	6	0	13.74	0.024	13.86	0.024	13.83	0.024

## 2.2. Occupied Bandwidth

### 2.2.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

### 2.2.2. Test Description

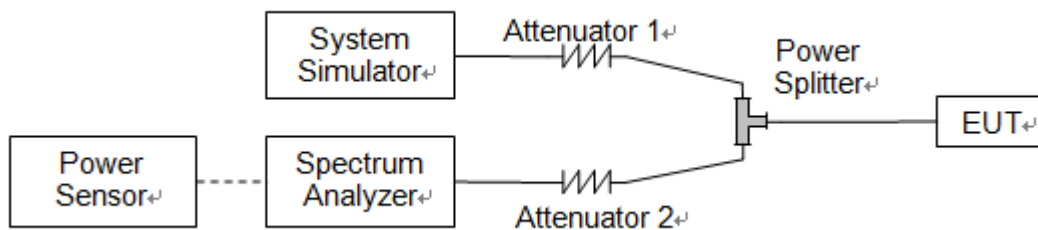

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

### 2.2.3. Test procedure

KDB 971168 D01v03 Section 4.1 and ANSI/TIA-603-E-2016.

### 2.2.4. Test Result



LTE Band	BW(MHz)	Channel Level	Channel	Frequency (MHz)	Modulation	99% BW (MHz)	26dB BW (MHz)	Verdict
B14	5	Low	23305	790.5	QPSK	4.5303	5.1864	PASS
B14	5	Low	23305	790.5	16QAM	4.5193	5.1259	PASS
B14	5	Low	23305	790.5	64QAM	4.5185	5.1705	PASS
B14	5	Mid	23330	793	QPSK	4.5256	5.1792	PASS
B14	5	Mid	23330	793	16QAM	4.5250	5.1019	PASS
B14	5	Mid	23330	793	64QAM	4.5134	5.1677	PASS
B14	5	High	23355	795.5	QPSK	4.5433	5.1864	PASS
B14	5	High	23355	795.5	16QAM	4.5306	5.1860	PASS
B14	5	High	23355	795.5	64QAM	4.5196	5.2133	PASS
B14	10	Mid	23330	793	QPSK	8.9764	9.9118	PASS
B14	10	Mid	23330	793	16QAM	8.9963	10.0831	PASS
B14	10	Mid	23330	793	64QAM	8.9885	9.9756	PASS



LTE Band	BW(MHz)	Channel Level	Channel	Frequency (MHz)	Modulation	99% BW (MHz)	26dB BW (MHz)	Verdict
B26 Part90	1.4	Low	26697	814.7	QPSK	1.1037	1.3483	PASS
B26 Part90	1.4	Low	26697	814.7	16QAM	1.1032	1.3827	PASS
B26 Part90	1.4	Low	26697	814.7	64QAM	1.1049	1.3429	PASS
B26 Part90	1.4	Mid	26740	819	QPSK	1.1054	1.3596	PASS
B26 Part90	1.4	Mid	26740	819	16QAM	1.1100	1.3489	PASS
B26 Part90	1.4	Mid	26740	819	64QAM	1.1050	1.3636	PASS
B26 Part90	1.4	High	26783	823.3	QPSK	1.1002	1.3469	PASS
B26 Part90	1.4	High	26783	823.3	16QAM	1.1080	1.3618	PASS
B26 Part90	1.4	High	26783	823.3	64QAM	1.1042	1.3534	PASS
B26 Part90	3	Low	26705	815.5	QPSK	2.7130	3.0356	PASS
B26 Part90	3	Low	26705	815.5	16QAM	2.7057	3.0862	PASS
B26 Part90	3	Low	26705	815.5	64QAM	2.7271	3.0683	PASS
B26 Part90	3	Mid	26740	819	QPSK	2.7108	3.0569	PASS
B26 Part90	3	Mid	26740	819	16QAM	2.7139	3.1092	PASS
B26 Part90	3	Mid	26740	819	64QAM	2.7172	3.0457	PASS
B26 Part90	3	High	26775	822.5	QPSK	2.7106	3.0401	PASS
B26 Part90	3	High	26775	822.5	16QAM	2.7175	3.0665	PASS
B26	3	High	26775	822.5	64QAM	2.7128	3.0582	PASS



Part90								
B26 Part90	5	Low	26715	816.5	QPSK	4.4821	5.0137	PASS
B26 Part90	5	Low	26715	816.5	16QAM	4.4826	4.9824	PASS
B26 Part90	5	Low	26715	816.5	64QAM	4.4827	5.0079	PASS
B26 Part90	5	Mid	26740	819	QPSK	4.4818	5.0331	PASS
B26 Part90	5	Mid	26740	819	16QAM	4.4843	4.9331	PASS
B26 Part90	5	Mid	26740	819	64QAM	4.4833	5.0063	PASS
B26 Part90	5	High	26765	821.5	QPSK	4.4830	4.9402	PASS
B26 Part90	5	High	26765	821.5	16QAM	4.4818	5.0093	PASS
B26 Part90	5	High	26765	821.5	64QAM	4.4855	5.0389	PASS
B26 Part90	10	Low	26740	819	QPSK	8.9267	9.7696	PASS
B26 Part90	10	Low	26740	819	16QAM	8.9423	9.8574	PASS
B26 Part90	10	Low	26740	819	64QAM	8.9533	9.7919	PASS
B26 Part90	10	Mid	26740	819	QPSK	8.9515	9.6362	PASS
B26 Part90	10	Mid	26740	819	16QAM	8.9431	9.8225	PASS
B26 Part90	10	Mid	26740	819	64QAM	8.9329	9.7906	PASS
B26 Part90	10	High	26740	819	QPSK	8.9508	9.7779	PASS
B26 Part90	10	High	26740	819	16QAM	8.9513	9.7652	PASS
B26 Part90	10	High	26740	819	64QAM	8.9376	9.6763	PASS



B14 / 5MHz / QPSK/ Low CH



B14 / 5MHz / 16QAM/ Low CH



B14 / 5MHz / 64QAM/ Low CH



B14 / 5MHz / QPSK/ Mid CH




B14 / 5MHz / 16QAM/ Mid CH



B14 / 5MHz / 64QAM/ Mid CH




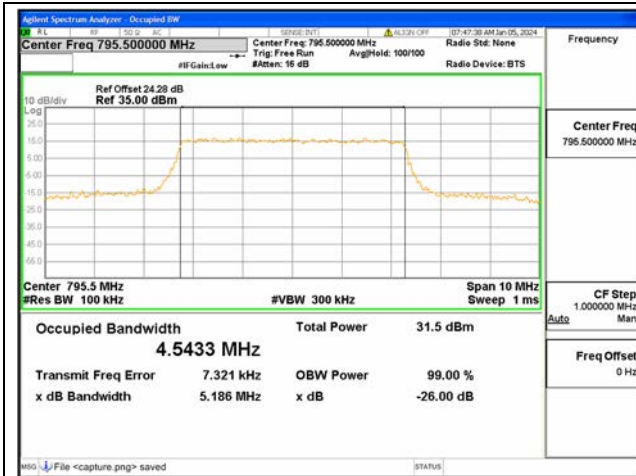

B14 / 5MHz / QPSK/ High CH




B14 / 5MHz / 16QAM/ High CH

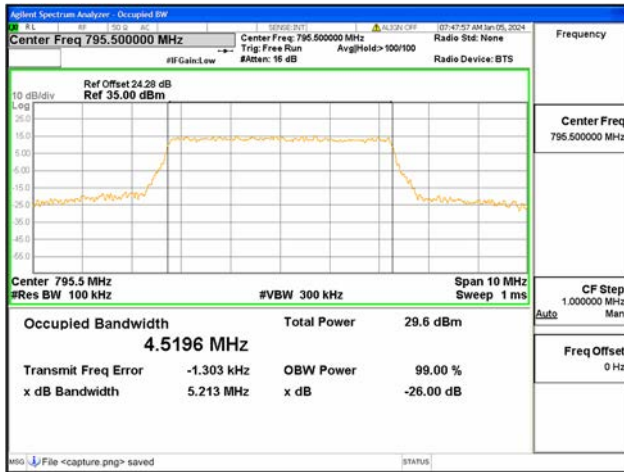

B14 / 5MHz / 64QAM/ High CH




B14 / 10MHz / QPSK/ Mid CH

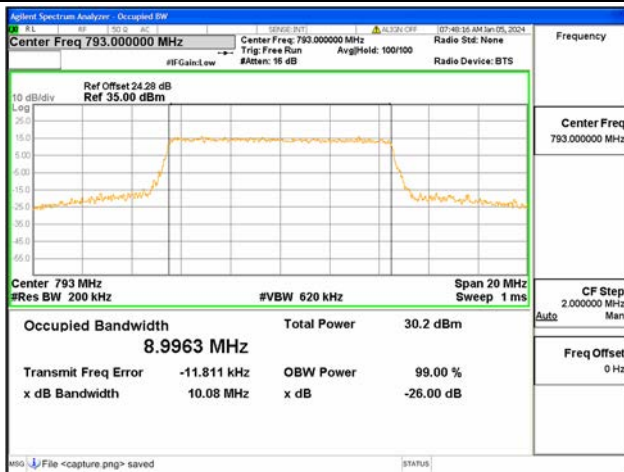

B14 / 10MHz / 16QAM/ Mid CH




B14 / 10MHz / 64QAM/ Mid CH

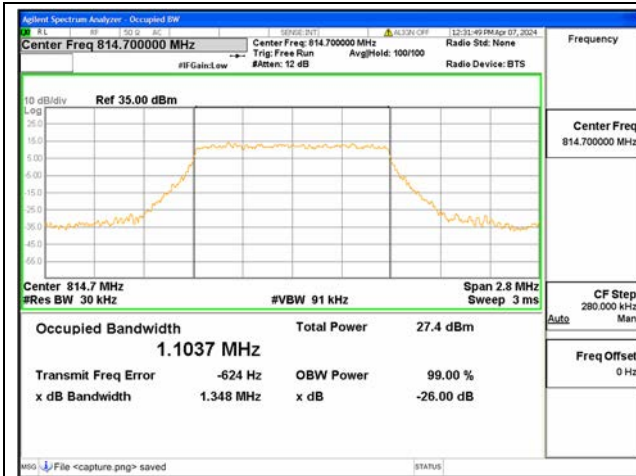


B26 Part90 / 1.4MHz / QPSK/ Low CH



B26 Part90 / 1.4MHz / 16QAM/ Low CH

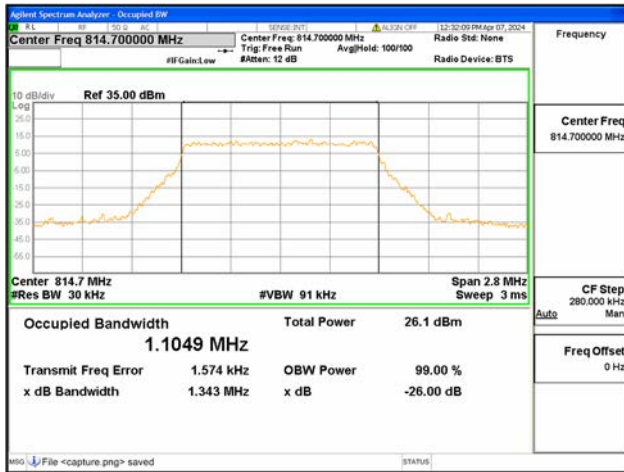


B26 Part90 / 1.4MHz / 64QAM/ Low CH

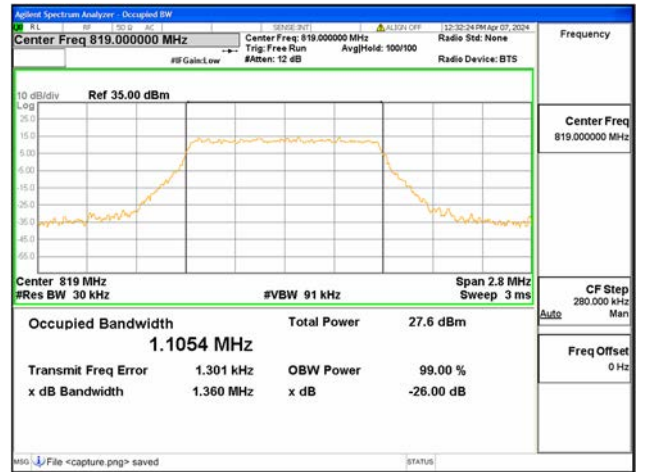

B26 Part90 / 1.4MHz / QPSK/ Mid CH




B26 Part90 / 1.4MHz / 16QAM/ Mid CH

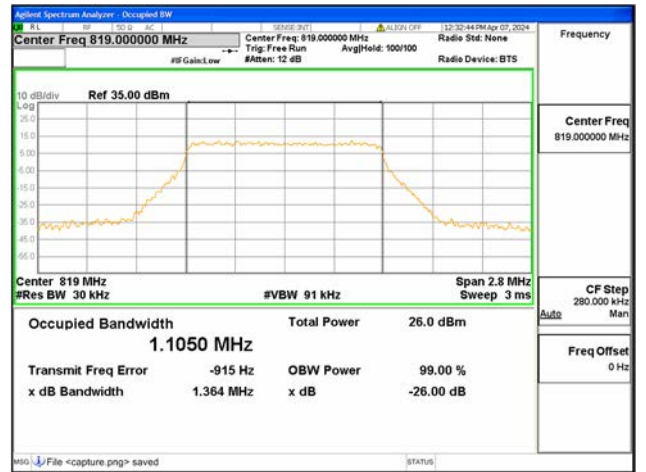


B26 Part90 / 1.4MHz / 64QAM/ Mid CH




B26 Part90 / 1.4MHz / QPSK/ High CH

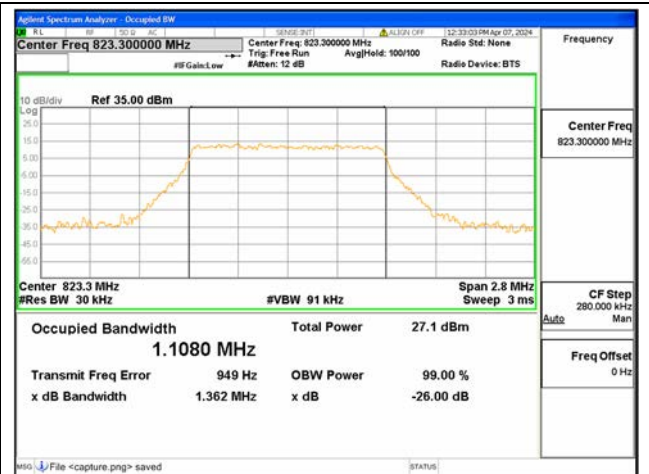

B26 Part90 / 1.4MHz / 16QAM/ High CH

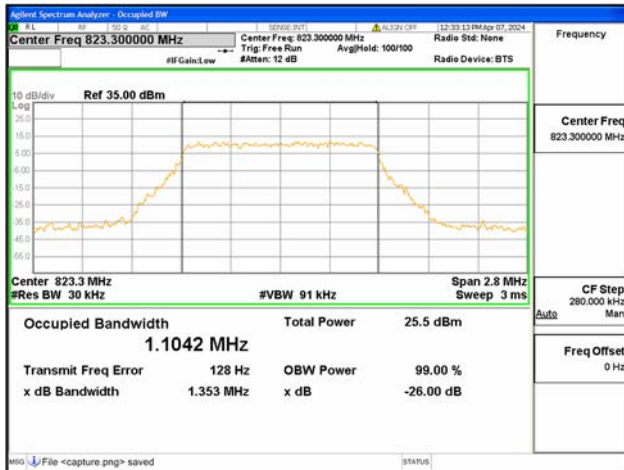

B26 Part90 / 1.4MHz / 64QAM/ High CH

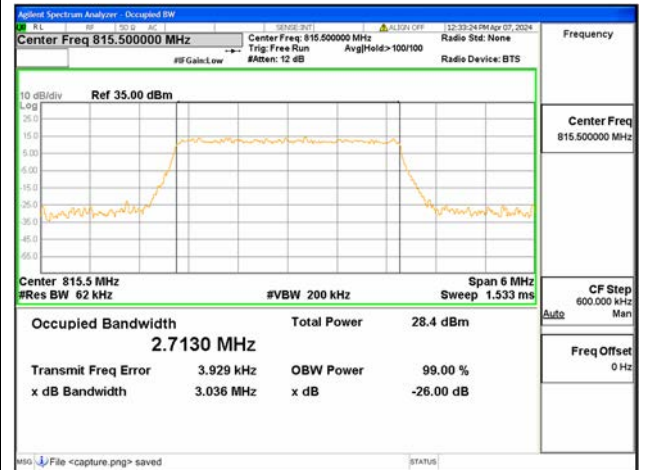

B26 Part90 / 3MHz / QPSK/ Low CH



B26 Part90 / 3MHz / 16QAM/ Low CH




B26 Part90 / 3MHz / 64QAM/ Low CH



B26 Part90 / 3MHz / QPSK/ Mid CH




B26 Part90 / 3MHz / 16QAM/ Mid CH

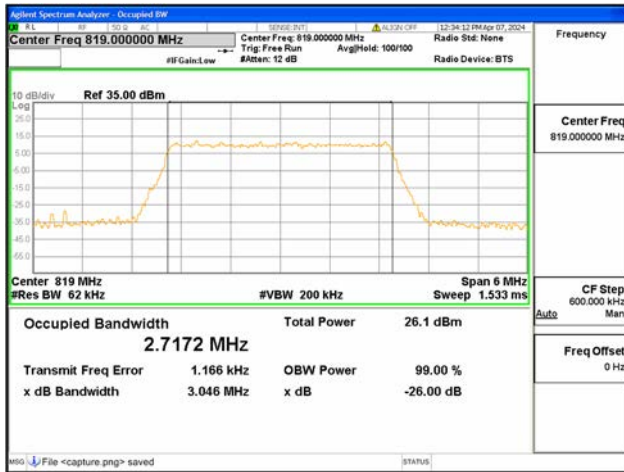


B26 Part90 / 3MHz / 64QAM/ Mid CH




B26 Part90 / 3MHz / QPSK/ High CH

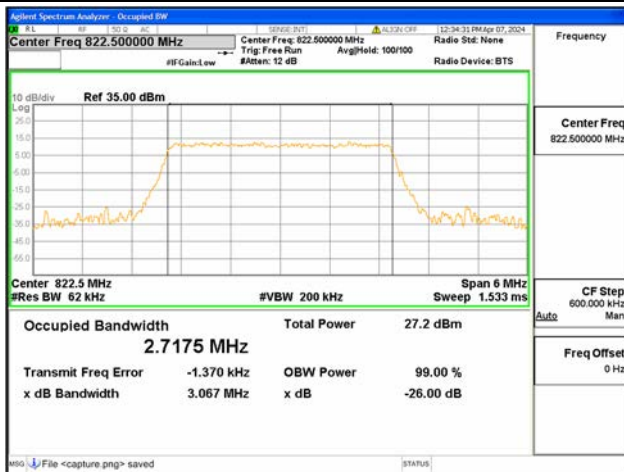

B26 Part90 / 3MHz / 16QAM/ High CH

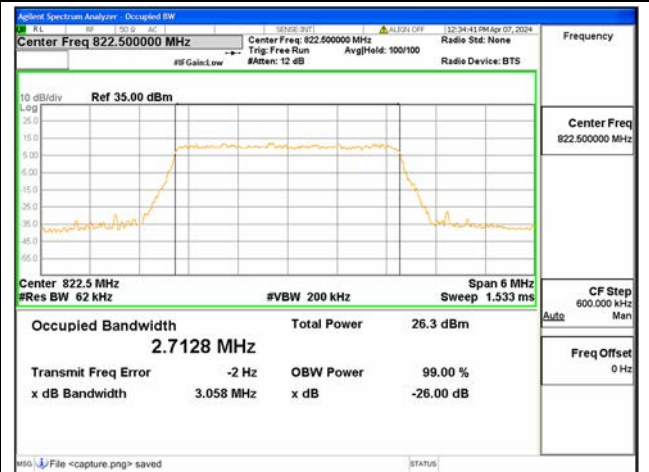


B26 Part90 / 3MHz / 64QAM/ High CH

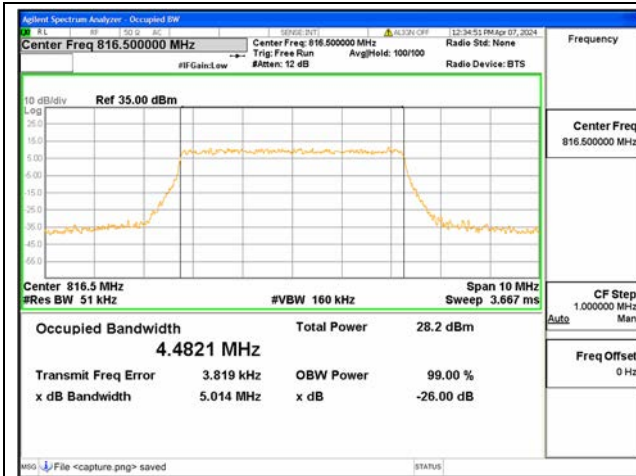


B26 Part90 / 5MHz / QPSK/ Low CH




B26 Part90 / 5MHz / 16QAM/ Low CH

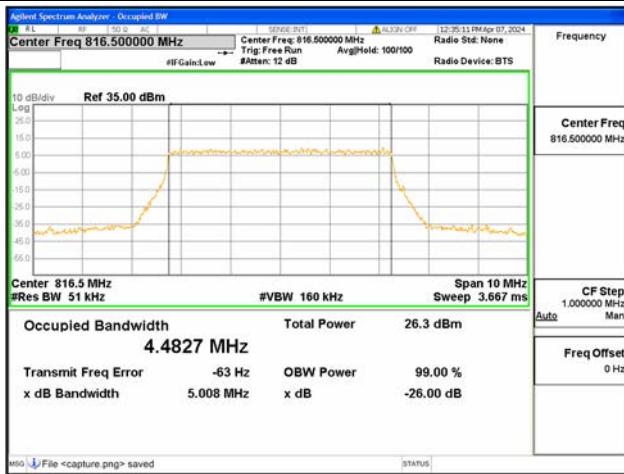


B26 Part90 / 5MHz / 64QAM/ Low CH

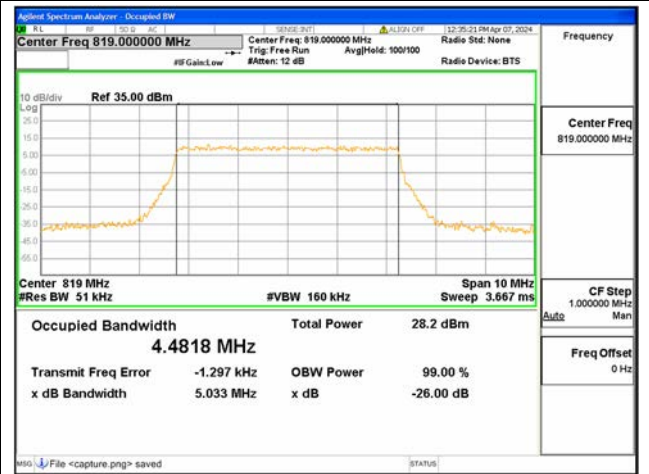

B26 Part90 / 5MHz / QPSK/ Mid CH

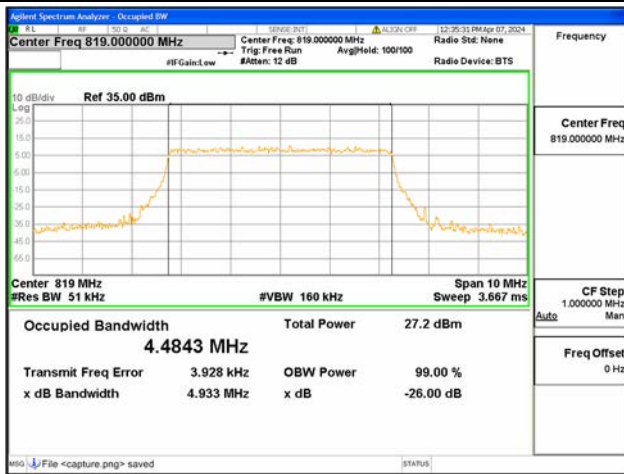

B26 Part90 / 5MHz / 16QAM/ Mid CH

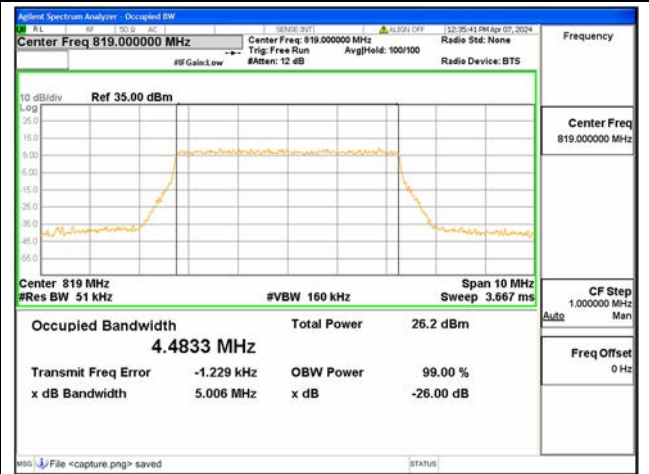


B26 Part90 / 5MHz / 64QAM/ Mid CH




B26 Part90 / 5MHz / QPSK / High CH




B26 Part90 / 5MHz / 16QAM / High CH

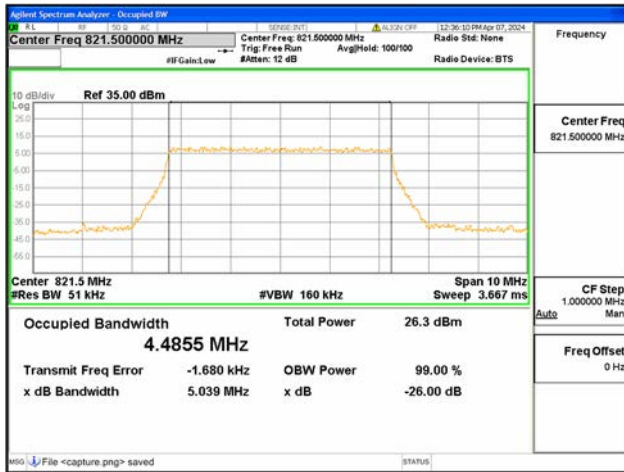


B26 Part90 / 5MHz / 64QAM / High CH

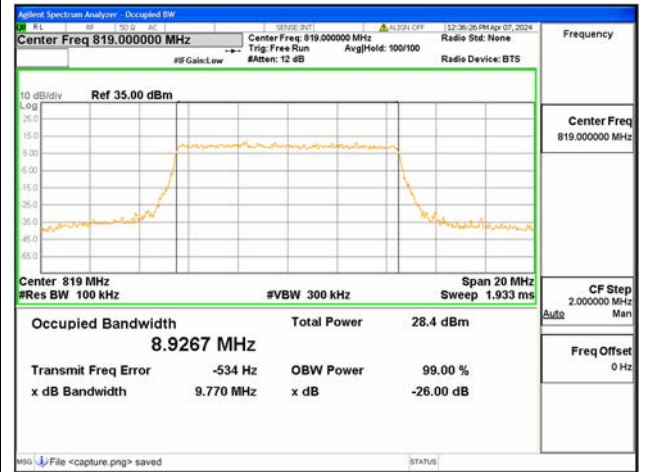

B26 Part90 / 10MHz / QPSK / Low CH

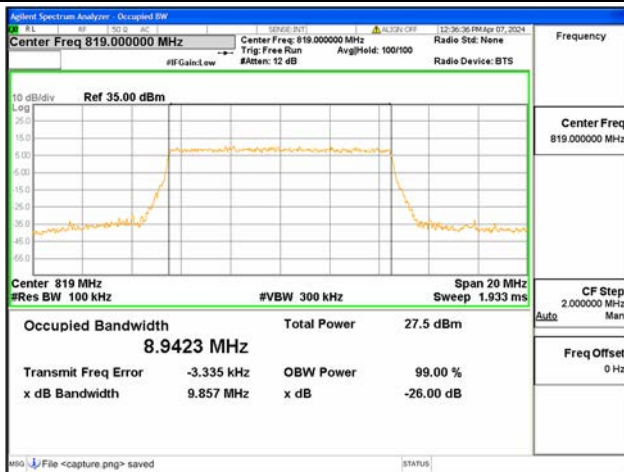

B26 Part90 / 10MHz / 16QAM / Low CH

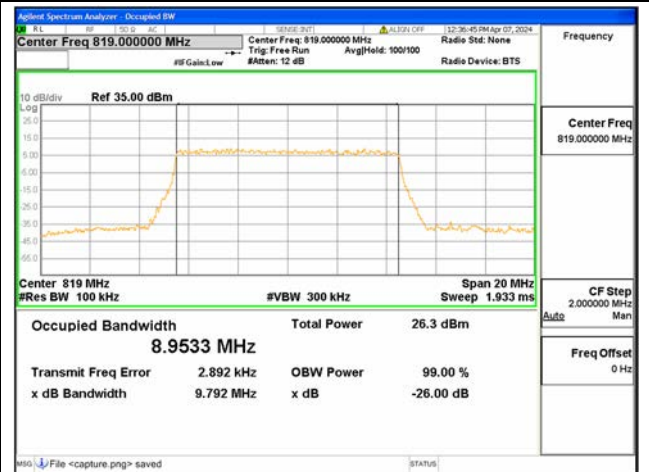


B26 Part90 / 10MHz / 64QAM / Low CH



B26 Part90 / 10MHz / QPSK/ Mid CH




B26 Part90 / 10MHz / 16QAM/ Mid CH

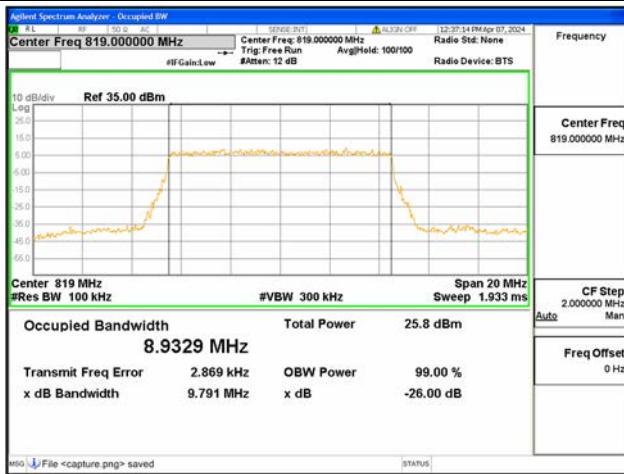

B26 Part90 / 10MHz / 64QAM/ Mid CH



B26 Part90 / 10MHz / QPSK/ High CH

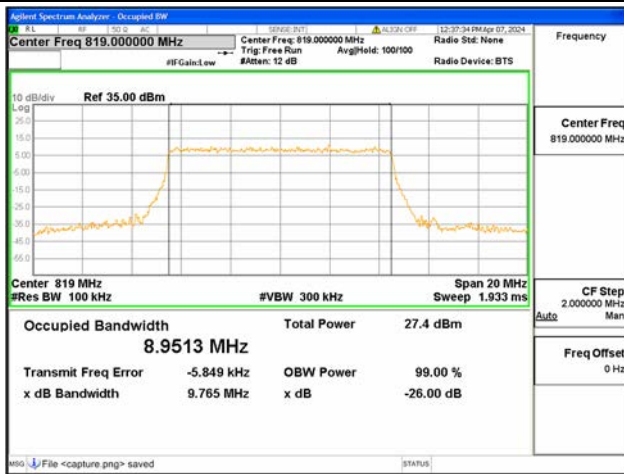

B26 Part90 / 10MHz / 16QAM/ High CH



B26 Part90 / 10MHz / 64QAM/ High CH

## 2.3. Frequency Stability


### 2.3.1. Requirement

According to FCC section 2.1055, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of not more than  $10^{\circ}\text{C}$ .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

**Note:** The operating temperature of EUT is from  $-20^{\circ}\text{C}$  to  $55^{\circ}\text{C}$ , which are specified by the applicant.

### 2.3.2. Test Description

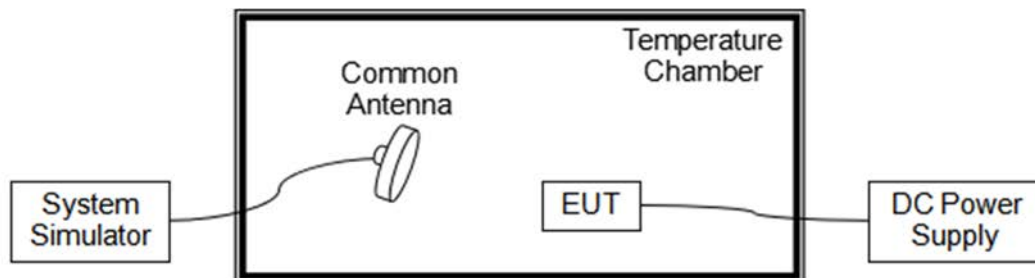

The EUT which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power. A call is established between the EUT and the SS via a Common Antenna.

### 2.3.3. Test procedure

KDB 971168 D01v03 Section 9.0 and ANSI/TIA-603-E-2016.





**2.3.4. Test Result**

The nominal, highest and lowest extreme voltages are separately 3.87V, 4.45V and 3.65V, which are specified by the applicant; the normal temperature here used is 20°C.

LTE Band 14, 64QAM, Channel 23330, Frequency 793.0MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp(°C)	Fre. Dev.(Hz)	Deviation (ppm)	Result
Normal	3.87	+20(Ref)	17	0.021	PASS
Normal		-20	10	0.013	
Normal		-10	15	0.019	
Normal		0	17	0.021	
Normal		+10	18	0.023	
Normal		+20	-13	-0.016	
Normal		+30	19	<b>0.024</b>	
Normal		+40	-9	-0.011	
Normal		+50	15	0.019	
Normal	4.20	+55	6	0.008	
High	4.45	+20	14	0.018	
BATT.ENDPOINT	3.65	+20	13	0.016	


LTE Band 26, 64QAM, Channel 26740, Frequency 819MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp(°C)	Fre. Dev.(Hz)	Deviation (ppm)	Result
Normal	3.87	+20(Ref)	18	0.022	PASS
Normal		-20	14	0.017	
Normal		-10	-3	-0.004	
Normal		0	13	0.016	
Normal		+10	18	0.022	
Normal		+20	16	0.020	
Normal		+30	16	0.020	
Normal		+40	-18	-0.022	
Normal		+50	-14	-0.017	
Normal	4.20	+55	-14	-0.017	
High	4.45	+20	16	0.020	
BATT.ENDPOINT	3.65	+20	19	<b>0.023</b>	

## 2.4. Conducted Spurious Emissions

### 2.4.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### 2.4.2. Test Description

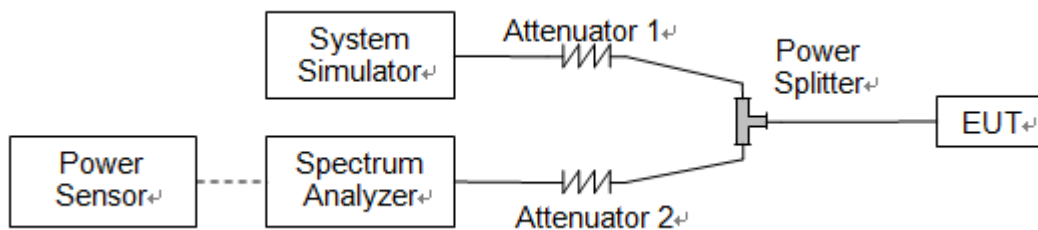


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

### 2.4.3. Test procedure


KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.




2.4.4. Test Result

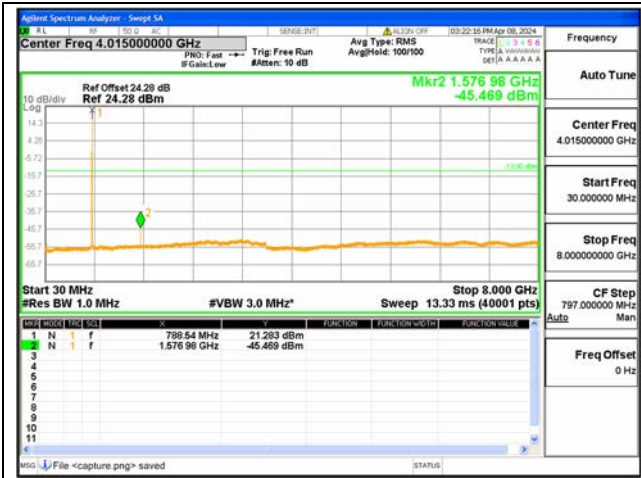


B14 / 5MHz / Low CH / QPSK

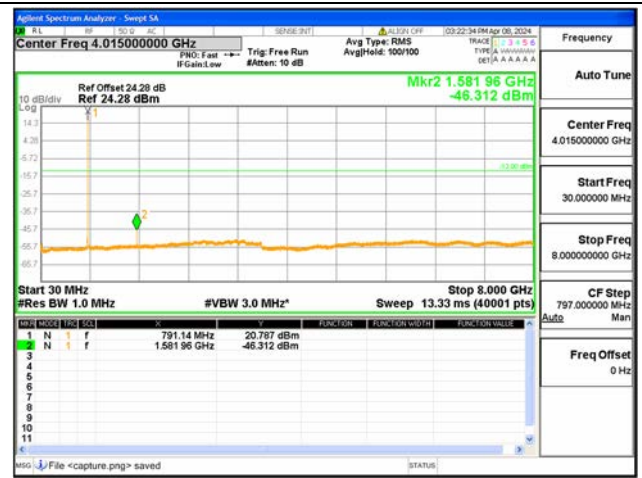


B14 / 5MHz / Mid CH / QPSK

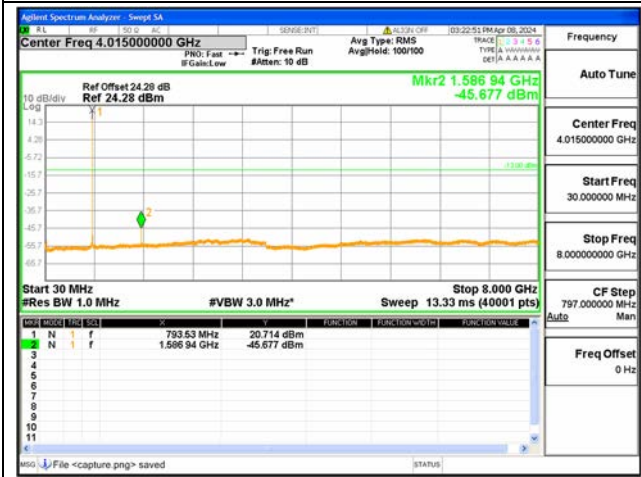


B14 / 5MHz / High CH / QPSK

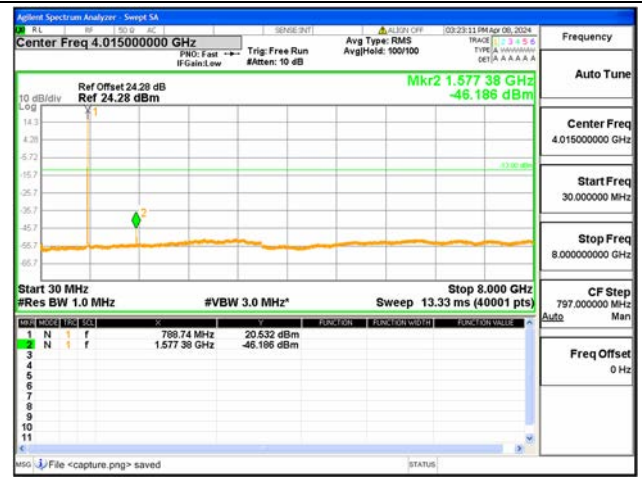


B14 / 10MHz / Mid CH / QPSK

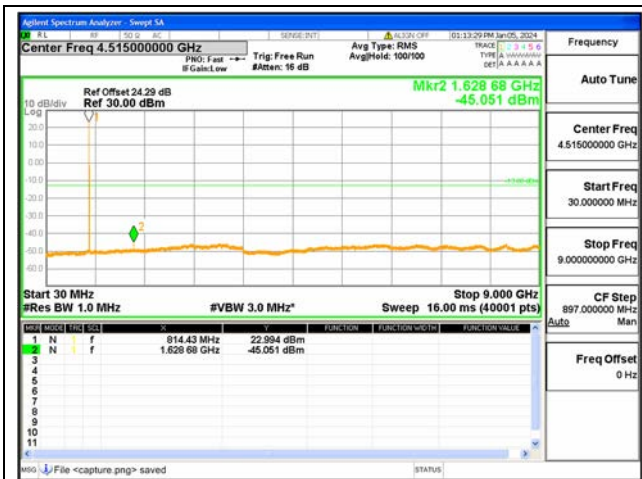


B26 Part90 / 1.4MHz / Low CH / QPSK

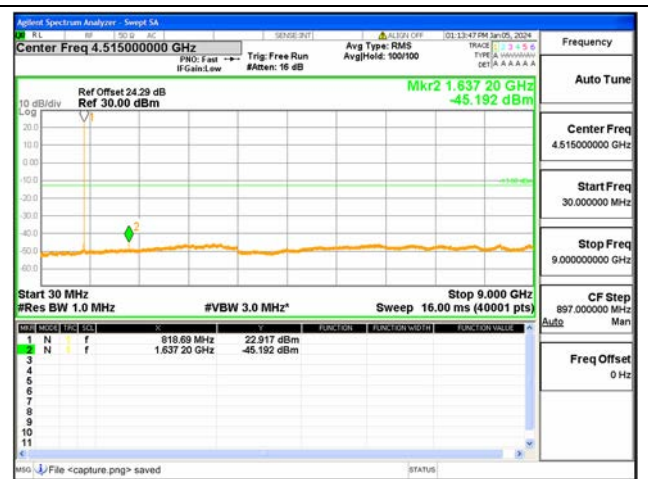


B26 Part90 / 1.4MHz / Mid CH / QPSK

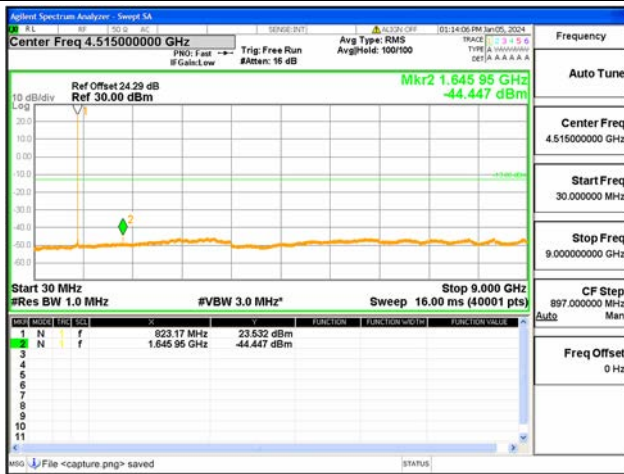


B26 Part90 / 1.4MHz / High CH / QPSK

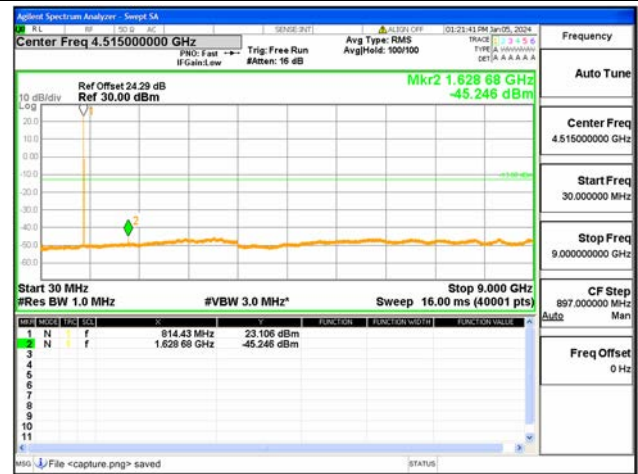


B26 Part90 / 3MHz / Low CH / QPSK

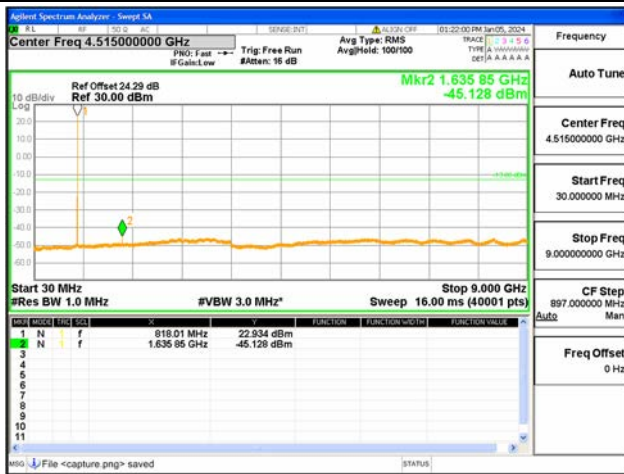


B26 Part90 / 3MHz / Mid CH / QPSK

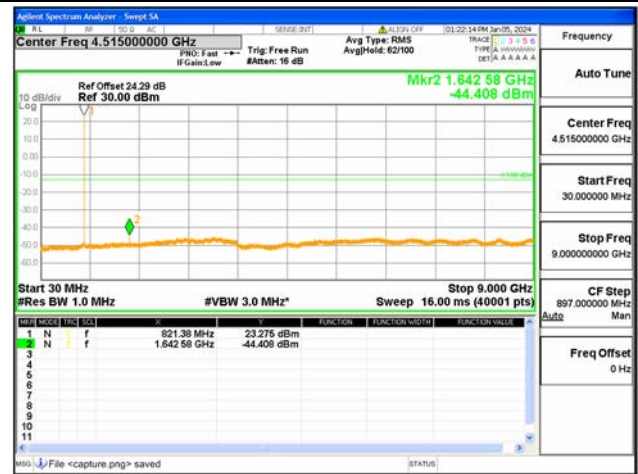


B26 Part90 / 3MHz / High CH / QPSK

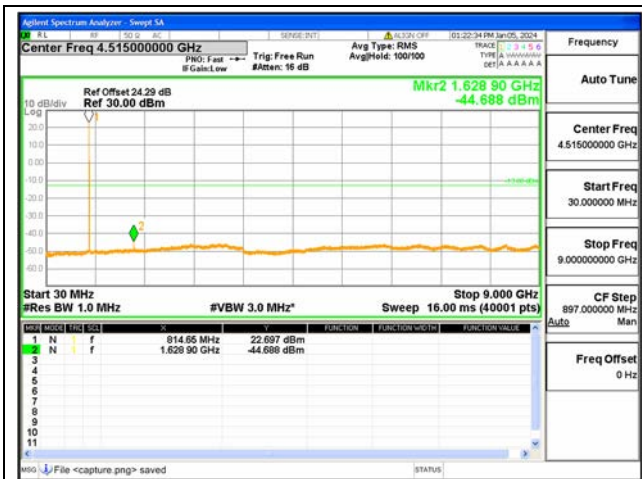


B26 Part90 / 5MHz / Low CH / QPSK

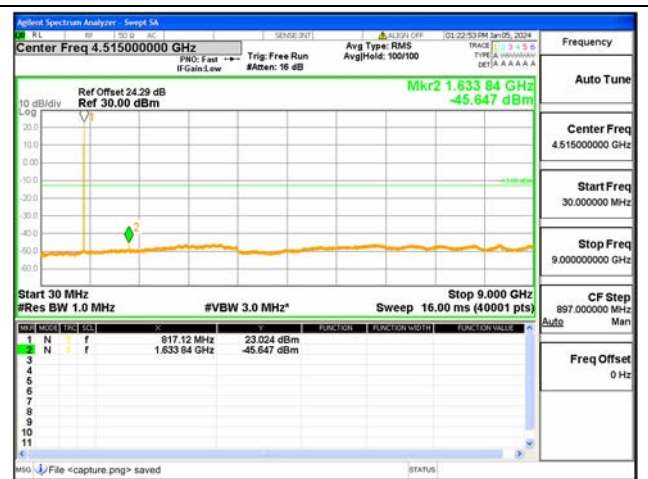


B26 Part90 / 5MHz / Mid CH / QPSK

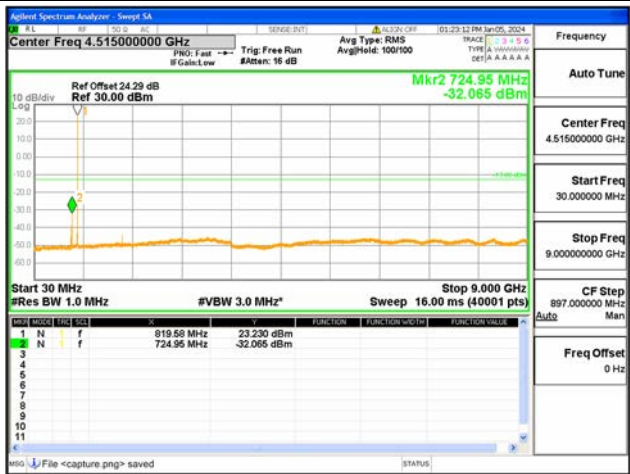


B26 Part90 / 5MHz / High CH / QPSK

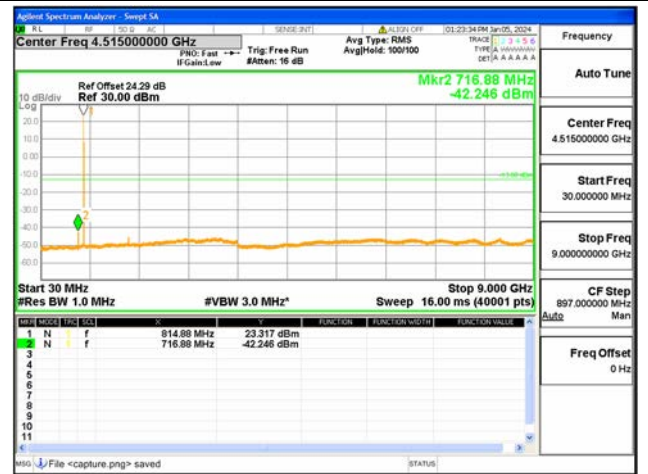

B26 Part90 / 10MHz / Low CH / QPSK

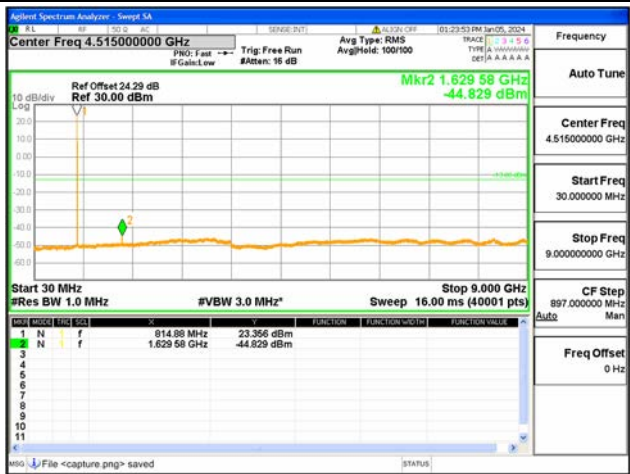

B26 Part90 / 10MHz / Mid CH / QPSK

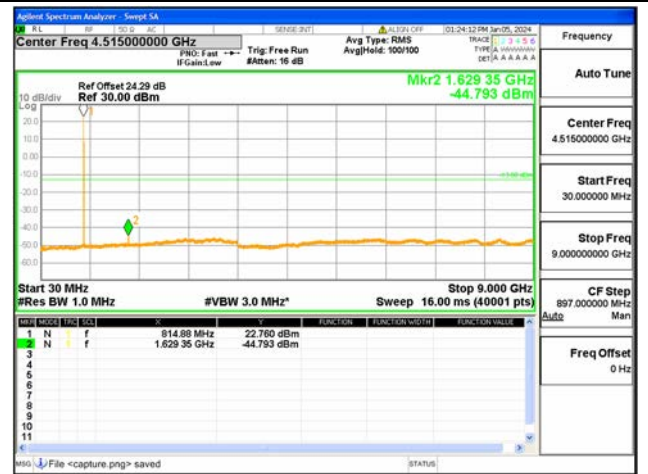

B26 Part90 / 10MHz / High CH / QPSK

## 2.5. Band Edge

### 2.5.1. Requirement

#### Band 14


According to FCC section 90.543(e), for operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (2) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.
- (3) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (4) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

#### Band 26

According to FCC section 90.961(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 2.5.2. Test Description

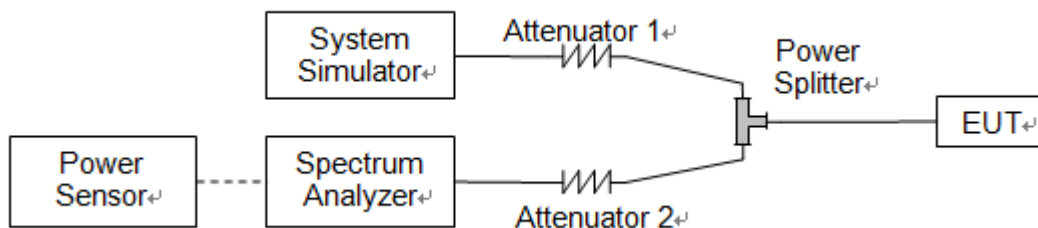

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the





SS.

### 2.5.3. Test procedure


KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.

### 2.5.4. Test Result

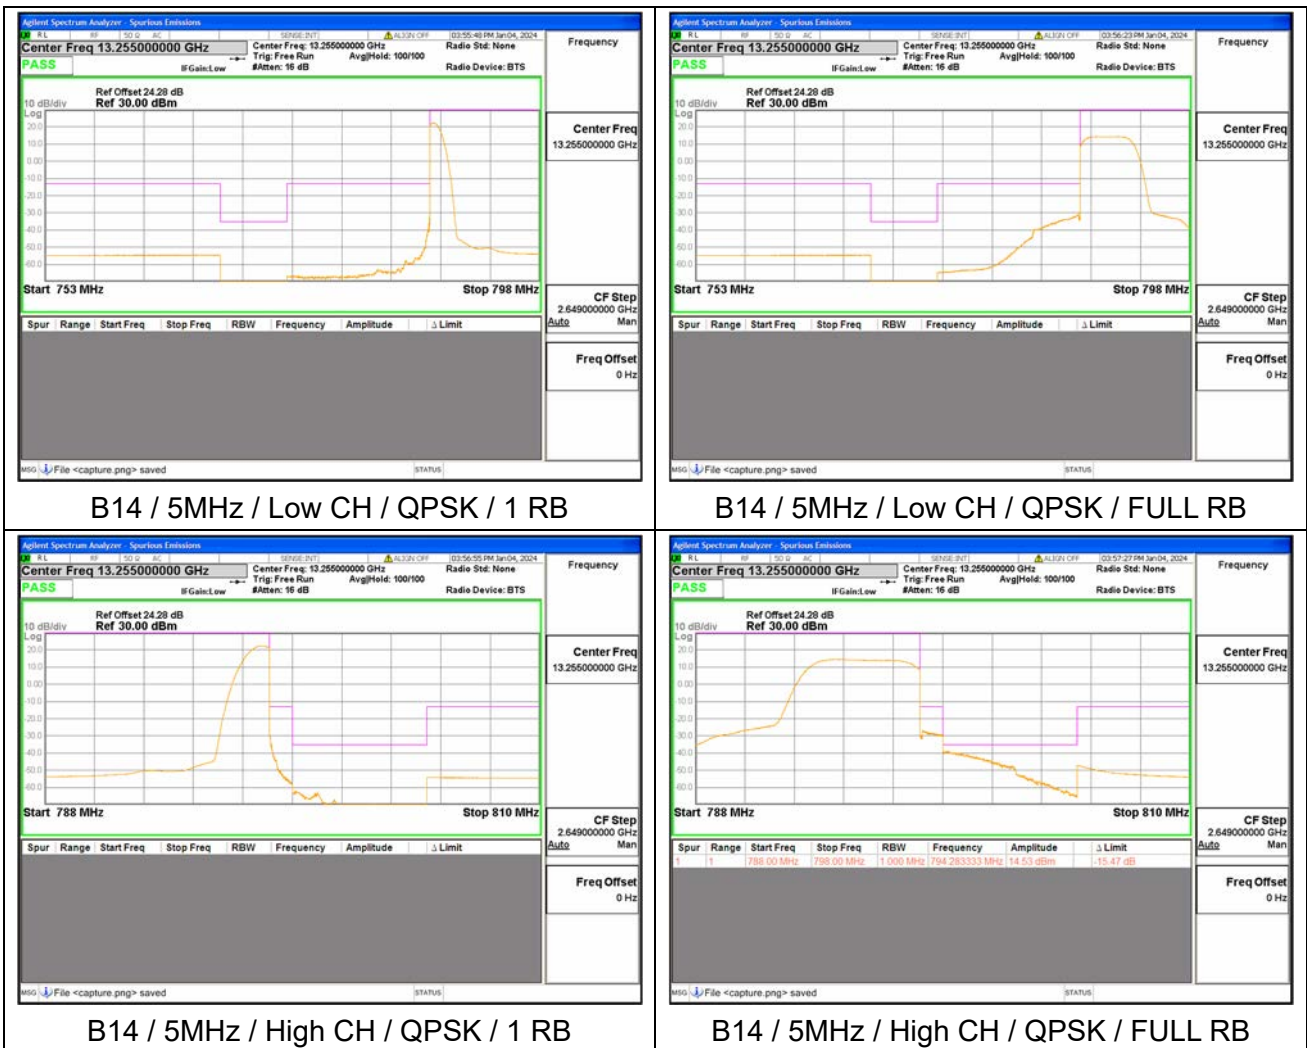


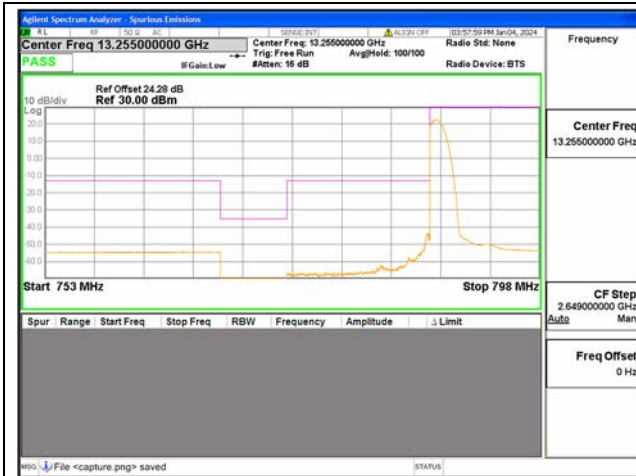


B14 / 10MHz / Low CH / QPSK / 1 RB

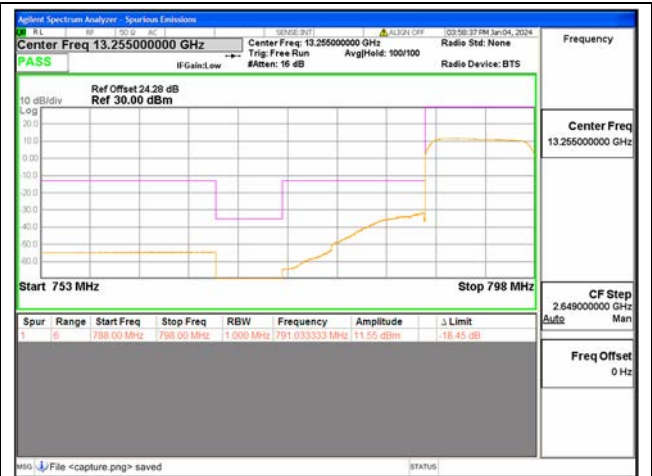

B14 / 10MHz / Low CH / QPSK / FULL RB

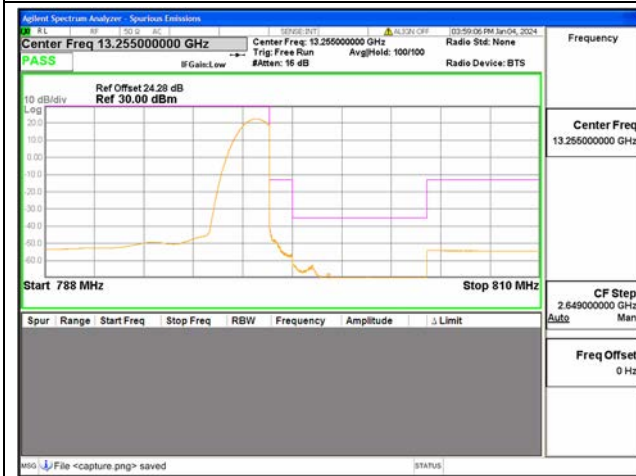


B14 / 10MHz / High CH / QPSK / 1 RB

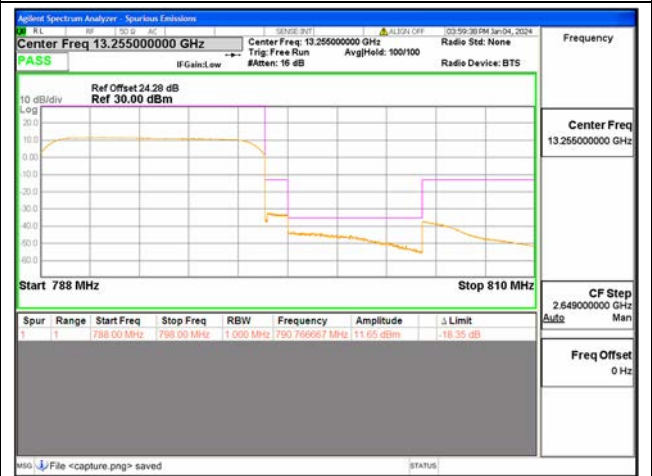


B14 / 10MHz / High CH / QPSK / FULL RB




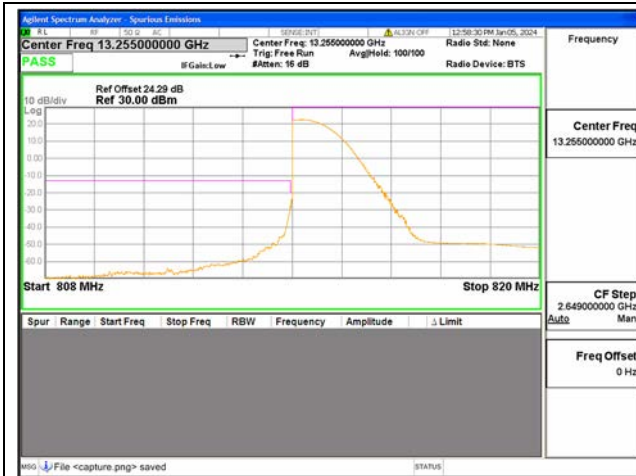


B26 Part90 / 1.4MHz / Low CH / QPSK / 1 RB

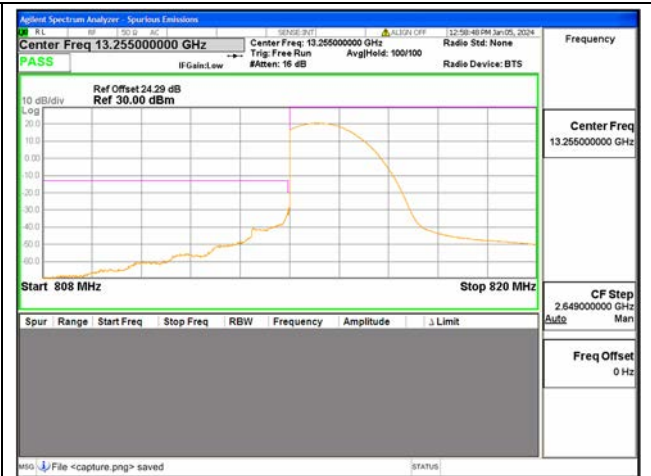

B26 Part90 / 1.4MHz / Low CH / QPSK / FULL RB

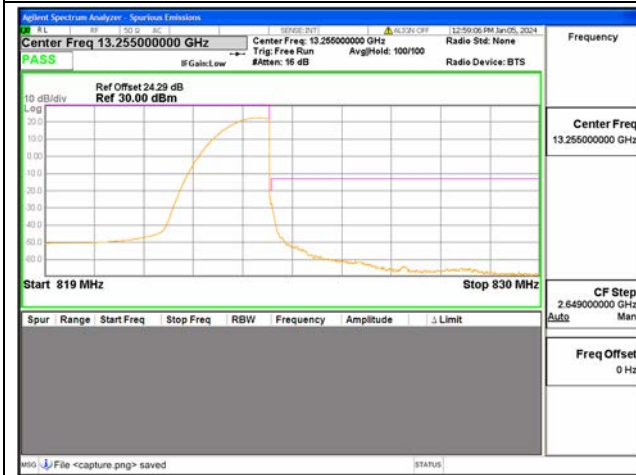


B26 Part90 / 1.4MHz / High CH / QPSK / 1 RB

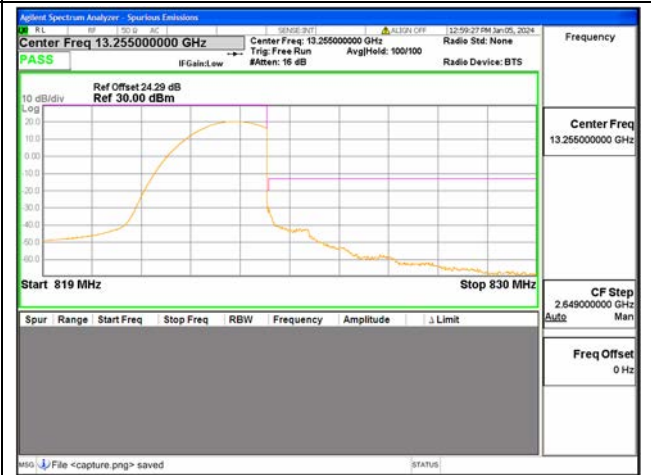


B26 Part90 / 1.4MHz / High CH / QPSK / FULL RB



B26 Part90 / 3MHz / Low CH / QPSK / 1 RB

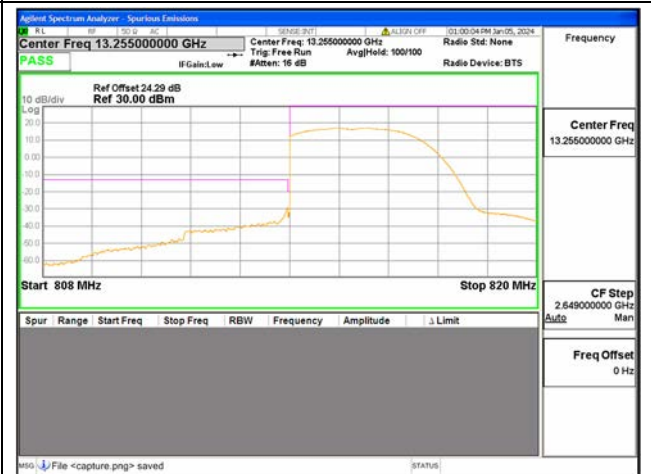


B26 Part90 / 3MHz / Low CH / QPSK / FULL RB

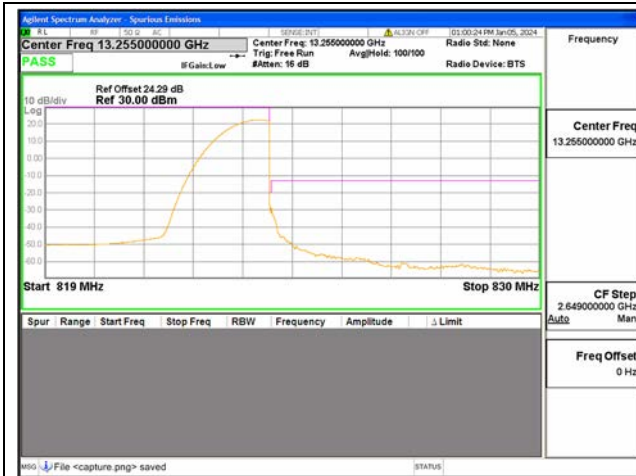


B26 Part90 / 3MHz / High CH / QPSK / 1 RB



B26 Part90 / 3MHz / High CH / QPSK / FULL RB

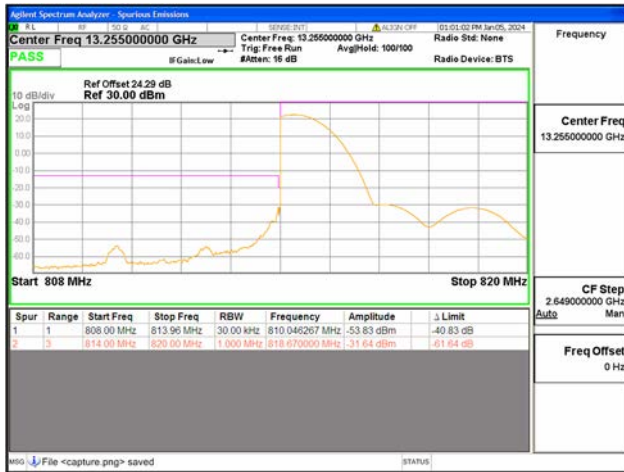

B26 Part90 / 5MHz / Low CH / QPSK / 1 RB

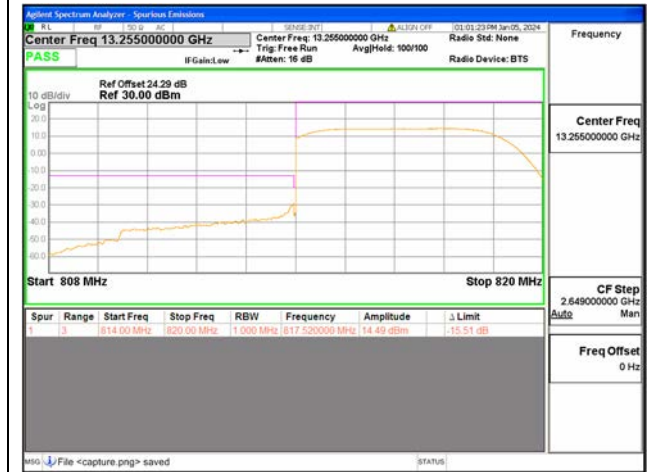


B26 Part90 / 5MHz / Low CH / QPSK / FULL RB




B26 Part90 / 5MHz / High CH / QPSK / 1 RB



B26 Part90 / 5MHz / High CH / QPSK / FULL RB

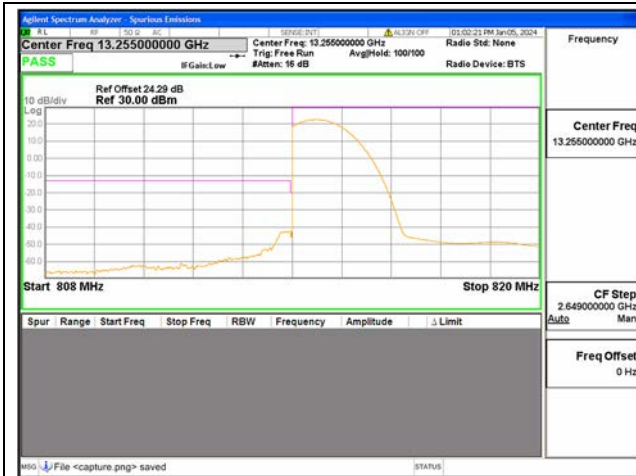

B26 Part90 / 10MHz / Low CH / QPSK / 1 RB

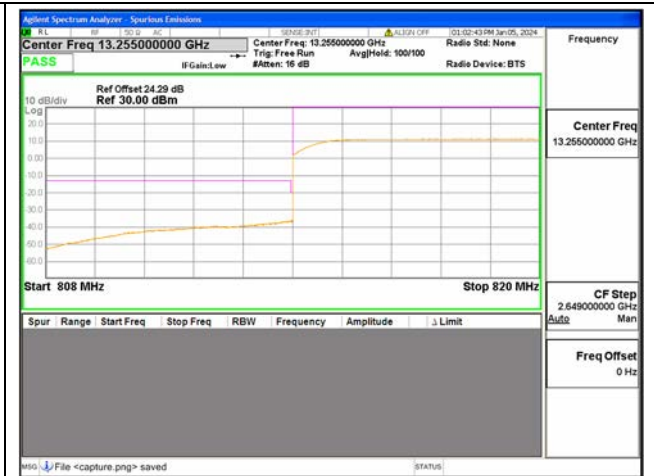

B26 Part90 / 10MHz / Low CH / QPSK / FULL RB



B26 Part90 / 10MHz / High CH / QPSK / 1 RB



B26 Part90 / 10MHz / High CH / QPSK / FULL RB

## 2.6. Radiated Spurious Emissions


### 2.6.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.


Additional requirement for Band 14

According to FCC section 90.543(f), for operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. This calculated to be -40dBm.

### 2.6.2. Test Description

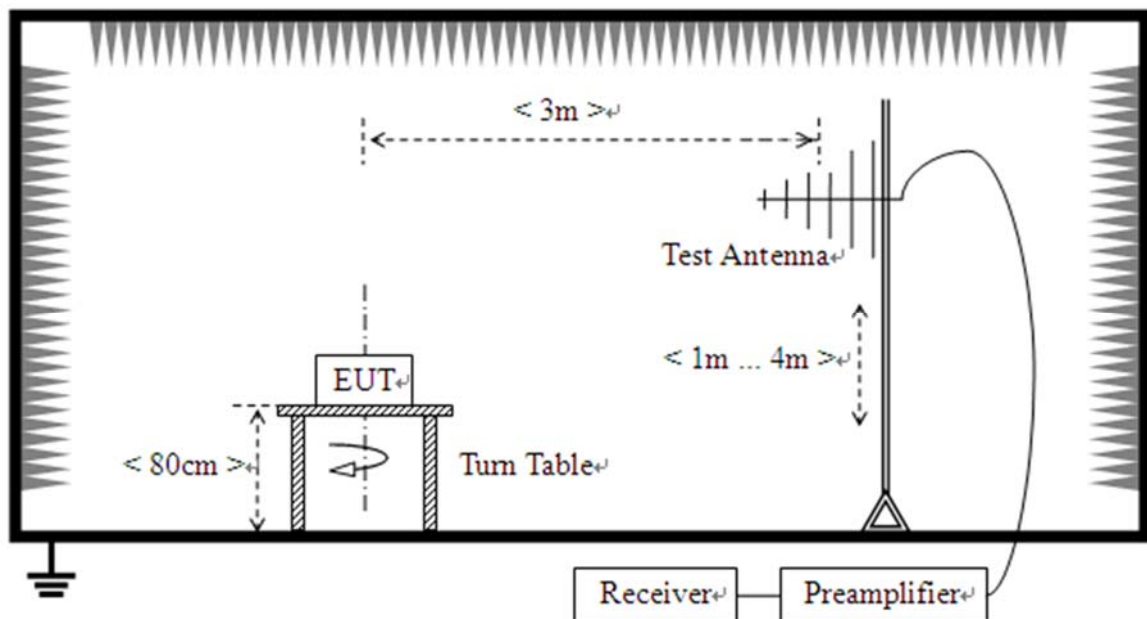

(For the test frequency from 30MHz to 1GHz)

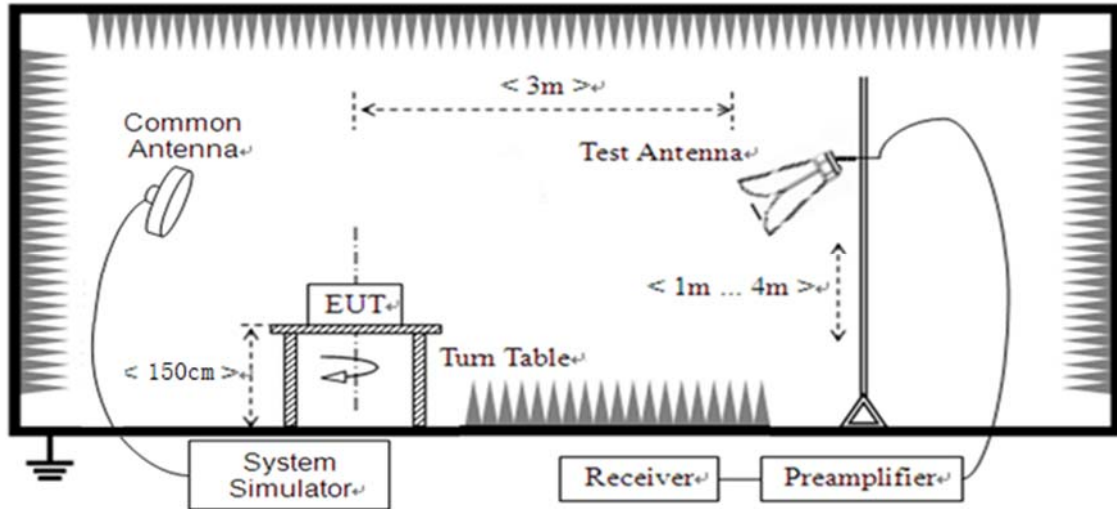

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

**Note:** when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

### 2.6.3. Test procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.



#### 2.6.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST\_TX}} - P_{\text{SUBST\_RX}} - L_{\text{SUBST\_CABLES}} + G_{\text{SUBST\_TX\_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where  $A_{\text{SUBST}}$  is the final substitution correction including receive antenna gain.

$P_{\text{SUBST\_TX}}$  is signal generator level,

$P_{\text{SUBST\_RX}}$  is receiver level,

$L_{\text{SUBST\_CABLES}}$  is cable losses including TX cable,

$G_{\text{SUBST\_TX\_ANT}}$  is substitution antenna gain.

$A_{\text{TOT}}$  is total correction factor including cable loss and substitution correction

During the test, the data of  $A_{\text{TOT}}$  was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of  $A_{\text{TOT}}$ .

**Note 1:** The power of the EUT transmitting frequency should be ignored.


**Note 2:** All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note 3:** All bandwidth and modulation were considered and evaluated respectively by performing full test for each band, only the worst cases (Max Bandwidth and QPSK mode) were recorded in this test report.


**Note 4:** N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.

**Note5:** The amplitude of emissions(18GHz to 10th harmonics) which are attenuated more than 20 dB below the limit are not be reported.

LTE Band 14, 5MHz BW, Low Channel, QPSK

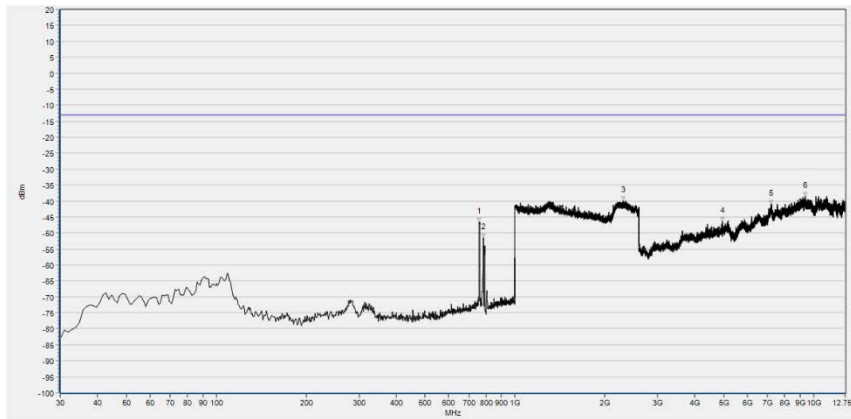


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	759.440	-46.63	-13.00	Horizontal	N/A
2	784.660	-51.55	-13.00	Horizontal	N/A
3	2306.122	-39.92	-13.00	Horizontal	PASS
4	4940.462	-46.40	-13.00	Horizontal	PASS
5	7212.630	-41.10	-13.00	Horizontal	PASS
6	9357.438	-38.61	-13.00	Horizontal	PASS

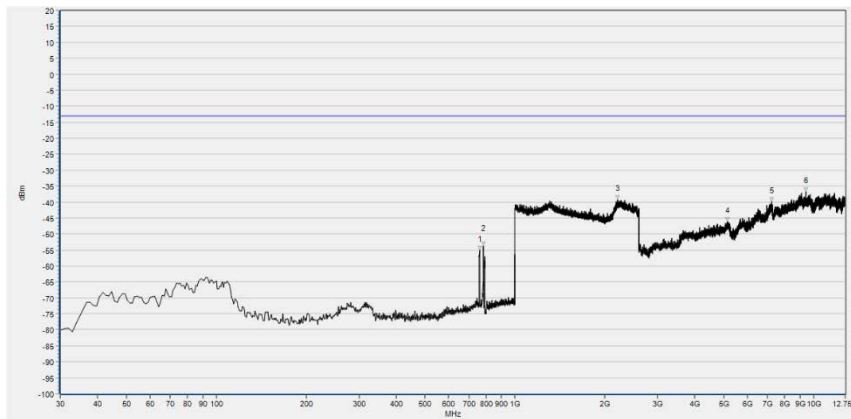


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	760.410	-55.10	-13.00	Vertical	N/A
2	784.660	-53.76	-13.00	Vertical	N/A
3	2210.084	-39.17	-13.00	Vertical	PASS
4	5136.116	-46.25	-13.00	Vertical	PASS
5	7247.700	-39.85	-13.00	Vertical	PASS
6	9412.811	-36.85	-13.00	Vertical	PASS

LTE Band 14, 5MHz BW, Mid Channel, QPSK

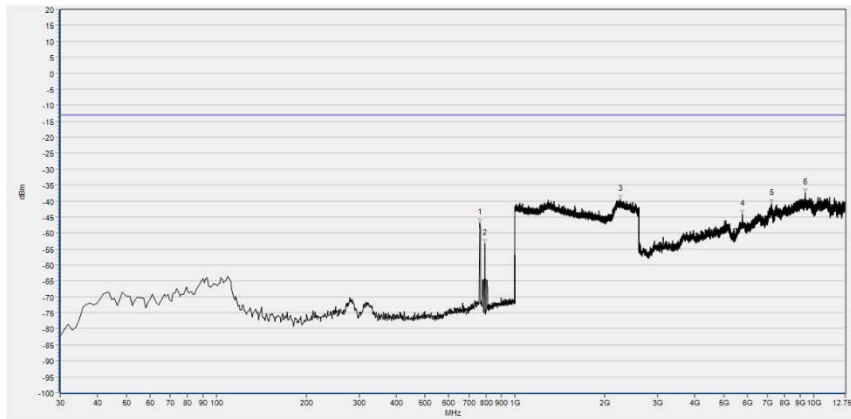


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	761.380	-46.91	-13.00	Horizontal	N/A
2	792.420	-53.28	-13.00	Horizontal	N/A
3	2251.701	-39.48	-13.00	Horizontal	PASS
4	5767.376	-44.13	-13.00	Horizontal	PASS
5	7249.545	-40.74	-13.00	Horizontal	PASS
6	9374.050	-37.38	-13.00	Horizontal	PASS

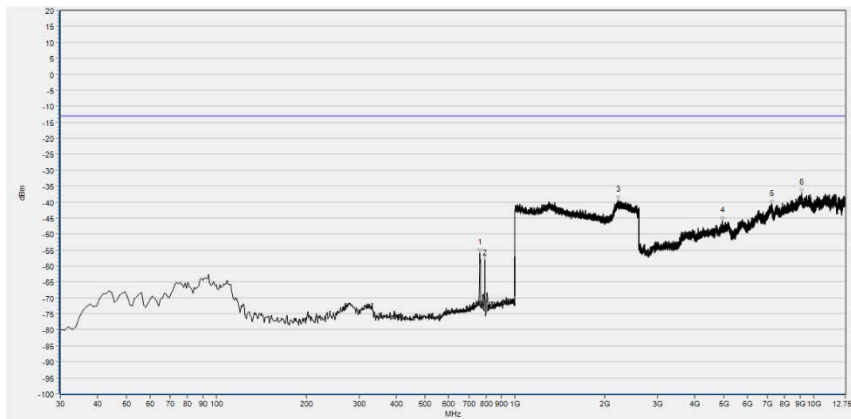


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	763.320	-56.08	-13.00	Vertical	N/A
2	792.420	-58.05	-13.00	Vertical	N/A
3	2210.724	-39.43	-13.00	Vertical	PASS
4	4949.691	-45.98	-13.00	Vertical	PASS
5	7223.704	-40.84	-13.00	Vertical	PASS
6	9110.102	-37.27	-13.00	Vertical	PASS



LTE Band 14, 5MHz BW, High Channel, QPSK

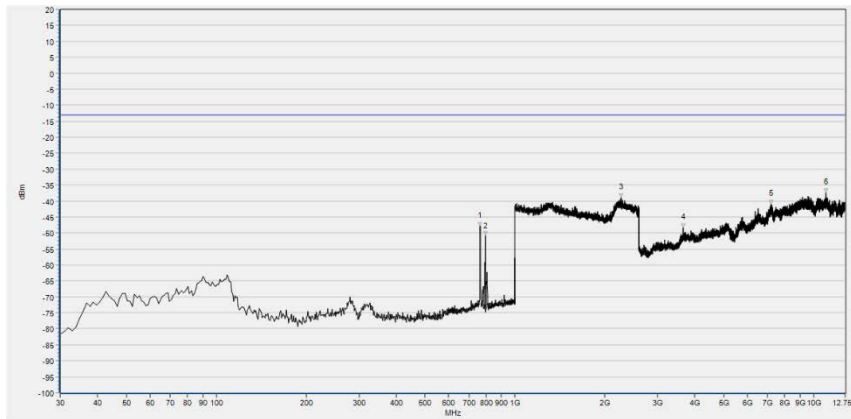


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	764.290	-47.88	-13.00	Horizontal	N/A
2	796.300	-50.86	-13.00	Horizontal	N/A
3	2266.427	-39.02	-13.00	Horizontal	PASS
4	3657.638	-48.32	-13.00	Horizontal	PASS
5	7194.172	-41.12	-13.00	Horizontal	PASS
6	10994.654	-37.43	-13.00	Horizontal	PASS

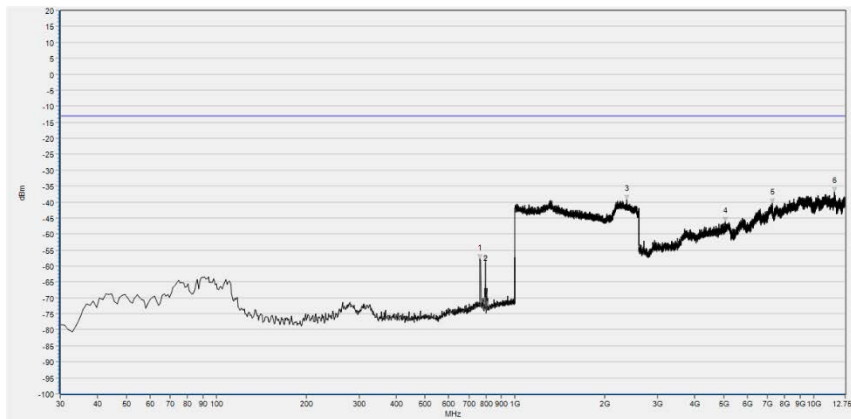


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	764.290	-57.84	-13.00	Vertical	N/A
2	796.300	-58.46	-13.00	Vertical	N/A
3	2365.666	-39.32	-13.00	Vertical	PASS
4	5065.976	-46.07	-13.00	Vertical	PASS
5	7255.083	-40.26	-13.00	Vertical	PASS
6	11732.970	-36.70	-13.00	Vertical	PASS

LTE Band 14, 1559MHz-1610MHz, 5MHz BW, Mid Channel, QPSK

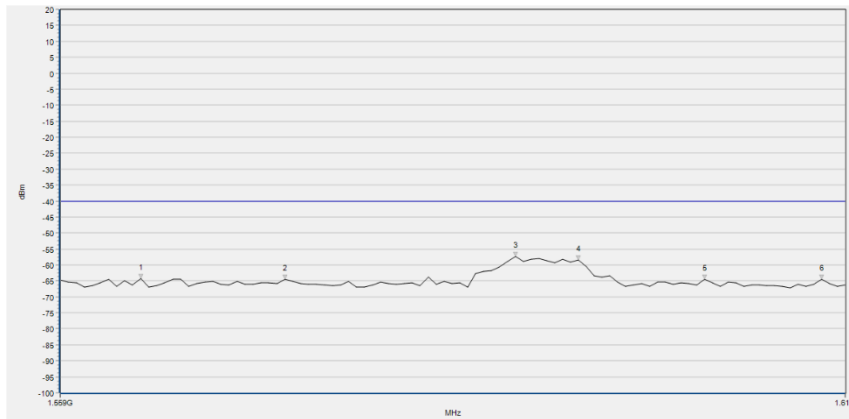


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	1564.152	-64.35	-40.00	Horizontal	PASS
2	1573.424	-64.50	-40.00	Horizontal	PASS
3	1588.364	-57.29	-40.00	Horizontal	PASS
4	1592.485	-58.46	-40.00	Horizontal	PASS
5	1600.727	-64.42	-40.00	Horizontal	PASS
6	1608.455	-64.47	-40.00	Horizontal	PASS

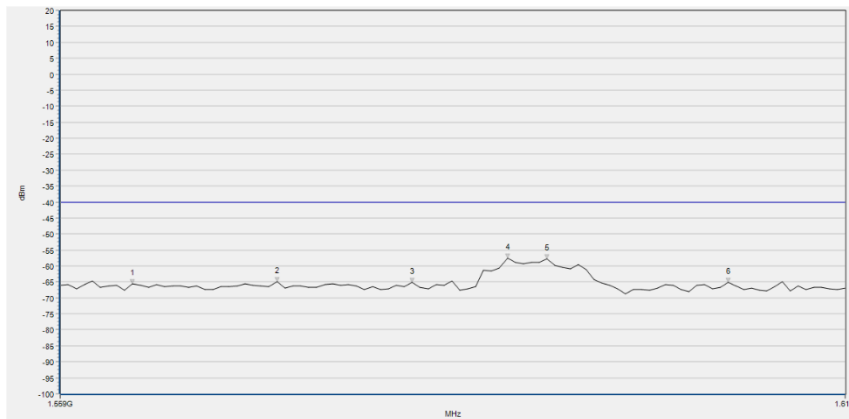


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	1563.636	-65.55	-40.00	Vertical	PASS
2	1572.909	-64.90	-40.00	Vertical	PASS
3	1581.667	-65.05	-40.00	Vertical	PASS
4	1587.848	-57.45	-40.00	Vertical	PASS
5	1590.424	-57.85	-40.00	Vertical	PASS
6	1602.273	-65.17	-40.00	Vertical	PASS

LTE Band 26, 5MHz BW, Low Channel, QPSK

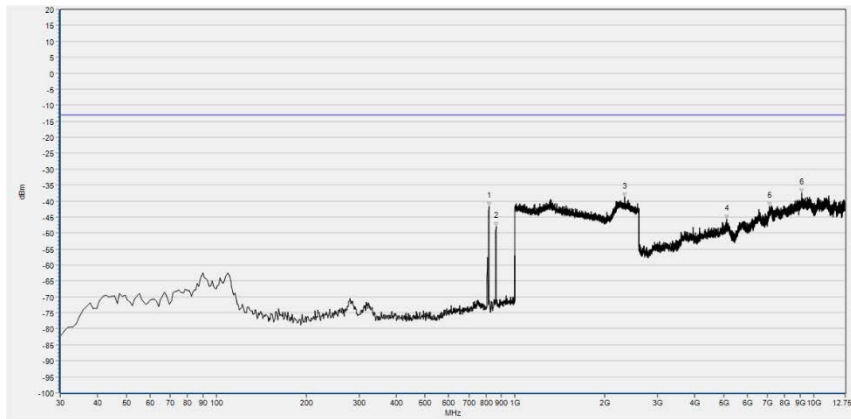


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	816.670	-41.70	-13.00	Horizontal	N/A
2	863.230	-48.01	-13.00	Horizontal	N/A
3	2324.050	-38.80	-13.00	Horizontal	PASS
4	5108.429	-45.67	-13.00	Horizontal	PASS
5	7129.569	-41.64	-13.00	Horizontal	PASS
6	9139.634	-37.52	-13.00	Horizontal	PASS

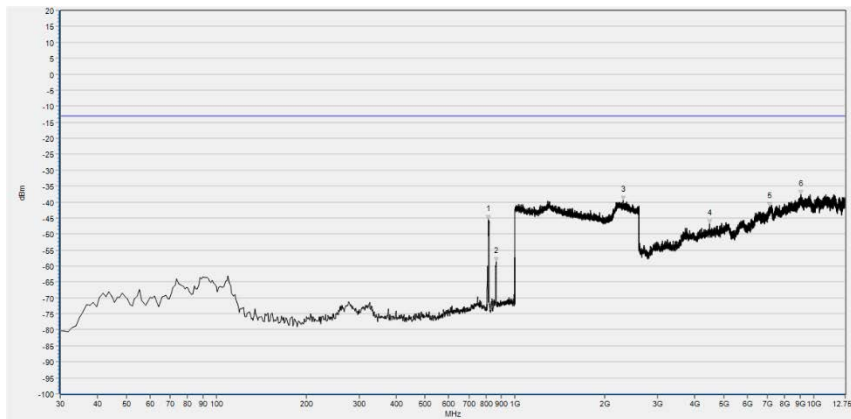


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	814.730	-45.53	-13.00	Vertical	N/A
2	863.230	-58.62	-13.00	Vertical	N/A
3	2307.403	-39.55	-13.00	Vertical	PASS
4	4484.552	-46.87	-13.00	Vertical	PASS
5	7105.574	-41.41	-13.00	Vertical	PASS
6	9080.569	-37.58	-13.00	Vertical	PASS



LTE Band 26, 5MHz BW, Mid Channel, QPSK

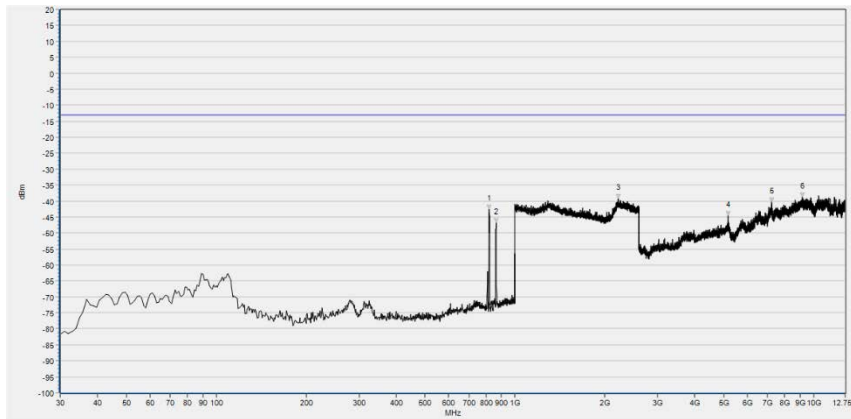


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	816.670	-42.65	-13.00	Horizontal	N/A
2	864.200	-46.82	-13.00	Horizontal	N/A
3	2214.566	-39.18	-13.00	Horizontal	PASS
4	5165.648	-44.60	-13.00	Horizontal	PASS
5	7231.087	-40.37	-13.00	Horizontal	PASS
6	9152.555	-38.85	-13.00	Horizontal	PASS

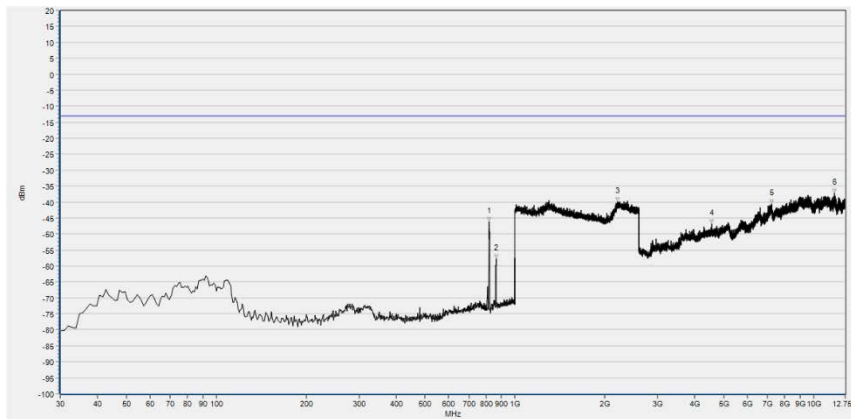


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-46.10	-13.00	Vertical	N/A
2	864.200	-57.78	-13.00	Vertical	N/A
3	2209.444	-39.85	-13.00	Vertical	PASS
4	4563.921	-46.82	-13.00	Vertical	PASS
5	7232.933	-40.60	-13.00	Vertical	PASS
6	11738.507	-37.22	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, High Channel, QPSK

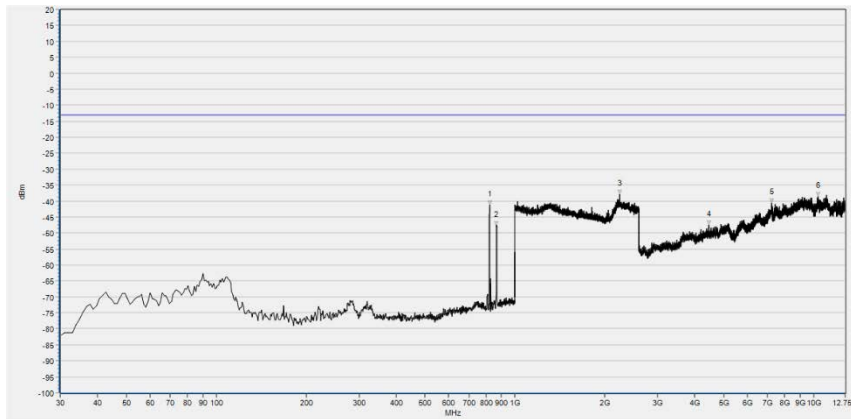

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-41.15	-13.00	Horizontal	N/A
2	865.170	-47.61	-13.00	Horizontal	N/A
3	2238.896	-37.93	-13.00	Horizontal	PASS
4	4455.019	-47.38	-13.00	Horizontal	PASS
5	7220.013	-40.46	-13.00	Horizontal	PASS
6	10370.777	-38.64	-13.00	Horizontal	PASS

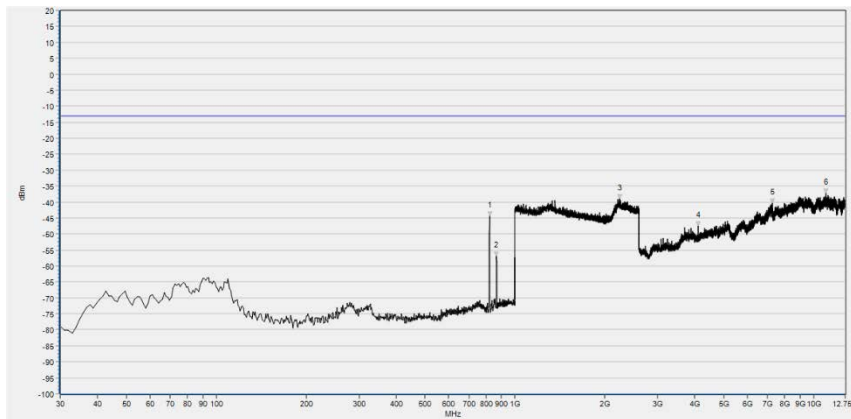

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-44.39	-13.00	Vertical	N/A
2	867.110	-56.88	-13.00	Vertical	N/A
3	2245.298	-39.09	-13.00	Vertical	PASS
4	4108.011	-47.54	-13.00	Vertical	PASS
5	7266.157	-40.36	-13.00	Vertical	PASS
6	10994.654	-37.25	-13.00	Vertical	PASS



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Output Power	$\pm 2.22$ dB
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77$ dB
Band Edge	$\pm 2.77$ dB
Equivalent Isotropic Radiated Power	$\pm 2.22$ dB
Radiated Spurious Emissions	$\pm 6$ dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY51511149	N9020A	Agilent	2023.06.21	2024.06.20
Communication Test Station	6200995016	MT8820C	Anritsu	2023.09.19	2024.09.18
Temperature Chamber	S022177101 00089002	KMT-36LF 1A0	KOMEG	2023.09.19	2024.09.18

##### 4.2 List of Software Used

Description	Manufacturer	Software Version
Morlab FCC LTE Test System	MORLAB	V6.45
MORLAB EMCR	MORLAB	V1.2



**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
System Simulator	152038	CMW500	R&S	2023.10.17	2024.10.16
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Horn	9120D-963	BBHA 9120D	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
Notch Filter	N/A	WRCGV -LTE B14	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE B26	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09

END OF REPORT