



# FCC RF Test Report

**APPLICANT** : Sonim Technologies, Inc.  
**EQUIPMENT** : LTE Phone  
**BRAND NAME** : Sonim  
**MODEL NAME** : XP5800(PC2111)  
**FCC ID** : WYPPC2100  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Sep. 21, 2017 and testing was completed on Oct. 03, 2017. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

**Sporton International (Kunshan) Inc.**

**No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335  
China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode ..... 9

    2.3 Connection Diagram of Test System ..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example ..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 12

    3.2 Maximum Conducted Output Power Measurement ..... 15

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Unwanted Emissions Measurement ..... 19

    3.5 AC Conducted Emission Measurement ..... 25

    3.6 Frequency Stability Measurement ..... 29

    3.7 Automatically Discontinue Transmission ..... 30

    3.8 Antenna Requirements ..... 31

**4 LIST OF MEASURING EQUIPMENT ..... 32**

**5 UNCERTAINTY OF EVALUATION ..... 33**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED SPURIOUS EMISSION**

**APPENDIX C. APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX D. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 2.12 dB at 11650.0 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.72 dB at 0.162 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Sonim Technologies, Inc.  
1825 S. Grant St., Suite 200., San Mateo, CA, 94402

## 1.2 Manufacturer

Sonim Technologies (Shenzhen) Limited  
2nd Floor, No. 2 Building Phase B, Daqian Industrial park, Longchang Road, 67 District, Baoan, Shenzhen, P. R. China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Phone
Brand Name	Sonim
Model Name	XP5800(PC2111)
FCC ID	WYPPC2100
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth v3.0 + EDR/ v 4.0 LE/ v 4.2 LE
IMEI Code	Conducted: 001080001908574 Conduction: 001080001912444, 001080001912451 Radiation:001080001912568, 001080001912576
HW Version	A
SW Version	5SA.0.0-00-7.1.2-00.25.01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	5745 MHz ~ 5825 MHz
<b>Maximum Output Power</b>	<b>&lt;5745 MHz ~ 5825 MHz&gt;</b> 802.11a : 16.52 dBm / 0.0449 W 802.11n HT20 : 15.57 dBm / 0.0361 W 802.11n HT40 : 14.26 dBm / 0.0267 W
<b>99% Occupied Bandwidth</b>	802.11a : 19.08 MHz 802.11n HT20 : 19.58 MHz 802.11n HT40 : 36.96 MHz
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)
<b>Antenna Type / Gain</b>	PIFA Antenna with gain 2.00 dBi



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No is CN5013.

<b>Test Site</b>	Sporton International (Kunshan) Inc.			
<b>Test Site Location</b>	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Test Firm Registration No.</b>
	TH01-KS	03CH02-KS	CO01-KS	630927

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04
- FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	-	-	165	5825

**Note:** The above Frequency and Channel in "\*" were 802.11n HT40.





## 2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable (Charging from Adapter)
<b>Remark:</b> For Radiated TCs, the tests were performed with Adapter and USB Cable	


Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159

## 2.3 Connection Diagram of Test System

<WLAN Tx Mode>

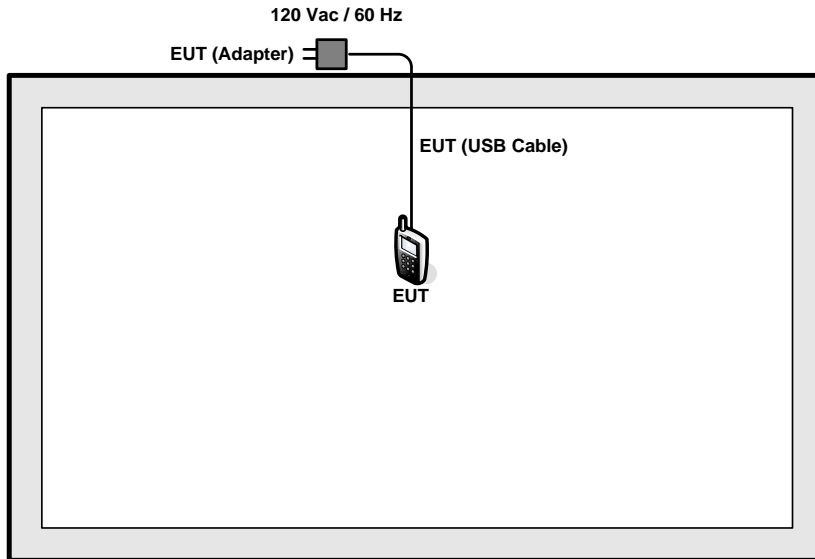

<AC Conducted Emission Mode>

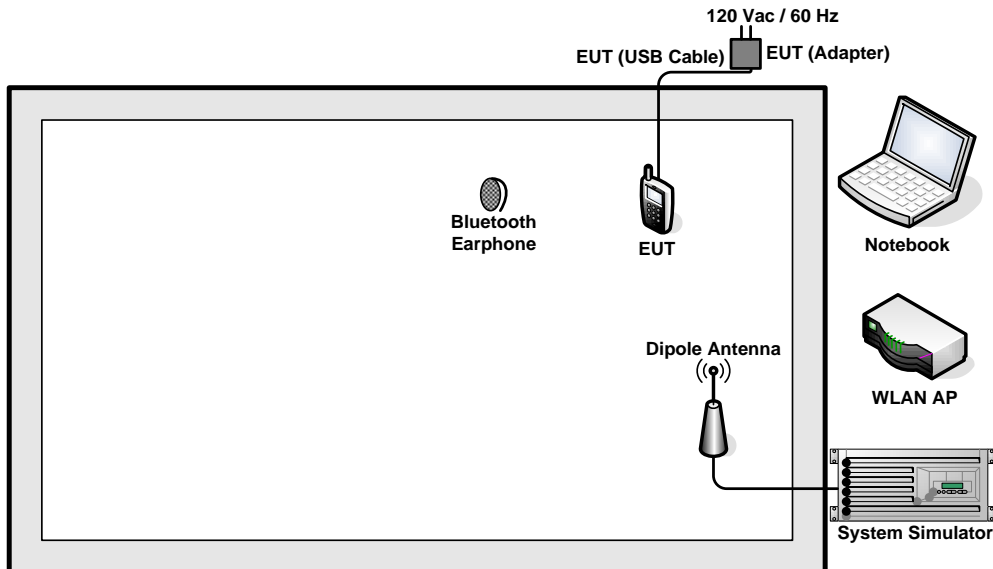



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 6.8 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} \\
 &= 6.8 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.  
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



##### 3.1.4 Test Setup

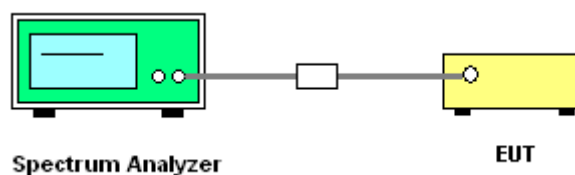




### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

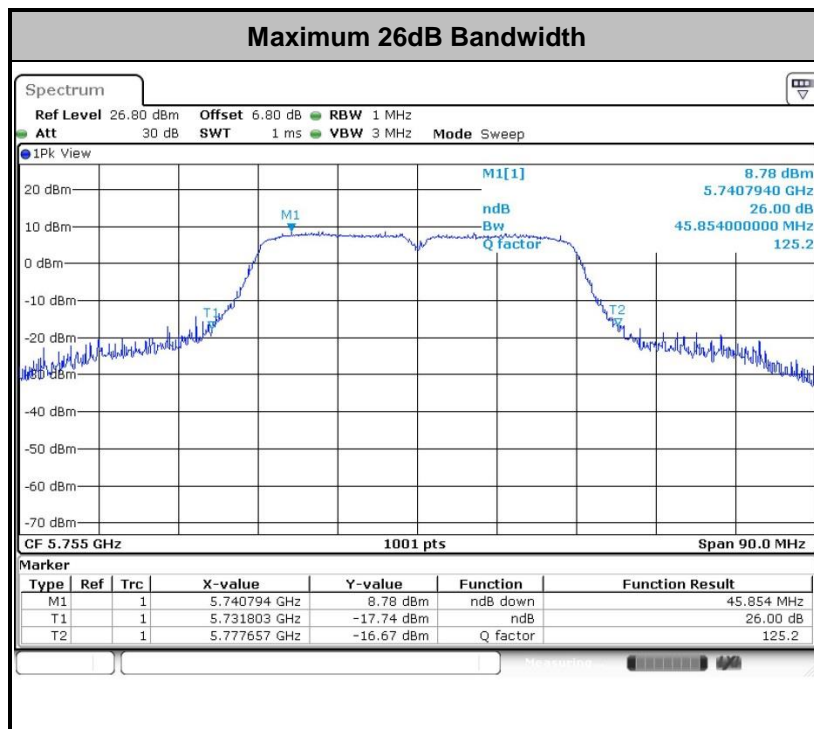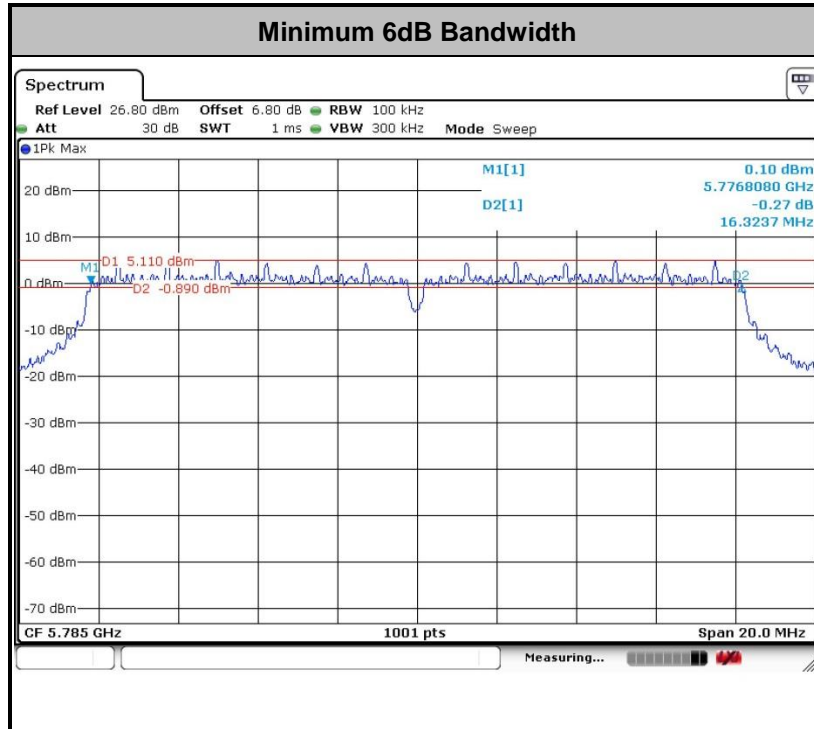

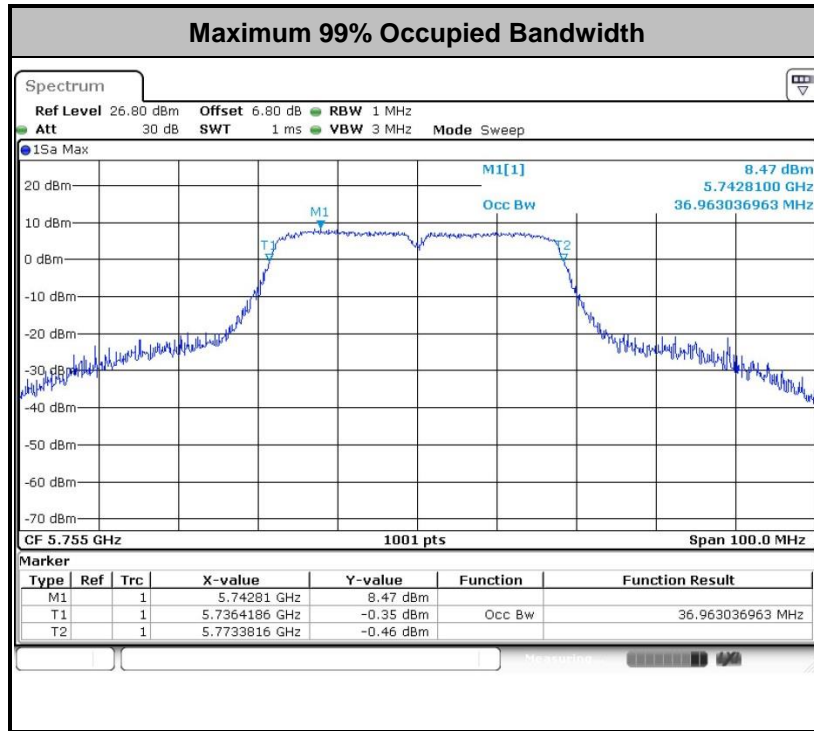

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

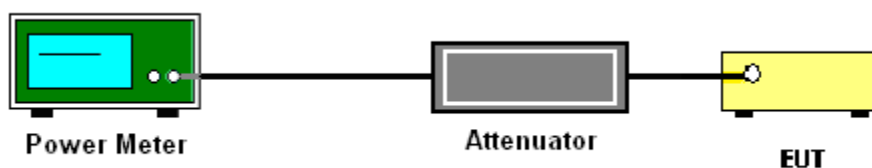

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
- Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.




1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add  $10 \log(N_{\text{ANT}})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{\text{ANT}})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{\text{ANT}})$  dB serves to apportion the emission limit among the  $N_{\text{ANT}}$  outputs so that each output is permitted to contribute no more than  $1/N_{\text{ANT}}^{\text{th}}$  of the PSD limit.


### 3.3.4 Test Setup

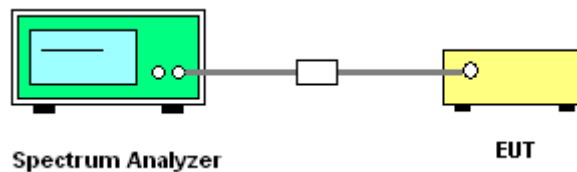



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

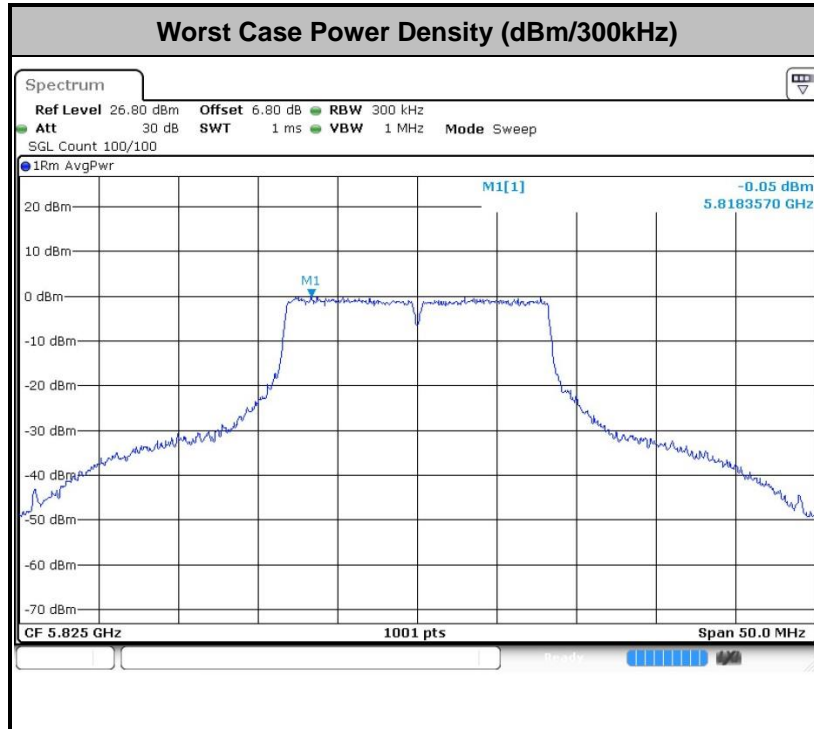



### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu V/m, \text{ where } P \text{ is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D01 v01r04 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.<sup>4</sup>

**Note 3:** An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

**Note 4:** Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).



### **3.4.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.4.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


**For radiated emissions below 30MHz**

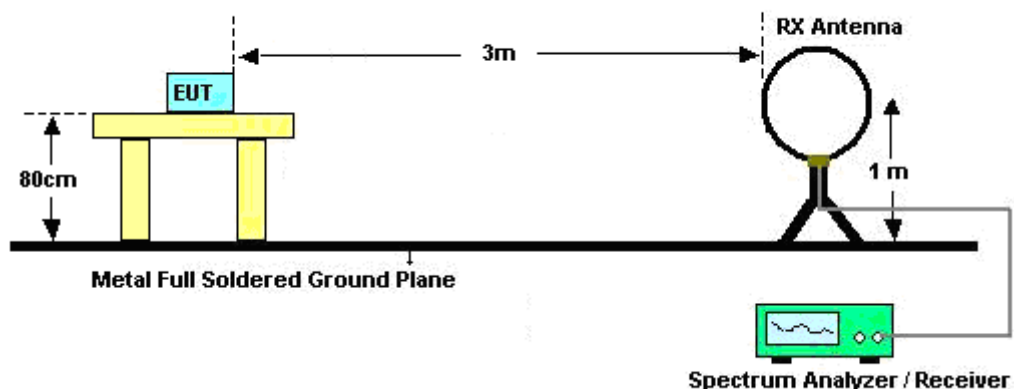

For radiated emissions from 30MHz to 1GHz

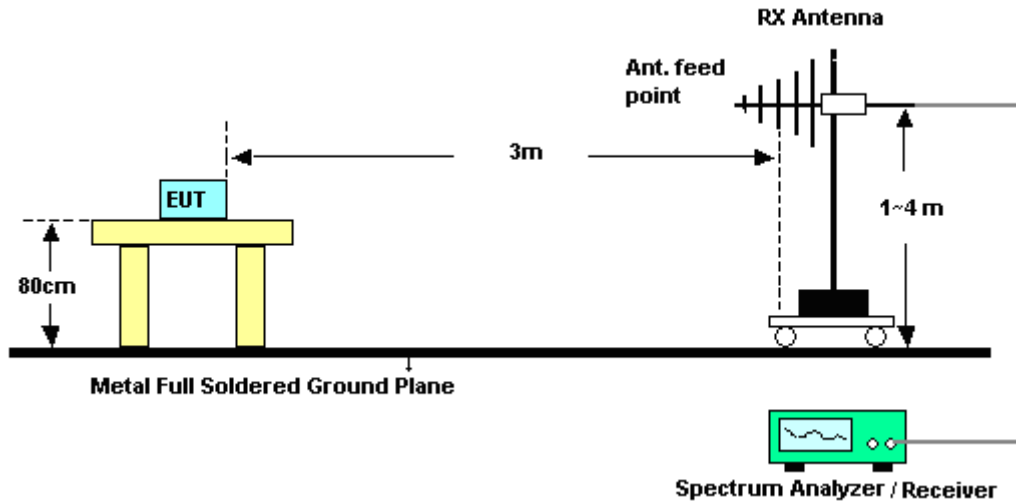

For radiated emissions above 1GHz

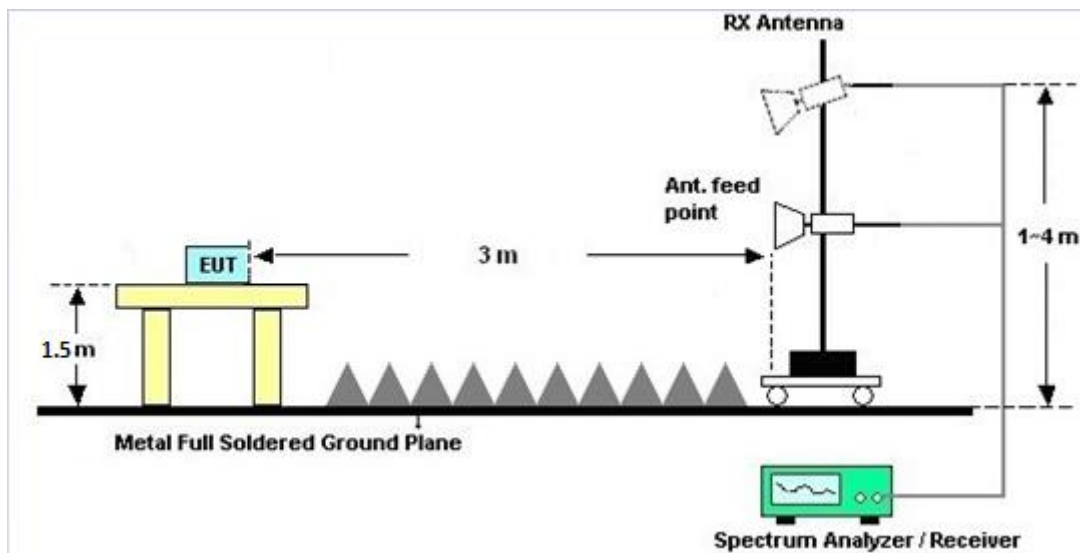



### **3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### **3.4.6 Test Result of Radiated Band Edges**

Please refer to Appendix B.

### **3.4.7 Duty Cycle**

Please refer to Appendix C.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix B.





### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.5.4 Test Setup

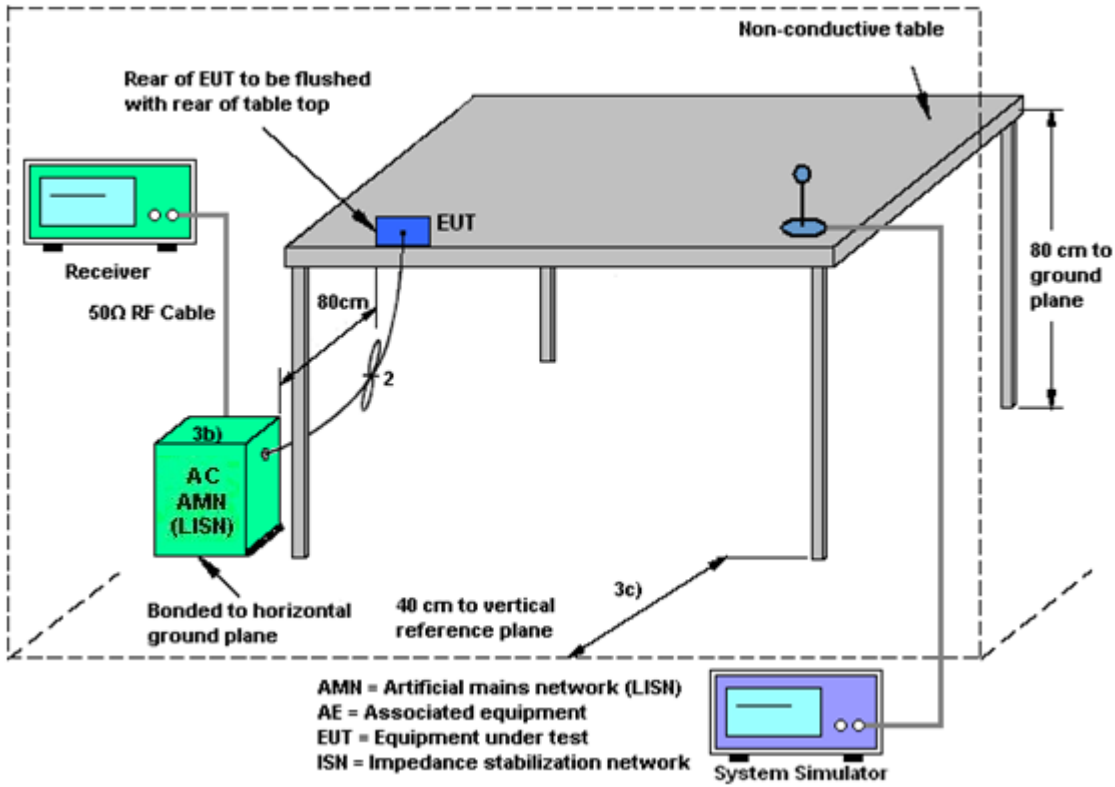



### 3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable (Charging from Adapter)		

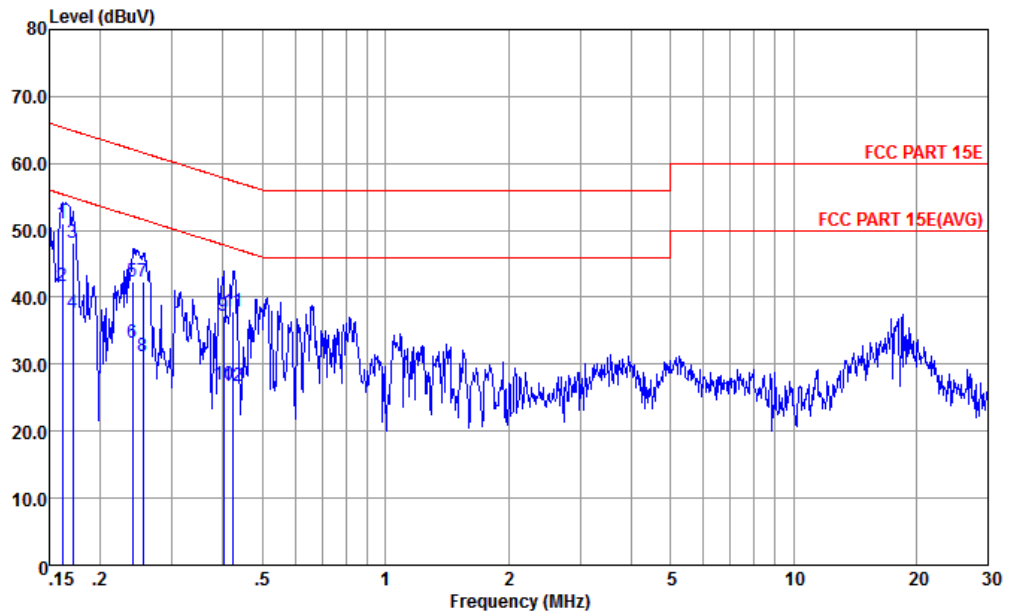


Site : CO01-KS  
 Condition : FCC PART 15E LISN-L-161017-060103 LINE

mode : Mode 1  
 : 001080001912444/001080001912451 #11

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	50.96	-14.42	65.38	39.90	0.48	10.58	QP
2 *	0.162	41.66	-13.72	55.38	30.60	0.48	10.58	Average
3	0.171	48.17	-16.73	64.90	37.20	0.42	10.55	QP
4	0.171	37.57	-17.33	54.90	26.60	0.42	10.55	Average
5	0.240	42.31	-19.77	62.08	31.60	0.27	10.44	QP
6	0.240	33.31	-18.77	52.08	22.60	0.27	10.44	Average
7	0.255	42.31	-19.29	61.60	31.60	0.27	10.44	QP
8	0.255	31.31	-20.29	51.60	20.60	0.27	10.44	Average
9	0.402	37.27	-20.54	57.81	26.60	0.27	10.40	QP
10	0.402	26.87	-20.94	47.81	16.20	0.27	10.40	Average
11	0.424	37.95	-19.42	57.37	27.30	0.27	10.38	QP
12	0.424	26.85	-20.52	47.37	16.20	0.27	10.38	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable (Charging from Adapter)		

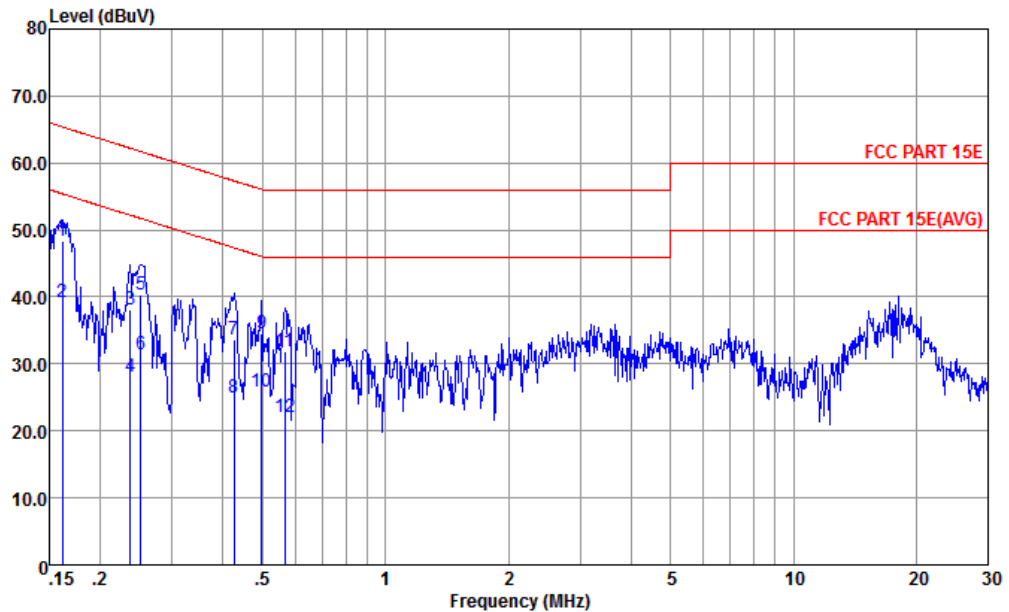

Site : CO01-KS  
 Condition : FCC PART 15E LISN-N-161017-060103 NEUTRAL

mode : Mode 1  
 : 001080001912444/001080001912451 #11

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	48.41	-16.97	65.38	37.49	0.34	10.58	QP
2 *	0.162	39.21	-16.17	55.38	28.29	0.34	10.58	Average
3	0.237	38.08	-24.14	62.22	27.30	0.34	10.44	QP
4	0.237	28.08	-24.14	52.22	17.30	0.34	10.44	Average
5	0.251	40.38	-21.35	61.73	29.60	0.34	10.44	QP
6	0.251	31.38	-20.35	51.73	20.60	0.34	10.44	Average
7	0.426	33.55	-23.78	57.33	22.80	0.37	10.38	QP
8	0.426	25.05	-22.28	47.33	14.30	0.37	10.38	Average
9	0.497	34.59	-21.46	56.05	23.90	0.38	10.31	QP
10	0.497	25.89	-20.16	46.05	15.20	0.38	10.31	Average
11	0.567	31.83	-24.17	56.00	21.20	0.38	10.25	QP
12	0.567	22.13	-23.87	46.00	11.50	0.38	10.25	Average

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

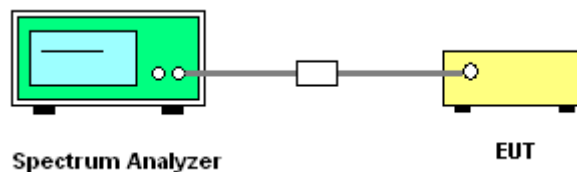

### 3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.8.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.8.3 Antenna Gain**

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Oct. 03, 2017	Aug. 07, 2018	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Oct. 03, 2017	Jan. 19, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Oct. 03, 2017	Jan. 19, 2018	Conducted (TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	HZ01401144 0	-40~+150°C 20%~95%RH	Apr.18, 2017	Oct. 03, 2017	Apr. 17, 2018	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 08, 2017	Oct. 03, 2017	Aug. 07, 2018	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz, MAX 30dB	Apr. 18, 2017	Oct. 03, 2017	Apr. 17, 2018	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Oct. 03, 2017	Nov.22, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~2GHz	Jan. 22, 2017	Oct. 03, 2017	Jan. 21, 2018	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	Oct. 03, 2017	Oct. 21, 2017	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Oct. 03, 2017	Feb. 14, 2018	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 07, 2017	Oct. 03, 2017	Aug. 06, 2018	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	100MHz~18GHz	Apr. 18, 2017	Oct. 03, 2017	Apr. 17, 2018	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz	Oct. 13, 2016	Oct. 03, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-H G	1887435	18GHz~40GHz	Oct. 13, 2016	Oct. 03, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	6160100024 73	N/A	NCR	Oct. 03, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 03, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 03, 2017	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 20, 2017	Sep. 28, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Sep. 28, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Sep. 28, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Sep. 28, 2017	Oct. 12, 2017	Conduction (CO01-KS)

NCR: No Calibrate Requirement





## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
-------------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2dB
-------------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.7dB
-------------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.3dB
-------------------------------------------------------------------------	-------



## Appendix A. Conducted Test Results

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2017/10/03	Relative Humidity:	51~55	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	19.08	25.08	16.34	0.5	Pass
11a	6Mbps	1	157	5785	18.63	25.72	16.32	0.5	Pass
11a	6Mbps	1	165	5825	18.68	24.58	16.34	0.5	Pass
HT20	MCS 0	1	149	5745	19.58	24.03	17.58	0.5	Pass
HT20	MCS 0	1	157	5785	19.38	24.08	17.56	0.5	Pass
HT20	MCS 0	1	165	5825	19.28	24.08	17.58	0.5	Pass
HT40	MCS 0	1	151	5755	36.96	45.85	35.60	0.5	Pass
HT40	MCS 0	1	159	5795	36.76	45.32	35.32	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.58	16.05	30.00	2.00		Pass
11a	6Mbps	1	157	5785	0.58	16.52	30.00	2.00		Pass
11a	6Mbps	1	165	5825	0.58	16.50	30.00	2.00		Pass
HT20	MCS 0	1	149	5745	0.62	15.04	30.00	2.00		Pass
HT20	MCS 0	1	157	5785	0.62	15.57	30.00	2.00		Pass
HT20	MCS 0	1	165	5825	0.62	15.54	30.00	2.00		Pass
HT40	MCS 0	1	151	5755	0.64	14.15	30.00	2.00		Pass
HT40	MCS 0	1	159	5795	0.64	14.26	30.00	2.00		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.58	2.22	1.80	30.00	2.00	Pass
11a	6Mbps	1	157	5785	0.58	2.22	2.41	30.00	2.00	Pass
11a	6Mbps	1	165	5825	0.58	2.22	2.75	30.00	2.00	Pass
HT20	MCS 0	1	149	5745	0.62	2.22	1.07	30.00	2.00	Pass
HT20	MCS 0	1	157	5785	0.62	2.22	1.25	30.00	2.00	Pass
HT20	MCS 0	1	165	5825	0.62	2.22	1.57	30.00	2.00	Pass
HT40	MCS 0	1	151	5755	0.64	2.22	-2.46	30.00	2.00	Pass
HT40	MCS 0	1	159	5795	0.64	2.22	-2.17	30.00	2.00	Pass

**TEST RESULTS DATA**  
**Frequency Stability**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6M bps	1	149	5745	5744.950	-0.050	-8.70	50	3.7	
11a	6M bps	1	149	5745	5745.025	0.025	4.35	-30	3.7	
11a	6M bps	1	149	5745	5744.950	-0.050	-8.70	20	4.2	
11a	6M bps	1	149	5745	5744.950	-0.050	-8.70	20	3.5	
11a	6M bps	1	149	5745	5744.950	-0.050	-8.70	20	3.7	



# Appendix B. Radiated Spurious Emission

## Band 4 - 5725~5850MHz WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 149 5745MHz		5644	52.87	-15.43	68.3	45.56	34.8	8.05	35.54	300	200	P	H
		5691.6	56.01	-43.1	99.11	49.24	34.75	8.1	36.08	300	200	P	H
		5719.2	63.78	-46.9	110.68	57.21	34.72	8.19	36.34	300	200	P	H
		5723.6	73.61	-45.5	119.11	67.04	34.72	8.19	36.34	300	200	P	H
	*	5740	109.02	-	-	102.69	34.71	8.23	36.61	300	200	P	H
	*	5740	102.06	-	-	95.73	34.71	8.23	36.61	300	200	A	H
		5620.8	52.82	-15.48	68.3	45.47	34.81	8.01	35.47	126	4	P	V
		5692.8	54.26	-45.73	99.99	47.45	34.75	8.14	36.08	126	4	P	V
		5716.4	60.06	-49.83	109.89	53.47	34.74	8.19	36.34	126	4	P	V
		5723.2	75.67	-42.53	118.2	69.1	34.72	8.19	36.34	126	4	P	V
	*	5742	106.24	-	-	99.91	34.71	8.23	36.61	126	4	P	V
	*	5742	98.8	-	-	92.47	34.71	8.23	36.61	126	4	A	V





WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5600.8	52.29	-16.01	68.3	44.89	34.82	7.97	35.39	306	205	P	H
		5685.6	54.2	-40.48	94.68	47.43	34.75	8.1	36.08	306	205	P	H
		5702.8	51.82	-54.27	106.09	45.02	34.74	8.14	36.08	306	205	P	H
		5722.4	50.9	-65.47	116.37	44.33	34.72	8.19	36.34	306	205	P	H
	*	5790	108.41	-	-	102.58	34.66	8.32	37.15	306	205	P	H
	*	5790	101.18	-	-	95.35	34.66	8.32	37.15	306	205	A	H
		5854	49.51	-63.67	113.18	44.27	34.6	8.32	37.68	306	205	P	H
		5859.6	50.89	-58.72	109.61	45.63	34.6	8.32	37.66	306	205	P	H
		5918	49.76	-23.7	73.46	44.44	34.61	8.33	37.62	306	205	P	H
		5989.2	49.66	-18.64	68.3	44.25	34.63	8.34	37.56	306	205	P	H
		5644	52.8	-15.5	68.3	45.49	34.8	8.05	35.54	124	4	P	V
		5685.6	52.97	-41.71	94.68	46.2	34.75	8.1	36.08	124	4	P	V
		5707.6	52.93	-54.5	107.43	46.39	34.74	8.14	36.34	124	4	P	V
		5724	52.42	-67.6	120.02	45.85	34.72	8.19	36.34	124	4	P	V
	*	5778	104.9	-	-	98.83	34.68	8.27	36.88	124	4	P	V
	*	5778	97.73	-	-	91.66	34.68	8.27	36.88	124	4	A	V
		5853.2	48.2	-66.8	115	42.94	34.62	8.32	37.68	124	4	P	V
		5873.6	48.76	-56.93	105.69	43.49	34.6	8.33	37.66	124	4	P	V
		5894.4	49.61	-41.3	90.91	44.31	34.61	8.33	37.64	124	4	P	V
		5978	49.44	-18.86	68.3	44.05	34.63	8.34	37.58	124	4	P	V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 165 5825MHz		5852.4	62.76	-54.07	116.83	57.5	34.62	8.32	37.68	269	203	P	H
		5857.6	60.46	-49.71	110.17	55.22	34.6	8.32	37.68	269	203	P	H
		5876.8	53.54	-50.42	103.96	48.27	34.6	8.33	37.66	269	203	P	H
		5986.4	51.69	-16.61	68.3	46.28	34.63	8.34	37.56	269	203	P	H
	*	5822	108.59	-	-	103.05	34.63	8.32	37.41	269	203	P	H
	*	5822	101.14	-	-	95.6	34.63	8.32	37.41	269	203	A	H
		5852	58.82	-58.92	117.74	53.56	34.62	8.32	37.68	300	184	P	V
		5856.8	54.4	-56	110.4	49.16	34.6	8.32	37.68	300	184	P	V
		5878.8	49.97	-52.51	102.48	44.7	34.6	8.33	37.66	300	184	P	V
		5931.2	49.58	-18.72	68.3	44.25	34.62	8.33	37.62	300	184	P	V
	*	5822	103.19	-	-	97.65	34.63	8.32	37.41	300	184	P	V
	*	5822	96.09	-	-	90.55	34.63	8.32	37.41	300	184	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a		11490	50.87	-23.13	74	64.99	39.29	11.94	65.35	100	0	P	H
CH 149		11490	54.36	-19.64	74	68.48	39.29	11.94	65.35	100	248	P	V
5745MHz	!	11490	51.34	-2.66	54	65.46	39.29	11.94	65.35	100	248	A	V
802.11a		11570	50.09	-23.91	74	64.24	39.34	11.95	65.44	300	360	P	H
CH 157		11570	54.64	-19.36	74	68.79	39.34	11.95	65.44	100	250	P	V
5785MHz	!	11570	51.28	-2.72	54	65.43	39.34	11.95	65.44	100	250	A	V
802.11a		11650	48.72	-25.28	74	62.91	39.38	11.97	65.54	300	360	P	H
CH 165		11650	53.07	-20.93	74	67.26	39.38	11.97	65.54	100	252	P	V
5825MHz	!	11650	50.75	-3.25	54	64.94	39.38	11.97	65.54	100	252	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5606 to 5740 MHz with various level and limit values.



WiFi Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5635.2	53.57	-14.73	68.3	46.3	34.8	8.01	35.54	311	207	P	H
		5693.2	52.57	-47.72	100.29	45.76	34.75	8.14	36.08	311	207	P	H
		5717.6	52.2	-58.03	110.23	45.63	34.72	8.19	36.34	311	207	P	H
		5723.2	52.64	-65.56	118.2	46.07	34.72	8.19	36.34	311	207	P	H
	*	5782	108.5	-	-	102.7	34.68	8.27	37.15	311	207	P	H
	*	5782	101.1	-	-	95.3	34.68	8.27	37.15	311	207	A	H
		5851.6	50.38	-68.27	118.65	45.12	34.62	8.32	37.68	311	207	P	H
		5874	49.79	-55.79	105.58	44.52	34.6	8.33	37.66	311	207	P	H
		5876	50.5	-54.06	104.56	45.23	34.6	8.33	37.66	311	207	P	H
		5994	50.33	-17.97	68.3	44.92	34.63	8.34	37.56	311	207	P	H
802.11n HT20 CH 157		5609.6	52.83	-15.47	68.3	45.51	34.82	7.97	35.47	120	4	P	V
5785MHz		5687.6	52.93	-43.22	96.15	46.16	34.75	8.1	36.08	120	4	P	V
		5703.2	52.27	-53.93	106.2	45.47	34.74	8.14	36.08	120	4	P	V
		5723.2	51.15	-67.05	118.2	44.58	34.72	8.19	36.34	120	4	P	V
	*	5778	102.94	-	-	96.87	34.68	8.27	36.88	120	4	P	V
	*	5778	95.77	-	-	89.7	34.68	8.27	36.88	120	4	A	V
		5852	49.93	-67.81	117.74	44.67	34.62	8.32	37.68	120	4	P	V
		5859.2	50.03	-59.69	109.72	44.77	34.6	8.32	37.66	120	4	P	V
		5876	51.03	-53.53	104.56	45.76	34.6	8.33	37.66	120	4	P	V
		5982.8	51.05	-17.25	68.3	45.66	34.63	8.34	37.58	120	4	P	V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 165 5825MHz	*	5820	107.33	-	-	101.79	34.63	8.32	37.41	305	206	P	H
	*	5820	100.08	-	-	94.54	34.63	8.32	37.41	305	206	A	H
		5850.8	62.21	-58.27	120.48	56.95	34.62	8.32	37.68	305	206	P	H
		5858	57.12	-52.94	110.06	51.86	34.6	8.32	37.66	305	206	P	H
		5876.4	51.97	-52.29	104.26	46.7	34.6	8.33	37.66	305	206	P	H
		5948	50.1	-18.2	68.3	44.74	34.62	8.34	37.6	305	206	P	H
	*	5822	102.05	-	-	96.51	34.63	8.32	37.41	119	4	P	V
	*	5822	94.63	-	-	89.09	34.63	8.32	37.41	119	4	A	V
		5850.01	57.25	-65.03	122.28	51.99	34.62	8.32	37.68	119	4	P	V
		5856	53.13	-57.49	110.62	47.89	34.6	8.32	37.68	119	4	P	V
		5877.6	51.43	-51.94	103.37	46.16	34.6	8.33	37.66	119	4	P	V
		5993.2	51.13	-17.17	68.3	45.72	34.63	8.34	37.56	119	4	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for channels 149, 157, and 165 at various frequencies (11490, 11570, 11650 MHz).



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements from 5607.6 to 5962.4 MHz.





WiFi Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 159 5795MHz		5628.8	53.47	-14.83	68.3	46.19	34.81	8.01	35.54	295	199	P	H
		5693.2	54.14	-46.15	100.29	47.33	34.75	8.14	36.08	295	199	P	H
		5719.99	52.07	-58.83	110.9	45.5	34.72	8.19	36.34	295	199	P	H
		5724.8	52.8	-69.04	121.84	46.23	34.72	8.19	36.34	295	199	P	H
	*	5792	104.14	-	-	98.31	34.66	8.32	37.15	295	199	P	H
	*	5792	96.83	-	-	91	34.66	8.32	37.15	295	199	A	H
		5850.01	55.49	-66.79	122.28	50.23	34.62	8.32	37.68	295	199	P	H
		5866.8	51.51	-56.08	107.59	46.24	34.6	8.33	37.66	295	199	P	H
		5919.6	50.8	-21.48	72.28	45.48	34.61	8.33	37.62	295	199	P	H
		5988	50.85	-17.45	68.3	45.44	34.63	8.34	37.56	295	199	P	H
		5610.4	53.2	-15.1	68.3	45.88	34.82	7.97	35.47	133	3	P	V
		5688.8	54.16	-42.88	97.04	47.39	34.75	8.1	36.08	133	3	P	V
		5708.4	54.08	-53.57	107.65	47.54	34.74	8.14	36.34	133	3	P	V
		5720	50.26	-60.64	110.9	43.69	34.72	8.19	36.34	133	3	P	V
	*	5784	101	-	-	95.2	34.68	8.27	37.15	133	3	P	V
	*	5784	93.36	-	-	87.56	34.68	8.27	37.15	133	3	A	V
		5851.6	48.96	-69.69	118.65	43.7	34.62	8.32	37.68	133	3	P	V
		5855.6	50.86	-59.87	110.73	45.62	34.6	8.32	37.68	133	3	P	V
	5884.8	49.78	-48.24	98.02	44.49	34.6	8.33	37.64	133	3	P	V	
	5969.2	50.89	-17.41	68.3	45.51	34.62	8.34	37.58	133	3	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151		11510	49.36	-24.64	74	63.45	39.3	11.95	65.34	300	360	P	H
		11510	53.76	-20.24	74	67.85	39.3	11.95	65.34	100	254	P	V
	!	11510	50.77	-3.23	54	64.86	39.3	11.95	65.34	100	254	A	V
802.11n HT40 CH 159		11590	49.16	-24.84	74	63.32	39.35	11.96	65.47	100	360	P	H
		11590	54.59	-19.41	74	68.75	39.35	11.96	65.47	100	253	P	V
	!	11590	51.21	-2.79	54	65.37	39.35	11.96	65.47	100	253	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
5GHz 802.11n HT20 LF		30	33.43	-6.57	40	39.29	25.6	0.57	32.03	120	70	P	H
		63.95	30.88	-9.12	40	49.25	12.9	0.83	32.1	-	-	P	H
		190.05	33.15	-10.35	43.5	47.3	16.14	1.41	31.7	-	-	P	H
		201.69	32.6	-10.9	43.5	46.97	15.84	1.46	31.67	-	-	P	H
		407.33	26.62	-19.38	46	29.69	25.52	2.09	30.68	-	-	P	H
		734.22	27.91	-18.09	46	27.24	26.6	2.8	28.73	-	-	P	H
	!	36.79	36.51	-3.49	40	43.41	24.5	0.64	32.04	100	120	P	V
	!	39.7	36.35	-3.65	40	45.65	22.1	0.64	32.04	-	-	P	V
		66.86	27.43	-12.57	40	45.79	12.85	0.85	32.06	-	-	P	V
		186.17	28.04	-15.46	43.5	42.09	16.28	1.39	31.72	-	-	P	V
		399.57	26.75	-19.25	46	29.68	25.7	2.08	30.71	-	-	P	V
	617.82	26.64	-19.36	46	28.65	24.88	2.65	29.54	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is not under limit 6dB
P/A	<b>P</b> eak or <b>A</b> verage
H/V	<b>H</b> orizontal or <b>V</b> ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**


- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

### Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	87.50	1.370	0.730	1kHz
802.11n HT20	86.70	1.275	0.784	1kHz
802.11n HT40	86.29	1.232	0.812	1kHz

#### 802.11a

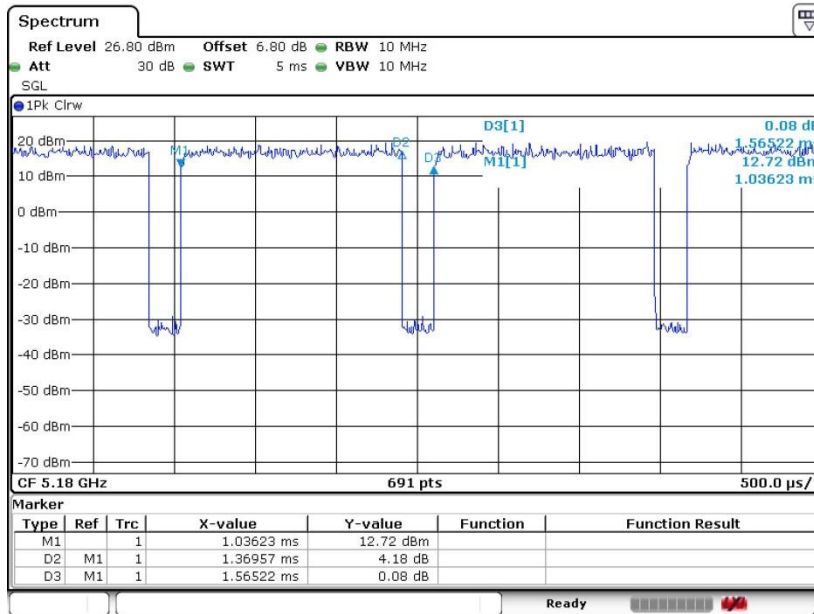



802.11n HT20

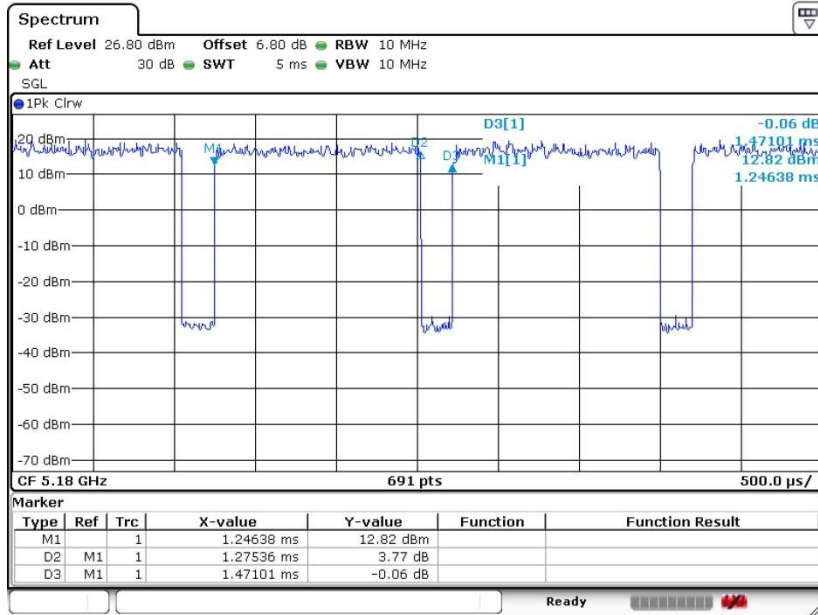



802.11n HT40

