**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>**TEST REPORT**

Test report no.: 1-9508/15-01-02-B

Deutsche
Akkreditierungsstelle
D-PL-12076-01-00**Testing laboratory****CETECOM ICT Services GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: ict@cetecom.com**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-00

Applicant**RSI Video Technologies**

Siège Social -Headquarters

25 rue Jacobi-Netter

67200 Strasbourg / FRANCE

Phone: +33 3 90 20 66 96

Fax: +33 3 88 29 04 00

Contact: Thierry Petri

e-mail: thierry.petri@rsivideotech.com

Phone: +33 3 90 20 66 96

Manufacturer**RSI Video Technologies**

Siège Social -Headquarters

25 rue Jacobi-Netter

67200 Strasbourg / FRANCE

Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications Radio Standards Specification - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
RSS - 210 Issue 8 Amendment 1	RSS-210, Amendment 1 — Licence-Exempt, Low-Power Radio Apparatus Operating in the Television Bands (February 2015)

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Indoor Siren
Product marketing name (PMN):	SE601w
FCC ID:	X46SE01
IC:	8816A-SE01
Frequency:	902 MHz to 928 MHz (Lowest channel 904.5 MHz; highest channel 926.1 MHz)
Technology tested:	Proprietary FHSS system
Antenna:	Integrated antenna
Power supply:	6.0 V DC by 4 x Alkaline LR20 battery, D size
Temperature range:	-10°C to +40°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:Tobias Wittenmeier
Radio Communications & EMC**Test performed:**Stefan Bös
Radio Communications & EMC

1 Table of contents

1 Table of contents2

2 General information3

 2.1 Notes and disclaimer3

 2.2 Application details.....3

3 Test standard/s3

4 Test environment.....4

5 Test item4

 5.1 Additional information4

6 Test laboratories sub-contracted4

7 Description of the test setup5

 7.1 Radiated measurements chamber F.....5

 7.2 Radiated measurements chamber C6

 7.3 Conducted measurements7

8 Summary of measurement results8

9 Additional comments9

10 Measurement results10

 10.1 Antenna gain10

 10.2 Carrier Frequency Separation11

 10.3 Number of Hopping Channels13

 10.4 Average Time of Occupancy.....15

 10.5 99% Bandwidth17

 10.6 Maximum Output Power Radiated20

 10.7 Maximum Output Power Conducted21

 10.8 Band-edge Compliance of conducted and radiated emissions24

 10.9 Spurious Emissions Conducted (Transmitter)25

 10.10 Spurious Emissions Radiated < 30 MHz.....29

 10.11 Spurious Emissions Radiated (Transmitter) > 30 MHz31

 10.12 RX spurious emissions radiated36

11 Test equipment and ancillaries used for tests39

12 Observations39

Annex A Document history40

Annex B Further information.....40

Annex C Accreditation Certificate41

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-9508/15-01-02 and dated 2015-04-14

2.2 Application details

Date of receipt of order:	2015-03-09
Date of receipt of test item:	2015-03-24
Start of test:	2015-03-24
End of test:	2015-03-27
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 8	01.12.2010	Spectrum Management and Telecommunications Radio Standards Specification - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
RSS - 210 Issue 8 Amendment 1	05.02.2015	RSS-210, Amendment 1 — Licence-Exempt, Low-Power Radio Apparatus Operating in the Television Bands (February 2015)

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+40 °C during high temperature tests
	T_{min}	-10 °C during low temperature tests
Relative humidity content:		57 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	6.0 V DC by 4 x Alkaline LR20 battery, D size
	V_{max}	8.0 V
	V_{min}	4.2 V

5 Test item

Kind of test item	:	Indoor Siren
Product marketing name (PMN):		SE601w
HVIN	:	SE601w
S/N serial number	:	Cond.: 01081015A13A0104 Rad.: 01081015A13A0101, 01081015A13A0102
HW hardware status	:	5CA1258D-0d
SW software status	:	V.05.42.93.63
Frequency band	:	902 MHz to 928 MHz (Lowest channel 904.5 MHz; highest channel 926.1 MHz)
Type of radio transmission	:	FHSS
Use of frequency spectrum	:	
Type of modulation	:	GFSK
Number of channels	:	25
Antenna	:	Integrated antenna
Power supply	:	6.0 V DC by 4 x Alkaline LR20 battery, D size
Temperature range	:	-10°C to +40°C

5.1 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report: 1-9508/15-01-01_AnnexA
1-9508/15-01-01_AnnexB
1-9508/15-01-01_AnnexD


6 Test laboratories sub-contracted

None

7 Description of the test setup

7.1 Radiated measurements chamber F


The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

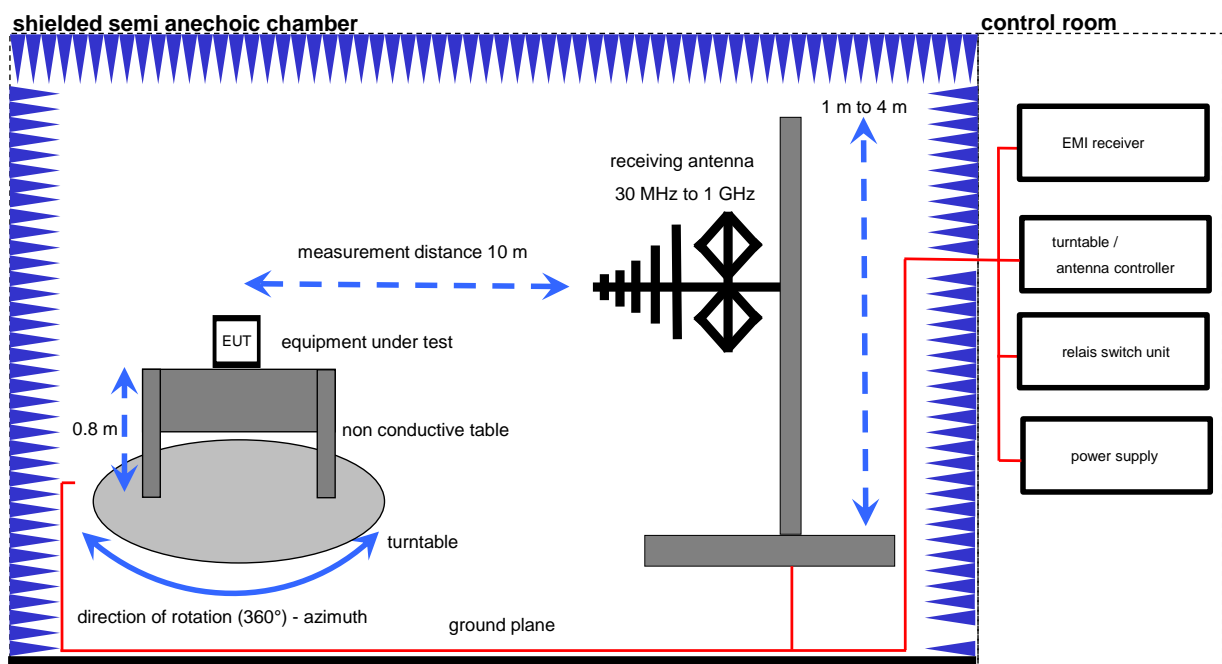

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Software	EMC32 V. 9.12.05	R&S	-/-	-/-
Switch-Unit	3488A	HP Meßtechnik	2719A14505	30000368
DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	30000580
EMI Test Receiver	ESCI 3	R&S	100083	300003312
Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379
Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745
Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746
Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747
TRILOG Broadband Test- Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787


7.2 Radiated measurements chamber C

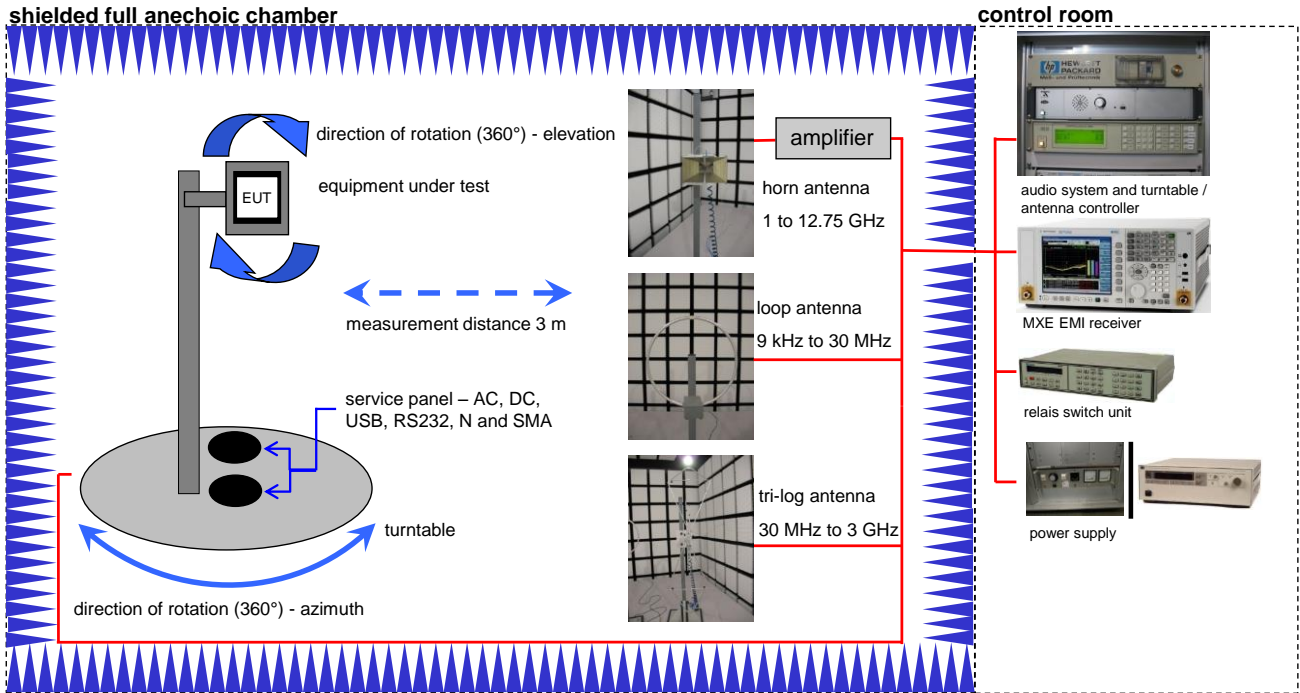

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854
Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032
Active Loop Antenna	6502	EMCO	8905-2342	300000256
Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997
Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143

7.3 Conducted measurements

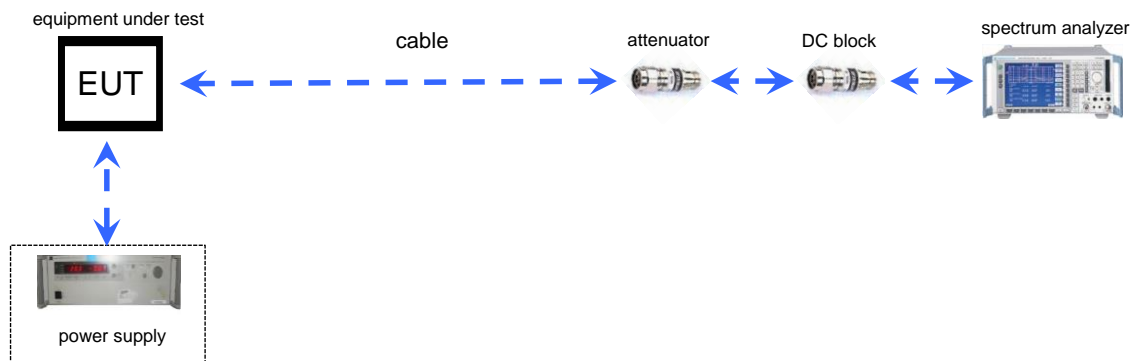

Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517

8 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	See table!	2015-05-19	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna Gain	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1) RSS 210 / A8.1(b)	Carrier Frequency Separation	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1) RSS 210 / A8.1(d)	Number of Hopping channels	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1) (iii) RSS 210 / A8.3(1)	Average Time of Occupancy (Dwell Time)	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1) RSS 210 / A8.2(a)	20dB Bandwidth	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1) RSS-210 / A8.4(2)	Maximum Output Power Radiated	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1) RSS-210 / A8.4(2)	Maximum Output Power Conducted	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) §15.205 RSS-210 / A8.5	Band-edge Compliance	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX Spurious Emission Conducted	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX Spurious Emission Radiated < 30 MHz	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX Spurious Emission Radiated > 30 MHz	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen	RX Spurious Emissions Radiated	Nominal	Nominal	Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

9 Additional comments

Reference documents: Customer Questionnaire 2015-03-04

Special test descriptions: None

Configuration descriptions: None

Test mode: Special software is used.
EUT is transmitting pseudo random data by itself

10 Measurement results

10.1 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	5 MHz
Trace-Mode:	Max hold

Limits:

FCC	IC
Antenna Gain	
6 dBi	

	Low channel 904.5 MHz	Middle channel 915.3 MHz	High channel 926.1 MHz
Conducted power [dBm]	19.02	19.12	19.11
Radiated power [dBm]	19.50	19.60	19.10
Gain [dBi] Calculated	0.48	0.48	-0.01

Verdict: **Complies**

10.2 Carrier Frequency Separation

Description:

Measurement of the carrier frequency separation of a hopping system. The carrier frequency separation is constant for all modulation-modes.

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	60 s
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	2 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
Carrier Frequency Separation	
Minimum 25 kHz or two-thirds of the 20 dB bandwidth of the hopping system whichever is greater.	

Plots:

Plot 1:

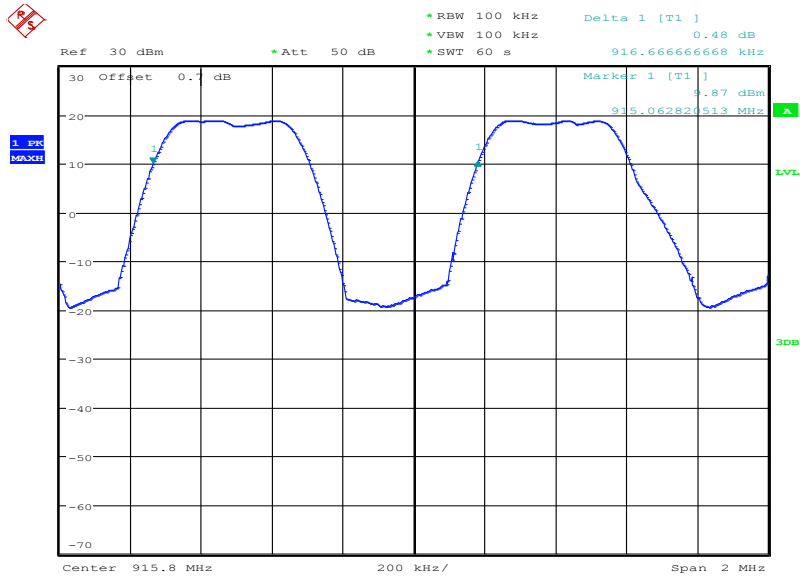

Date: 26.MAR.2015 15:18:29

Result: The channel separation is: 916.7 kHz

Verdict: **Complies**

10.3 Number of Hopping Channels

Description:

Measurement of the total number of used hopping channels. The number of hopping channels is constant for all modulation-modes.

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	50 s
Video bandwidth:	10 kHz
Resolution bandwidth:	10 kHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
Number of hopping channels	
For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.	

Plots:

Plot 1:

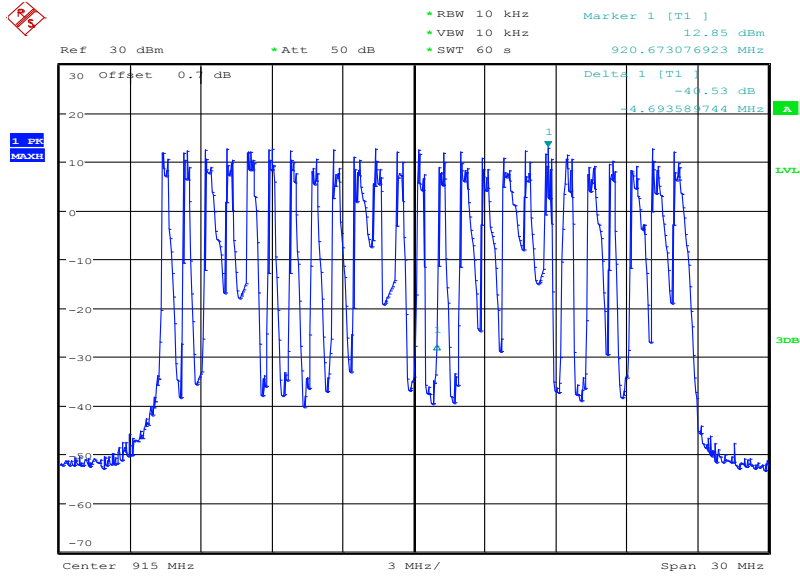

Date: 26.MAR.2015 15:20:40


Result: The number of hopping channels is: 25

Verdict: **Complies**

10.4 Average Time of Occupancy


Plots:

Plot 1: Time slot length = 2.178 ms

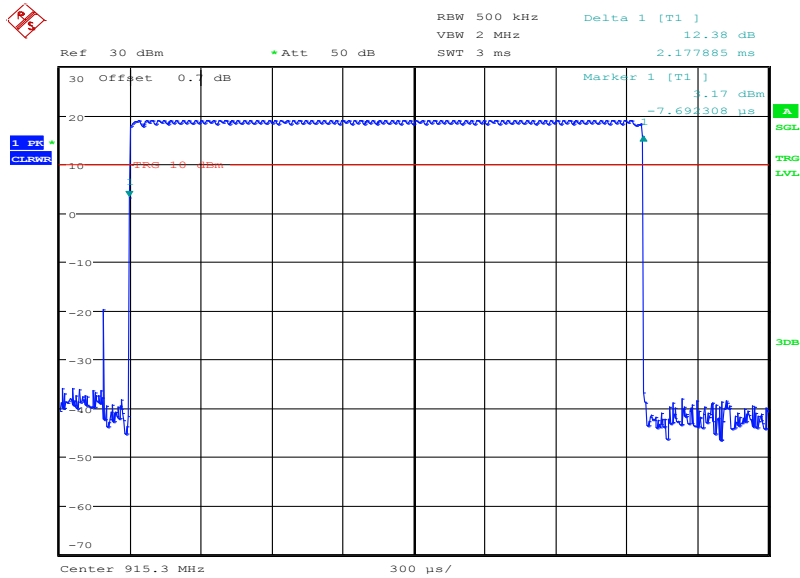

Date: 26.MAR.2015 15:25:55

Plot 2: hops / channel @ 1s = 18

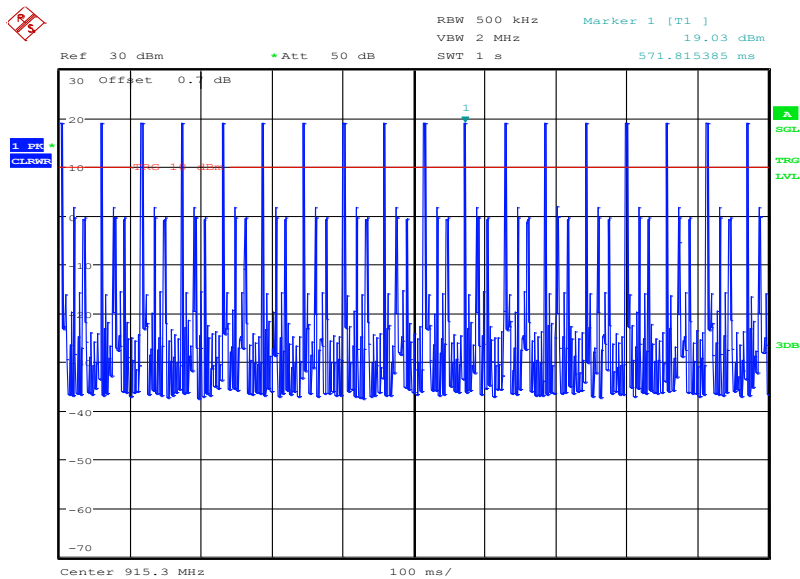

Date: 26.MAR.2015 15:26:58

Result: The time slot length is = 2.178 ms
 Number of hops / channel @ 1s = 18

Within 10 s period, the average time of occupancy = $10 \text{ s} * 18 * 2.178 \text{ ms}$

→ The average time of occupancy = 392.04 ms

Limits:

FCC	IC
Average time of occupancy	
<p>For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within 10 second period.</p>	

Verdict: **Complies**

10.5 99% Bandwidth

Description:

Measurement of the 99% of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	30 kHz
Resolution bandwidth:	10 kHz
Span:	See plots
Trace-Mode:	Max Hold

Result:

Test Conditions		99% BANDWIDTH [kHz]		
		904.5 MHz	915.3 MHz	926.1 MHz
T_{nom}	V_{nom}	306.4	303.8	298.7
Measurement uncertainty		± 10 kHz		


Limits:

FCC	IC
99% Bandwidth	
The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.	

Verdict: **Complies**


Plots:

Plot 1: Low channel

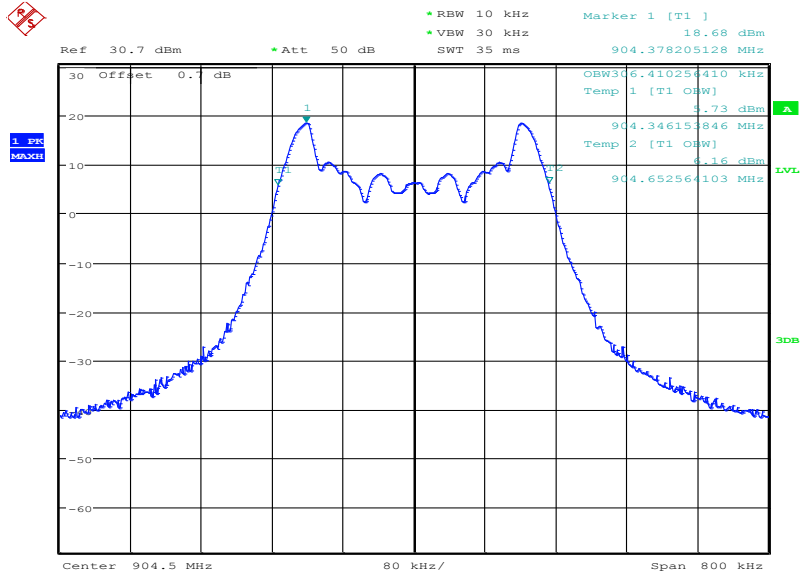


Date: 26.MAR.2015 13:11:16

Plot 2: Middle channel

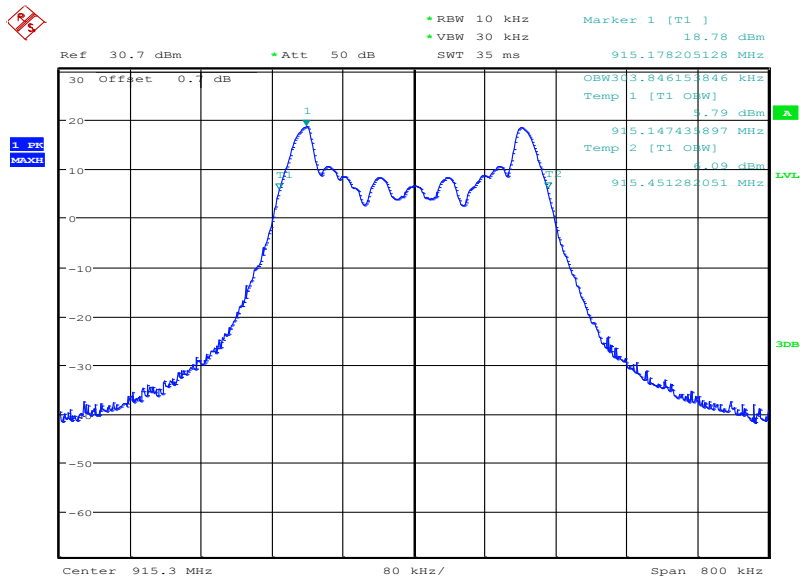

Date: 26.MAR.2015 13:15:44

Plot 3: High channel

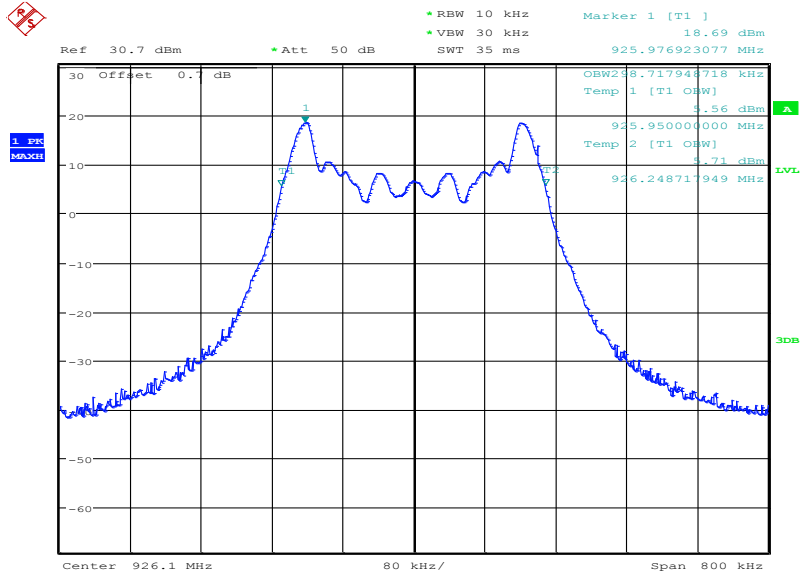

Date: 26.MAR.2015 13:17:36

10.6 Maximum Output Power Radiated

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	1 MHz
Span:	5 MHz
Trace-Mode:	Max Hold

Result:

Test Conditions		ERP [dBm]		
		904.5 MHz	915.3 MHz	926.1 MHz
T_{nom}	V_{nom}	19.50	19.60	19.10
Measurement uncertainty		± 3dB		

Limits:

FCC	IC
ERP	
For frequency hopping systems operating in the 902–928 MHz band: 1 watt (30 dBm) for systems employing at least 50 hopping channels; and, 0.25 watts (24 dBm) for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.	

Verdict: **Complies**

10.7 Maximum Output Power Conducted

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	1 MHz
Span:	5 MHz
Trace-Mode:	Max Hold

Result:

Test Conditions		Maximum Output Power Conducted [dBm]		
		904.5 MHz	915.3 MHz	926.1 MHz
T_{nom}	V_{nom}	19.02	19.12	19.11
Measurement uncertainty		± 3 dB		


Limits:

FCC	IC
Maximum Output Power Conducted	
For frequency hopping systems operating in the 902–928 MHz band: 1 watt (30 dBm) for systems employing at least 50 hopping channels; and, 0.25 watts (24 dBm) for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.	

Verdict: Complies


Plots:

Plot 1: Low channel

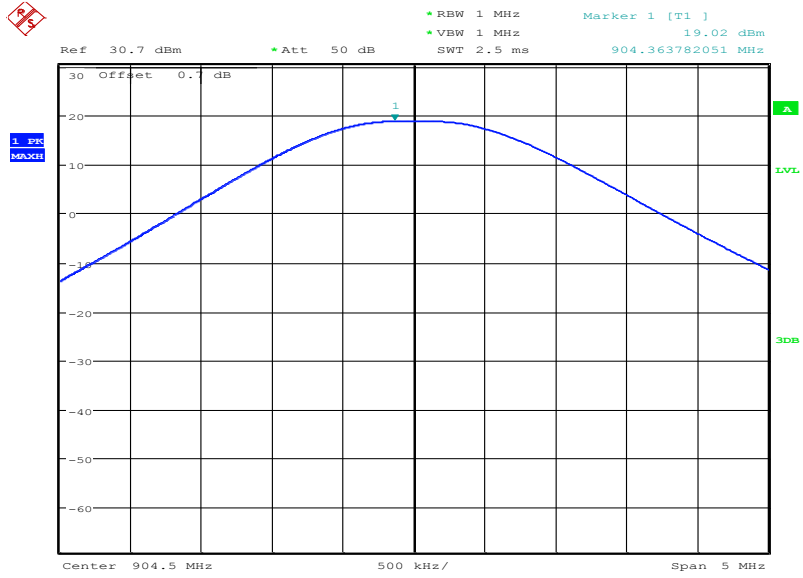


Date: 26.MAR.2015 13:30:21

Plot 2: Middle channel

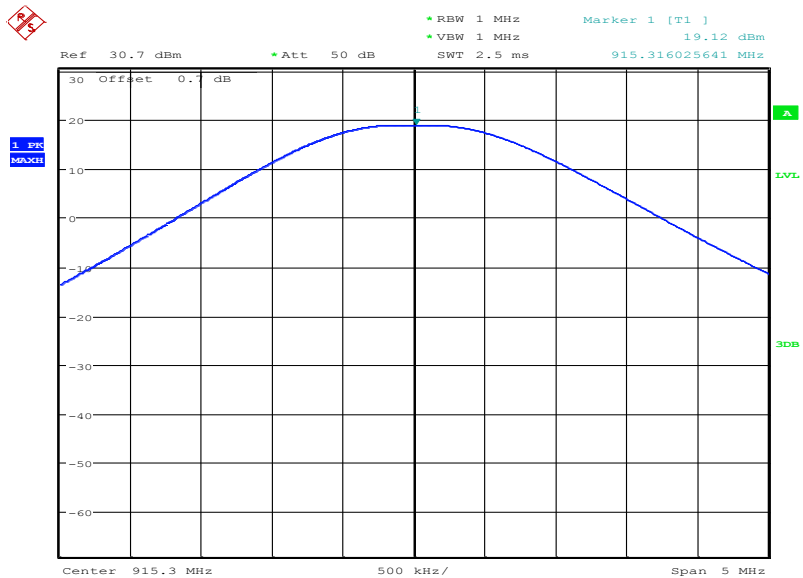

Date: 26.MAR.2015 13:26:25

Plot 3: High channel

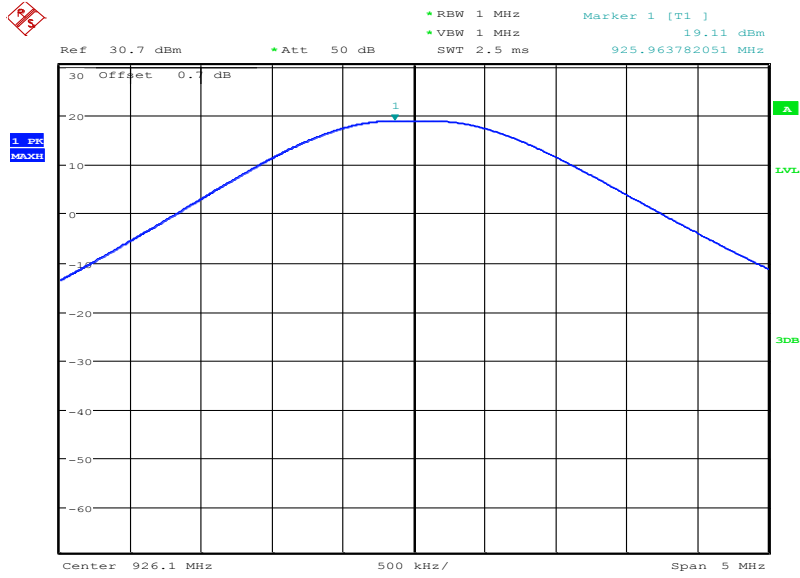

Date: 26.MAR.2015 13:19:50

10.8 Band-edge Compliance of conducted and radiated emissions

No restricted band in the range ± 2 channel bandwidths of the Band-edges of the specified emission band! (608 MHz – 614 MHz and 960 MHz – 1240 MHz).

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limits:

FCC	IC
Band-edge Compliance of conducted and radiated emissions	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>	

Result: See Results of spurious emissions conducted and radiated.

Verdict: **Complies**

10.9 Spurious Emissions Conducted (Transmitter)

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 00, 12 and 24.

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 1 MHz F > 1 GHz: 1 MHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 12.75 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
Spurious emissions conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>	


Plots:

Plot 1: Low channel

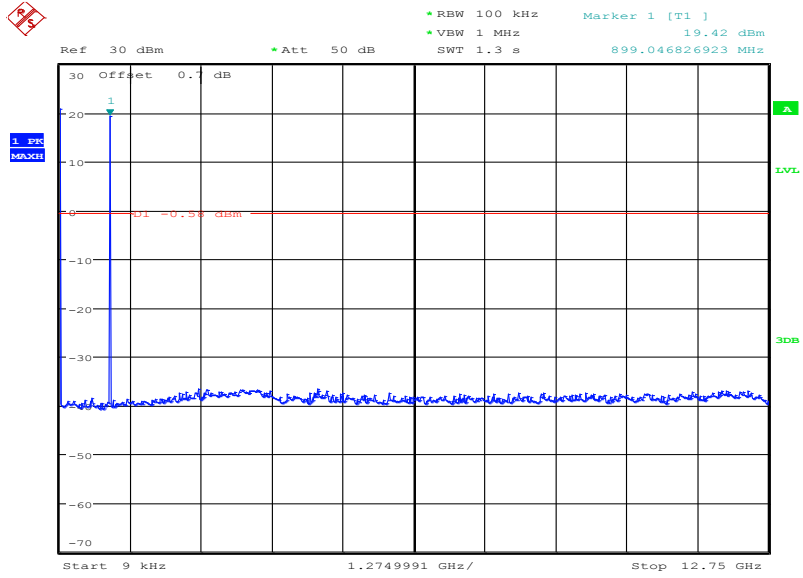


Date: 26.MAR.2015 14:53:28

Plot 2: Middle channel

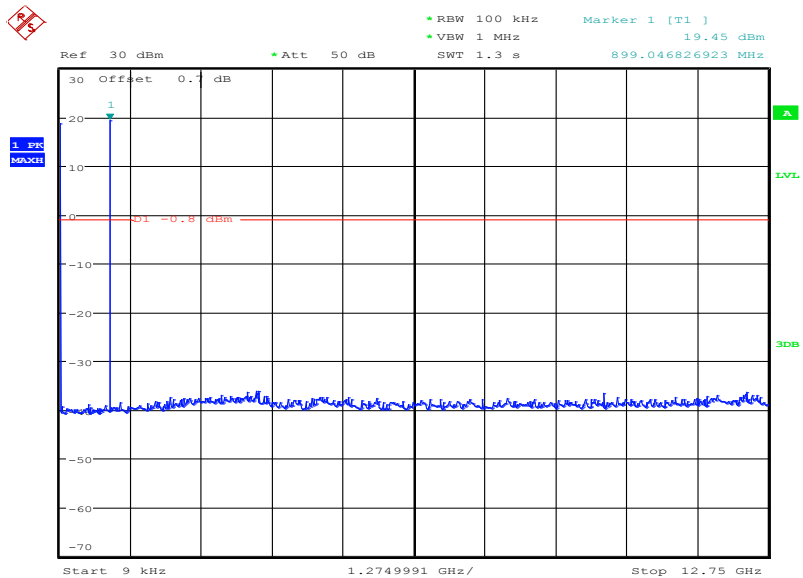

Date: 26.MAR.2015 14:33:19

Plot 3: Highest channel

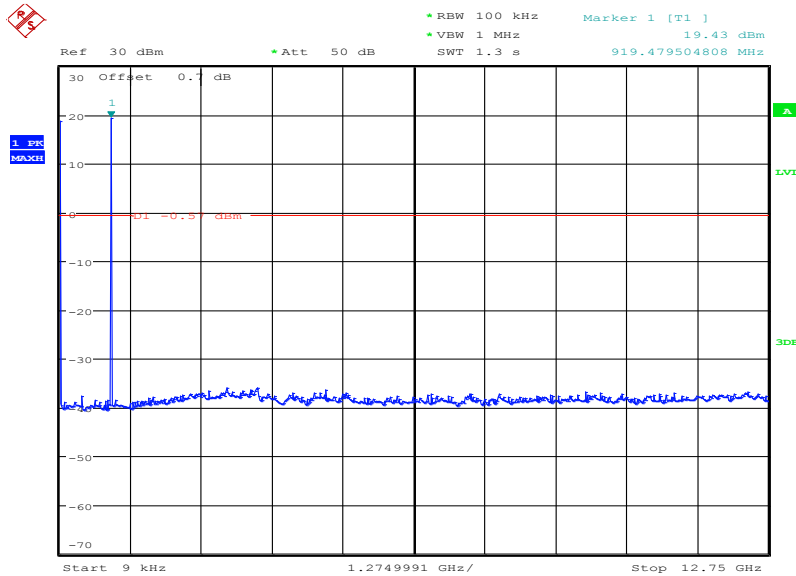

Date: 26.MAR.2015 15:05:30

Result:

Emission Limitation					
Frequency [MHz]	Amplitude of emission [dBm]	Limit max. allowed emission power	actual attenuation below frequency of operation [dB]	Results	
904.5	19.42	24 dBm		Operating frequency	
No peaks detected! All detected emissions are more than 20 dB below the limit!		-20 dBc			
915.3	19.43	24 dBm		Operating frequency	
No peaks detected! All detected emissions are more than 20 dB below the limit!		-20 dBc			
926.1	19.43	24 dBm		Operating frequency	
No peaks detected! All detected emissions are more than 20 dB below the limit!		-20 dBc			
Measurement uncertainty		± 3dB			

Limits:

FCC	IC
Spurious emissions conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>	

Verdict: Complies

10.10 Spurious Emissions Radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 12. This measurement is representative for all channels and modes. If any peaks are found channel 00 and channel 24 will be measured too. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold


Limits:

FCC		IC	
TX spurious emissions radiated < 30 MHz			
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance	
0.009 – 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	

Verdict: **Complies**

Plots:

Plot 1: TX-Mode

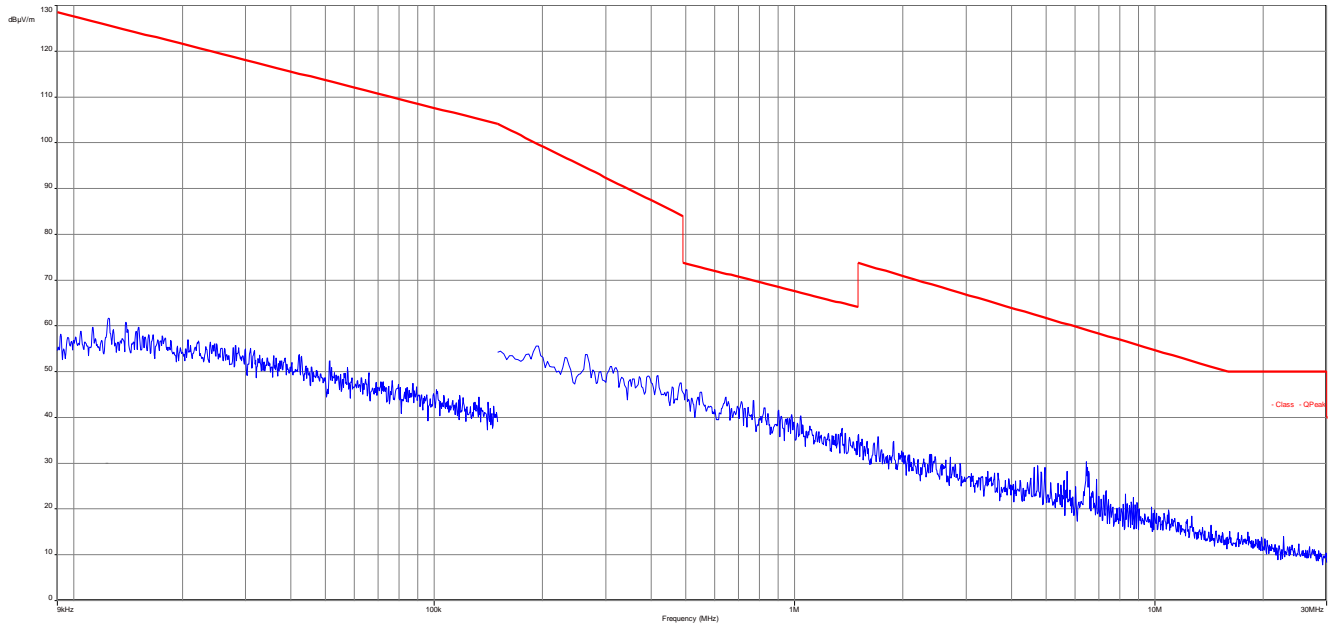

10.11 Spurious Emissions Radiated (Transmitter) > 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 00, 12 and 24.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	3 x RBW
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 12.75 GHz
Trace-Mode:	Max Hold
Measured Modulation	FSK

Limits:


ANSI C63.10 – FCC Public Notice DA 00-705
The average emission shall be determined by using Video averaging (VBW = 10 Hz). If the dwell time of the hopping signal is less than 100 ms (per channel), the VBW=10 Hz reading may be adjusted by a factor: F = 20log (dwell time/100 ms)

FCC	IC	
Band-edge Compliance of conducted and radiated emissions		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

Plots:


Plot 1: 30 MHz – 1 GHz, horizontal & vertical polarisation

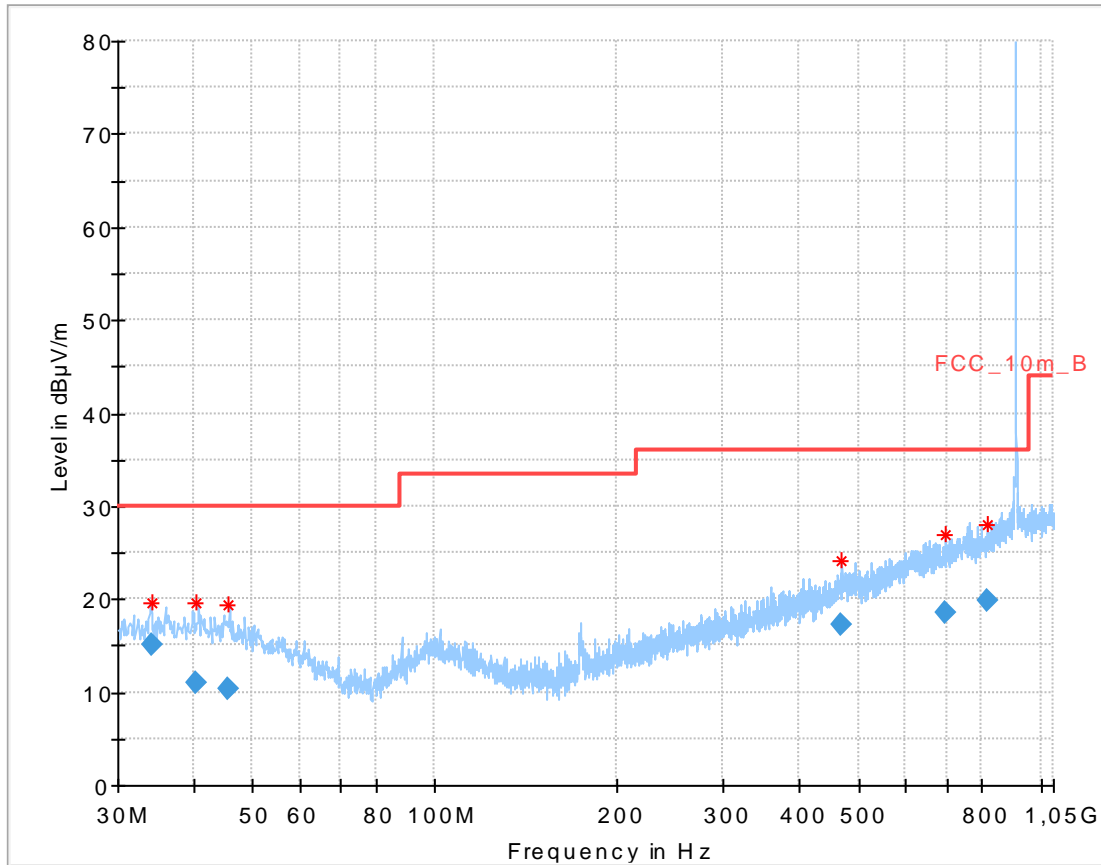

Final_Result:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
34.017000	15.03	30.00	14.97	1000.0	120.000	98.0	H	83	13.7
40.492500	10.93	30.00	19.07	1000.0	120.000	101.0	H	107	14.0
45.773250	10.39	30.00	19.61	1000.0	120.000	101.0	V	107	13.7
469.953000	17.16	36.00	18.84	1000.0	120.000	98.0	V	205	18.1
694.687800	18.47	36.00	17.53	1000.0	120.000	170.0	V	155	21.5
816.119550	19.76	36.00	16.24	1000.0	120.000	98.0	H	-7	23.0

Plot 2: 1 GHz – 12.75 GHz, horizontal & vertical polarisation (worst case)

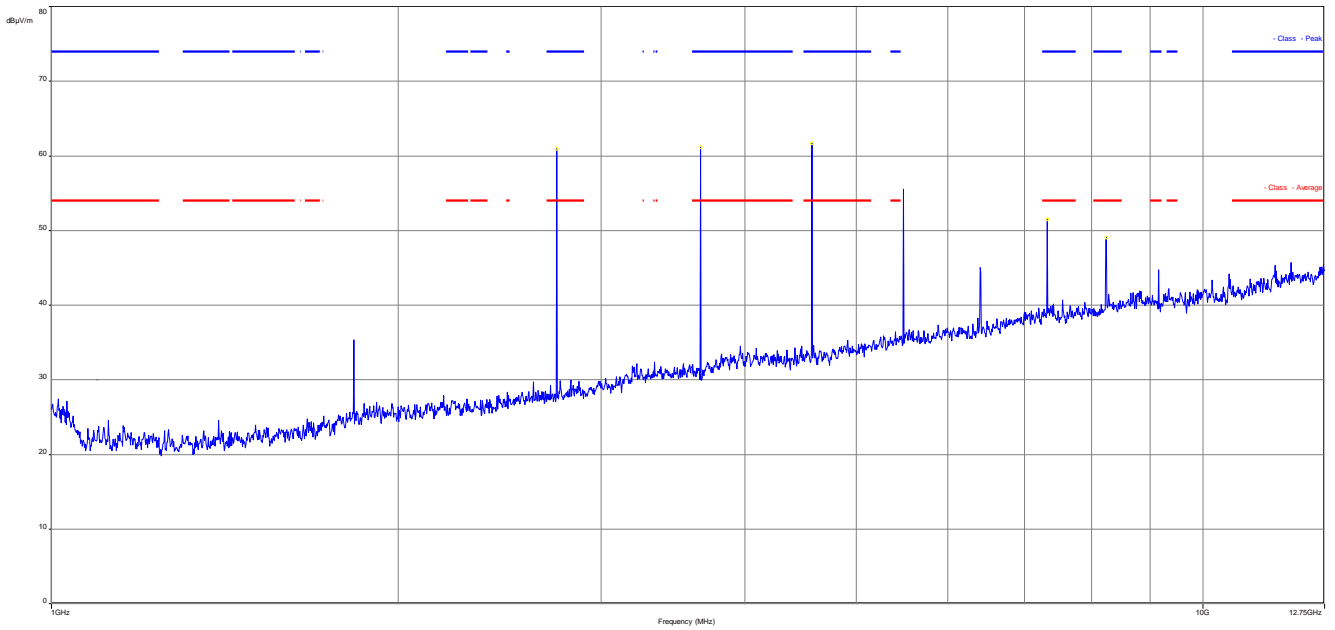

Result:


For radiated spurious emission the limits of 15.209 applies for all frequencies mentioned in 15.205. According to FCC Public Notice DA 00-705 (ANSI C63.10) the average emission shall be determined by using Video averaging (VBW = 10 Hz). If the dwell time of the hopping signal is less than 100 ms (per channel), the VBW=10 Hz reading may be adjusted by a factor:

$$F = 20 \cdot \log(\text{dwell time}/100 \text{ ms})$$

In a period of 100 ms, we have a maximum of 2 transmissions and that gives the correction factor for spurious measurement.


$$F = 20 \cdot \log(2 \cdot 2.178/100) = -27.2 \text{ dB}$$

Plot 7: Time slot length = 2.178 ms

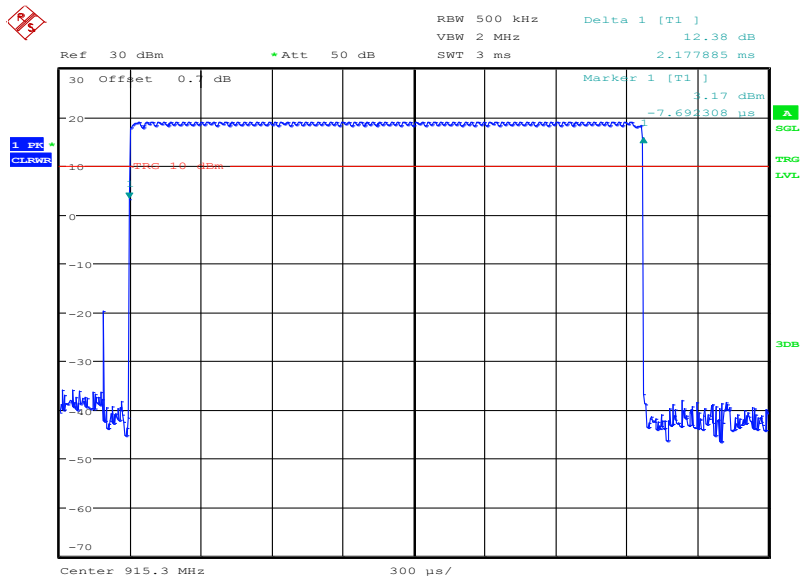

Date: 26.MAR.2015 15:25:55

Plot 8: Number of hopping channels in 1s = 18

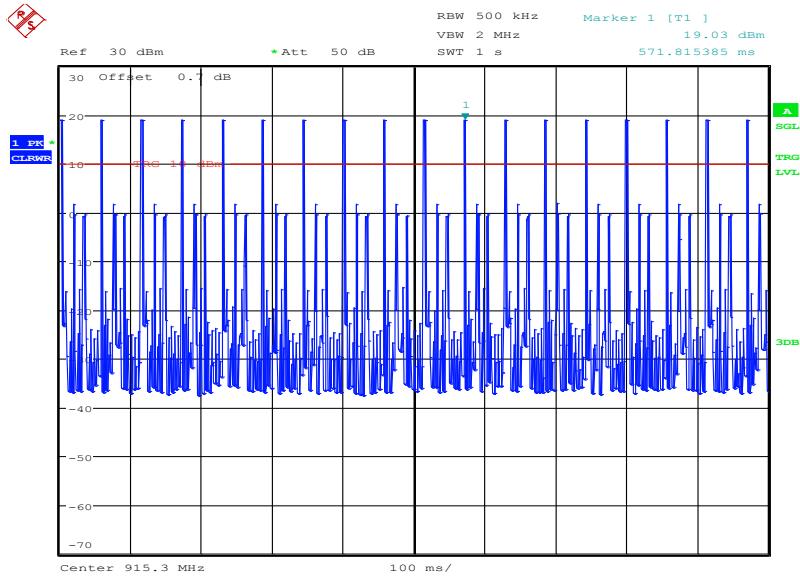

Date: 26.MAR.2015 15:26:58

SPURIOUS EMISSIONS LEVEL [dBμV/m]								
904.5 MHz			915.3 MHz			926.1 MHz		
Frequency [MHz]	Detector	Level [dBμV/m]	Frequency [MHz]	Detector	Level [dBμV/m]	Frequency [MHz]	Detector	Level [dBμV/m]
2713.5	Peak	66.1	2745.9	Peak	67.3	2778.3	Peak	68.0
2713.5	AVG	38.9	2745.9	AVG	40.1	2788.3	AVG	40.8
3618.0	Peak	67.3	3661.2	Peak	68.4	3704.4	Peak	68.5
3618.0	AVG	40.1	3661.2	AVG	41.2	3704.4	AVG	41.3
4522.5	Peak	67.8	4576.5	Peak	69.1	4630.5	Peak	69.7
4522.5	AVG	40.6	4576.5	AVG	41.9	4630.5	AVG	42.5
7236.0	Peak	55.5	7322.4	Peak	57.3	7408.8	Peak	58.1
7236.0	AVG	28.3	7322.4	AVG	30.1	7408.8	AVG	30.9
8140.5	Peak	52.7	8237.7	Peak	54.0	8334.9	Peak	54.8
8140.5	AVG	25.5	8237.7	AVG	26.8	8334.9	AVG	27.6
Measurement uncertainty					±3 dB			

*AVG: Detector Average corrected with the correction factor F = -27.2 dB

Verdict: **Complies**

10.12 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	3 x RBW Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance	
30 - 88	40	3	
88 – 216	43.5	3	
216 – 960	46.0	3	
Above 960	54.0	3	


Result:

SPURIOUS EMISSIONS LEVEL [dBµV/m]								
RX			-/-			-/-		
Frequency [MHz]	Detector	Level [dBµV/m]	Frequency [MHz]	Detector	Level [dBµV/m]	Frequency [MHz]	Detector	Level [dBµV/m]
No peaks found 10 dB below the limit								
Measurement uncertainty			±3 dB					

Verdict: Complies

Plots:


Plot 1: 30 MHz – 1 GHz, RX-Mode, horizontal & vertical polarisation

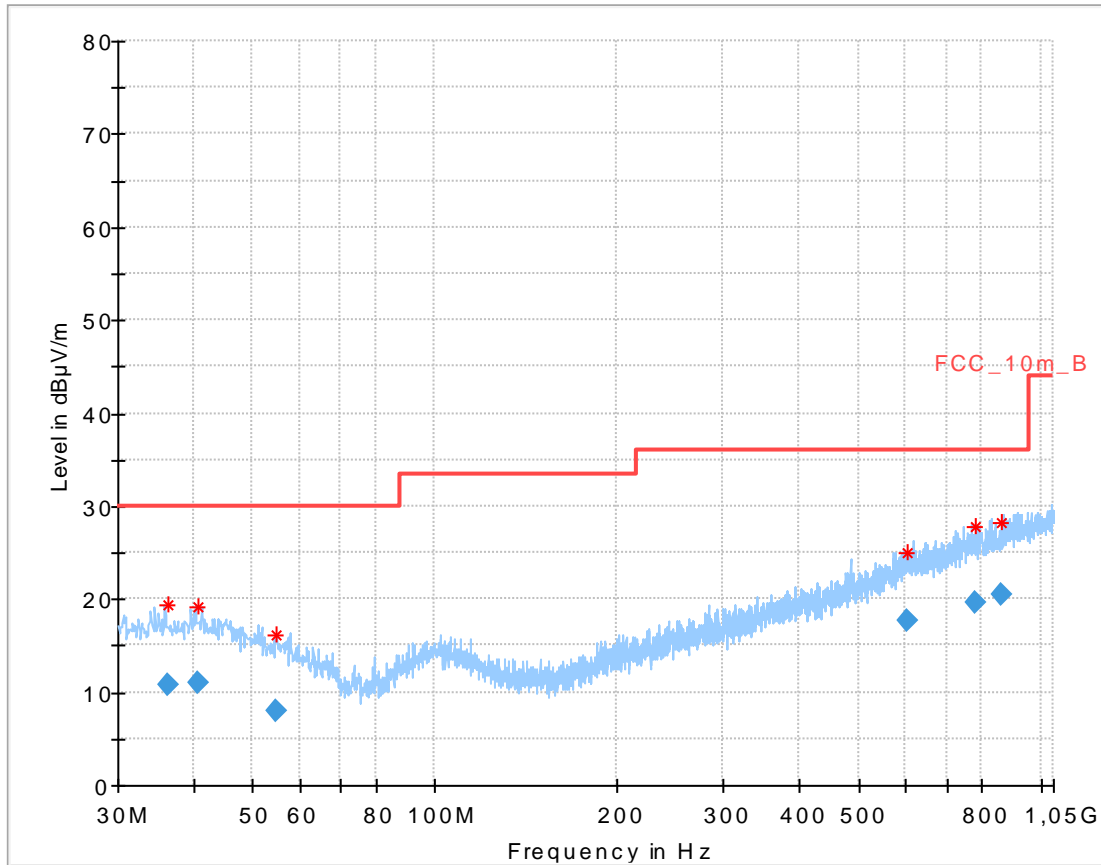

Final_Result:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.371400	10.86	30.00	19.14	1000.0	120.000	100.0	H	-25	13.9
40.643100	10.98	30.00	19.02	1000.0	120.000	101.0	V	198	14.0
54.907350	8.05	30.00	21.95	1000.0	120.000	100.0	V	19	11.9
603.526200	17.69	36.00	18.31	1000.0	120.000	170.0	H	18	20.7
782.808750	19.54	36.00	16.46	1000.0	120.000	170.0	H	-6	22.7
860.263050	20.58	36.00	15.42	1000.0	120.000	170.0	V	82	23.6

Plot 2: 1GHz – 12.75 GHz, RX-Mode, horizontal & vertical polarisation

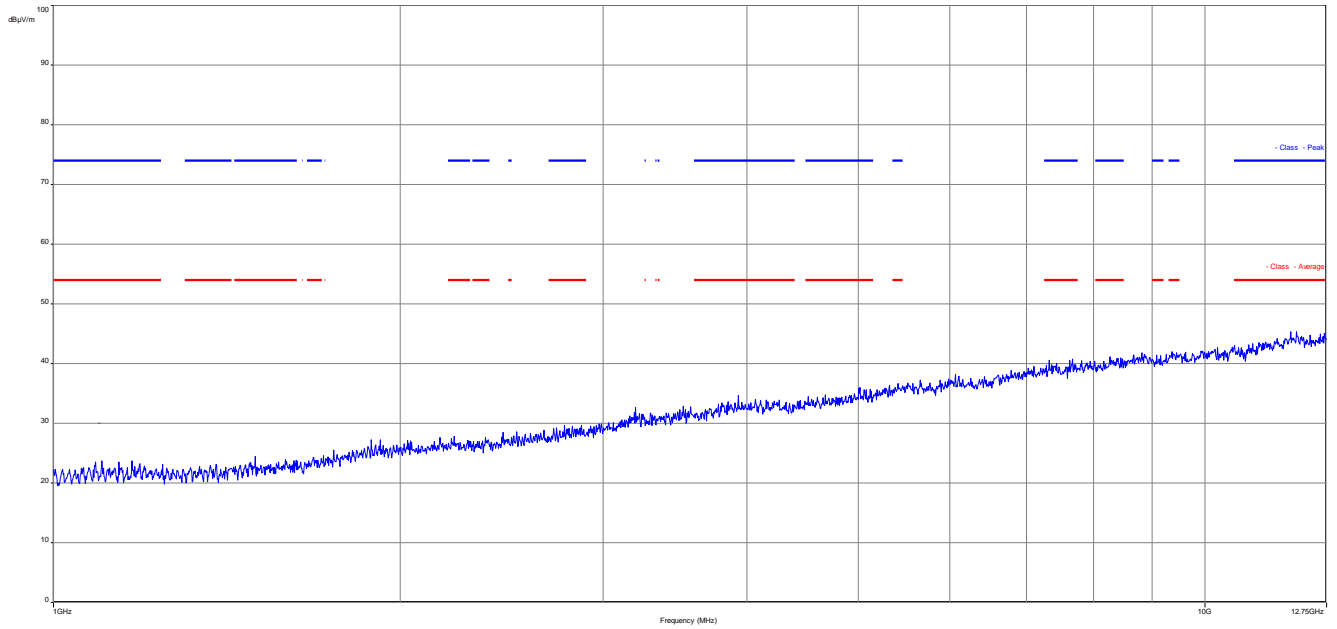

11 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	08.05.2013	08.05.2015
2	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
3	n. a.	Switch / Control Unit	3488A	HP	*	300000199	ne		
4	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2013	13.06.2015
5	90	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
6	90	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	29.10.2014	29.10.2017
7	90	MXE EMI Receiver 20 Hz to 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	06.03.2015	06.03.2016
8	90	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne		
9	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	Ve	02.10.2014	02.10.2016
10	45	Switch-Unit	3488A	HP	2719A14505	300000368	g		
11	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04466	300000580	ne		
12	50	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	26.01.2015	26.01.2016
13	50	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	11.02.2014	11.02.2016
14	50	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw		
15	50	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw		
16	50	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw		
17	50	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014	22.04.2016
18	50	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	26.01.2015	26.01.2016
19	50	Breitband Doppelsteg-Hornantenne	BBHA9120 B	Schwarzbeck	188	300003896	k	10.06.2013	10.06.2015

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vIKI!	Attention: extended calibration interval	*)	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

12 Observations

No observations except those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
	Initial release	2015-04-14
-A	Editorial corrections	2015-05-12
-B	Editorial corrections	2015-05-19

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Beliehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
 Unterzeichnerin der Multilateralen Abkommen
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

CETECOM ICT Services GmbH
 Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

- Drahtgebundene Kommunikation einschließlich xDSL
- VoIP und DECT
- Akustik
- Funk einschließlich WLAN
- Short Range Devices (SRD)
- RFID
- WiFiMax und Richtfunk
- Mobilfunk (GSM / GPRS / UTRAN / LTE) Performance
- Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
- Produktsicherheit
- SAR und Hearing Aid Compatibility (HAC)
- Umweltsimulation
- Smart Card Terminals
- Bluetooth
- Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 07.03.2014 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 77 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-00

Frankfurt am Main, 07.03.2014
 Deutsche Akkreditierungsstelle

In Auftrag gegeben durch
 Akkreditierungsstelle
 Akkreditierungsstelle

Deutsche Akkreditierungsstelle GmbH

Standort Berlin Spittelmarkt 10 10117 Berlin	Standort Frankfurt am Main Gartenstraße 6 60594 Frankfurt am Main	Standort Braunschweig Bundesallee 100 38116 Braunschweig
--	---	--

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Kurznormitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abl. L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der Fertigkeiten in operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
 EA: www.european-accreditation.org
 IAF: www.iaf.or.jp
 ILAC: www.ilac.or.jp

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>