



Report No.: T210113D05-D

Ref No.: T200717D02-D

Page: 1 / 25  
Rev.: 04

# FCC TEST REPORT

for

**Communications Control Unit**

**MODEL: R4600-XXX(X= A~Z, a~z, 0~9)**

Issued to:

**ADLINK TECHNOLOGY INC.**

**9F, No.166, Jian Yi Rd., Zhonghe Dist.,  
New Taipei City, 235 Taiwan**

Issued by:

**Compliance Certification Services Inc.**

**Xindian Lab.**

**No.163-1, Jhongsheng Rd., Xindian Dist.,  
New Taipei City, Taiwan.**

**TEL: 886-2-22170894**

**FAX: 886-2-22171029**

**Issued Date: April 23, 2021**

**Note:** This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 11, 2020	Initial Issue	ALL	Wendy Wang
01	March 8, 2021	Update ferrite core to internal cable.	ALL	Wendy Wang
02	April 7, 2021	<ol style="list-style-type: none"> <li>1. Removed test setup photos, create a new file and mark ferrite core in red.</li> <li>2. Added "----End of Test Report----" in last page.</li> <li>3. Revised summary table in page 4:                (a) Added 15.107 and 15.109                (b) Removed "ICES-003 Issue 6-2016"                (c) Result of the conducted (power Port): "NA"</li> <li>4. Removed test results of Conducted Emission in page 13.</li> <li>5. Added test date in page 19~22.</li> </ol>	4, 13, 19~22, 23	Wendy Wang
03	April 21, 2021	<ol style="list-style-type: none"> <li>1. Removed conduction modes.</li> <li>2. Add note at final Radiation mode.</li> <li>3. Add conditions of power supplies which is 24VDC / Normal mode at Plots &amp; Result tables.</li> </ol>	6, 19~20, 23~24	Wendy Wang
04	April 23, 2021	<ol style="list-style-type: none"> <li>1. Revised Equipment name from Power Supply to Power Module.</li> <li>2. Add 110V pretest data and setup photo.</li> </ol>	6~7, 13, 21~22	Wendy Wang

**TABLE OF CONTENTS**

<b>1</b>	<b>TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2</b>	<b>EUT DESCRIPTION.....</b>	<b>5</b>
<b>3</b>	<b>TEST METHODOLOGY.....</b>	<b>6</b>
3.1.	DECISION OF FINAL TEST MODE.....	6
3.2.	EUT SYSTEM OPERATION .....	6
<b>4</b>	<b>SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>7</b>
4.1.	DESCRIPTION OF SUPPORT UNITS .....	7
4.2.	CONFIGURATION OF SYSTEM UNDER TEST .....	8
<b>5</b>	<b>FACILITIES AND ACCREDITATIONS.....</b>	<b>9</b>
5.1.	FACILITIES .....	9
5.2.	ACCREDITATIONS.....	9
5.3.	MEASUREMENT UNCERTAINTY.....	9
<b>6</b>	<b>CONDUCTED EMISSION MEASUREMENT .....</b>	<b>10</b>
6.1.	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	10
6.2.	TEST INSTRUMENTS .....	10
6.3.	TEST PROCEDURES .....	11
6.4.	TEST SETUP .....	12
6.5.	DATA SAMPLE .....	12
6.6.	TEST RESULTS.....	13
<b>7</b>	<b>RADIATED EMISSION MEASUREMENT .....</b>	<b>14</b>
7.1.	LIMITS OF RADIATED EMISSION MEASUREMENT.....	14
7.2.	TEST INSTRUMENTS .....	15
7.3.	TEST PROCEDURES.....	16
7.4.	TEST SETUP .....	17
7.5.	DATA SAMPLE .....	18
7.6.	TEST RESULTS.....	19
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT .....</b>		<b>A1-1</b>

# 1 TEST RESULT CERTIFICATION


<b>Product:</b>	Communications Control Unit
<b>Model:</b>	R4600-XXX(X= A~Z, a~z, 0~9)
<b>Brand:</b>	
<b>Applicant:</b>	<b>ADLINK TECHNOLOGY INC.</b> 9F, No.166, Jian Yi Rd., Zhonghe Dist., New Taipei City, 235 Taiwan
<b>Manufacturer:</b>	<b>ADLINK TECHNOLOGY INC.</b> 9F, No.166, Jian Yi Rd., Zhonghe Dist., New Taipei City, 235 Taiwan
<b>Tested:</b>	March 9, 2020 ~ January 13, 2021

EMISSION		
Standard	Item	Remarks
FCC 47 CFR Part 15 Subpart B, ANSI C63.4-2014	Conducted Limit Clause §15.107	N/A
	Radiated Limit Clause §15.109	PASS

Statements of Conformity
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.


The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

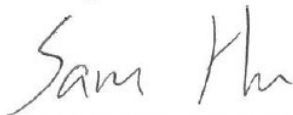

Sam Hu  
Assistant Manager

Reviewed by:

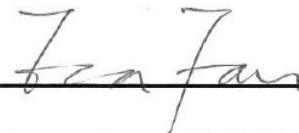

Eva Fan  
Supervisor of report document dept.

## 2 EUT DESCRIPTION

<b>Product</b>	Communications Control Unit
<b>Brand Name</b>	
<b>Model</b>	R4600-XXX(X= A~Z, a~z, 0~9)
<b>Applicant</b>	ADLINK TECHNOLOGY INC.
<b>Housing material</b>	Metal case
<b>Identify Number</b>	T200303D01
<b>Received Date</b>	January 13, 2021
<b>EUT Power Rating</b>	24~110VDC
<b>DC Power During Test</b>	24VDC&110VDC

### Model Difference

Model Name	Difference	Tested (Checked)
R4600-2A2	Original	<input checked="" type="checkbox"/>
R4600-XXX	1. X= A~Z, a~z, 0~9 2. For marketing purpose only.	<input type="checkbox"/>

### I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
1. RS485 Port	2	2
2. DVI Port	1	1
3. LAN Port	2	2
4. USB Port	2	2
5. BNC Port	14	6
6. GPS Port	1	1

**Note:** Client consigns only one model sample to test (Model Number: R4600-2A2).

### 3 TEST METHODOLOGY

#### 3.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the below additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The test configuration/ modes are as the following:

##### Radiation Modes:

No.	Report No.	Operate State	
1	T200717D02	24VDC	Normal Mode
			Normal Mode / 1-18GHz
2		110VDC	Normal Mode

**Note.:** Normal Mode means based on EUT system operation.

##### Worst:

**Conduction:** N/A (The EUT is intended to be installed and used in the vehicles (via DC LV/HV power sources which can't be connected to AC mains). Therefore, this test is not applicable.)

**Radiation:** Mode 1

#### 3.2. EUT SYSTEM OPERATION

1. Linux boots system.
2. Run Burnintest.exe to activate all peripherals for test EUT.
3. To perform operations SOP to test EUT.
4. Run LanTest20 to test lan port, EUT IP: 192.168.1.10, 192.168.1.2, Server PC IP: 192.168.1.20, 192.168.1.30.

**Note:** Test program is self-repeating throughout the test.

## 4 SETUP OF EQUIPMENT UNDER TEST

### 4.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### EUT Devices:

No.	Equipment	Model No.	Brand Name
1	Mother Board	ABX-5502	ADLINK
2	CPU (2.7GHz)	Intel Core i5-6440EQ	Intel
3	Memory (16GB)	N/A	N/A
4	M.2 SATA SSD (256GB)	M.2 3MG2-P	Inndisk
5	SSD (1TB 2.5inch)	SQF-S25VF-1K9G-SCE	Advantech
6	Power Module	PW-201	Adlink
7	LTE module	EM7565	Sierra
		MC7455	Sierra
		LN940	Telit
8	WLAN module	WLE600VXi	Compex
9	CFAST	SQF-S10U2-16G-S9E	Advantech


#### Peripherals Devices:

No.	Equipment	Model No.	Serial No.	FCC ID / BSMI ID	Brand Name	Data Cable	Power Cord
1	USB Mouse	M-U0026	N/A	T41126	LOGITECH	Shielded, 1.8m	N/A
2	USB Keyboard	Y-U0009	N/A	D51160	LOGITECH	Shielded, 1.6m	N/A
3-4	Modem	AL-56ERM	0MERM04A0212	DOC	GALILEO	Shielded, 1.8m	Unshielded, 1.8m with a core
5	Monitor	PA248Q	G5LMQS071290	R31018	ASUS	Shielded, 1.8m with two cores	Unshielded, 1.8m
6-7	Server PC	T5810	N/A	N/A	DELL	Shielded, 20m	Unshielded, 1.8m
8	MIMO antennas (Huber & Suhner: 1399.17.0222).	N/A	N/A	N/A	N/A	Unshielded, 8.5m x5	N/A
9	MIMO Wi-Fi antenna (Huber & Suhner: 1399.35.0002).	N/A	N/A	N/A	N/A	Unshielded, 8.5m	N/A
10	MIMO antenna with GPS (Huber & Suhner: 1399.99.0130).	N/A	N/A	N/A	N/A	Unshielded, 8.5m	N/A
11	DC Power Supply	DSP-150-010HD	N/A	N/A	IDRC	Unshielded, 1.9m	Unshielded, 1.8m

#### Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 4.2. CONFIGURATION OF SYSTEM UNDER TEST

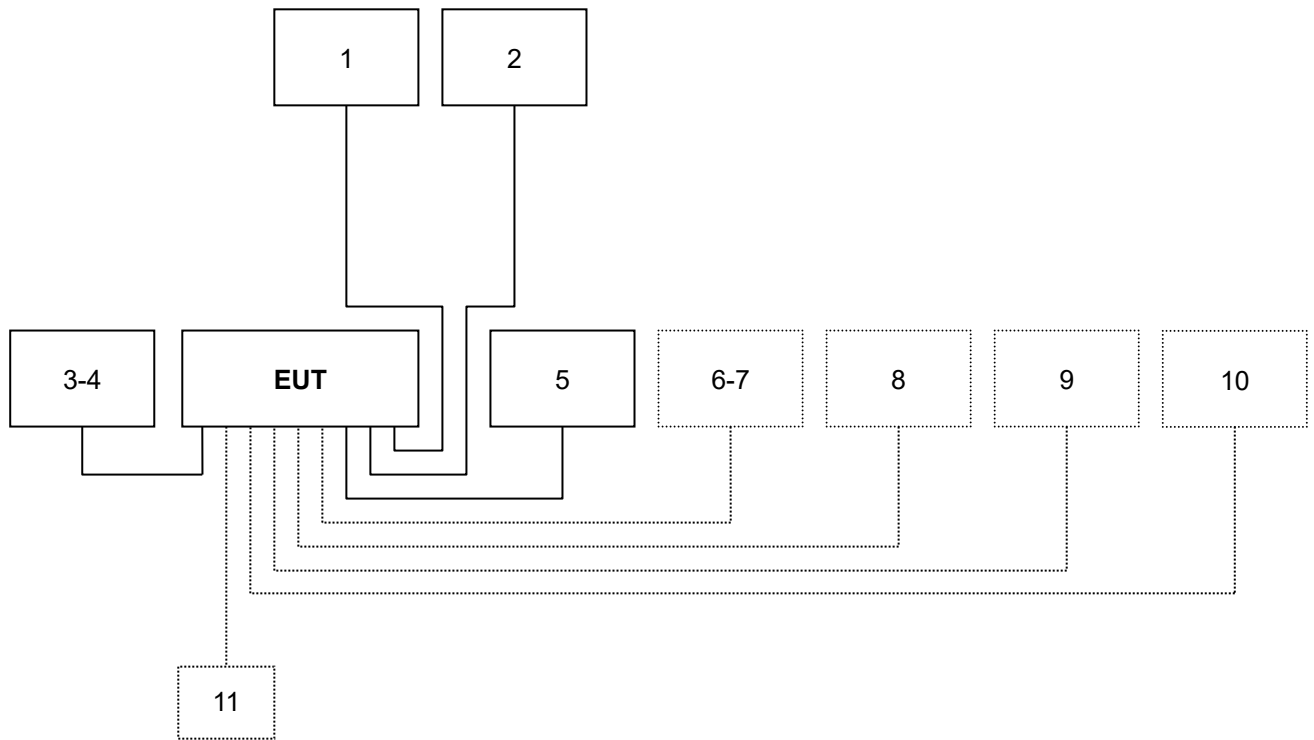



## 5 FACILITIES AND ACCREDITATIONS

### 5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCSrf Taiwan Xindian Lab. at No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, Taiwan.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4 and CISPR 16-1-5.

### 5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
USA	A2LA

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Japan	VCCI
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	0.15MHz ~ 30MHz	N/A
Radiated emissions	30MHz ~ 1000MHz	± 5.24
	1000MHz ~ 18000MHz	± 4.69
	18000MHz ~ 40000MHz	± 4.12

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2005, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than  $U_{CISPR}$  which is 3.4dB(AMN) and 6.3dB(OATS) respectively. CCS values (called  $U_{Lab}$  in CISPR 16-4-2) is less than  $U_{CISPR}$  as shown in the table above. Therefore, MU need not be considered for compliance.

## 6 CONDUCTED EMISSION MEASUREMENT

### 6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

**NOTE:**

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 6.2. TEST INSTRUMENTS

Conducted Emission room #				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.

### 6.3. TEST PROCEDURES (please refer to measurement standard or CCS SOP PA-031)


#### Procedure of Preliminary Test

- The EUT and support equipment, if needed, were set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.
- All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- The test equipment EUT installed by AC main power, through a Line Impedance Stabilization Network (LISN), which was supplied power source and was grounded to the ground plane.
- All support equipment power by from a second LISN.
- The test program of the EUT was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 3.1 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

#### Procedure of Final Test

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- The test data of the worst-case condition(s) was recorded.

## 6.4. TEST SETUP

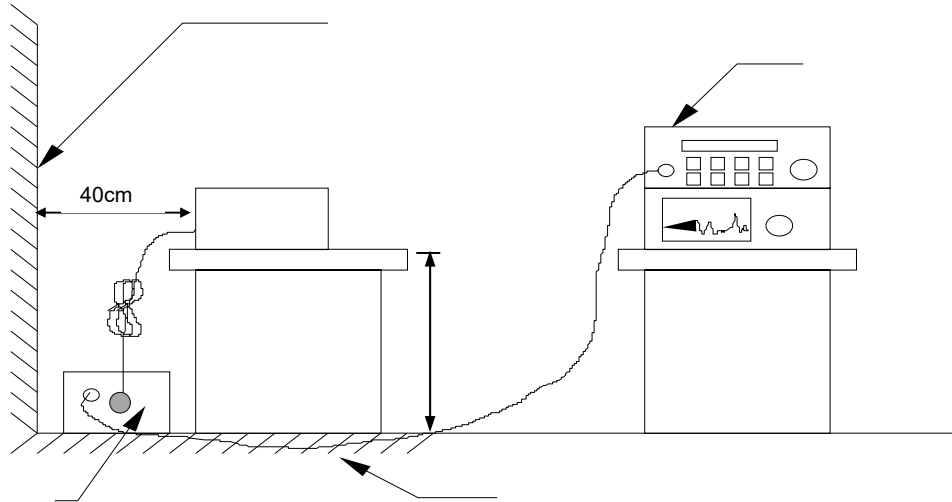

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 6.5. DATA SAMPLE

Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
x.xx	42.95	0.55	43.50	73	-29.50	Q	L1

- Freq. = Emission frequency in MHz
- Reading = Uncorrected Analyzer/Receiver reading
- Factor = Insertion loss of LISN + Cable Loss + Pulse Limit
- Result = Reading + Factor
- Limit = Limit stated in standard
- Margin = Reading in reference to limit
- P = Peak Reading
- Q = Quasi-peak Reading
- A = Average Reading
- L1 = Hot side
- L2 = Neutral side

### Calculation Formula

$$\text{Margin (dB)} = \text{Result (dBuV)} - \text{Limit (dBuV)}$$

## 6.6. TEST RESULTS

<b>Model No.</b>	R4600-2A2	<b>6dB Bandwidth</b>	N/A
<b>Environmental Conditions</b>	N/A	<b>Test Mode</b>	N/A
<b>Tested by</b>	N/A	<b>Phase</b>	N/A
<b>Standard</b>	N/A		

**Note:** The EUT is intended to be installed and used in the vehicles (via DC LV/HV power sources which can't be connected to AC mains). Therefore, this test is not applicable.

## 7 RADIATED EMISSION MEASUREMENT

### 7.1. LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1GHz (for digital device)

FREQUENCY (MHz)	dBuV/m (At 10m)	
	Class A	Class B
30 ~ 230	40	30
230 ~ 1000	47	37

Limit tables for non-digital device:

Class A Radiated Emission limit at 10m (for others)

Frequency (MHZ)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	90	39
88 - 216	150	43.5
216 – 960	210	46.4
Above 960	300	49.5

Class B Radiated Emission limit at 3m (for others)

Frequency (MHZ)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	100	40
88 - 216	150	43.5
216 – 960	200	46
Above 960	500	54

Above 1GHz(for all device)

Frequency (MHZ)	Class A (dBuV/m) (At 10m)		Class B (dBuV/m) (At 3m)	
	Average	Peak	Average	Peak
Above 1000	49.5	69.5	54	74

- NOTE:** (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) The measurement above 1GHz is at close-in distances 3m, and determine the limit **L<sub>2</sub>** corresponding to the close-in distance **d<sub>2</sub>** by applying the following relation: **L<sub>2</sub> = L<sub>1</sub> (d<sub>1</sub>/d<sub>2</sub>)**, where **L<sub>1</sub>** is the specified limit in microvolts per metre (**uV/m**) at the distance **d<sub>1</sub> (10m)**, **L<sub>2</sub>** is the new limit for distance **d<sub>2</sub> (3m)**.  
 So the new Class A limit above 1GHz at 3m is as following table:

Frequency (MHZ)	Class A (dBuV/m) (At 3m)	
	Average	Peak
Above 1000	60	80

Report No.: T210113D05-D

Ref No.: T200717D02-D

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40GHz, whichever is lower

## 7.2. TEST INSTRUMENTS

Open Area Test Site # H				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Bilog Antenna	Teseq	CBL 6112D	40529	08/29/2020
Cable	EMEC	CFD400NL-LW	N-Type#H11	08/14/2020
EMI Test Receiver	R&S	ESCI	101340	03/19/2020
Pre-Amplifier	HP	8447D	1937A01554	09/26/2020
Thermo-Hygro Meter	Wisewind	201A	No. 03	05/21/2020
Test S/W	EZ-EMC			
Above 1GHz Used				
Horn Antenna	ETS	3117	00139062	08/07/2020
K-Type Cable x 1m (1-40GHz)	Rosnol	K1K50-UP0264-K1k50-1M	160215-1	11/18/2020
Microflex Cable x 7m	EMCI	EMC106-SM-NM-7000	SD-R056	11/18/2020
Pre-Amplifier	HP	8449B	3008A01266	11/18/2020
Signal Analyzer	Agilent	N9010A	MY53440125	11/18/2020
Thermo-Hygro Meter	Wisewind	N/A	SD-R027	09/17/2020
Test S/W	EZ-EMC			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.

Report No.: T210113D05-D

Ref No.: T200717D02-D

### 7.3. TEST PROCEDURES (please refer to measurement standard or CCS SOP PA-031)

#### Procedure of Preliminary Test

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical usage as per ANSI C63.4.
- The EUT received AC power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- The antenna was placed at 3 or 10 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 40GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 3.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.


#### Procedure of Final Test

- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 40GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 or 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recording at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. Below 1GHz the Q.P. reading and above 1GHz the Peak and Average reading are presented.
- The test data of the worst-case condition(s) was recorded.




## 7.4. TEST SETUP

### Below 1GHz

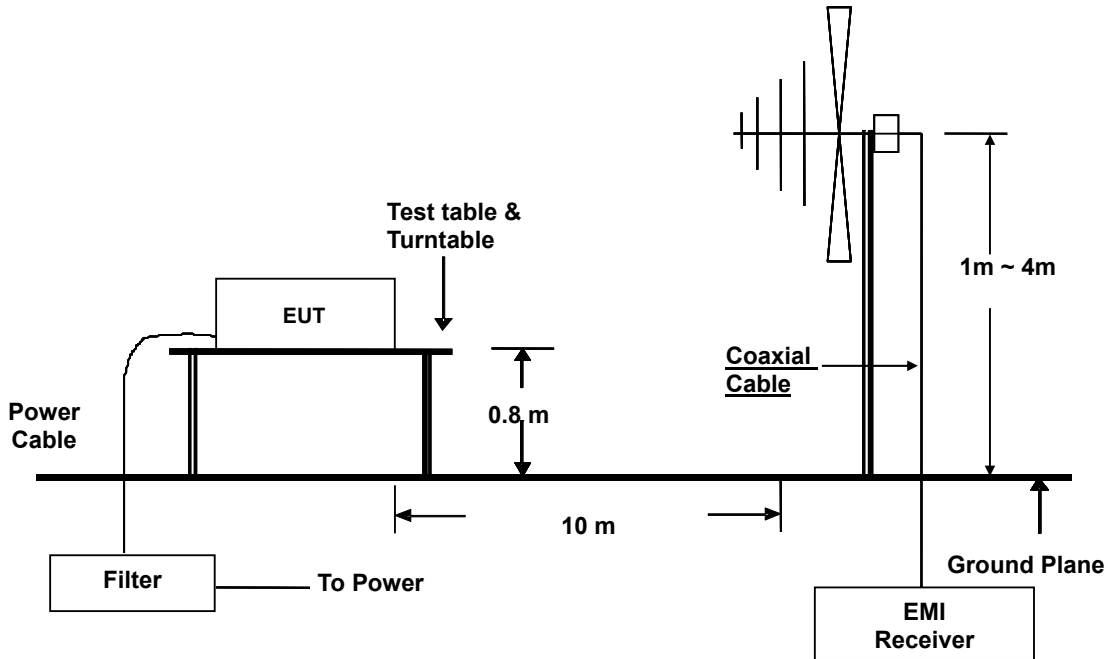

### Above 1GHz

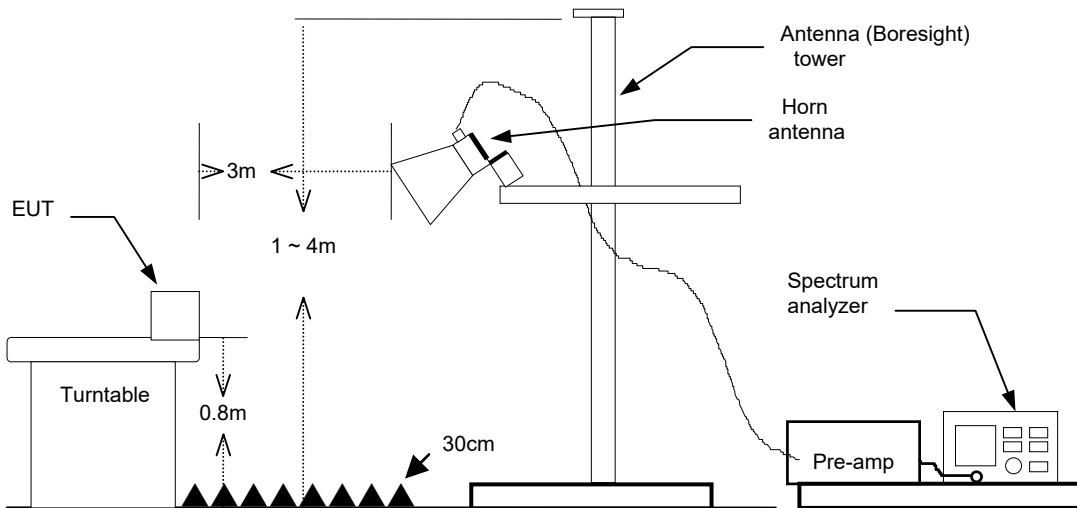

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 7.5. DATA SAMPLE

### Below 1GHz

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/Q)	Pol. (H/V)
x.xx	14.0	12.2	26.2	40	-13.8	Q	H

### Above 1GHz

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
x.xx	42.95	0.55	43.50	60	-16.50	A	H

- Freq. = Emission frequency in MHz
- Reading = Uncorrected Analyzer/Receiver reading
- Factor = Antenna Factor + Cable Loss - Amplifier Gain
- Result = Reading + Factor
- Limit = Limit stated in standard
- Margin = Reading in reference to limit
- P = Peak Reading
- Q = Quasi-peak Reading
- A = Average Reading
- H = Antenna Polarization: Horizontal
- V = Antenna Polarization: Vertical


### Calculation Formula

Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)

## 7.6. TEST RESULTS

### Below 1GHz


<b>Model No.</b>	R4600-2A2	<b>Test Mode</b>	Mode 1 (24VDC / Normal Mode)
<b>Environmental Conditions</b>	25°C, 68% RH	<b>6dB Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested by</b>	Ken Lin
<b>Standard</b>	FCC CLASS A W/ CISPR 22 CLASS A LIMIT	<b>Tested Date</b>	March 9, 2020

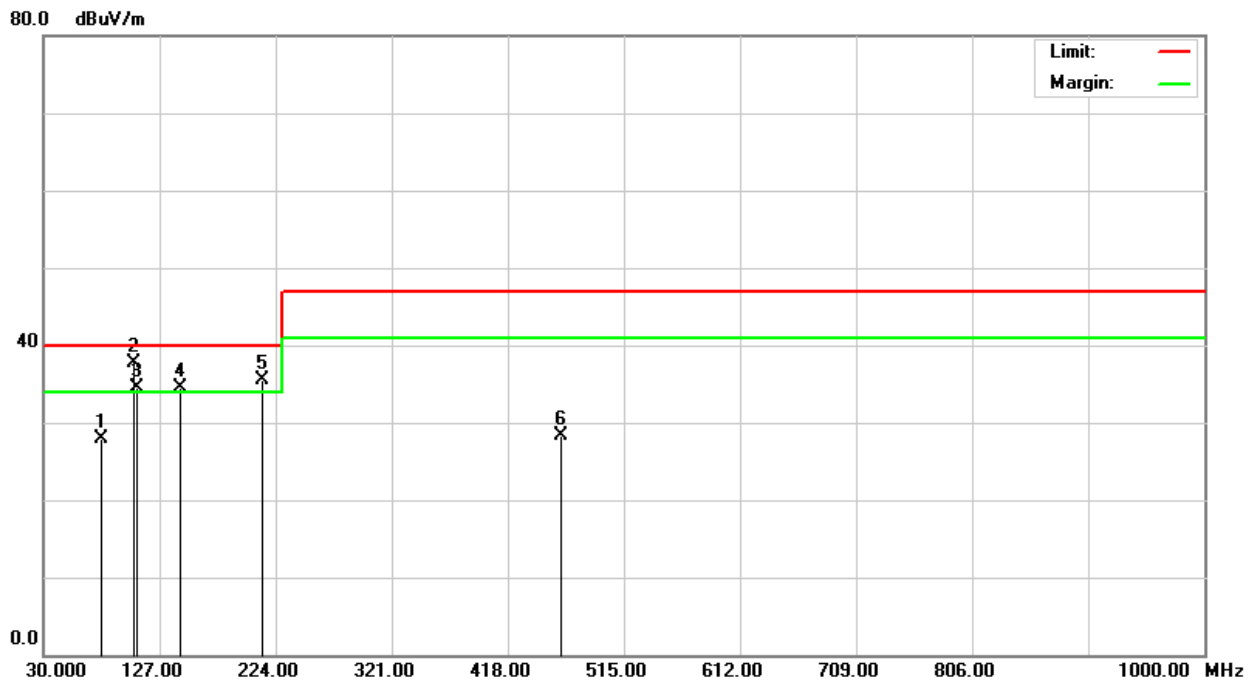

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
79.1200	41.10	-13.19	27.91	40.00	-12.09	100	300	Q	V
105.3800	46.30	-8.52	37.78	40.00	-2.22	100	151	Q	V
108.2000	43.10	-8.59	34.51	40.00	-5.49	100	206	Q	V
144.0200	43.10	-8.56	34.54	40.00	-5.46	100	122	Q	V
213.0200	45.70	-10.24	35.46	40.00	-4.54	100	125	Q	V
461.9900	29.60	-1.27	28.33	47.00	-18.67	400	44	Q	V

**Note:** 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.  
2. P= Peak Reading; Q= Quasi-peak Reading.


<b>Model No.</b>	R4600-2A2	<b>Test Mode</b>	Mode 1 (24VDC / Normal Mode)
<b>Environmental Conditions</b>	25°C, 68% RH	<b>6dB Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Horizontal	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested by</b>	Ken Lin
<b>Standard</b>	FCC CLASS A W/ CISPR 22 CLASS A LIMIT	<b>Tested Date</b>	March 9, 2020

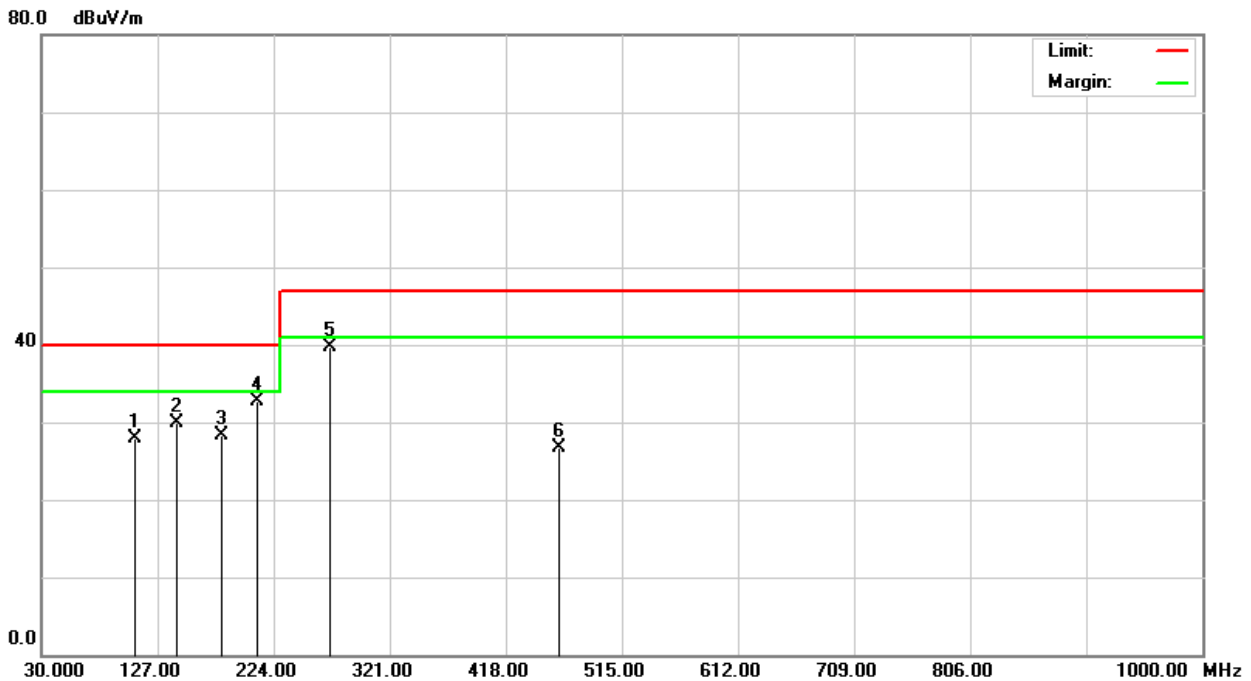

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
108.6000	36.40	-8.43	27.97	40.00	-12.03	400	238	Q	H
142.6000	38.30	-8.42	29.88	40.00	-10.12	400	45	Q	H
180.8000	38.50	-10.29	28.21	40.00	-11.79	400	176	Q	H
209.8000	42.70	-10.06	32.64	40.00	-7.36	400	228	Q	H
270.6000	46.10	-6.35	39.75	47.00	-7.25	400	124	Q	H
462.0000	28.00	-1.27	26.73	47.00	-20.27	100	214	Q	H

**Note:** 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.  
2. P= Peak Reading; Q= Quasi-peak Reading.


<b>Model No.</b>	R4600-2A2	<b>Test Mode</b>	Mode 2 (110VDC / Normal Mode)
<b>Environmental Conditions</b>	25°C, 68% RH	<b>6dB Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested by</b>	Ken Lin
<b>Standard</b>	FCC CLASS A W/ CISPR 22 CLASS A LIMIT	<b>Tested Date</b>	March 9, 2020

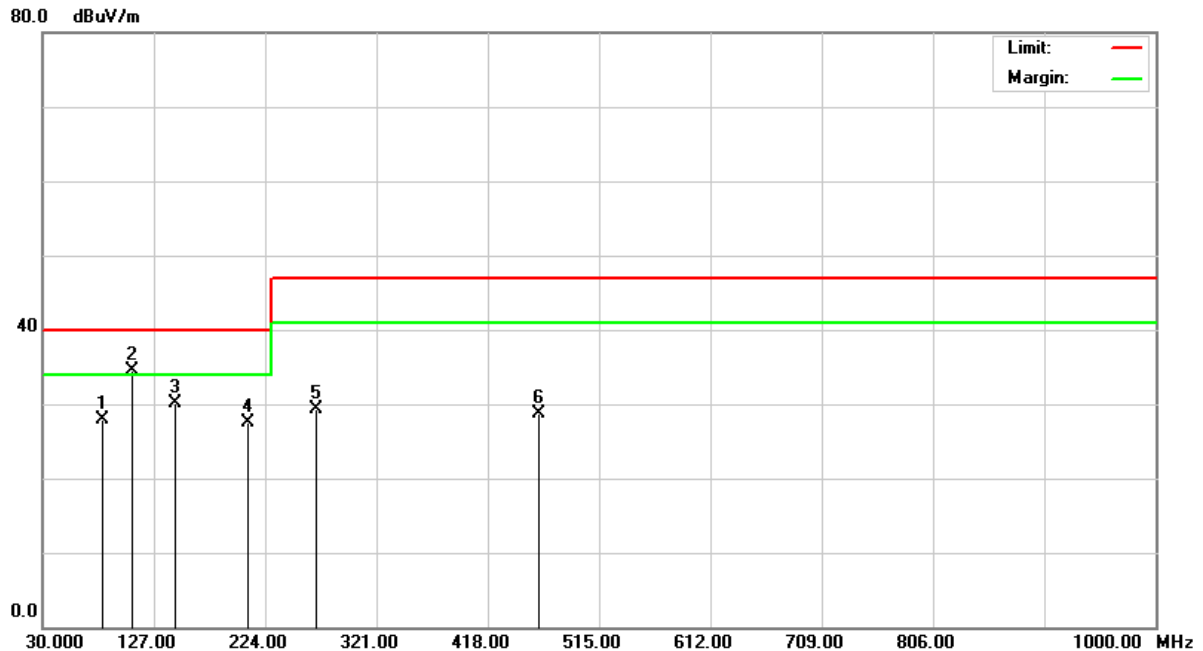

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
83.0000	40.40	-12.58	27.82	40.00	-12.18	100	204	Q	V
108.6000	42.90	-8.43	34.47	40.00	-5.53	100	186	Q	V
145.4000	39.00	-8.84	30.16	40.00	-9.84	100	335	Q	V
209.2000	37.60	-10.04	27.56	40.00	-12.44	100	156	Q	V
269.2000	35.50	-6.29	29.21	47.00	-17.79	100	105	Q	V
462.0000	29.90	-1.27	28.63	47.00	-18.37	400	48	Q	V

**Note:** 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.  
2. P= Peak Reading; Q= Quasi-peak Reading.

<b>Model No.</b>	R4600-2A2	<b>Test Mode</b>	Mode 2 (110VDC / Normal Mode)
<b>Environmental Conditions</b>	25°C, 68% RH	<b>6dB Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Horizontal	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested by</b>	Ken Lin
<b>Standard</b>	FCC CLASS A W/ CISPR 22 CLASS A LIMIT	<b>Tested Date</b>	March 9, 2020

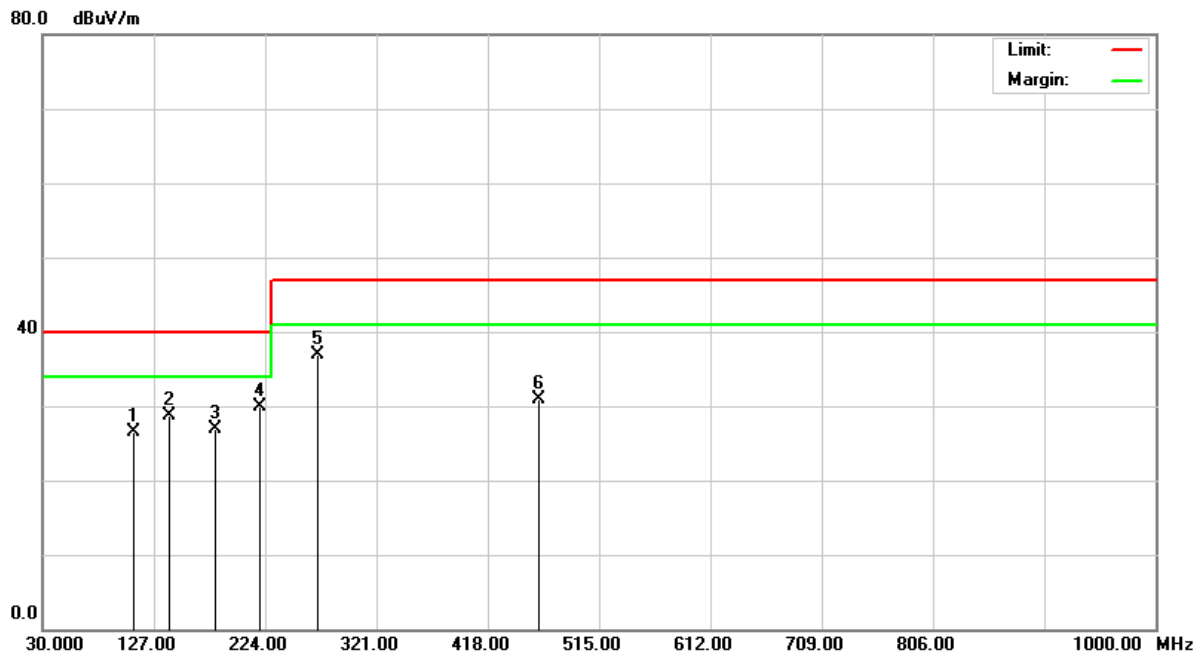

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
108.9300	34.90	-8.30	26.60	40.00	-13.40	400	193	Q	H
140.5200	37.20	-8.43	28.77	40.00	-11.23	400	344	Q	H
180.7899	37.10	-10.29	26.81	40.00	-13.19	400	218	Q	H
220.0100	39.90	-9.93	29.97	40.00	-10.03	400	143	Q	H
270.2500	43.30	-6.36	36.94	47.00	-10.06	400	316	Q	H
462.0000	32.10	-1.27	30.83	47.00	-16.17	100	254	Q	H


**Note:** 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.  
2. P= Peak Reading; Q= Quasi-peak Reading.

Report No.: T210113D05-D

Ref No.: T200717D02-D

**Above 1GHz**

<b>Model No.</b>	R4600-2A2	<b>Test Mode</b>	Mode 1 (24VDC / Normal Mode)
<b>Environmental Conditions</b>	22°C, 63% RH	<b>6dB Bandwidth</b>	1 MHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	3m
<b>Highest frequency generated or used</b>	2700MHz	<b>Upper frequency</b>	18000MHz
<b>Detector Function</b>	Peak and average.	<b>Tested by</b>	Jacky Lin
<b>Standard</b>	FCC CLASS A	<b>Tested Date</b>	March 4, 2020

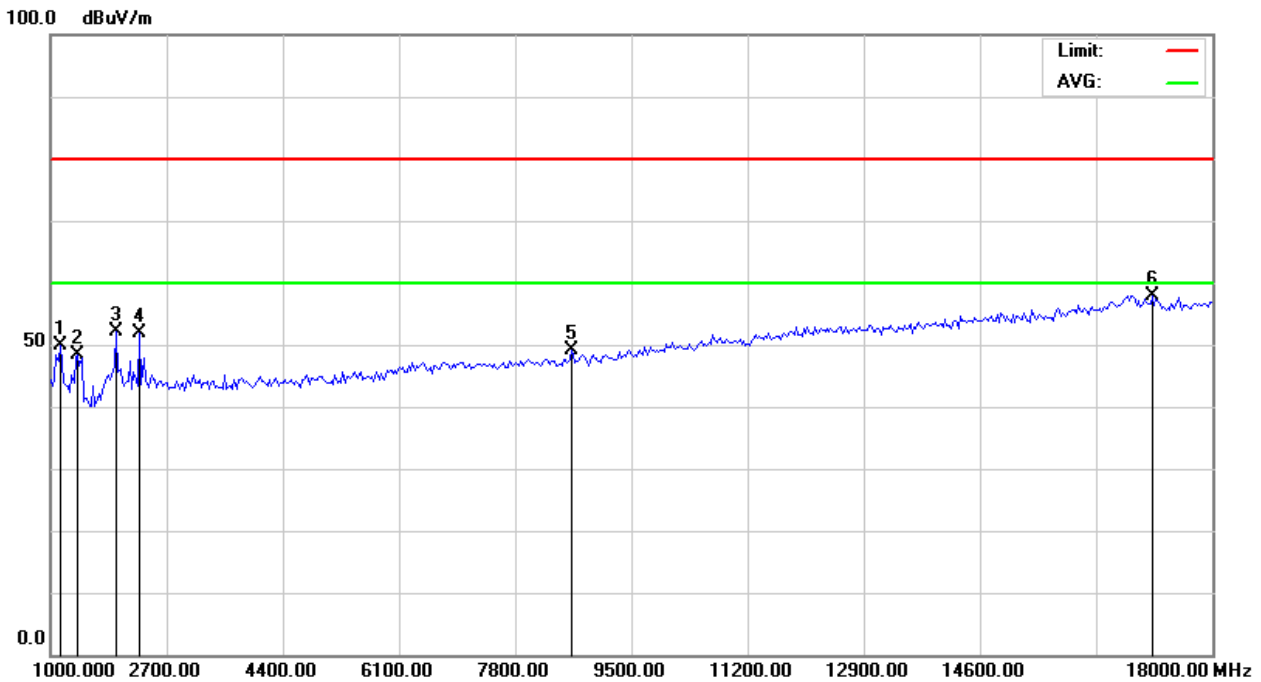


Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1141.667	56.79	-6.82	49.97	80.00	-30.03	P	V
1396.667	55.31	-6.84	48.47	80.00	-31.53	P	V
1963.333	55.05	-2.82	52.23	80.00	-27.77	P	V
2303.333	54.92	-2.94	51.98	80.00	-28.02	P	V
8621.667	46.01	3.09	49.10	80.00	-30.90	P	V
17121.667	46.13	11.85	57.98	80.00	-22.02	P	V

Note: 1. P= Peak Reading; A= Average Reading.

Report No.: T210113D05-D

Ref No.: T200717D02-D

<b>Model No.</b>	R4600-2A2	<b>Test Mode</b>	Mode 1 (24VDC / Normal Mode)
<b>Environmental Conditions</b>	22°C, 63% RH	<b>6dB Bandwidth</b>	1 MHz
<b>Antenna Pole</b>	Horizontal	<b>Antenna Distance</b>	3m
<b>Highest frequency generated or used</b>	2700MHz	<b>Upper frequency</b>	18000MHz
<b>Detector Function</b>	Peak and average.	<b>Tested by</b>	Jacky Lin
<b>Standard</b>	FCC CLASS A	<b>Tested Date</b>	March 4, 2020

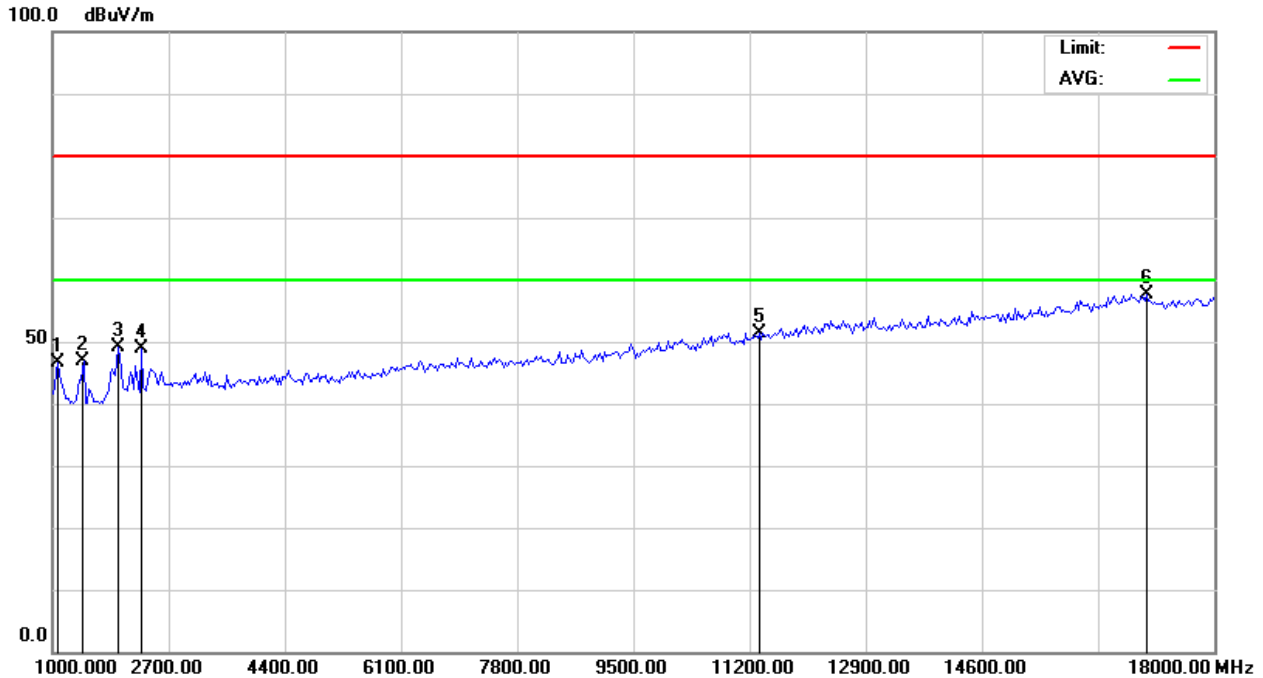

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1085.000	53.90	-7.35	46.55	80.00	-33.45	P	H
1453.333	53.62	-6.85	46.77	80.00	-33.23	P	H
1963.333	51.92	-2.82	49.10	80.00	-30.90	P	H
2303.333	51.81	-2.94	48.87	80.00	-31.13	P	H
11341.667	45.02	6.34	51.36	80.00	-28.64	P	H
17008.333	45.74	11.97	57.71	80.00	-22.29	P	H

Note: 1. P= Peak Reading; A= Average Reading.





**Report No.:** T210113D05-D

**Ref No.:** T200717D02-D

Page: 25 / 25  
Rev.: 04

**-----End of Test Report-----**