

FCC PART 15.247

TEST REPORT

For

ZIONCOM ELECTRONICS (SHENZHEN) LTD.

Building A1~A2, Lantian Science and Technology Park, Xinyu Road Xinqiao Henggang Block Shajing Street, Baoan District, Shenzhen City, China

FCC ID: X7D-IP04229

Report Type: Original Report	Product Type: 150Mbps Wireless N Router
Test Engineer: Dean Liu	<i>Dean Liu</i>
Report Number: RDG141023001-00	
Report Date: 2014-10-31	
Reviewed By: Sula Huang RF Engineer	<i>Sula Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	36

APPLICABLE STANDARD36
TEST PROCEDURE36
TEST EQUIPMENT LIST AND DETAILS.....36
TEST DATA36

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....38
APPLICABLE STANDARD38
TEST PROCEDURE38
TEST EQUIPMENT LIST AND DETAILS.....38
TEST DATA38

FCC §15.247(e) - POWER SPECTRAL DENSITY43
APPLICABLE STANDARD43
TEST PROCEDURE43
TEST EQUIPMENT LIST AND DETAILS.....43
TEST DATA43

DECLARATION LETTER51

FEMVAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The ZIONCOM ELECTRONICS (SHENZHEN) LTD.'s product, model number: N150RT (FCC ID: X7D-IP04229) or ("EUT") in this report is a 150Mbps Wireless N Router, which was measured approximately: 14.5 cm (L) x7.5 cm (W) x 3.0 cm (H), rated input voltage: DC 9.0V from adapter.

Adapter information: KUANTEN
Model: SSA021F090050USD
Input: AC100-240V, 50/60Hz, 0.2A
Out put: DC 9V, 0.5A

Note: The series product, model N150RT, IP04229 are electrically identical, the only difference between them is the model name, we selected N150RT for fully testing, the details was explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 141023001 (Assigned by BACL.Dongguan). The EUT was received on 2014-10-23.*

Objective

This report is prepared on behalf of ZIONCOM ELECTRONICS (SHENZHEN) LTD. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer. For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with Channel 1, 6 and 11. For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software “MP_v1.1.1” was used for testing, which was provided by manufacturer. The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Test Mode	Test Software Version	MP_v1.1.1		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting	52	51	50
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting	52	51	50
802.11n ht20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	53	51	49
802.11n ht40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	54	52	51


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	Yes	No	1.2	ParallelPort of Laptop	Printer
Keyboard Cable	Yes	Yes	1.8	USB Port of Laptop	Keyboard
RJ45 Cable*1	No	No	1.5	EUT	Laptop
RJ45 Cable*4	No	No	10	EUT	Load

Block Diagram of Test Setup

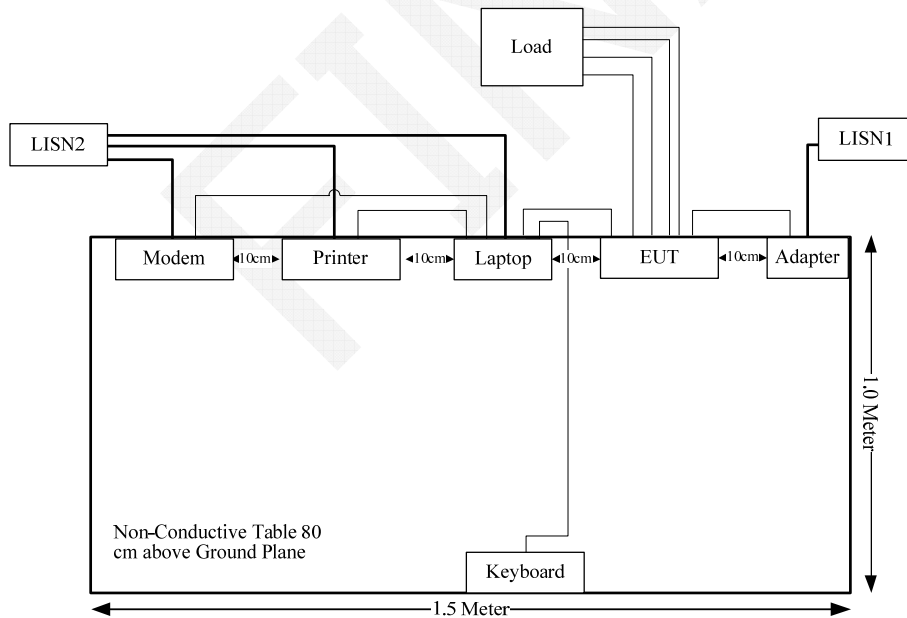

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2462	5.0	3.16	20.90	123.03	20	0.077	1.0
802.11g	2462	5.0	3.16	20.47	111.43	20	0.070	1.0
802.11n HT20	2412	5.0	3.16	20.41	109.90	20	0.069	1.0
802.11n HT40	2422	5.0	3.16	20.87	122.18	20	0.077	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

This product used one external un-detachable antenna, the maximum gain is 5.0 dBi, which fulfill the requirement of this section, please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

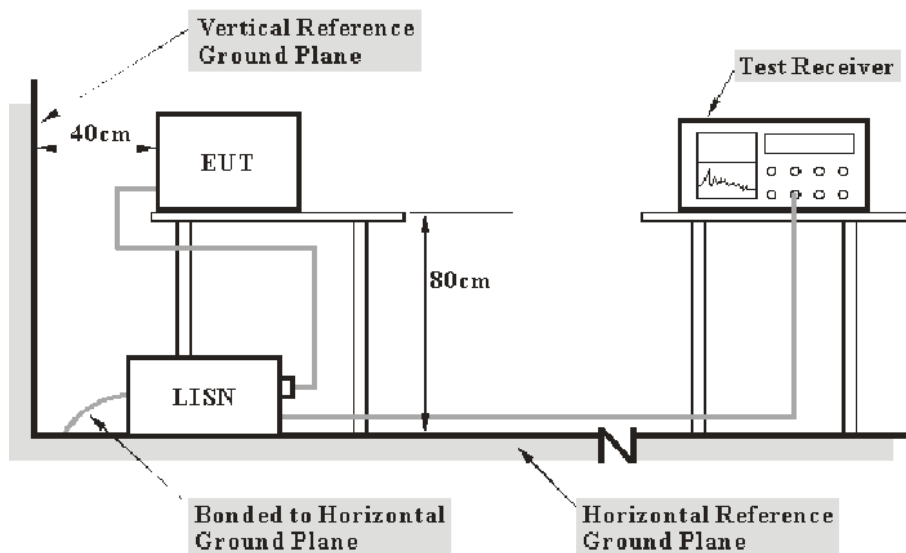

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of EUT was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter of EUT was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-20
R&S	L.I.S.N	ESH3-Z5	843331/015	N/A	N/A
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

7.4 dB at 0.399703 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	27.2 °C
Relative Humidity:	51 %
ATM Pressure:	101 kPa

The testing was performed by Dean Liu on 2014-10-24.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

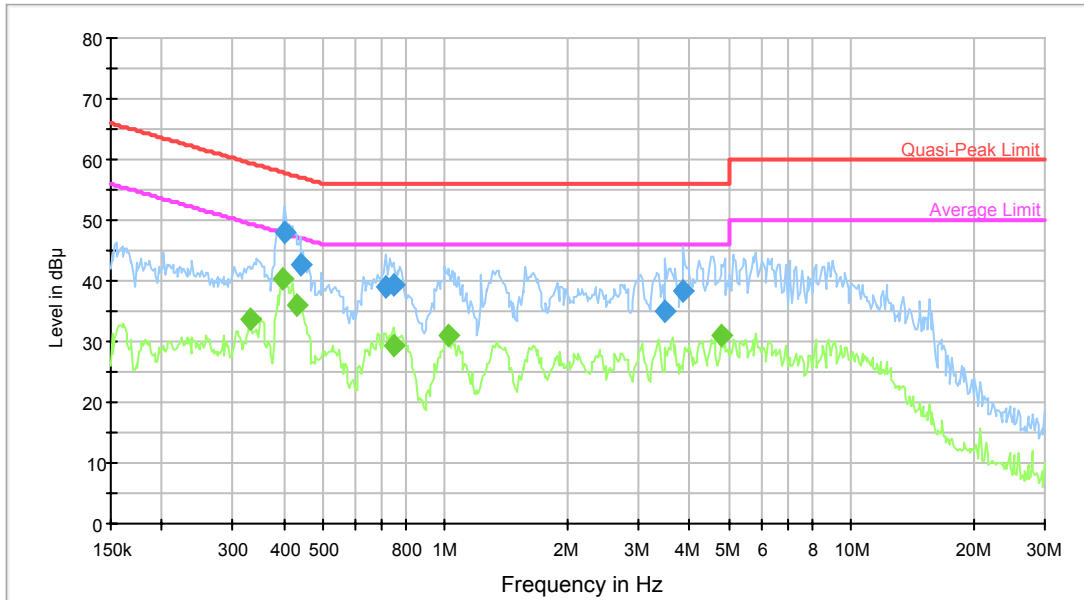

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.402900	47.9	9.000	L1	10.6	9.9	57.8	Compliance
0.439808	42.7	9.000	L1	10.5	14.3	57.1	Compliance
0.715082	39.2	9.000	L1	10.6	16.8	56.0	Compliance
0.744147	39.5	9.000	L1	10.5	16.5	56.0	Compliance
3.491417	35.2	9.000	L1	10.7	20.8	56.0	Compliance
3.872475	38.4	9.000	L1	10.7	17.6	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.330129	33.8	9.000	L1	10.7	15.6	49.4	Compliance
0.399703	40.5	9.000	L1	10.6	7.4	47.9	Compliance
0.432855	36.1	9.000	L1	10.5	11.1	47.2	Compliance
0.744147	29.5	9.000	L1	10.5	16.5	46.0	Compliance
1.023481	30.9	9.000	L1	10.4	15.1	46.0	Compliance
4.802010	30.9	9.000	L1	10.7	15.1	46.0	Compliance

AC120 V, 60 Hz, Neutral:

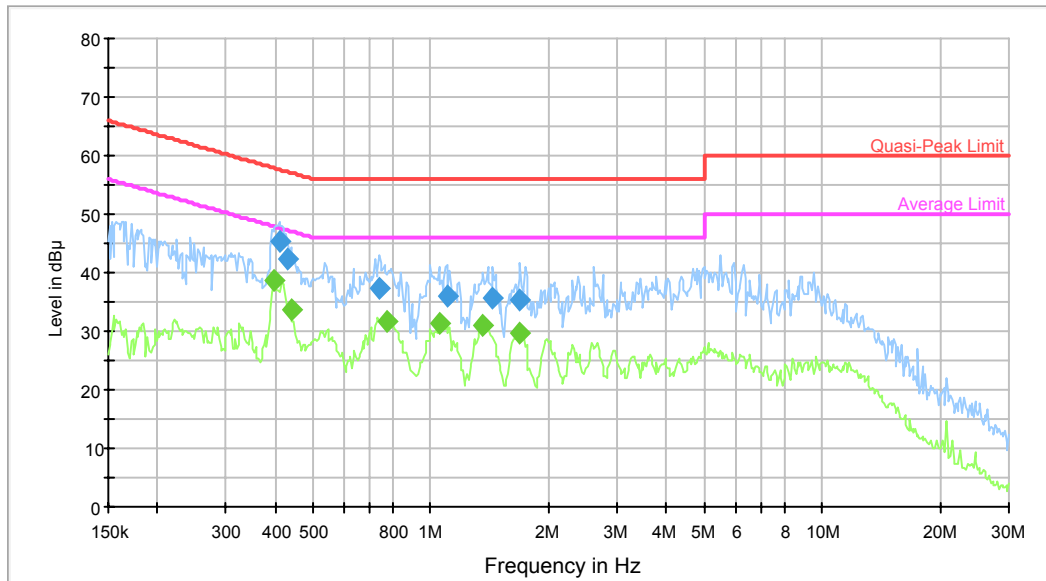

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.409372	45.3	9.000	N	10.7	12.3	57.7	Compliance
0.432855	42.3	9.000	N	10.6	14.9	57.2	Compliance
0.738241	37.5	9.000	N	10.6	18.5	56.0	Compliance
1.099574	36.1	9.000	N	10.5	19.9	56.0	Compliance
1.441726	35.6	9.000	N	10.5	20.4	56.0	Compliance
1.690804	35.3	9.000	N	10.5	20.7	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.399703	38.7	9.000	N	10.8	9.1	47.9	Compliance
0.439808	33.8	9.000	N	10.6	13.3	47.1	Compliance
0.774393	31.5	9.000	N	10.5	14.5	46.0	Compliance
1.048242	31.2	9.000	N	10.5	14.8	46.0	Compliance
1.363512	31.1	9.000	N	10.5	14.9	46.0	Compliance
1.677385	29.6	9.000	N	10.5	16.4	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

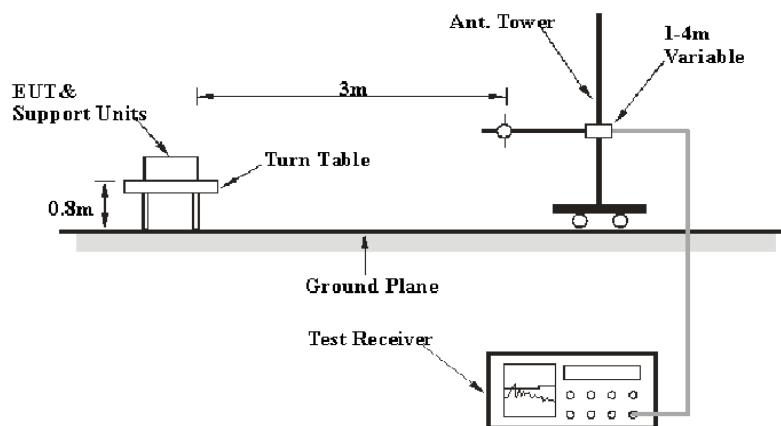

Above 1GHz:

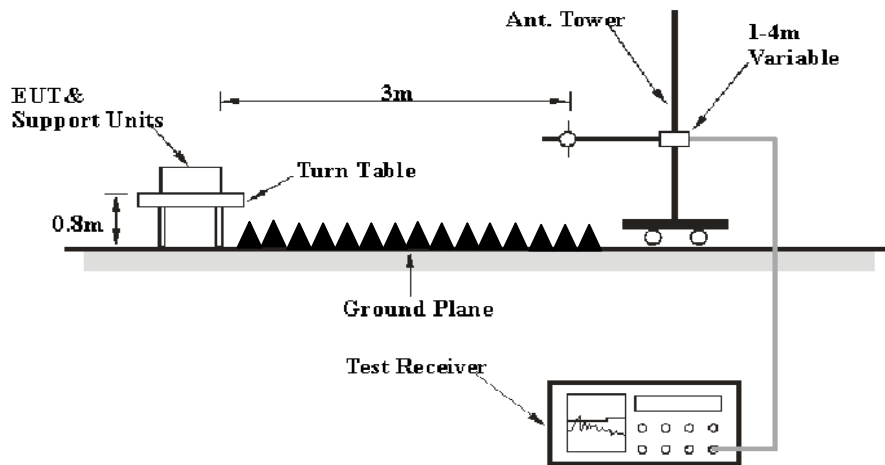

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of EUT was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter of EUT was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2014-05-09	2015-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2014-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

3.79 dB at 250MHz in the Vertical polarization for 802.11b Mode

Test Data

Environmental Conditions

Temperature:	24.5~25.7 °C
Relative Humidity:	50~55 %
ATM Pressure:	100.6~101.1 kPa

The testing was performed by Dean Liu from 2014-10-27 to 2014-10-31.

Test Mode: Transmitting
802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	67.53	PK	H	25.67	4.42	0.00	97.62	N/A	N/A
2412	64.84	AV	H	25.67	4.42	0.00	94.93	N/A	N/A
2412	81.13	PK	V	25.67	4.42	0.00	111.22	N/A	N/A
2412	77.85	AV	V	25.67	4.42	0.00	107.94	N/A	N/A
2390	28.76	PK	V	25.61	4.39	0.00	58.76	74.00	15.24
2390	17.54	AV	V	25.61	4.39	0.00	47.54	54.00	6.46
4824	36.55	PK	V	30.64	6.03	27.41	45.81	74.00	28.19
4824	31.84	AV	V	30.64	6.03	27.41	41.10	54.00	12.90
7236	32.95	PK	V	34.17	7.47	25.90	48.69	74.00	25.31
7236	20.78	AV	V	34.17	7.47	25.90	36.52	54.00	17.48
9648	30.17	PK	V	36.06	8.81	27.46	47.58	74.00	26.42
9648	19.44	AV	V	36.06	8.81	27.46	36.85	54.00	17.15
12060	30.45	PK	V	37.84	9.07	24.37	52.99	74.00	21.01
12060	19.02	AV	V	37.84	9.07	24.37	41.56	54.00	12.44
250	49.60	QP	V	12.18	1.92	21.49	42.21	46.00	3.79*
Middle Channel: 2437 MHz									
2437	68.69	PK	H	25.74	4.41	0.00	98.84	N/A	N/A
2437	65.33	AV	H	25.74	4.41	0.00	95.48	N/A	N/A
2437	83.01	PK	V	25.74	4.41	0.00	113.16	N/A	N/A
2437	79.63	AV	V	25.74	4.41	0.00	109.78	N/A	N/A
4874	35.32	PK	V	30.77	6.09	27.42	44.76	74.00	29.24
4874	31.81	AV	V	30.77	6.09	27.42	41.25	54.00	12.75
7311	32.19	PK	V	34.35	7.51	25.88	48.17	74.00	25.83
7311	20.28	AV	V	34.35	7.51	25.88	36.26	54.00	17.74
9748	31.47	PK	V	36.30	8.83	27.24	49.36	74.00	24.64
9748	19.27	AV	V	36.30	8.83	27.24	37.16	54.00	16.84
12185	30.45	PK	V	37.72	9.16	24.35	52.98	74.00	21.02
12185	19.48	AV	V	37.72	9.16	24.35	42.01	54.00	11.99
2765	32.37	PK	V	26.59	5.21	27.54	36.63	74.00	37.37
2765	15.48	AV	V	26.59	5.21	27.54	19.74	54.00	34.26
250	49.20	QP	V	12.18	1.92	21.49	41.81	46.00	4.19*
High Channel: 2462 MHz									
2462	68.35	PK	H	25.80	4.43	0.00	98.58	N/A	N/A
2462	64.91	AV	H	25.80	4.43	0.00	95.14	N/A	N/A
2462	81.35	PK	V	25.80	4.43	0.00	111.58	N/A	N/A
2462	77.03	AV	V	25.80	4.43	0.00	107.26	N/A	N/A
2483.5	30.20	PK	V	25.86	4.49	0.00	60.55	74.00	13.45
2483.5	17.41	AV	V	25.86	4.49	0.00	47.76	54.00	6.24
4924	36.42	PK	V	30.90	5.97	27.43	45.86	74.00	28.14
4924	32.11	AV	V	30.90	5.97	27.43	41.55	54.00	12.45
7386	30.47	PK	V	34.53	7.55	25.86	46.69	74.00	27.31
7386	20.55	AV	V	34.53	7.55	25.86	36.77	54.00	17.23
9848	30.47	PK	V	36.54	8.85	26.94	48.92	74.00	25.08
9848	19.22	AV	V	36.54	8.85	26.94	37.67	54.00	16.33
12310	30.52	PK	V	37.59	9.24	24.82	52.53	74.00	21.47
12310	19.25	AV	V	37.59	9.24	24.82	41.26	54.00	12.74
250	49.30	QP	V	12.18	1.92	21.49	41.91	46.00	4.09*

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	64.22	PK	H	25.67	4.42	0.00	94.31	N/A	N/A
2412	54.09	AV	H	25.67	4.42	0.00	84.18	N/A	N/A
2412	77.61	PK	V	25.67	4.42	0.00	107.70	N/A	N/A
2412	67.89	AV	V	25.67	4.42	0.00	97.98	N/A	N/A
2390	32.89	PK	V	25.61	4.39	0.00	62.89	74.00	11.11
2390	17.95	AV	V	25.61	4.39	0.00	47.95	54.00	6.05*
4824	34.90	PK	V	30.64	6.03	27.41	44.16	74.00	29.84
4824	30.09	AV	V	30.64	6.03	27.41	39.35	54.00	14.65
7236	32.69	PK	V	34.17	7.47	25.90	48.43	74.00	25.57
7236	20.43	AV	V	34.17	7.47	25.90	36.17	54.00	17.83
9648	29.45	PK	V	36.06	8.81	27.46	46.86	74.00	27.14
9648	19.43	AV	V	36.06	8.81	27.46	36.84	54.00	17.16
12060	29.52	PK	V	37.84	9.07	24.37	52.06	74.00	21.94
12060	18.22	AV	V	37.84	9.07	24.37	40.76	54.00	13.24
250	49.40	QP	V	12.18	1.92	21.49	42.01	46.00	3.99*
Middle Channel: 2437 MHz									
2437	63.98	PK	H	25.74	4.41	0.00	94.13	N/A	N/A
2437	54.02	AV	H	25.74	4.41	0.00	84.17	N/A	N/A
2437	77.25	PK	V	25.74	4.41	0.00	107.40	N/A	N/A
2437	67.83	AV	V	25.74	4.41	0.00	97.98	N/A	N/A
4874	35.75	PK	V	30.77	6.09	27.42	45.19	74.00	28.81
4874	31.55	AV	V	30.77	6.09	27.42	40.99	54.00	13.01
7311	32.19	PK	V	34.35	7.51	25.88	48.17	74.00	25.83
7311	20.23	AV	V	34.35	7.51	25.88	36.21	54.00	17.79
9748	31.41	PK	V	36.30	8.83	27.24	49.30	74.00	24.70
9748	19.24	AV	V	36.30	8.83	27.24	37.13	54.00	16.87
12185	30.42	PK	V	37.72	9.16	24.35	52.95	74.00	21.05
12185	19.41	AV	V	37.72	9.16	24.35	41.94	54.00	12.06
2765	32.32	PK	V	26.59	5.21	27.54	36.58	74.00	37.42
2765	15.47	AV	V	26.59	5.21	27.54	19.73	54.00	34.27
250	49.10	QP	V	12.18	1.92	21.49	41.71	46.00	4.29*
High Channel: 2462 MHz									
2462	63.74	PK	H	25.80	4.43	0.00	93.97	N/A	N/A
2462	53.71	AV	H	25.80	4.43	0.00	83.94	N/A	N/A
2462	77.16	PK	V	25.80	4.43	0.00	107.39	N/A	N/A
2462	67.76	AV	V	25.80	4.43	0.00	97.99	N/A	N/A
2483.5	34.48	PK	V	25.86	4.49	0.00	64.83	74.00	9.17
2483.5	19.70	AV	V	25.86	4.49	0.00	50.05	54.00	3.95*
4924	35.01	PK	V	30.90	5.97	27.43	44.45	74.00	29.55
4924	30.82	AV	V	30.90	5.97	27.43	40.26	54.00	13.74
7386	30.41	PK	V	34.53	7.55	25.86	46.63	74.00	27.37
7386	20.50	AV	V	34.53	7.55	25.86	36.72	54.00	17.28
9848	30.38	PK	V	36.54	8.85	26.94	48.83	74.00	25.17
9848	19.14	AV	V	36.54	8.85	26.94	37.59	54.00	16.41
12310	30.51	PK	V	37.59	9.24	24.82	52.52	74.00	21.48
12310	19.23	AV	V	37.59	9.24	24.82	41.24	54.00	12.76
250	49.20	QP	V	12.18	1.92	21.49	41.81	46.00	4.19*

*Within measurement uncertainty!

802.11 n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	62.74	PK	H	25.67	4.42	0.00	92.83	N/A	N/A
2412	53.07	AV	H	25.67	4.42	0.00	83.16	N/A	N/A
2412	76.44	PK	V	25.67	4.42	0.00	106.53	N/A	N/A
2412	57.11	AV	V	25.67	4.42	0.00	87.20	N/A	N/A
2390	32.97	PK	V	25.61	4.39	0.00	62.97	74.00	11.03
2390	16.71	AV	V	25.61	4.39	0.00	46.71	54.00	7.29
4824	34.90	PK	V	30.64	6.03	27.41	44.16	74.00	29.84
4824	31.74	AV	V	30.64	6.03	27.41	41.00	54.00	13.00
7236	32.80	PK	V	34.17	7.47	25.90	48.54	74.00	25.46
7236	20.13	AV	V	34.17	7.47	25.90	35.87	54.00	18.13
9648	30.77	PK	V	36.06	8.81	27.46	48.18	74.00	25.82
9648	19.04	AV	V	36.06	8.81	27.46	36.45	54.00	17.55
12060	29.71	PK	V	37.84	9.07	24.37	52.25	74.00	21.75
12060	18.51	AV	V	37.84	9.07	24.37	41.05	54.00	12.95
250	48.20	QP	V	12.18	1.92	21.49	40.81	46.00	5.19*
Middle Channel: 2437 MHz									
2437	63.18	PK	H	25.74	4.41	0.00	93.33	N/A	N/A
2437	53.77	AV	H	25.74	4.41	0.00	83.92	N/A	N/A
2437	76.42	PK	V	25.74	4.41	0.00	106.57	N/A	N/A
2437	67.61	AV	V	25.74	4.41	0.00	97.76	N/A	N/A
4874	35.11	PK	V	30.77	6.09	27.42	44.55	74.00	29.45
4874	30.14	AV	V	30.77	6.09	27.42	39.58	54.00	14.42
7311	32.19	PK	V	34.35	7.51	25.88	48.17	74.00	25.83
7311	20.05	AV	V	34.35	7.51	25.88	36.03	54.00	17.97
9748	31.24	PK	V	36.30	8.83	27.24	49.13	74.00	24.87
9748	19.83	AV	V	36.30	8.83	27.24	37.72	54.00	16.28
12185	31.83	PK	V	37.72	9.16	24.35	54.36	74.00	19.64
12185	18.99	AV	V	37.72	9.16	24.35	41.52	54.00	12.48
2765	32.37	PK	V	26.59	5.21	27.54	36.63	74.00	37.37
2765	15.48	AV	V	26.59	5.21	27.54	19.74	54.00	34.26
250	49.20	QP		12.18	1.92	21.49	41.81	46.00	4.19*
High Channel: 2462 MHz									
2462	63.07	PK	H	25.80	4.43	0.00	93.30	N/A	N/A
2462	53.98	AV	H	25.80	4.43	0.00	84.21	N/A	N/A
2462	76.10	PK	V	25.80	4.43	0.00	106.33	N/A	N/A
2462	66.97	AV	V	25.80	4.43	0.00	97.20	N/A	N/A
2483.5	31.38	PK	V	25.86	4.49	0.00	61.73	74.00	12.27
2483.5	17.60	AV	V	25.86	4.49	0.00	47.95	54.00	6.05
4924	35.73	PK	V	30.90	5.97	27.43	45.17	74.00	28.83
4924	31.08	AV	V	30.90	5.97	27.43	40.52	54.00	13.48
7386	32.49	PK	V	34.53	7.55	25.86	48.71	74.00	25.29
7386	21.37	AV	V	34.53	7.55	25.86	37.59	54.00	16.41
9848	31.38	PK	V	36.54	8.85	26.94	49.83	74.00	24.17
9848	19.25	AV	V	36.54	8.85	26.94	37.70	54.00	16.30
12310	31.08	PK	V	37.59	9.24	24.82	53.09	74.00	20.91
12310	18.17	AV	V	37.59	9.24	24.82	40.18	54.00	13.82
250	48.90	QP	V	12.18	1.92	21.49	41.51	46.00	4.49*

*Within measurement uncertainty!

802.11 n ht40 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	61.19	PK	H	25.70	4.41	0.00	91.30	N/A	N/A
2422	52.17	AV	H	25.70	4.41	0.00	82.28	N/A	N/A
2422	74.06	PK	V	25.70	4.41	0.00	104.17	N/A	N/A
2422	65.46	AV	V	25.70	4.41	0.00	95.57	N/A	N/A
2390	33.38	PK	V	25.61	4.39	0.00	63.38	74.00	10.62
2390	18.92	AV	V	25.61	4.39	0.00	48.92	54.00	5.08*
4844	34.36	PK	V	30.69	6.08	27.42	43.71	74.00	30.29
4844	30.73	AV	V	30.69	6.08	27.42	40.08	54.00	13.92
7266	32.47	PK	V	34.24	7.48	25.89	48.30	74.00	25.70
7266	20.94	AV	V	34.24	7.48	25.89	36.77	54.00	17.23
9688	31.04	PK	V	36.15	8.82	27.37	48.64	74.00	25.36
9688	19.17	AV	V	36.15	8.82	27.37	36.77	54.00	17.23
12110	30.18	PK	V	37.79	9.10	24.36	52.71	74.00	21.29
12110	18.35	AV	V	37.79	9.10	24.36	40.88	54.00	13.12
250	49.00	QP	V	12.18	1.92	21.49	41.61	46.00	4.39*
Middle Channel: 2437 MHz									
2437	61.25	PK	H	25.74	4.41	0.00	91.40	N/A	N/A
2437	52.21	AV	H	25.74	4.41	0.00	82.36	N/A	N/A
2437	74.09	PK	V	25.74	4.41	0.00	104.24	N/A	N/A
2437	65.55	AV	V	25.74	4.41	0.00	95.70	N/A	N/A
4874	35.14	PK	V	30.77	6.09	27.42	44.58	74.00	29.42
4874	30.15	AV	V	30.77	6.09	27.42	39.59	54.00	14.41
7311	32.27	PK	V	34.35	7.51	25.88	48.25	74.00	25.75
7311	20.24	AV	V	34.35	7.51	25.88	36.22	54.00	17.78
9748	31.38	PK	V	36.30	8.83	27.24	49.27	74.00	24.73
9748	19.92	AV	V	36.30	8.83	27.24	37.81	54.00	16.19
12185	31.83	PK	V	37.72	9.16	24.35	54.36	74.00	19.64
12185	19.12	AV	V	37.72	9.16	24.35	41.65	54.00	12.35
2765	32.53	PK	V	26.59	5.21	27.54	36.79	74.00	37.21
2765	16.24	AV	V	26.59	5.21	27.54	20.50	54.00	33.50
250	49.40	QP	V	12.18	1.92	21.49	42.01	46.00	3.99*
High Channel: 2452 MHz									
2452	61.02	PK	H	25.78	4.41	0.00	91.21	N/A	N/A
2452	52.37	AV	H	25.78	4.41	0.00	82.56	N/A	N/A
2452	74.19	PK	V	25.78	4.41	0.00	104.38	N/A	N/A
2452	65.57	AV	V	25.78	4.41	0.00	95.76	N/A	N/A
2483.5	30.69	PK	V	25.86	4.49	0.00	61.04	74.00	12.96
2483.5	18.94	AV	V	25.86	4.49	0.00	49.29	54.00	4.71*
4904	35.68	PK	V	30.85	6.06	27.43	45.16	74.00	28.84
4904	31.04	AV	V	30.85	6.06	27.43	40.52	54.00	13.48
7356	32.40	PK	V	34.45	7.53	25.87	48.51	74.00	25.49
7356	21.30	AV	V	34.45	7.53	25.87	37.41	54.00	16.59
9808	31.34	PK	V	36.44	8.84	27.09	49.53	74.00	24.47
9808	19.18	AV	V	36.44	8.84	27.09	37.37	54.00	16.63
12310	31.04	PK	V	37.59	9.24	24.82	53.05	74.00	20.95
12310	18.08	AV	V	37.59	9.24	24.82	40.09	54.00	13.91
250	48.90	QP	V	12.18	1.92	21.49	41.51	46.00	4.49*

*Within measurement uncertainty!

Conducted Spurious Emissions at Antenna Port


802.11b Low Channel

Fundamental

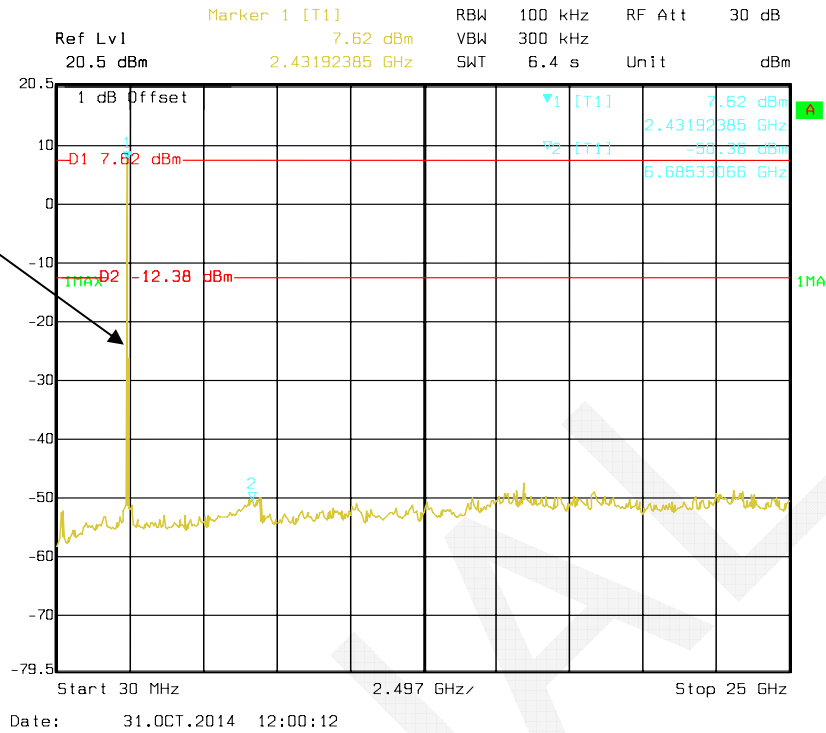


802.11b Middle Channel


Fundamental

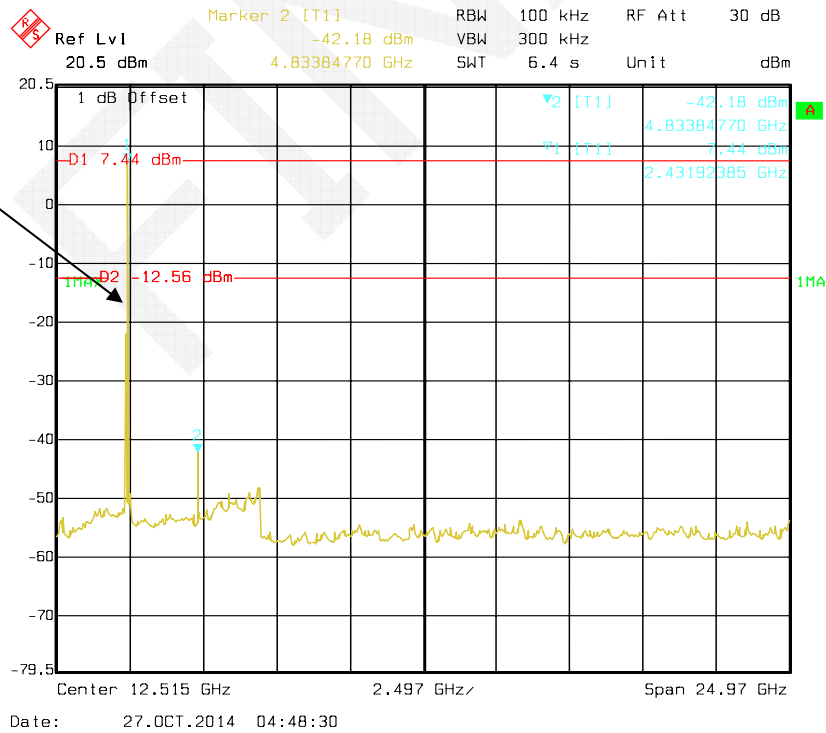


802.11b High Channel

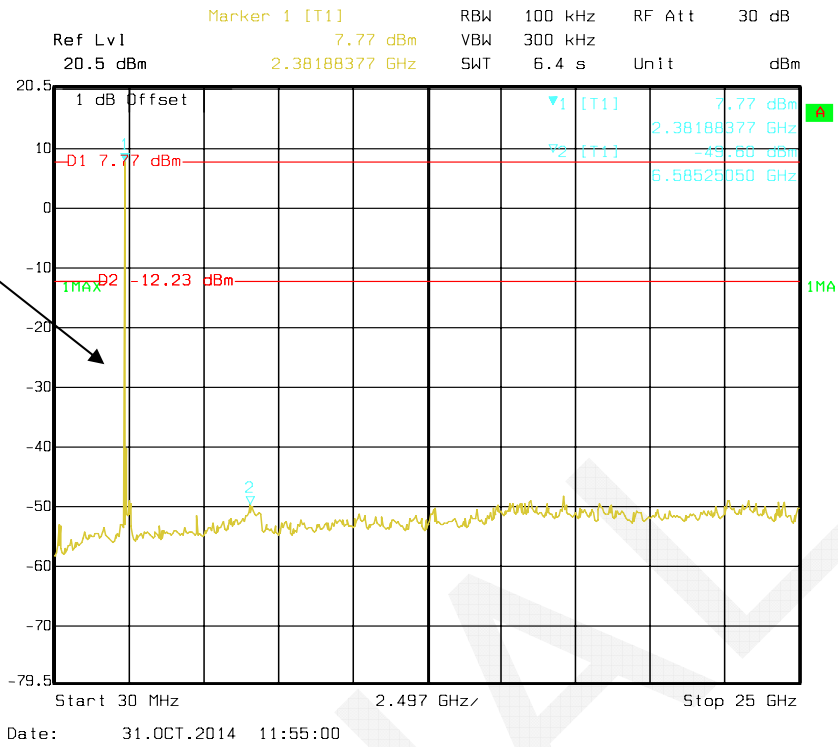


Fundamental




802.11g Low Channel

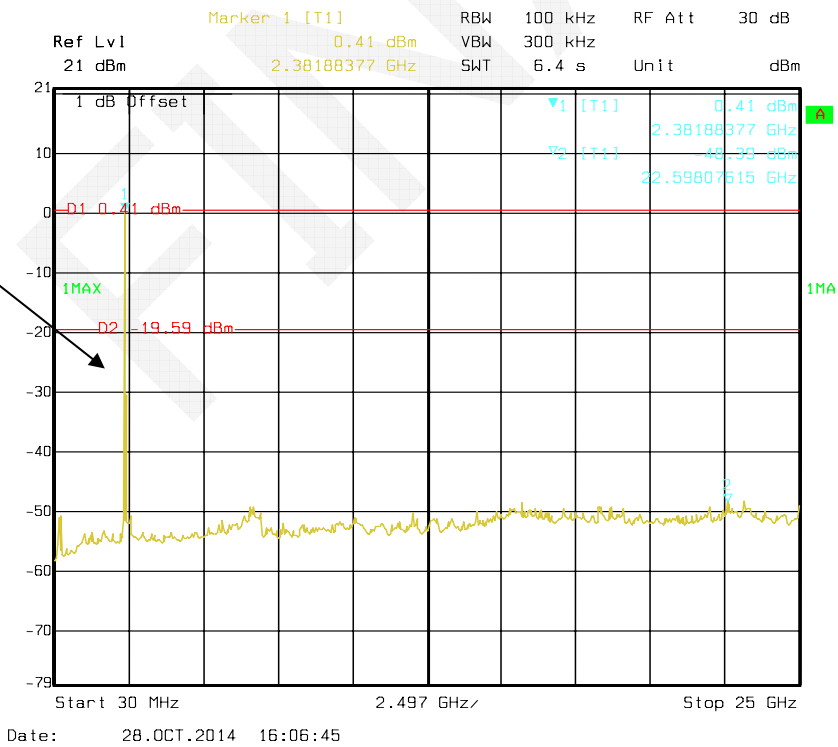

Fundamental




802.11g Middle Channel

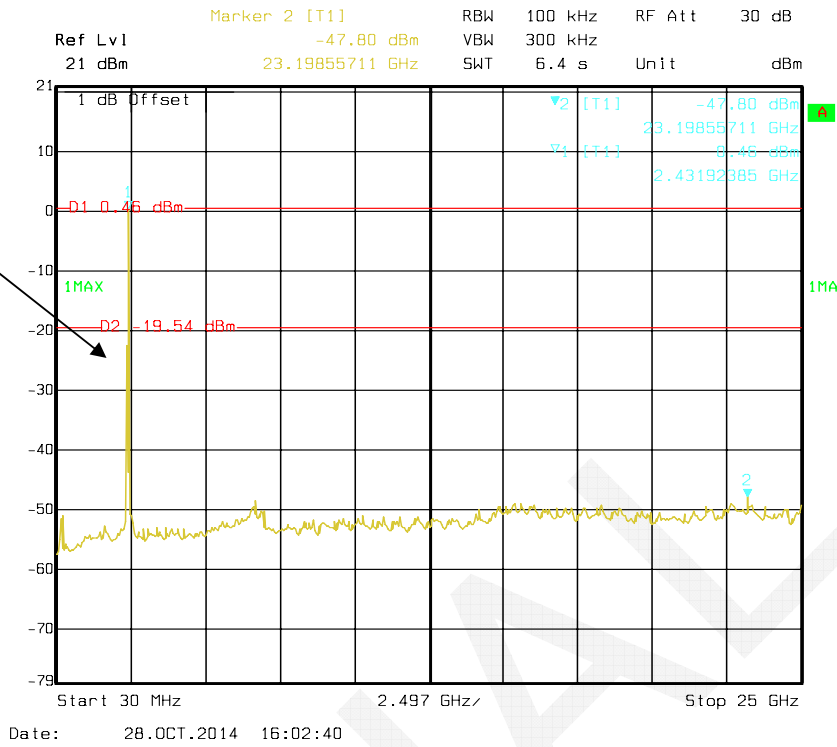

Fundamental




802.11g High Channel

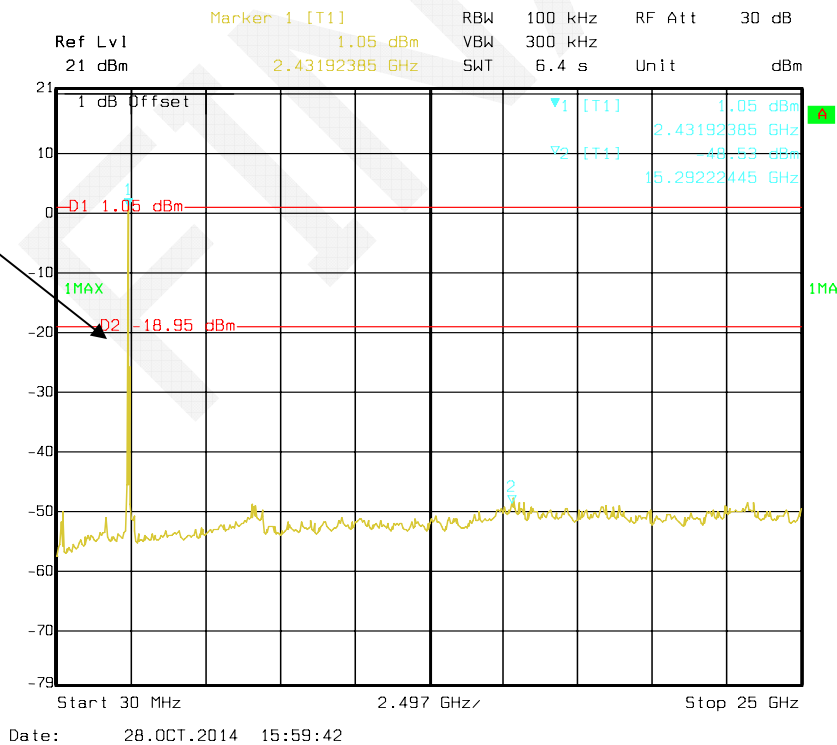


Fundamental




802.11n ht20 Low Channel

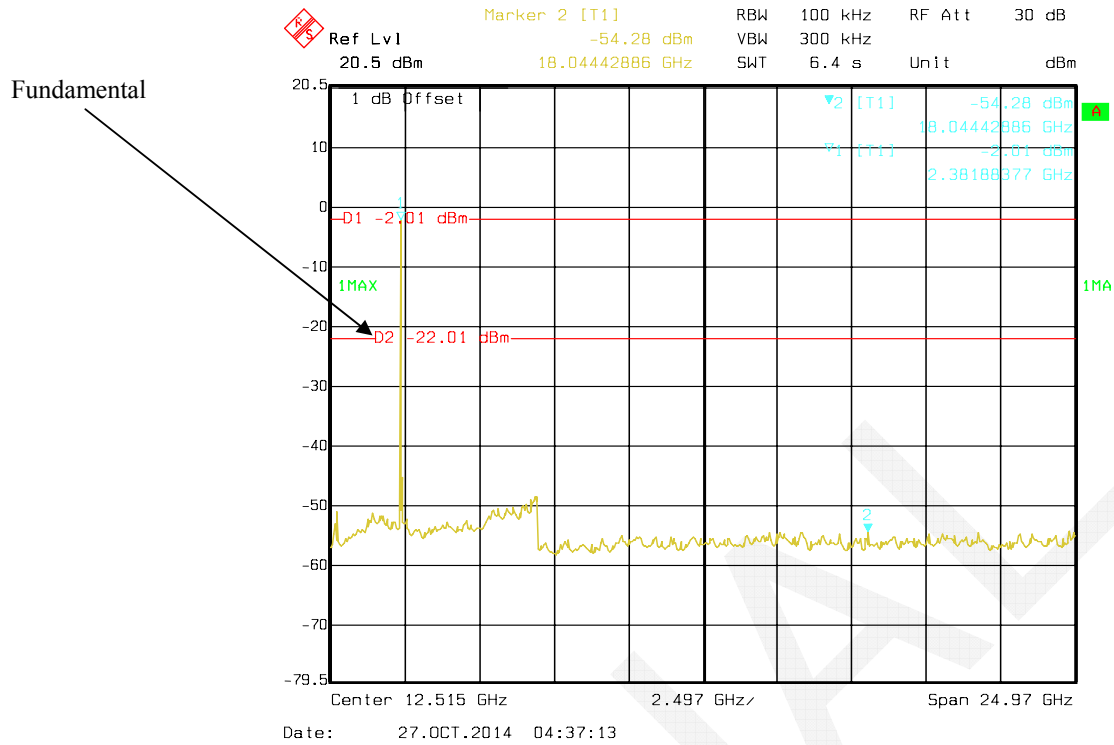

802.11n ht20 Middle Channel

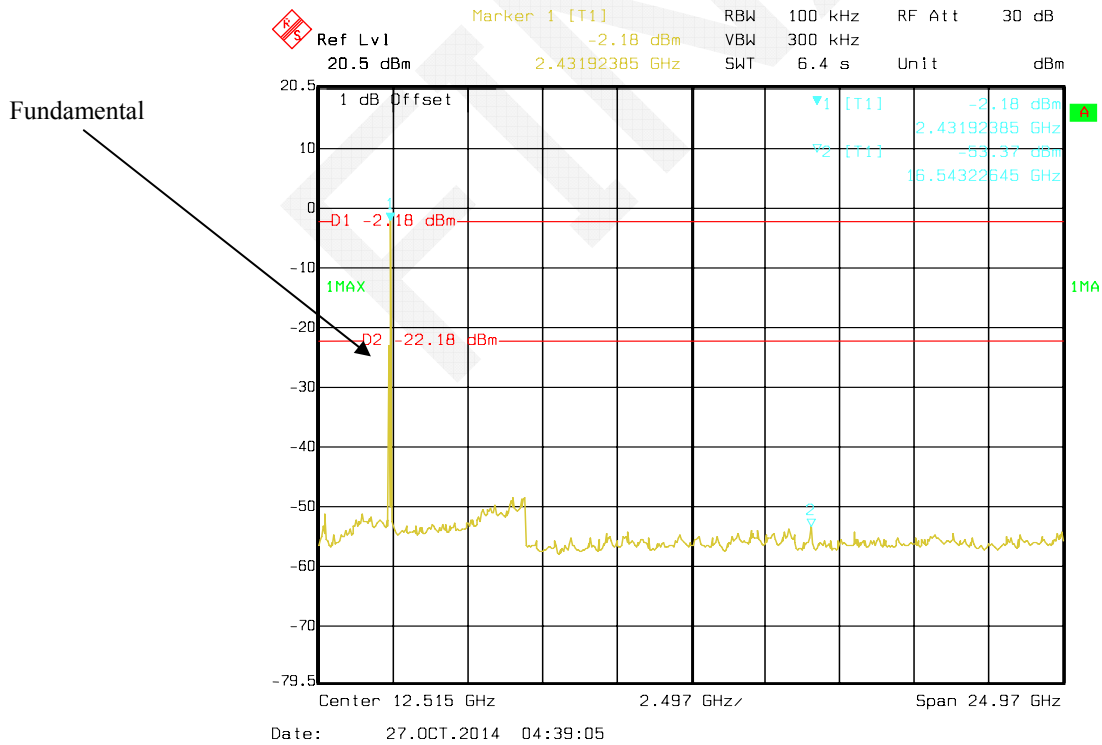


802.11n ht20 High Channel

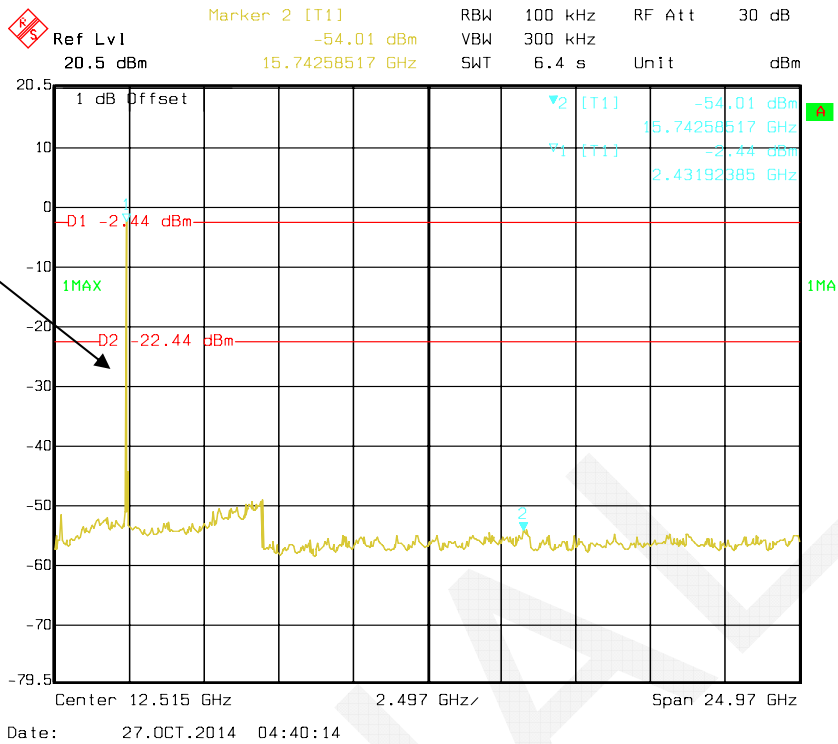

Fundamental




802.11n ht40 Low Channel

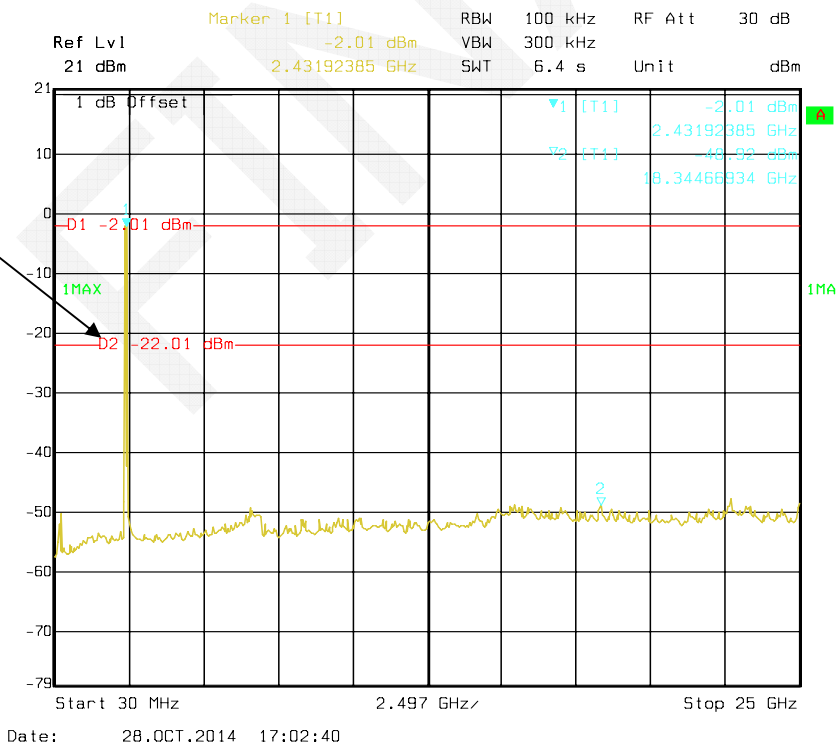


Fundamental



802.11n ht40 Middle Channel

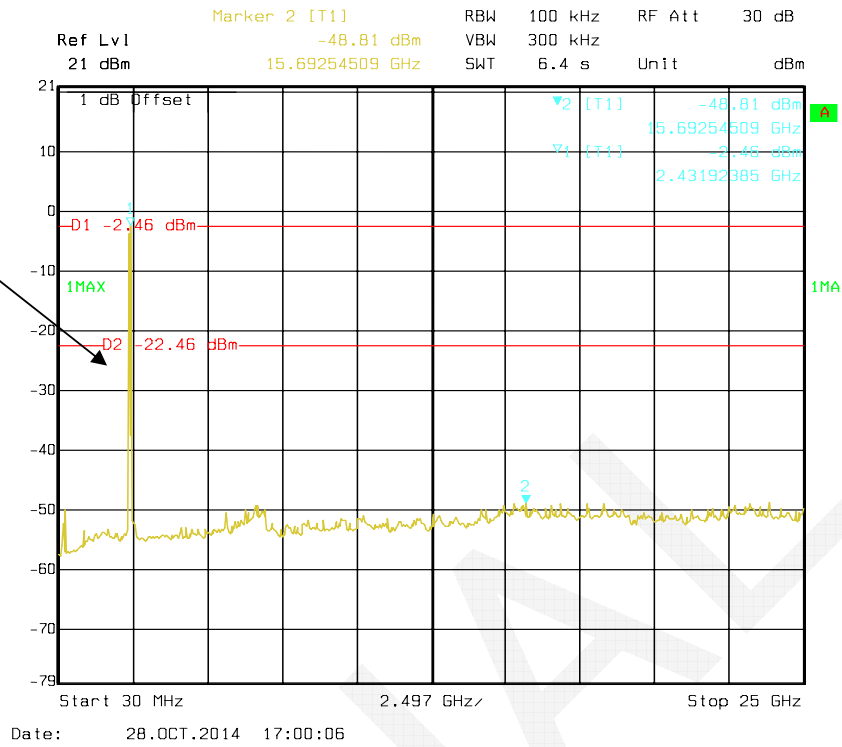

802.11n ht40 High Channel

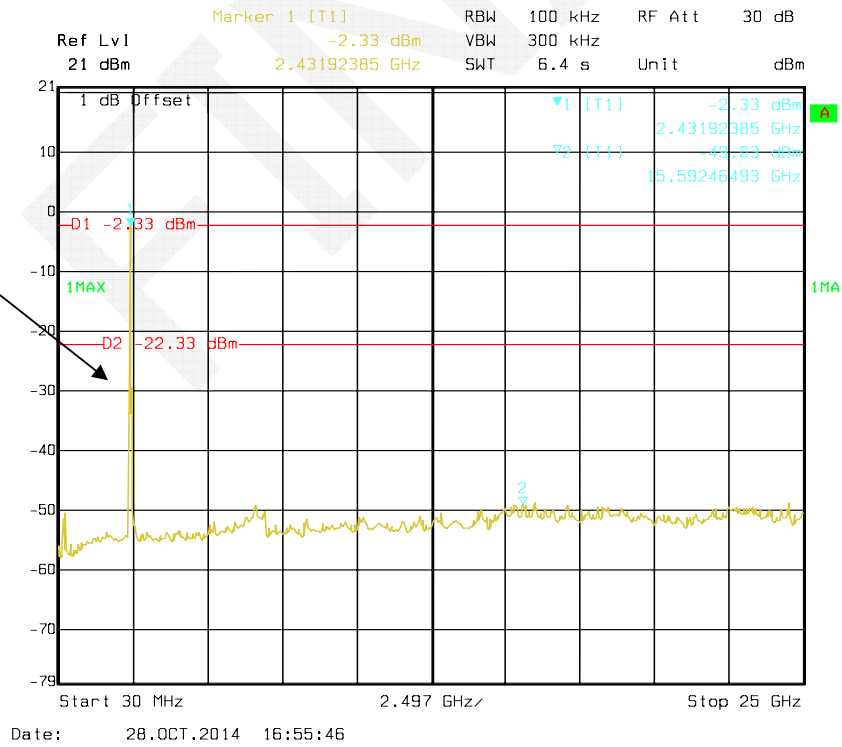

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.4~27.5 °C
Relative Humidity:	52 %
ATM Pressure:	100.9~101 kPa


The testing was performed by Dean Liu from 2014-10-26 to 2014-10-27.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (kHz)
802.11b	Low	2412	10.10	≥ 500
	Middle	2437	10.10	≥ 500
	High	2462	10.10	≥ 500
802.11g	Low	2412	16.51	≥ 500
	Middle	2437	16.59	≥ 500
	High	2462	16.59	≥ 500
802.11n ht20	Low	2412	17.87	≥ 500
	Middle	2437	17.79	≥ 500
	High	2462	17.79	≥ 500
802.11nht40	Low	2422	36.39	≥ 500
	Middle	2437	36.39	≥ 500
	High	2452	36.39	≥ 500


802.11b Low Channel

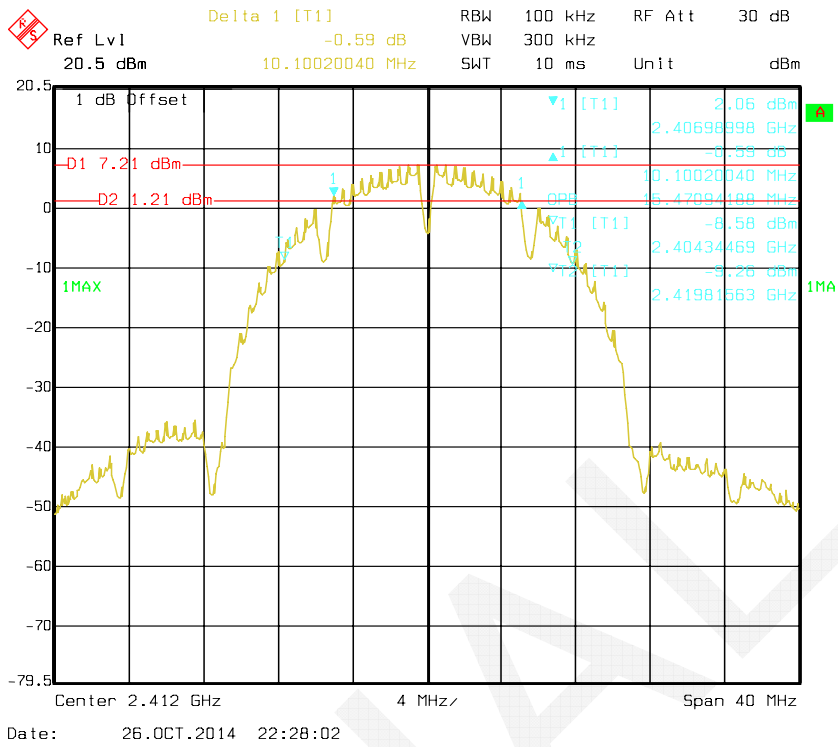


802.11b Middle Channel

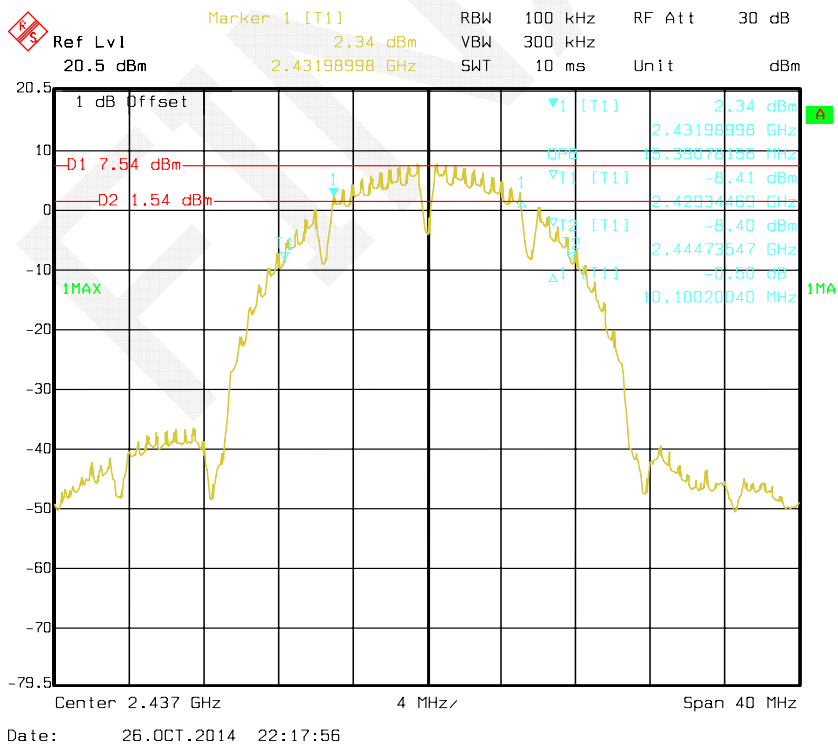


802.11b High Channel

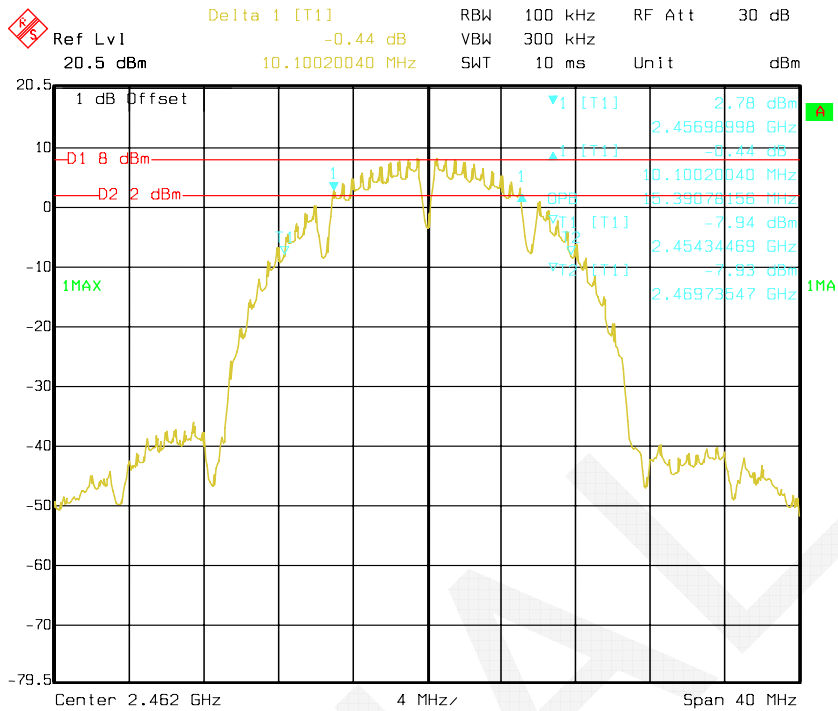


802.11g Low Channel

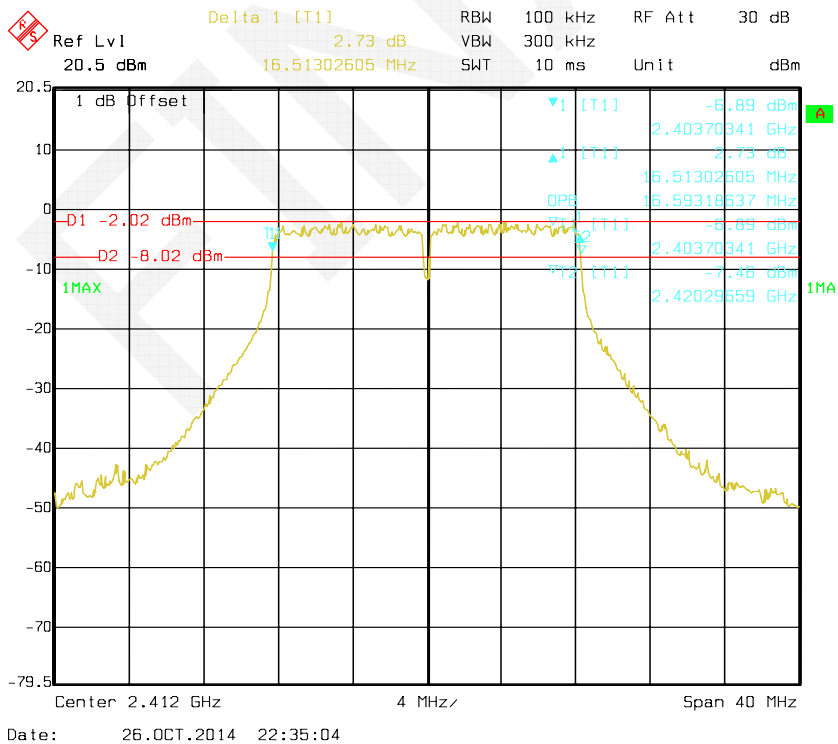


802.11g Middle Channel

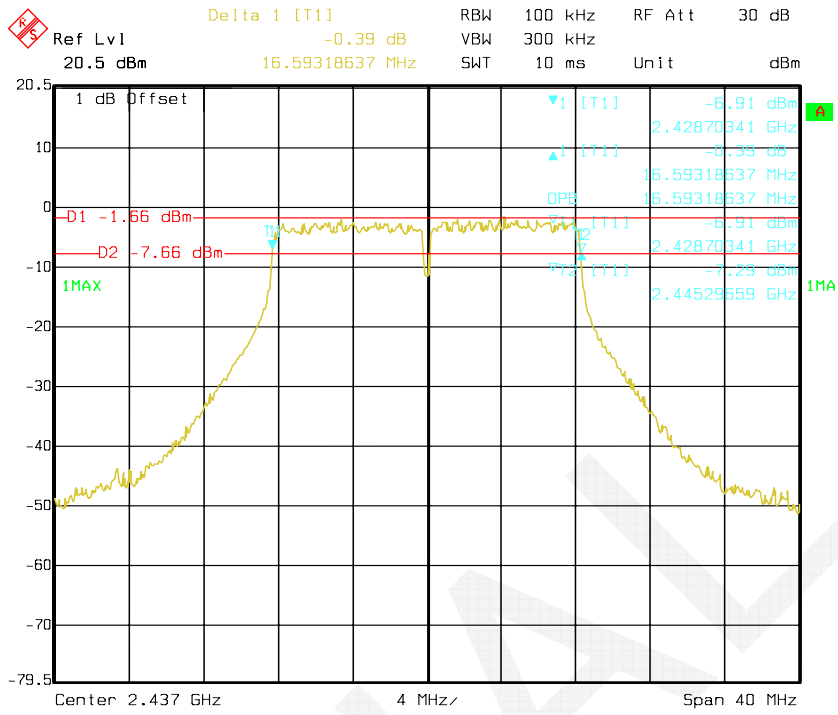


802.11g High Channel

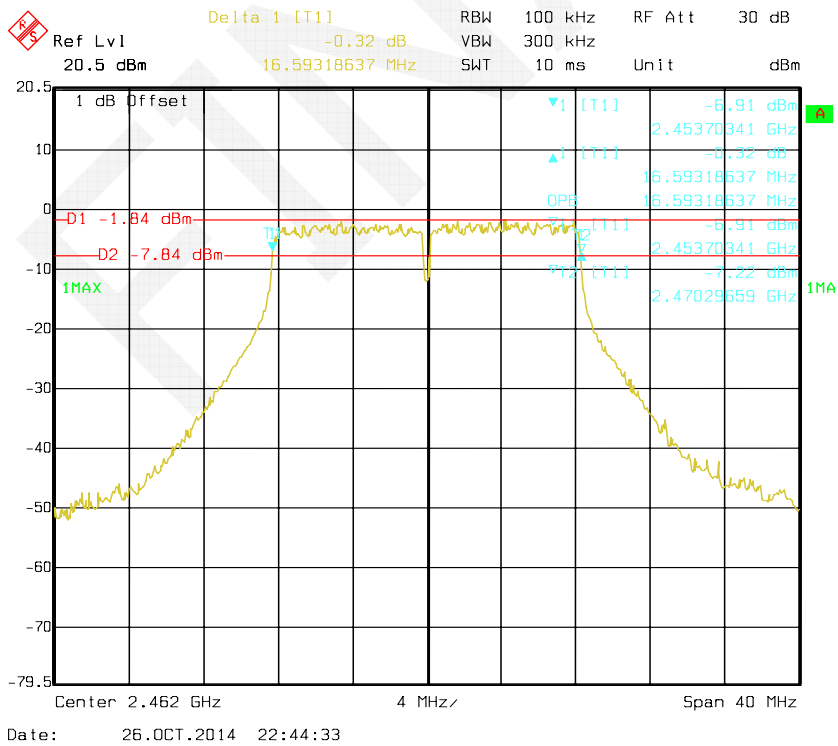


802.11n ht20 Low Channel

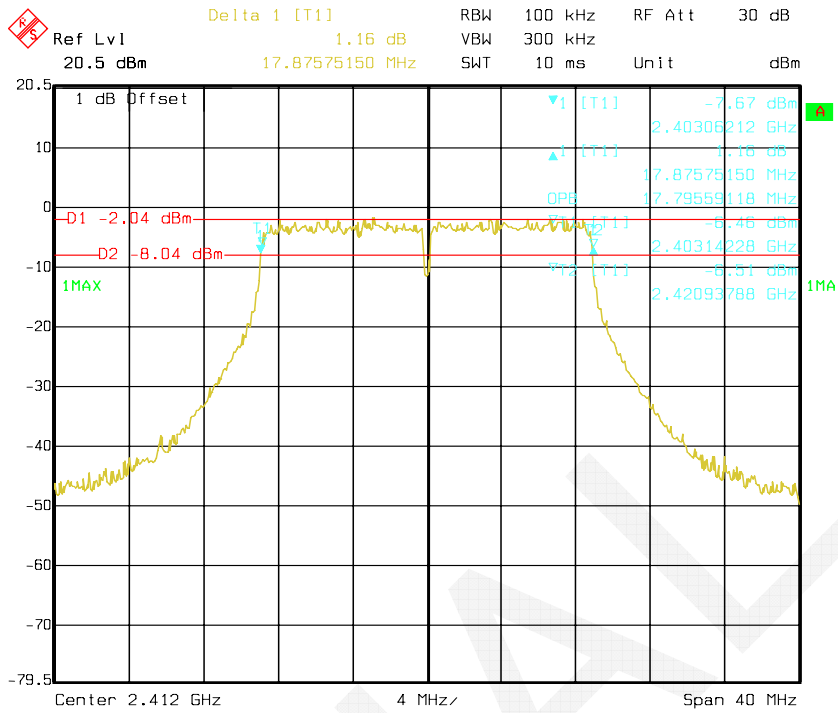


802.11n ht20 Middle Channel

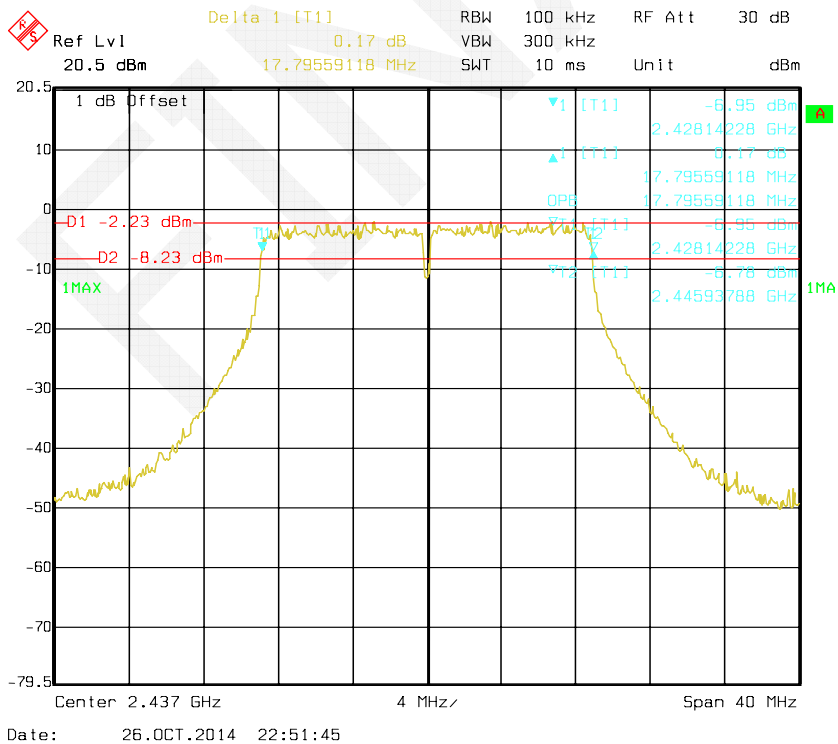

802.11n ht20 High Channel

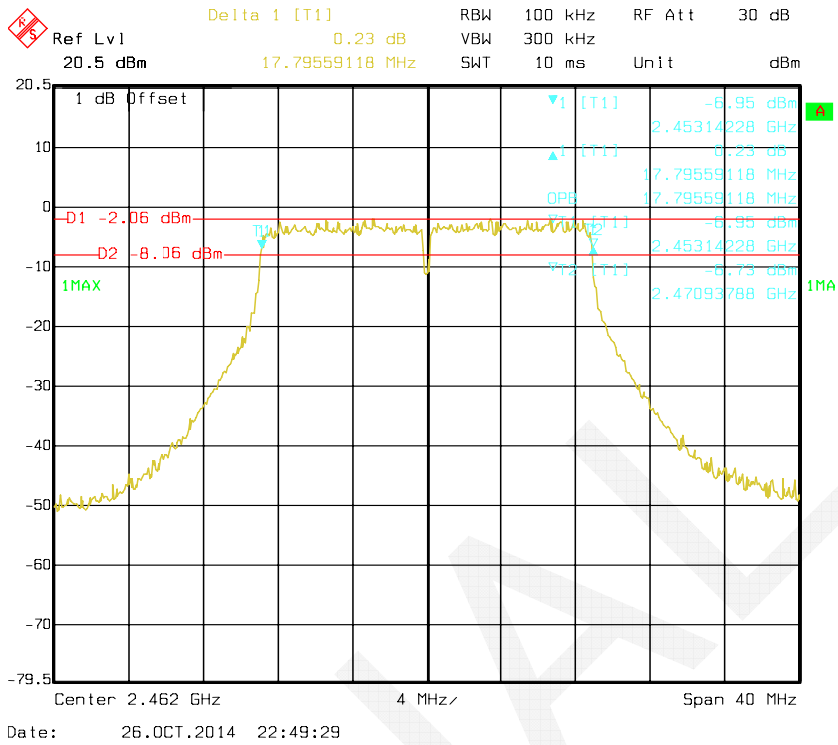

802.11n ht40 Low Channel

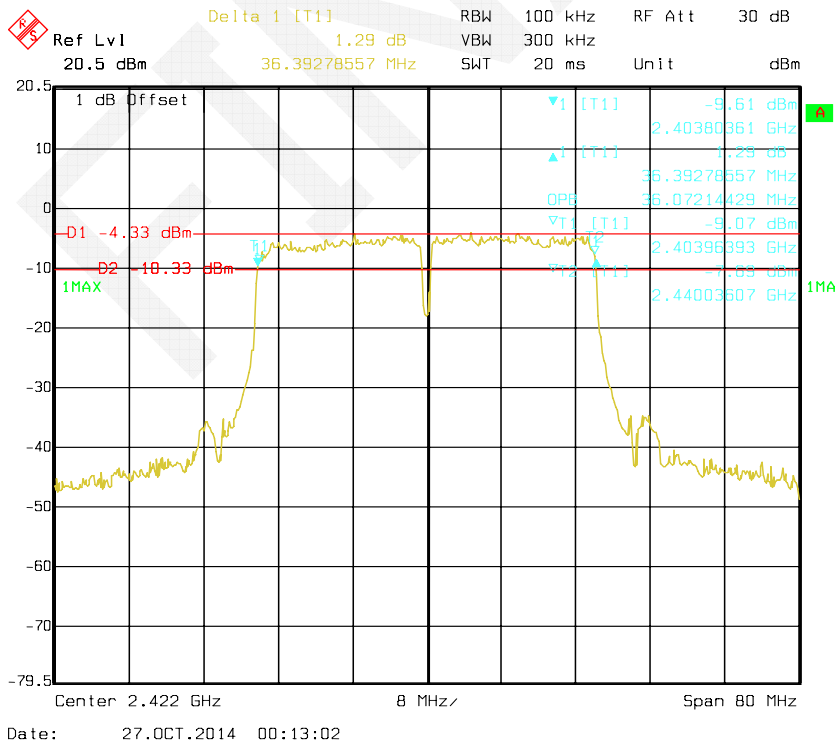

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause9.2.2.2

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2013-12-12	2014-12-12
Agilent	Wideband Power Sensor	N1921A	MY54170013	2013-12-12	2014-12-12
Agilent	P-Series Power Meter	N1912A	MY5000448	2013-12-12	2014-12-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.4~27.5 °C
Relative Humidity:	52 %
ATM Pressure:	100.9~101 kPa

The testing was performed by Dean Liu from 2014-10-26 to 2014-10-27.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency	Max Peak Conducted Output Power	Limit	Result
		(MHz)	(dBm)	(dBm)	
802.11b	Low	2412	20.04	30	PASS
	Middle	2437	20.31	30	PASS
	High	2462	20.90	30	PASS
802.11g	Low	2412	19.68	30	PASS
	Middle	2437	19.89	30	PASS
	High	2462	20.47	30	PASS
802.11n ht20	Low	2412	20.41	30	PASS
	Middle	2437	20.13	30	PASS
	High	2462	20.28	30	PASS
802.11n ht40	Low	2422	20.87	30	PASS
	Middle	2437	20.32	30	PASS
	High	2452	20.39	30	PASS

Test mode	Channel	Frequency	Max Conducted Average Output Power	Limit	Result
		(MHz)	(dBm)	(dBm)	
802.11b	Low	2412	19.42	30	PASS
	Middle	2437	19.81	30	PASS
	High	2462	20.32	30	PASS
802.11g	Low	2412	14.00	30	PASS
	Middle	2437	14.19	30	PASS
	High	2462	14.55	30	PASS
802.11n ht20	Low	2412	14.58	30	PASS
	Middle	2437	14.25	30	PASS
	High	2462	14.26	30	PASS
802.11n ht40	Low	2422	16.10	30	PASS
	Middle	2437	15.72	30	PASS
	High	2452	15.63	30	PASS

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27.1~27.4 °C
Relative Humidity:	51~52 %
ATM Pressure:	100.8~101.1 kPa

The testing was performed by Dean Liu from 2014-10-27 to 2014-10-31.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.


802.11b: Band Edge, Left Side

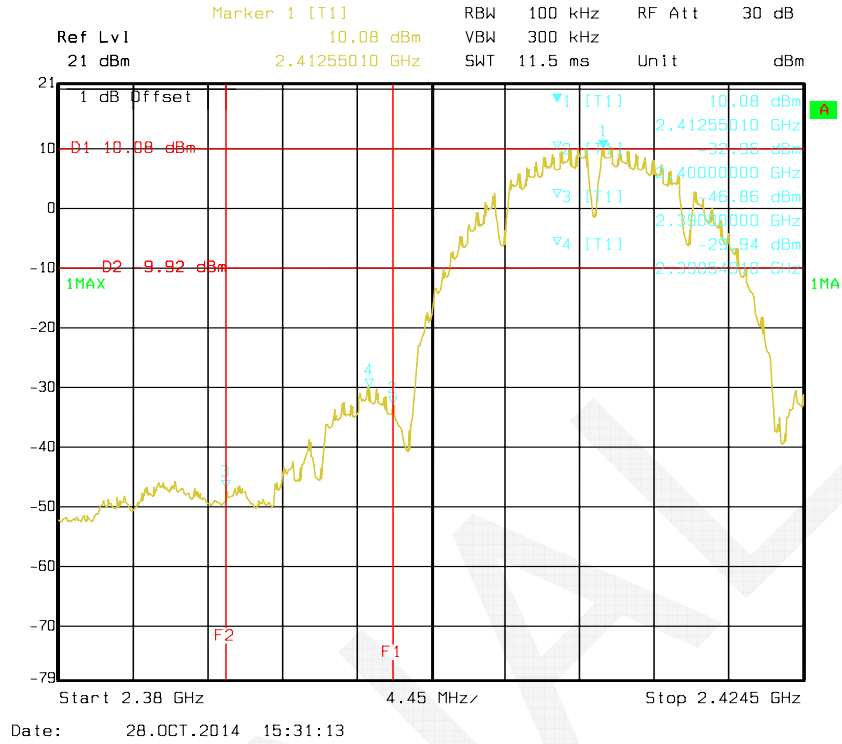


802.11b: Band Edge, Right Side

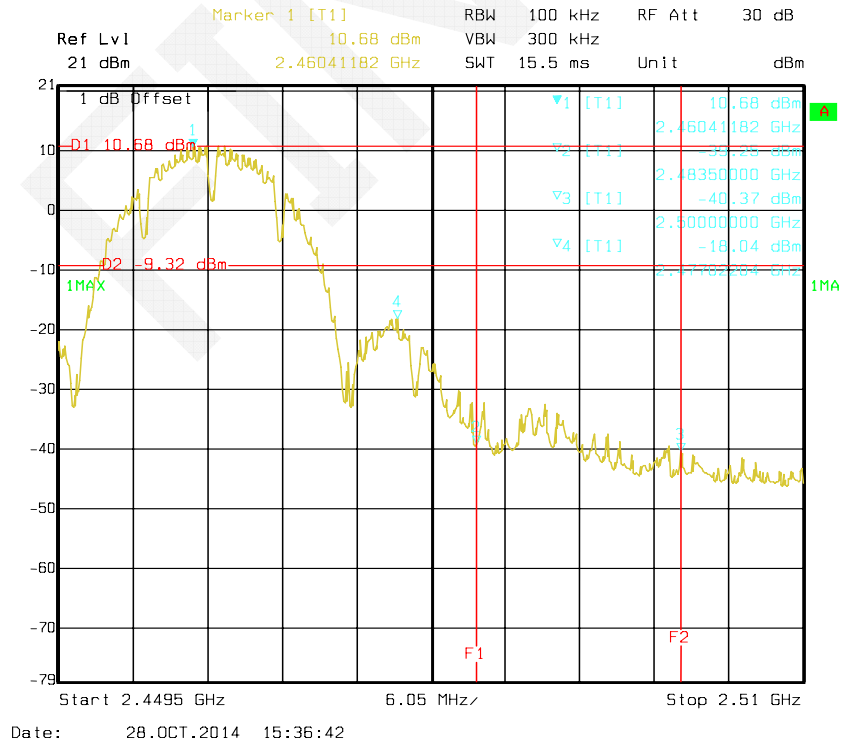


802.11g: Band Edge, Left Side

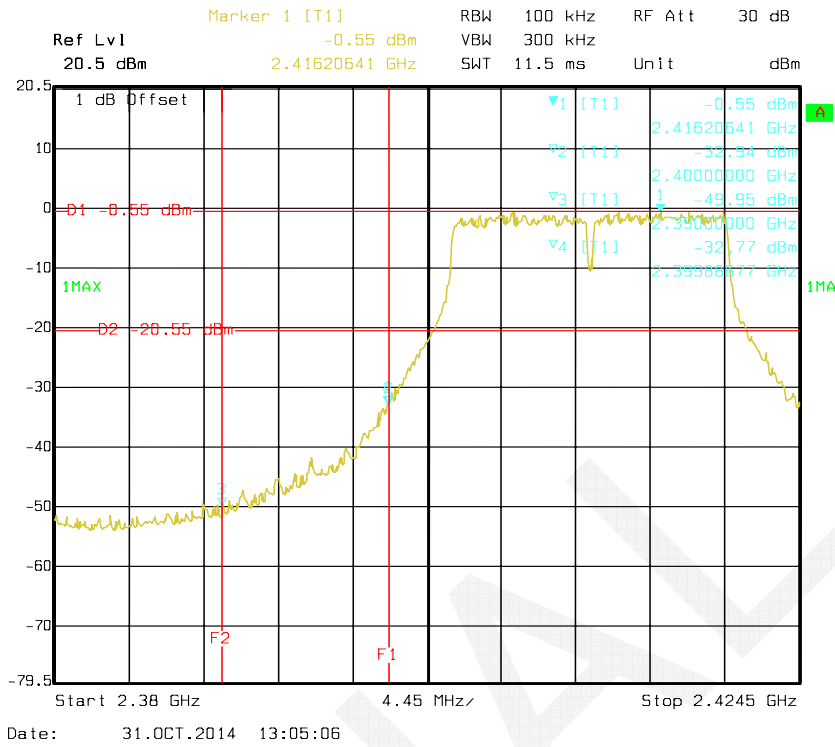


802.11g: Band Edge, Right Side

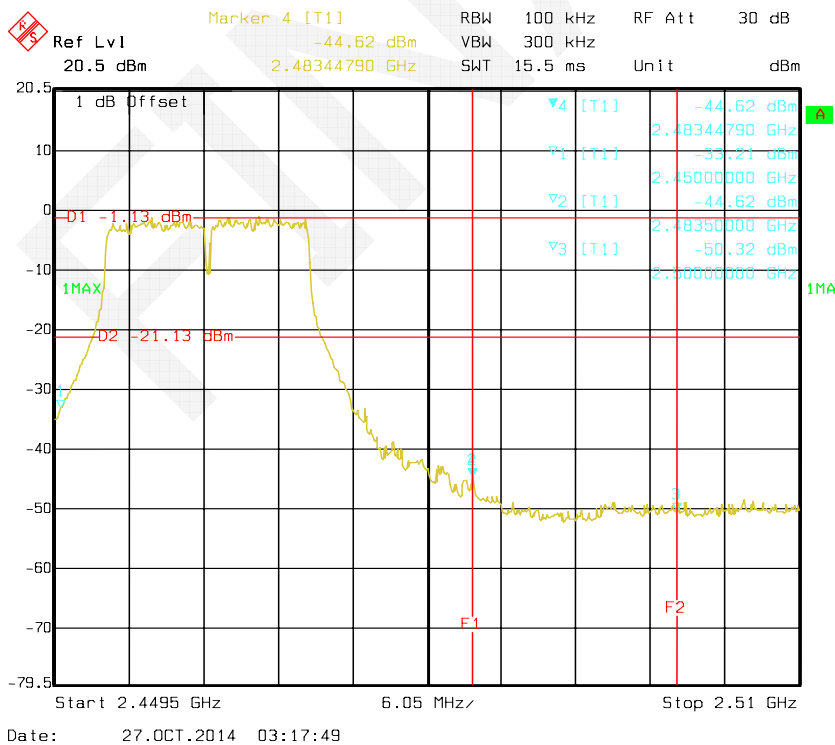


802.11n ht20 Band Edge, Left Side

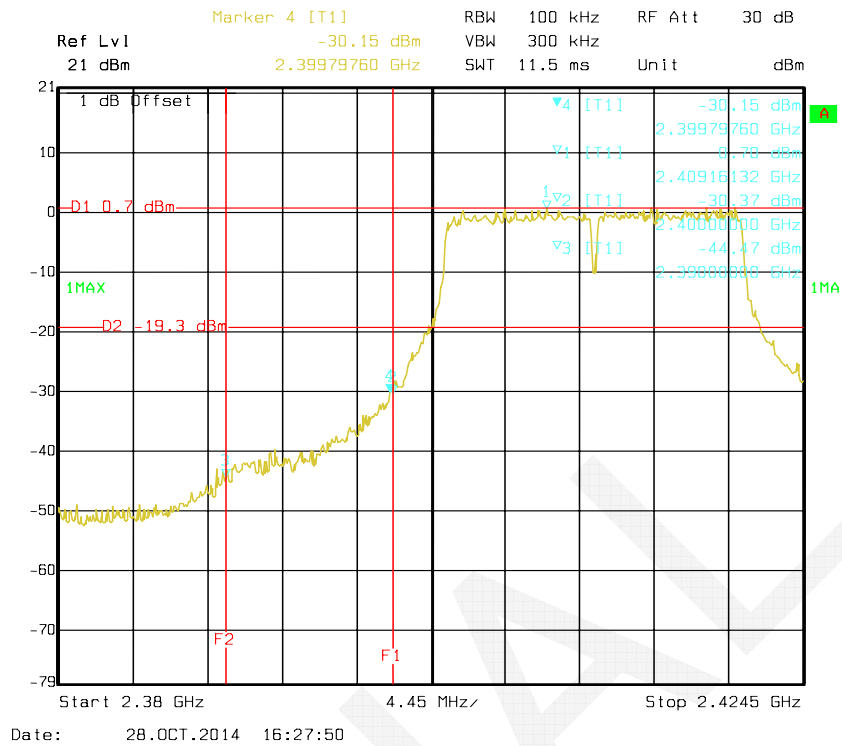


802.11n ht20 Band Edge, Right Side

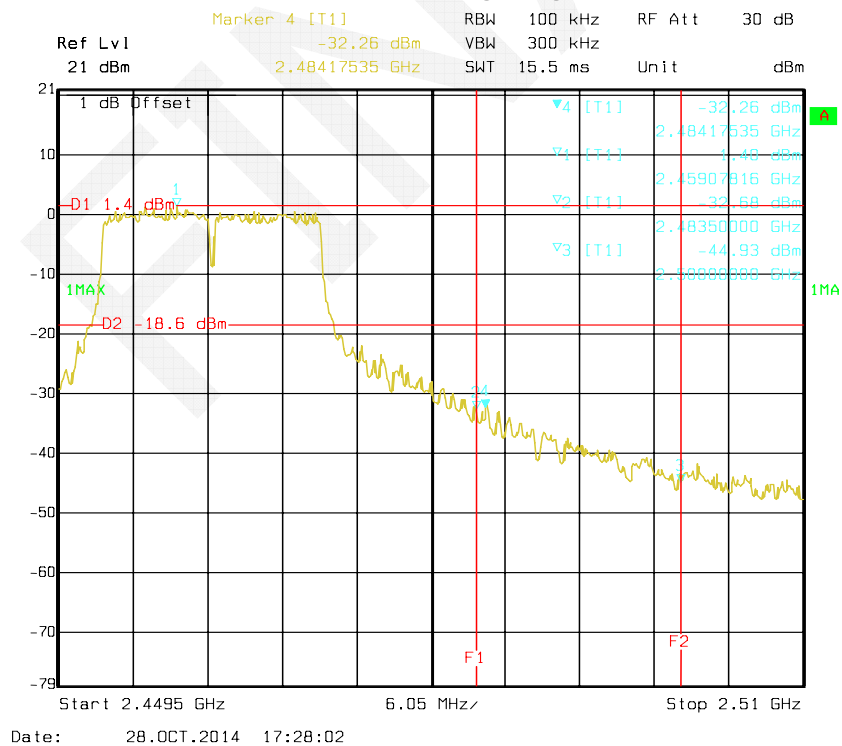

802.11n ht40 Band Edge, Left Side

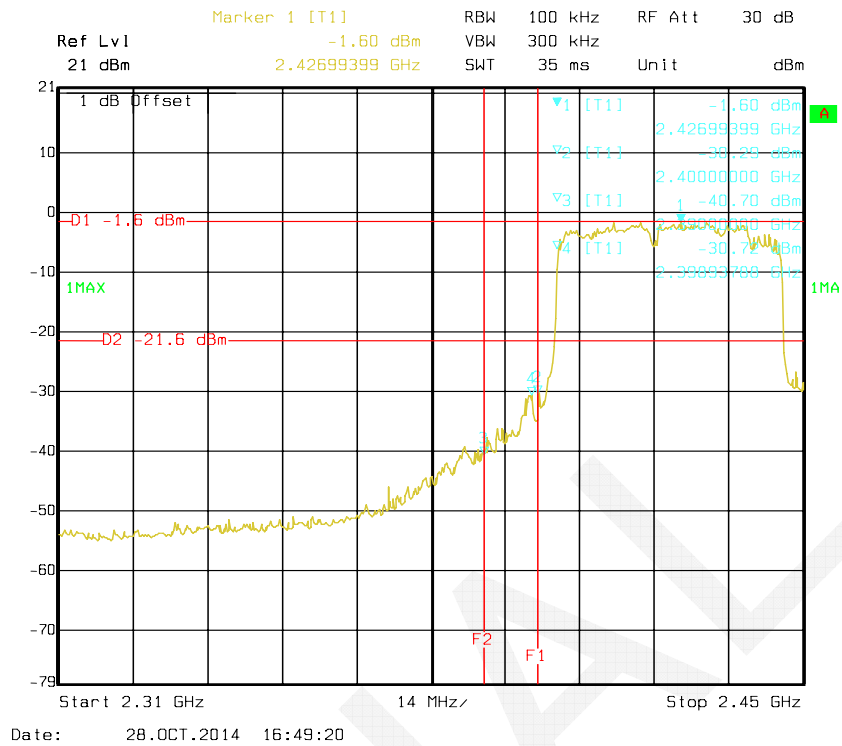

802.11n ht40 Band Edge, Right Side

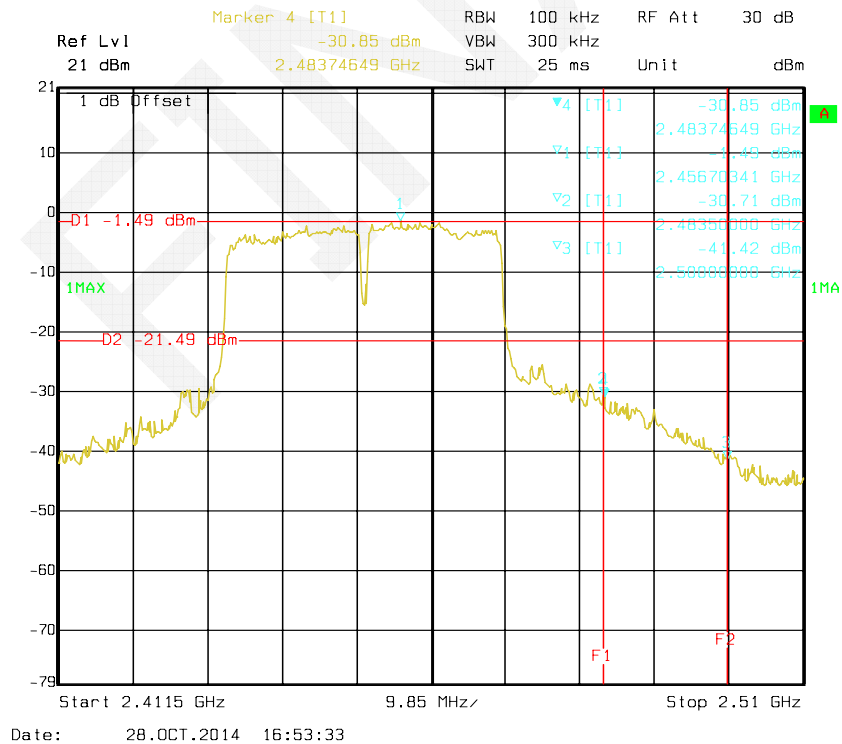

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.1~27.3 °C
Relative Humidity:	51~52 %
ATM Pressure:	100.8~101.1 kPa


The testing was performed by Dean Liu from 2014-10-28 to 2014-10-31.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots


Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	Low	2412	-9.54	≤8	PASS
	Middle	2437	-9.10	≤8	PASS
	High	2462	-8.01	≤8	PASS
802.11g	Low	2412	-14.11	≤8	PASS
	Middle	2437	-13.99	≤8	PASS
	High	2462	-13.41	≤8	PASS
802.11n ht20	Low	2412	-13.52	≤8	PASS
	Middle	2437	-13.62	≤8	PASS
	High	2462	-13.32	≤8	PASS
802.11n ht40	Low	2422	-15.28	≤8	PASS
	Middle	2437	-14.96	≤8	PASS
	High	2452	-15.04	≤8	PASS

Power Spectral Density, 802.11b Low Channel

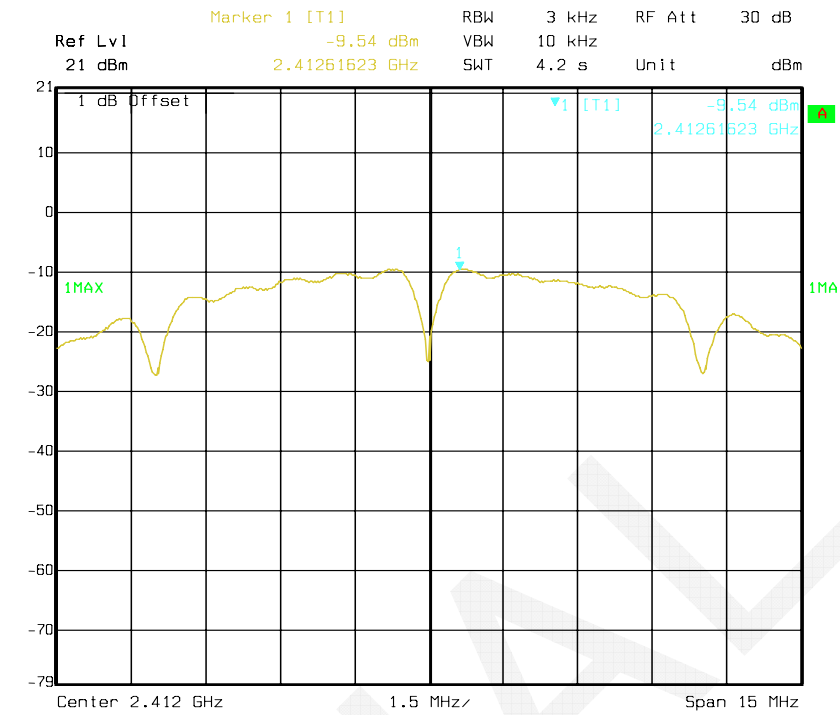


Date: 28.OCT.2014 15:51:51

Power Spectral Density, 802.11b Middle Channel

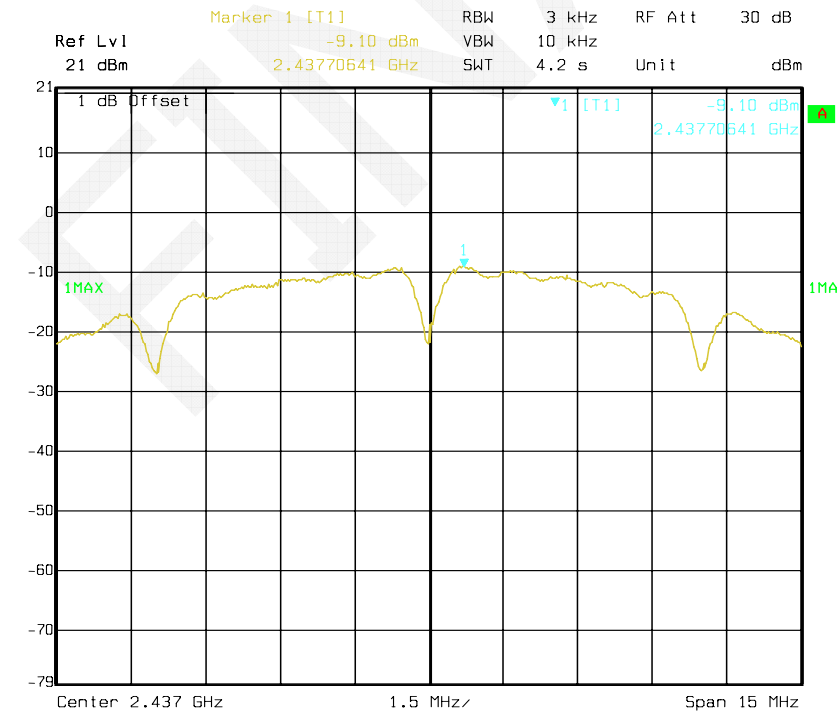


Date: 28.OCT.2014 15:49:46


Power Spectral Density, 802.11b High Channel

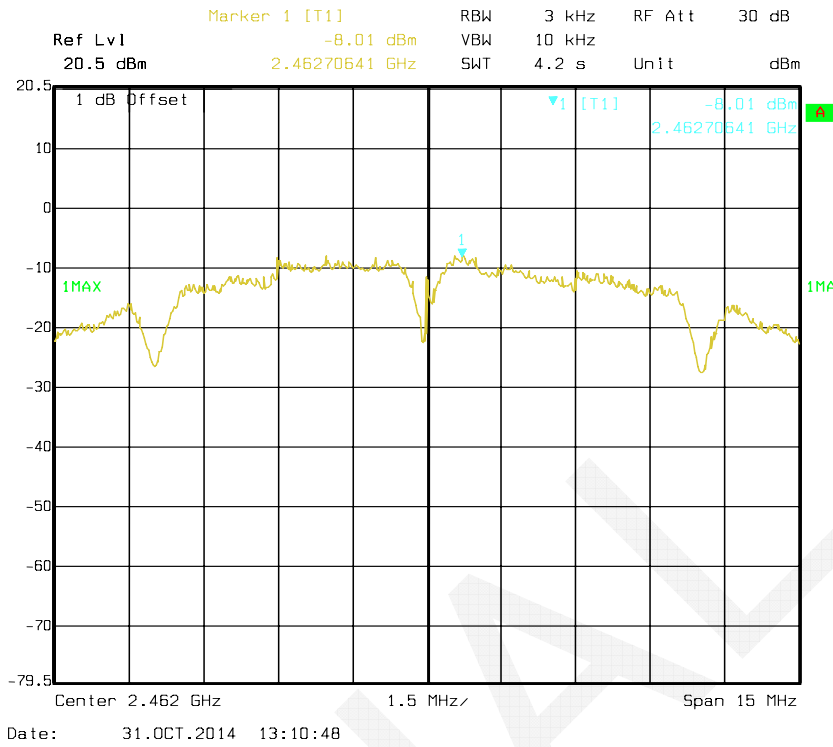


Power Spectral Density, 802.11g Low Channel

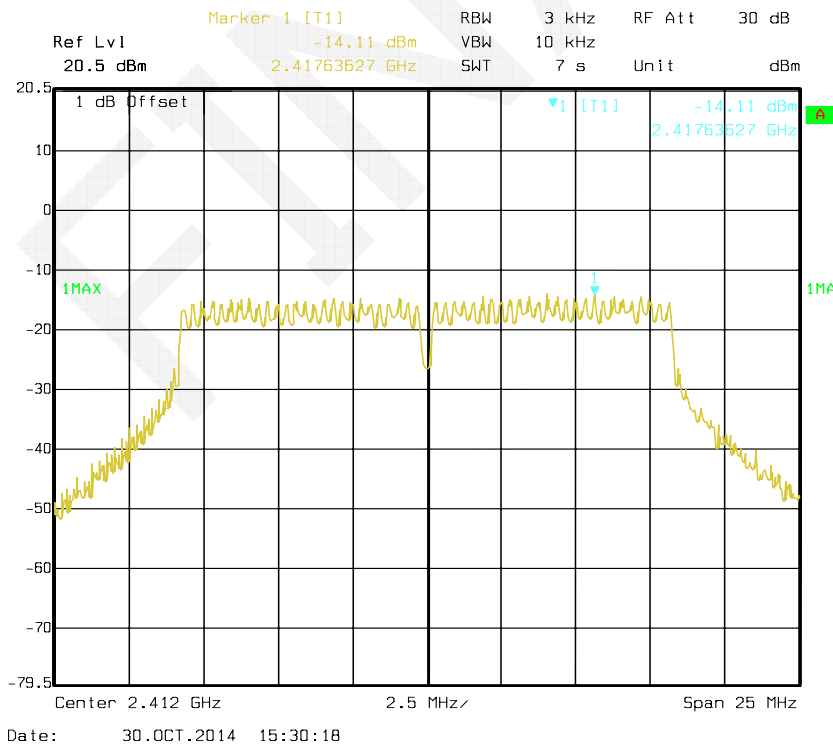


Power Spectral Density, 802.11g Middle Channel

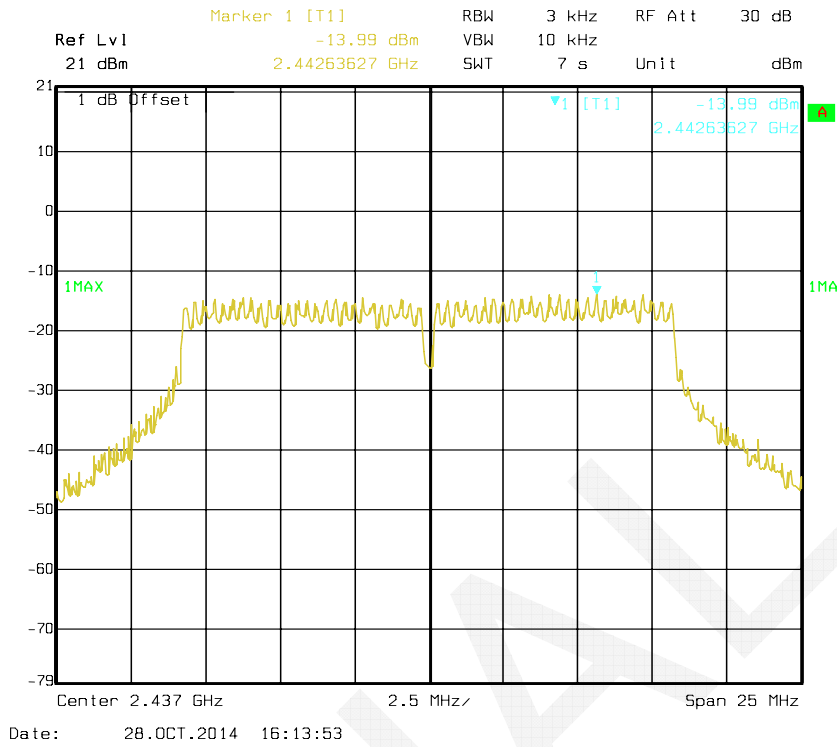


Power Spectral Density, 802.11g High Channel

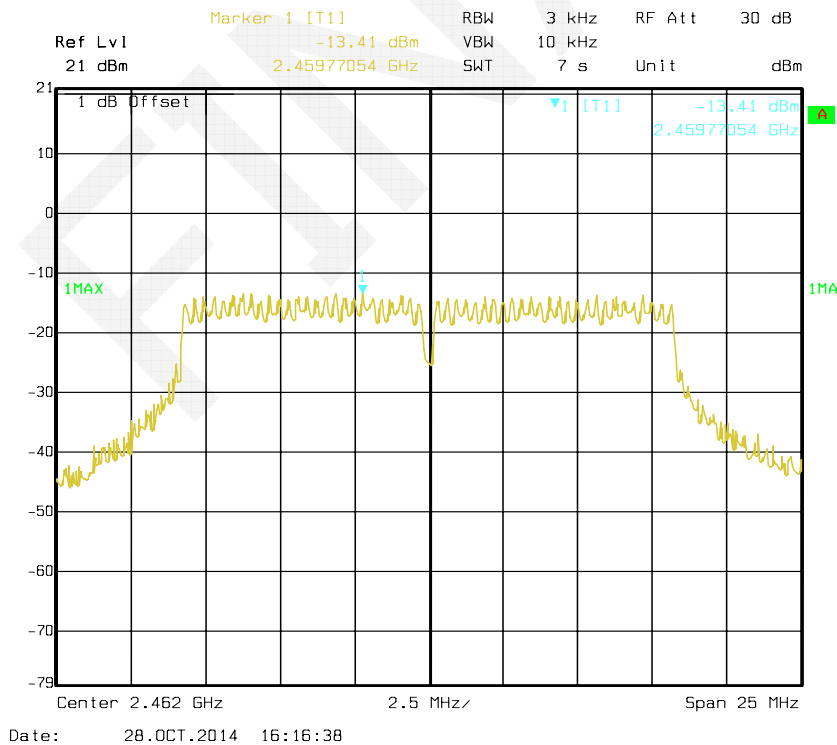


Power Spectral Density, 802.11n ht20 Low Channel

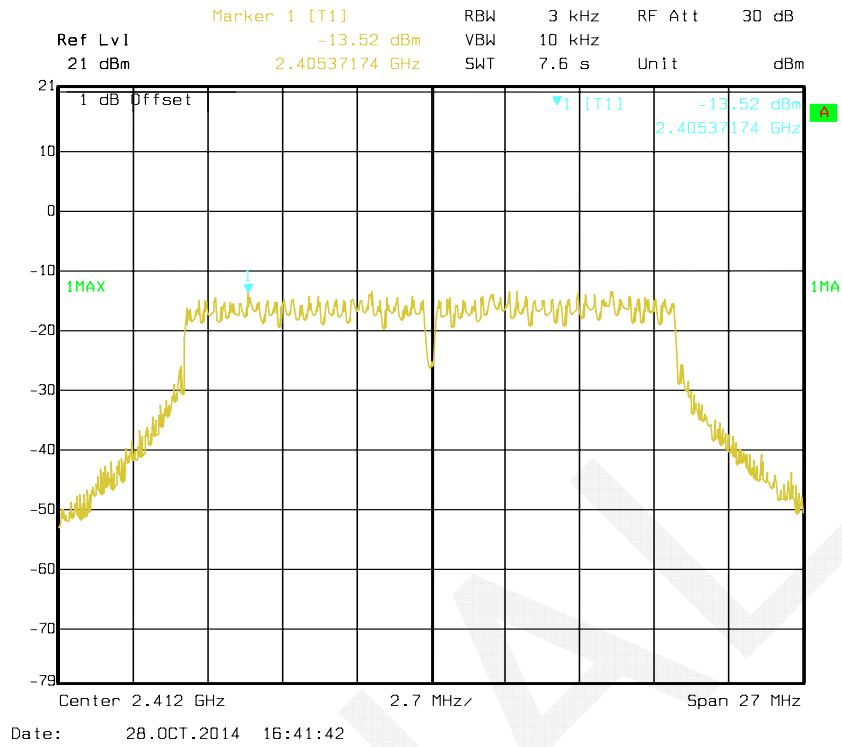


Power Spectral Density, 802.11n ht20 Middle Channel

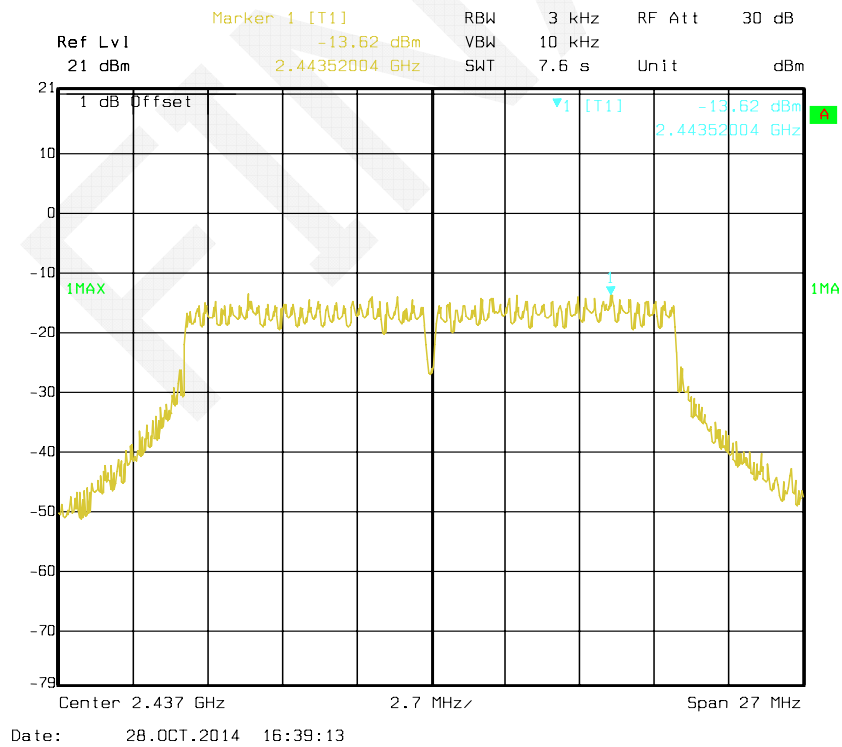


Power Spectral Density, 802.11n ht20 High Channel

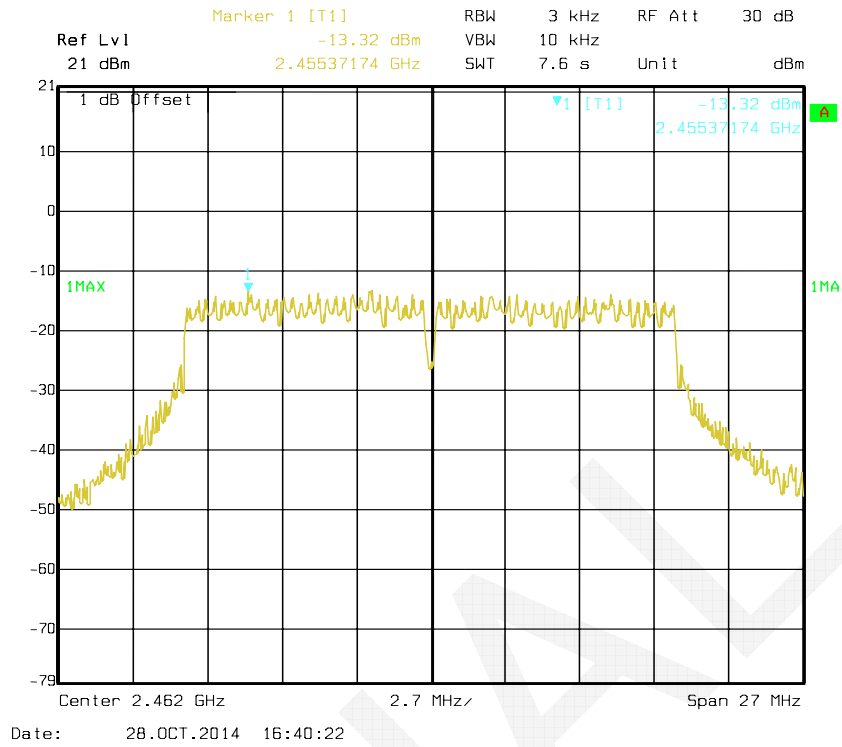


Power Spectral Density, 802.11n ht40 Low Channel

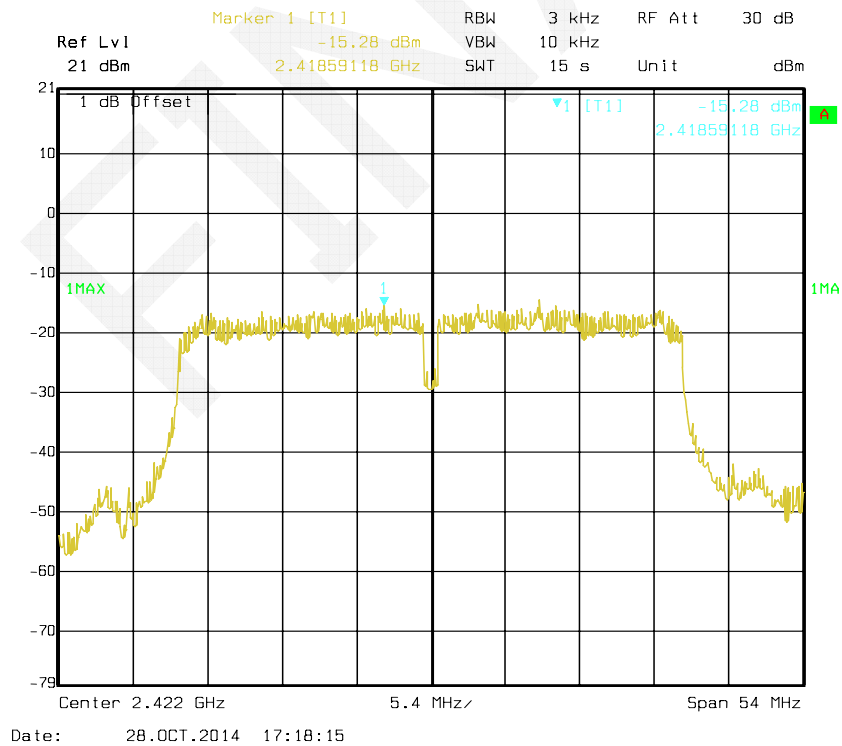

Power Spectral Density, 802.11n ht40 Middle Channel

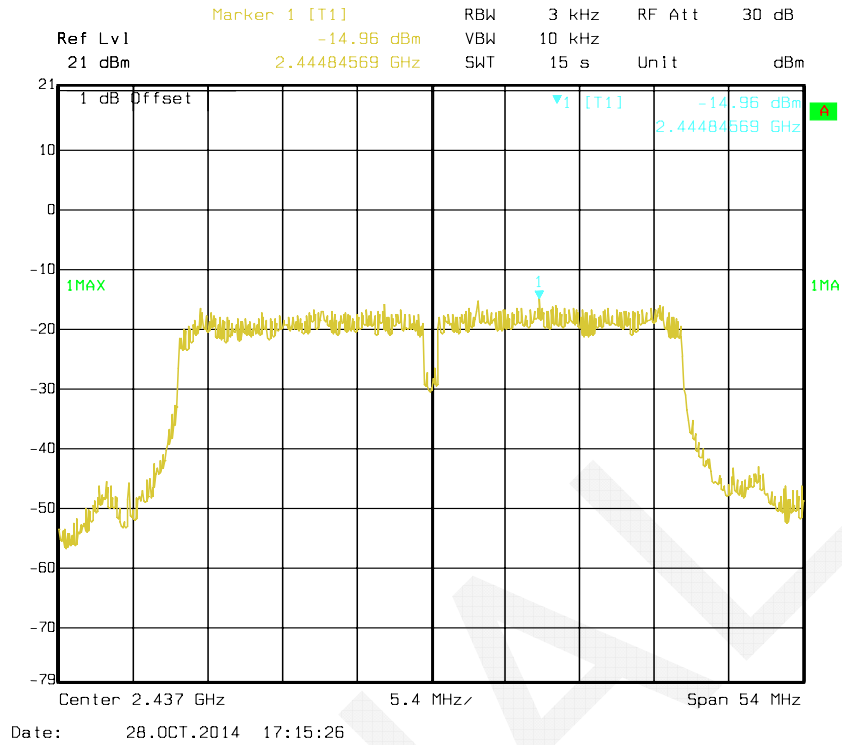

Power Spectral Density, 802.11n ht40 High Channel

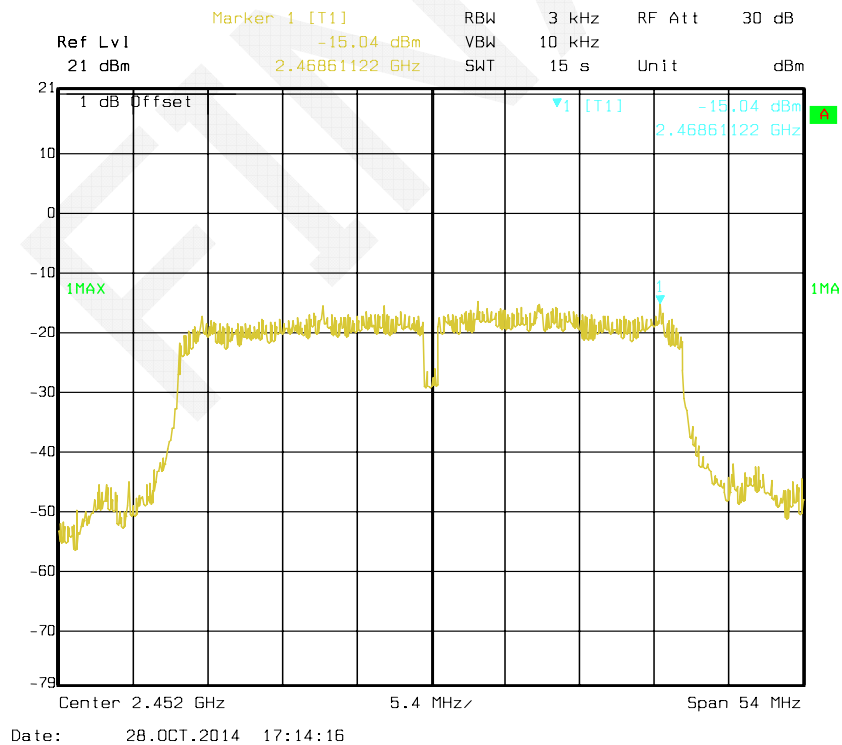

DECLARATION LETTER



ZIONCOM ELECTRONICS (SHENZHEN) LTD.
Building A1~A2, Lantian Science and Technology Park, Xinyu Road Xinqiao Henggang
Block Shajing Street, Baoan District, Shenzhen City, China
Tel: +86-755-6136 3299 Fax: +86-755-6136 3322

Product Similarity Declaration

Date: 2014-10-31

To Whom It May Concern,

We, ZIONCOM ELECTRONICS (SHENZHEN) LTD., hereby declare that our product 150Mbps Wireless N Router, Model Number: N150RT,IP04229 are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics. They are certified by BACL. Their only difference is the model name.

The rest are the same.

Please contact me if you have any question.

Signature:

Stone Xu
Project Manager

******* END OF REPORT *******