



MEASUREMENT REPORT

FCC ID : XBG-BA1GMNRCH8
APPLICANT : AVALUE TECHNOLOGY INCORPORATION

Application Type : Certification
Product : Intercom
Model Name : Monarch 8
Model Number : BUTTERFLYMX.M8.1
Trade Mark : 
FCC Classification : (DXX) Part 15 Low Power Communication Device Transmitter
FCC Rule Part(s) : Part 15.209
Test Procedure(s) : ANSI C63.10-2013
Received Date : September 13, 2022
Test Date : November 03~15, 2022

Tested By : 
(Peter Syu)

Reviewed By : 
(Paddy Chen)

Approved By : 
(Chenz Ker)



The test results only relate to the tested sample.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.



Revision History

Report No.	Version	Description	Issue Date	Note
2209TWI301-U16	1.0	Original Report	2022-12-15	

Note: This case is a copy report, the original report number is 2209TWI301-U7(FCC ID: XBG-BA1GMNRCH12). Model No.:Monarch 8 and Model No.: Monarch 12 which the RF & PCB layout are the same, only the panel size and antenna position are different. Therefore, the Conducted Power & Radiated have to test and other test data can refer report number 2209TWI301-U7.

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Test Mode	8
2.3. Test Software	8
2.4. Test Configuration	8
2.5. EMI Suppression Device(s)/Modifications	8
2.6. Labeling Requirements	8
3. DESCRIPTION of TEST	9
3.1. Evaluation Procedure	9
3.2. AC Line Conducted Emissions	9
3.3. Radiated Emissions	10
4. ANTENNA REQUIREMENTS	11
5. TEST EQUIPMENT CALIBRATION DATE	12
6. MEASUREMENT UNCERTAINTY	13
7. TEST RESULT	14
7.1. Summary	14
7.2. Radiated Spurious Emissions and Field Strength of Fundamental Emissions Measurement	15
7.2.1. Test Limit	15
7.2.2. Test Procedure Used	15
7.2.3. Test Setup	17
7.2.4. Test Result	18
7.3. 20dB Bandwidth Measurement	30
7.3.1. Test Limit	30
7.3.2. Test Procedure Used	30
7.3.3. Test Setting	30
7.3.4. Test Setup	30
7.3.5. Test Result	31
7.4. AC Conducted Emissions Measurement	32



7.4.1.	Test Limit	32
7.4.2.	Test Setup	32
7.4.3.	Test Result.....	33
8.	CONCLUSION	37

§2.1033 General Information

Applicant	AVALUE TECHNOLOGY INCORPORATION
Applicant Address	7F, 228, Lian-cheng Road, Zhonghe Dist., New Taipei City 235, Taiwan
Manufacturer	ButterflyMX, inc.
Manufacturer Address	44 West 28th Street, 4th Floor New York, NY 10001
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.209
Test Device Serial No.	#1-2 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.


1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

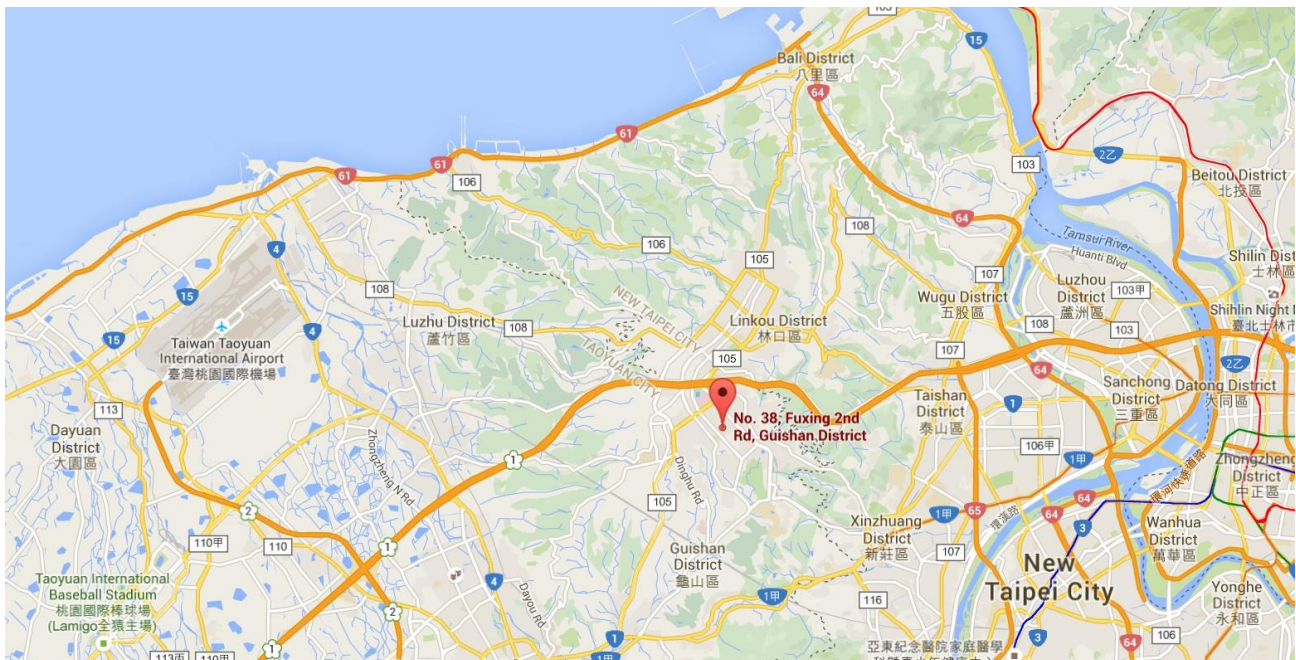

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Intercom
Trade Mark	
Model Name	Monarch 8
Model Number	BUTTERFLYMX.M8.1
Supports Radios Spec.	WPAN: Bluetooth Dual Mode: V5.0 RFID: 125kHz & 13.56MHz WLAN: 2.4G: 802.11b/g/n-20/n-40 5G: 802.11a/n-20/ac-20/n-40/ac-40/ac-80, Band 1,4 WWAN: 4G: Band 2,4,5,7,12,13,25,26,38,41
RFID Specification	125kHz
Modulation	ASK
Antenna Type	Loop Antenna
Accessory	
Power Adapter	Brand Name: EDAC Model: EA10731F-240 Input: AC 100-240V~0.2A, 50-60Hz Output: DC 24.0V-2.08A

2.2. Test Mode

Test Mode	Mode 1: Transmit by RFID 125kHz with Monarch 8 Mode 2: Receiver by RFID 125kHz with Monarch 8
-----------	--

2.3. Test Software

The test utility software used during testing was “putty”, the version is ver0.78.

2.4. Test Configuration

The **Intercom**, ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.6. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) were used in the measurement of the **Intercom FCC ID:**

XBG-BA1GMNRCH8

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.6.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated Emissions test results are shown in Section 7.2 & 7.3 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.209 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of **Intercom** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Intercom** unit complies with the requirement of §15.209.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2023/3/7
Cable	Rosnol	N1C50-RG400-B 1C50-500CM	MRTTWE00013	1 year	2023/6/19
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2023/3/9

Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2022/12/30
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2023/3/9
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2023/5/24
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2023/3/30
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2023/3/29
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2023/3/30
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2023/3/30
Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2023/5/23
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWE00012	1 year	2023/6/19

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Conducted Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 1.3\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$

7. TEST RESULT

7.1. Summary

Product Name: Intercom

FCC Classification: (DXX) Part 15 Low Power Communication Device Transmitter

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.209	Radiated Spurious Emissions and Field Strength of Fundamental Emissions	FCC 15.209 limits	Radiated	Pass	Section 7.2
2.1049	20dB Bandwidth	N/A		Pass	Section 7.3
15.207	AC Conducted Emissions 150kHz - 30MHz	FCC 15.207 limits	Line Conducted	Pass	Section 7.4

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 4) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. Radiated Spurious Emissions and Field Strength of Fundamental Emissions Measurement

7.2.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.209 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note : The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

7.2.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10-2013 - Section 11.12.2.4 (peak power measurements)

ANSI C63.10-2013 - Section 11.12.2.5 (average power measurements)

Test Setting

Peak Power Measurement


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = $3 \times \text{RBW}$
4. Detector = peak
5. Sweep time = auto couple

Table 1 - RBW as a function of frequency


Frequency	RBW
9 kHz ~ 150 kHz	200 Hz ~ 300 Hz
0.15 MHz ~ 30 MHz	9 kHz ~ 10 kHz
30 MHz ~ 1000 MHz	100 kHz ~ 120 kHz
> 1000 MHz	1 MHz

7.2.3. Test Setup

9kHz ~ 30MHz Test Setup:

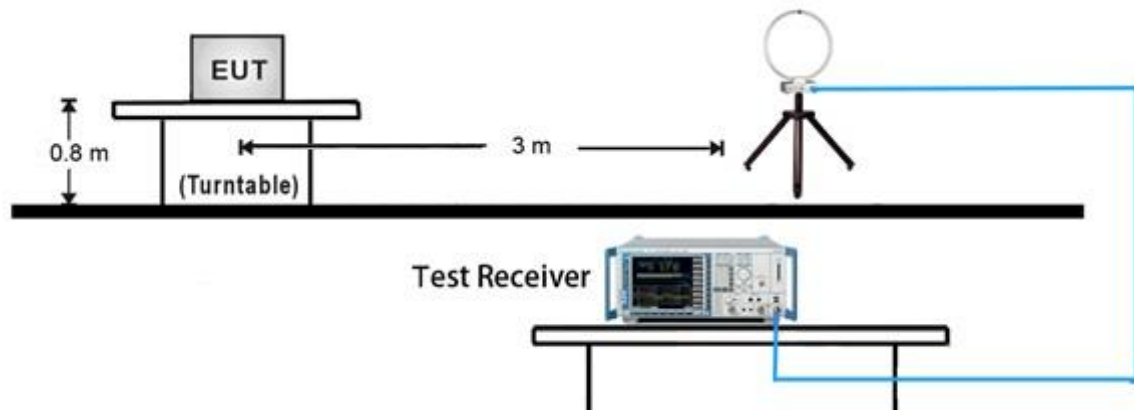


30MHz ~ 1GHz Test Setup:

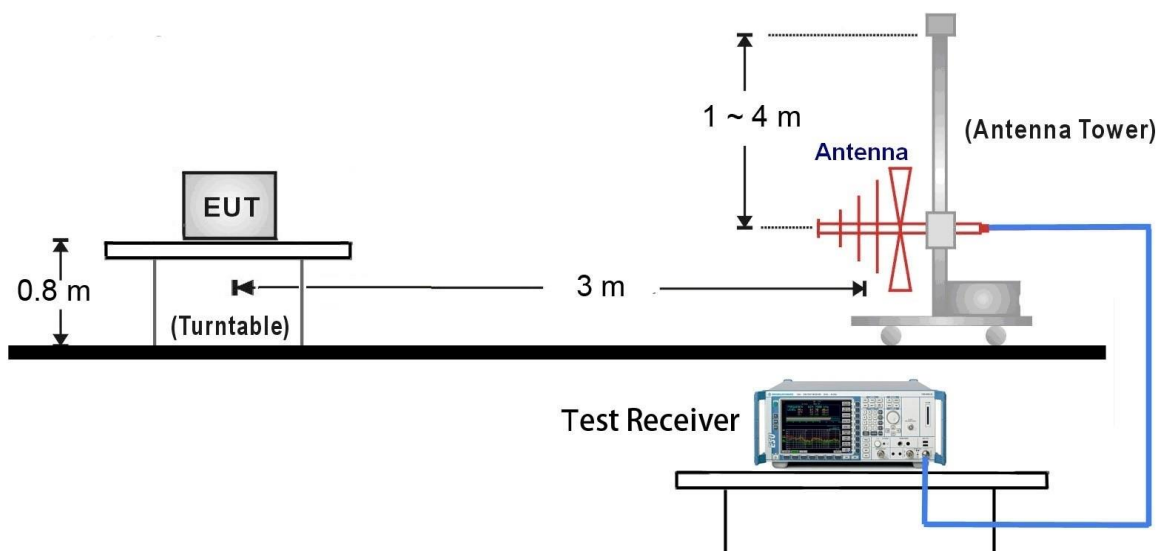

7.2.4. Test Result

EUT	Monarch 8	Date of Test	2022-11-15
Factor	FMZB 1519B	Temp. / Humidity	22°C /63%
Polarity	Face On	Site / Test Engineer	AC1 / Kaunaz
Test Mode	TX-RFID 125kHz	Test Voltage	AC 120V/60Hz

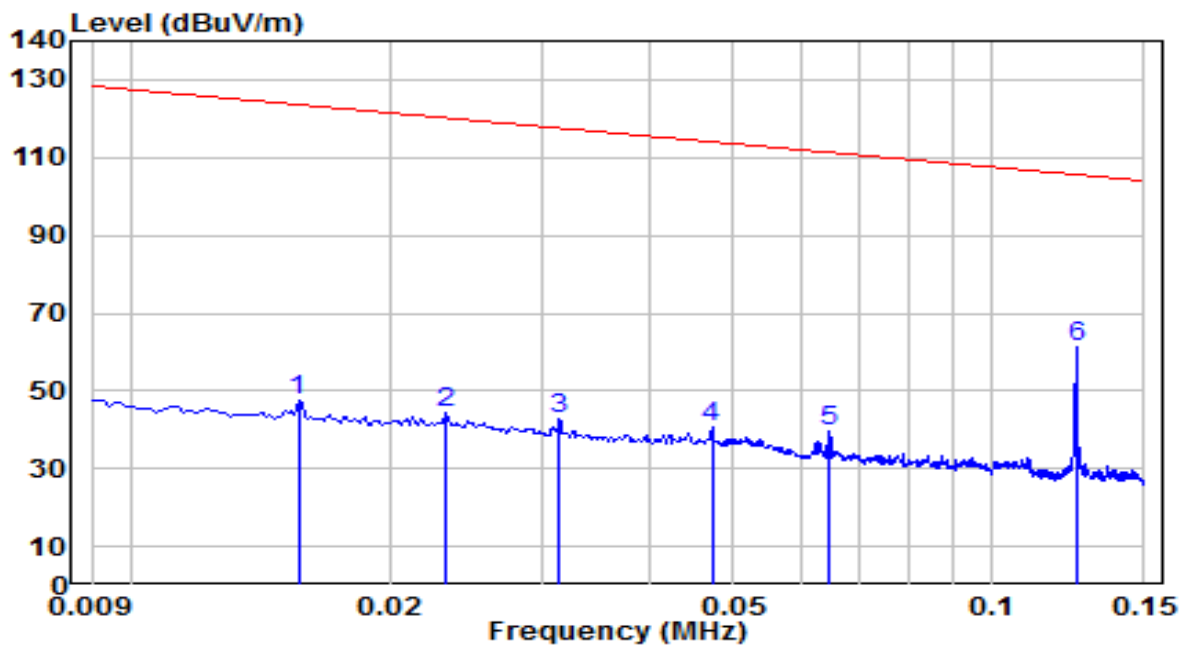


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.016	29.16	18.14	47.30	-76.41	123.71	100	360	Peak
2	0.023	25.44	18.87	44.31	-75.96	120.27	100	360	Peak
3	0.031	23.35	19.50	42.85	-74.80	117.65	100	360	Peak
4	0.047	21.43	19.34	40.77	-73.35	114.11	100	360	Peak
5	0.065	20.67	18.93	39.61	-71.79	111.40	100	360	Peak
6	* 0.125	43.15	18.12	61.27	-44.39	105.66	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. This frequency is 0.125MHz RFID operating frequency.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	FMZB 1519B	Temp. / Humidity	22°C /63%
Polarity	Face On	Site / Test Engineer	AC1 / Kaunaz
Test Mode	TX-RFID 125kHz	Test Voltage	AC 120V/60Hz

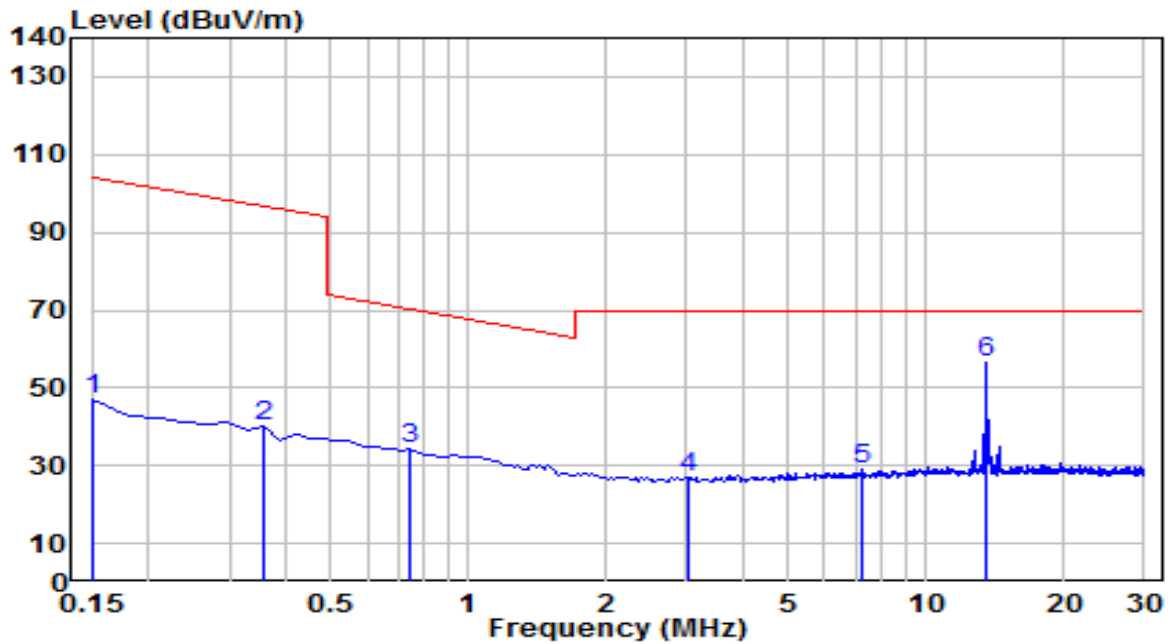


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.150	28.66	18.24	46.89	-57.19	104.08	100	360	Peak
2	0.359	21.53	18.87	40.40	-56.10	96.50	100	360	Peak
3	0.747	15.32	18.85	34.17	-35.97	70.15	100	360	Peak
4	3.016	8.37	18.83	27.20	-42.30	69.50	100	360	Peak
5	7.284	8.86	20.31	29.17	-40.33	69.50	100	360	Peak
6	* 13.553	34.36	21.91	56.27	-13.23	69.50	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. This frequency is 13.553MHz RFID operating frequency.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	FMZB 1519B	Temp. / Humidity	22°C /63%
Polarity	Face Off	Site / Test Engineer	AC1 / Kaunaz
Test Mode	TX-RFID 125kHz	Test Voltage	AC 120V/60Hz

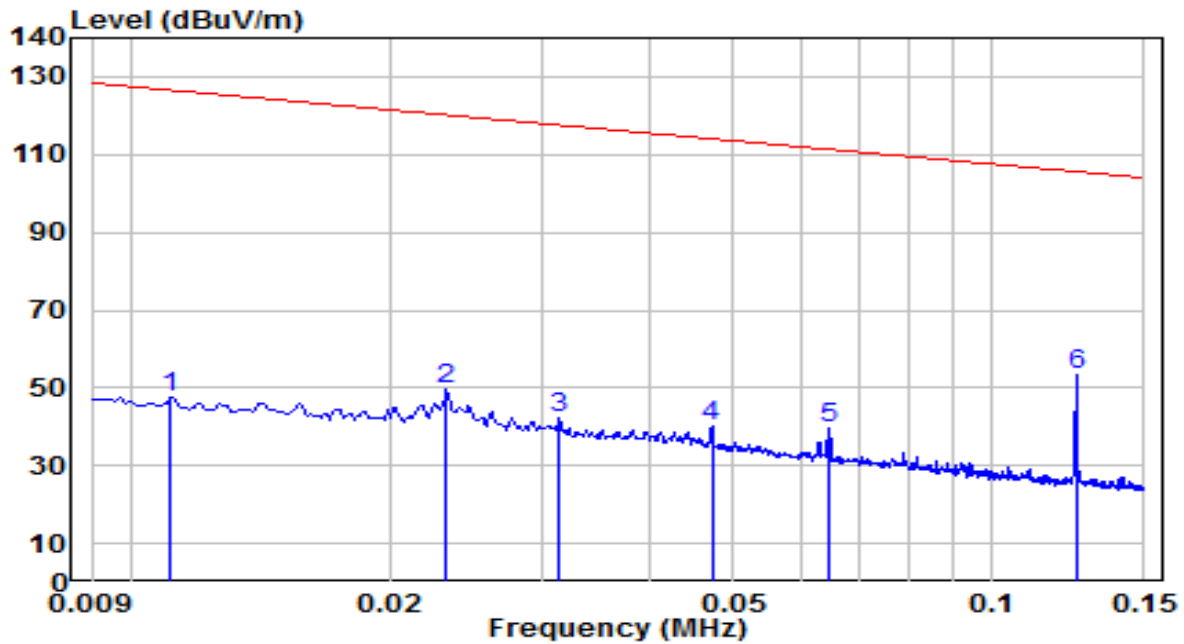


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.011	29.67	17.72	47.38	-79.29	126.67	100	360	Peak
2	0.023	30.58	18.87	49.45	-70.81	120.27	100	360	Peak
3	0.031	22.89	19.50	42.38	-75.27	117.65	100	360	Peak
4	0.047	20.92	19.34	40.26	-73.86	114.11	100	360	Peak
5	0.065	20.69	18.93	39.62	-71.78	111.40	100	360	Peak
6	* 0.125	35.17	18.12	53.29	-52.37	105.66	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. This frequency is 0.125MHz RFID operating frequency.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	FMZB 1519B	Temp. / Humidity	22°C /63%
Polarity	Face Off	Site / Test Engineer	AC1 / Kaunaz
Test Mode	TX-RFID 125kHz	Test Voltage	AC 120V/60Hz

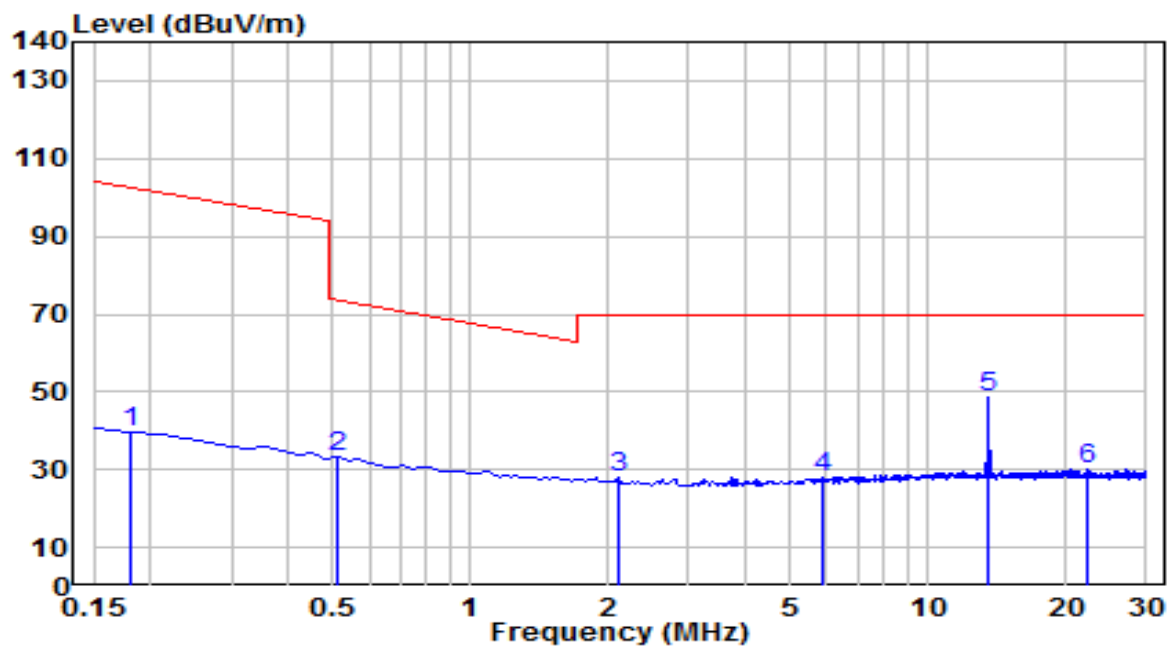


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.180	21.50	18.37	39.87	-62.63	102.50	100	360	Peak
2	0.508	14.64	18.74	33.38	-40.10	73.48	100	360	Peak
3	2.120	9.08	18.89	27.97	-41.53	69.50	100	360	Peak
4	5.851	8.41	19.73	28.15	-41.35	69.50	100	360	Peak
5	* 13.553	26.54	21.91	48.45	-21.05	69.50	100	360	Peak
6	22.358	7.19	22.78	29.97	-39.53	69.50	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. This frequency is 13.553MHz RFID operating frequency.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	FMZB 1519B	Temp. / Humidity	22°C /63%
Polarity	Face On	Site / Test Engineer	AC1 / Kaunaz
Test Mode	RX-RFID 125kHz	Test Voltage	AC 120V/60Hz

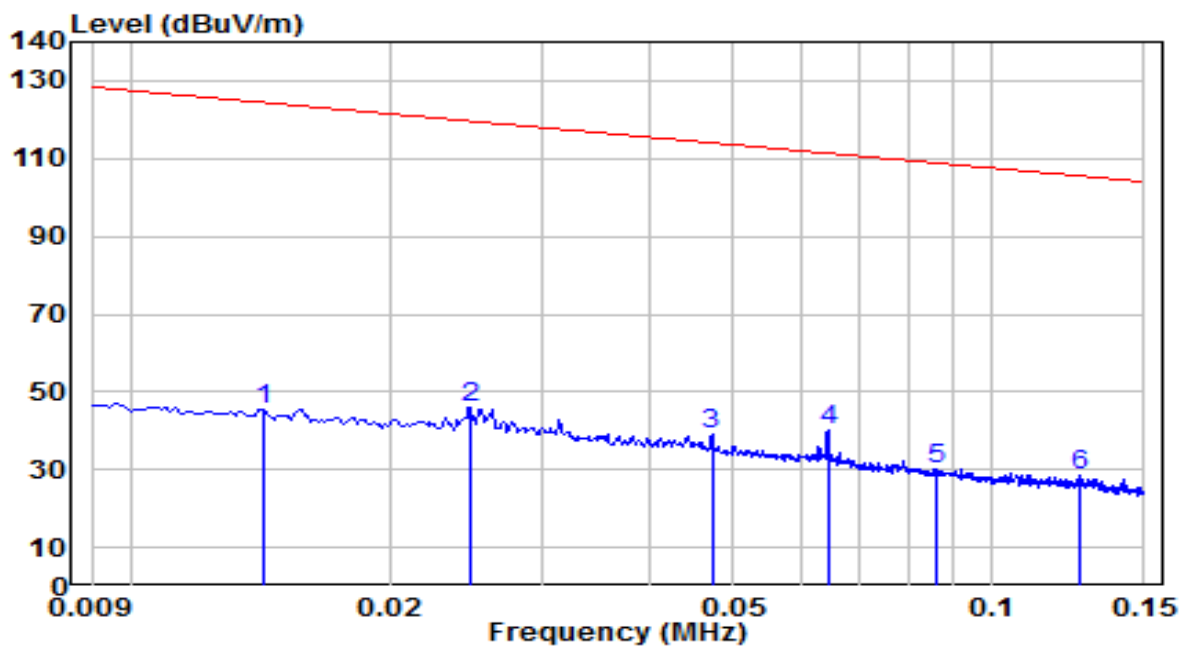


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.014	27.65	18.01	45.66	-78.87	124.53	100	360	Peak
2	0.025	26.87	19.02	45.89	-73.82	119.70	100	360	Peak
3	0.047	19.97	19.34	39.31	-74.80	114.11	100	360	Peak
4	* 0.064	21.31	18.94	40.25	-71.17	111.42	100	360	Peak
5	0.086	11.92	18.38	30.29	-78.63	108.92	100	360	Peak
6	0.126	10.15	18.13	28.27	-77.33	105.60	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	FMZB 1519B	Temp. / Humidity	22°C /63%
Polarity	Face On	Site / Test Engineer	AC1 / Kaunaz
Test Mode	RX-RFID 125kHz	Test Voltage	AC 120V/60Hz

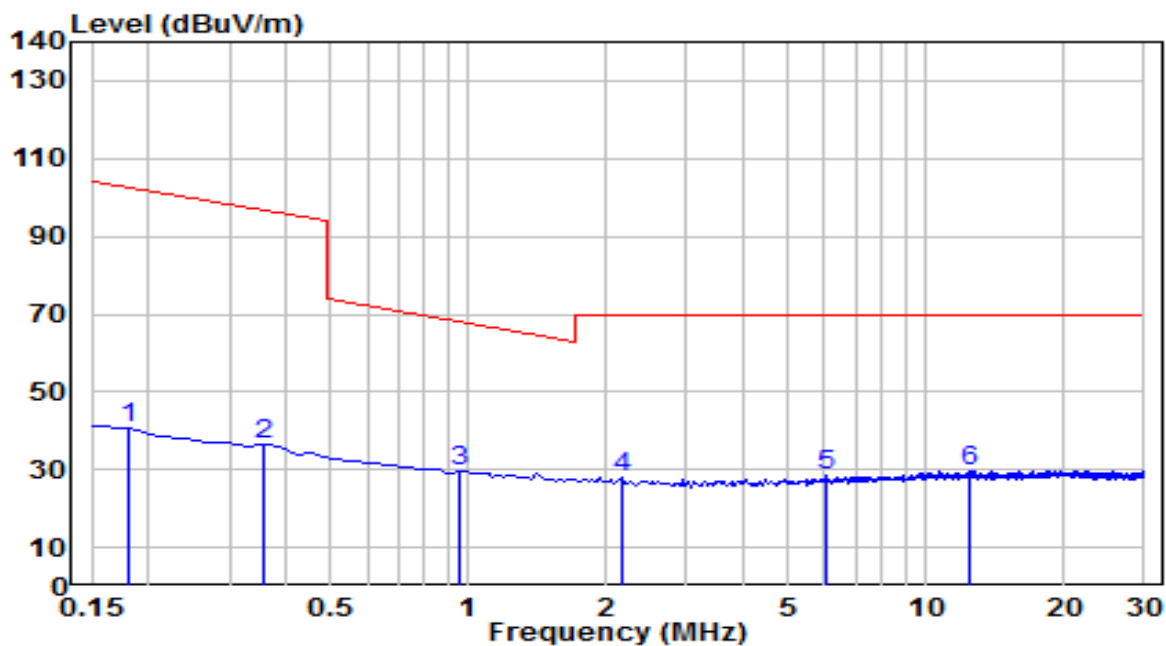


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.180	22.09	18.37	40.46	-62.04	102.50	100	360	Peak
2	0.359	17.61	18.87	36.48	-60.02	96.50	100	360	Peak
3	* 0.956	10.58	18.95	29.53	-38.48	68.01	100	360	Peak
4	2.180	9.20	18.89	28.08	-41.42	69.50	100	360	Peak
5	6.090	8.73	19.83	28.56	-40.94	69.50	100	360	Peak
6	12.389	7.85	21.74	29.59	-39.91	69.50	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	FMZB 1519B	Temp. / Humidity	22°C /63%
Polarity	Face Off	Site / Test Engineer	AC1 / Kaunaz
Test Mode	RX-RFID 125kHz	Test Voltage	AC 120V/60Hz

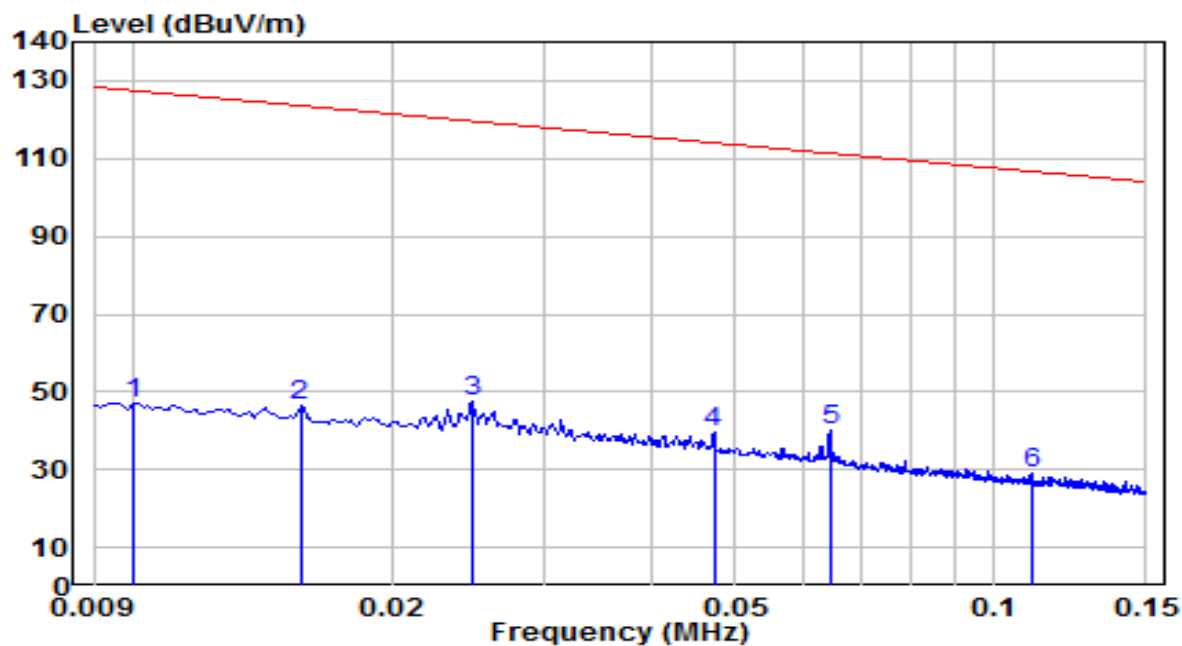


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.010	29.26	17.61	46.87	-80.72	127.60	100	360	Peak
2	0.016	28.50	18.14	46.64	-77.07	123.71	100	360	Peak
3	0.025	28.28	19.02	47.30	-72.41	119.70	100	360	Peak
4	0.047	20.36	19.34	39.69	-74.42	114.11	100	360	Peak
5	* 0.065	21.01	18.93	39.95	-71.45	111.40	100	360	Peak
6	0.110	10.88	18.06	28.93	-77.82	106.75	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	FMZB 1519B	Temp. / Humidity	22°C /63%
Polarity	Face Off	Site / Test Engineer	AC1 / Kaunaz
Test Mode	RX-RFID 125kHz	Test Voltage	AC 120V/60Hz

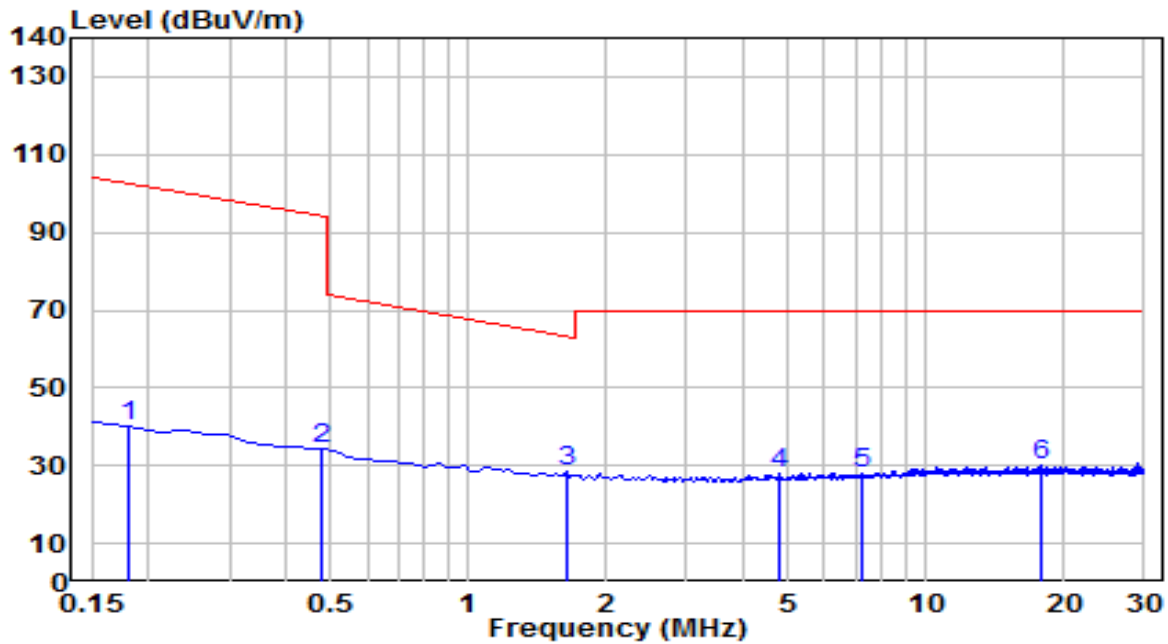


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.180	21.99	18.37	40.36	-62.14	102.50	100	360	Peak
2	0.478	15.37	18.76	34.13	-59.88	94.01	100	360	Peak
3	* 1.643	9.84	18.93	28.77	-34.56	63.32	100	360	Peak
4	4.777	8.60	19.33	27.92	-41.58	69.50	100	360	Peak
5	7.284	7.88	20.31	28.19	-41.31	69.50	100	360	Peak
6	17.762	7.86	22.50	30.36	-39.14	69.50	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	VULB 9162	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jeff
Test Mode	TX-RFID 125kHz	Test Voltage	AC 120V/60Hz

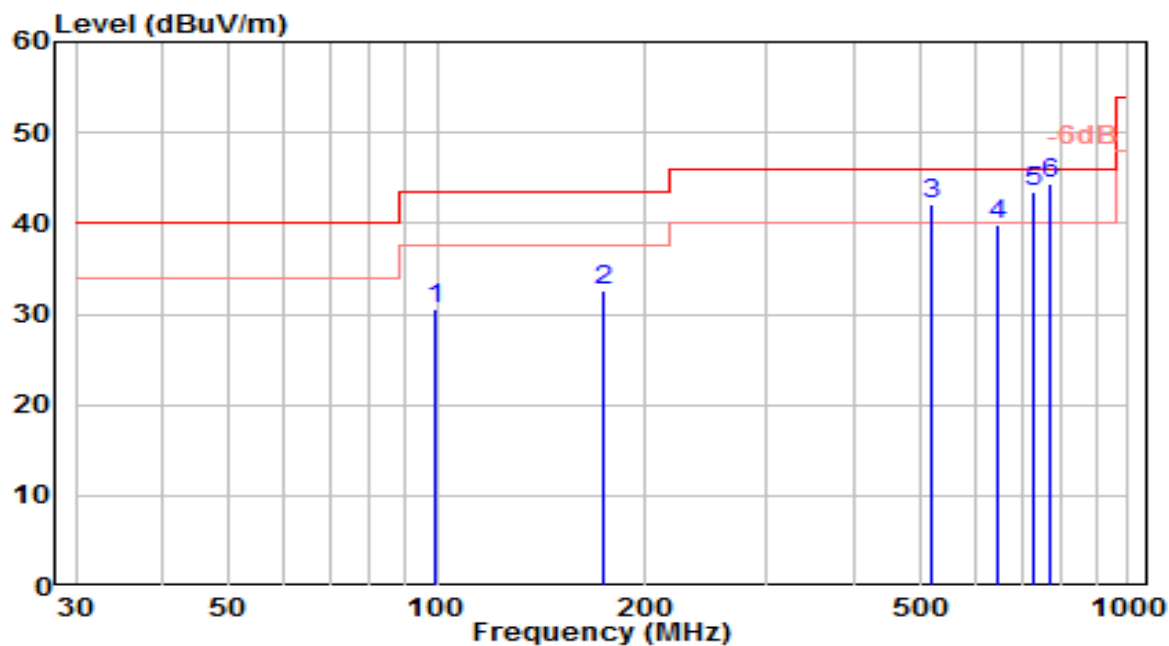


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	99.294	11.32	19.15	30.48	-13.02	43.50	100	205	QP
2	174.580	15.65	16.89	32.54	-10.96	43.50	100	135	QP
3	517.978	15.91	26.27	42.18	-3.82	46.00	100	340	QP
4	648.025	11.29	28.49	39.78	-6.22	46.00	185	210	QP
5	730.233	13.66	29.74	43.40	-2.60	46.00	110	160	QP
6	* 770.467	14.14	30.13	44.27	-1.73	46.00	110	250	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	VULB 9162	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Jeff
Test Mode	TX-RFID 125kHz	Test Voltage	AC 120V/60Hz

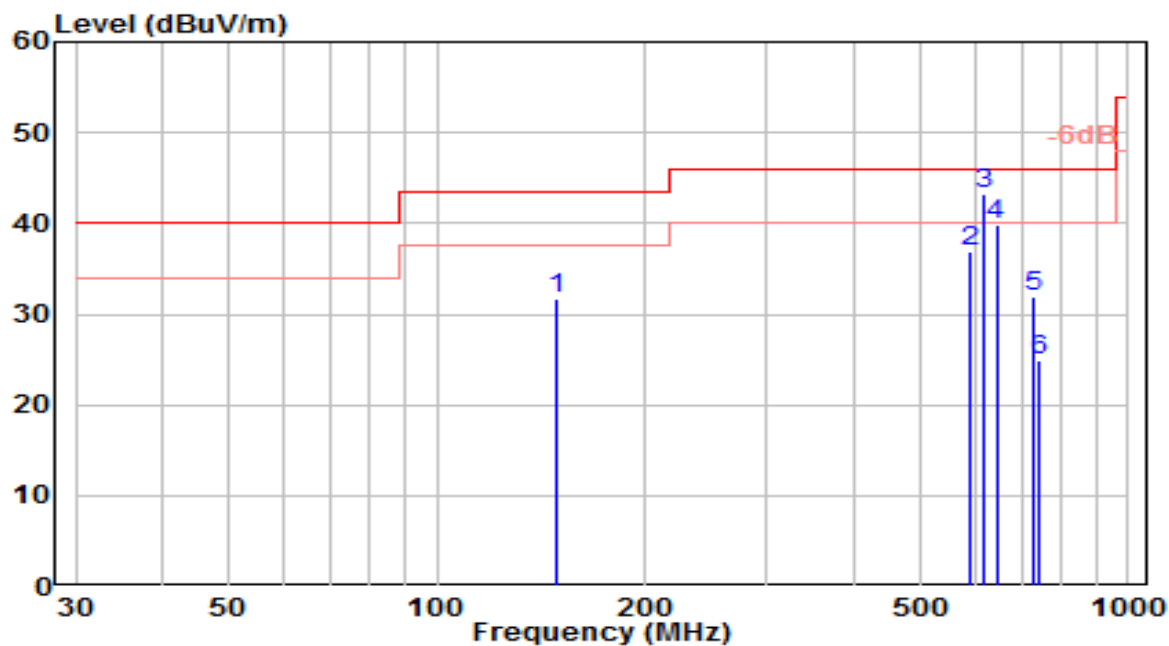


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	149.261	15.93	15.76	31.69	-11.81	43.50	100	120	QP
2	589.772	9.07	27.74	36.80	-9.20	46.00	100	310	QP
3	* 617.184	15.05	28.18	43.23	-2.77	46.00	100	245	QP
4	644.360	11.40	28.45	39.86	-6.14	46.00	100	80	QP
5	731.709	2.22	29.76	31.98	-14.02	46.00	100	290	QP
6	743.454	-5.12	29.92	24.80	-21.20	46.00	100	40	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	VULB 9162	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jeff
Test Mode	RX-RFID 125kHz	Test Voltage	AC 120V/60Hz

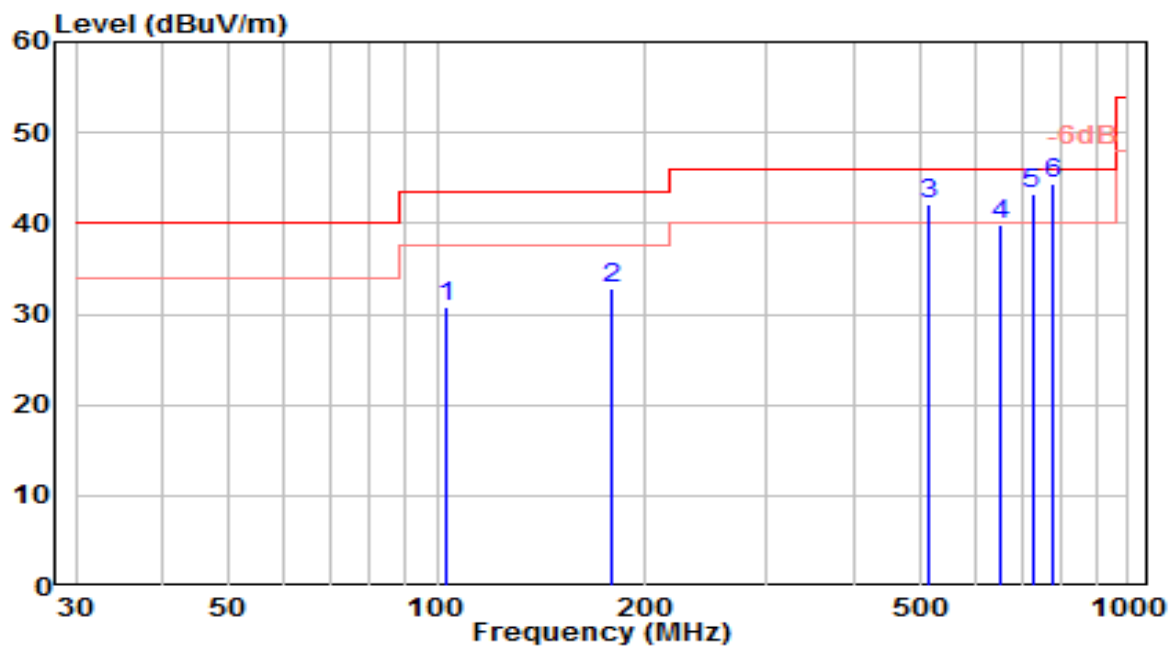


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	103.284	11.76	19.13	30.89	-12.61	43.50	100	220	QP
2	178.569	15.63	17.10	32.74	-10.76	43.50	100	150	QP
3	513.860	16.01	26.21	42.22	-3.78	46.00	100	355	QP
4	651.128	11.30	28.53	39.83	-6.17	46.00	185	225	QP
5	726.204	13.59	29.68	43.27	-2.73	46.00	110	175	QP
6	* 774.743	14.21	30.15	44.36	-1.64	46.00	110	265	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Monarch 8	Date of Test	2022-11-15
Factor	VULB 9162	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Jeff
Test Mode	RX-RFID 125kHz	Test Voltage	AC 120V/60Hz

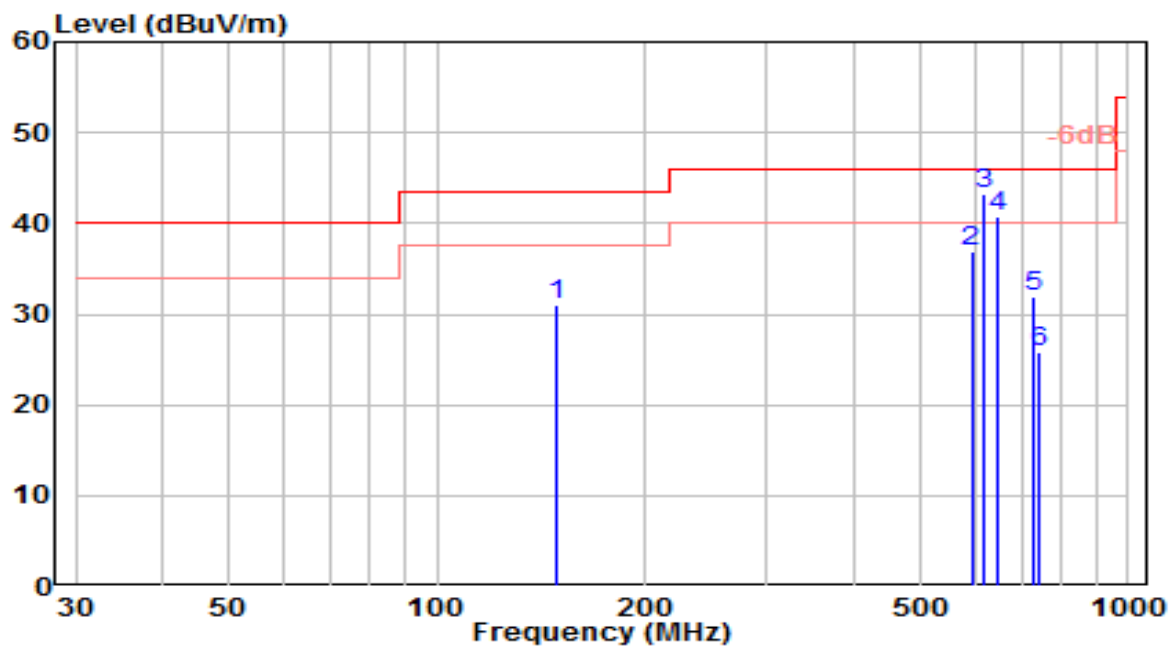

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	149.149	15.19	15.75	30.94	-12.56	43.50	100	135	QP
2	593.167	9.15	27.82	36.97	-9.03	46.00	100	325	QP
3	* 617.489	15.05	28.18	43.23	-2.77	46.00	100	260	QP
4	644.878	12.26	28.46	40.72	-5.28	46.00	100	95	QP
5	731.552	2.12	29.76	31.88	-14.12	46.00	100	305	QP
6	743.162	-4.02	29.92	25.90	-20.10	46.00	100	55	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.3. 20dB Bandwidth Measurement

7.3.1. Test Limit

N/A


7.3.2. Test Procedure Used

KDB 789033 D02v01r01 – Section C.1

7.3.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.3.4. Test Setup

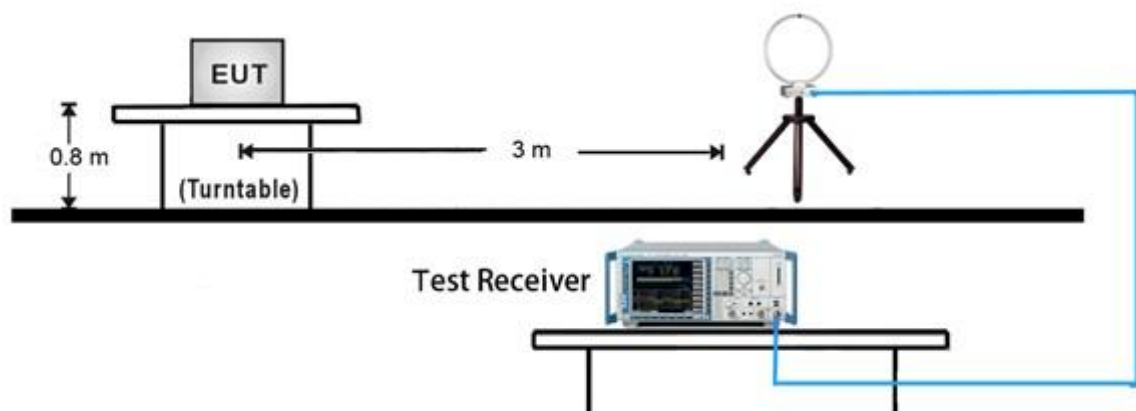

7.3.5. Test Result

Note: Please refer to the original report as 2209TWI301-U7.

7.4. AC Conducted Emissions Measurement


7.4.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.4.2. Test Setup

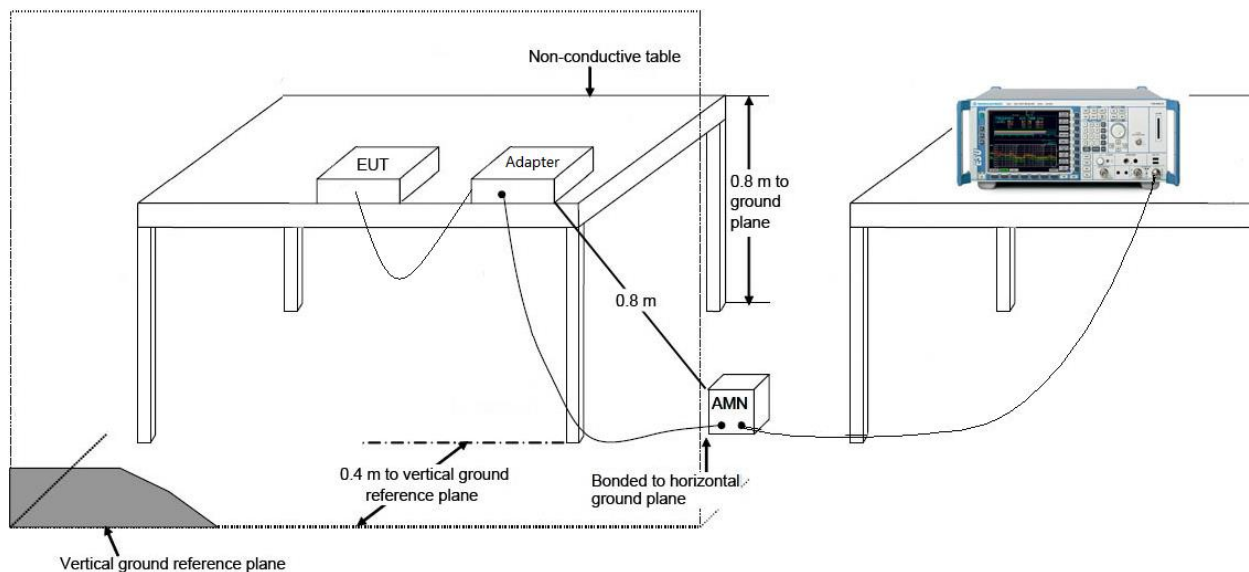

7.4.3. Test Result

EUT	Monarch 8	Date of Test	2022-11-03
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.5°C /59%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	TX-RFID 125kHz	Test Voltage	AC 120V/60Hz

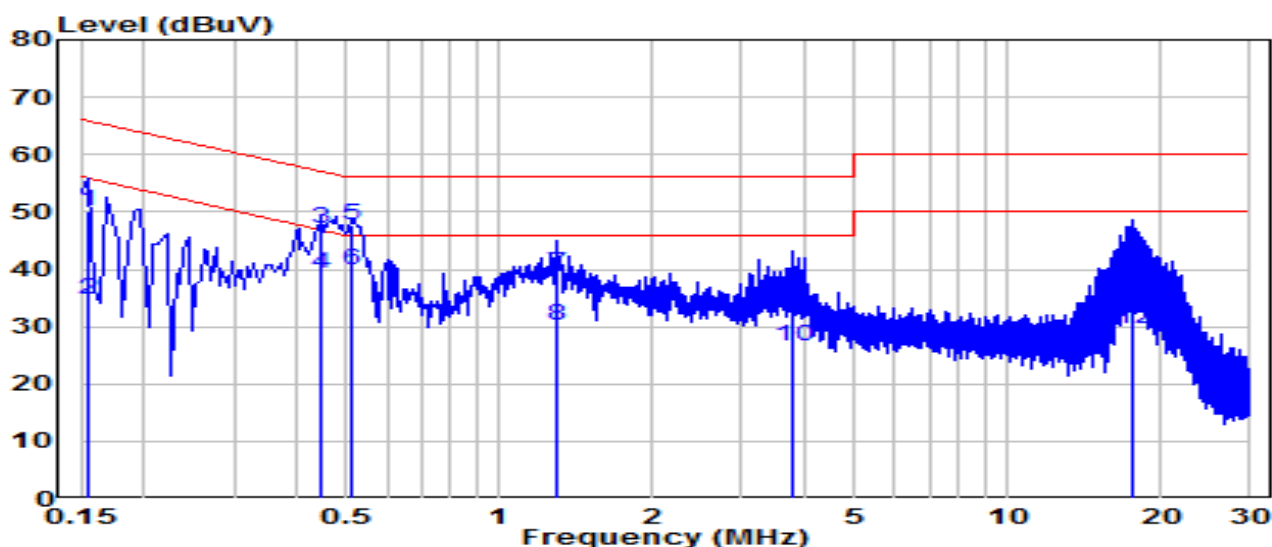


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	40.49	9.62	50.11	-15.65	65.75	QP
2	0.154	25.21	9.62	34.83	-20.92	55.75	Average
3	0.447	37.59	9.64	47.22	-9.71	56.93	QP
4	0.447	29.67	9.64	39.31	-7.63	46.93	Average
5	* 0.514	37.93	9.64	47.58	-8.42	56.00	QP
6	* 0.514	30.07	9.64	39.71	-6.29	46.00	Average
7	1.302	29.57	9.68	39.25	-16.75	56.00	QP
8	1.302	20.65	9.68	30.33	-15.67	46.00	Average
9	3.790	25.95	9.73	35.67	-20.33	56.00	QP
10	3.790	16.91	9.73	26.63	-19.37	46.00	Average
11	17.635	30.04	9.91	39.95	-20.05	60.00	QP
12	17.635	19.66	9.91	29.58	-20.42	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Monarch 8	Date of Test	2022-11-03
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.5°C / 59%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	TX-RFID 125kHz	Test Voltage	AC 120V/60Hz

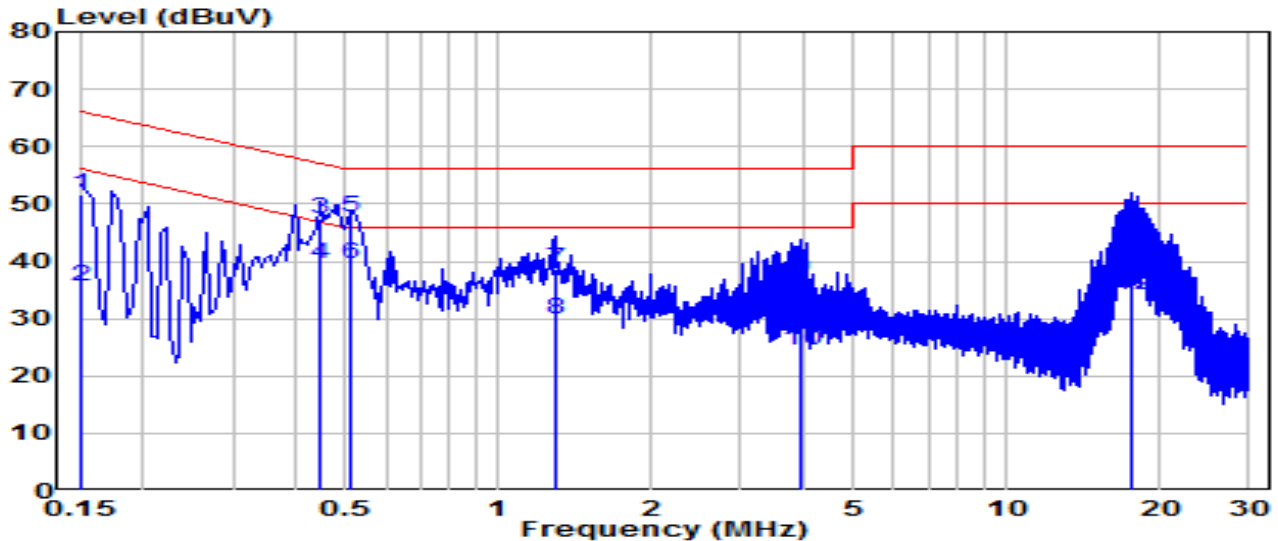


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.150	41.95	9.62	51.57	-14.43	66.00	QP
2		0.150	26.11	9.62	35.73	-20.27	56.00	Average
3		0.447	37.63	9.64	47.27	-9.66	56.93	QP
4		0.447	29.80	9.64	39.44	-7.49	46.93	Average
5	*	0.514	38.08	9.64	47.72	-8.28	56.00	QP
6	*	0.514	29.79	9.64	39.44	-6.56	46.00	Average
7		1.297	29.01	9.68	38.69	-17.31	56.00	QP
8		1.297	20.22	9.68	29.90	-16.10	46.00	Average
9		3.939	26.97	9.73	36.70	-19.30	56.00	QP
10		3.939	14.76	9.73	24.48	-21.52	46.00	Average
11		17.730	33.99	9.97	43.96	-16.04	60.00	QP
12		17.730	24.28	9.97	34.25	-15.75	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Monarch 8	Date of Test	2022-11-03
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.5°C /59%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	TX-RFID 125kHz	Test Voltage	AC 240V/60Hz

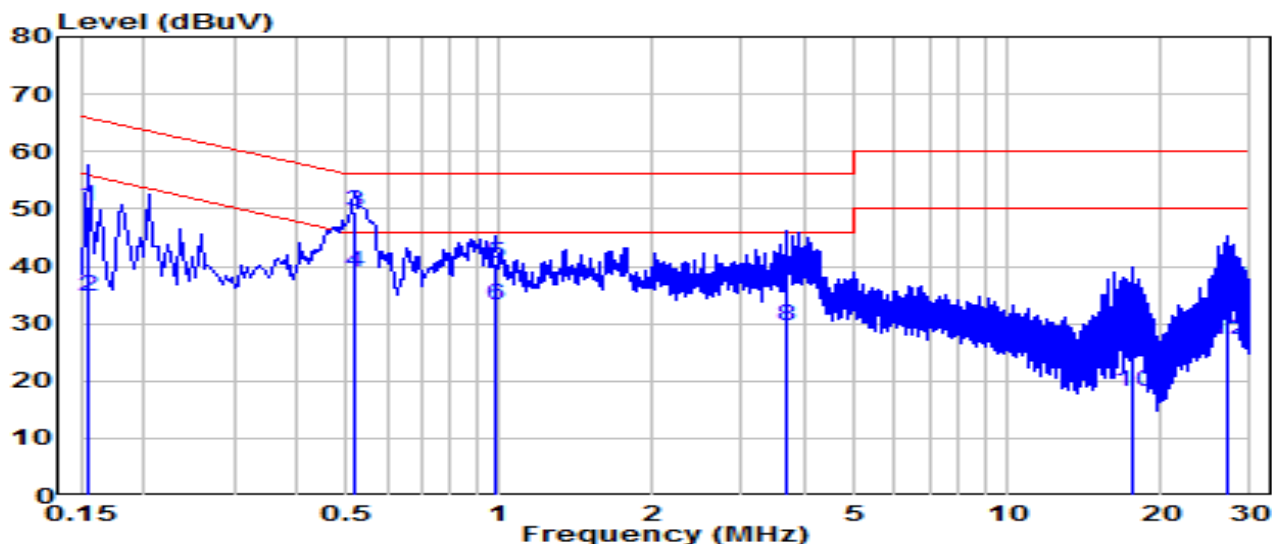


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	40.75	9.62	50.37	-15.38	65.75	QP
2	0.154	25.15	9.62	34.77	-20.99	55.75	Average
3	* 0.519	39.95	9.64	49.59	-6.41	56.00	QP
4	* 0.519	29.31	9.64	38.95	-7.05	46.00	Average
5	0.978	30.86	9.67	40.53	-15.47	56.00	QP
6	0.978	23.66	9.67	33.33	-12.67	46.00	Average
7	3.687	28.38	9.72	38.11	-17.89	56.00	QP
8	3.687	19.76	9.72	29.48	-16.52	46.00	Average
9	17.545	20.56	9.91	30.47	-29.53	60.00	QP
10	17.545	8.08	9.91	17.99	-32.01	50.00	Average
11	27.228	26.36	9.91	36.28	-23.72	60.00	QP
12	27.228	17.21	9.91	27.12	-22.88	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Monarch 8	Date of Test	2022-11-03
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.5°C / 59%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	TX-RFID 125kHz	Test Voltage	AC 240V/60Hz

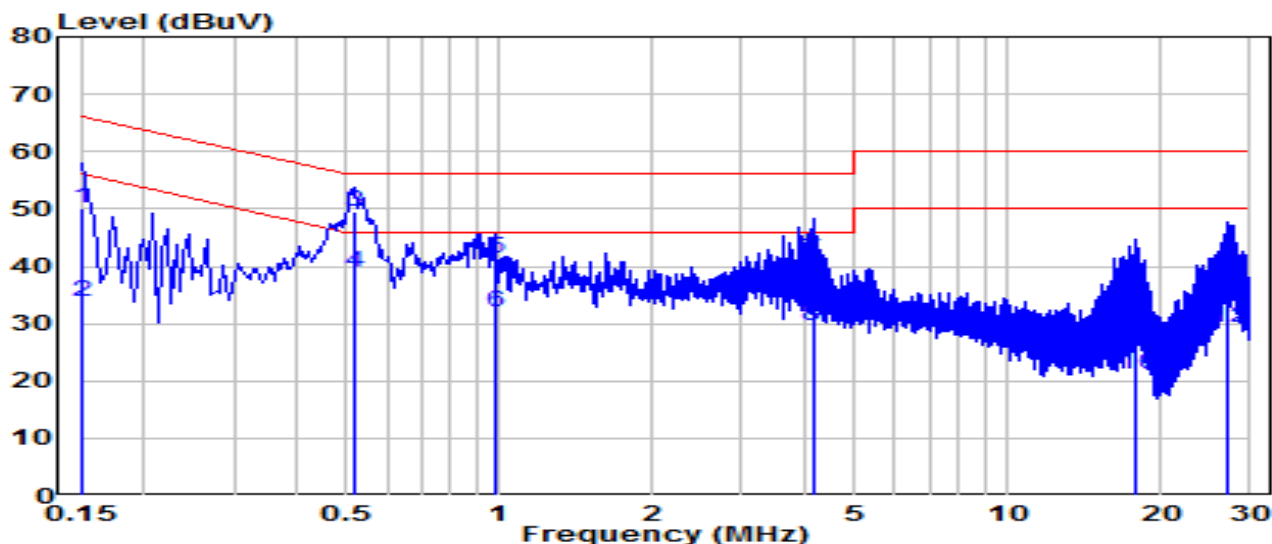

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.150	40.63	9.62	50.25	-15.75	66.00	QP
2		0.150	24.18	9.62	33.80	-22.20	56.00	Average
3	*	0.519	39.99	9.64	49.64	-6.36	56.00	QP
4	*	0.519	29.36	9.64	39.01	-6.99	46.00	Average
5		0.982	31.78	9.67	41.44	-14.56	56.00	QP
6		0.982	22.34	9.67	32.01	-13.99	46.00	Average
7		4.132	31.25	9.73	40.98	-15.02	56.00	QP
8		4.132	19.83	9.73	29.56	-16.44	46.00	Average
9		17.802	24.15	9.97	34.12	-25.88	60.00	QP
10		17.802	11.04	9.97	21.01	-28.99	50.00	Average
11		27.089	28.24	10.03	38.27	-21.73	60.00	QP
12		27.089	19.26	10.03	29.30	-20.70	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Intercom** is in compliance with Part 15.209 of the FCC Rules.

_____ The End _____