

FCC PART 90 TEST REPORT

For

Fujian Nanan Quansheng Electronics Co., Ltd.

NO.82 Qiuzhong Industry Area, Xiamei Town, Nanan City, Fujian Province, 362302 China

FCC ID: XBPAT-D5

Report Type: Original Report	Product Name: DMR two way radio
Report Number:	RXM170922052-00
Report Date:	2017-10-26
Reviewed By:	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1310 & §2.1093 - RF EXPOSURE.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1046 & §90.205- RF OUTPUT POWER.....	9
APPLICABLE STANDARD	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA	9
FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049& §22.357 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK.....	15
APPLICABLE STANDARD	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE	16
TEST DATA	16
FCC §2.1051&§90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST PROCEDURE	23
TEST DATA	23
FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	27
TEST DATA	27
FCC §2.1055 & §90.213- FREQUENCY STABILITY.....	29
APPLICABLE STANDARD	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST PROCEDURE	29

TEST DATA	30
FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....	31
APPLICABLE STANDARD	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST PROCEDURE	31
TEST DATA	31

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Fujian Nanan Quansheng Electronics Co., Ltd.*'s product, model number: *AT-D5* (*FCC ID: XBPAT-D5*) (the "EUT") in this report was a *DMR two way radio*, which was measured approximately: 14.0 cm (L) x 6.1 cm (W) x 4.0 cm (H), DC7.2V from Li-ion Battery or DC 12V from adapter.

Adapter Information:

Model: *CG-D120050*

Input: *AC100-240V, 50/60Hz, 0.3A Max*

Output: *DC 12V, 500mA*

Note: The series product, models *AT-D5, PT-D5, TG-DM88* and *TG-DM88A* are electrically identical, we selected *AT-D5* for all testing, and all models for radiation test, the detail was explained in the attached declaration letter.

*All measurement and test data in this report was gathered from production sample serial number: 170922052 (Assigned by *BACL, Dongguan*). The EUT was received on 2017-09-25.

Objective

This test report is prepared on behalf of *Fujian Nanan Quansheng Electronics Co., Ltd.* in accordance with Part 90 of the Federal Communications Commission rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – PRIVATE LAND MOBILE RADIO SERVICES

Applicable Standards: TIA-603-D.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Bay Area Compliance Laboratories Corp. (Dongguan) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L5662). And accredited to ISO/IEC 17025 by NVLAP(Test Laboratory Accreditation Certificate Number 500069-0), the FCC Designation No. CN5002 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Dongguan) was registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode.


EUT Specification:

No software was used in test

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Terminal Load(50 Ω)	N/A	N/A
HP	RF Communications Test Set	8920A	00 235

Block Diagram of Test Setup

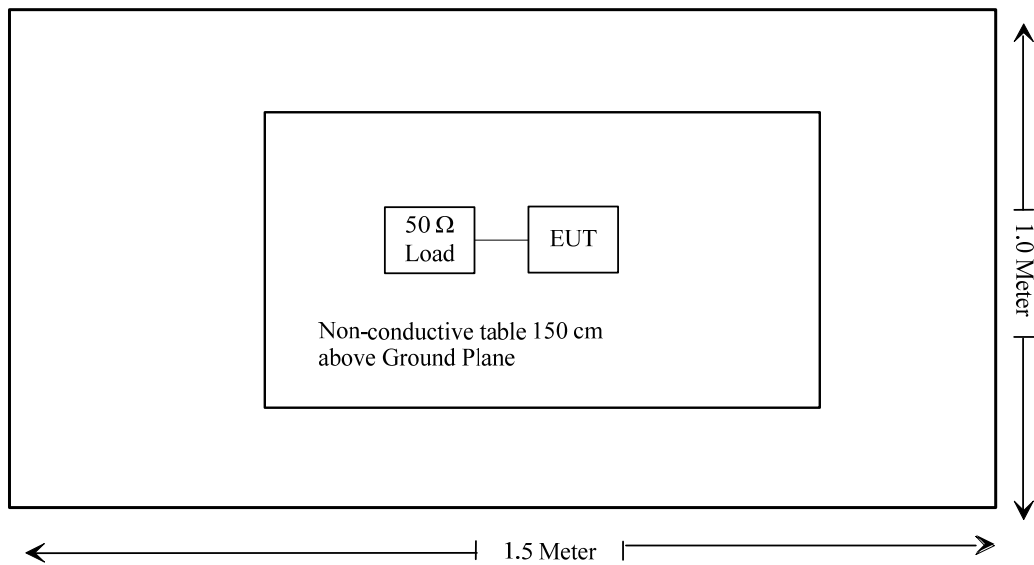

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
FCC§1.1310 & §2.1093	RF Exposure	Compliant
FCC§2.1046 & §90.205	RF Output Power	Compliant
FCC§2.1047 & §90.207	Modulation Characteristic	Compliant
FCC§2.1049 & §90.209 & §90.210	Occupied Bandwidth & Emission Mask	Compliant
FCC§2.1051 & §90.210	Spurious Emission at Antenna Terminal	Compliant
FCC§2.1053 & 90.210&	Spurious Radiated Emissions	Compliant
FCC§2.1055 & §90.213	Frequency Stability	Compliant
FCC§90.214	Transient Frequency Behavior	Compliant

FCC §1.1310 & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RXM170922052-20.

FCC §2.1046 & §90.205- RF OUTPUT POWER

Applicable Standard

FCC §2.1046 and §90.205.

Test Procedure

Conducted RF Output Power:

TIA-603-D section 2.2.1

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer setting:

RBW	VBW
100 kHz	300 kHz

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	Each Time	/
E-Microwave	RF Attenuator	20dB	20dB-1	Each Time	/
E-Microwave	RF Attenuator	20dB	20dB-2	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	45 %
ATM Pressure:	100.8 kPa

The testing was performed by Pean Zhu on 2017-10-18.

Test Result: Compliant. Please refer to following tables.

Modulation	Channel Spacing (kHz)	f _c (MHz)	Conducted Output Power (W)		Note
			High	Low	
FM	12.5	400.0125	4.81	1.60	Not for FCC Review
		453.2125	4.71	1.61	/
		469.9875	4.51	1.54	/
4FSK	12.5	400.0125	4.72	1.57	Not for FCC Review
		453.2125	4.78	1.52	/
		469.9875	4.60	1.53	/

Note: The high rated power is 5W, low rated power is 1.5W.

FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC

Applicable Standard

FCC§2.1047 & §90.207

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
LEADER	Millivoltmeter	LMV-181A	601788	2017-08-11	2018-08-10
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	Each Time	/
E-Microwave	RF Attenuator	20dB	20dB-1	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	45 %
ATM Pressure:	100.8 kPa


The testing was performed by Pean Zhu on 2017-10-18.

Test Result: Compliant. Please refer to following table and plots.

MODULATION LIMITING

Carrier Frequency: 453.2125 MHz, Channel Spacing = 12.5 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	0.978	0.104	0.963	0.098	2.5
400	1.175	0.111	1.165	0.099	2.5
500	1.57	0.138	1.53	0.103	2.5
600	1.728	0.149	1.706	0.133	2.5
700	1.754	0.156	1.719	0.121	2.5
800	1.851	0.168	1.799	0.15	2.5
900	1.952	0.167	1.907	0.151	2.5
1000	2.09	0.192	2.064	0.175	2.5
1200	2.1	0.223	2.088	0.197	2.5
1400	1.997	0.229	1.982	0.215	2.5
1600	1.971	0.257	1.951	0.226	2.5
1800	1.954	0.262	1.918	0.255	2.5
2000	1.885	0.289	1.882	0.261	2.5
2200	1.798	0.294	1.785	0.27	2.5
2400	1.975	0.325	1.965	0.301	2.5
2600	1.982	0.339	1.947	0.323	2.5
2800	1.999	0.347	1.941	0.341	2.5
3000	1.698	0.342	1.689	0.326	2.5

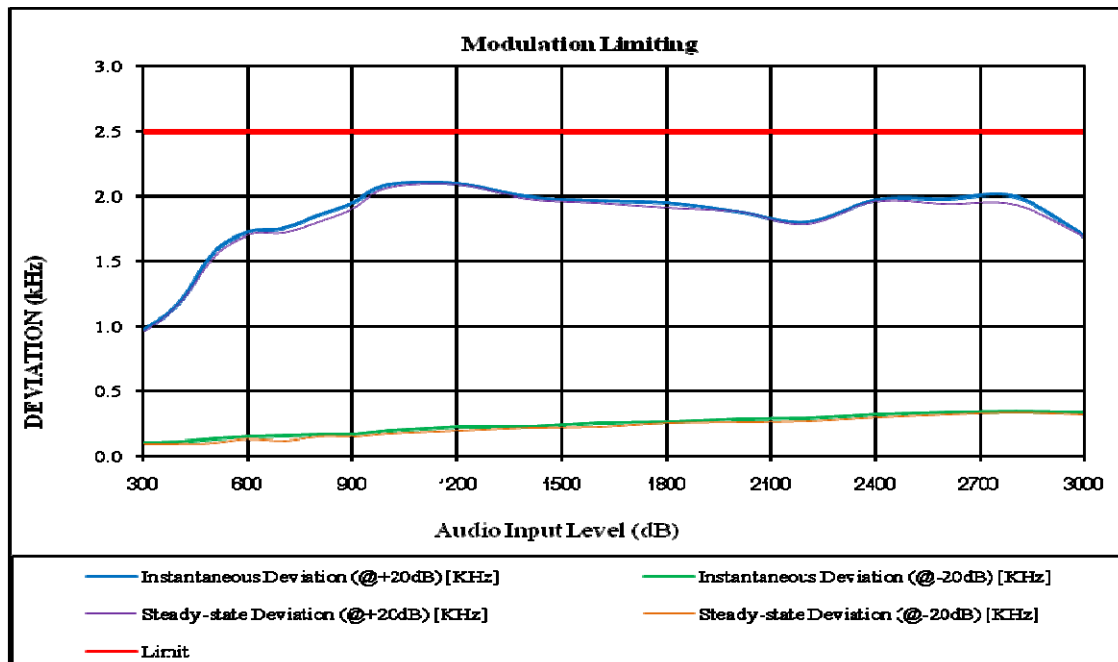

Audio Frequency Response

Carrier Frequency: 453.2125 MHz, Channel Spacing = 12.5 kHz


Audio Frequency Hz	Response Attenuation dB
300	-12.02
400	-8.53
500	-6.20
600	-4.28
700	-2.77
800	-1.73
900	-0.64
1000	0.00
1200	1.53
1400	2.87
1600	4.08
1800	5.06
2000	5.89
2200	6.40
2400	6.40
2600	6.70
2800	6.97
3000	7.04

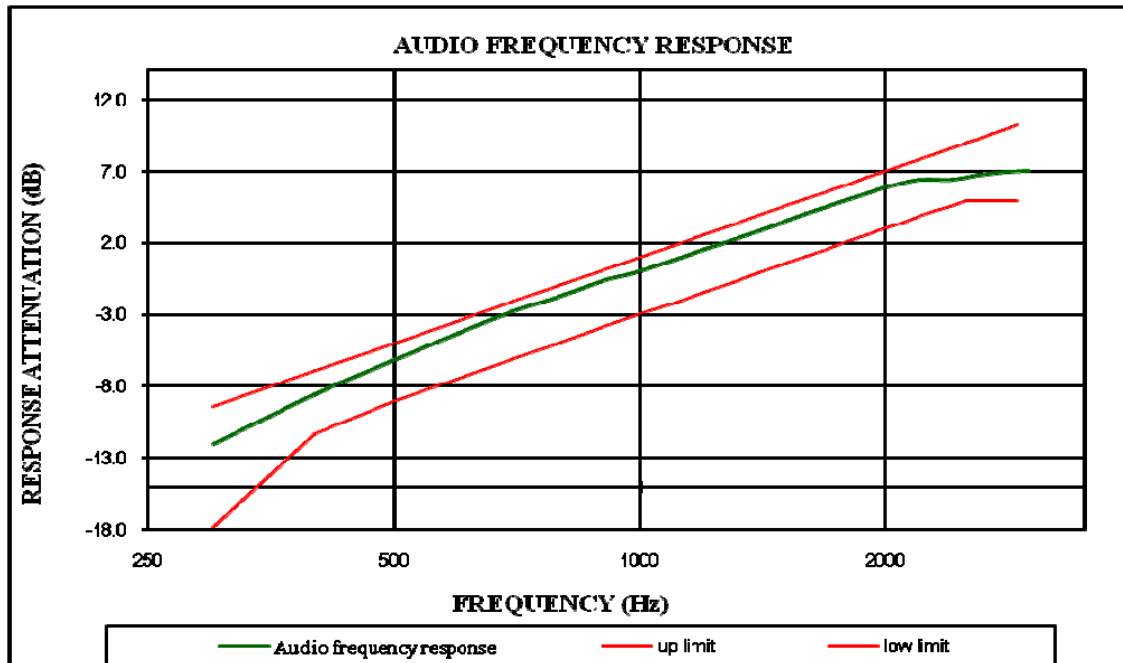

Audio Frequency Low Pass Filter Response

Carrier Frequency: 453.2125 MHz, Channel Spacing = 12.5 kHz, high power level

Audio Frequency	Response Attenuation	Limit
kHz	dB	dB
3.0	-2.7	0.0
3.5	-9.4	-6.7
4.0	-14.8	-12.5
5.0	-25.1	-22.2
7.0	-39.1	-36.8
10.0	-54.7	-52.3
15.0	-72.2	-69.9
20.0	-85.3	-82.5
30.0	-85.9	-82.5
50.0	-85.1	-82.5
70.0	-85.5	-82.5

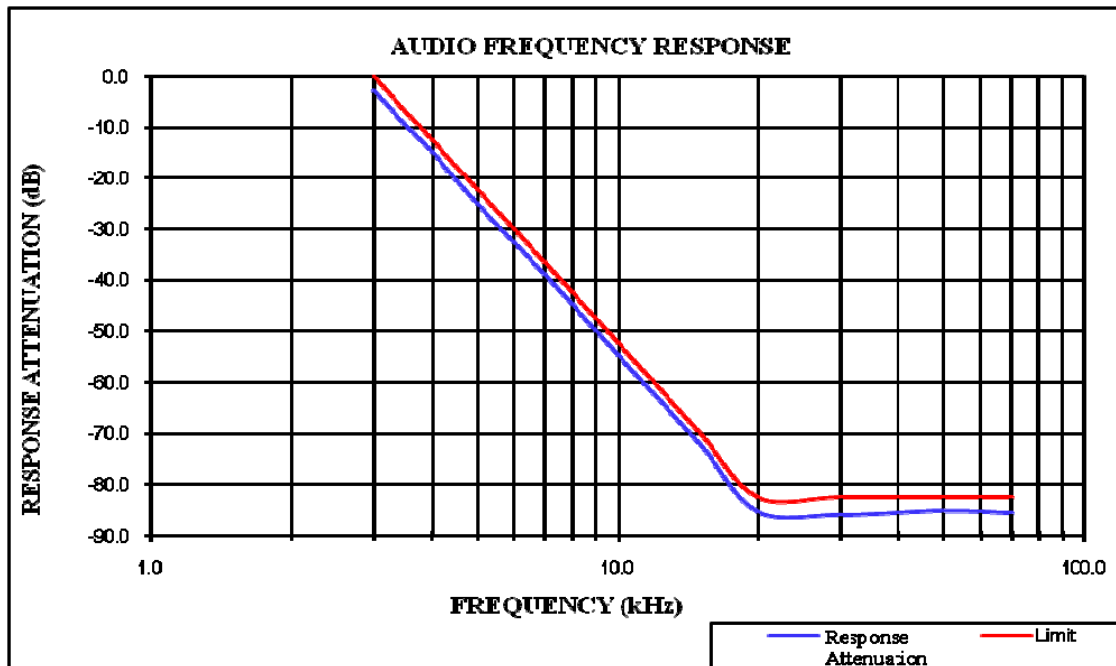

FCC §2.1049 & §22.357 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §90.209 and §90.210

Applicable Emission Masks

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25	A or B	A or C
25-50	B	C
72-76	B	C
150-174	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854	B	H
809-824/854-869	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925		
All other bands	B	C

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	Each Time	/
E-Microwave	RF Attenuator	20dB	20dB-2	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	45 %
ATM Pressure:	100.8 kPa

The testing was performed by Pean Zhu on 2017-10-18.

Test Result: Compliant. Please refer to the following tables and plots.

Modulation Mode	Channel Spacing	f _c	99% Occupied Bandwidth	26 dB Bandwidth	Power Level
	kHz		MHz	kHz	
FM	12.5 kHz	453.2125	9.820	10.321	High
			9.820	10.321	Low
4FSK	12.5 kHz		7.315	9.218	High
			7.315	9.419	Low

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator

Per CFR 47 §2.201& §2.202, $BW = 2M + 2D$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)


Emission Designator 7K60F1D and 7K60F1E

The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).


F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.


Occupied Bandwidth – FM, 453.2125 MHz, High Power Level

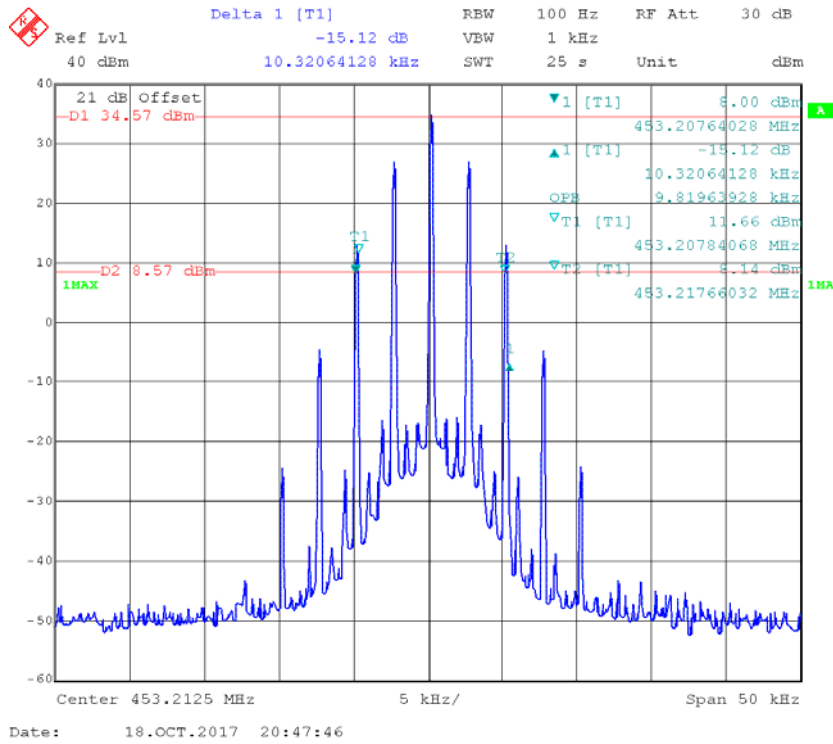


Emission Mask - Type D

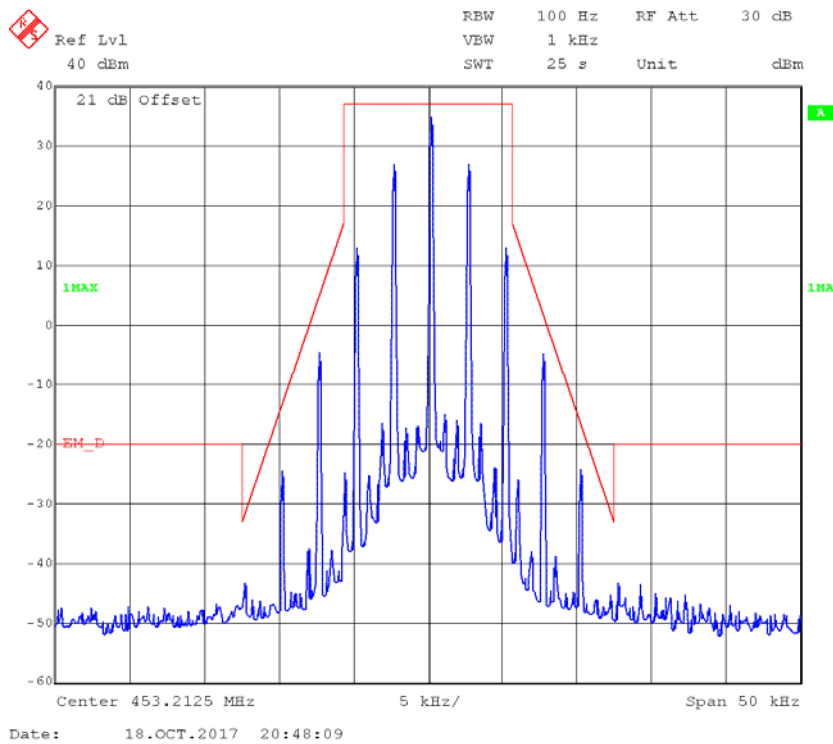


Occupied Bandwidth – FM, 453.2125 MHz, Low Power Level

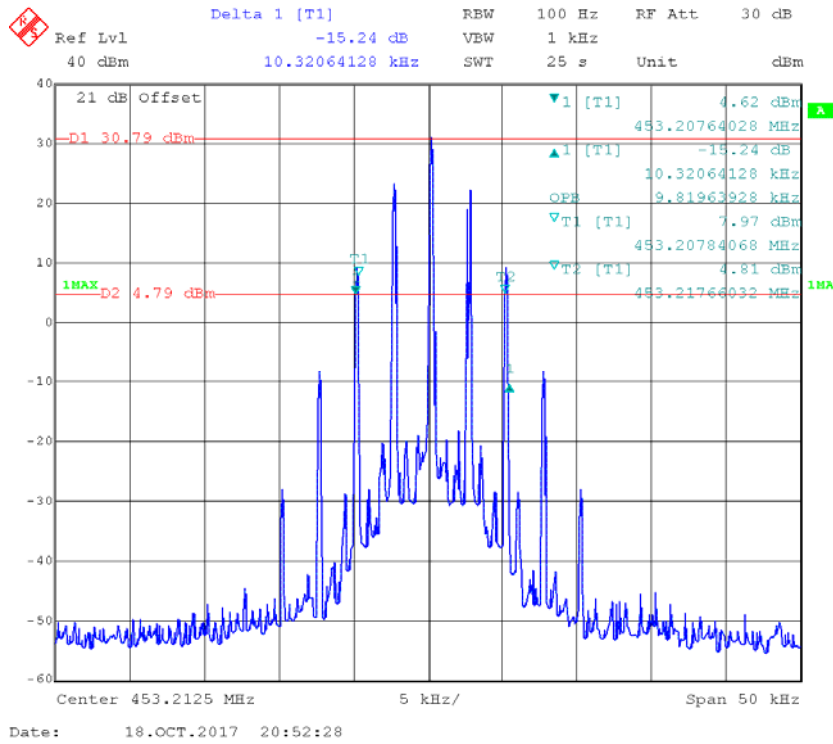


Emission Mask - Type D

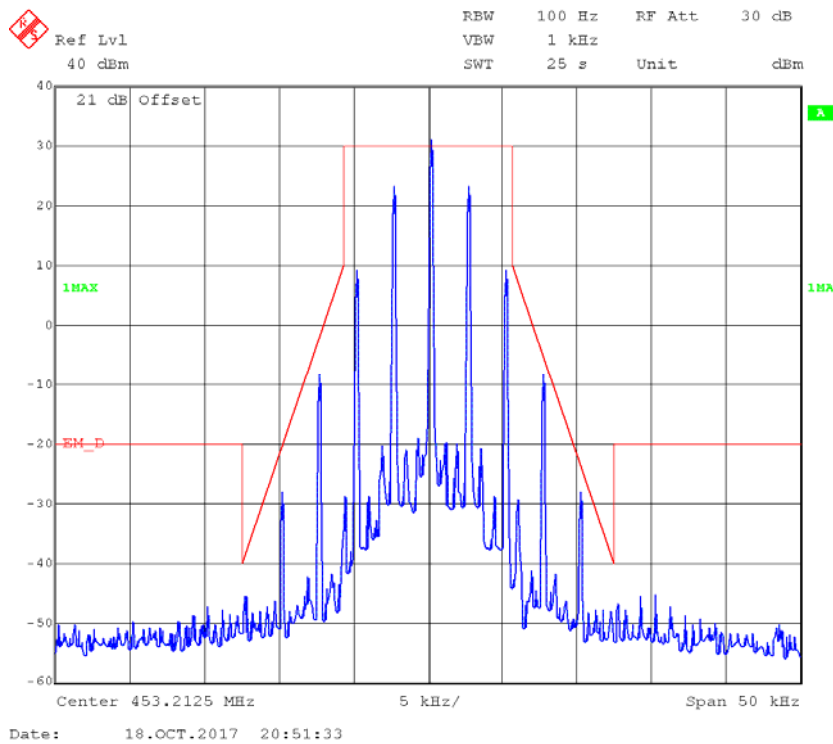


Occupied Bandwidth – 4FSK, 453.2125 MHz, High Power Level

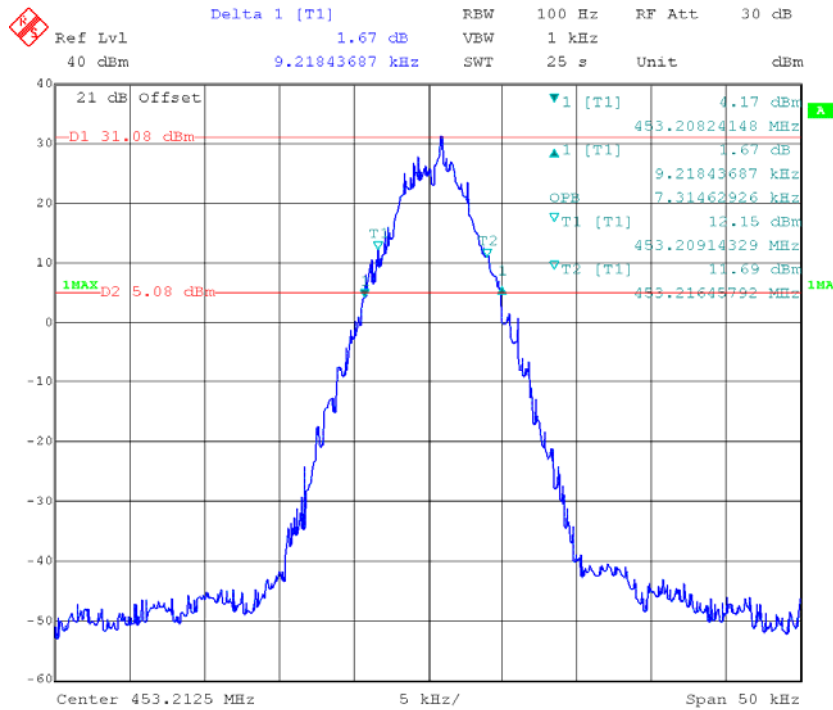


Emission Mask - Type D

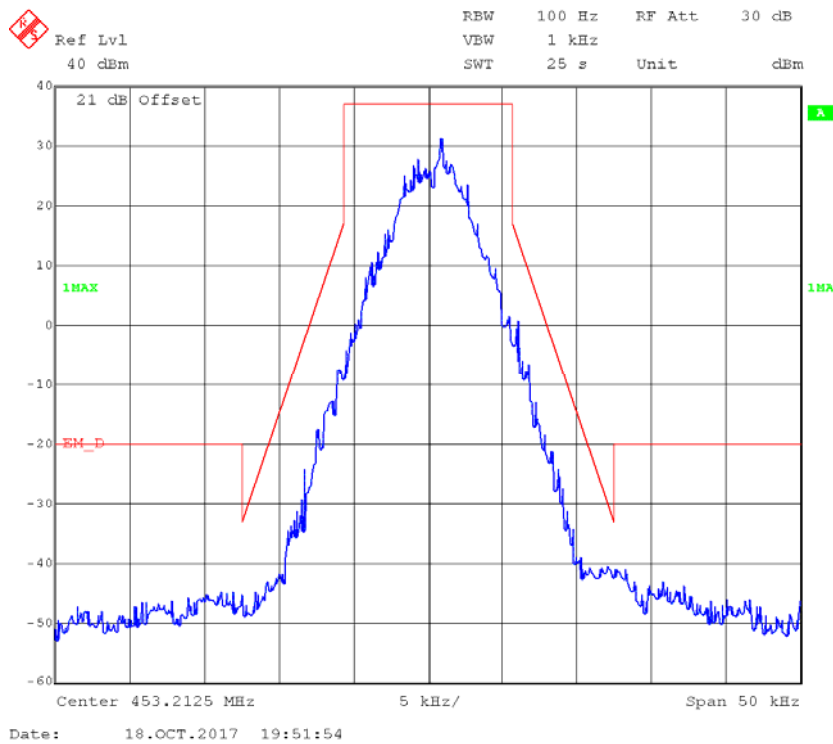

Occupied Bandwidth – 4FSK, 453.2125 MHz, Low Power Level

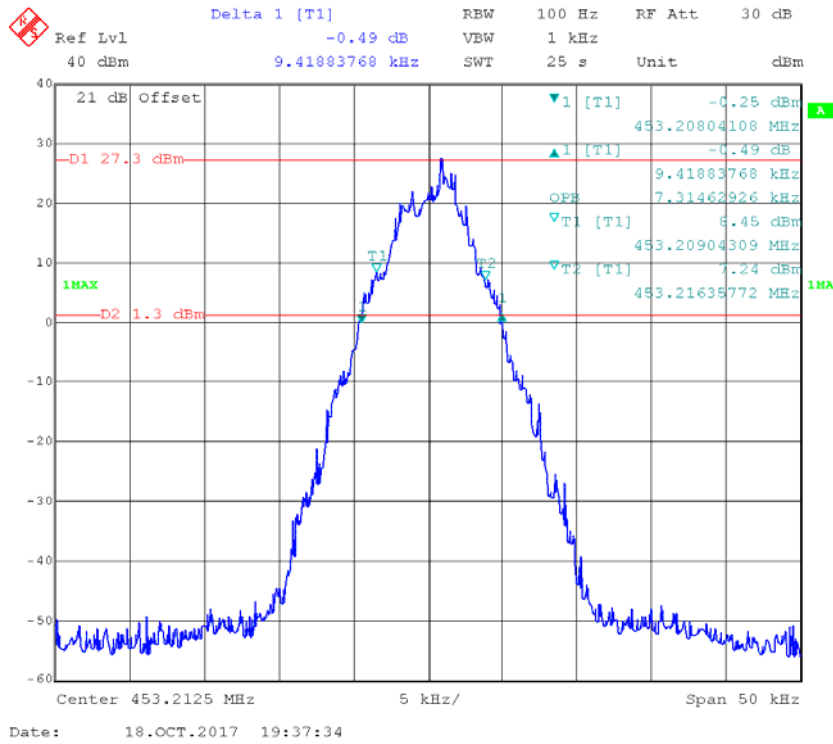

Emission Mask - Type D

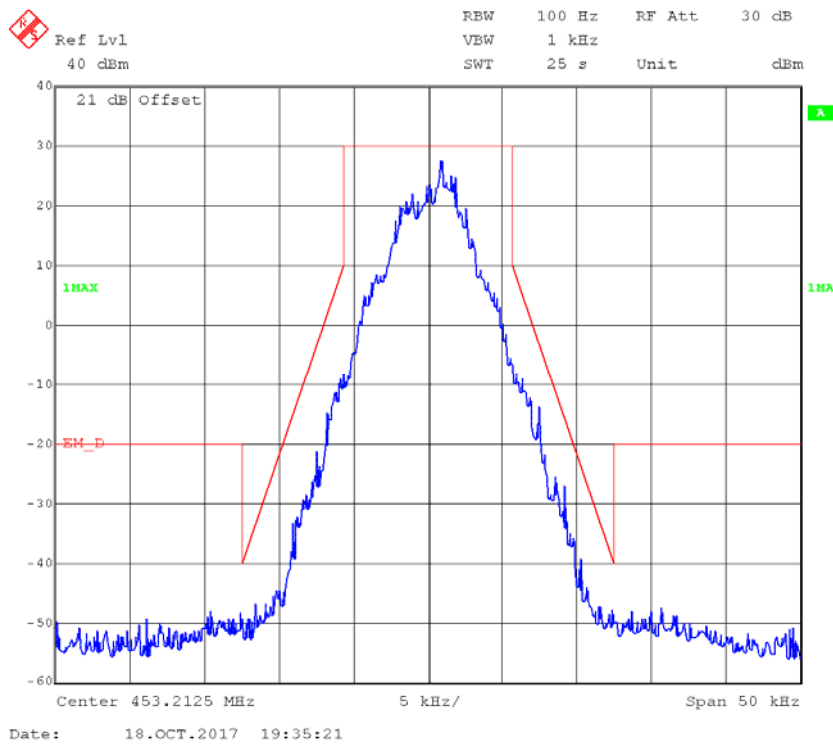

FCC §2.1051&§90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

§90.210 Emission limitations:

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2017-05-06	2018-05-06
E-Microwave	RF Attenuator	20dB	20dB-2	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Adjust the spectrum analyzer for the following settings:



- 1) Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1 GHz.
- 2) Video Bandwidth ≥ 3 times the resolution bandwidth.
- 3) Sweep Speed ≤ 2000 Hz per second.
- 4) Detector Mode = peak.

Test Data**Environmental Conditions**



Temperature:	26.1 °C
Relative Humidity:	45 %
ATM Pressure:	100.8 kPa

The testing was performed by Pean Zhu on 2017-10-18.

453.2125 MHz – FM Mode,High Power

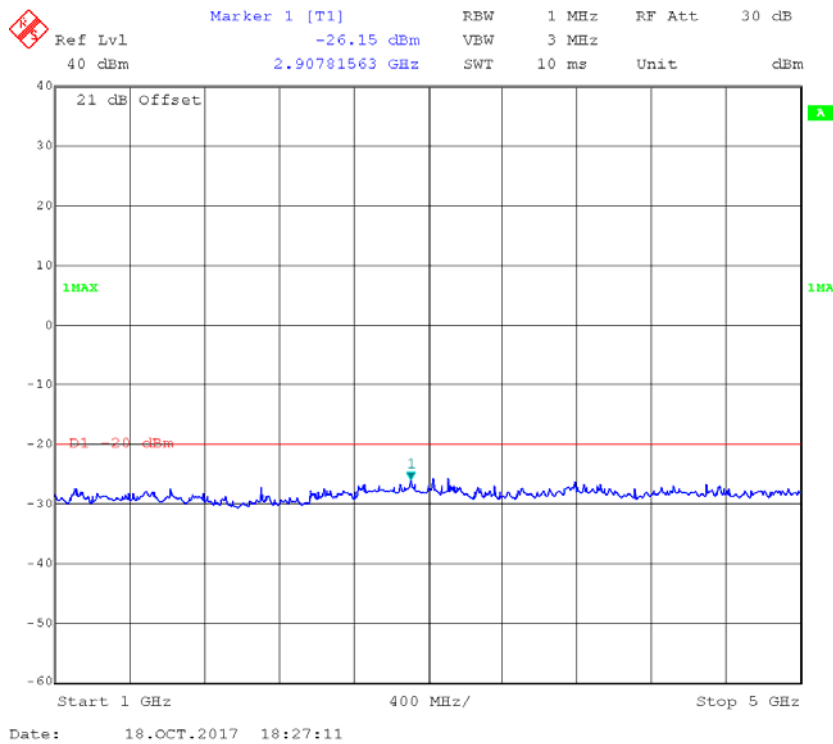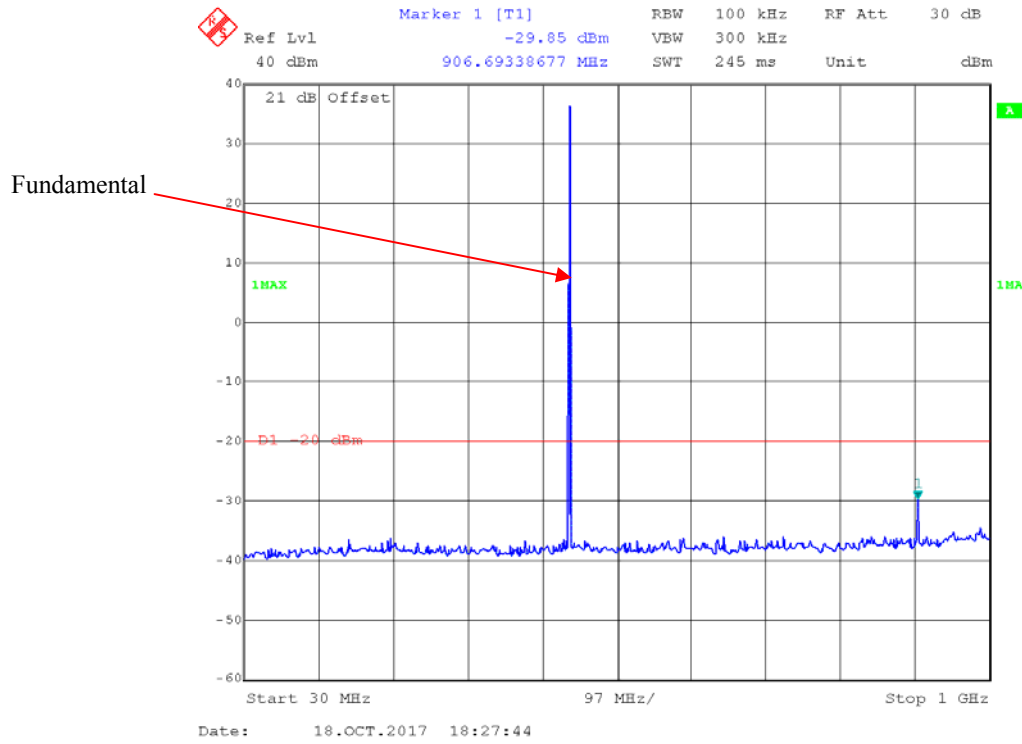

453.2125 MHz –4FSK Mode,High Power

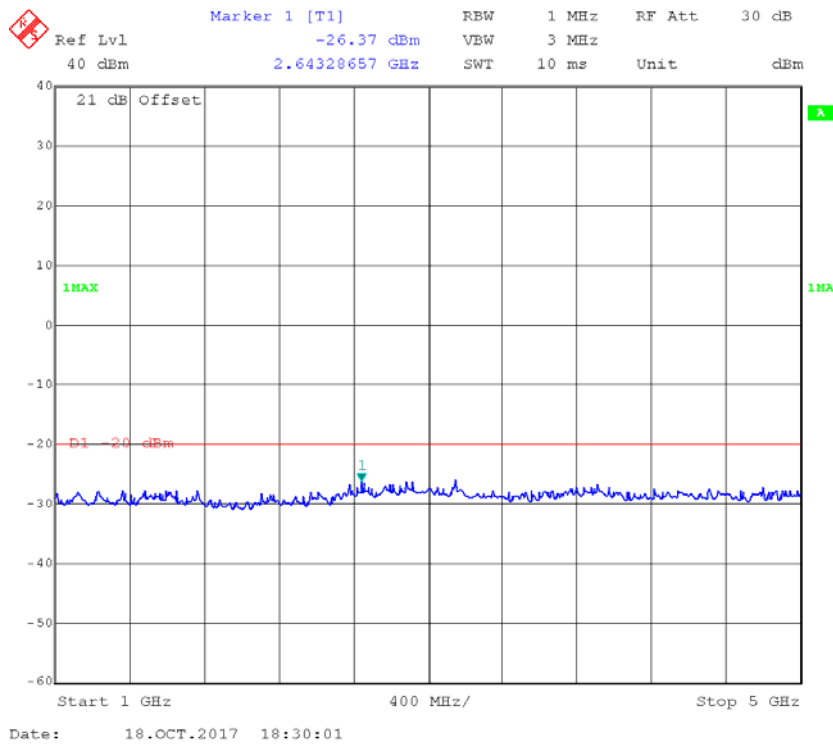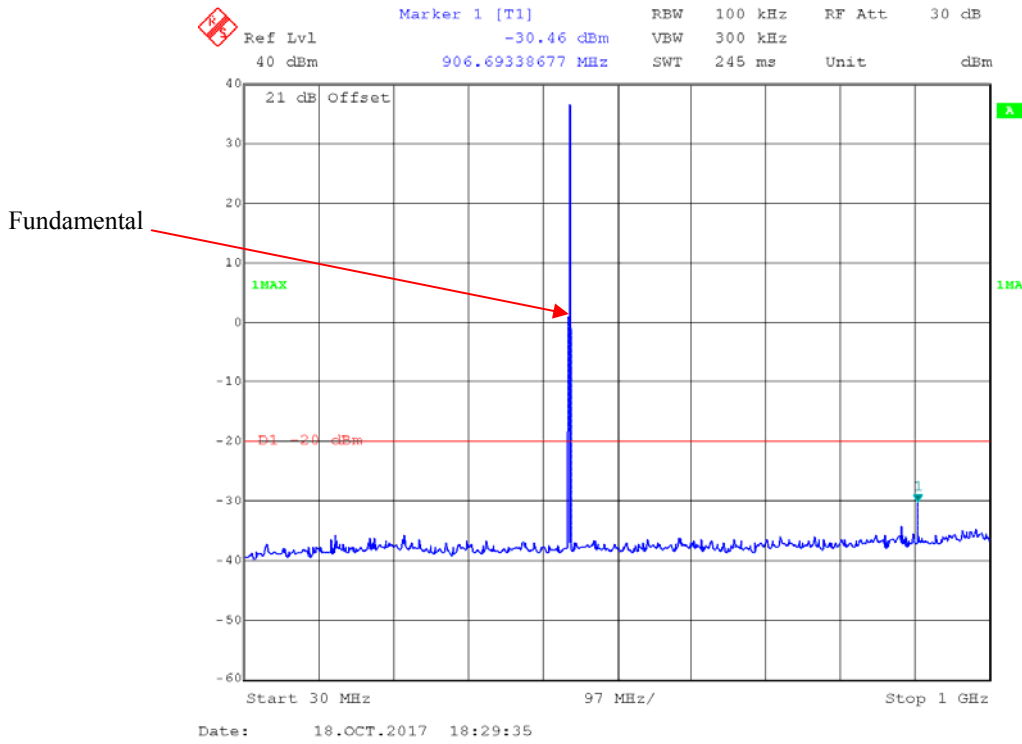

FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053 and §90.210

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2017-09-05	2018-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2016-12-08	2017-12-08
ETS LINDGREN	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
HP	Signal Generator	1026	320408	2016-12-08	2017-12-08
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
Unknown	Coaxial Cable	Chamber A-1	4m	2017-09-05	2018-09-05
Unknown	Coaxial Cable	Chamber B-1	0.75m	2017-09-05	2018-09-05
Unknown	Coaxial Cable	Chamber A-2	10m	2017-09-05	2018-09-05
Unknown	Coaxial Cable	Chamber B-2	8m	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

For part 90:

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Test Data

Environmental Conditions

Temperature:	24.9 °C
Relative Humidity:	36 %
ATM Pressure:	101.3 kPa

The testing was performed by Sunny Cen on 2017-10-24.

Test Mode: Transmitting (AT-D5 was the worst)

Frequency (MHz)	Polar (H/V)	S.A. Reading (dB μ V)	Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
FM, 12.5 kHz, Frequency: 453.2125 MHz								
906.425	H	35.50	-38.7	0.0	1.1	-39.8	-20.0	19.8
906.425	V	36.80	-34.2	0.0	1.1	-35.3	-20.0	15.3
1359.638	H	42.67	-60.2	9.4	1.2	-52.0	-20.0	32.0
1359.638	V	47.64	-55.4	9.4	1.2	-47.2	-20.0	27.2
1812.850	H	45.28	-57.2	10.9	1.2	-47.5	-20.0	27.5
1812.850	V	49.55	-52.8	10.9	1.2	-43.1	-20.0	23.1
2266.063	H	45.27	-56.1	11.9	1.2	-45.4	-20.0	25.4
2266.063	V	48.64	-53.5	11.9	1.2	-42.8	-20.0	22.8
4FSK, 12.5kHz, Frequency: 453.2125 MHz								
906.425	H	34.22	-40	0.0	1.1	-41.1	-20.0	21.1
906.425	V	35.64	-35.3	0.0	1.1	-36.4	-20.0	16.4
1359.638	H	42.29	-60.5	9.4	1.2	-52.3	-20.0	32.3
1359.638	V	46.10	-56.9	9.4	1.2	-48.7	-20.0	28.7
1812.850	H	44.92	-57.5	10.9	1.2	-47.8	-20.0	27.8
1812.850	V	48.26	-54.1	10.9	1.2	-44.4	-20.0	24.4
2266.063	H	41.00	-60.4	11.9	1.2	-49.7	-20.0	29.7
2266.063	V	43.40	-58.7	11.9	1.2	-48.0	-20.0	28.0

FCC §2.1055 & §90.213- FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, §90.213

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2017-09-10	2018-09-09
UNI-T	Multimeter	UT39A	M130199938	2017-04-10	2018-04-10
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2017-05-06	2018-05-06
E-Microwave	RF Attenuator	20dB	20dB-1	Each Time	/
Pro instrument	DC Power Supply	pps3300	N/A	N/A	N/A
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The power leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

Test Data**Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	45 %
ATM Pressure:	100.8 kPa

The testing was performed by Pean Zhu on 2017-10-18.

Test Mode: Transmitting

Reference Frequency: 453.2125 MHz, Limit: 2.5 ppm			
Temperature	Voltage	Measured	Frequency Error
°C	V _{DC}	MHz	ppm
-30	7.2	453.212737	0.52
-20		453.212733	0.51
-10		453.212745	0.54
0		453.212745	0.54
10		453.212750	0.55
20		453.212733	0.51
30		453.212745	0.54
40		453.212736	0.52
50		453.212752	0.56
25	6.6	453.212750	0.55

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

FCC §90.214

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2017-05-06	2018-05-06
E-Microwave	RF Attenuator	20dB	20dB-1	Each Time	/
E-Microwave	RF Attenuator	20dB	20dB-2	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The tests and measurements indicated in TIA-603-D.

Test Data

Environmental Conditions


Temperature:	26.1 °C
Relative Humidity:	45 %
ATM Pressure:	100.8 kPa

The testing was performed by Pean Zhu on 2017-10-18


Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	<10(t ₁)	±12.5 kHz	Pass
	<25(t ₂)	±6.25 kHz	
	<10(t ₃)	±12.5 kHz	

Please refer to the following plots.


Turn on – 453.2125 MHz, High power level

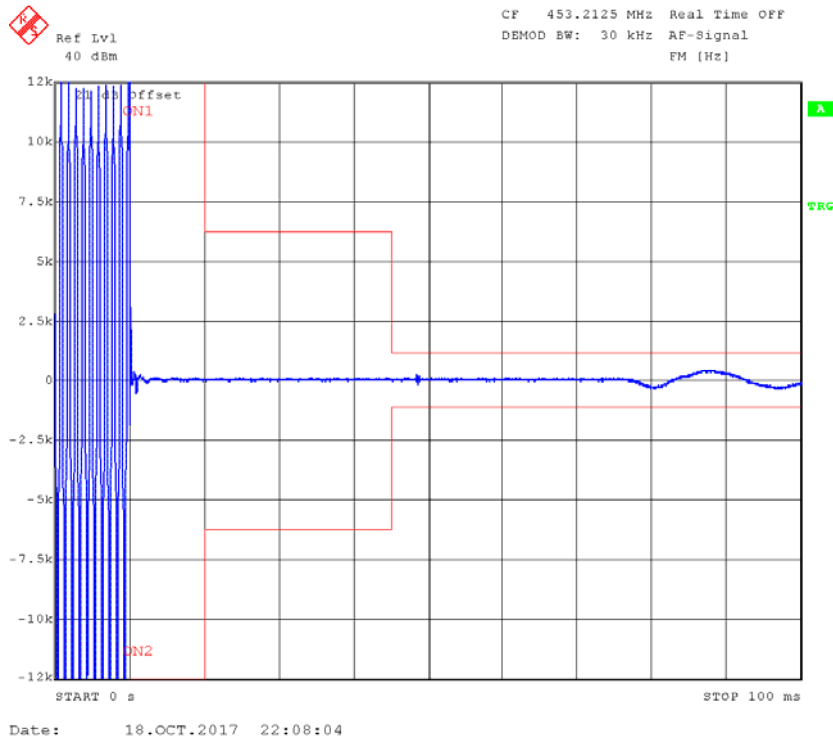


Turn off – 453.2125 MHz, High power level

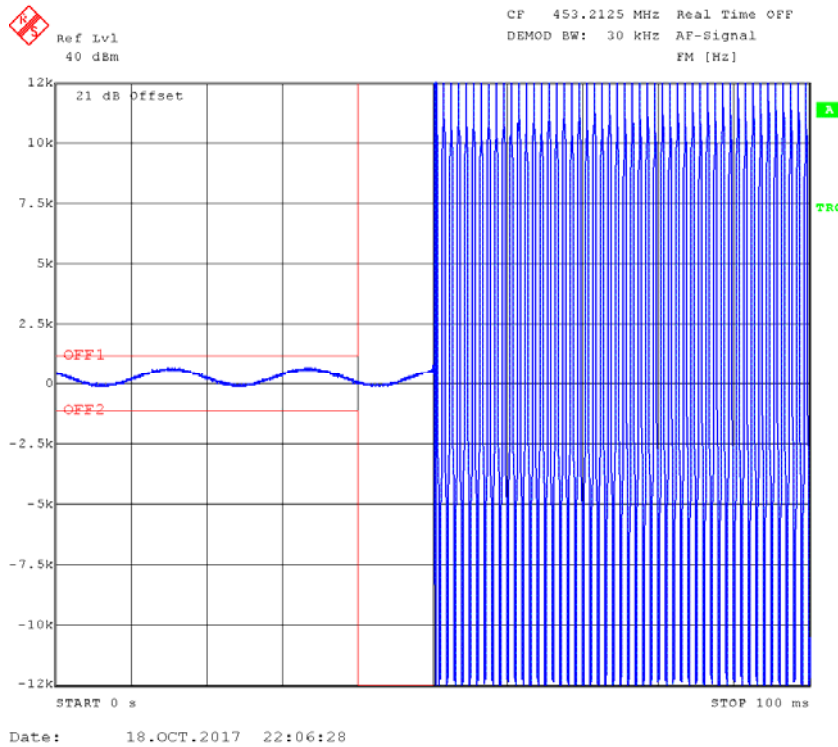

Turn on – 453.2125 MHz, Low power level

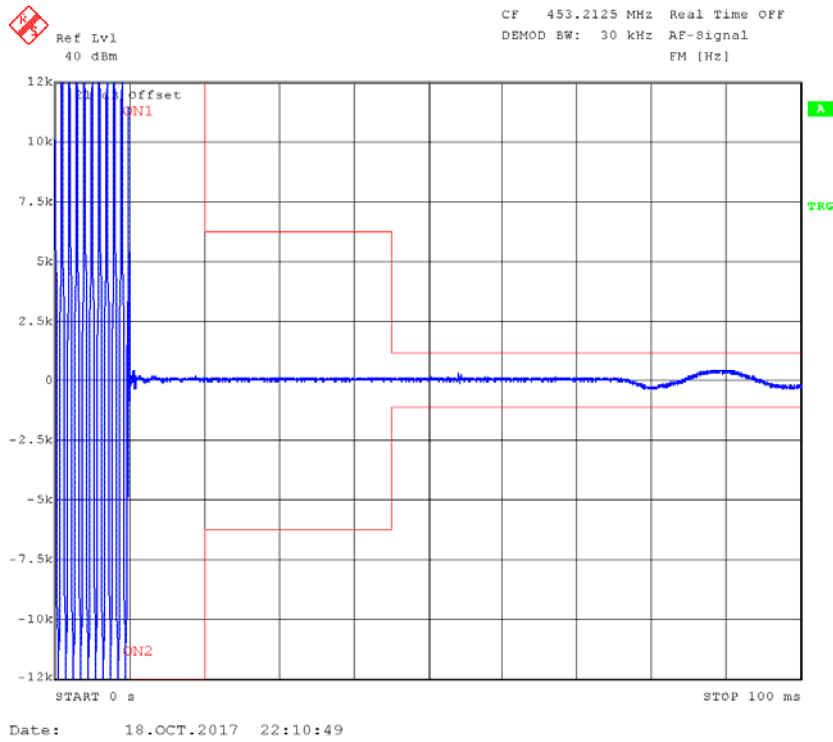

Turn off – 453.2125 MHz, Low power level

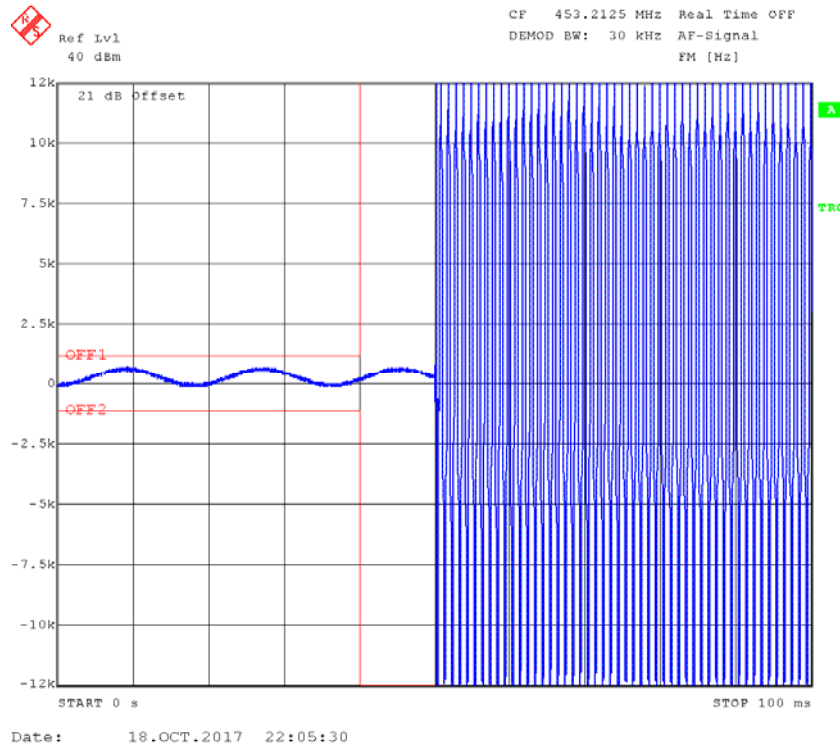

***** END OF REPORT *****