



# TEST REPORT

## No. I19Z62348-EMC01

for

**Shenzhen Tinno Mobile Technology Corp.**

**Smart Phone**

**Model Name: U304AC**

**FCC ID: XD6U304AA**

with

**Hardware Version: V1.0**

**Software Version: U304ACV02.09.11**

**Issued Date: 2020-01-16**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I19Z62348-EMC01	Rev.0	1 <sup>st</sup> edition	2020-01-16

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA .....</b>	<b>4</b>
<b>1.4. SIGNATURE.....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT.....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
<b>ANNEX B: PERSONS INVOLVED IN THIS TESTING .....</b>	<b>25</b>

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

#### **CTTL(huayuan North Road)**

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

#### **CTTL (BDA)**

Address: No.18A, Kangding Street, Beijing Economic-Technology Development  
Area, Beijing, P. R. China 100176

### **1.3. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.4. Project data**

Testing Start Date: 2019-04-23  
Testing End Date: 2020-01-15

### **1.5. Signature**



---

Li Yan


(Prepared this test report)



---

Zhang Ying

(Reviewed this test report)



---

Liu Baodian

Deputy Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
Address: 4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East Road, Nan Shan District, Shenzhen, P.R.China  
City: Shenzhen  
Postal Code: /  
Country: China  
Contact Person Jingwen.Guo  
Contact Email jingwen.guo@tinno.com  
Telephone: 0755-86095550  
Fax: \

### **2.2. Manufacturer Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
Address: 4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East Road, Nan Shan District, Shenzhen, P.R.China  
City: Shenzhen  
Postal Code: /  
Country: China  
Contact Jingwen.Guo  
Telephone: 0755-86095550  
Fax: \

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Smart Phone
Model Name	U304AC
FCC ID	XD6U304AA
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.85VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	/	/
EUT2	863465040002405	V1.0	U304ACV02.09.11

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB Cable	/	/
AE4	Headset	/	/

##### AE1

Model	LT25H426271B
Manufacturer	Shenzhen BYD Lithium Battery Company Limited
Capacitance	2500 mAh
Nominal voltage	3.85V

##### AE2

Model	TN-050100U4A
Manufacturer	Shenzhen BMT Electrones Co,Ltd
Length of cable	/

##### AE3

Model	P103-BMX131-000
Manufacturer	Shenzhen Yihuaxing Electronics Co.Ltd
Length of cable	/

##### AE4

Model	/
Manufacturer	/
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.



### 3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE2+ AE3+AE4	Charger Headset (FM)
Set.2	EUT1+ AE3	USB
Set.3	EUT2+ AE3	USB+CAMERA

**Note:**

U304AC is a variant product based on U304AA, for detail differences between the models please refer the Declaration of Changes document.

According to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, the following items are tested on Set.3.

Mode or Feature	EUT set-up No	Test Item
USB+CAMERA mode	Set.3	Radiated Emission

Other results share the 119Z60566-EMC01 results.

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2016
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.



## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Semi-anechoic chamber SAC-2** (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	P	CTTL(huayuan North Road) CTTL(BDA)
2	Conducted Emission	15.107(a)	A.2	BR	CTTL(huayuan North Road)

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESC17	100948	R&S	2020-07-17	1 Year
2	Universal Radio Communication Tester	CMW500	143008	R&S	2020-11-26	1 year
3	LISN	ENV216	101200	R&S	2020-03-14	1 year
4	EMI Antenna	VULB 9163	9163-483	Schwarzbeck	2020-09-16	1 year
5	EMI Antenna	3115	00167250	ETS-Lindgren	2020-05-14	1 year
6	Universal Radio Communication Tester	CMW500	159408	R&S	2020-03-03	1 year
7	LISN	ENV216	825562/028	R&S	2020-03-10	1 year
8	EMI Antenna	VULB9163	9163-514	Schwarzbeck	2020-02-03	1 year
9	EMI Antenna	3117	00139065	ETS-Lindgren	2020-11-10	1 year
10	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
11	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
12	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
13	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A
14	Keyboard	KU-1601	2048361	Lenovo	N/A	N/A
15	Mouse	EMS-537A	8021S3MC	Lenovo	N/A	N/A

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3/10 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case):  $U = 5.44 \text{ dB}$ ,  $k=2$ .

#### Measurement results for Set.1:

##### Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)	Limit (dB $\mu$ V/m)	Margin (dB)
17826.600	30.5	-18.5	45.6	3.400	H	54	23.5
17398.767	30.4	-19.2	41.5	8.100	H	54	23.6
17492.267	30.4	-19.2	41.5	8.100	V	54	23.6
17451.467	30.4	-19.2	41.5	8.100	H	54	23.6
17467.900	30.4	-19.2	41.5	8.100	H	54	23.6
17419.167	30.3	-19.2	41.5	8.000	H	54	23.7

##### Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)	Limit (dB $\mu$ V/m)	Margin (dB)
17408.967	42.2	-19.2	41.5	19.900	H	74	31.8
17618.067	42.2	-18.9	45.6	15.500	H	74	31.8
17333.033	42.2	-19.5	41.5	20.200	V	74	31.8
17372.133	42.2	-19.5	41.5	20.200	H	74	31.8
17609.000	42.1	-18.9	45.6	15.400	H	74	31.9
17830.000	41.9	-18.5	45.6	14.800	H	74	32.1

**Measurement results for Set.2:**
**USB Mode/Average detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)	Limit (dB $\mu$ V/m)	Margin (dB)
17828.867	39.6	-18.5	45.6	12.500	H	54	14.4
17779.000	39.6	-18.5	45.6	12.500	H	54	14.4
17823.200	39.4	-18.5	45.6	12.300	V	54	14.6
17795.433	39.4	-18.5	45.6	12.300	H	54	14.6
17968.267	39.4	-17.7	45.6	11.500	H	54	14.6
17469.033	39.4	-19.2	41.5	17.100	H	54	14.6

**USB Mode/ Peak detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)	Limit (dB $\mu$ V/m)	Margin (dB)
17599.367	51.9	-18.9	45.6	25.200	H	74	22.1
17428.800	50.9	-19.2	41.5	28.600	H	74	23.1
17901.400	50.7	-18.5	45.6	23.600	V	74	23.3
17993.200	50.7	-17.7	45.6	22.800	H	74	23.3
17408.967	50.6	-19.2	41.5	28.300	H	74	23.4
17789.200	50.4	-18.5	45.6	23.300	H	74	23.6

**Measurement results for Set.3:**
**USB Mode+CAMERA /Average detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
5999.500	42.48	-33.7	35.2	41.00	54.0	11.5	H
6000.000	42.33	-33.7	35.2	40.86	54.0	11.7	H
16992.500	41.66	-26.8	41.7	26.72	54.0	12.3	H
17050.000	41.63	-26.4	41.6	26.37	54.0	12.4	V
17046.500	41.56	-26.4	41.7	26.32	54.0	12.4	V
17026.000	41.52	-26.5	41.7	26.38	54.0	12.5	H

**USB Mode+ CAMERA / Peak detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
16938.500	55.9	-27.1	41.7	41.28	74.0	18.1	V
17551.000	54.9	-26.4	41.2	40.05	74.0	19.1	V
17013.000	54.9	-26.6	41.7	39.80	74.0	19.1	H
17099.000	54.8	-26.1	41.6	39.23	74.0	19.2	H
17145.500	54.5	-26.1	41.6	39.10	74.0	19.5	V
17840.000	54.4	-26.4	41.3	39.52	74.0	19.6	H

### Charging Mode, Set.1

Full Spectrum

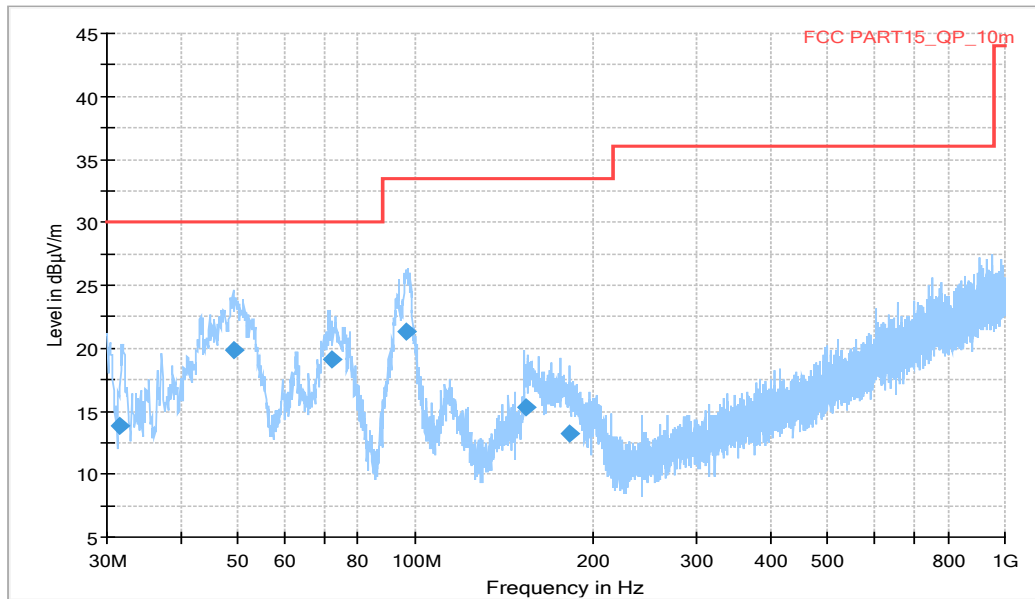



Fig A.1 Radiated Emission from 30MHz to 1GHz

### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
31.506000	13.88	30.00	16.12	1000.	120.000	121.0	V	-22.0
49.109000	19.83	30.00	10.17	1000.	120.000	125.0	V	-25.0
72.310000	19.10	30.00	10.90	1000.	120.000	197.0	V	-14.0
96.847000	21.29	33.50	12.23	1000.	120.000	100.0	V	181.0
153.80400	15.29	33.50	18.23	1000.	120.000	110.0	V	-29.0
182.26700	13.27	33.50	20.25	1000.	120.000	190.0	V	200.0




Full Spectrum

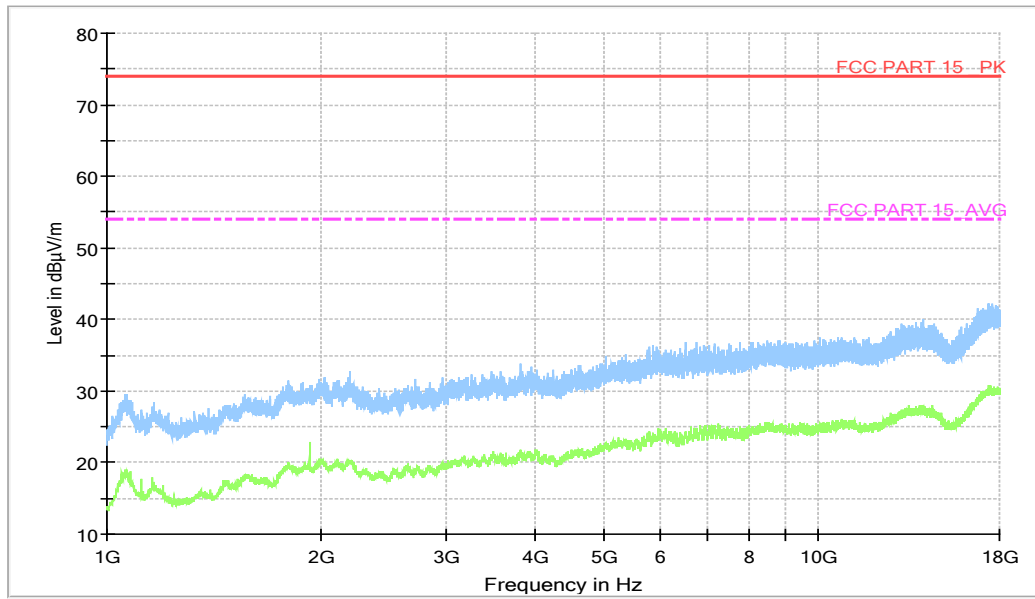

**Fig A.2 Radiated Emission from 1GHz to 18GHz**

### USB Mode, Set.2

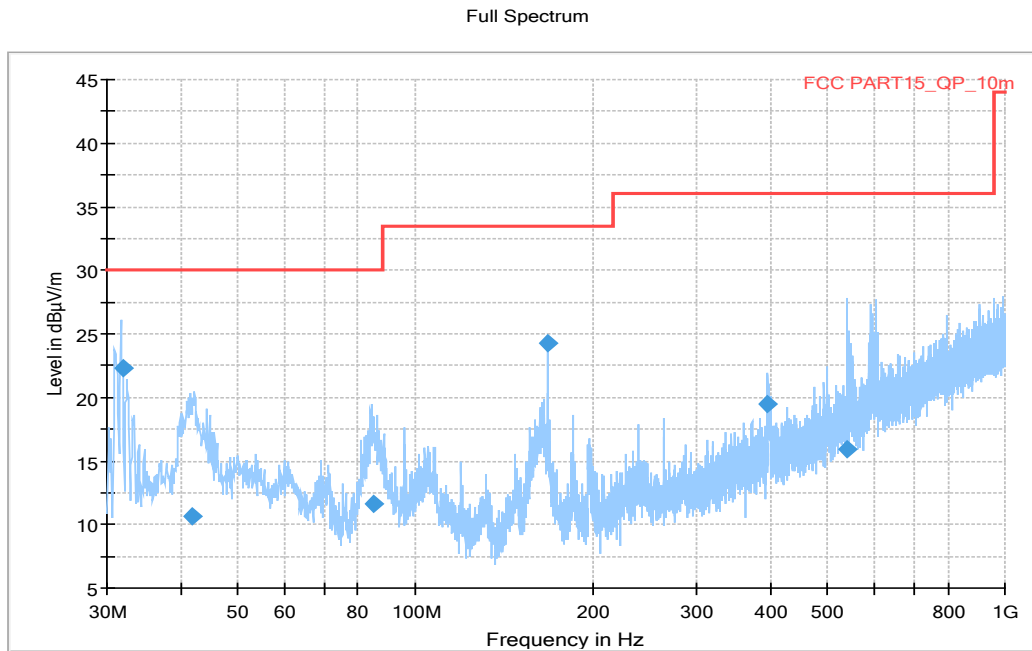


**Fig A.3 Radiated Emission from 30MHz to 1GHz**

### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV /m)	Limit (dBµV /m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
31.889000	22.34	30.00	7.66	1000.	120.000	100.0	V	64.0
41.783000	10.67	30.00	19.33	1000.	120.000	325.0	V	21.0
84.957000	11.67	30.00	18.33	1000.	120.000	125.0	V	30.0
167.97100	24.29	33.50	9.23	1000.	120.000	125.0	V	157.0
396.66900	19.47	36.00	16.55	1000.	120.000	107.0	V	60.0
541.53600	15.97	36.00	20.05	1000.	120.000	325.0	V	30.0


Full Spectrum

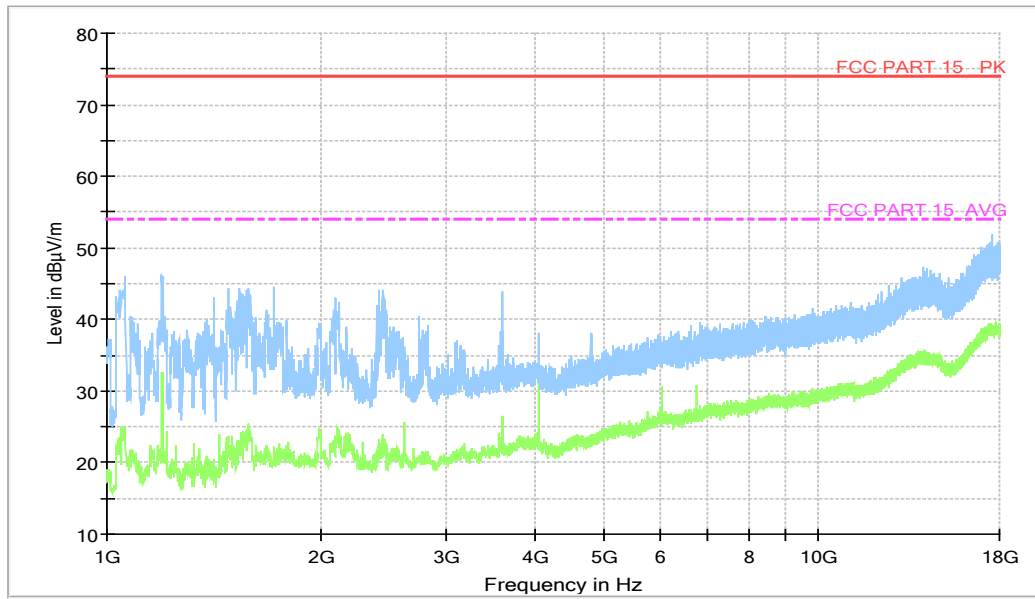

**Fig A.4 Radiated Emission from 1GHz to 18GHz**

### USB Mode+CAMERA, Set.3

15B RE 30MHz-1GHz

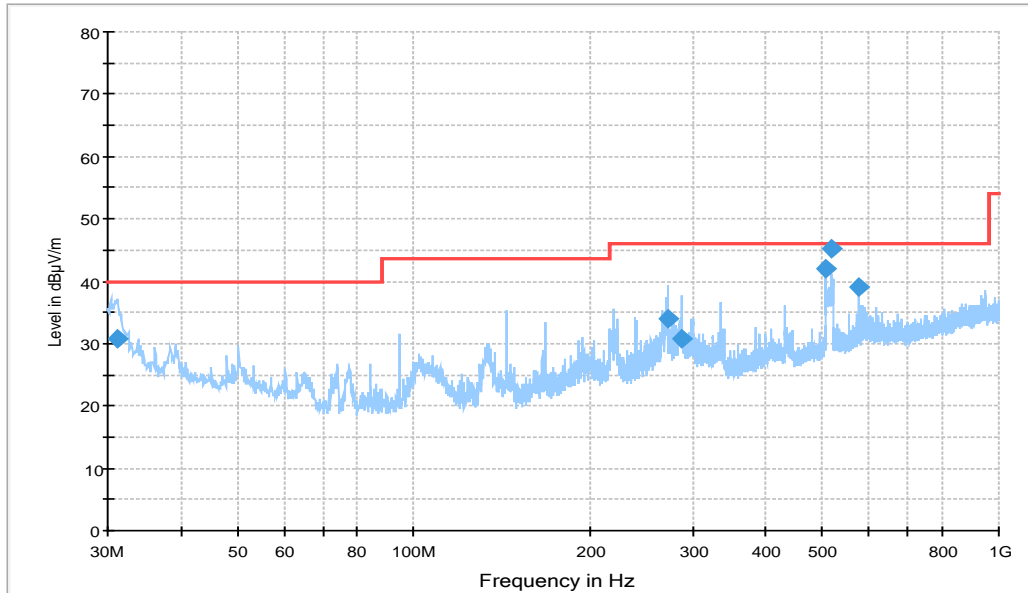


Note: the spike (519MHz) is occurred by Printer.

**Figure A.5 Radiated Emission from 30MHz to 1GHz**


### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
31.261000	30.8	100.0	V	294.0	-3.9	9.2	40.0
271.91800	34.1	100.0	H	76.0	-0.1	11.9	46.0
287.92300	30.7	110.0	H	75.0	0.2	15.3	46.0
505.39700	42.0	125.0	V	-31.0	6.1	4.0	46.0
519.26800	45.3	125.0	V	-32.0	6.5	0.7	46.0
576.01300	39.2	100.0	H	39.0	8.2	6.8	46.0

15B RE - 1GHz-3GHz

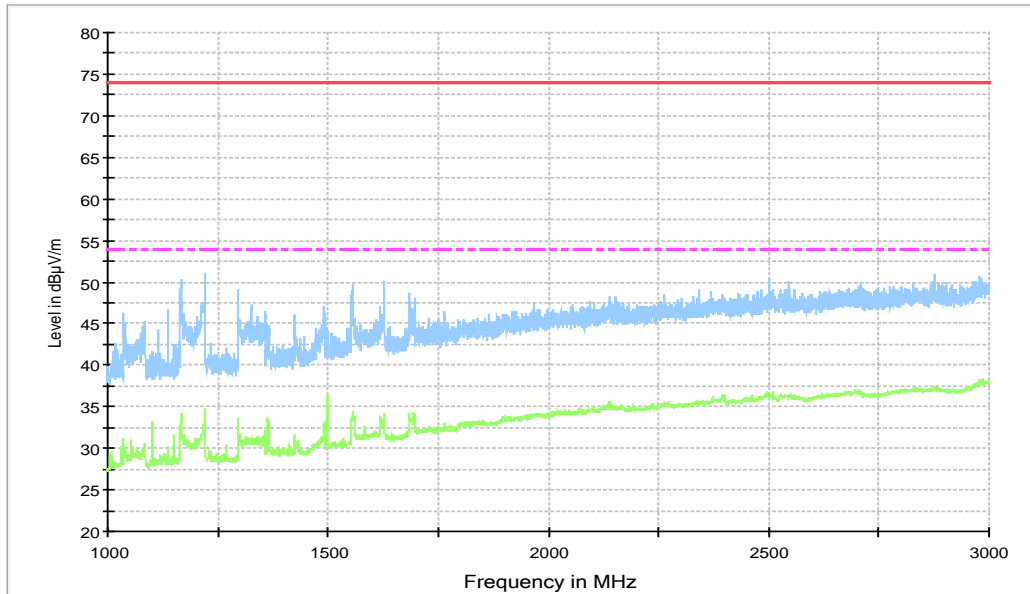**Figure A.6 Radiated Emission from 1GHz to 3GHz**

15b RE - 3GHz-18GHz

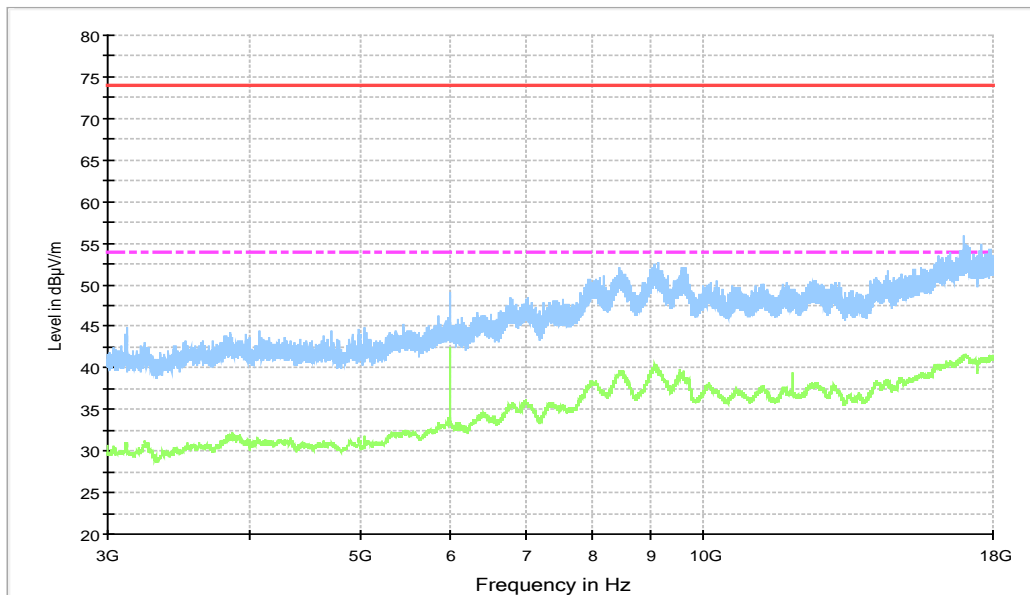**Figure A.7 Radiated Emission from 3GHz to 18GHz**

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U= 3.38$  dB,  $k=2$ .

#### Charging Mode, Set.1

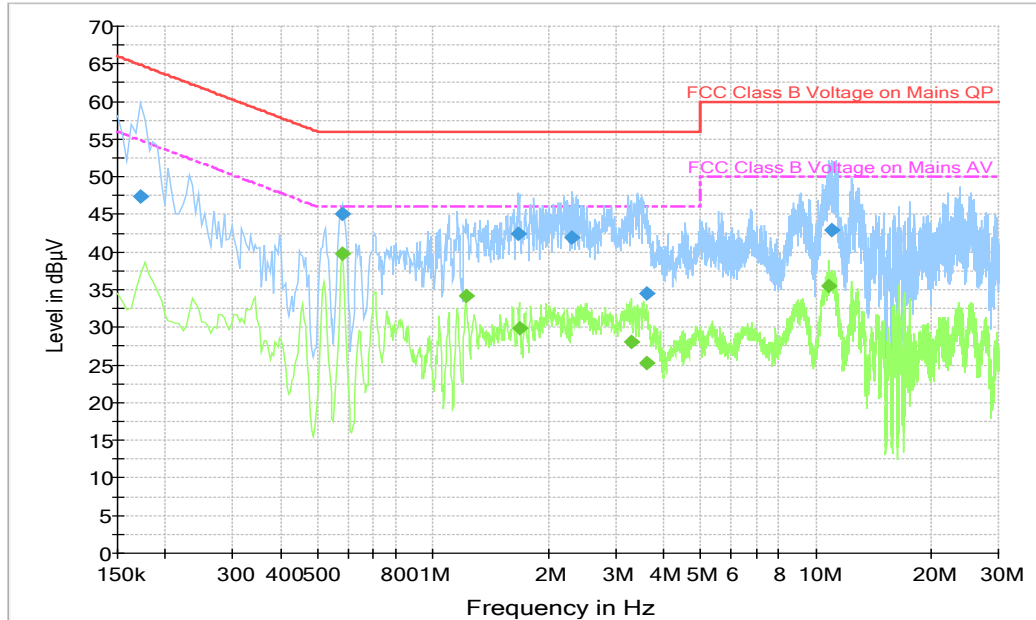


Fig A.8 Conducted Emission

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.172500	47.4	2000.0	9.000	On	L1	25.8	17.4
0.577500	45.1	2000.0	9.000	On	N	19.8	10.9
1.671000	42.5	2000.0	9.000	On	L1	19.6	13.5
2.314500	41.9	2000.0	9.000	On	L1	19.6	14.1
3.606000	34.4	2000.0	9.000	On	L1	19.6	21.6
10.968000	42.9	2000.0	9.000	On	L1	19.7	17.1

#### Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.582000	39.7	2000.0	9.000	On	N	19.8	6.3
1.216500	34.2	2000.0	9.000	On	N	19.6	11.8
1.680000	30.0	2000.0	9.000	On	L1	19.6	16.0
3.295500	28.1	2000.0	9.000	On	L1	19.6	17.9
3.606000	25.3	2000.0	9.000	On	L1	19.6	20.7
10.837500	35.5	2000.0	9.000	On	L1	19.7	14.5

### USB Mode, Set.2

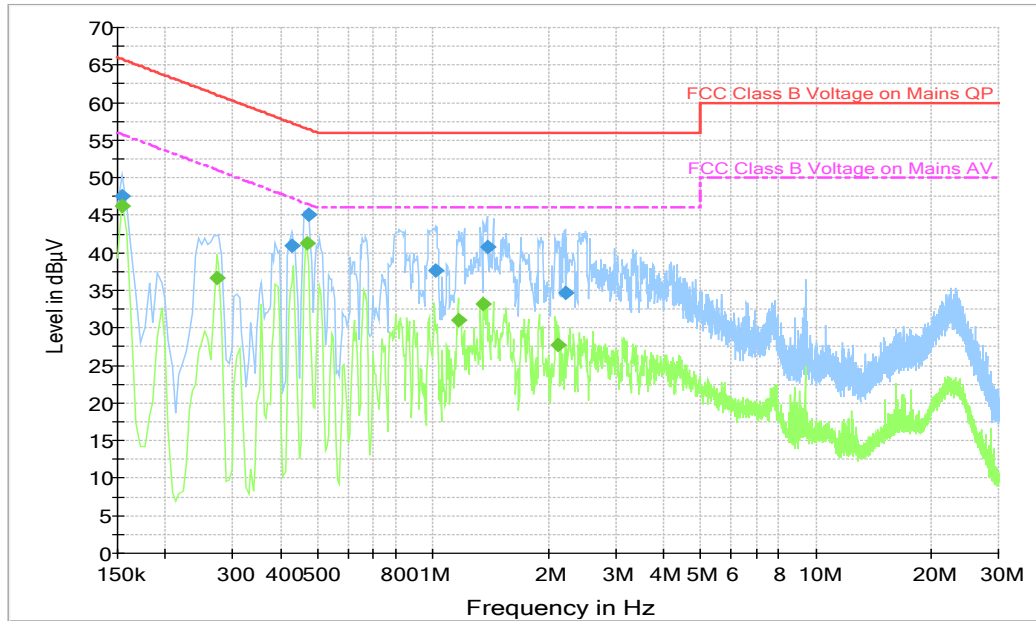


Fig A.9 Conducted Emission

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	47.6	2000.0	9.000	On	L1	29.7	18.2
0.429000	40.9	2000.0	9.000	On	L1	19.8	16.4
0.474000	45.1	2000.0	9.000	On	N	19.8	11.4
1.018500	37.6	2000.0	9.000	On	N	19.7	18.4
1.387500	40.8	2000.0	9.000	On	L1	19.6	15.2
2.211000	34.7	2000.0	9.000	On	N	19.6	21.3

### Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	46.3	2000.0	9.000	On	L1	29.7	9.5
0.271500	36.7	2000.0	9.000	On	L1	19.8	14.4
0.469500	41.3	2000.0	9.000	On	N	19.8	5.2
1.162500	31.1	2000.0	9.000	On	L1	19.7	14.9
1.356000	33.1	2000.0	9.000	On	L1	19.6	12.9
2.130000	27.8	2000.0	9.000	On	N	19.6	18.2





**ANNEX B: PERSONS INVOLVED IN THIS TESTING**

<b>Test Item</b>	<b>Test Software and Version</b>	<b>Software Vendor</b>	<b>Test operator</b>
Conducted Emission	EMC32 V8.52.0	R&S	Wang Huan,Li Zongliang
Radiated Emission	EMC32 V9.01.00	R&S	Li Jinpeng

**\*\*\*END OF REPORT\*\*\***