



# Test Report

FCC ID: XDQ-T2

Date of issue: Nov. 03, 2016

Sample Description:	POS terminal
Model(s):	T2
Applicant:	Shenzhen Xinguodu Technology Co., Ltd.
Address:	17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, China
Date of Test:	Oct. 03, 2016 to Nov. 03, 2016

Shenzhen Microtest Co., Ltd.  
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Tel: (86-755) 88850135

Fax: (86-755) 88850136

<http://www.mtitest.com>

E-mail: [mti@51mti.com](mailto:mti@51mti.com)

Address: No. 102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China

## Table of Contents

<b>1</b>	<b>General description</b>	<b>5</b>
1.1	Feature of equipment under test (EUT)	5
1.2	Test mode	5
1.3	Test conditions	5
1.4	EUT test setup	5
1.5	Ancillary equipment	5
1.6	Measurement Uncertainty	6
<b>2</b>	<b>Testing Site</b>	<b>7</b>
<b>3</b>	<b>List of test equipment</b>	<b>8</b>
<b>4</b>	<b>EMC emission test</b>	<b>9</b>
4.1	Conducted emission	9
4.2	Radiated emission	12

Test result certification	
<b>Applicant's name:</b>	<b>Shenzhen Xinguodu Technology Co., Ltd.</b>
Address:	17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, China
<b>Manufacture's Name:</b>	<b>Shenzhen Xinguodu Technology Co., Ltd.</b>
Address:	17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, China
Product name:	POS terminal
Trademark:	<b>NEXGO</b>
Model name:	T2
<b>Standards:</b>	FCC Part 15 Subpart B
<b>Test Method:</b>	ANSI C63.4-2014

*This device described above has been tested by Shenzhen Toby Technology Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.*

Tested by:

*David Chen*

David Chen

Nov. 03, 2016

Reviewed by:

*Leon Chen*

Leon Chen

Nov. 03, 2016

Approved by:

*Ares Liu*

Ares Liu

Nov. 03, 2016

## Summary of Test Result

Item	Description of Test	Result
FCC Part 15 Subpart B		
1	Conducted emission	Pass
2	Radiated emission	Pass

## 1 General description

### 1.1 Feature of equipment under test (EUT)

Product name:	POS terminal
Model name:	T2
Power supply:	DC 8.5V form power adapter
Adapter information:	Model: HKA02108525-8A Input: 100-240V 50/60Hz 0.8A Output: 8.5V 2.5A

### 1.2 Test mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test mode	Description
Mode 1	Communication with PC

NOTE: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode for EMI, and its test data was showed.

### 1.3 Test conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 20°C~30°C
- Humidity: 30%~70%
- Atmospheric pressure: 98kPa~101kPa

### 1.4 EUT test setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

### 1.5 Ancillary equipment

Equipment	Model	S/N	Manufacturer
Display	U2879VF	KBWFBJA00068	AOC
PC computer	VOSTRO3900	18006239306	Dell
Printer	HPLASERJET1020 PLUS	CNCGC60435	HP
Keyboard	SK-8120	CN-ODJ365-71616-571-1ROV-AOO	DELL
Mouse	MS111-7	CN-OKW2YH-71616-6-58R-17BA	DELL

## 1.6 Measurement Uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %,  $U=2xUc(y)$

Conducted emission(150kHz~30MHz)	$\pm 2.5$ dB
Radiated emission(30MHz~1GHz)	$\pm 4.2$ dB
Radiated emission (above 1GHz)	$\pm 4.3$ dB
Temperature	$\pm 1$ degree
Humidity	$\pm 5$ %

## 2 Testing Site

Test Site	Shenzhen Toby Technology Co., Ltd.
Test Site Location	1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467, Shenzhen, Guangdong, China
FCC Registration No.:	811562
CNAS Registration No.:	CNAS L5813

### 3 List of test equipment

Conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
LISN	R&S	ENV216	101313	2016.12.06
LISN	SCHWARZBECK	NNLK 8129	8129245	2016.12.25
Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	2016.12.25
Test Cable	N/A	N/A	C01	2016.12.06
EMI Test Receiver	R&S	ESCI	101160	2016.12.06

Radiated emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Log-Bicon Antenna	MESS-ELEKTRO NIK	VULB 9160	3058	2016.12.11
Horn Antenna	Schwarzbeck	BBHA 9120D	631	2016.12.05
Test Cable	United Microwave	57793	1m	2016.12.05
Test Cable	United Microwave	A30A30-5006	10m	2016.12.05
Microwave Pre_amplifier	Agilent	8449B	3008A01714	2016.12.05
Pre-Amplifier	Anritsu	MH648A	M09961	2016.12.05
EMI Test Receiver	R&S	ESPI-7	101318	2016.12.05
Spectrum analyzer	Agilent	E4470B	MY41441082	2017.06.01

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## 4 EMC emission test

### 4.1 Conducted emission

#### 4.1.1 Limits

Frequency (MHz)	Class A (dB $\mu$ V)		Class B (dB $\mu$ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79	66	66 - 56 *	56 - 46 *
0.5 -5	73	60	56	46
5 -30	73	60	60	50

Note 1: the tighter limit applies at the band edges.

Note 2: the limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

#### 4.1.2 Test Procedures

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.


Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.


For the actual test configuration, please refer to the related Item – photographs of the test setup.

#### 4.1.3 Test Setup

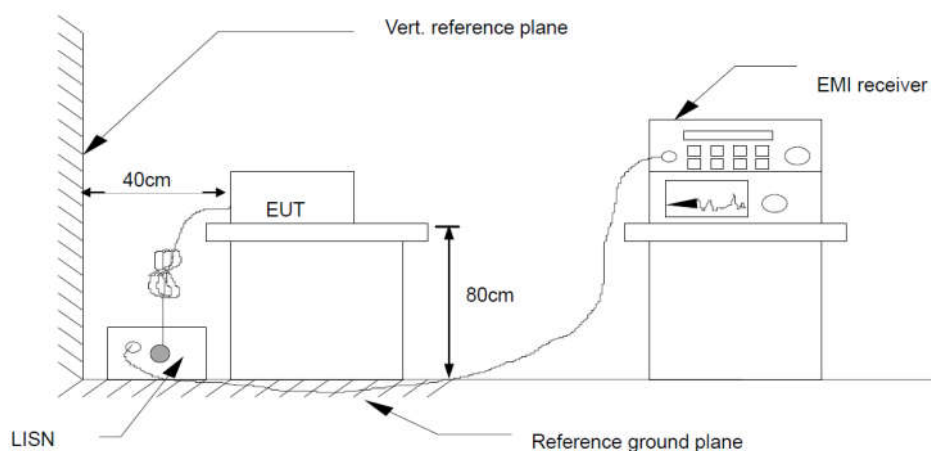


#### 4.1.4 Test Result

Temperature:	22°C	Relative Humidity:	57%
Pressure:	101kPa	Phase:	L
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

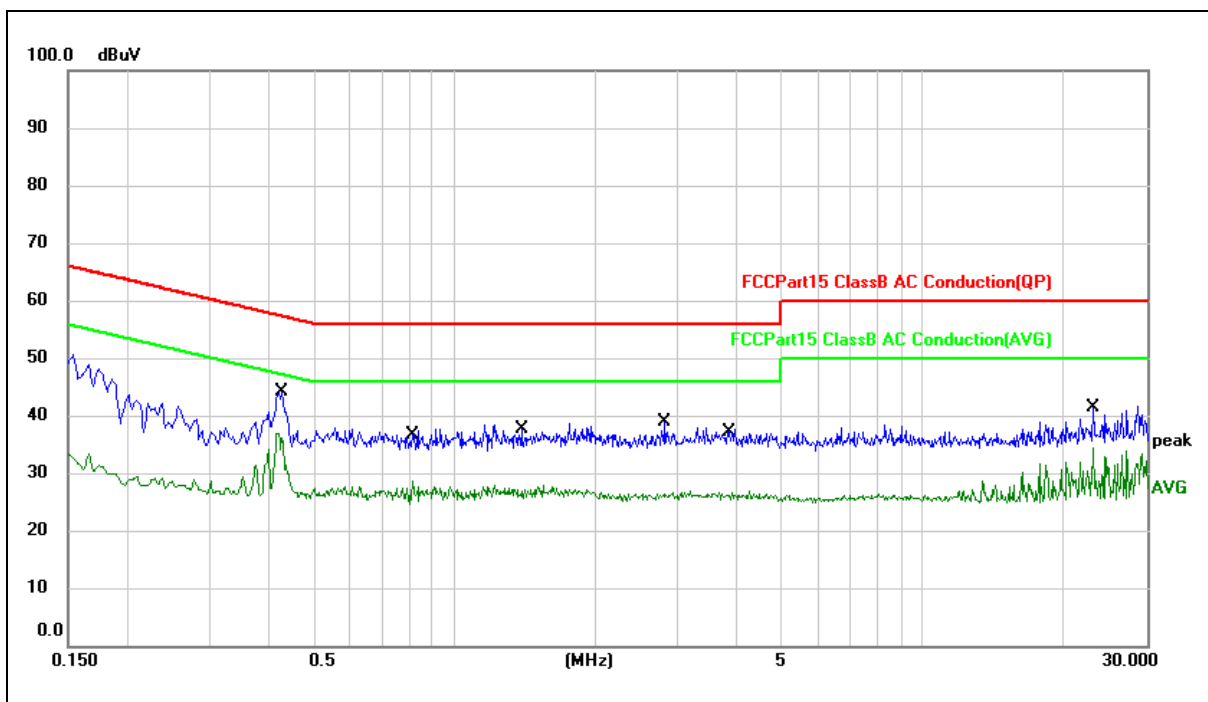

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4257	10.54	30.02	40.56	57.34	-16.78	QP	
2	*	0.4257	4.99	30.02	35.01	47.34	-12.33	AVG	
3		0.8265	-1.09	30.02	28.93	56.00	-27.07	QP	
4		0.8265	-4.25	30.02	25.77	46.00	-20.23	AVG	
5		1.3940	-0.30	30.02	29.72	56.00	-26.28	QP	
6		1.3940	-3.86	30.02	26.16	46.00	-19.84	AVG	
7		2.8554	0.37	30.04	30.41	56.00	-25.59	QP	
8		2.8554	-4.39	30.04	25.65	46.00	-20.35	AVG	
9		3.9067	0.32	30.04	30.36	56.00	-25.64	QP	
10		3.9067	-4.66	30.04	25.38	46.00	-20.62	AVG	
11		23.0965	-0.33	30.12	29.79	60.00	-30.21	QP	
12		23.0965	-5.21	30.12	24.91	50.00	-25.09	AVG	

Temperature:	22°C	Relative Humidity:	57%
Pressure:	101kPa	Phase:	N
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

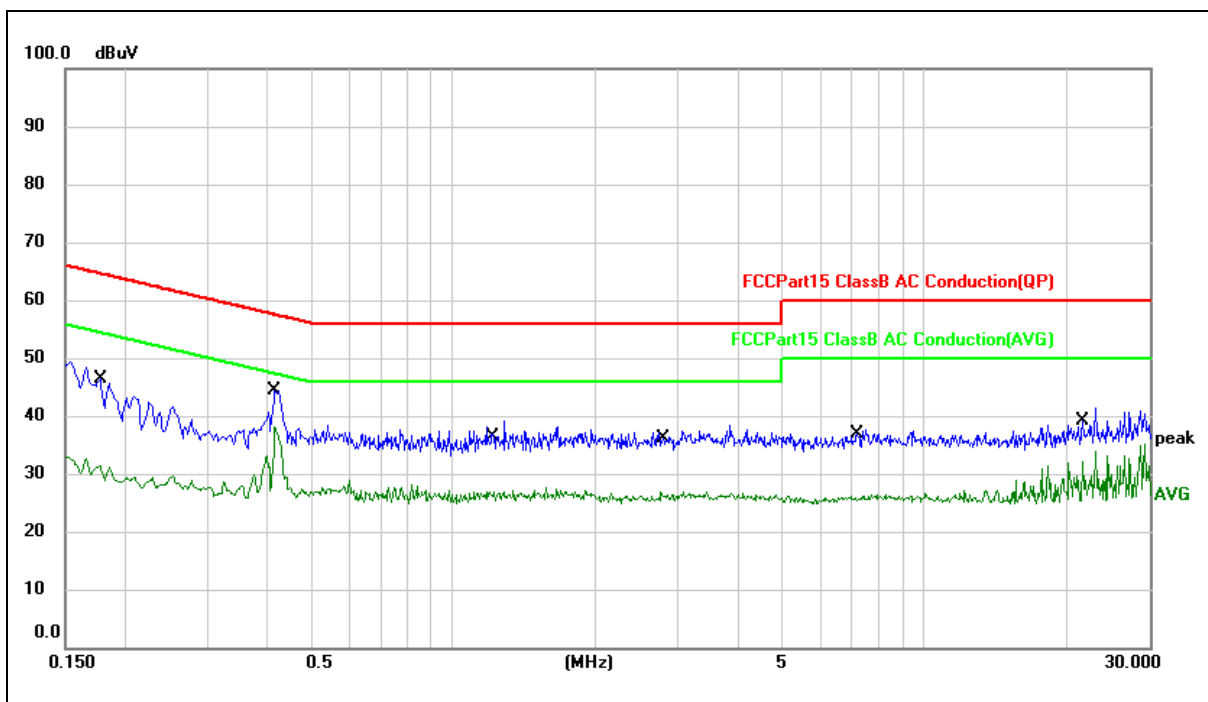

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1764	13.39	30.02	43.41	64.65	-21.24	QP	
2		0.1764	0.77	30.02	30.79	54.65	-23.86	AVG	
3		0.4179	10.07	30.02	40.09	57.49	-17.40	QP	
4	*	0.4179	4.93	30.02	34.95	47.49	-12.54	AVG	
5		1.2333	-1.01	30.02	29.01	56.00	-26.99	QP	
6		1.2333	-4.14	30.02	25.88	46.00	-20.12	AVG	
7		2.7829	0.36	30.04	30.40	56.00	-25.60	QP	
8		2.7829	-4.46	30.04	25.58	46.00	-20.42	AVG	
9		7.1435	-0.21	30.09	29.88	60.00	-30.12	QP	
10		7.1435	-4.97	30.09	25.12	50.00	-24.88	AVG	
11		21.6643	5.33	30.11	35.44	60.00	-24.56	QP	
12		21.6643	1.00	30.11	31.11	50.00	-18.89	AVG	

## 4.2 Radiated emission

### 4.2.1 Limits

Limits of radiated emission measurement

Frequency (MHz)	Class B device (at 3m) dB $\mu$ V/m	Class A device (at 3m) dB $\mu$ V/m	Detector
30-88	40	49	QP
88-216	43.5	53.5	QP
216-960	46	56.4	QP
960-1000	54	59.5	QP
Above 1000	54	59.5	AV
Above 1000	74	79.5	PK

### 4.2.2 Test Procedures

The radiated emission tests were performed in the 3 meters.

The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.


The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.

If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.


For the actual test configuration, please refer to the related item – EUT test photos.

### 4.2.3 Test Setup

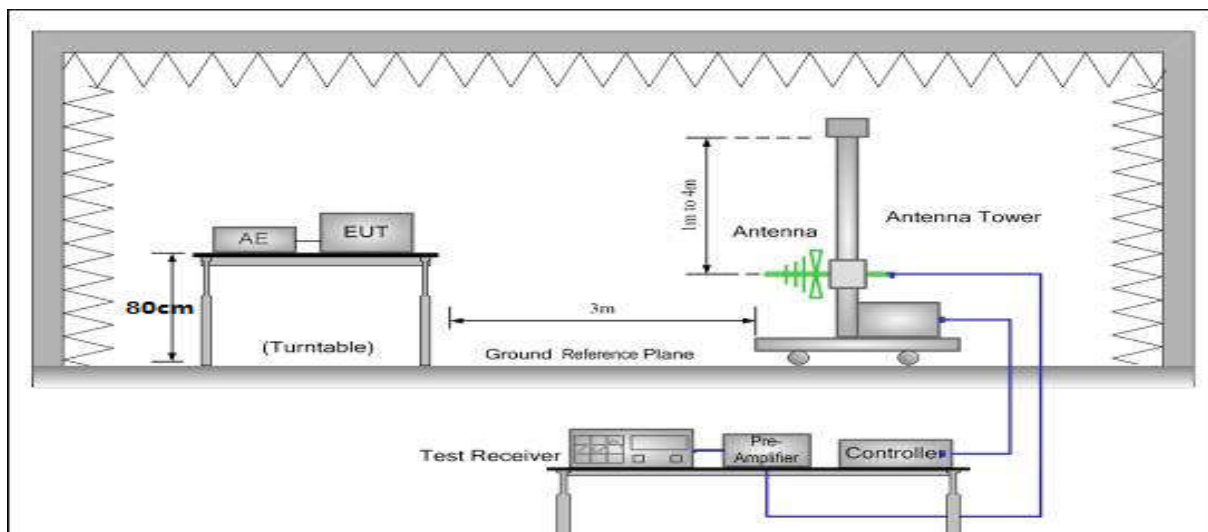


### 4.2.4 Test Result

Temperature:	25°C	Relative Humidity:	50%
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

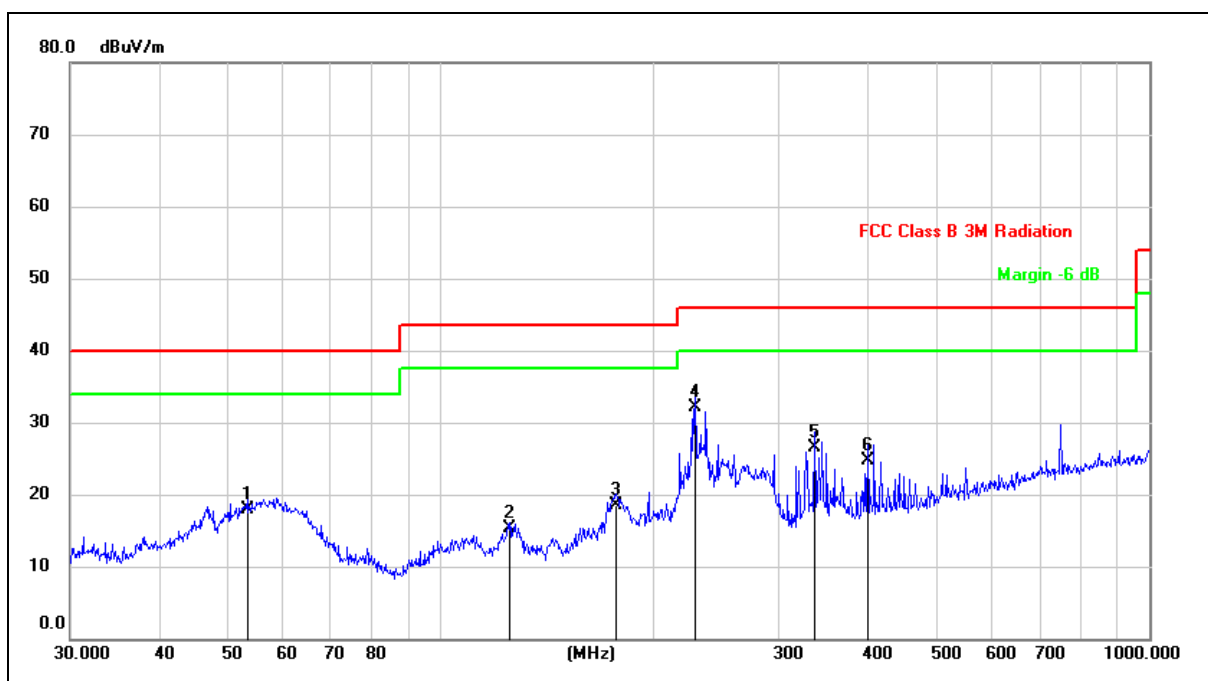


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		53.3179	29.82	-11.92	17.90	40.00	-22.10	QP			
2		125.0066	31.64	-16.34	15.30	43.50	-28.20	QP			
3		176.8877	34.52	-15.92	18.60	43.50	-24.90	QP			
4	*	228.4903	45.16	-13.06	32.10	46.00	-13.90	QP			
5		337.2155	37.10	-10.60	26.50	46.00	-19.50	QP			
6		400.4318	33.86	-9.16	24.70	46.00	-21.30	QP			

Temperature:	25°C	Relative Humidity:	50%
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

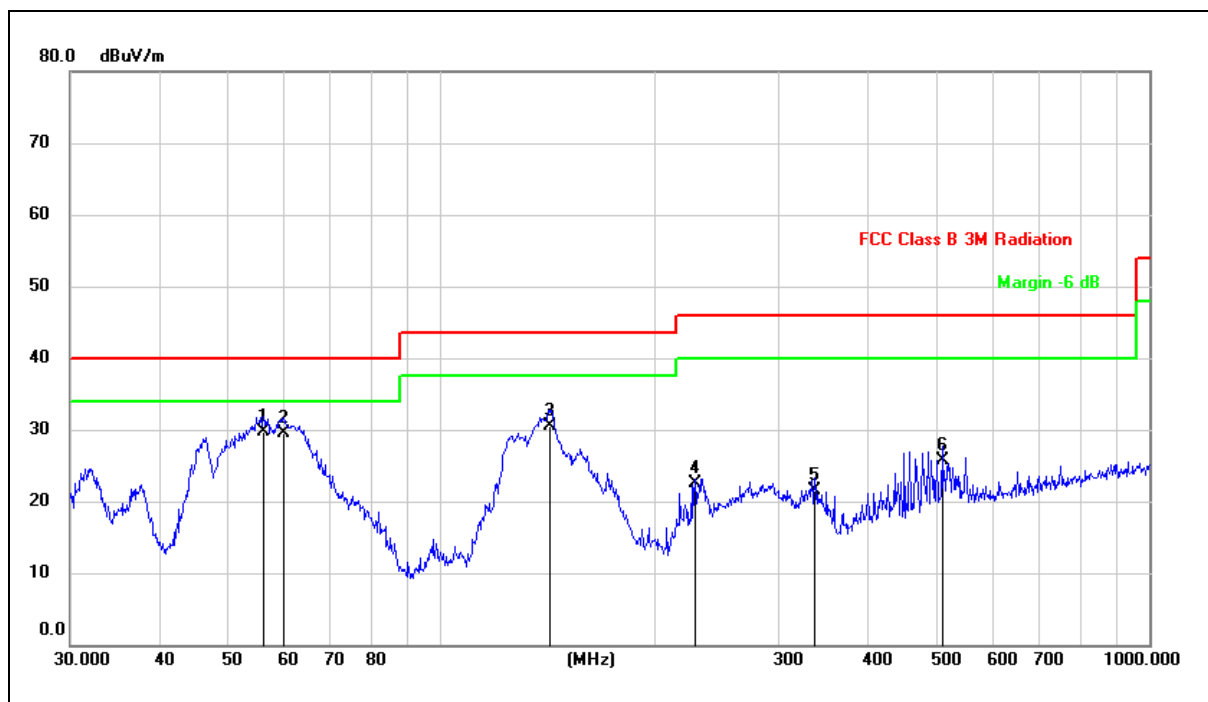


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	56.1974	42.20	-12.40	29.80	40.00	-10.20	QP		
2		60.0690	42.64	-13.04	29.60	40.00	-10.40	QP		
3		142.3243	48.00	-17.50	30.50	43.50	-13.00	QP		
4		228.4903	35.66	-13.06	22.60	46.00	-23.40	QP		
5		337.2155	32.10	-10.60	21.50	46.00	-24.50	QP		
6		510.0436	33.08	-7.28	25.80	46.00	-20.20	QP		

Temperature:	25°C	Relative Humidity:	50%
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

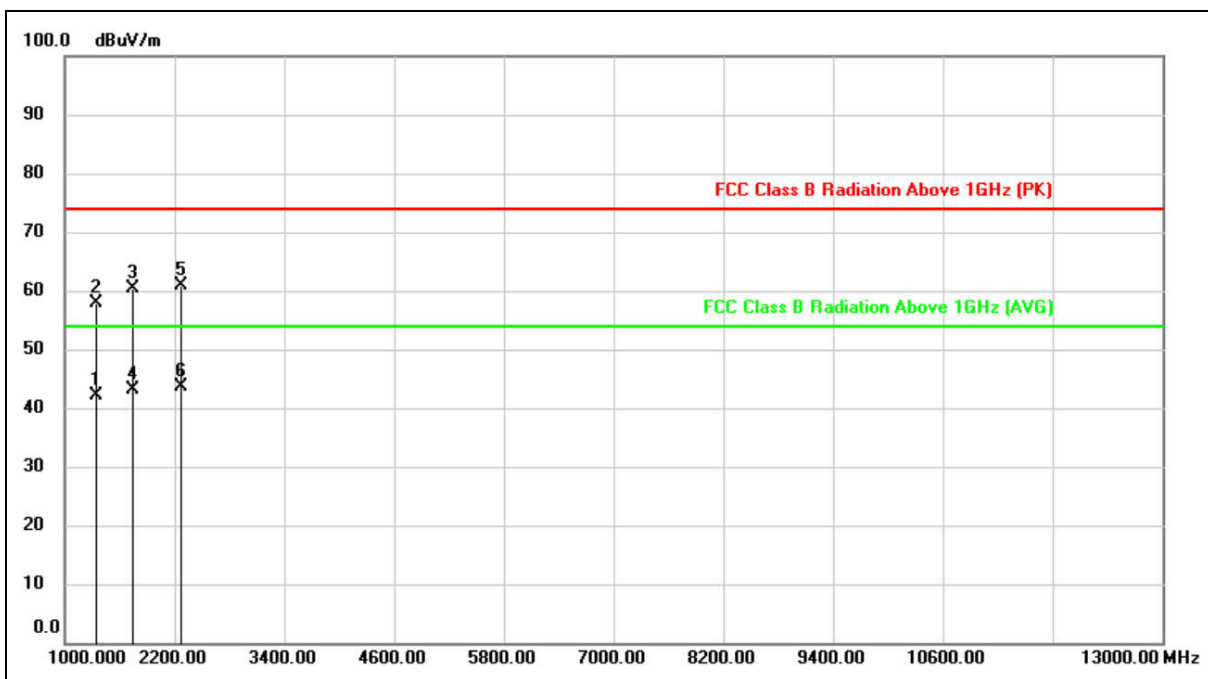

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1334.254	58.71	-16.57	42.14	54.00	-11.86			AVG
2		1335.547	74.39	-16.56	57.83	74.00	-16.17			peak
3		1742.517	75.35	-14.98	60.37	74.00	-13.63			peak
4		1743.684	58.13	-14.98	43.15	54.00	-10.85			AVG
5		2265.514	72.10	-11.26	60.84	74.00	-13.16			peak
6	*	2265.514	54.82	-11.26	43.56	54.00	-10.44			AVG

Temperature:	25°C	Relative Humidity:	50%
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

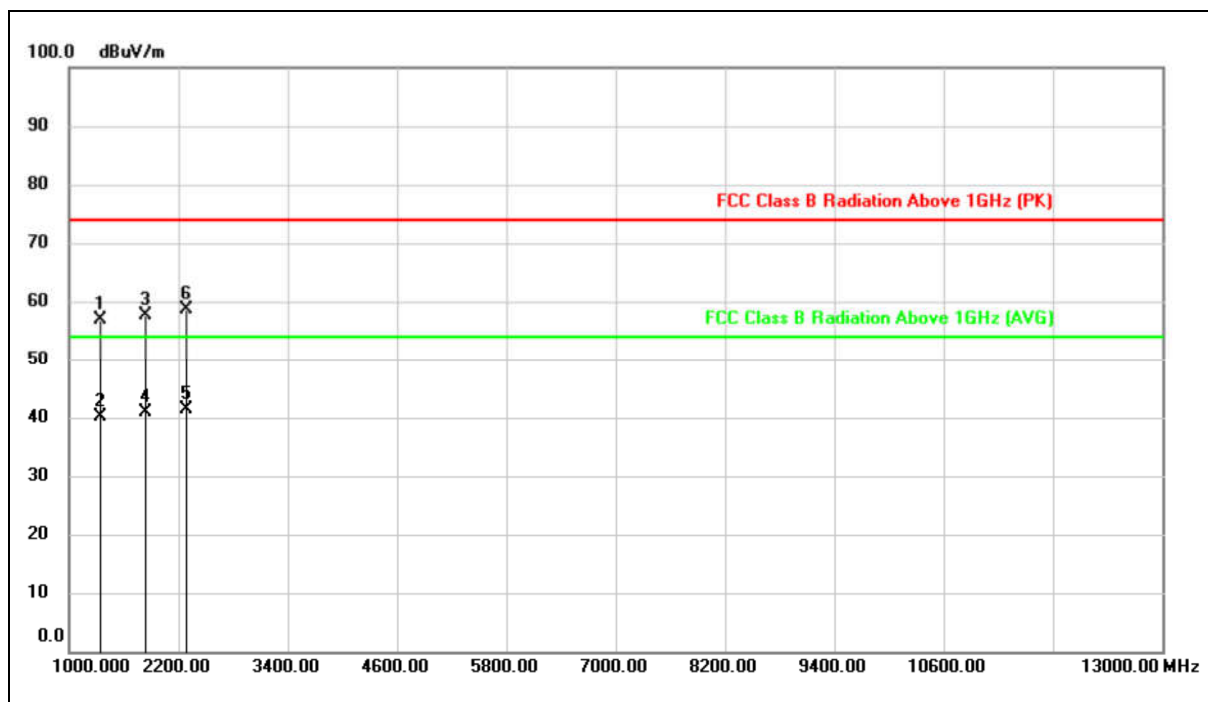

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		1342.624	73.36	-16.50	56.86	74.00	-17.14	peak			
2		1342.665	56.75	-16.50	40.25	54.00	-13.75	AVG			
3		1828.694	72.15	-14.51	57.64	74.00	-16.36	peak			
4		1829.671	55.36	-14.50	40.86	54.00	-13.14	AVG			
5	*	2273.584	52.58	-11.20	41.38	54.00	-12.62	AVG			
6		2274.458	69.86	-11.19	58.67	74.00	-15.33	peak			

----END OF REPORT----