

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM131100609401

Email: ee.shenzhen@sgs.com Page: 1 of 76

FCC REPORT

Application No: SZEM1311006094RF

Applicant:TEAC CorporationManufacturer:TEAC Corporation

Factory: DongGuan TianDiXing Industrial Co.,Ltd

Product Name: BLUETOOTH CD RADIO

Model No.(EUT): SL-D930

FCC ID: XEGSL-D930

Standards: 47 CFR Part 15, Subpart C (2012)

Date of Receipt: 2013-11-12

Date of Test: 2013-11-14 to 2013-11-28

Date of Issue: 2013-12-19

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM131100609401

Page: 2 of 76

2 Test Summary

Test Item	Test Requirement	Test method	Result	
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS	
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS	
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS	
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS	
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS	
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS	
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS	
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS	
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS	
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS	
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS	
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS	



Report No.: SZEM131100609401

Page: 3 of 76

3 Contents

			Page
1	CO	OVER PAGE	1
2	TF	ST SUMMARY	2
3		ONTENTS	
4	GE	ENERAL INFORMATION	4
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	4
	4.3	TEST ENVIRONMENT	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST LOCATION	
	4.6	TEST FACILITY	
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	EQUIPMENT LIST	
5	TE	ST RESULTS AND MEASUREMENT DATA	11
	5.1	Antenna Requirement	11
	5.2	CONDUCTED EMISSIONS	
	5.3	CONDUCTED PEAK OUTPUT POWER	
	5.4	20DB OCCUPY BANDWIDTH	
	5.5	CARRIER FREQUENCIES SEPARATION	29
	5.6	HOPPING CHANNEL NUMBER	36
	5.7	DWELL TIME	
	5.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	_
	5.9	Spurious RF Conducted Emissions	
	5.10	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	5.11	RADIATED SPURIOUS EMISSION	
	•	11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	
	5.12	Band edge (Radiated Emission)	ხ/-/ნ



Report No.: SZEM131100609401

Page: 4 of 76

4 General Information

4.1 Client Information

Applicant:	TEAC Corporation
Address of Applicant:	1-47 Ochiai, Tama-shi, Tokyo, 206-8530 Japan
Manufacturer:	TEAC Corporation
Address of Manufacturer:	1-47 Ochiai, Tama-shi, Tokyo, 206-8530 Japan
Factory:	DongGuan TianDiXing Industrial Co.,Ltd
Address of Factory:	No.14,Qilin road, The first industrial area, Shangsha village, ChangAn Town, DongGuan City, GuangDong Province, China.

4.2 General Description of EUT

Product Name:	BLUETOOTH CD RADIO
Model No.	SL-D930
Trade Mark:	TEAC
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V3.0 (with EDR)
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Fixed production
Test Power Grade:	255 , 46 (manufacturer declare)
Test Software of EUT:	CSR Install Blue Suite (manufacturer declare)
Antenna Type	Integral
Antenna Gain	0dBi
Power Supply:	AC 120V 60Hz
Test Voltage:	AC 120V 60Hz
AC Cable:	190cm
FM Antenna:	150cm
AUX IN Cable:	53cm



Report No.: SZEM131100609401

Page: 5 of 76

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



Report No.: SZEM131100609401

Page: 6 of 76

4.3 Test Environment

Operating Environment:		
Temperature:	24.0 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1020 mbar	

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM131100609401

Page: 7 of 76

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.



Report No.: SZEM131100609401

Page: 8 of 76

4.10 Equipment List

	Conducted Emission	n				
Item	Test Equipment	Manufacturer	Manufacturer Model No.		Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16	
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24	



Report No.: SZEM131100609401

Page: 9 of 76

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10	
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24	
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24	
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24	
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24	
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29	
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29	
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29	
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29	
13	Band filter	Amindeon	82346	SEL0094	2014-05-16	
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24	
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24	
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16	
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24	
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04	



Report No.: SZEM131100609401

Page: 10 of 76

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16
8	Band filter	amideon	82346	SEL0094	2014-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM131100609401

Page: 11 of 76

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

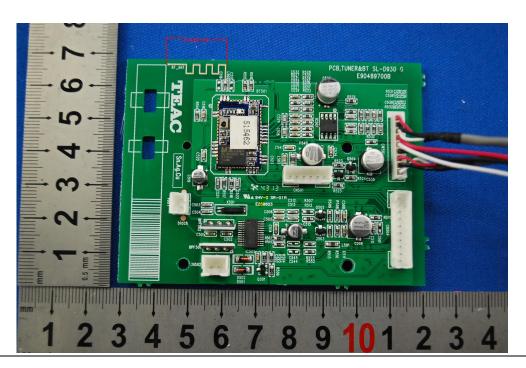



Report No.: SZEM131100609401

Page: 12 of 76

5.2 Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.207				
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	150kHz to 30MHz				
Limit:	Francisco (MIII-)	Limit (c	lBuV)		
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*	•	
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithn	n of the frequency.		J	
Test Procedure:	The mains terminal disturbance voltage test was conducted in a s room.				
	 The mains terminal disturbance voltage test was conducted in a shie room. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω lin impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT placed on the horizontal ground reference plane, The test was performed with a vertical ground reference plane. The result of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according the equipment and all of the interface cables must be changed according the equipment and all of the interface cables must be changed according the equipment and all of the interface cables. 				





Report No.: SZEM131100609401

Page: 13 of 76

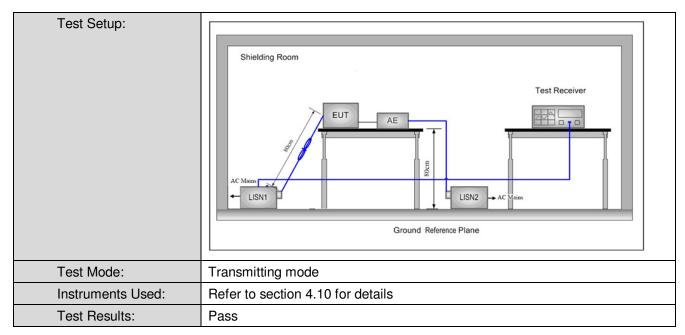

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM131100609401

Page: 14 of 76



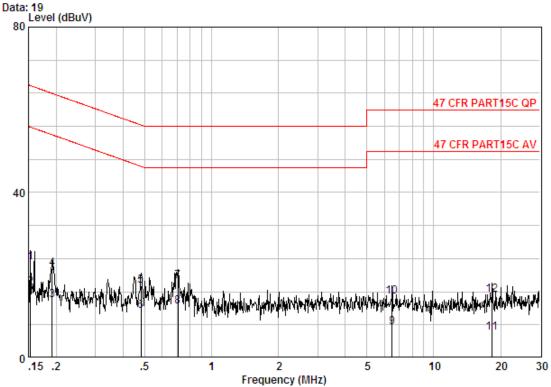

Site : Shielding Room

Condition : 47 CFR PART15C QP CE LINE

Job No. : 6094RF Test mode : TX


		Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	-	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.15321	0.02	9.70	13.38	23.10	65.82	-42.72	QP
2		0.15321	0.02	9.70	7.28	17.00	55.82	-38.83	Average
3		0.19140	0.02	9.70	4.14	13.86	53.98	-40.11	Average
4		0.19140	0.02	9.70	11.79	21.51	63.98	-42.47	QP
5		0.48119	0.01	9.80	7.54	17.35	56.32	-38.97	QP
6		0.48119	0.01	9.80	1.60	11.41	46.32	-34.91	Average
7		0.70468	0.02	9.80	8.76	18.58	56.00	-37.42	QP
8	@	0.70468	0.02	9.80	2.53	12.35	46.00	-33.65	Average
9		6.488	0.01	9.90	-2.44	7.47	50.00	-42.53	Average
10		6.488	0.01	9.90	4.94	14.85	60.00	-45.15	QP
11		18.328	0.02	10.10	-3.97	6.14	50.00	-43.86	Average
12		18.328	0.02	10.10	5.08	15.20	60.00	-44.80	OP



Report No.: SZEM131100609401

Page: 15 of 76

Neutral line:

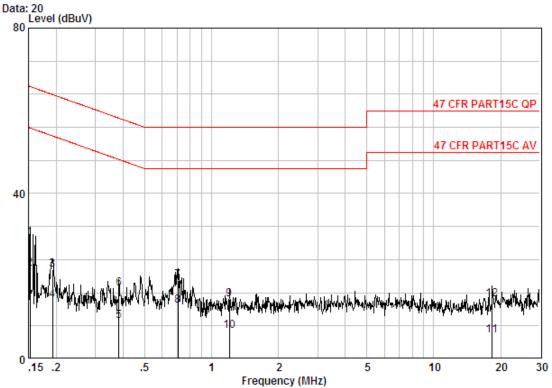

Site : Shielding Room

Condition : 47 CFR PART15C QP CE NEUTRAL

Job No. : 6094RF Test mode : TX

			Cable	LISN	Read		Limit	Over	
		Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	-	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.15240	0.02	9.70	19.45	29.17	65.87	-36.69	QP
2		0.15240	0.02	9.70	12.07	21.79	55.87	-34.07	Average
3		0.19242	0.02	9.70	11.81	21.53	63.93	-42.40	QP
4		0.19242	0.02	9.70	4.40	14.12	53.93	-39.81	Average
5		0.38315	0.01	9.78	-0.66	9.14	48.21	-39.08	Average
6		0.38315	0.01	9.78	7.16	16.95	58.21	-41.26	QP
7		0.70468	0.02	9.80	9.12	18.94	56.00	-37.06	QP
8 @		0.70468	0.02	9.80	3.04	12.86	46.00	-33.14	Average
9		1.203	0.02	9.80	4.63	14.45	56.00	-41.55	QP
10		1.203	0.02	9.80	-3.12	6.70	46.00	-39.30	Average
11		18.328	0.02	10.07	-4.36	5.73	50.00	-44.27	Average
12		18.328	0.02	10.07	4.39	14.48	60.00	-45.52	QP

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM131100609401

Page: 16 of 76

5.3 Conducted Peak Output Power

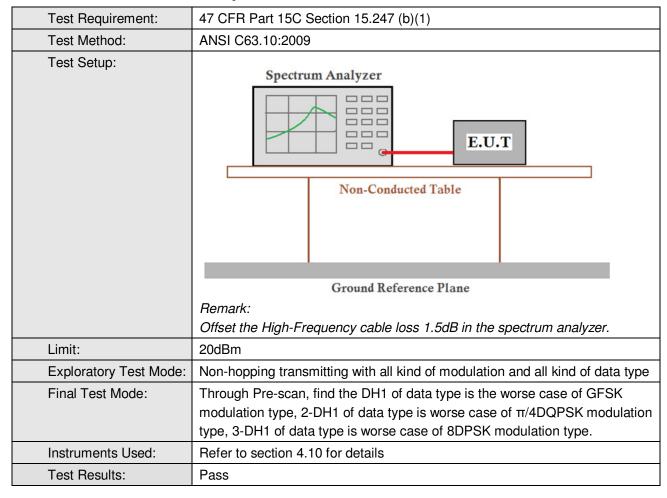



Report No.: SZEM131100609401

Page: 17 of 76

Measurement Data

weasurement Data					
	GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	3.21	20.00	Pass		
Middle	2.69	20.00	Pass		
Highest	2.28	20.00	Pass		
	π/4DQPSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	2.04	20.00	Pass		
Middle	1.53	20.00	Pass		
Highest	1.07	20.00	Pass		
	8DPSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	2.33	20.00	Pass		
Middle	1.80	20.00	Pass		
Highest	1.40	20.00	Pass		




Report No.: SZEM131100609401


Page: 18 of 76

Test plot as follows:

Test mode: GFSK Test channel: Lowest

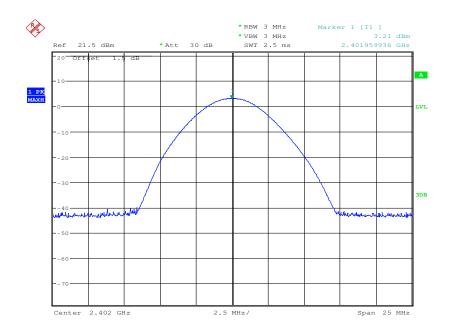



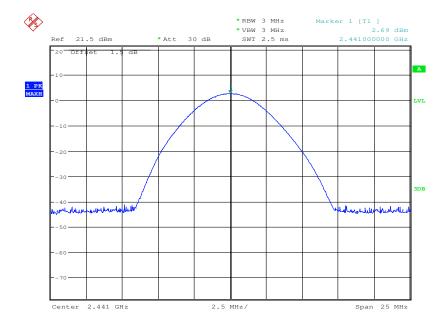





Report No.: SZEM131100609401

Page: 19 of 76

Test mode: GFSK Test channel: Highest

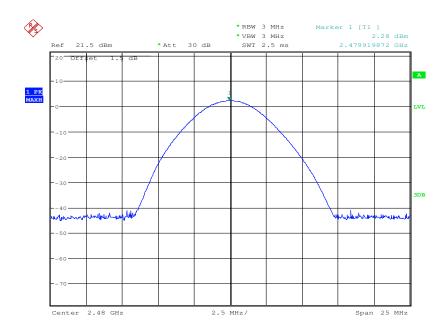

Test mode: π/4DQPSK Test channel: Lowest

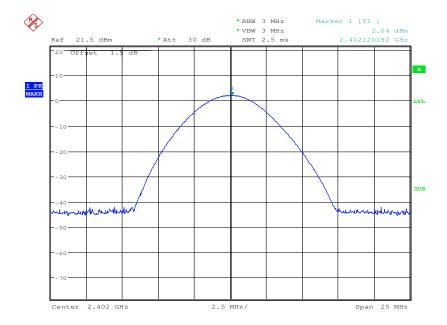


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM131100609401

Page: 20 of 76

Test mode: π/4DQPSK Test channel: Middle

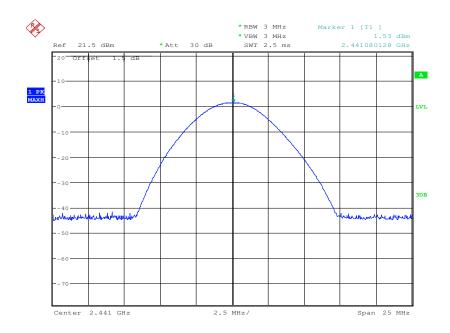

Test mode: π/4DQPSK Test channel: Highest

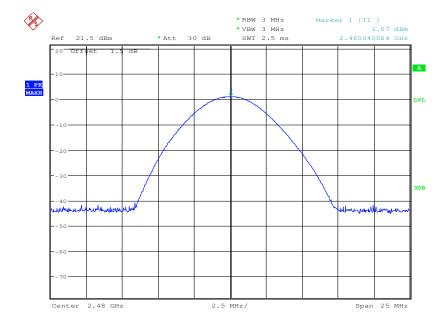





Report No.: SZEM131100609401

Page: 21 of 76

Test mode: 8DPSK Test channel: Lowest

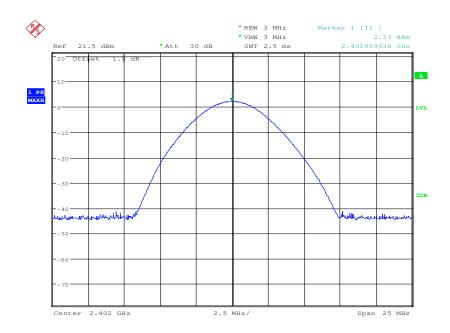

Test mode: 8DPSK Test channel: Middle

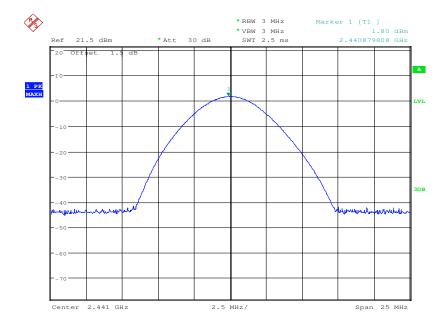




Report No.: SZEM131100609401

Page: 22 of 76

Test mode: 8DPSK Test channel: Highest

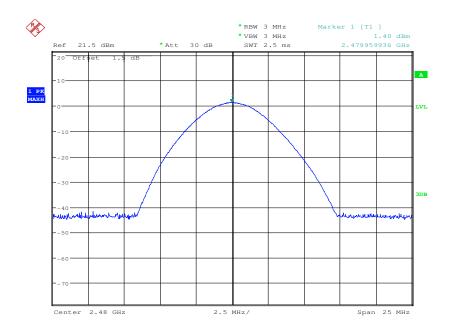






Report No.: SZEM131100609401

Page: 23 of 76

5.4 20dB Occupy Bandwidth

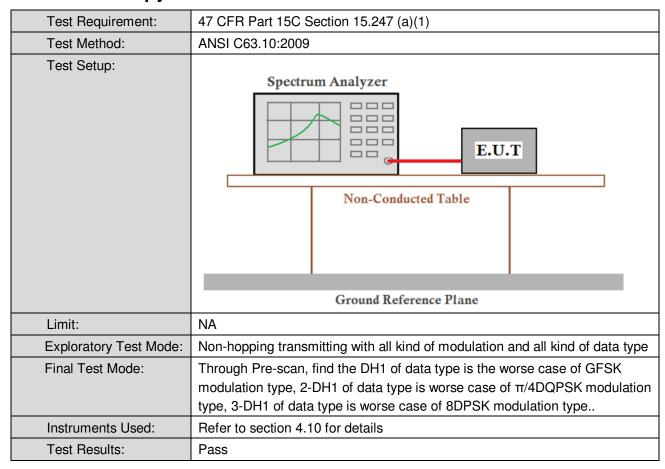

Measurement Data

Toot shannel	20dB Occupy Bandwidth (kHz)				
Test channel	GFSK	π/4DQPSK	8DPSK		
Lowest	879.807692300	1221.153846	1221.153846		
Middle	879.807692308	1225.961538	1221.153846		
Highest	879.807692304	1216.346154	1225.961538		




Report No.: SZEM131100609401


Page: 24 of 76

Test plot as follows:

Test mode: GFSK Test channel: Lowest

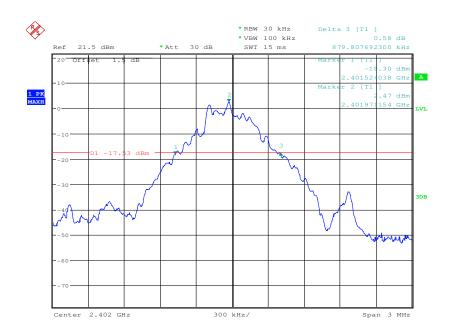

Test mode: GFSK Test channel: Middle

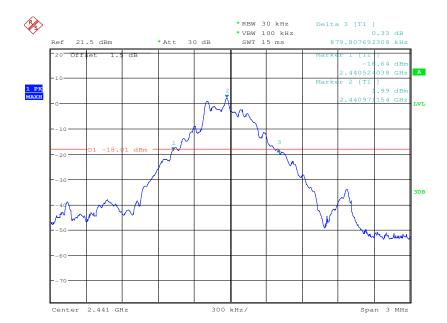





Report No.: SZEM131100609401

Page: 25 of 76

Test mode: GFSK Test channel: Highest

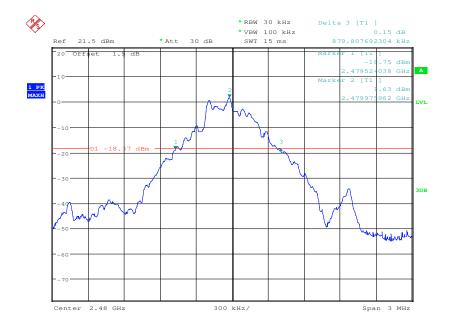



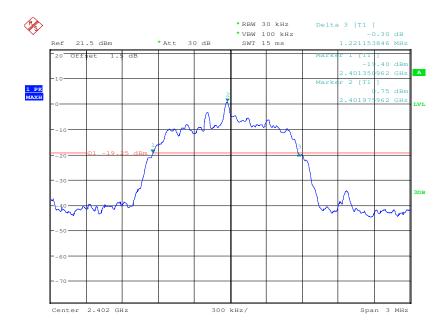


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM131100609401

Page: 26 of 76

Test mode: π/4DQPSK Test channel: Middle

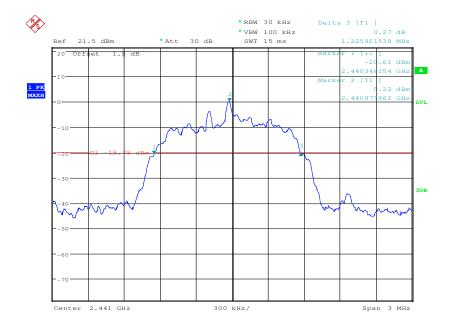



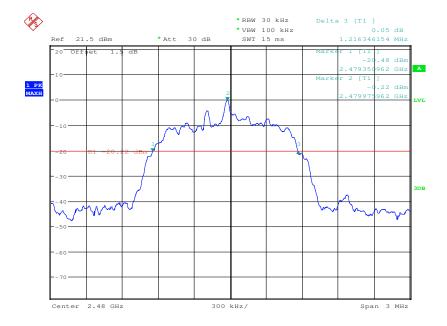


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM131100609401

Page: 27 of 76

Test mode: 8DPSK Test channel: Lowest

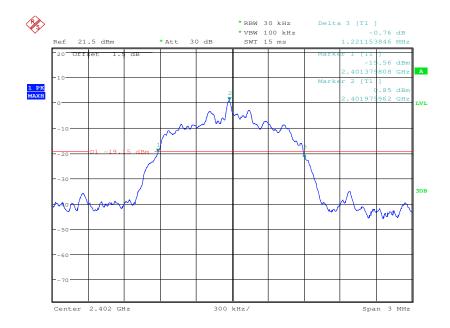



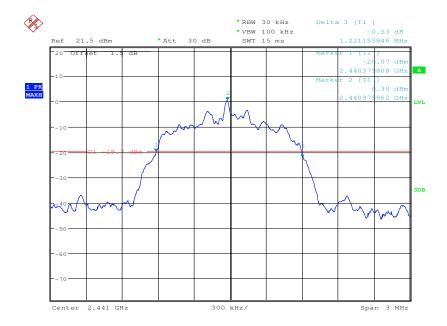




Report No.: SZEM131100609401

Page: 28 of 76

Test mode: 8DPSK Test channel: Highest

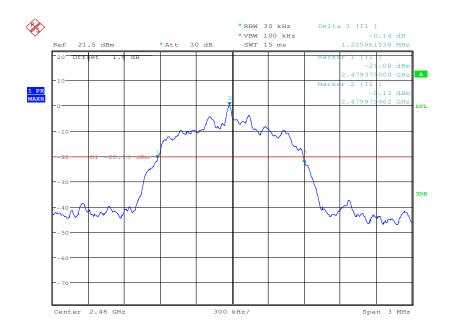




Report No.: SZEM131100609401

Page: 29 of 76

5.5 Carrier Frequencies Separation

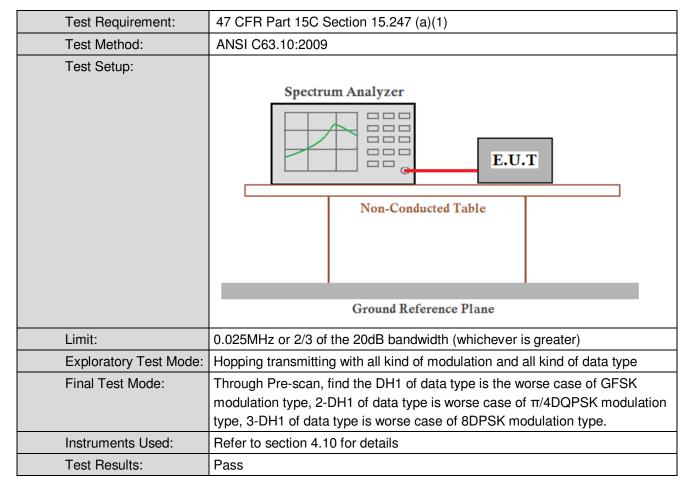



Report No.: SZEM131100609401

Page: 30 of 76

Measurement Data

GFSK mode					
Test channel Carrier Frequencies Separation (kHz)		Limit (kHz)	Result		
Lowest	4000		Pass		
Middle	Middle 1002		Pass		
Highest 1002		≥817	Pass		
	π/4DQPSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	≥817	Pass		
Middle	1002	≥817	Pass		
Highest	1002	≥817	Pass		
8DPSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	≥817	Pass		
Middle	1002	≥817	Pass		
Highest 1002		≥817	Pass		

Note: According to section 5.4,

Mode	20dB bandwidth (kHz)	Limit (kHz)
IVIOGE	(worse case)	(Carrier Frequencies Separation)
GFSK	879.807692308	587
π/4DQPSK	1225.961538	817
8DPSK	1225.961538	817





Report No.: SZEM131100609401


Page: 31 of 76

Test plot as follows:

Test mode: GFSK Test channel: Lowest

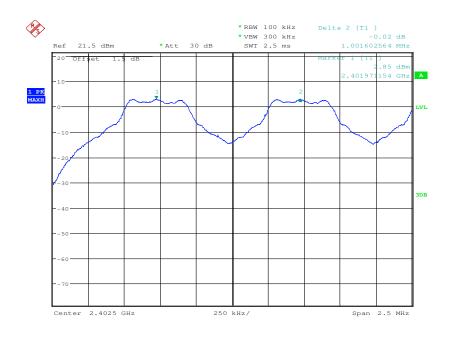



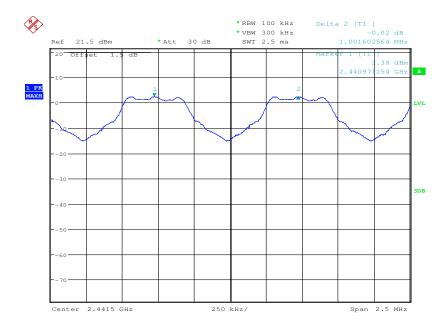





Report No.: SZEM131100609401

Page: 32 of 76

Test mode: GFSK Test channel: Highest

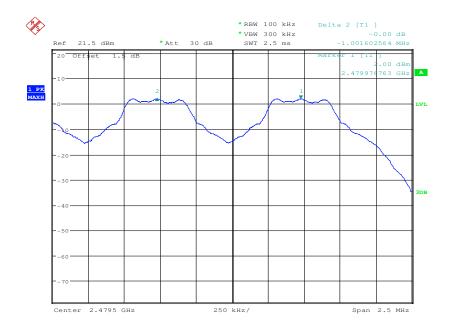

Test mode: π/4DQPSK Test channel: Lowest

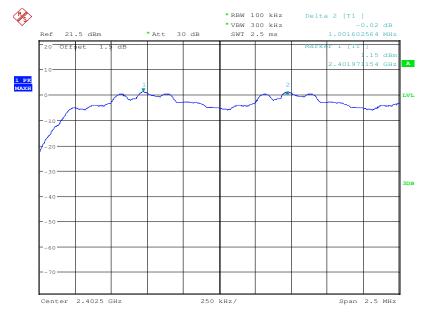







Report No.: SZEM131100609401

Page: 33 of 76

Test mode: $\pi/4DQPSK$ Test channel: Middle

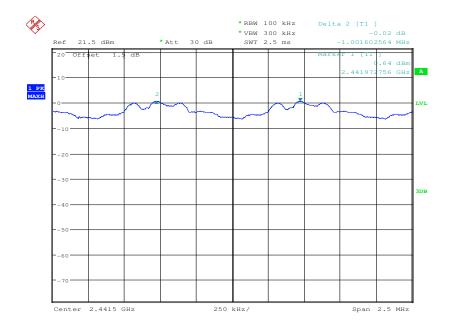



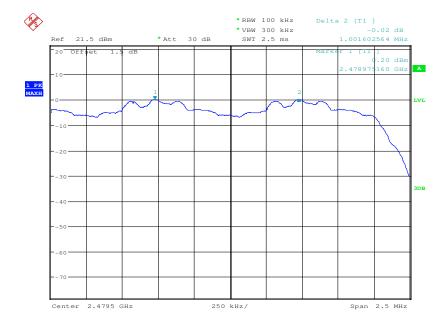


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM131100609401

Page: 34 of 76

Test mode: 8DPSK Test channel: Lowest

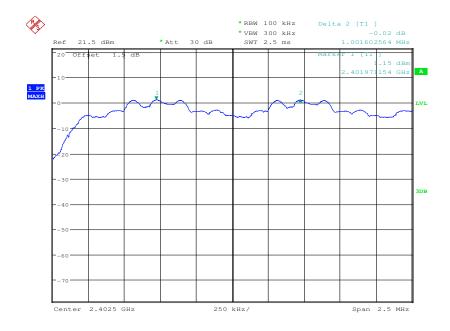



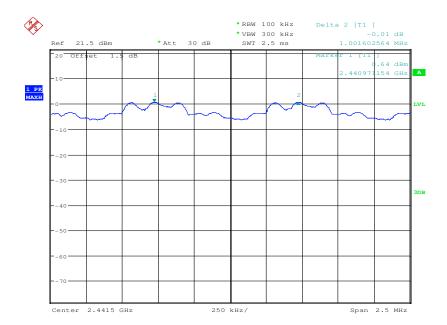


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131100609401

Page: 35 of 76

Test mode: 8DPSK Test channel: Highest

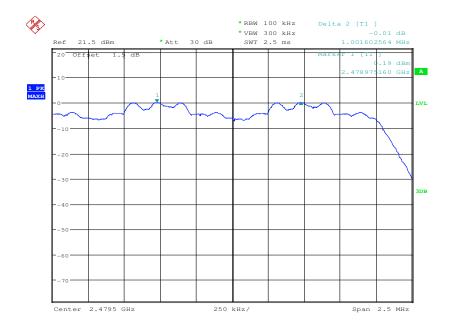




Report No.: SZEM131100609401

Page: 36 of 76

5.6 Hopping Channel Number

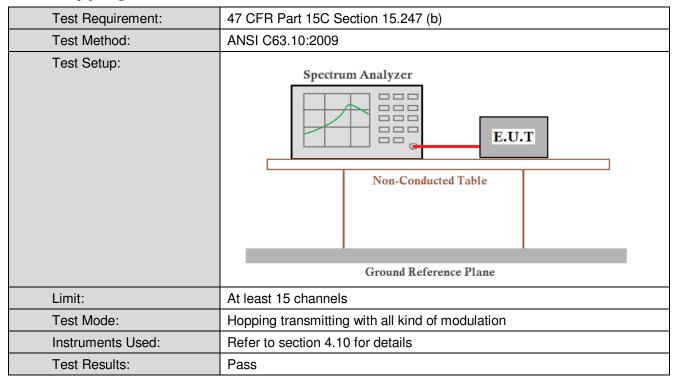

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15




Report No.: SZEM131100609401


Page: 37 of 76

Test plot as follows:

Test mode: GFSK

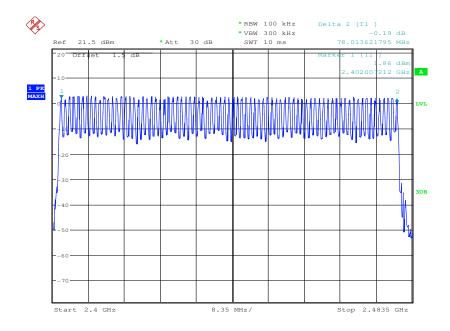

Test mode: π/4DQPSK

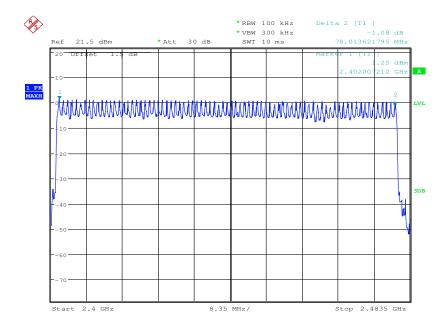




Report No.: SZEM131100609401

Page: 38 of 76

Test mode: 8DPSK

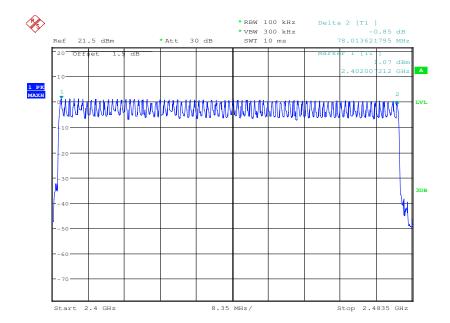




Report No.: SZEM131100609401

Page: 39 of 76

5.7 Dwell Time

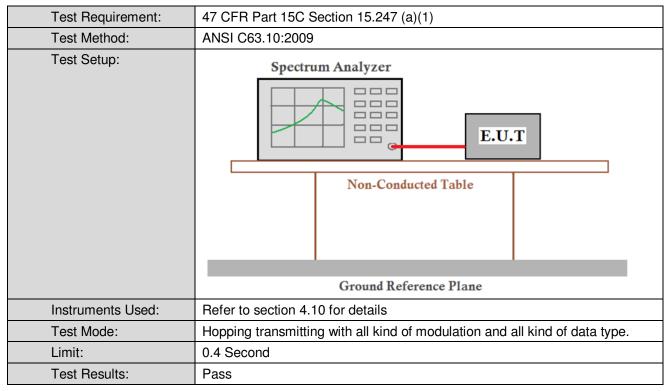

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)		
	DH1	0.16224	0.4		
GFSK	DH3	0.28304	0.4		
	DH5	0.32203	0.4		
	2-DH1	0.16608	0.4		
π/4DQPSK	2-DH3	0.28432	0.4		
	2-DH5	0.16224 0.28304 0.32203 0.16608	0.4		
	3-DH1	0.16608	0.4		
8DPSK	3-DH3	0.28304	0.4		
	3-DH5	0.32373	0.4		

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot=0.507 (ms)*(1600/ (2*79))*31.6=162.24 ms

DH3 time slot=1.769 (ms)*(1600/ (4*79))*31.6=283.04 ms

DH5 time slot=3.019 (ms)*(1600/ (6*79))*31.6=322.03 ms




Report No.: SZEM131100609401


Page: 40 of 76

Test plot as follows



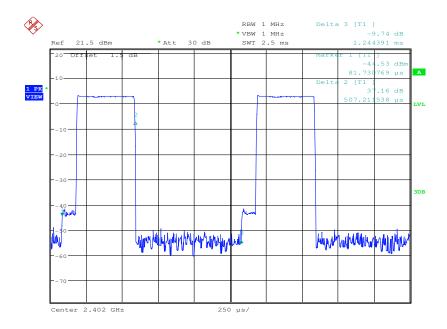

Test Packet: DH3

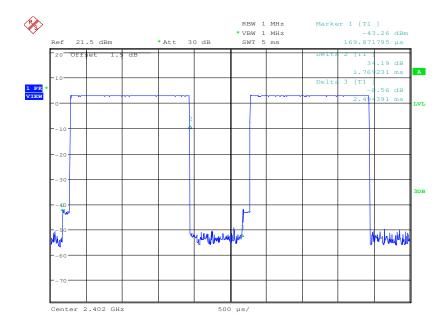





Report No.: SZEM131100609401

Page: 41 of 76

Test Packet: DH5

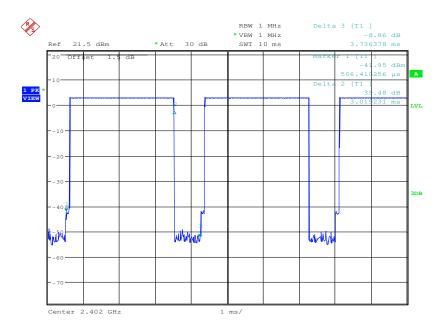



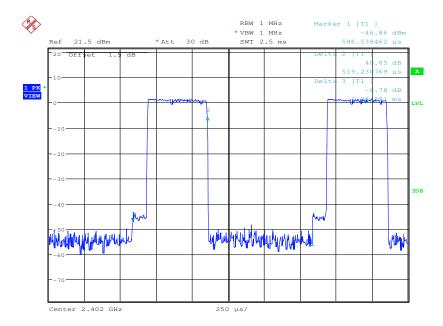





Report No.: SZEM131100609401

Page: 42 of 76

Test Packet: 2-DH3

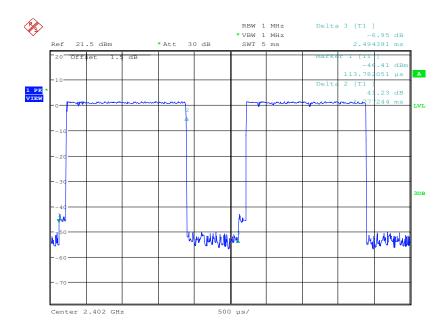

Test Packet: 2-DH5

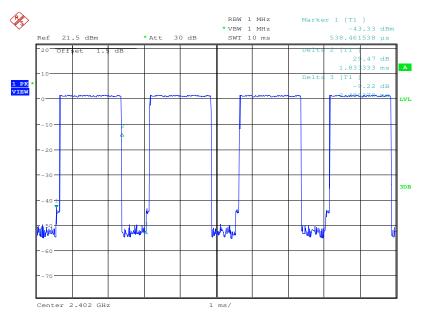







Report No.: SZEM131100609401

Page: 43 of 76

Test Packet: 3-DH1

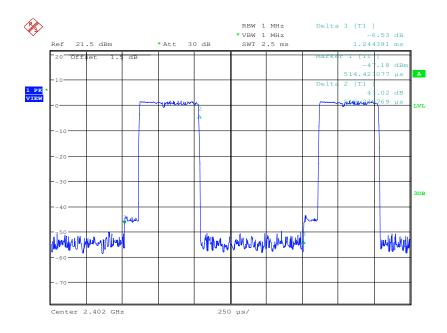



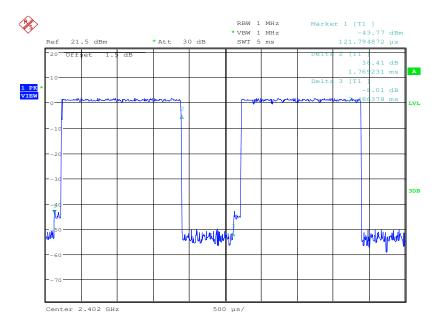




Report No.: SZEM131100609401

Page: 44 of 76

Test Packet: 3-DH5

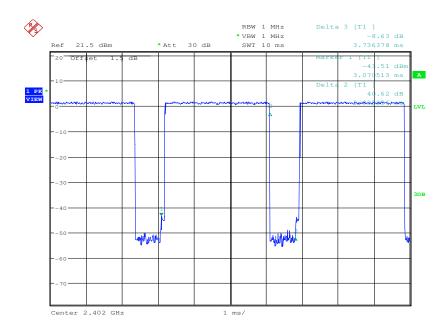



Report No.: SZEM131100609401

Page: 45 of 76

5.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	ANSI C63.10:2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type					
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					





Report No.: SZEM131100609401

Page: 46 of 76

Test plot as follows:

Test mode: GFSK Test channel: Lowest

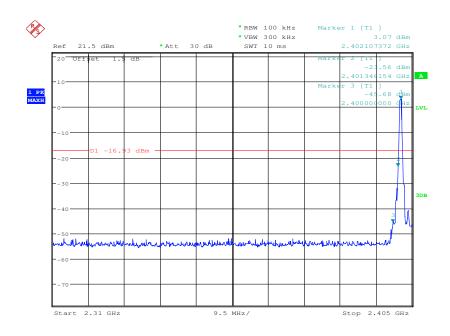

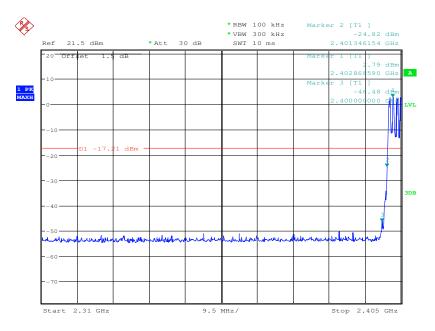





Report No.: SZEM131100609401

Page: 47 of 76

Test mode: GFSK Test channel: Highest

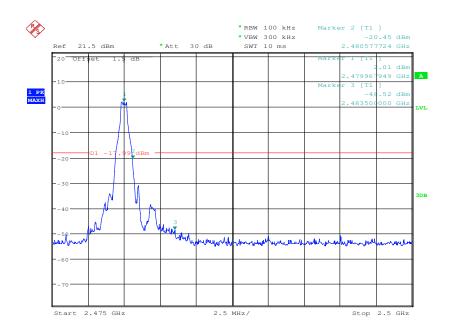

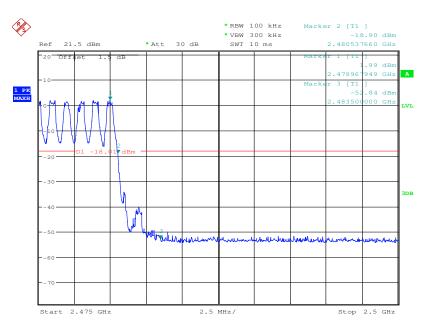


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM131100609401

Page: 48 of 76

Test mode: $\pi/4DQPSK$ Test channel: Lowest

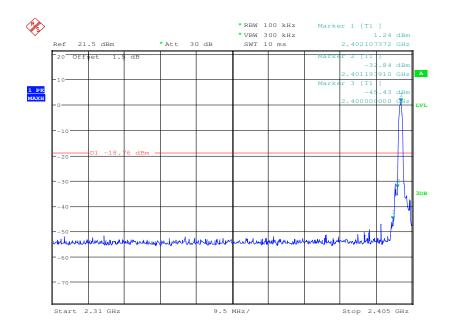

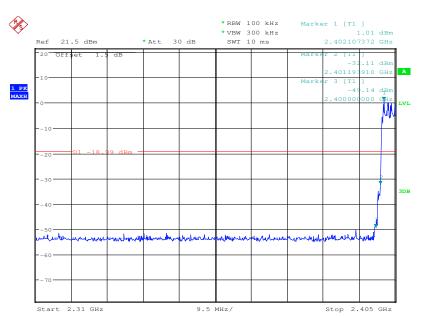


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM131100609401

Page: 49 of 76

Test mode: $\pi/4DQPSK$ Test channel: Highest

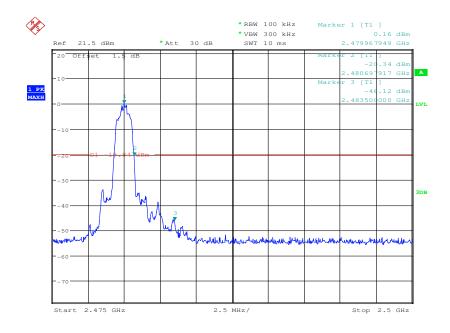

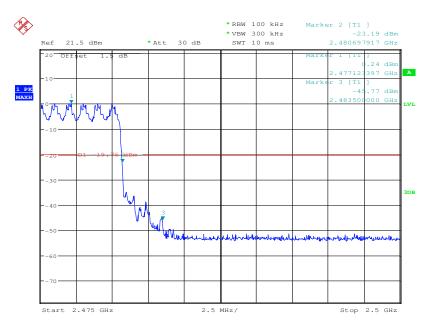





Report No.: SZEM131100609401

Page: 50 of 76

Test mode: 8DPSK Test channel: Lowest

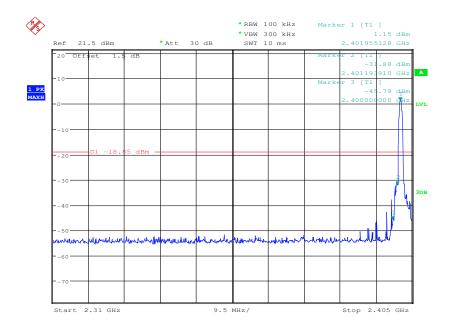

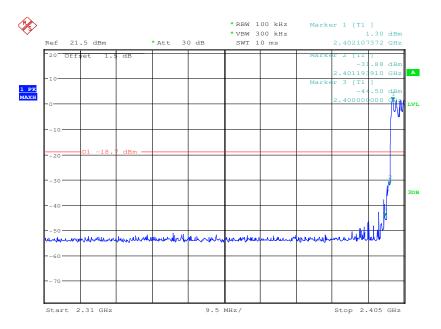





Report No.: SZEM131100609401

Page: 51 of 76

Test mode: 8DPSK Test channel: Highest

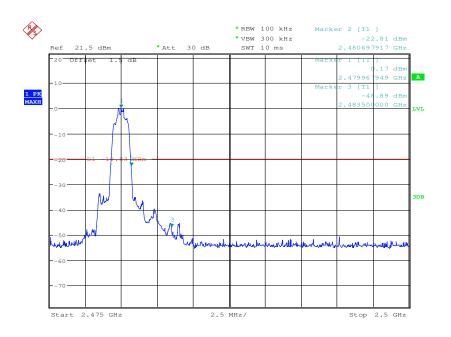

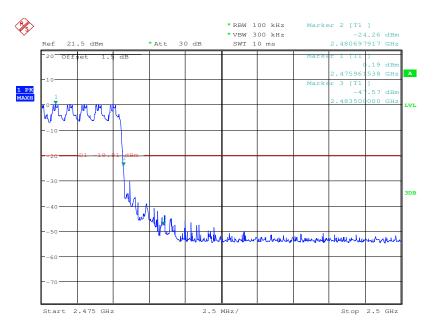



Report No.: SZEM131100609401

Page: 52 of 76

5.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	ANSI C63.10:2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type					
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					






Report No.: SZEM131100609401


Page: 53 of 76

Test plot as follows:

Test mode: GFSK Test channel: Lowest

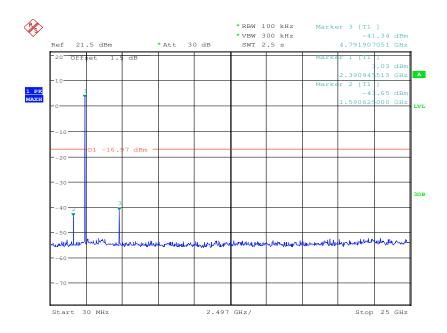

Test mode: GFSK Test channel: Middle

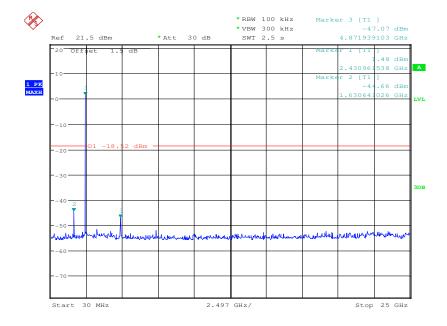





Report No.: SZEM131100609401

Page: 54 of 76

Test mode: GFSK Test channel: Highest

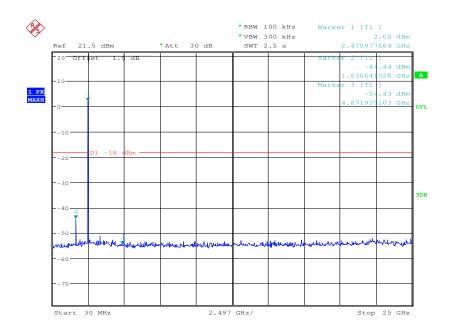

-	Test mode:	π/4DQPSK	Test channel:	Lowest	
---	------------	----------	---------------	--------	--

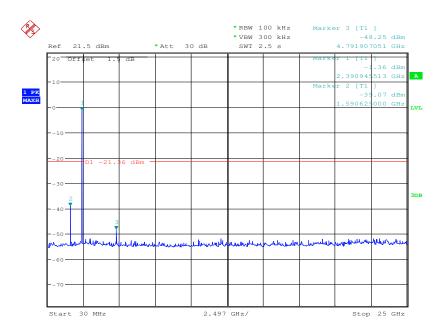





Report No.: SZEM131100609401

Page: 55 of 76

Test mode: $\pi/4DQPSK$ Test channel: Middle

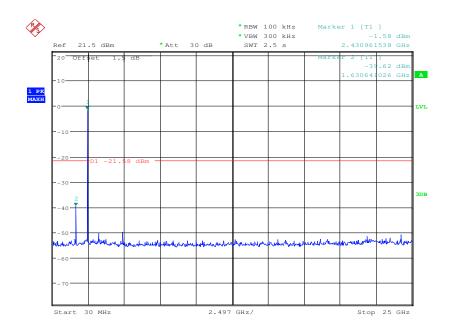

	Test mode:	π/4DQPSK	Test channel:	Highest	
--	------------	----------	---------------	---------	--

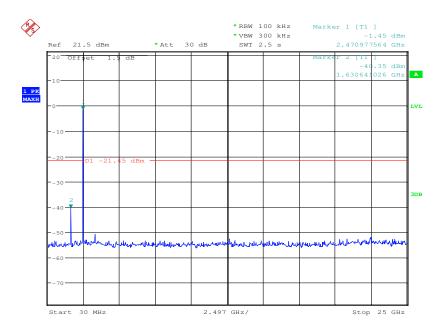





Report No.: SZEM131100609401

Page: 56 of 76

Test mode: 8DPSK Test channel: Lowest

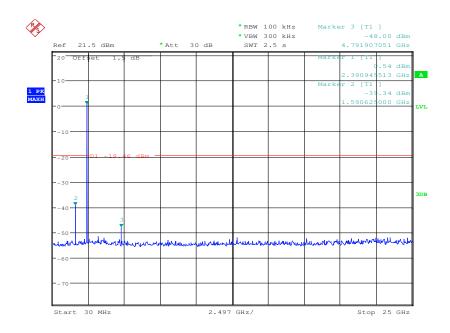



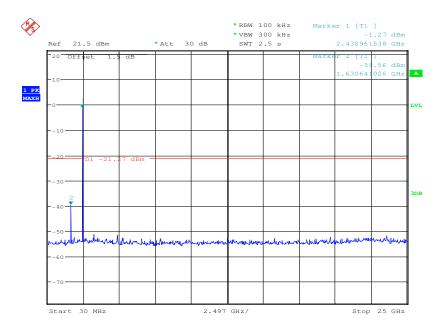




Report No.: SZEM131100609401

Page: 57 of 76

Test mode: 8DPSK Test channel: Highest

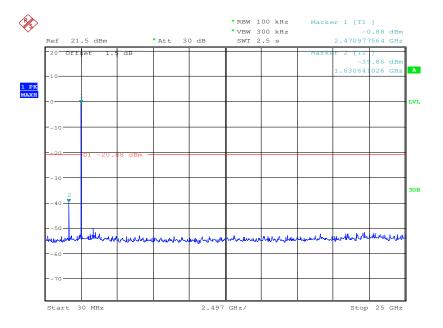

Remark:

The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions which are attenuated more than 20dB below the limit need not be reported.



Report No.: SZEM131100609401

Page: 58 of 76

5.10 Pseudorandom Frequency Hopping Sequence

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM131100609401

Page: 59 of 76

5.11 Radiated Spurious Emission


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10: 2009									
Test Site:	Measurement Distance	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency	Frequency Detector RBW VBW Remark								
	0.009MHz-0.090MH	Z	Peak	10kHz	z 30kHz	Peak				
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average				
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	0.110MHz-0.490MH	Z	Peak	10kHz	z 30kHz	Peak				
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average				
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak				
	Above 1GHz		Peak	1MHz	z 3MHz	Peak				
	Above IGHZ		Peak	1MHz	10Hz	Average				
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m				
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30				
	1.705MHz-30MHz		30	-	-	30				
	30MHz-88MHz		100	40.0	Quasi-peak	3				
	88MHz-216MHz		150	43.5	Quasi-peak	3				
	216MHz-960MHz		200	46.0	Quasi-peak	3				
	960MHz-1GHz		500	54.0	Quasi-peak	3				
	Above 1GHz		500	54.0	Average	3				
	emissions is 20dE applicable to the	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								



Report No.: SZEM131100609401

Page: 60 of 76

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB



Report No.: SZEM131100609401

Page: 61 of 76

	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
	h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK
	modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM131100609401

Page: 62 of 76

5.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

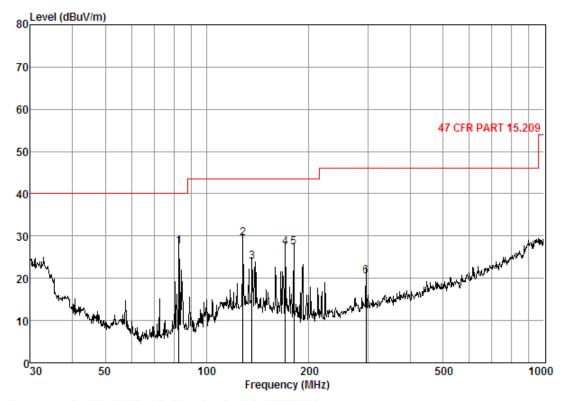

Condition: 47 CFR PART 15.209 3m 3142C VERTICAL

Job No. : 6094RF Mode : TX

	Freq		CableAntenna Preamp Loss Factor Factor					Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5	82. 65 128. 11 135. 98 170. 79 181. 28	1. 29 1. 65 1. 73 1. 94 2. 03	5.57 8.09 8.36 8.86 6.70	25. 38 25. 13 25. 47 24. 82 25. 87	46. 11 44. 82 39. 24 41. 37 44. 55	27. 59 29. 43 23. 86 27. 35 27. 41	43.50 43.50 43.50	-12.41 -14.07 -19.64 -16.15 -16.09
6	296.18	2.74	9.54	25.09	33.39	20.58	46.00	-25.42






Report No.: SZEM131100609401

Page: 63 of 76

Test mode: Transmitting Horizontal

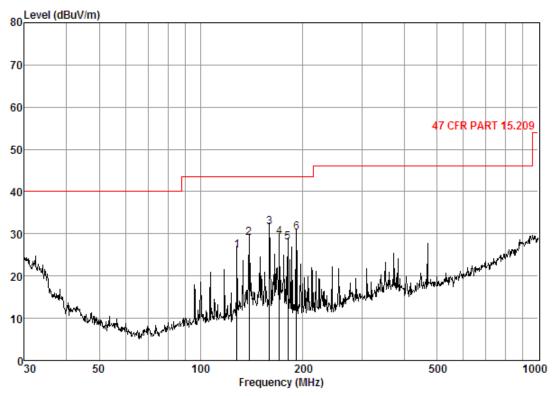

Condition: 47 CFR PART 15.209 3m 3142C HORIZONTAL

Job No. : 6094RF Mode : TX

	Freq	CableAr Loss F		Preamp Factor				Over Limit
_	MHz		dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5	128. 11 138. 87 159. 78 170. 79 181. 28 191. 75	1.65 1.78 1.93 1.94 2.03 2.10	8.09 8.54 9.50 8.86 6.70	25. 13 25. 63 25. 60 24. 82 25. 87 24. 96	45.83 43.15 45.12	28. 92 31. 66 29. 13 27. 98	43.50 43.50 43.50 43.50 43.50 43.50	-14.58 -11.84 -14.37 -15.52



Report No.: SZEM131100609401

Page: 64 of 76

5.11.2 Transmitter Emission above 1GHz

Worse case i	mode:	GFSK(DH1)	Test channel:		Lowest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1602.000	3.99	28.84	39.40	55.16	48.59	74	-25.41	Vertical
3766.785	6.13	33.53	40.87	49.67	48.46	74	-25.54	Vertical
4804.000	7.44	34.70	41.63	50.26	50.77	74	-23.23	Vertical
7206.000	8.72	35.88	39.87	48.06	52.79	74	-21.21	Vertical
9608.000	9.68	37.30	37.80	45.59	54.77	74	-19.23	Vertical
12272.340	11.40	39.18	38.39	41.91	54.10	74	-19.90	Vertical
1602.000	3.99	28.84	39.40	57.86	51.29	74	-22.71	Horizontal
3507.652	5.78	33.22	40.67	48.64	46.97	74	-27.03	Horizontal
4804.000	7.44	34.70	41.63	53.89	54.40	74	-19.60	Horizontal
7206.000	8.72	35.88	39.87	49.17	53.90	74	-20.10	Horizontal
9608.000	9.68	37.30	37.80	46.51	55.69	74	-18.31	Horizontal
12241.140	11.38	39.14	38.38	42.74	54.88	74	-19.12	Horizontal

Worse case	mode:	GFSK(DH1) .	Test	t channel:	Lowest	Lowest		Lowest Remark:		ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Prear facto (dB	or Or	Reading Level (dBµV)	Emission Level (dBµV/m)	Lim (dBµ\		Over Limit (dB)	Polarization		
1602.000	3.99	28.84	39.4	0	48.44	41.87	54	ļ	-12.13	Vertical		
3766.785	6.13	33.53	40.8	7	38.57	37.36	54	ļ	-16.64	Vertical		
4804.000	7.44	34.70	41.6	3	45.22	45.73	54	ŀ	-8.27	Vertical		
7206.000	8.72	35.88	39.8	7	37.25	41.98	54	ŀ	-12.02	Vertical		
9608.000	9.68	37.30	37.8	0	33.06	42.24	54	ŀ	-11.76	Vertical		
12272.340	11.40	39.18	38.3	9	30.09	42.28	54	ŀ	-11.72	Vertical		
1602.000	3.99	28.84	39.4	0	51.10	44.53	54	ŀ	-9.47	Horizontal		
3507.652	5.78	33.22	40.6	7	35.17	33.50	54	ŀ	-20.50	Horizontal		
4804.000	7.44	34.70	41.6	3	47.30	47.81	54	ŀ	-6.19	Horizontal		
7206.000	8.72	35.88	39.8	7	35.59	40.32	54	ŀ	-13.68	Horizontal		
9608.000	9.68	37.30	37.8	0	32.46	41.64	54	ļ.	-12.36	Horizontal		
12241.140	11.38	39.14	38.3	8	29.01	41.15	54	ļ.	-12.85	Horizontal		



Report No.: SZEM131100609401

Page: 65 of 76

Worse case	mode:	GFSK(DH1) Te	st channel:	Middle	Re	mark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1621.985	4.00	29.09	39.41	52.85	46.53	74	-27.47	Vertical
3719.146	6.08	33.47	40.83	49.15	47.87	74	-26.13	Vertical
4882.000	7.48	34.59	41.68	54.57	54.96	74	-19.04	Vertical
7323.000	8.87	35.93	39.77	47.73	52.76	74	-21.24	Vertical
9764.000	9.74	37.48	37.66	45.21	54.77	74	-19.23	Vertical
12210.020	11.37	39.11	38.36	43.31	55.43	74	-18.57	Vertical
1621.985	4.00	29.09	39.41	56.16	49.84	74	-24.16	Horizontal
3738.129	6.11	33.49	40.84	49.16	47.92	74	-26.08	Horizontal
4882.000	7.48	34.59	41.68	57.63	58.02	74	-15.98	Horizontal
7323.000	8.87	35.93	39.77	48.70	53.73	74	-20.27	Horizontal
9764.000	9.74	37.48	37.66	45.36	54.92	74	-19.08	Horizontal
12148.020	11.35	39.06	38.34	43.05	55.12	74	-18.88	Horizontal

Worse case	mode:	GFSK(DH1) Tes	t channel:	Middle	Ren	nark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1621.985	4.00	29.09	39.41	45.57	39.25	54	-14.75	Vertical
3719.146	6.08	33.47	40.83	38.74	37.46	54	-16.54	Vertical
4882.000	7.48	34.59	41.68	48.72	49.11	54	-4.89	Vertical
7323.000	8.87	35.93	39.77	38.47	43.50	54	-10.50	Vertical
9764.000	9.74	37.48	37.66	31.05	40.61	54	-13.39	Vertical
12210.020	11.37	39.11	38.36	31.86	43.98	54	-10.02	Vertical
1621.985	4.00	29.09	39.41	49.44	43.12	54	-10.88	Horizontal
3738.129	6.11	33.49	40.84	38.50	37.26	54	-16.74	Horizontal
4882.000	7.48	34.59	41.68	51.81	52.20	54	-1.80	Horizontal
7323.000	8.87	35.93	39.77	36.25	41.28	54	-12.72	Horizontal
9764.000	9.74	37.48	37.66	31.70	41.26	54	-12.74	Horizontal
12148.020	11.35	39.06	38.34	30.82	42.89	54	-11.11	Horizontal



Report No.: SZEM131100609401

Page: 66 of 76

Worse case	mode:	GFSK(DH1) Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1655.354	4.04	29.33	39.42	52.34	46.29	74	-27.71	Vertical
3757.208	6.13	33.51	40.86	48.09	46.87	74	-27.13	Vertical
4960.000	7.53	34.46	41.74	52.56	52.81	74	-21.19	Vertical
7440.000	9.01	35.98	39.67	48.14	53.46	74	-20.54	Vertical
9920.000	9.81	37.63	37.53	45.28	55.19	74	-18.81	Vertical
12397.940	11.45	39.30	38.44	42.00	54.31	74	-19.69	Vertical
1655.354	4.04	29.33	39.42	54.96	48.91	74	-25.09	Horizontal
3672.110	6.00	33.41	40.80	49.03	47.64	74	-26.36	Horizontal
4960.000	7.53	34.46	41.74	55.63	55.88	74	-18.12	Horizontal
7440.000	9.01	35.98	39.67	48.03	53.35	74	-20.65	Horizontal
9920.000	9.81	37.63	37.53	45.71	55.62	74	-18.38	Horizontal
12272.340	11.40	39.18	38.39	43.18	55.37	74	-18.63	Horizontal

Worse case	mode:	GFSK(DH1) To	est channel:	Highest	R	emark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1655.354	4.04	29.33	39.42	45.63	39.58	54	-14.42	Vertical
3757.208	6.13	33.51	40.86	37.01	35.79	54	-18.21	Vertical
4960.000	7.53	34.46	41.74	47.97	48.22	54	-5.78	Vertical
7440.000	9.01	35.98	39.67	37.94	43.26	54	-10.74	Vertical
9920.000	9.81	37.63	37.53	34.61	44.52	54	-9.48	Vertical
12397.940	11.45	39.30	38.44	31.81	44.12	54	-9.88	Vertical
1655.354	4.04	29.33	39.42	47.94	41.89	54	-12.11	Horizontal
3672.110	6.00	33.41	40.80	37.93	36.54	54	-17.46	Horizontal
4960.000	7.53	34.46	41.74	49.88	50.13	54	-3.87	Horizontal
7440.000	9.01	35.98	39.67	36.96	42.28	54	-11.72	Horizontal
9920.000	9.81	37.63	37.53	33.77	43.68	54	-10.32	Horizontal
12272.340	11.40	39.18	38.39	30.28	42.47	54	-11.53	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Report No.: SZEM131100609401

Page: 67 of 76

5.12Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15	7 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009	NSI C63.10: 2009								
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)							
Limit:	Frequency	Frequency Limit (dBuV/m @3m) Remark								
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	88MHz-216MHz 43.5 Quasi-peak Value								
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
	74.0 Peak Value									
Test Setup:										






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM131100609401

Page: 68 of 76

Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM131100609401

Page: 69 of 76

Test plot as follows:

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Vertical

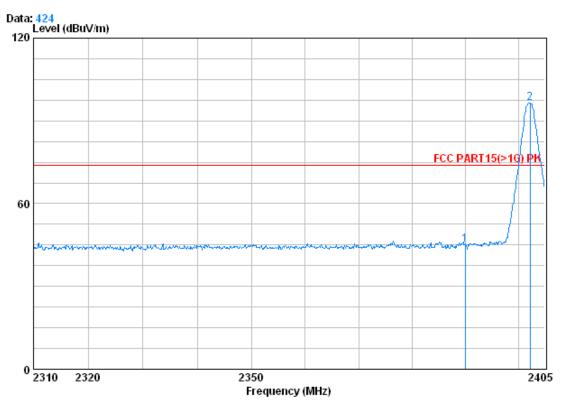

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 6094RF

Mode : 2402 Bandedge

	Freq		Antenna Factor	-			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000 2402.245		32.51 32.51					


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131100609401

Page: 70 of 76

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Horizontal

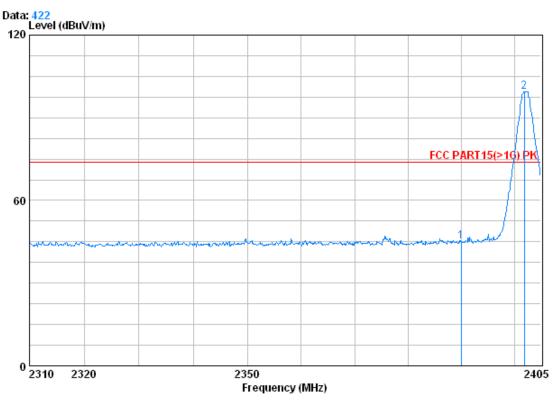

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 6094RF

Mode : 2402 Bandedge


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
								,	
1		2390.000	2.98	32.51	39.85	49.38	45.03	74.00	-28.97
_	**	0404 065							
2	X	2401.865	2.98	32.51	39.86	103.93	99.56	74.00	25.56



Report No.: SZEM131100609401

Page: 71 of 76

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Vertical

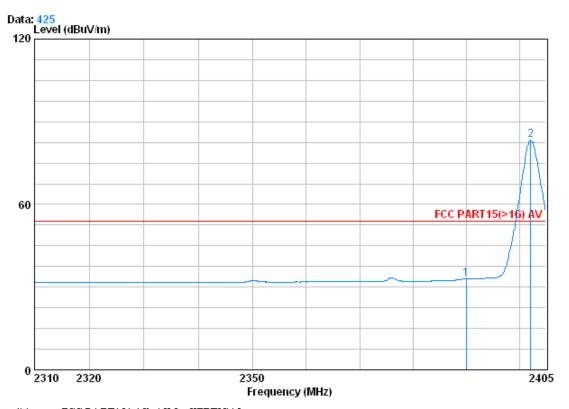

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 6094RF

Mode : 2402 Bandedge

		Cable	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	390.000	2.98	32.51	39.85	37.34	32.99	54.00	-21.01
2 0 2	402.150	2.98	32.51	39.86	87.66	83.29	54.00	29.29


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131100609401

Page: 72 of 76

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Horizontal

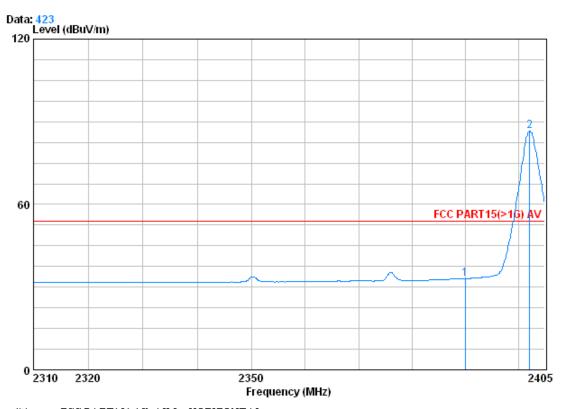

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 6094RF

Mode : 2402 Bandedge

			Cablei	lntenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	——dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000			39.85				
2	Ø	2402.150	2.98	32.51	39.86	90.93	86.56	54.00	32.56






Report No.: SZEM131100609401

Page: 73 of 76

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Vertical

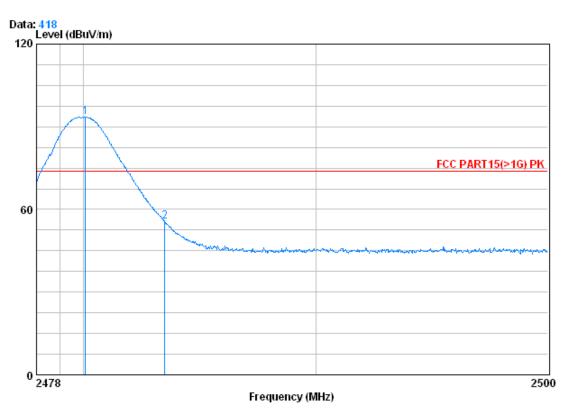

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 6094RF

Mode : 2480 Bandedge


	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2480.090	3.03	32.67	39.92	97.65	93.43	74.00	19.43
2	2483.500	3.03	32.67	39.92	59.80	55.58	74.00	-18.42



Report No.: SZEM131100609401

Page: 74 of 76

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Horizontal

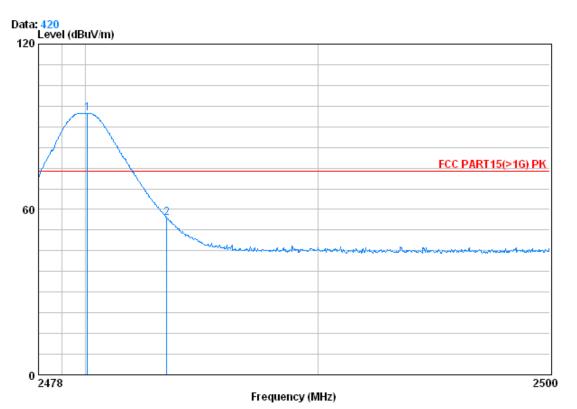

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 6094RF

Mode : 2480 Bandedge


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
				,			,	,	
1	x	2480.090	3 03	32 67	39.92	99 18	94 96	74 00	20 96
_	11	2100.050	0.00	32.01	33.56	22.10	51.50	11.00	20.50
2		2483.500	3.03	32.67	39.92	61.25	57.03	74.00	-16.97



Report No.: SZEM131100609401

Page: 75 of 76

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Average Vertical

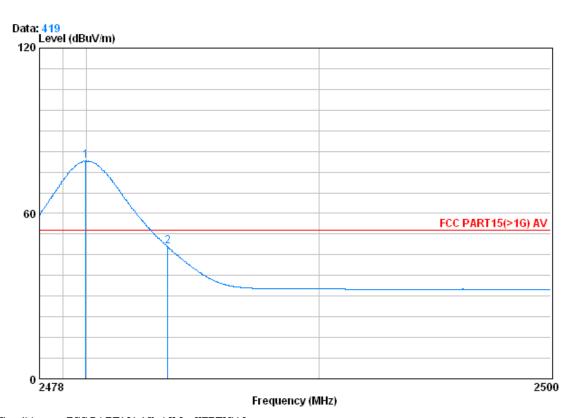

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 6094RF

Mode : 2480 Bandedge


	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	2479.980	3.03	32.67	39.92	83.29	79.07	54.00	25.07
2	2483.500	3.03	32.67	39.92	52.17	47.95	54.00	-6.05



Report No.: SZEM131100609401

Page: 76 of 76

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Average Horizontal

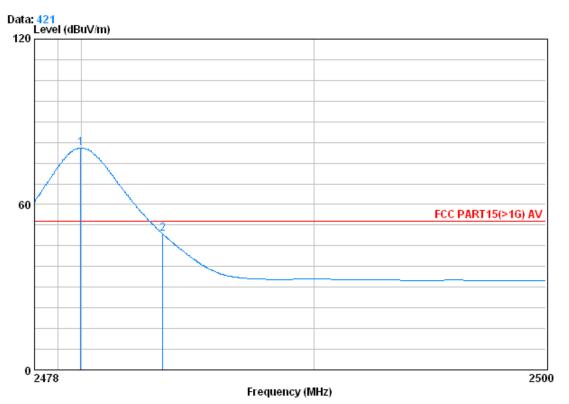

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 6094RF

Mode : 2480 Bandedge

			CableAntenna		Preamp Read			Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2479.980	3.03	32.67	39.92	84.79	80.57	54.00	26.57
2		2483.500	3.03	32.67	39.92	53.56	49.34	54.00	-4.66

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."