

Emissions Test Report

EUT Name: USB Wireless Audio Transmitter
Model No.: SYN Pro Air TX
CFR 47 Part 15.247: 2020 and RSS 247 Issue 2, 2017

Prepared for:

Voyetra Turtle Beach, Inc.
44 South Broadway, 4th Floor
White Plains NY 10601 USA

Prepared by:

TUV Rheinland of North America, Inc.
1279 Quarry Lane
Pleasanton, CA 94566
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: March 16, 2021
Revision Number 1
Project Number: 234164133
Report Number: US21BKL7.001

Revisions

Revision No.	Date MM/DD/YYYY	Reason for Change	Author
0	02/18/2021	Original Document	N/A
1	03/16/2021	Edit Antenna Photo	Jluong

Note: Latest revision report will replace all previous reports.

Statement of Compliance

Manufacturer: Voyetra Turtle Beach, Inc.
44 South Broadway, 4th Floor
White Plains NY 10601 USA

Requester / Applicant: Tim Blaney
(530) 277-3482

Name of Equipment: USB Wireless Audio Transmitter
Model No 's: SYN Pro Air TX (ROC-15-152)

Type of Equipment: Intentional Radiator

Application of Regulations: CFR 47 Part 15.247: 2020 and RSS 247 Issue 2, 2017

Test Dates: January 13, 2021 to February 12, 2021

Guidance Documents:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02

Test Methods:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Jeremy Luong

Test Engineer

Date March 16, 2021

Kerwinn Corpuz

Reviewer Signatory

Date March 16, 2021



Industry
Canada

Industrie
Canada

Testing Cert #3331.02

US1131

2932M

Table of Contents

1	<i>Executive Summary</i>	7
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
2	<i>Laboratory Information</i>	9
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	9
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.2.2	Immunity Test Facility	10
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.4	Calibration Traceability	12
3	<i>Product Information</i>	13
3.1	Product Description	13
3.2	Equipment Configuration	13
3.3	Operating Mode	13
3.4	Unique Antenna Connector	14
3.4.1	Results	14
3.5	Duty Cycle	15
3.5.1	Results	15
4	<i>Emissions</i>	16
4.1	Output Power Requirements	16
4.1.1	Test Method	16
4.1.2	Results	17
4.2	Occupied Bandwidth	21
4.2.1	Test Method	21
4.2.2	Results	21
4.3	Peak Power Spectral Density	26
4.3.1	Test Method	26
4.3.2	Results	26
4.4	Out of Band Emissions	30

Table of Contents

4.4.1	Test Method	30
4.4.2	Results	31
4.5	Transmit Spurious Emissions	35
4.5.1	Test Methodology	35
4.5.2	Transmitter Spurious Emission Limit	36
4.5.3	Test Results	36
4.5.4	Sample Calculation	46
4.6	AC Conducted Emissions	47
4.6.1	Test Methodology	47
4.6.2	Test Results	47
5	Test Equipment List	52
5.1	Equipment List	52
6	EMC Test Plan	53
6.1	Introduction	53
6.2	Customer	53
6.3	Equipment Under Test (EUT)	54
6.4	Test Specifications	57

Table 1: Summary of Test Results 8

Table 2: RF Output Power at the Antenna Port – Test Results17

Table 3: Occupied Bandwidth – Test Results.....22

Table 4: Peak Power Spectral Density – Test Results.....27

Table 5: Out of Band Emissions – Test Results.....31

Table 6: Transmit Spurious Emission at Band-Edge Requirements37

Table 7: AC Conducted Emissions – Test Results47

Table 8: Customer Information53

Table 9: Technical Contact Information.....53

Table 10: EUT Specifications54

Table 11: Interface Specifications.....55

Table 12: Supported Equipment55

Table 13: Description of Sample used for Testing55

Table 14: Description of Test Configuration used for Radiated Measurement.55

Table 15: Final Test Mode for 2402 MHz to 2480MHz Band.....56

Table 16: Test Specifications57

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247: 2020 and RSS 247 Issue 2, 2017 based on the results of testing performed on January 13, 2021 to February 12, 2021 on the USB Wireless Audio Transmitter Model SYN Pro Air TX manufactured by Voyetra Turtle Beach, Inc. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2402 MHz to 2480 MHz frequency band is covered in this document.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.4	Test Parameters	Measured Value	Result
Spurious Emission in Transmitted Mode	CFR47 15.209, CFR47 15.247 (d) RSS GEN Sect.8.9	Class B	-7.16 dB (Margin)	Complied
Restricted Bands of Operation	CFR47 15.205, RSS GEN Sect.8.10	Class B		Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	Class B	-15.53 dB (Margin)	Complied
Occupied Bandwidth	CFR47 15.247 (a2), RSS GEN Sect.6.7, RSS 247 Sect. 5.2 (a)	≥ 500 kHz	0.722 MHz (DTS) 1.027 MHz (99%)	Complied
Maximum Output Power	CFR47 15.247 (b), RSS 247 Sect. 5.4 (d)	30 dBm w/ 6 dBi antenna	+4.96 dBm	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2 (b)	8 dBm/ 3 kHz	-24.67 dBm	Complied
Out of Band Emission	CFR47 15.247 (d), RSS 247 Sect.5.5	-30 dB	-19.03 dB (Margin)	Complied

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US1131). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2017 and ISO 9002 (Lab Code

Testing Cert #3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for

the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member

country.

2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA.

2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code Testing Cert #3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of 10^9 Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U _{lab}	U _{cispr}
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 40 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz– 300 MHz	3.92 dB	4.3 dB

Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$.	Per CISPR 16-4-2 Methods
--	--------------------------

Measurement Uncertainty - EMC Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$.	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is ± 4.10 dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is ± 3.66 dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$.	Per IEC 61000-4-8
The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$.	Per IEC 61000-4-4
The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$.	Per IEC 61000-4-5
The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$.	Per IEC 61000-4-11

Measurement Uncertainty – Radio Testing

The estimated combined standard uncertainty for frequency error measurements is ± 3.88 Hz
The estimated combined standard uncertainty for carrier power measurements is ± 0.70 dB.
The estimated combined standard uncertainty for adjacent channel power measurements is ± 1.47 dB.
The estimated combined standard uncertainty for modulation frequency response measurements is ± 0.46 dB.
The estimated combined standard uncertainty for transmitter conducted emission measurements is ± 2.06 dB

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2017. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The SYN Pro Air Wireless Gaming System consists of two main communication modules, the SYN Pro Air RX (“Headset”) and the SYN Pro Air TX (“Transmitter”). These two modules comprise a closed-loop wireless audio gaming system that utilize a proprietary 2.4 GHz communication technology to offer wireless streaming audio and chat/talkback capabilities.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.


The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The SYN Pro Air TX uses the permanently integrated PCB trace antenna inside the device. See EUT Photo for details.

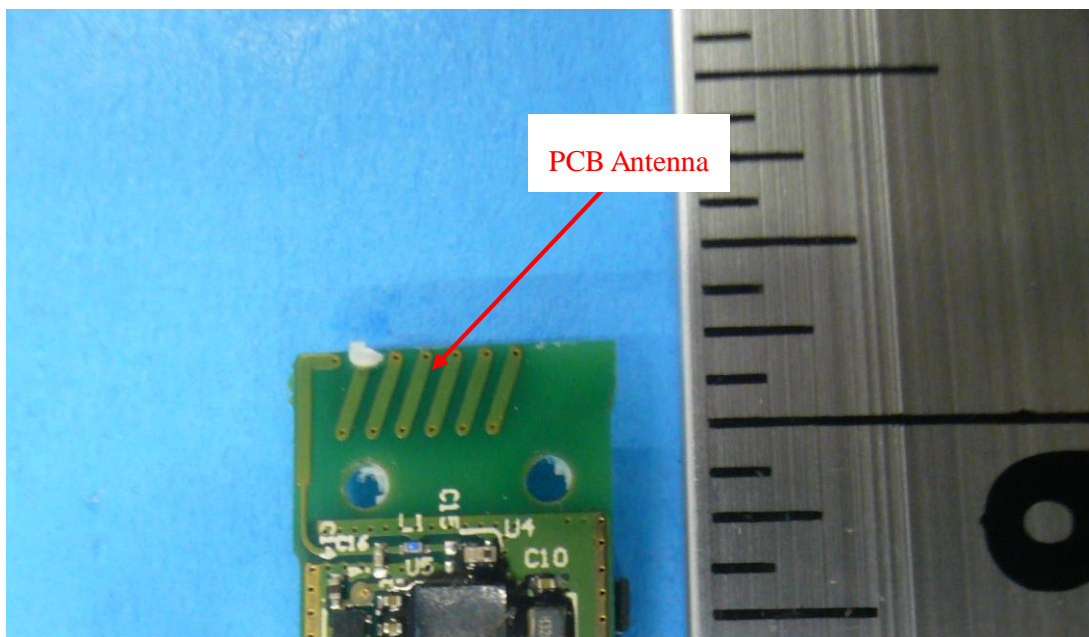

3.5 Duty Cycle

The SYN Pro Air TX, SN:PP #1 was measured.

3.5.1 Results

Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
Standard	0.486	0.511	95.11%	0.21

Notes: EUT was configured and measured for the duty cycle. All measurements use 95.11% duty cycle.

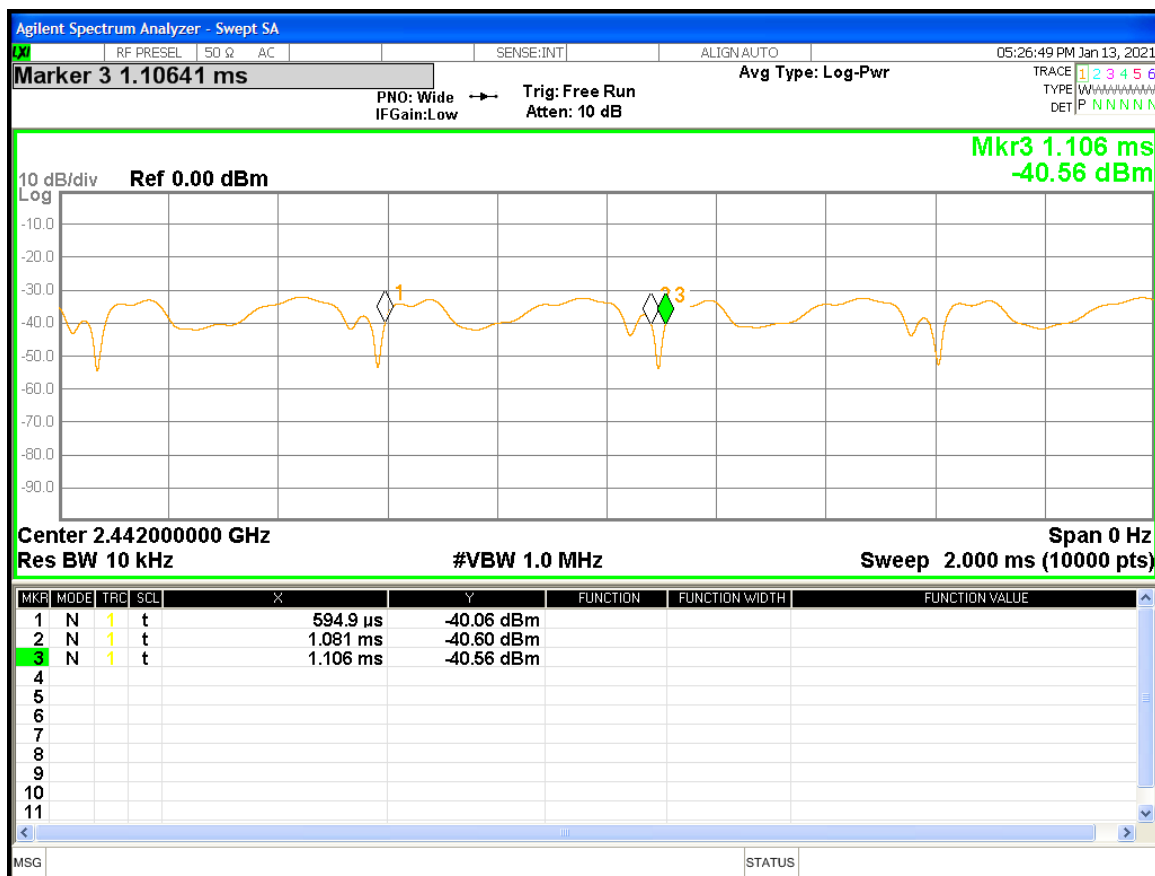


Figure 1: Duty Cycle

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247: 2020 and RSS 247 Issue 2, 2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.

The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b):2020 and RSS 247: 2017 Sect. 5.4 (d).


The maximum transmitted powers are

Band 2400-2483.5 MHz: 1 W

4.1.1 Test Method

The ANSI C63.10-2013 Section 11.9.2.2 conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate/chain to determine the highest power output for each mode. The worst findings were conducted on 3 channels in each operating range per CFR47 Part 15.247(b): 2018 and RSS 247 Sect. 5.4 (d). This test was conducted on 3 channels of Sample, S/N PP #1. The worst mode result indicated below.

Test Setup:

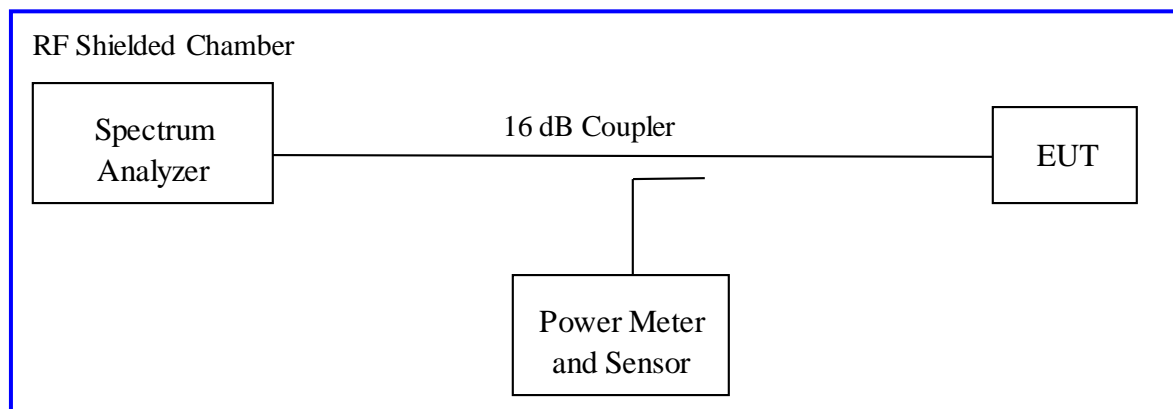

Method AVGSA-2 of "KDB 558074 – DTS Measurement Guidance v05r02" applies since the EUT continuously transmits with duty cycle greater than 98%. Sample detector was used.

4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 2: RF Output Power at the Antenna Port – Test Results

Test Date: January 12, 2021			Test By: Jeremy Luong		
Test Method: Conducted Measurements			Power Setting: Fixed at 4 dBm		
Antenna Type: Integrated PCB			Max. Antenna Gain: -2.2 dBi		
Operating Mode: Uncorrelated			Signal State: Modulated		
Ambient Temp.: 23 °C			Relative Humidity: 41%		
USB Wireless Audio Transmitter					
Frequency [MHz]	Limit [dBm]	Output [dBm]	Duty Cycle [dB]	Σ Power [dBm]	Margin [dB]
1 Mbps Data Rate					
2402	+30.00	4.75	0.21	4.96	-25.04
2442	+30.00	4.67	0.21	4.88	-25.12
2480	+30.00	4.54	0.21	4.75	-25.25
2402	+30.00	4.75	0.21	4.96	-25.04
2442	+30.00	4.67	0.21	4.88	-25.12
2480	+30.00	4.56	0.21	4.77	-25.23
Note: The transmitter transmitted at 95.11% duty cycle. Duty cycle correction applied.					

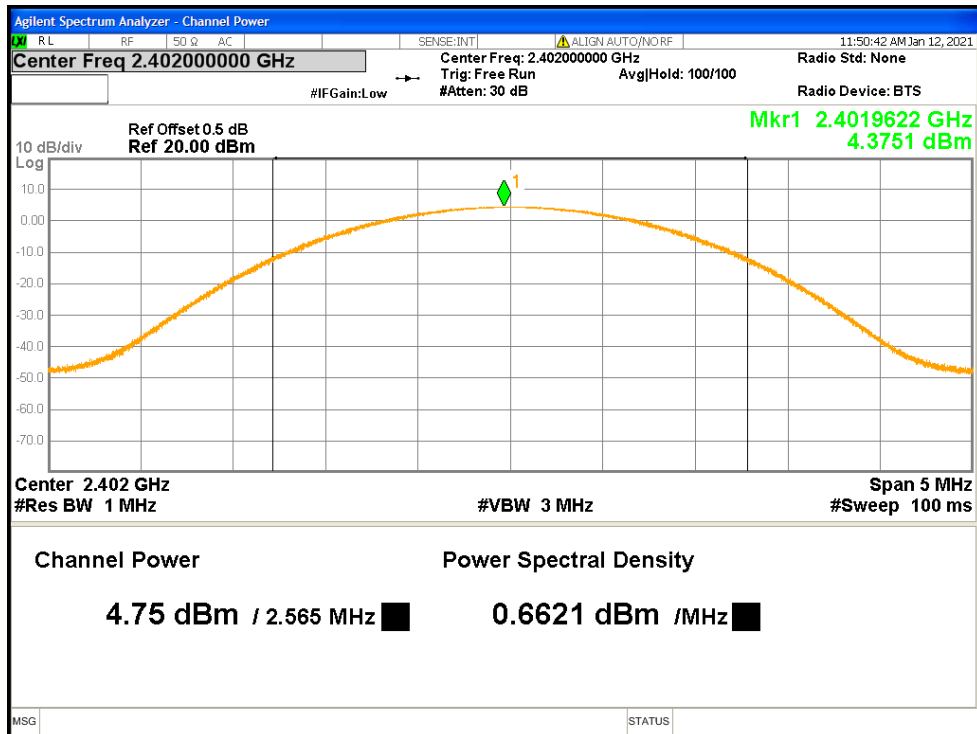


Figure 2: Maximum Conducted Output Power, 2402 MHz at 1Mbps - Transmitter

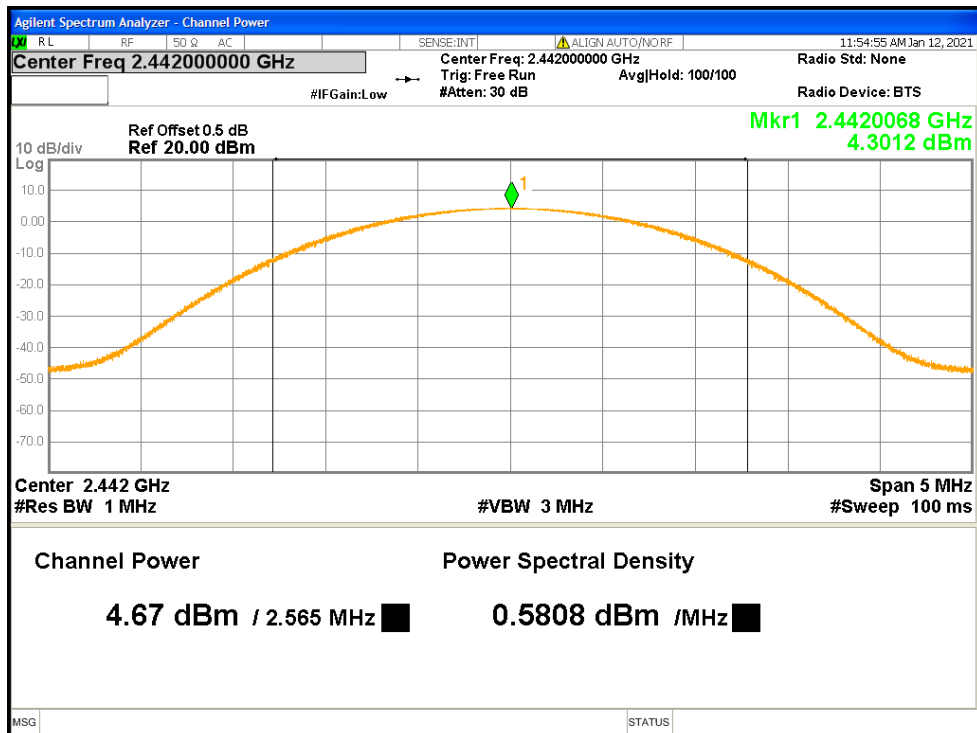


Figure 3: Maximum Conducted Output Power at 2442 MHz at 1Mbps - Transmitter

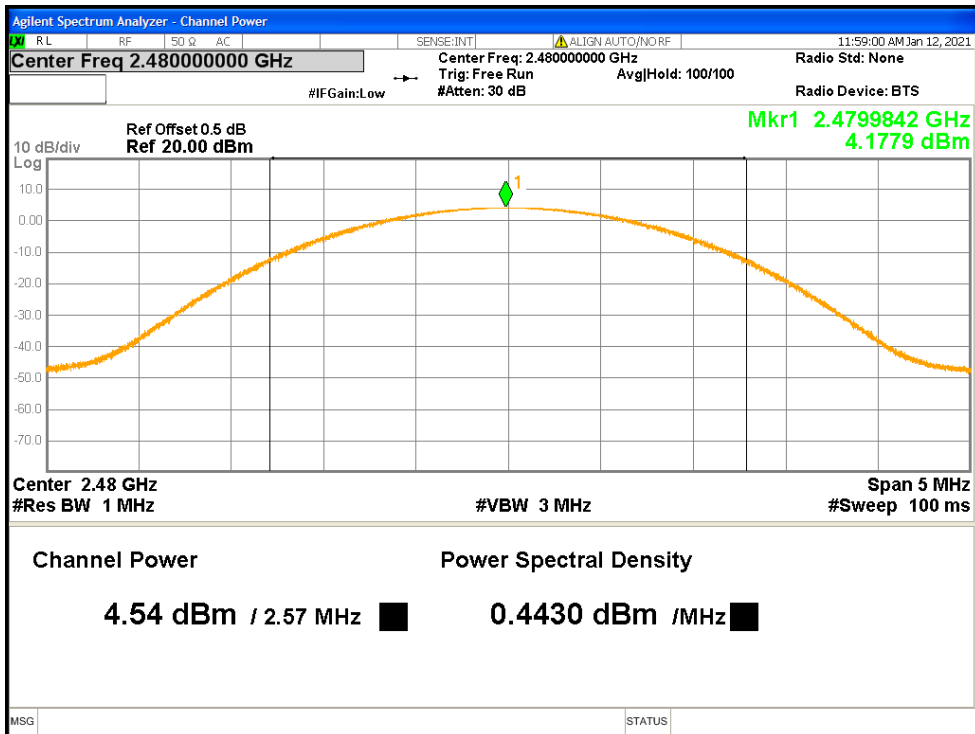


Figure 4: Maximum Conducted Output Power at 2480 MHz at 1Mbps - Transmitter

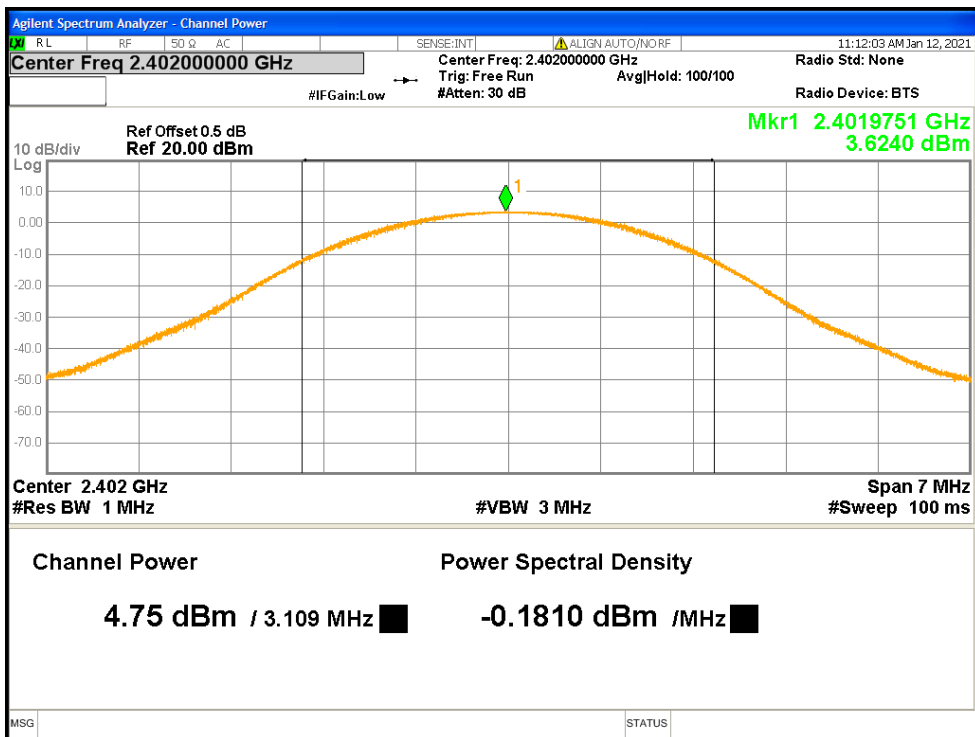


Figure 5: Maximum Conducted Output Power at 2402 MHz at 2Mbps - Transmitter

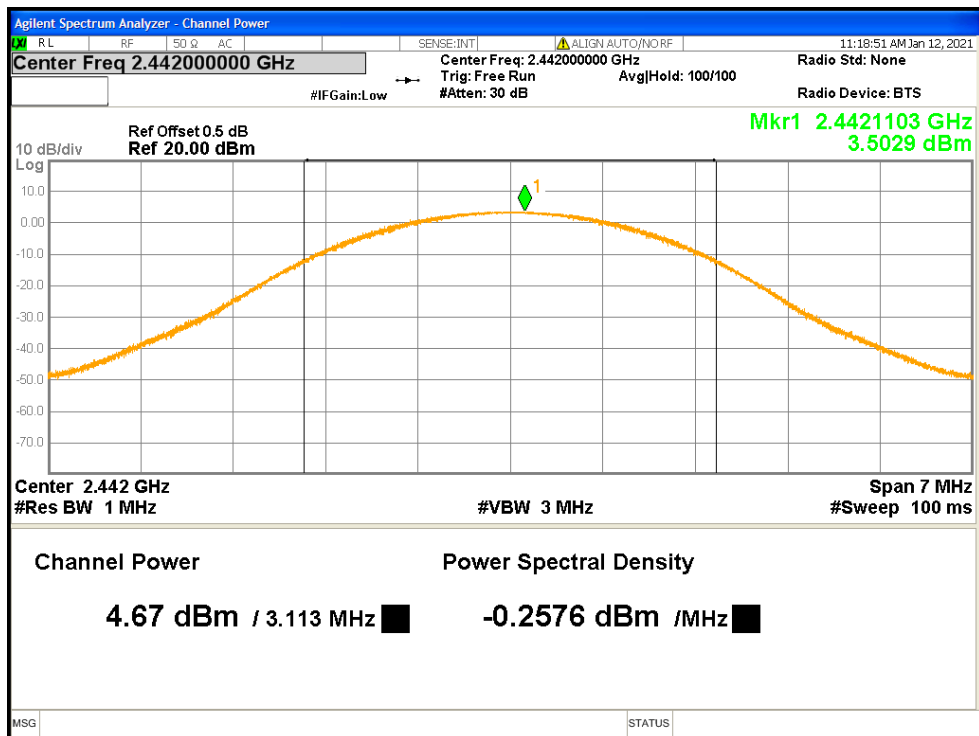


Figure 6: Maximum Conducted Output Power at 2442 MHz at 2Mbps - Transmitter

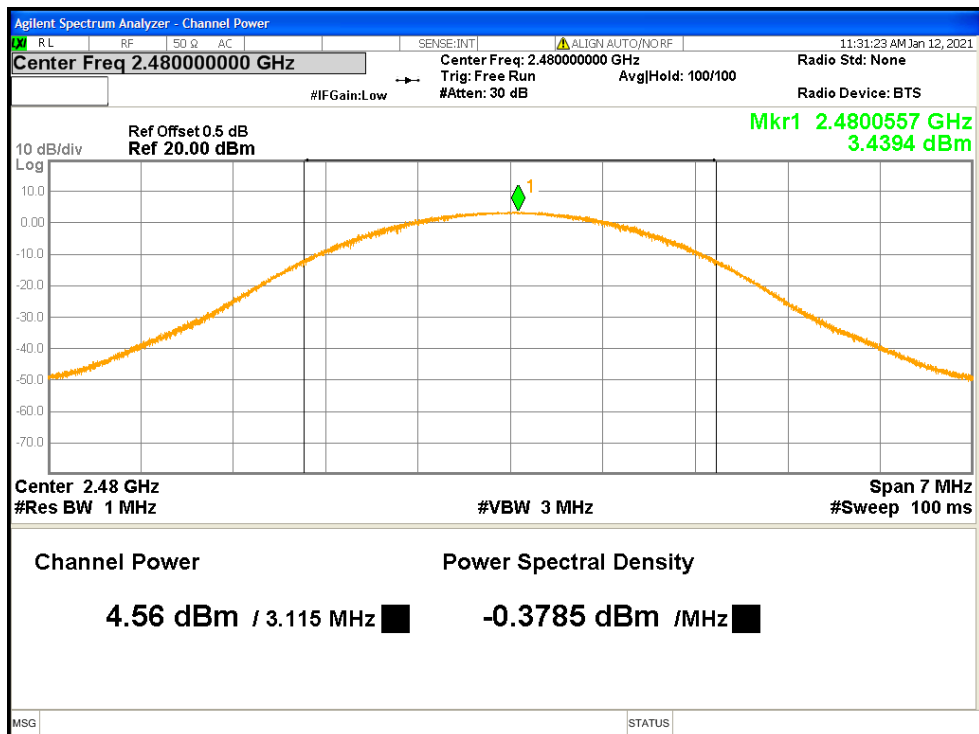


Figure 7: Maximum Conducted Output Power at 2480 MHz at 2Mbps - Transmitter

4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.


The minimum 6 dB bandwidth shall be at least 500 kHz.

The bandwidth shall be at least 500 kHz per Section CFR47 15.247(a2) 2020 and RSS 247 Sect.5.2 (a): 2017

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8.1. The measurement was performed with modulation per CFR47 15.247(a) (2) 2020 and RSS 247 Sect. 5.2 (a) 2017. The preliminary investigation was performed to find the narrowest 6 dB bandwidth for each operational mode at different data rates. This worst finding was performed on 3 channels in each operating frequency range; 2400 MHz to 2483.5 MHz. This test was conducted on 3 channels in each mode of Sample S/N PP #1. The worst sample result indicated below.

Test Setup:

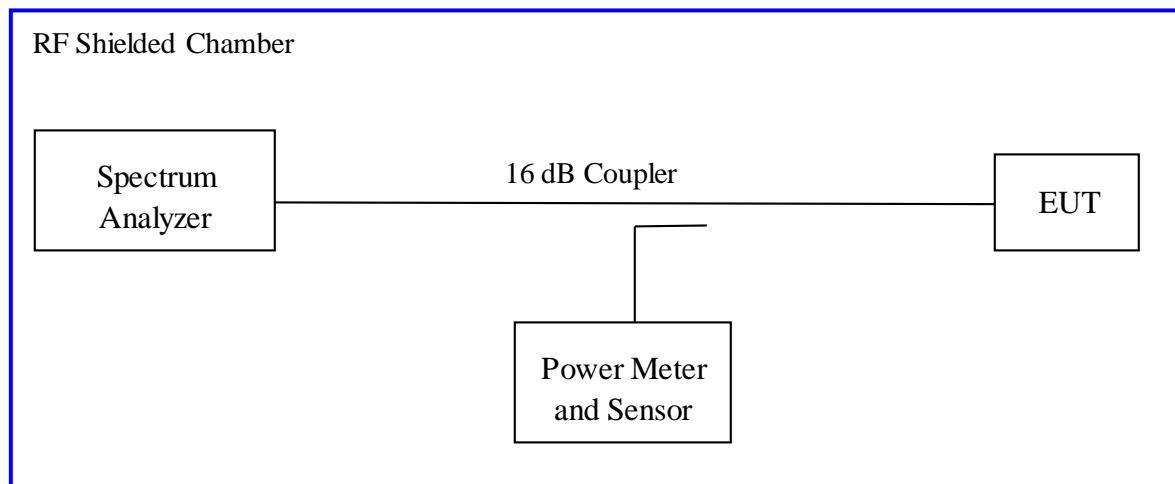

4.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 3: Occupied Bandwidth – Test Results

Test Date: January 12, 2021		Test By: Jeremy Luong		
Test Method: Conducted Measurements		Power Setting: Fixed at 4 dBm		
Antenna Type: Integrated PCB		Max. Antenna Gain: -2.2 dBi		
Operating Mode: Uncorrelated		Signal State: Modulated		
Ambient Temp.: 23 °C		Relative Humidity: 41%		
Bandwidth (MHz) for USB Wireless Audio Transmitter				
Frequency (MHz)	Limit (kHz)	99% Bandwidth	6 dB Bandwidth	Results
2402	500	1.027	0.722	Pass
2442	500	1.029	0.724	Pass
2480	500	1.027	0.722	Pass
Note: The narrower bandwidth was measured at 1 Mbps and 95.11% duty cycle				

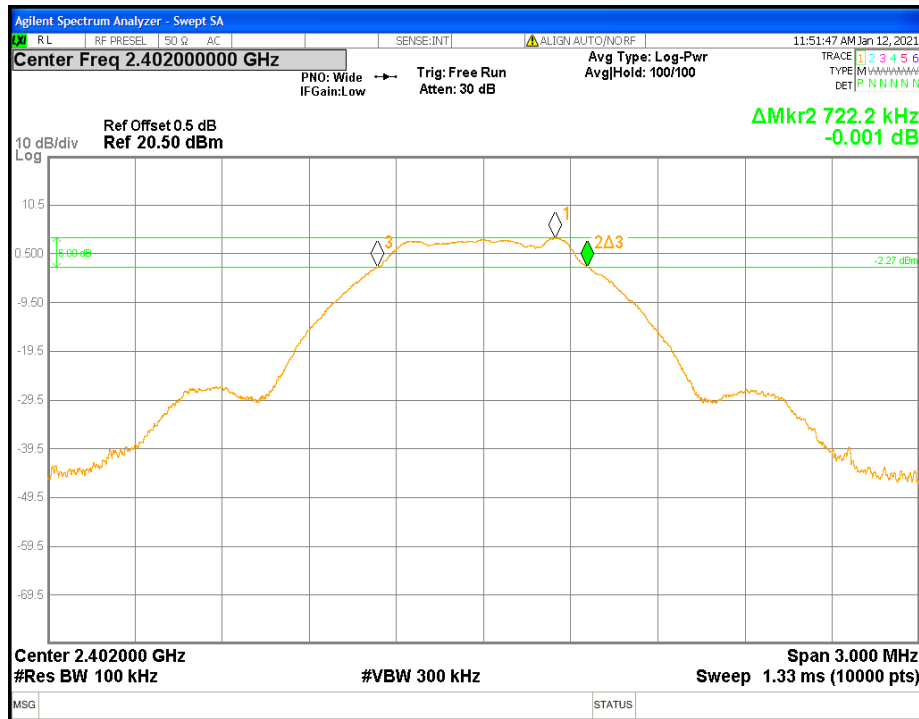


Figure 8: DTS Bandwidth-Transmitter - 2402 MHz

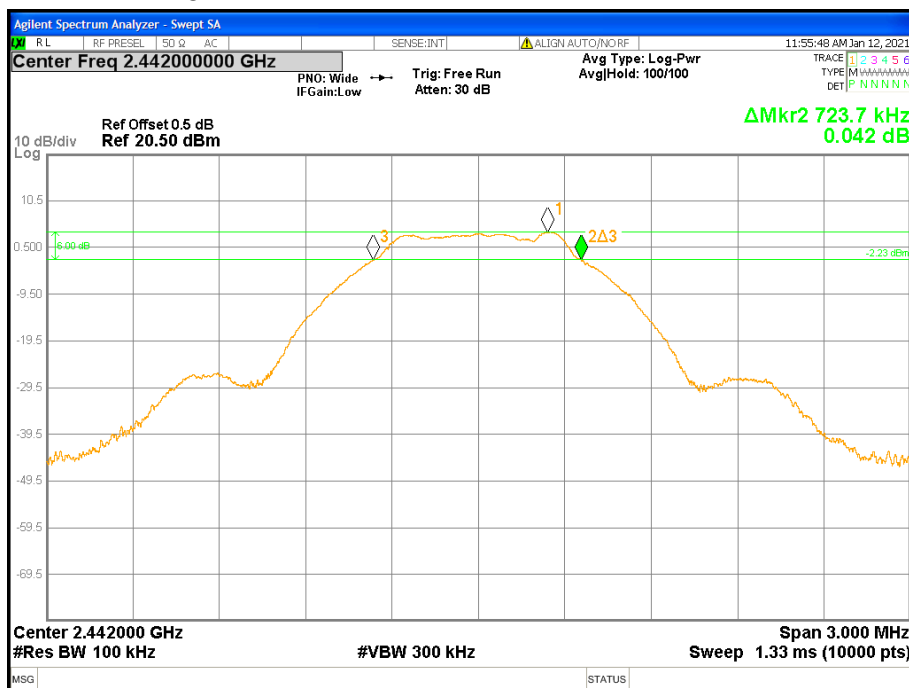


Figure 9: DTS Bandwidth-Transmitter - 2442 MHz



Figure 10: DTS Bandwidth-Transmitter - 2480 MHz

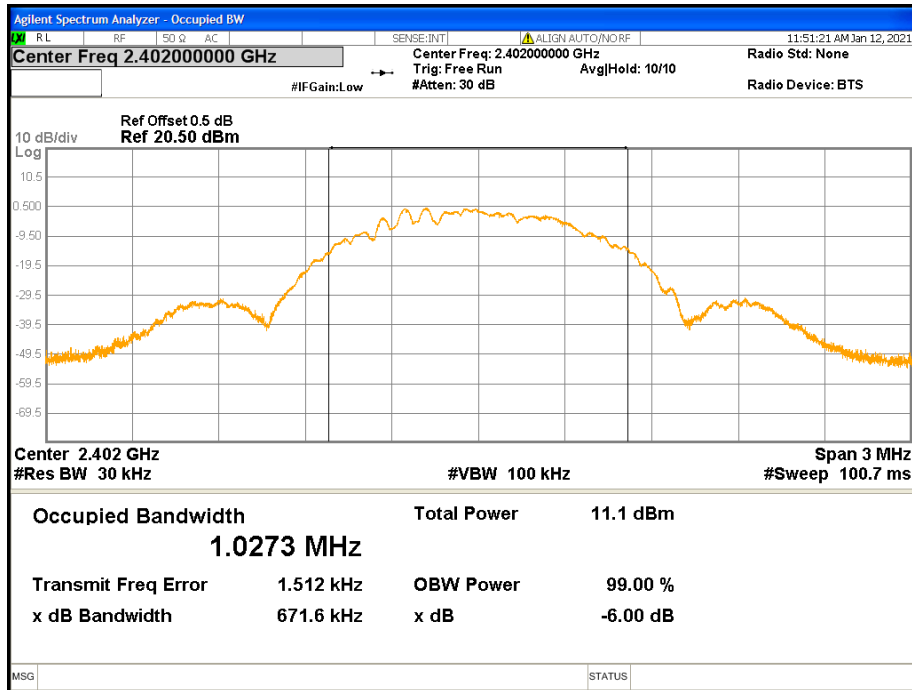


Figure 11: 99% Bandwidth-Transmitter - 2402 MHz

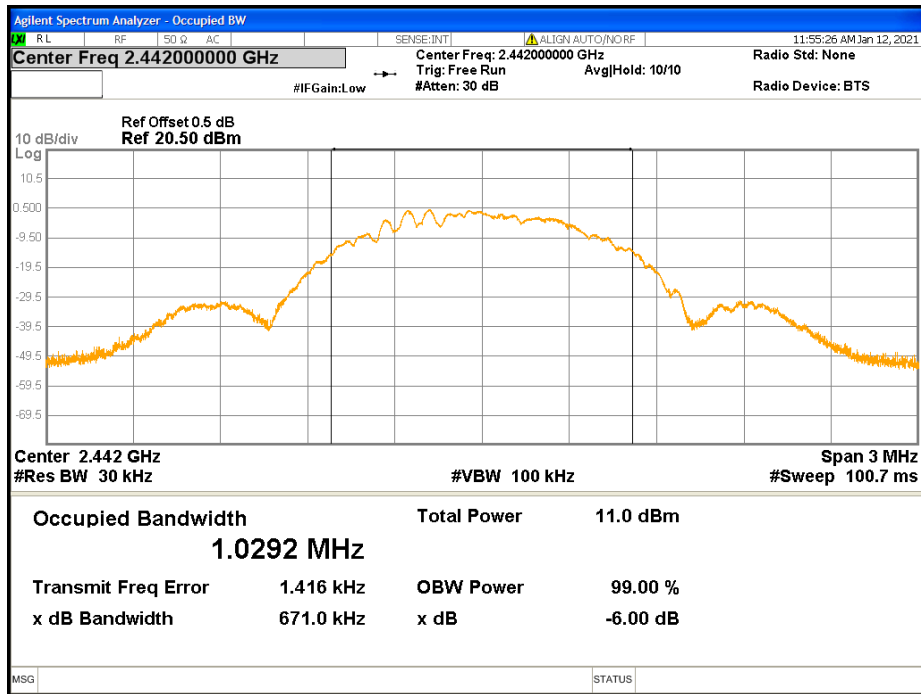


Figure 12: 99% Bandwidth-Transmitter - 2442 MHz

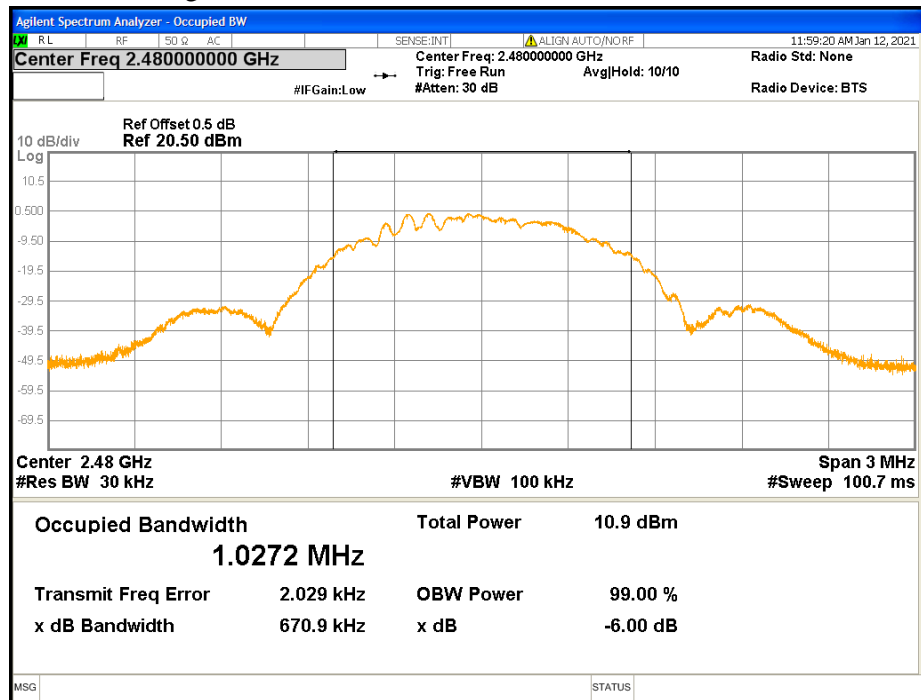


Figure 13: 99% Bandwidth-Transmitter - 2480 MHz


4.3 Peak Power Spectral Density

According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b), the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.3. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b). The pre-evaluation was performed to find the worst modes. The worst findings were conducted on 3 channels in each operating frequency range of 2400 MHz to 2483.5 MHz. This test was conducted on 3 channels of Sample SN PP #1. The worst sample result indicated below.

Test Setup:

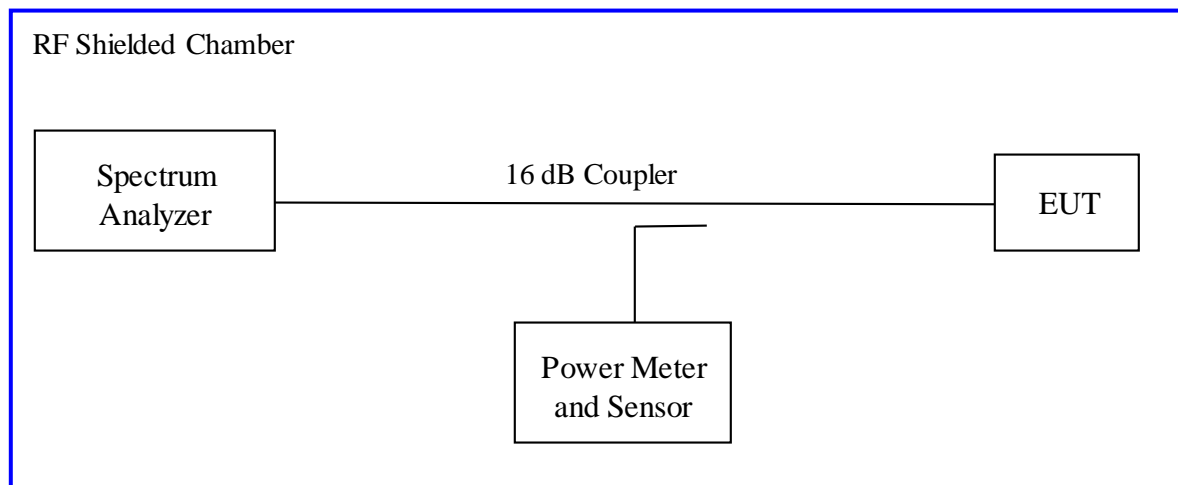

4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Peak Power Spectral Density – Test Results

Test Date: January 12, 2021			Test By: Jeremy Luong			
Test Method: Conducted Measurements			Power Setting: Fixed at 4 dBm			
Antenna Type: Integrated PCB			Max. Antenna Gain: -2.2 dBi			
Operating Mode: Uncorrelated			Signal State: Modulated at 1 Mbps			
Ambient Temp.: 23 °C			Relative Humidity: 41%			
Peak Power Spectral Density						
Freq. (MHz)	Config.	Output [dBm]	CF [dB]	Max. PPSD [dBm]	Limit [dBm]	Margin [dB]
2402	Transmitter	-1.83	-15.02	-16.85	8.00	-24.85
2442	Transmitter	-1.65	-15.02	-16.67	8.00	-24.67
2480	Transmitter	-1.85	-15.02	-16.87	8.00	-24.87
Note: CF accounted for the measured RBW and duty cycle correction. The bandwidth ratio is $10 \cdot \log(3\text{kHz}/100\text{kHz})$ or -15.23 dB. USB Transmitter transmitted at 95.11% duty cycle; 0.21 dB correction.						

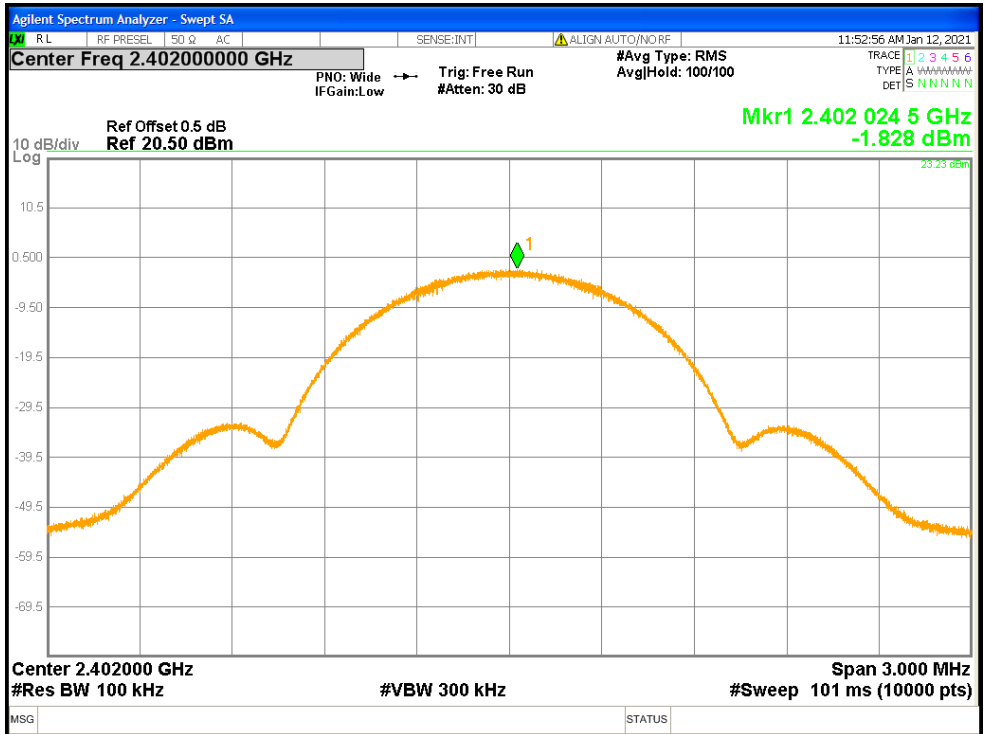


Figure 14: Maximum Power Spectral Density-2402 MHz-Transmitter

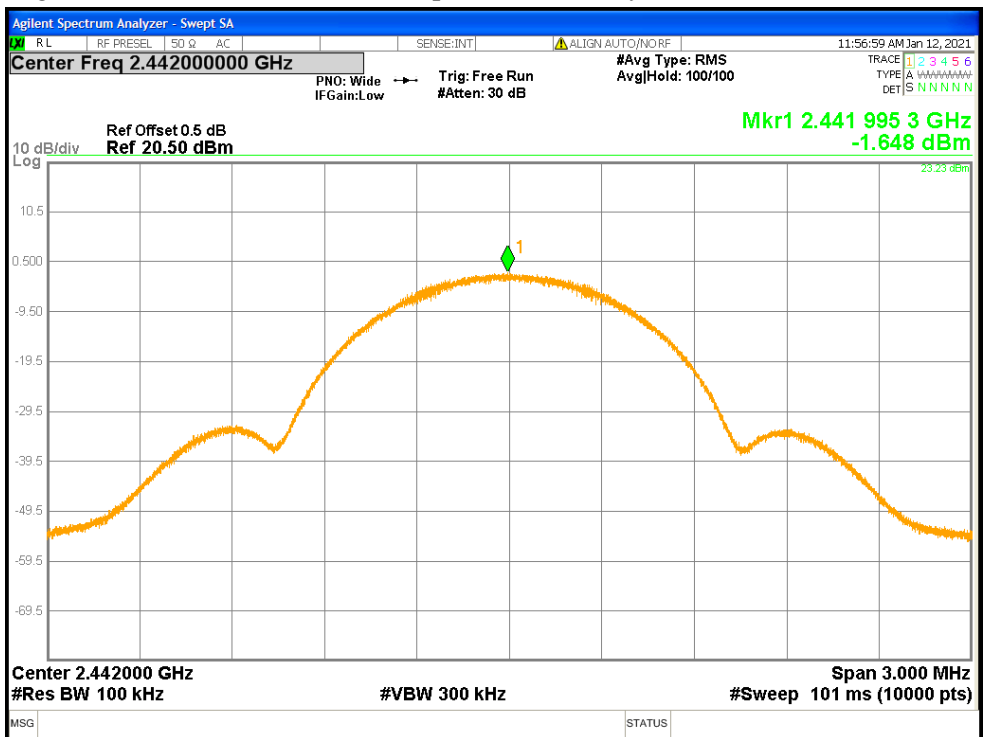


Figure 15: Maximum Power Spectral Density-2442 MHz-Transmitter

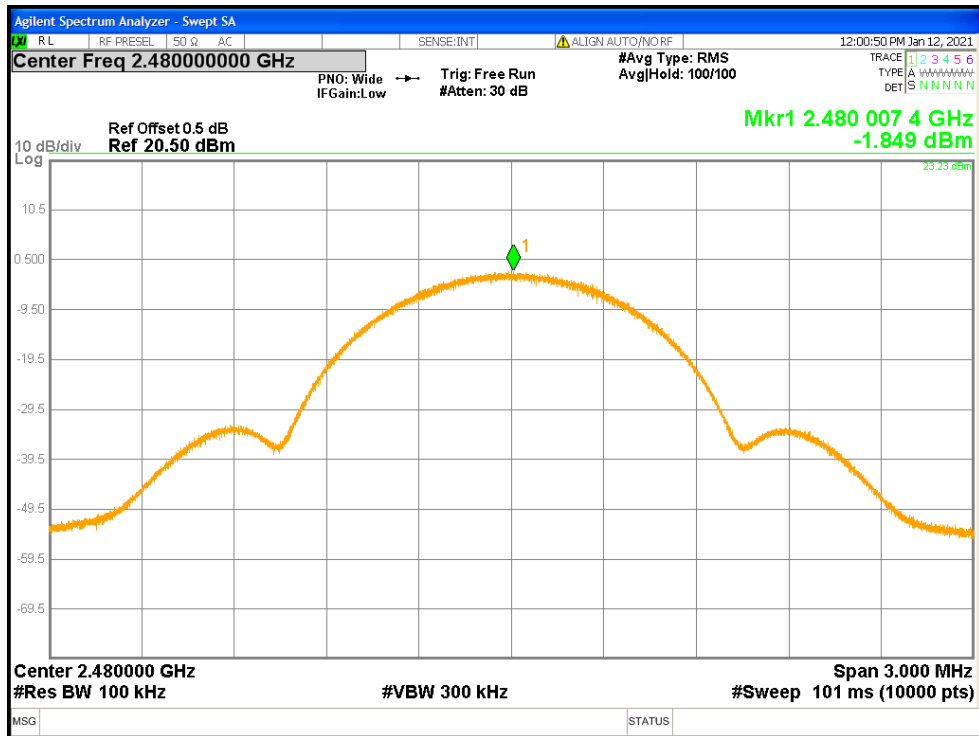


Figure 16: Maximum Power Spectral Density-2480 MHz-Transmitter

4.4 Out of Band Emissions


The setup was identical to RF output power measurement. Intentional radiators operating under the alternative provisions to the general emission limits, must be designed to ensure that the 20 dB or 30 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If the frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Since the transmitter complies with the conducted power limits base on the use of RMS averaging per CFR47 Part 15.247(b)(3), any frequency outside the band of 2400MHz to 2483.5MHz, the power output level must be below 30db from the in-band transmitting signal; CFR 47 Part 15.215, 15.247(d) and RSS-247 Sect.5.5..

4.4.1 Test Method

The conducted method was used to measure the out-of-band emission requirement. The measurement was performed with modulation per CFR47 15.247(4) (d) 2020 and RSS-247 Sect.5.5: 2017. This test was conducted on 3 channels of Sample S/N PP #1. The worst sample result indicated below.

Test Setup:

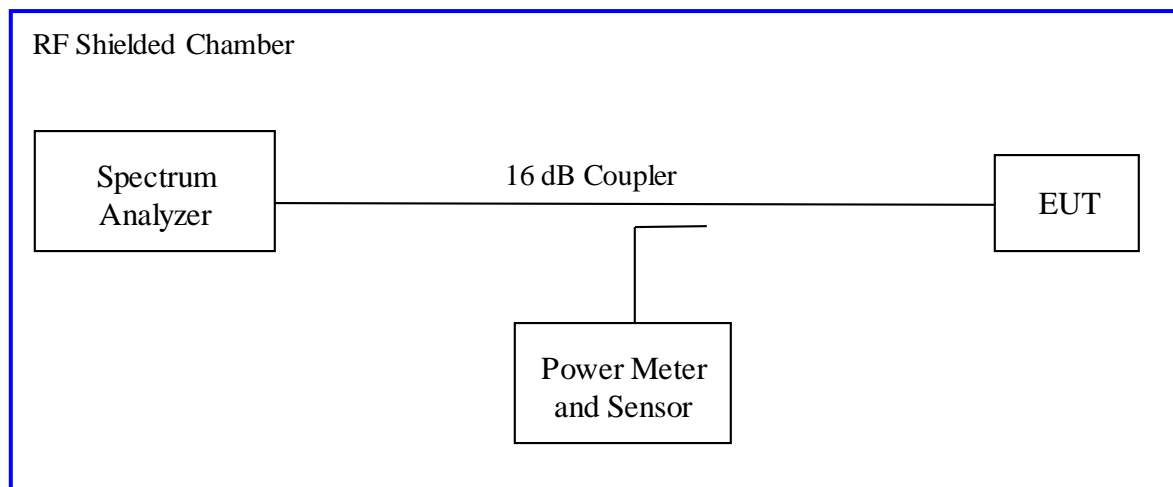

4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Out of Band Emissions – Test Results

Test Date: January 12, 2021		Test By: Jeremy Luong	
Test Method: Conducted Measurements		Power Setting: Fixed at 4 dBm	
Antenna Type: Integrated PCB		Max. Antenna Gain: -2.2 dBi	
Operating Mode: Uncorrelated		Signal State: Modulated at 1 Mbps	
Ambient Temp.: 23 °C		Relative Humidity: 41%	
Out of Band Results for USB Wireless Audio Transmitter			
Operating Channel	Out of Band Level (dBm)	30 dBc Level (dBm)	Margin (dB)
2402 MHz	-46.19	-26.01	-20.18
2442 MHz	-45.41	-25.89	-19.52
2480 MHz	-45.29	-26.26	-19.03
<p>Note: dBc is defined as the level below the main carrier. The band-edge level must be lower than the 30dBc level. The maximum out of band emission on each individual output is at least 30 dB below the maximum in-band PSD on that output. (*) The band-edge is compared to the highest -30dBc level of the test mode.</p>			

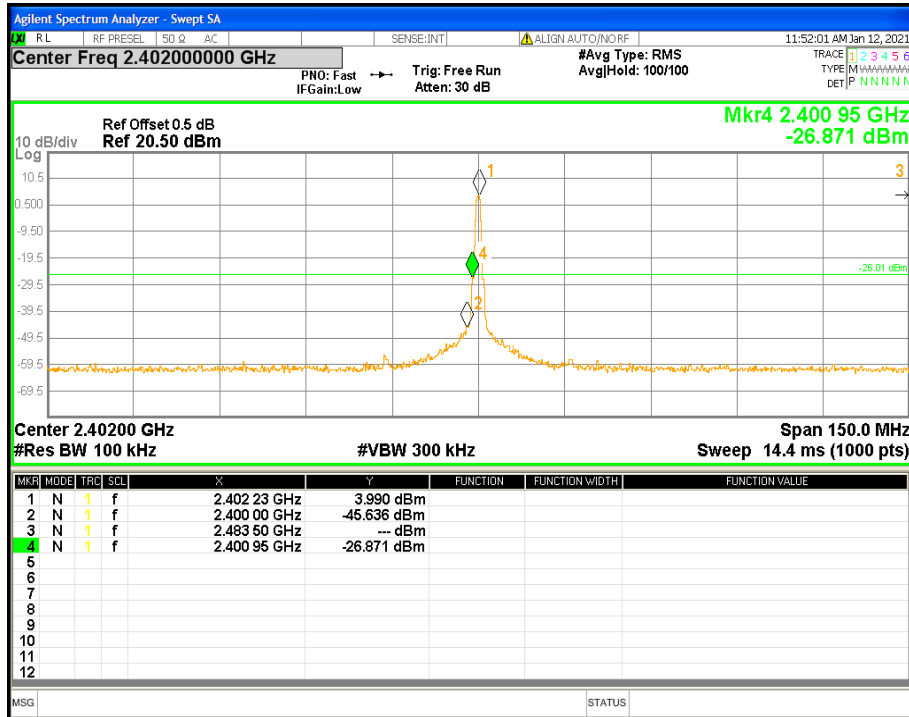


Figure 17: Conducted Band Edge at 2402 MHz-Transmitter

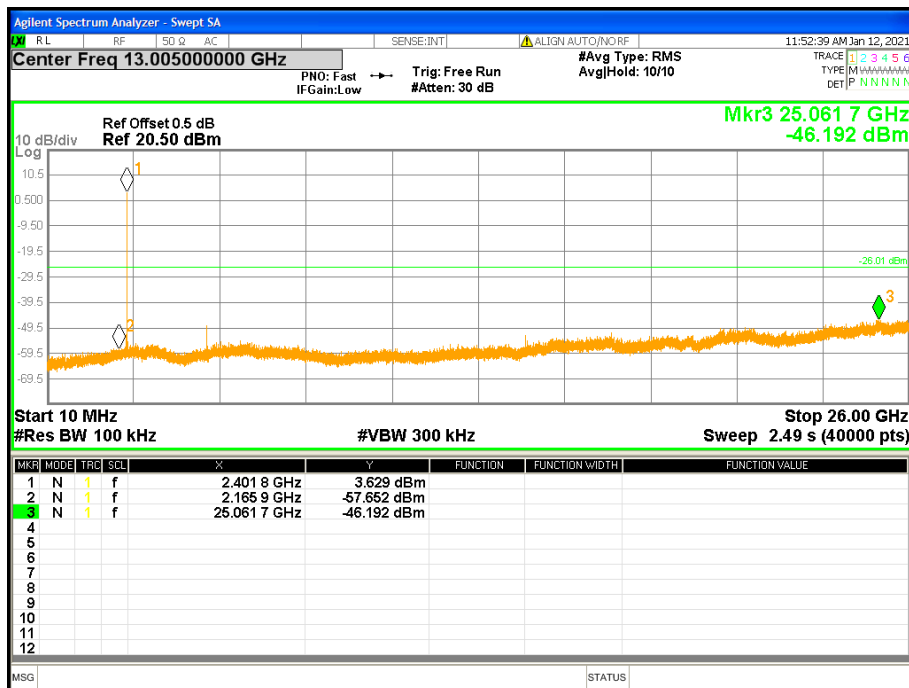


Figure 18: Out of band Emission at 2402 MHz-Transmitter

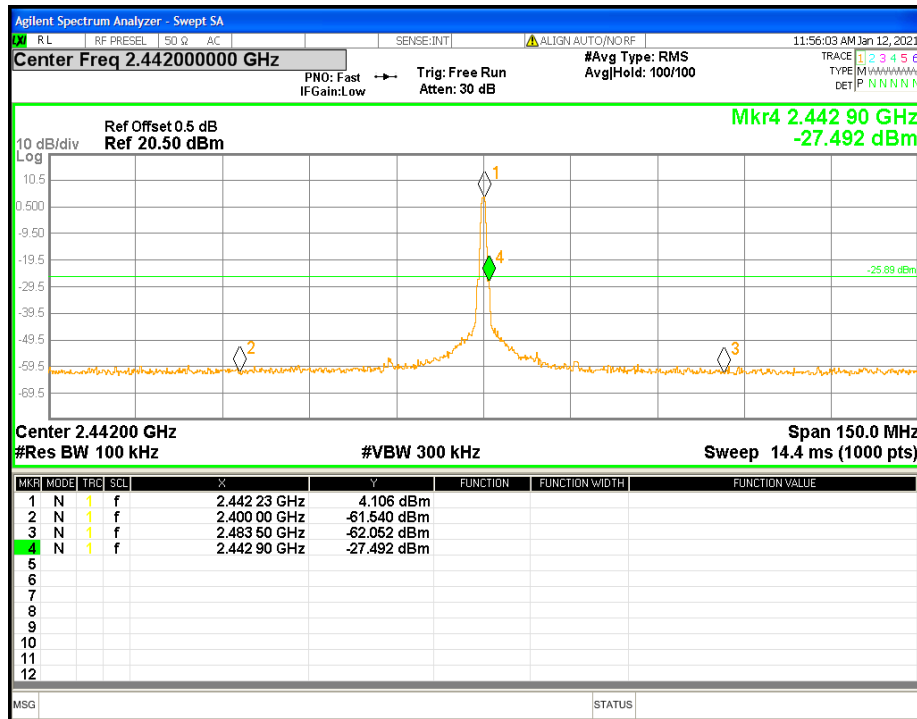


Figure 19: Conducted Band Edge at 2442 MHz-Transmitter

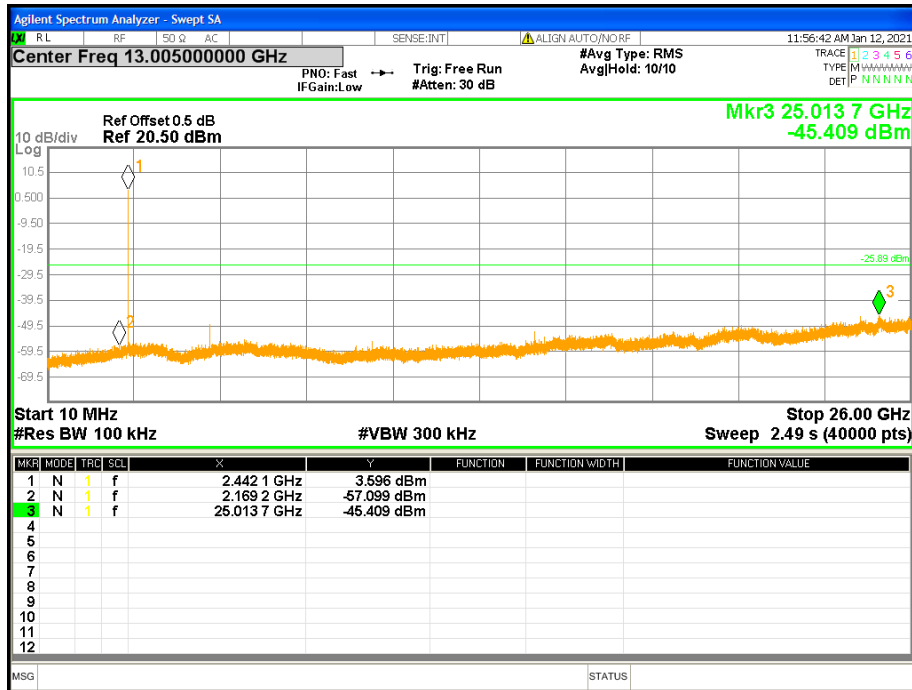


Figure 20: Out of band Emission at 2442 MHz-Transmitter

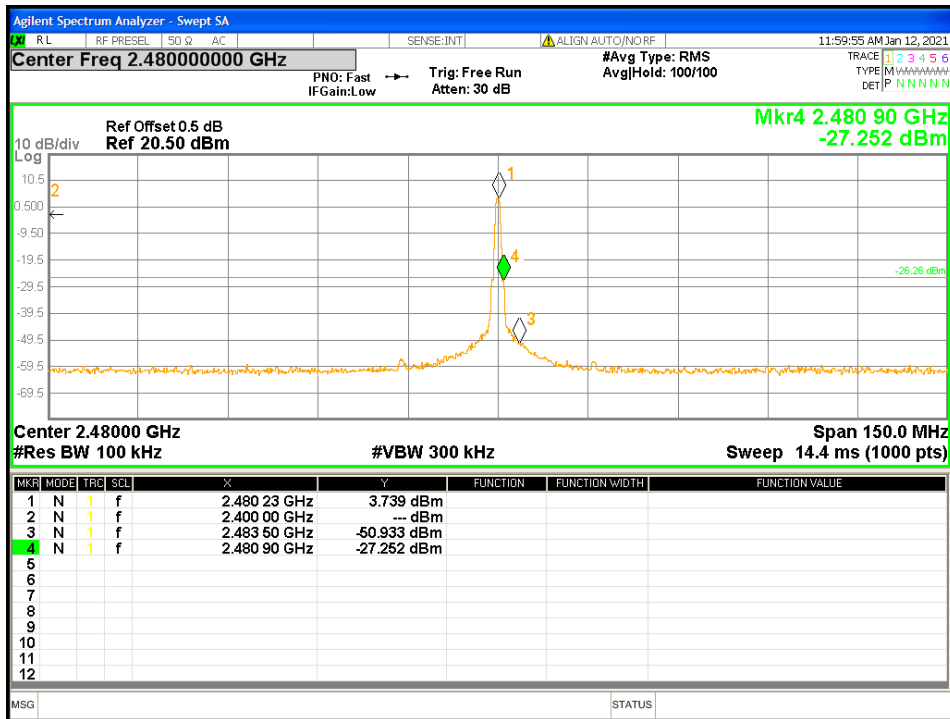


Figure 21: Conducted Band Edge at 2480 MHz-Transmitter

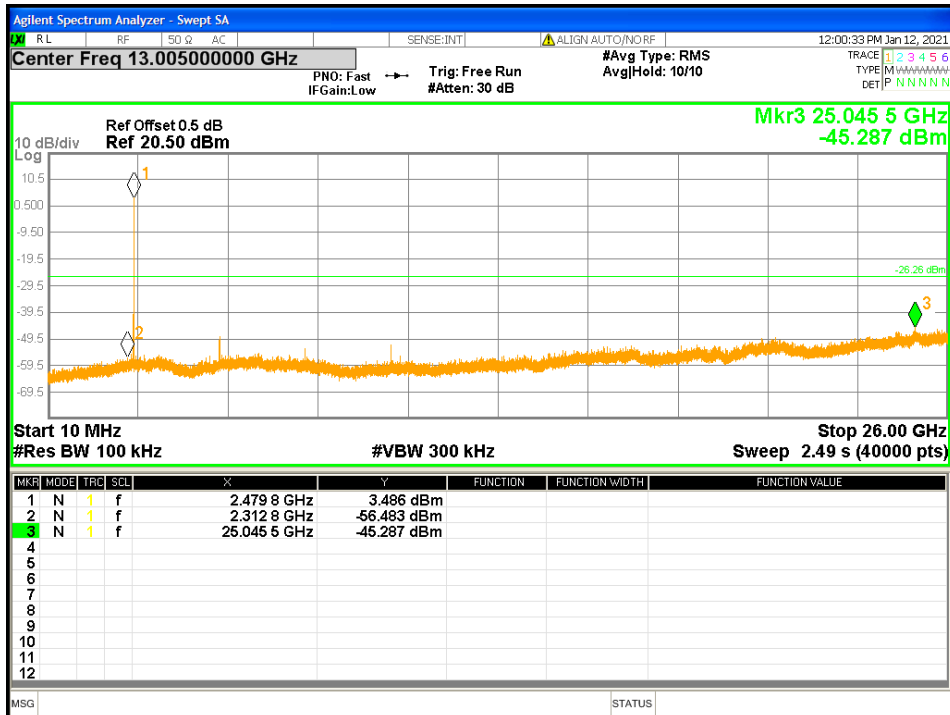


Figure 22: Out of band Emission at 2480 MHz-Transmitter

4.5 Transmit Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-Gen Sect. 8.9.

4.5.1 Test Methodology

4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pres-scans were performed to determine the worst case configuration for data rate; 1 Mbps and 2 Mbps

4.5.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.


The final scans performed on the worst axis, Y-Axis, for three operating channels in each operating mode;

2402 MHz, 2442 MHz, and 2480 MHz

4.5.1.3 Deviations

None.

Test Setup:

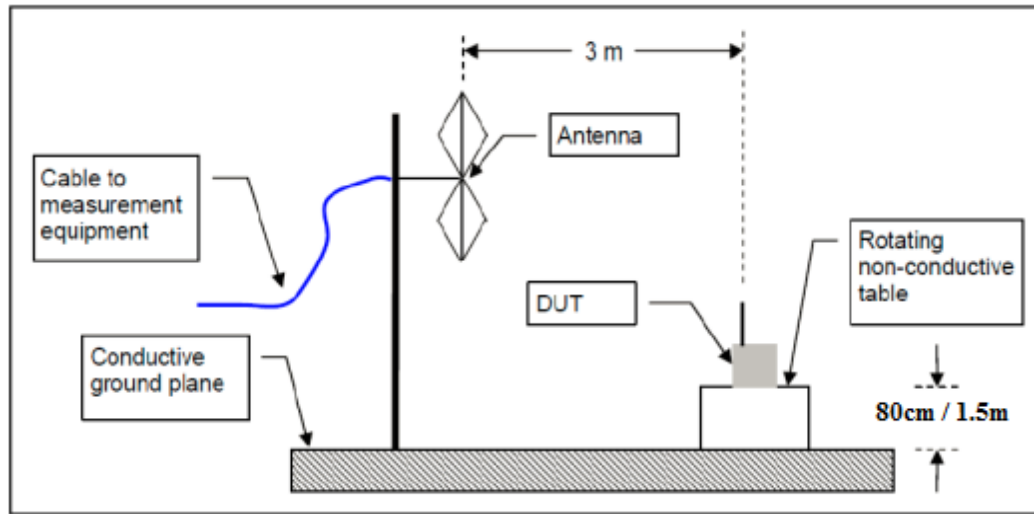

4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2020 and RSS Gen Sect. 8.10: 2019.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

All harmonics and spurious emission which are outside of the restricted band shall be 20dB below the in-band emission.

4.5.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 6: Transmit Spurious Emission at Band-Edge Requirements

Test Date: February 10, 2021					Test By: Jeremy Luong					
Test Method: Radiated Measurements					Power Setting: Fixed at 4dBm					
Antenna Type: Integrated PCB					Max. Antenna Gain: -2.2 dBi					
Operating Mode: Uncorrelated					Signal State: Modulated at 2 Mbps					
Ambient Temp.: 23 °C					Relative Humidity: 35%					
Band-Edge Results										
Freq.	Edge Freq.	Raw	CF	Level	Det.	Pol	Ant.	Tbl.	Limit	Margin
MHz	MHz	dBuV/m	dB	dBuV/m	Pk/Avg	V/H	cm	Deg	dBuV/m	dB
2402	2401.95*	70.05	30.09	100.14	Pk	V	211	337		
2402	2401.95*	67.74	30.09	97.83	Ave	V	211	337		
2402	2389.51	30.24	30.00	60.24	Pk	V	218	304	74.00	-13.76
2402	2389.51	14.71	30.00	44.71	Ave	V	218	304	54.00	-9.29
2402	2401.95*	71.00	30.09	101.09	Pk	H	203	45		
2402	2401.95*	68.74	30.09	98.83	Ave	H	203	45		
2402	2390.00	16.82	30.01	46.83	Pk	H	276	228	74.00	-27.17
2402	2390.00	-2.79	30.01	27.22	Ave	H	276	228	54.00	-26.78
2480	2479.38*	69.49	30.15	99.64	Pk	V	263	333		
2480	2479.38*	62.67	30.15	92.82	Ave	V	263	333		
2480	2483.50	31.97	30.15	62.12	Pk	V	155	24	74.00	-11.88
2480	2483.50	16.42	30.15	46.57	Ave	V	155	24	54.00	-7.43
2480	2480.49*	70.65	30.15	100.80	Pk	H	227	44		
2480	2480.49*	64.91	30.15	95.06	Ave	H	227	44		
2480	2483.50	32.01	30.15	62.16	Pk	H	220	48	74.00	-11.84
2480	2483.50	16.69	30.15	46.84	Ave	H	220	48	54.00	-7.16
<p>Note: The emissions were measured at the adjacent restricted band of the fundamental signal. All the band-edge measurements met the restricted band requirements of CFR47 15.205 Band-edge measurement plots use a wider span than 2 MHz to evaluate additional spectrum bands for in-band leakage and spurious emission. (*) Fundamental/ Inband emission.</p>										

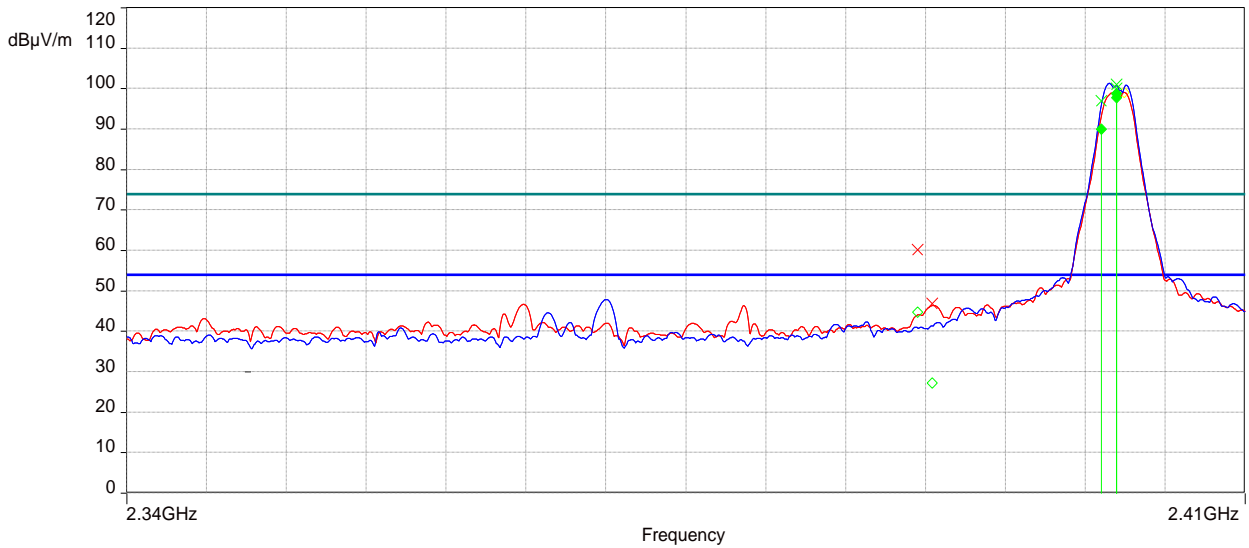


Figure 23: Band-edge-2402 MHz

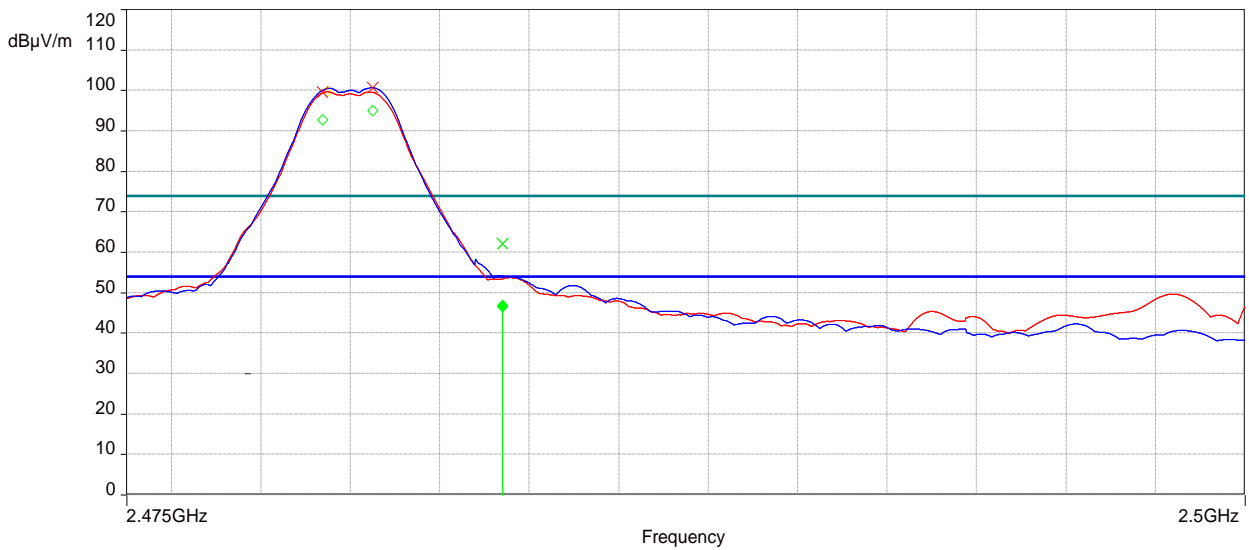


Figure 24: Band-edge-2480 MHz

Note: Blue Trace = Horizontal Polarization; Red Trace = Vertical Polarization

SOP 1 Radiated Emissions						Tracking # US21BKL7.001 Page 1 of 6					
EUT Name	USB Wireless Audio Transmitter					Date	January 29, 2021				
EUT Model	SYN Pro Air TX					Temp / Hum in	23°C / 38%rh				
EUT Serial	PP #2					Temp / Hum out	N/A				
EUT Config.	1 Mbps on Y-Axis					Line AC / Freq	5.0 VDC				
Standard	CFR47 Part 15 Subpart C					RBW / VBW	See Note				
Dist/Ant Used	3m / JB3 and EMCO 6502					Performed by	Jeremy Luong				
Freq.	Raw	Corrd'	Level	Det.	Pol.	Hght.	Azt	Limit	Margin	Result	
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB		
9 kHz to 1 GHz, Transmitted Data at 2402 MHz											
1.58	20.21	12.65	32.86	QP	Y-Axis	100	334	63.65	-30.79	Pass	
3.45	26.88	12.73	39.61	QP	Y-Axis	100	99	69.50	-29.89	Pass	
30.84	20.31	-4.41	15.90	QP	V	227	332	40.00	-24.10	Pass	
79.63	33.75	-17.55	16.20	QP	V	110	245	40.00	-23.80	Pass	
84.07	34.58	-17.86	16.72	QP	V	114	99	40.00	-23.28	Pass	
96.00	39.00	-16.20	22.80	QP	V	108	6	43.50	-20.70	Pass	
126.88	25.63	-11.03	14.60	QP	V	153	85	43.50	-28.90	Pass	
132.00	27.59	-11.21	16.38	QP	V	110	323	43.50	-27.12	Pass	
Spec Margin = Level - Limit, Level = Raw + Cbl+ CF ± Uncertainty											
CF= Amp Gain + ANT Factor											
Combined Standard Uncertainty $U_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = kU_c(y)$ $k = 2$ for 95% confidence											
Note: The worst case emission was observed on Channel 2402 MHz.											


SOP 1 Radiated Emissions						Tracking # US21BKL7.001 Page 2 of 6				
EUT Name		USB Wireless Audio Transmitter				Date		January 29, 2021		
EUT Model		SYN Pro Air TX				Temp / Hum in		23°C / 38%rh		
EUT Serial		PP #2				Temp / Hum out		N/A		
EUT Config.		Transmitter on Vertical Position				Line AC / Freq		5.0 VDC		
Standard		CFR47 Part 15 Subpart C				RBW / VBW		1 MHz / 3 MHz		
Dist/Ant Used		3m / EMCO-3115, 1m / ComPower-AHA840				Performed by		Jeremy Luong		
Freq	Raw	Corrd ²	Level	Det	Pol	Hght	Azt	Limit	Margin	Comment
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
Transmitted Data at 2402 MHz										
1085.23	74.59	-33.69	40.90	Pk	V	101	5	74.00	-33.10	Spurious
1085.23	49.46	-33.69	15.77	Ave	V	101	5	54.00	-38.23	Spurious
4802.97	64.40	-22.71	41.69	Pk	V	231	162	74.00	-32.31	Harmonics
4802.97	52.13	-22.71	29.42	Ave	V	231	162	54.00	-24.58	Harmonics
9605.95	67.85	-15.33	52.52	Pk	V	126	220	74.00	-21.48	Harmonics
9605.95	57.13	-15.33	41.80	Ave	V	126	220	54.00	-12.20	Harmonics
9609.95	67.10	-15.36	51.74	Pk	H	229	226	74.00	-22.26	Harmonics
9609.95	56.01	-15.36	40.65	Ave	H	229	226	54.00	-13.35	Harmonics
1085.23	74.59	-33.69	40.90	Pk	V	101	5	74.00	-33.10	Spurious
1085.23	49.46	-33.69	15.77	Ave	V	101	5	54.00	-38.23	Spurious
4802.97	64.40	-22.71	41.69	Pk	V	231	162	74.00	-32.31	Harmonics
4802.97	52.13	-22.71	29.42	Ave	V	231	162	54.00	-24.58	Harmonics
9605.95	67.85	-15.33	52.52	Pk	V	126	220	74.00	-21.48	Harmonics
9605.95	57.13	-15.33	41.80	Ave	V	126	220	54.00	-12.20	Harmonics
9609.95	67.10	-15.36	51.74	Pk	H	229	226	74.00	-22.26	Harmonics
9609.95	56.01	-15.36	40.65	Ave	H	229	226	54.00	-13.35	Harmonics
19219.90	48.38	-11.79	36.59	Pk	H	120	288	74.00	-37.41	Harmonics
19219.90	37.20	-11.79	25.41	Ave	H	120	288	54.00	-28.59	Harmonics
Transmitted Data at 2442 MHz										
1106.66	72.82	-33.56	39.26	Pk	V	209	156	74.00	-34.74	Spurious
1106.66	50.01	-33.56	16.45	Ave	V	209	156	54.00	-37.55	Spurious
4884.98	69.60	-22.38	47.22	Pk	V	111	162	74.00	-26.78	Harmonics
4884.98	59.62	-22.38	37.24	Ave	V	111	162	54.00	-16.76	Harmonics
9765.95	68.48	-15.14	53.34	Pk	V	296	20	74.00	-20.66	Harmonics
9765.95	57.82	-15.14	42.68	Ave	V	296	20	54.00	-11.32	Harmonics
9769.95	68.49	-15.17	53.32	Pk	H	296	295	74.00	-20.68	Harmonics
9769.95	57.77	-15.17	42.60	Ave	H	296	295	54.00	-11.40	Harmonics
1106.66	72.82	-33.56	39.26	Pk	V	209	156	74.00	-34.74	Spurious
1106.66	50.01	-33.56	16.45	Ave	V	209	156	54.00	-37.55	Spurious
4884.98	69.60	-22.38	47.22	Pk	V	111	162	74.00	-26.78	Harmonics
4884.98	59.62	-22.38	37.24	Ave	V	111	162	54.00	-16.76	Harmonics
9765.95	68.48	-15.14	53.34	Pk	V	296	20	74.00	-20.66	Harmonics
9765.95	57.82	-15.14	42.68	Ave	V	296	20	54.00	-11.32	Harmonics

9769.95	68.49	-15.17	53.32	Pk	H	296	295	74.00	-20.68	Harmonics
9769.95	57.77	-15.17	42.60	Ave	H	296	295	54.00	-11.40	Harmonics
19539.90	48.84	-11.00	37.84	Pk	H	156	276	74.00	-36.16	Harmonics
19539.90	37.60	-11.00	26.60	Ave	H	156	276	54.00	-27.40	Harmonics
Transmitted Data at 2480 MHz										
1098.61	71.50	-33.52	37.98	Pk	V	164	48	74.00	-36.02	Spurious
1098.61	49.90	-33.52	16.38	Ave	V	164	48	54.00	-37.62	Spurious
4960.98	65.84	-22.46	43.38	Pk	V	104	172	74.00	-30.62	Harmonics
4960.98	54.28	-22.46	31.82	Ave	V	104	172	54.00	-22.18	Harmonics
9917.94	68.01	-14.65	53.36	Pk	V	108	212	74.00	-20.64	Harmonics
9917.94	57.40	-14.65	42.75	Ave	V	108	212	54.00	-11.25	Harmonics
9921.95	68.70	-14.67	54.03	Pk	V	110	215	74.00	-19.97	Harmonics
9921.95	57.61	-14.67	42.94	Ave	V	110	215	54.00	-11.06	Harmonics
9921.95	69.17	-14.67	54.50	Pk	H	290	347	74.00	-19.50	Harmonics
9921.95	58.36	-14.67	43.69	Ave	H	290	347	54.00	-10.31	Harmonics
1098.61	71.50	-33.52	37.98	Pk	V	164	48	74.00	-36.02	Spurious
1098.61	49.90	-33.52	16.38	Ave	V	164	48	54.00	-37.62	Spurious
4960.98	65.84	-22.46	43.38	Pk	V	104	172	74.00	-30.62	Harmonics
4960.98	54.28	-22.46	31.82	Ave	V	104	172	54.00	-22.18	Harmonics
9917.94	68.01	-14.65	53.36	Pk	V	108	212	74.00	-20.64	Harmonics
9917.94	57.40	-14.65	42.75	Ave	V	108	212	54.00	-11.25	Harmonics
9921.95	68.70	-14.67	54.03	Pk	V	110	215	74.00	-19.97	Harmonics
9921.95	57.61	-14.67	42.94	Ave	V	110	215	54.00	-11.06	Harmonics
9921.95	69.17	-14.67	54.50	Pk	H	290	347	74.00	-19.50	Harmonics
9921.95	58.36	-14.67	43.69	Ave	H	290	347	54.00	-10.31	Harmonics
19835.89	48.32	-10.86	37.46	Pk	H	152	277	74.00	-36.54	Harmonics
19835.89	37.29	-10.86	26.43	Ave	H	152	277	54.00	-27.57	Harmonics
Spec Margin = Level - Limit, Level = Raw + Cbl+ CF ± Uncertainty										
CF= Amp Gain + ANT Factor										
Combined Standard Uncertainty $u_c(y) = \pm 3.2\text{dB}$ Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence										
Notes: All emissions passed the spurious emission limit.										
(*) Non-restricted band emission										

SOP 1 Radiated Emissions

Tracking # US21BKL7.001 Page 3 of 6

EUT Name	USB Wireless Audio Transmitter	Date	January 29, 2021
EUT Model	SYN Pro Air TX	Temp / Hum in	23°C / 38%rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Transmitter on Vertical Position	Line AC / Freq	5.0 VDC
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m / JB3 & 6502	Date	Jeremy Luong

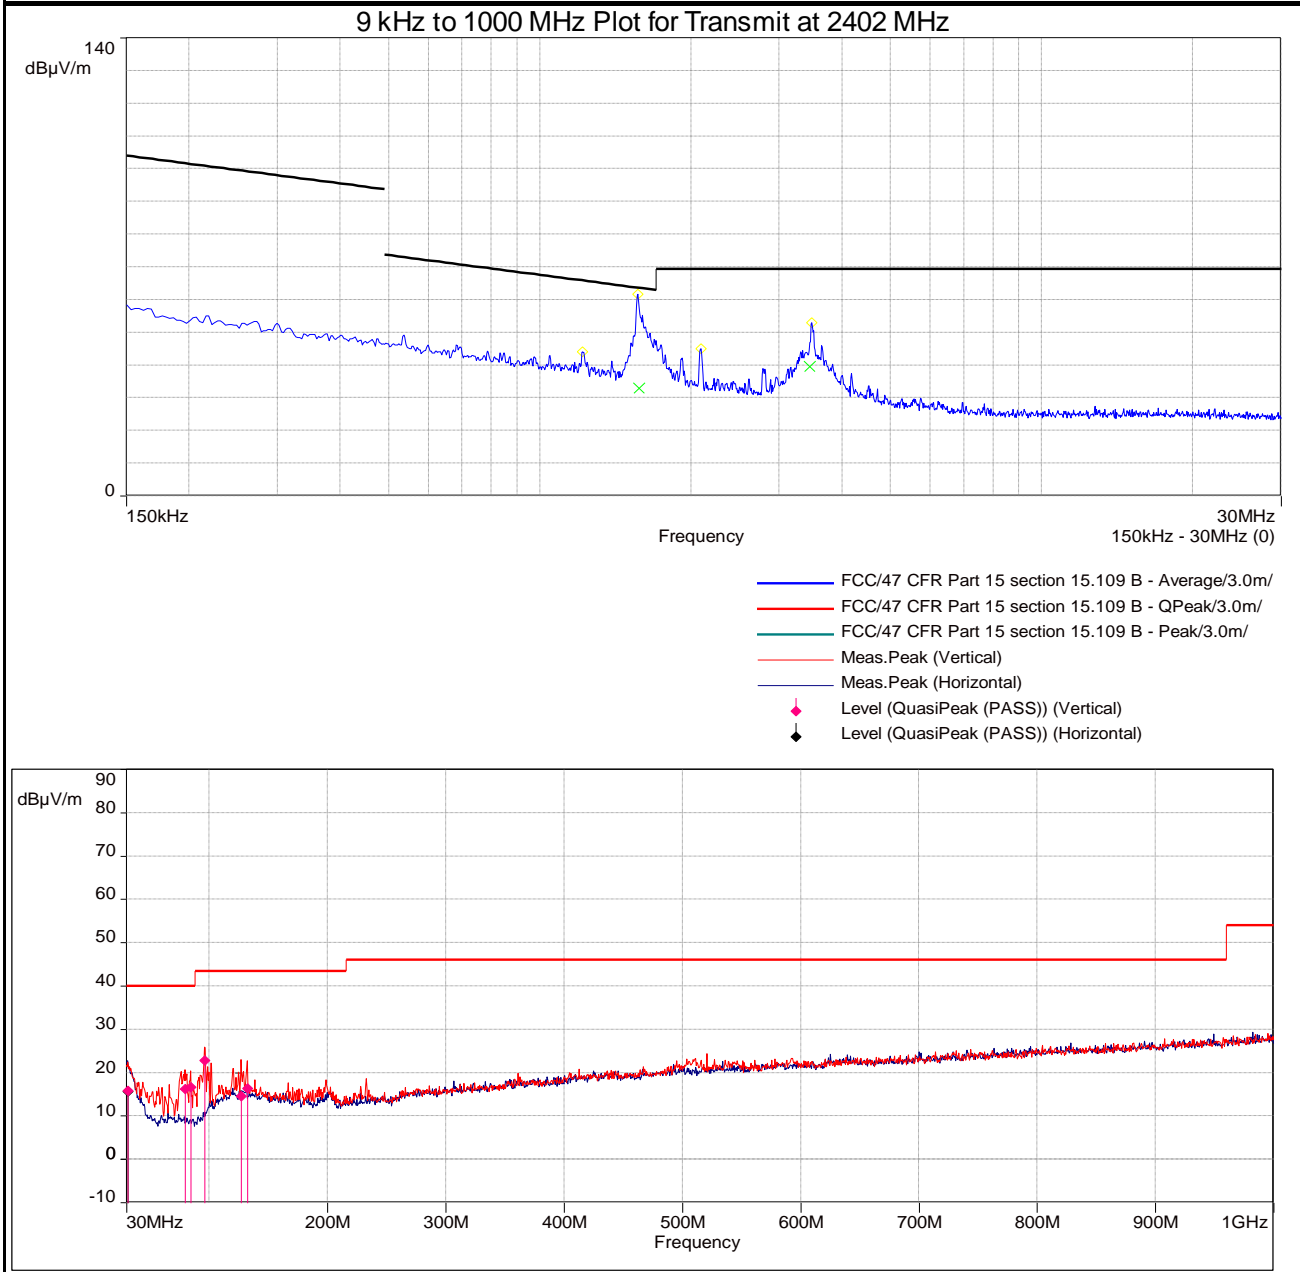


Notes: None.

SOP 1 Radiated Emissions

Tracking # US21BKL7.001 Page 4 of 6

EUT Name	USB Wireless Audio Transmitter	Date	January 29, 2021
EUT Model	SYN Pro Air TX	Temp / Hum in	23°C / 38%rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Transmitter on Vertical Position	Line AC / Freq	5.0 VDC
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m / EMCO-3115, 1m / ComPower-AHA840	Performed by	Jeremy Luong

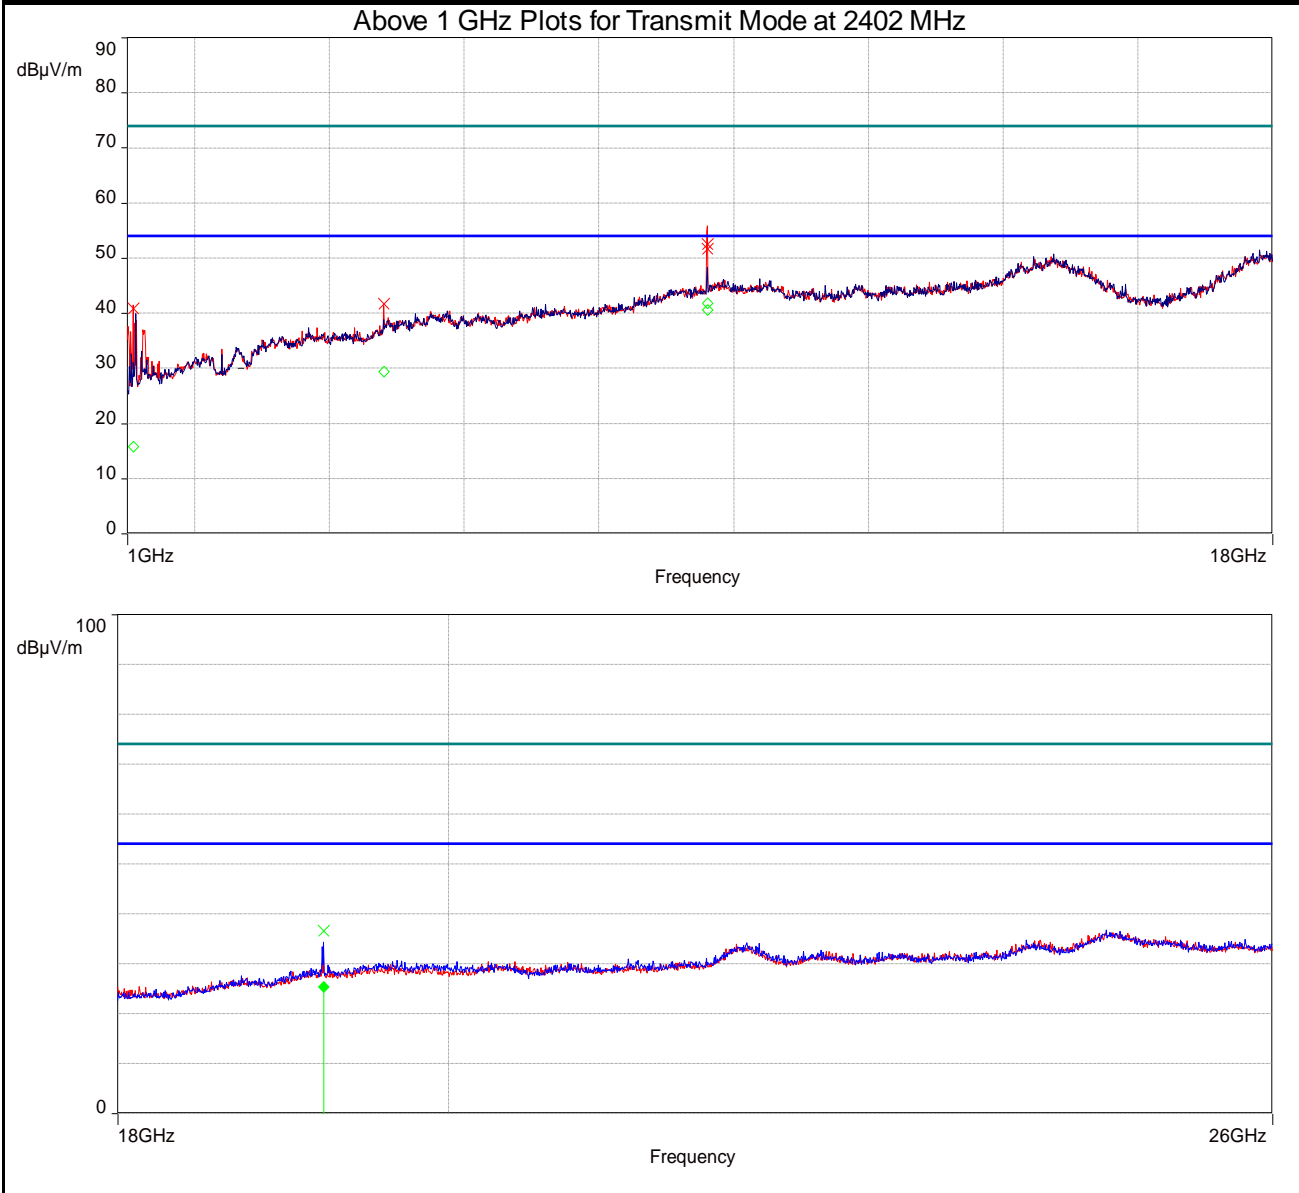


Notes: None.

SOP 1 Radiated Emissions

Tracking # US21BKL7.001 Page 5 of 6

EUT Name	USB Wireless Audio Transmitter	Date	January 29, 2021
EUT Model	SYN Pro Air TX	Temp / Hum in	23°C / 38%rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Transmitter on Vertical Position	Line AC / Freq	5.0 VDC
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m / EMCO-3115, 1m / ComPower-AHA840	Performed by	Jeremy Luong

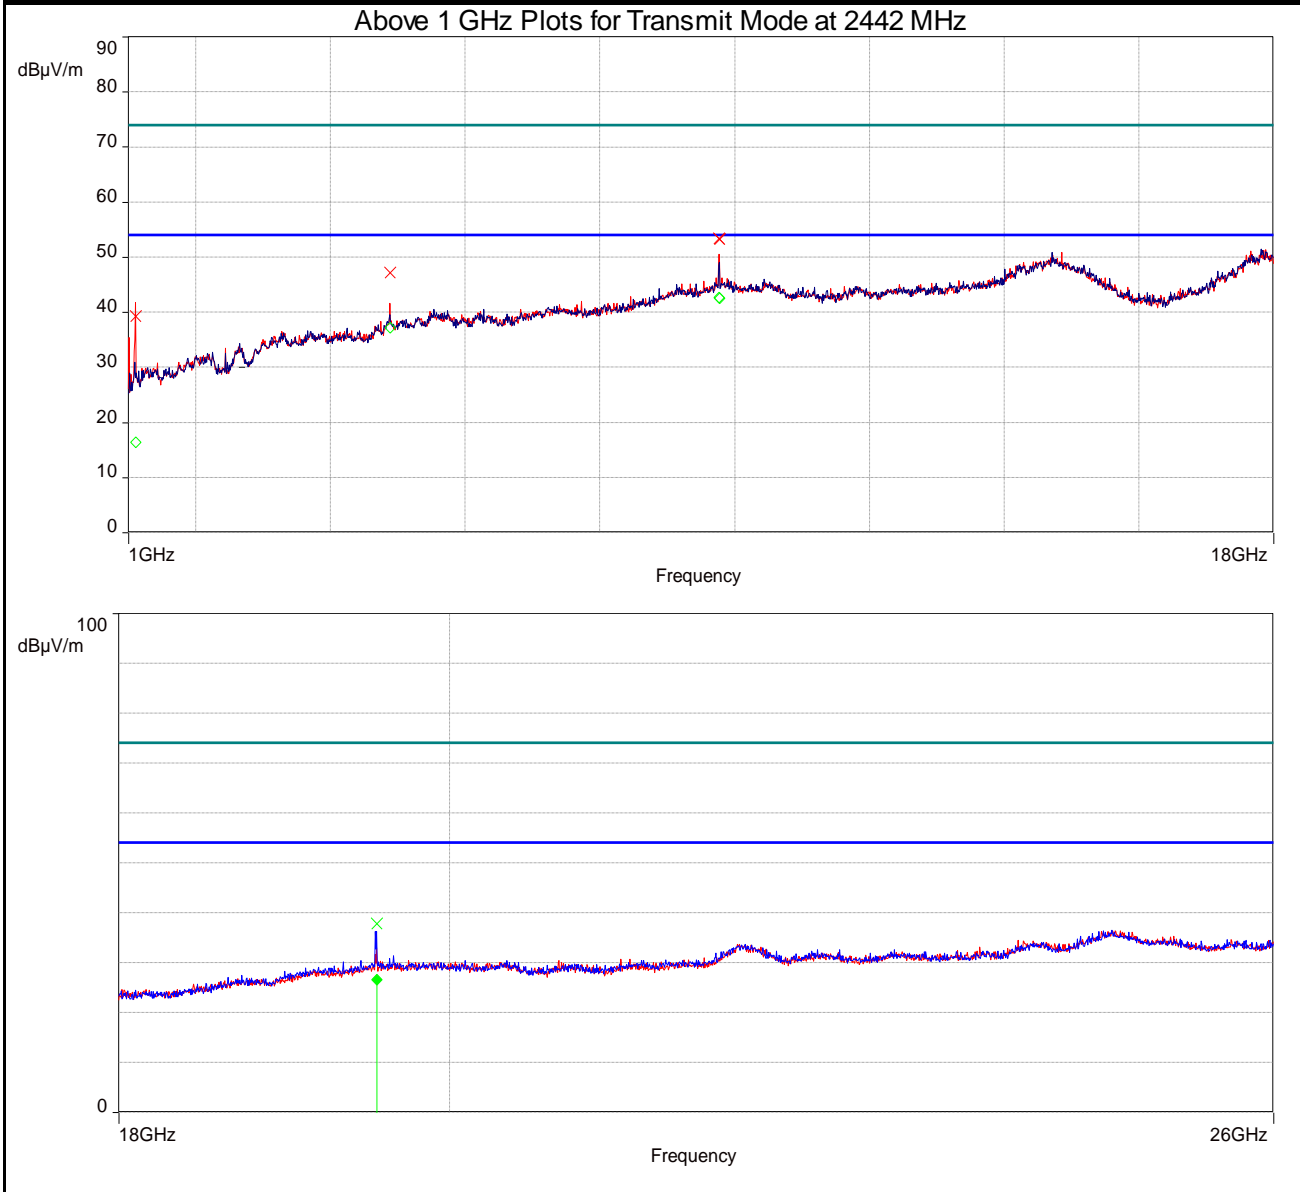



Notes: None.

SOP 1 Radiated Emissions

Tracking # US21BKL7.001 Page 6 of 6

EUT Name	USB Wireless Audio Transmitter	Date	January 29, 2021
EUT Model	SYN Pro Air TX	Temp / Hum in	23°C / 38%rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Transmitter on Vertical Position	Line AC / Freq	5.0 VDC
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m / EMCO-3115, 1m / ComPower-AHA840	Performed by	Jeremy Luong

Above 1 GHz Plots for Transmit Mode at 2480 MHz

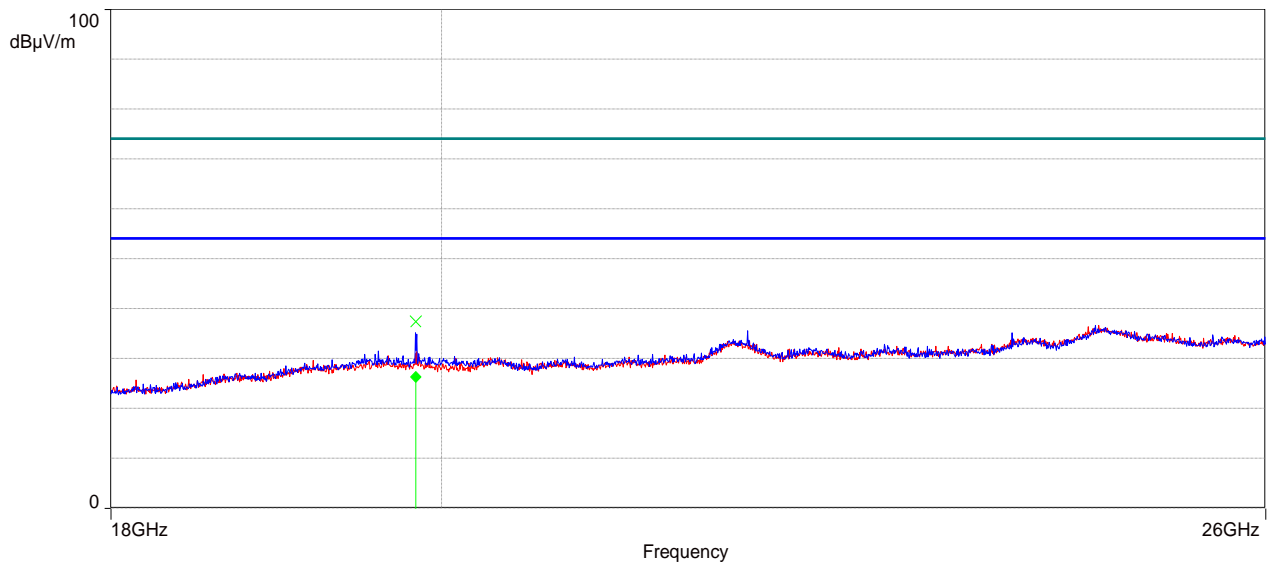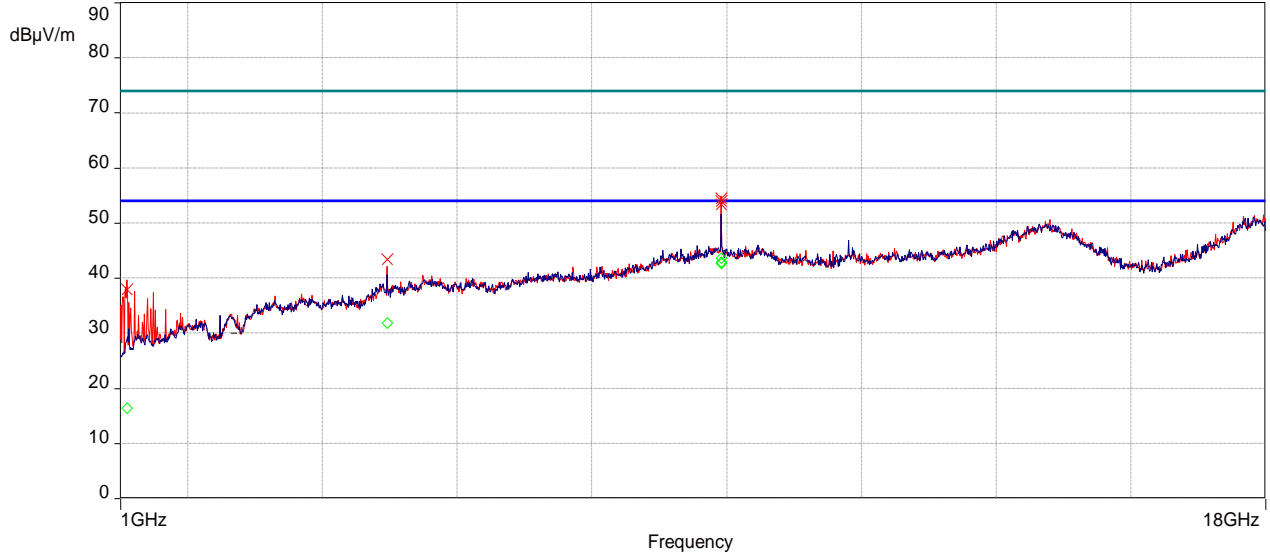

Notes: None.

4.5.4 Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

4.6 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.10: 2013. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2020 and RSS Gen: 2019 Sect. 8.8.

4.6.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50µH / 50Ω LISNs.

Testing is performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.6.1.1 Deviations

There were no deviations from this test methodology.

4.6.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 7: AC Conducted Emissions – Test Results

Test Conditions: Conducted Measurement		Test Date: January 15, 2021
Antenna Type: Integrated		Power Level: See Test Plan
AC Power: USB Host Computer		Configuration: Tabletop
Ambient Temperature: 23° C		Relative Humidity: 38% RH
Configuration	Frequency Range	Test Result
Line 1 (Hot)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass


SOP 2 Conducted Emissions						Tracking # US21BKL7.001 Page 1 of 4			
EUT Name		USB Wireless Audio Transmitter				Date		January 15, 2021	
EUT Model		SYN Pro Air TX				Temp / Hum in		23° C / 38% rh	
EUT Serial		PP #2				Temp / Hum out		N/A	
EUT Config.		Integrated Antenna				Line AC / Freq		110 Vac/60 Hz @ Host PC	
Standard		CFR47 Part 15.207				RBW / VBW		9 kHz / 30 kHz	
Lab/LISN		Lab #2 /Com-Power, Line 1				Performed by		Jeremy Luong	
Frequency	Raw	Limit	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV		Line	dBuV	dB	
0.152	40.32	9.95	0.10	50.37	QP	Live	65.90	-15.53	Pass
0.152	20.58	9.95	0.10	30.63	Ave	Live	55.90	-25.27	Pass
0.157	39.17	9.95	0.09	49.21	QP	Live	65.60	-16.39	Pass
0.157	20.56	9.95	0.09	30.60	Ave	Live	55.60	-24.99	Pass
0.178	33.61	9.95	0.08	43.64	QP	Live	64.58	-20.93	Pass
0.178	14.23	9.95	0.08	24.26	Ave	Live	54.58	-30.32	Pass
0.195	36.91	9.95	0.07	46.93	QP	Live	63.83	-16.89	Pass
0.195	24.81	9.95	0.07	34.83	Ave	Live	53.83	-19.00	Pass
0.258	28.95	9.96	0.06	38.97	QP	Live	61.48	-22.51	Pass
0.258	15.56	9.96	0.06	25.57	Ave	Live	51.48	-25.91	Pass
0.337	23.49	9.96	0.05	33.50	QP	Live	59.28	-25.78	Pass
0.337	9.84	9.96	0.05	19.85	Ave	Live	49.28	-29.43	Pass
0.524	24.94	9.98	0.04	34.96	QP	Live	56.00	-21.04	Pass
0.524	14.92	9.98	0.04	24.94	Ave	Live	46.00	-21.06	Pass
Spec Margin = QP/Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $u_c(y) = \pm 2.18$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment and transmitted at 2402 MHz									

SOP 2 Conducted Emissions

Tracking # US21BKL7.001 Page 2 of 4

EUT Name	USB Wireless Audio Transmitter	Date	January 15, 2021
EUT Model	SYN Pro Air TX	Temp / Hum in	23° C / 38% rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Integrated Antenna	Line AC	120 Vac/60 Hz @ PC
Standard	CFR47 Part 15.207	RBW / VBW	9 kHz / 30 kHz
Lab/LISN	Lab #2 /Com-Power, Line 1	Performed by	Jeremy Luong

150 kHz to 30 MHz Plot for Line 1 (Hot)

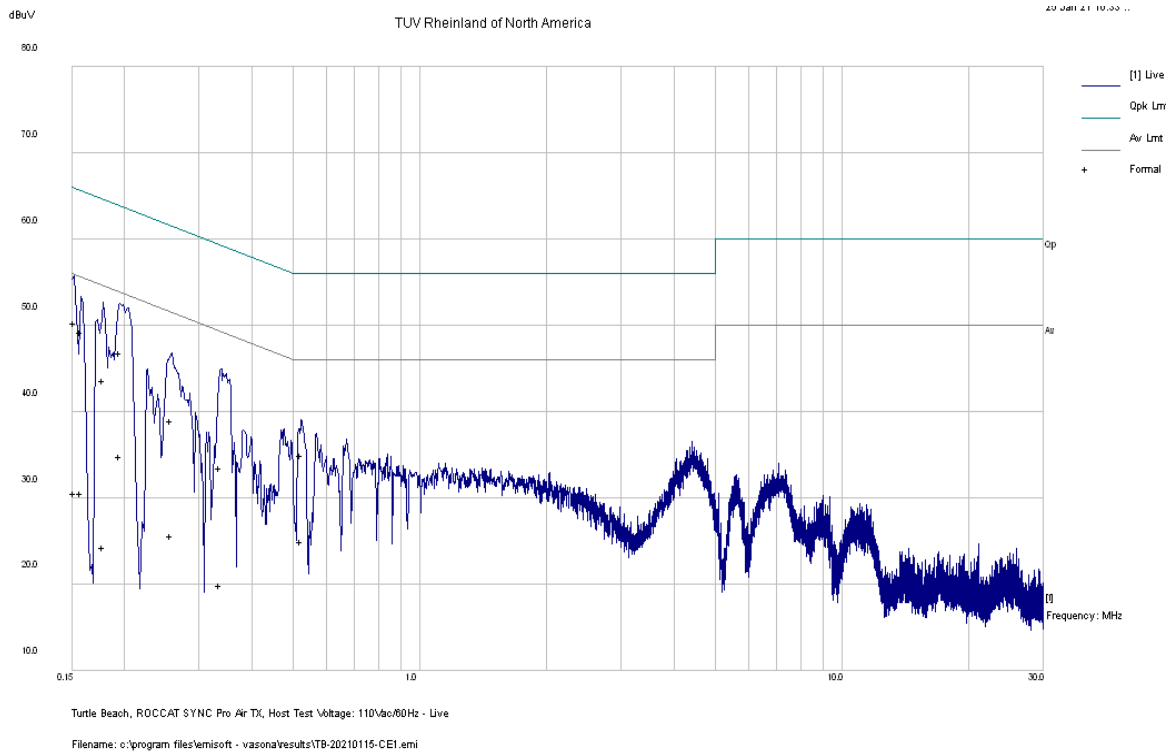


Notes: Meets FCC Class B limit.

SOP 2 Conducted Emissions						Tracking # US21BKL7.001 Page 3 of 4				
EUT Name	USB Wireless Audio Transmitter					Date	January 15, 2021			
EUT Model	SYN Pro Air TX					Temp / Hum in	23° C / 38% rh			
EUT Serial	PP #2					Temp / Hum out	N/A			
EUT Config.	Integrated Antenna					Line AC / Freq	110 Vac/60 Hz @ Host PC			
Standard	CFR47 Part 15.207					RBW / VBW	9 kHz / 30 kHz			
Lab/LISN	Lab #2 /Com-Power, Line 2					Performed by	Jeremy Luong			
Frequency	Raw	Limiter	Ins. Loss	Level	Detector	Line	Limit	Margin	Result	
MHz	dBuV	dB	dB	dBuV		Line	dBuV	dB		
0.150	36.71	9.95	0.10	46.76	QP	Neutral	66.00	-19.24	Pass	
0.150	14.66	9.95	0.10	24.71	Ave	Neutral	56.00	-31.29	Pass	
0.169	35.33	9.95	0.08	45.36	QP	Neutral	65.02	-19.66	Pass	
0.169	16.68	9.95	0.08	26.71	Ave	Neutral	55.02	-28.31	Pass	
0.176	34.74	9.95	0.08	44.77	QP	Neutral	64.66	-19.90	Pass	
0.176	17.20	9.95	0.08	27.23	Ave	Neutral	54.66	-27.43	Pass	
0.191	33.27	9.95	0.07	43.29	QP	Neutral	63.99	-20.69	Pass	
0.191	16.00	9.95	0.07	26.02	Ave	Neutral	53.99	-27.97	Pass	
0.210	32.12	9.95	0.07	42.14	QP	Neutral	63.21	-21.07	Pass	
0.210	15.00	9.95	0.07	25.02	Ave	Neutral	53.21	-28.19	Pass	
0.225	27.40	9.95	0.06	37.42	QP	Neutral	62.64	-25.22	Pass	
0.225	15.48	9.95	0.06	25.50	Ave	Neutral	52.64	-27.14	Pass	
0.242	25.99	9.95	0.06	36.01	QP	Neutral	62.04	-26.03	Pass	
0.242	11.07	9.95	0.06	21.08	Ave	Neutral	52.04	-30.96	Pass	
Spec Margin = QP./Ave. - Limit, ± Uncertainty										
Combined Standard Uncertainty $U_c(y) = \pm 2.18$ dB Expanded Uncertainty $U = kU_c(y)$ $k = 2$ for 95% confidence										
Notes: EUT was setup as table top equipment and transmitted at 2402 MHz										

SOP 2 Conducted Emissions

Tracking # US21BKL7.001 Page 4 of 4

EUT Name	USB Wireless Audio Transmitter	Date	January 15, 2021
EUT Model	SYN Pro Air TX	Temp / Hum in	23° C / 38% rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Integrated Antenna	Line AC / Freq	120 Vac/60 Hz @ PC
Standard	CFR47 Part 15.207	RBW / VBW	9 kHz / 30 kHz
Lab/LISN	Lab #2 /Com-Power, Line 2	Performed by	Jeremy Luong

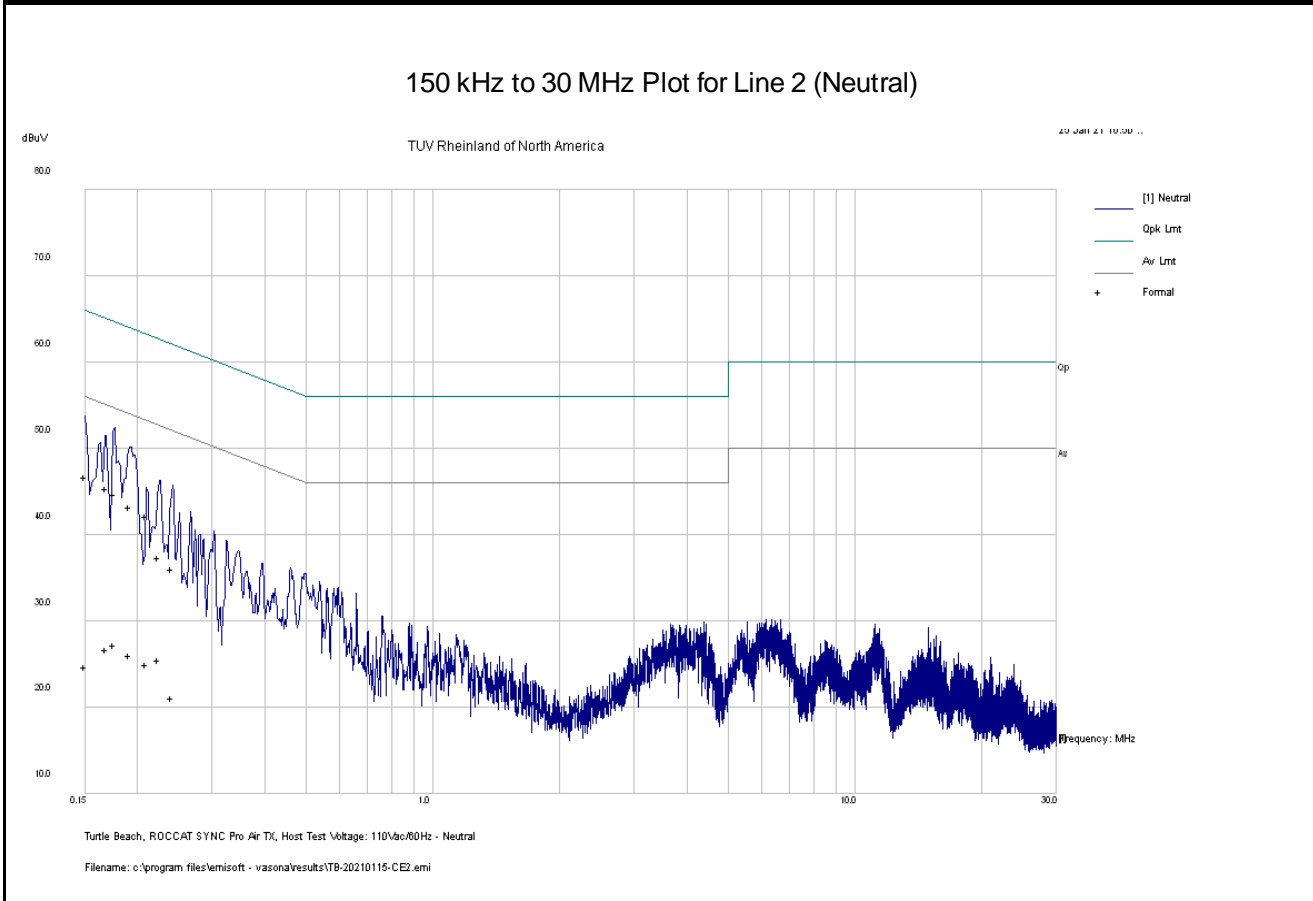

Note: Meets FCC Class B Limit.

5 Test Equipment List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Loop Antenna	EMCO	6502	9110-2683	06/16/2020	06/16/2022
BiLog Antenna	Sunol Sciences	JB3	A020502	03/12/2020	03/12/2022
Horn Ant. (1-18GHz)	Sunol Sciences	3115	9211-3969	06/20/2019	06/20/2021
Horn Ant. (18-40GHz)	Com-Power	AHA-840	105005	08/26/2019	08/26/2021
EMI Receiver	Agilent	N9038A	MY52260210	02/15/2020	02/15/2021
EMI Receiver	Rohde & Schwarz	ESW44	1328.4100K44- 101853-VQ	07/01/2020	10/01/2021
Preamplifier	Sonoma Inst.	310	185516	02/12/2020	02/12/2021
Preamplifier	Miteq	TTA1800-30-HG	184252	02/12/2020	02/12/2021
RF Power Meter	Agilent	E4418A	MY45103902	02/13/2020	02/13/2021
Power Sensor	Agilent	8481A	US37295801	02/13/2020	02/13/2021
Thermometer	Extech Instruments	SD700	A095319	03/18/2020	03/18/2021
DC Power Supply	Agilent	E3634A	MY400004331	02/15/2020	02/15/2021
Signal Generator	Anritsu	MG3694A	042803	02/13/2020	02/13/2021
Notch Filter	Micro-Tronics	BRM50702	37	VBU	VBU

* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

6 EMC Test Plan

6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 Customer

Table 8: Customer Information

Company Name	Voyetra Turtle Beach, Inc.
Address	44 South Broadway, 4th Floor
City, State, Zip	White Plains NY 10601
Country	USA

Table 9: Technical Contact Information

Name	Tim Blaney
E-mail	tim@commcepts.net
Phone	(530) 277-3482

6.3 Equipment Under Test (EUT)

Table 10: EUT Specifications

EUT Specification	
Package Dimensions	31.5 mm (1.25") x 13.5 mm (0.5") x 6 mm (0.24")
Power Input	USB Transmitter Input Voltage: 5.0 Vdc (Host Computer)
Environment	Indoor
Operating Temperature Range:	0 to 50 degrees C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Product Marketing Name (PMN)	ROCCAT SYN Pro Air TX
Hardware Version Identification Number (HVIN)	SYN Pro Air TX
Firmware Version Identification Number (FVIN)	1.1.1.0
Operating Mode	TestCommon Unit Test 1.0.1.9
Transmitter Frequency Band	2402 MHz to 2480 MHz
Max. Measured Power Output	+4.96 dBm
Power Setting @ Operating Channel	+4.0 dBm
Antenna Type	PCB Attached on board (-2.2 dBi)
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input type="checkbox"/> DSSS <input type="checkbox"/> OFDM <input checked="" type="checkbox"/> Other describe: GFSK
Date Rate	1 Mbps and 2 Mbps
TX/RX Chain (s)	1
Directional Gain Type	<input checked="" type="checkbox"/> Uncorrelated <input checked="" type="checkbox"/> No Beam-Forming <input type="checkbox"/> Other describe:
Type of Equipment	<input type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input checked="" type="checkbox"/> Other describe: <i>Table Top Device's accessory.</i>
Note: None.	

Table 11: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
USB Connector	Terminated to Host USB Port	<input checked="" type="checkbox"/> Direct plug with no cable	<input checked="" type="checkbox"/> Metric:0m	<input checked="" type="checkbox"/> M

Table 12: Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Lenovo	T430	PB-8HBRR	Set test mode

Table 13: Description of Sample used for Testing

Device	Serial Number	Configuration	Used For
SYN Pro Air TX	PP #2	Radiated Sample	Radiated Emissions, Conducted Emission.
SYN Pro Air TX	PP #1	Conducted Sample	Output Power, Occupied Bandwidth, Conducted Spurious Emissions, Peak Power Spectral Density
Note: None			

Table 14: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Description
SYN Pro Air TX	Integrated	Transmit & Receive	SYN Pro Air TX positioned on its vertical; worst case.
Note: This is the final setup configuration used for testing. All other orientations were investigated for worst case configuration.			

Table 15: Final Test Mode for 2402 MHz to 2480MHz Band

Test	SYN Pro Air TX
Occupied Bandwidth	2402, 2442, 2480 MHz @ 1 Mbps
Output Power	2402, 2442, 2480 MHz @ 1, 2 Mbps
Peak Power Spectral Density	2402, 2442, 2480 MHz @ 1 Mbps
Out-of-Band (-30 dBr)	2402, 2442, 2480 MHz @ 1 Mbps
Band-Edge (Radiated)	2402, 2480 MHz @ 2 Mbps
Transmitted Spurious Emission	2402, 2442, 2480 MHz @ 1 Mbps
AC Conducted Emission	2402 MHz @ 1 Mbps
Note: EUT transmits at 95.11% duty cycle.	

6.4 Test Specifications

Table 16: Test Specifications

Emissions and Immunity	
Rules & Regulations / Standards	Requirement
CFR 47 Part 15.247: 2020	All
RSS 247 Issue 2, 2017	All

END OF REPORT