

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.249)

**Report No.:** RFBUIY-WTW-P23090524-1

**FCC ID:** XGB-MWBB0003

**Product:** Wireless mouse

**Brand:** TURTLE BEACH

**Model No.:** MWBB0003

**Received Date:** 2023/9/25

**Test Date:** 2023/10/13 ~ 2023/10/18

**Issued Date:** 2023/11/14

**Applicant:** Voyetra Turtle Beach, Inc.

**Address:** 44 South Broadway, 4th Floor White Plains NY 10601 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /** 198487 / TW2021

**Designation Number:**

**Approved by:** Jeremy Lin , **Date:** 2023/11/14  
Jeremy Lin / Project Engineer

This test report consists of 40 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Jessica Cheng / Senior Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Supplementary Information .....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description .....	6
3.2 Antenna Description of EUT .....	7
3.3 Channel List .....	8
3.4 Test Mode Applicability and Tested Channel Detail .....	9
3.5 Duty Cycle of Test Signal .....	10
3.6 Test Program Used and Operation Descriptions .....	11
3.7 Connection Diagram of EUT and Peripheral Devices .....	11
3.8 Configuration of Peripheral Devices and Cable Connections .....	14
<b>4 Test Instruments</b> .....	<b>15</b>
4.1 AC Power Conducted Emissions .....	15
4.2 Radiated Emissions below 1 GHz .....	16
4.3 Radiated Emissions above 1 GHz .....	17
4.4 20 dB Bandwidth .....	18
<b>5 Limits of Test Items</b> .....	<b>19</b>
5.1 AC Power Conducted Emissions .....	19
5.2 Radiated Emissions below 1 GHz .....	19
5.3 Radiated Emissions above 1 GHz .....	20
5.4 20 dB Bandwidth .....	20
<b>6 Test Arrangements</b> .....	<b>21</b>
6.1 AC Power Conducted Emissions .....	21
6.1.1 Test Setup .....	21
6.1.2 Test Procedure .....	21
6.2 Radiated Emissions below 1 GHz .....	22
6.2.1 Test Setup .....	22
6.2.2 Test Procedure .....	23
6.3 Radiated Emissions above 1 GHz .....	24
6.3.1 Test Setup .....	24
6.3.2 Test Procedure .....	24
6.4 20 dB Bandwidth .....	25
6.4.1 Test Setup .....	25
6.4.2 Test Procedure .....	25
<b>7 Test Results of Test Item</b> .....	<b>26</b>
7.1 AC Power Conducted Emissions .....	26
7.2 Radiated Emissions below 1 GHz .....	30
7.3 Radiated Emissions above 1 GHz .....	34
7.4 20 dB Bandwidth .....	38
<b>8 Pictures of Test Arrangements</b> .....	<b>39</b>
<b>9 Information of the Testing Laboratories</b> .....	<b>40</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBUIY-WTW-P23090524-1	Original release.	2023/11/14

## 1 Certificate

**Product:** Wireless mouse

**Brand:** TURTLE BEACH

**Test Model:** MWBB0003

**Sample Status:** Engineering sample

**Applicant:** Voyetra Turtle Beach, Inc.

**Test Date:** 2023/10/13 ~ 2023/10/18

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.249)

**Measurement procedure:** ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.249)			
Standard / Clause	Test Item	Result	Remark
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -11.95 dB at 0.15719 MHz
15.209 / 15.249(d)	Radiated Emissions below 1 GHz	Pass	Minimum passing margin is -5.5 dB at 56.77 MHz
15.209 / 15.249(a) / 15.249(d) / 15.249(e)	Radiated Emissions above 1 GHz	Pass	Minimum passing margin is -12.3 dB at 2440.00 MHz
15.215 (c)	20 dB Bandwidth	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Expanded Uncertainty (k=2) (±)
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.90 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.38 dB
	30 MHz ~ 1 GHz	5.7 dB
Radiated Emissions below 1 GHz	9 kHz ~ 30 MHz	2.38 dB
	30 MHz ~ 1 GHz	5.7 dB
Radiated Emissions above 1 GHz	1 GHz ~ 6 GHz	4.83 dB
	6 GHz ~ 18 GHz	5.37 dB
	18 GHz ~ 40 GHz	5.24 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	Wireless mouse
Brand	TURTLE BEACH
Test Model	MWBB0003
Status of EUT	Engineering sample
Power Supply Rating	3.7Vdc from battery or 5Vdc from USB port
Modulation Type	GFSK
Operating Frequency	2.403 GHz ~ 2.48 GHz
Number of Channel	78
Field Strength Of Fundamental	81.7 dBuV/m at 3 meters

Note:

1. The EUT uses following accessory.

USB Cable	Shielded 1.8m
-----------	---------------

2. EUT has two colors of black and white for marketing requirement.
3. There are Bluetooth and GFSK technology used for the EUT.
4. Bluetooth and GFSK technology can not transmit at same time.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Gain (dBi)	Antenna Type	Connector Type
2.5	Chip	N/A

\* Due to radiated measurements are made and the antenna gain is already accounted for this device, so provide an antenna datasheet and/or antenna measurement report is not required. The antenna dimensions and pictures (include antenna wire length if have) are stated in EUT photo exhibit.

### 3.3 Channel List

78 channels are provided to this EUT:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2403	20	2423	40	2443	60	2463
1	2404	21	2424	41	2444	61	2464
2	2405	22	2425	42	2445	62	2465
3	2406	23	2426	43	2446	63	2466
4	2407	24	2427	44	2447	64	2467
5	2408	25	2428	45	2448	65	2468
6	2409	26	2429	46	2449	66	2469
7	2410	27	2430	47	2450	67	2470
8	2411	28	2431	48	2451	68	2471
9	2412	29	2432	49	2452	69	2472
10	2413	30	2433	50	2453	70	2473
11	2414	31	2434	51	2454	71	2474
12	2415	32	2435	52	2455	72	2475
13	2416	33	2436	53	2456	73	2476
14	2417	34	2437	54	2457	74	2477
15	2418	35	2438	55	2458	75	2478
16	2419	36	2439	56	2459	76	2479
17	2420	37	2440	57	2460	77	2480
18	2421	38	2441	58	2461		
19	2422	39	2442	59	2462		



### 3.4 Test Mode Applicability and Tested Channel Detail


Pre-Scan:	1. For Unwanted Emission below 1 GHz has Charging with NB/ Charging with Adapter mode of power supply. Pre-scan and find the worst charging case as a representative test condition.
Worst Case:	1. For Unwanted Emission below 1 GHz Charging with NB mode is the worst charging case of power supply.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Tested Channel	Modulation	Data Rate Parameter
AC Power Conducted Emissions	B	-	-	-
	C	-	-	-
20 dB Bandwidth	A	0, 37, 77	GFSK	1Mb/s
Radiated Emissions below 1 GHz	A	37	GFSK	1Mb/s
	B	-	-	-
Radiated Emissions above 1 GHz	A	0, 37, 77	GFSK	1Mb/s
EUT Configure Mode:	A	EUT only		
	B	Charging with NB		
	C	Charging with Adapter		

### 3.5 Duty Cycle of Test Signal

**GFSK:** Duty cycle =  $0.122 \text{ ms} / 0.61 \text{ ms} \times 100\% = 20.0\%$

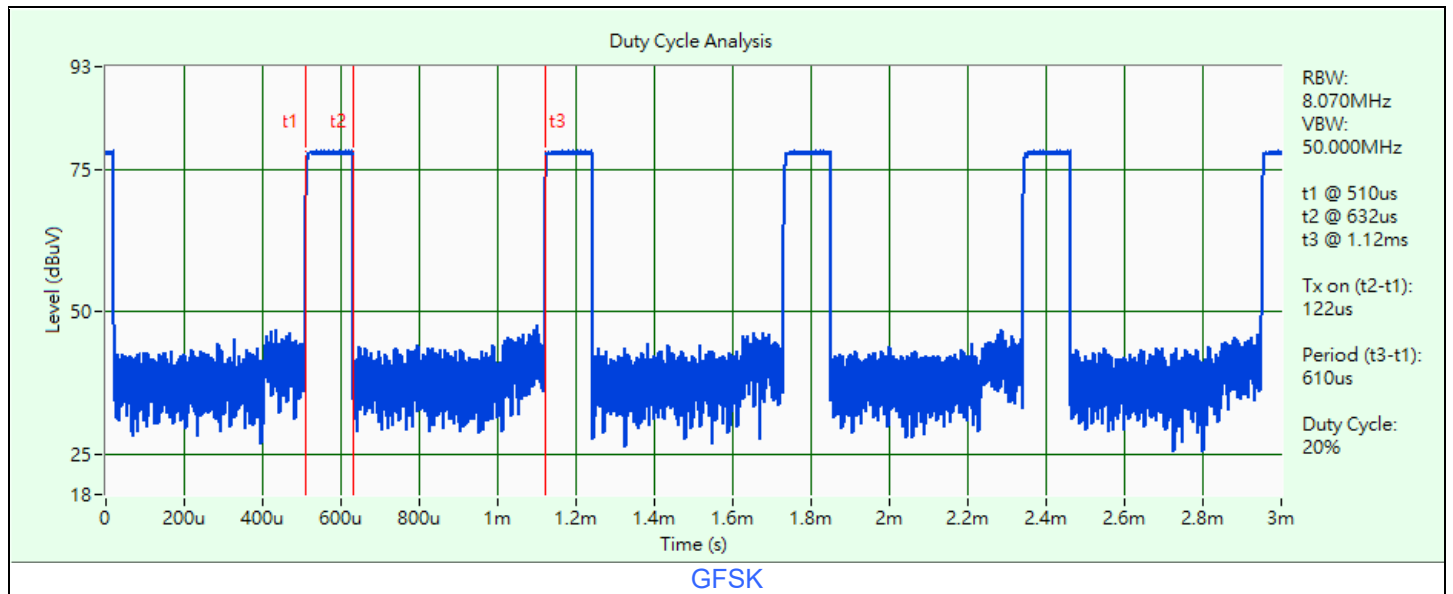


### 3.6 Test Program Used and Operation Descriptions


Controlling software (Pxi\_Link\_Emi\_Tool) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

Mode A




Mode B

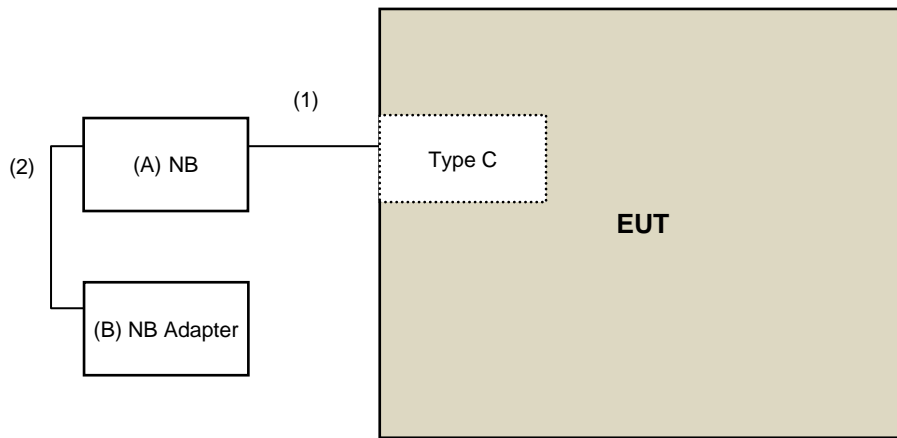

----- Remote Site

Mode C

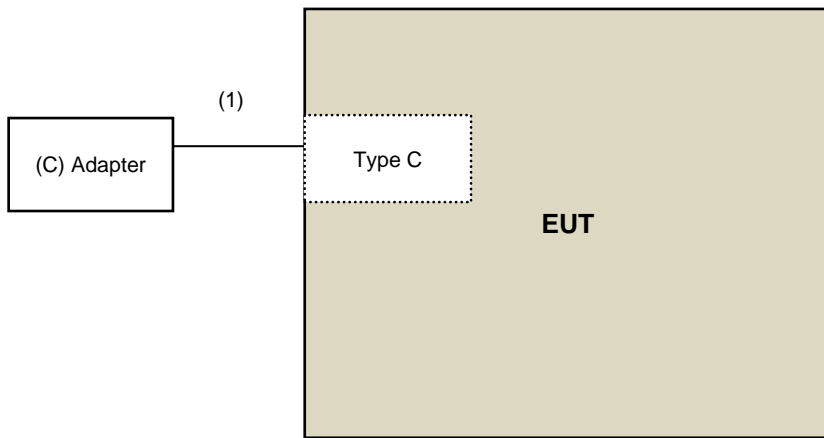

-----  
Remote Site

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	NB	Lenovo	80WG	YD01YRC9	N/A	Provided by Lab
B	NB Adapter	Lenovo	ADLX65CLGU2A	N/A	N/A	Provided by Lab
C	Adapter	Apple	A1385	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB cable	1	1.8	Y	0	Supplied by applicant
2	NB Adapter DC cable	1	1.9	N	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-011285	2023/9/21	2024/9/20
		E1-011286	2023/9/21	2024/9/20
50 ohm terminal resistance SUHNER	65BNC-5001	E1-010789	2023/6/16	2024/6/15
EMI Test Receiver R&S	ESCI	100412	2023/8/23	2024/8/22
	ESCS 30	100276	2023/4/20	2024/4/19
Fixed Attenuator STI	STI02-2200-10	NO.1	2023/9/13	2024/9/12
LISN R&S	ENV216	101196	2023/5/22	2024/5/21
		101197	2023/7/12	2024/7/11
LISN Schwarzbeck	NNLK 8121	8121-731	2023/6/9	2024/6/8
		8121-00759	2023/8/21	2024/8/20
		8121-808	2023/5/2	2024/5/1
	NNLK 8129	8129229	2023/6/27	2024/6/26
RF Coaxial Cable PEWC	5D-FB	Cable-CO10-01	2023/2/8	2024/2/7
Software BVADT	Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 10.
2. Tested Date: 2023/10/14

## 4.2 Radiated Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	137	2023/10/13	2024/10/12
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2023/5/25	2024/5/24
	CDNE-M3	00091	2023/5/25	2024/5/24
Loop Antenna EMCI	LPA600	270	2023/9/4	2024/9/3
MXE EMI Receiver Agilent	N9038A	MY51210129	2023/3/24	2024/3/23
		MY51210137	2023/6/5	2024/6/4
Preamplifier EMCI	EMC001340	980269	2023/6/27	2024/6/26
Preamplifier HP	8447D	2432A03504	2023/2/16	2024/2/15
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2023/6/27	2024/6/26
Signal Analyzer R&S	FSV40	101544	2023/5/9	2024/5/8
Software BVADT	Radiated_V8.7.08	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

### Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2023/10/13



#### 4.3 Radiated Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Band Pass Filter Micro-Tronics	BRM17690	005	2023/5/25	2024/5/24
Boresight antenna tower fixture BV	BAF-02	6	N/A	N/A
High Pass Filter Wainwright	WHK 3.1/18G-10SS	SN 8	2023/5/25	2024/5/24
Horn Antenna EMCO	3115	00028257	2022/11/13	2023/11/12
Horn Antenna ETS-Lindgren	3117-PA	00215857	2022/11/13	2023/11/12
Horn Antenna Schwarzbeck	BBHA 9170	212	2022/10/20	2023/10/19
MXE EMI Receiver Agilent	N9038A	MY51210129	2023/3/24	2024/3/23
		MY51210137	2023/6/5	2024/6/4
Notch Filter Micro-Tronics	BRC50703-01	010	2023/5/25	2024/5/24
Preamplifier EMCI	EMC0126545 EMC184045B	980076	2023/2/16	2024/2/15
		980175	2023/9/2	2024/9/1
		980235	2023/2/16	2024/2/15
Preamplifier HP	8449B	3008A01201	2023/2/16	2024/2/15
RF Coaxial Cable EMCI	EMC102-KM-KM-1000 EMC104	200310	2023/3/12	2024/3/11
		190801	2023/9/13	2024/9/12
		190804	2023/9/13	2024/9/12
RF Coaxial Cable HUBER+SUHNER	SF-104	Cable-CH6-01	2023/9/13	2024/9/12
Signal Analyzer R&S	FSV40	101042	2023/9/5	2024/9/4
		101544	2023/5/9	2024/5/8
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2023/10/13

#### 4.4 20 dB Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY54490260	2023/7/13	2024/7/12
Signal Analyzer R&S	FSV40	101042	2023/9/5	2024/9/4
		101544	2023/5/9	2024/5/8
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2023/10/18

## 5 Limits of Test Items

### 5.1 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.2 Radiated Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

### 5.3 Radiated Emissions above 1 GHz

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
2400 ~ 2483.5 MHz	50	500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.


### 5.4 20 dB Bandwidth

The 20dB bandwidth shall be specified in operating frequency band.

## 6 Test Arrangements

### 6.1 AC Power Conducted Emissions

#### 6.1.1 Test Setup

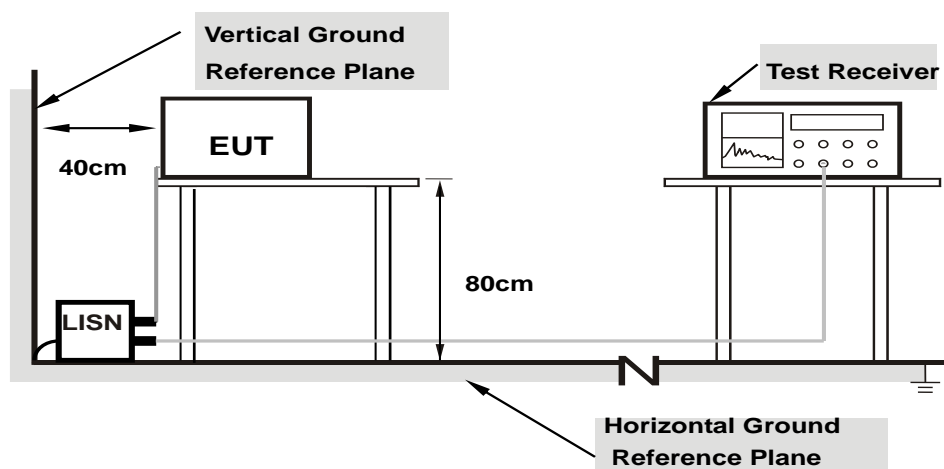

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 6.1.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.2 Radiated Emissions below 1 GHz

### 6.2.1 Test Setup

#### For Radiated emission below 30 MHz

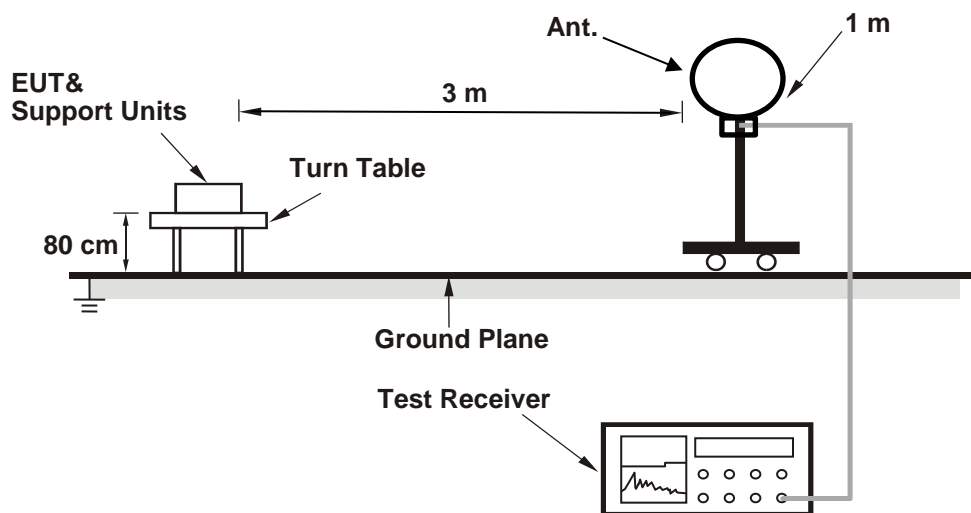

#### For Radiated emission above 30 MHz

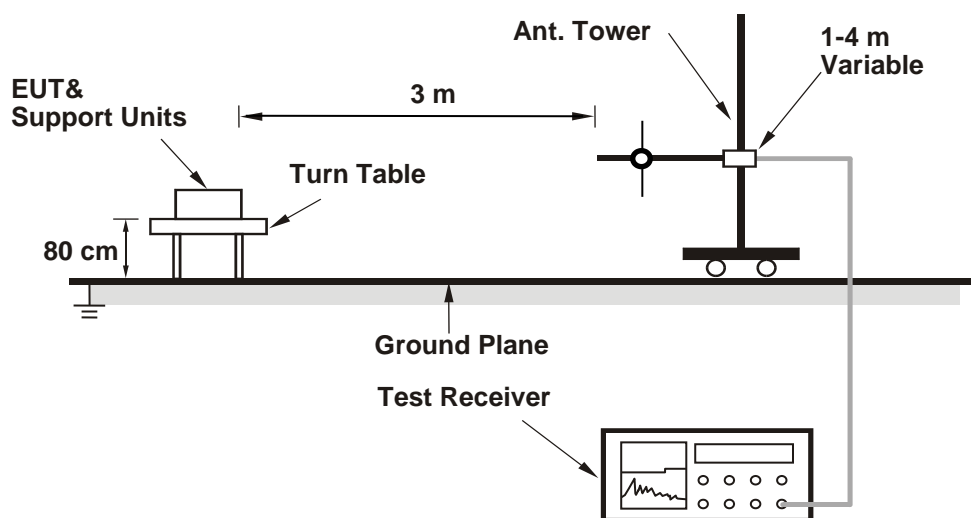

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.2.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.3 Radiated Emissions above 1 GHz

### 6.3.1 Test Setup

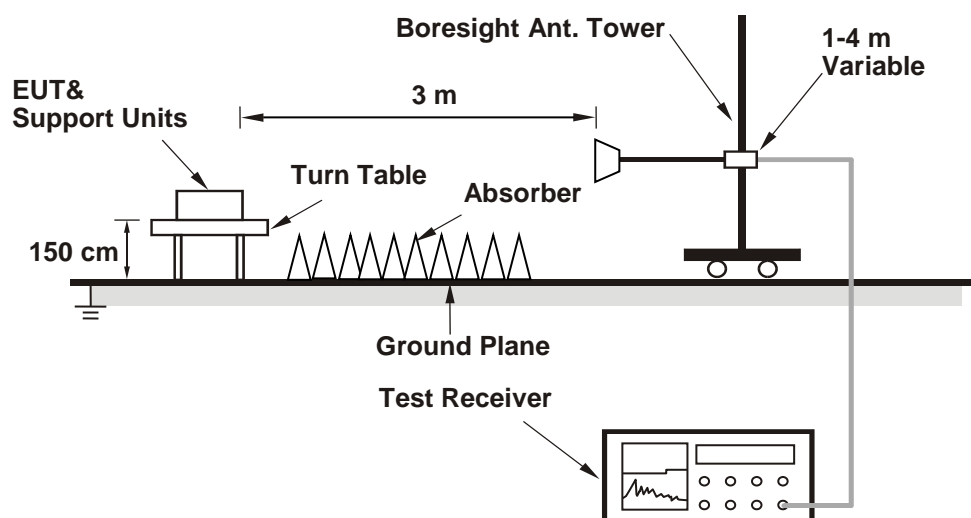

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.3.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- According to ANSI C63.10 section 6.6.4 and 4.1.4.2.2. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. For duty cycle correction factor values, see the Test Signal Duty Cycle section in this report.
- All modes of operation were investigated and the worst-case emissions are reported.



## 6.4 20 dB Bandwidth

### 6.4.1 Test Setup

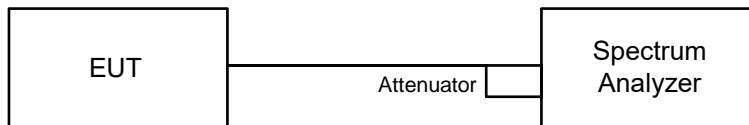

### 6.4.2 Test Procedure

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 20 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 7 Test Results of Test Item

### 7.1 AC Power Conducted Emissions


#### Mode B

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15719	9.99	43.67	23.80	53.66	33.79	65.61	55.61	-11.95	-21.82
2	0.18508	9.99	38.60	20.10	48.59	30.09	64.25	54.25	-15.66	-24.16
3	0.45097	9.96	26.76	20.96	36.72	30.92	56.86	46.86	-20.14	-15.94
4	3.25334	10.05	23.93	18.78	33.98	28.83	56.00	46.00	-22.02	-17.17
5	4.93507	10.11	25.99	18.67	36.10	28.78	56.00	46.00	-19.90	-17.22
6	6.74431	10.20	25.69	20.14	35.89	30.34	60.00	50.00	-24.11	-19.66

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

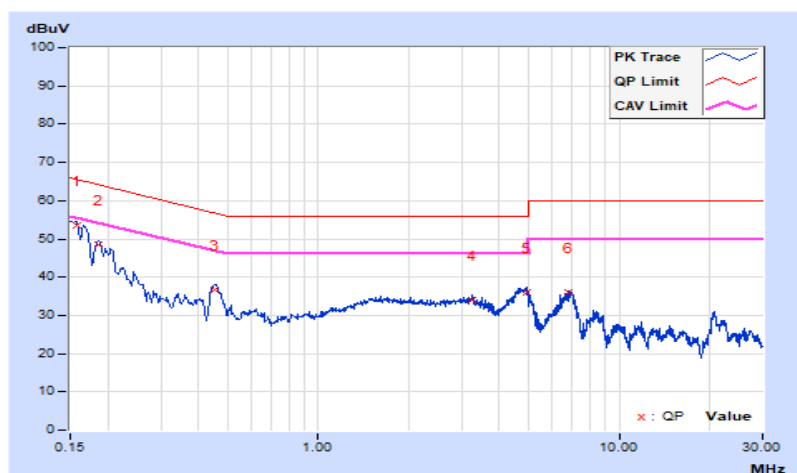


<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.96	43.64	25.17	53.60	35.13	66.00	56.00	-12.40	-20.87
2	0.18508	9.95	37.38	19.91	47.33	29.86	64.25	54.25	-16.92	-24.39
3	0.44625	9.95	26.85	20.18	36.80	30.13	56.94	46.94	-20.14	-16.81
4	1.87667	10.04	23.70	19.13	33.74	29.17	56.00	46.00	-22.26	-16.83
5	3.44107	10.08	23.85	18.71	33.93	28.79	56.00	46.00	-22.07	-17.21
6	4.75908	10.12	26.99	19.29	37.11	29.41	56.00	46.00	-18.89	-16.59

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

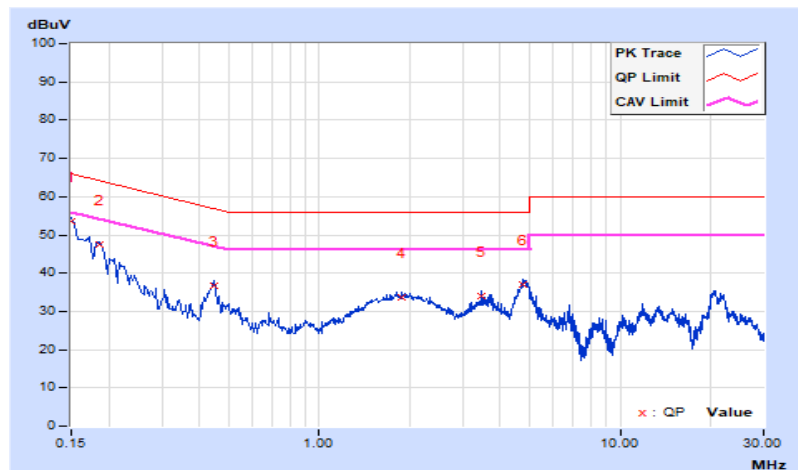


### Mode C

<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17283	9.99	25.60	7.55	35.59	17.54	64.82	54.82	-29.23	-37.28
2	0.24777	9.98	23.64	9.00	33.62	18.98	61.83	51.83	-28.21	-32.85
3	0.78550	9.97	23.17	18.20	33.14	28.17	56.00	46.00	-22.86	-17.83
4	2.45159	10.04	17.79	12.66	27.83	22.70	56.00	46.00	-28.17	-23.30
5	4.34842	10.08	20.24	15.24	30.32	25.32	56.00	46.00	-25.68	-20.68
6	5.39892	10.13	19.62	14.71	29.75	24.84	60.00	50.00	-30.25	-25.16

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

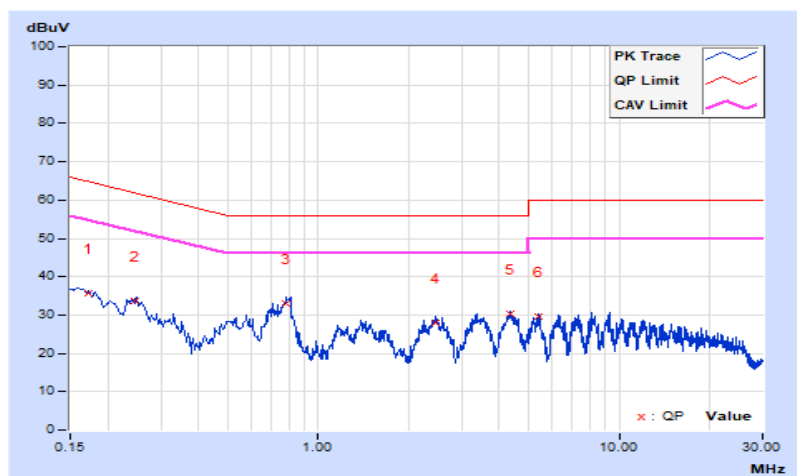


<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16526	9.96	27.35	7.34	37.31	17.30	65.20	55.20	-27.89	-37.90
2	0.25125	9.95	24.10	6.11	34.05	16.06	61.72	51.72	-27.67	-35.66
3	0.79724	9.96	25.07	18.10	35.03	28.06	56.00	46.00	-20.97	-17.94
4	3.23379	10.07	17.73	12.88	27.80	22.95	56.00	46.00	-28.20	-23.05
5	4.30540	10.10	18.72	14.12	28.82	24.22	56.00	46.00	-27.18	-21.78
6	5.41457	10.14	18.80	14.15	28.94	24.29	60.00	50.00	-31.06	-25.71

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

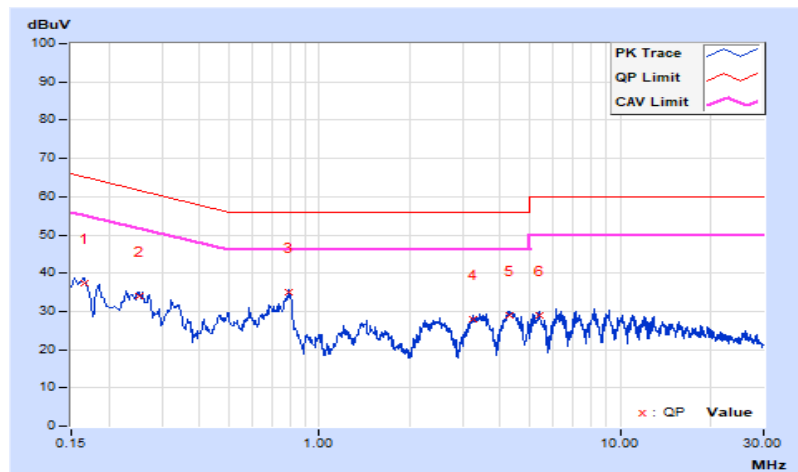

## 7.2 Radiated Emissions below 1 GHz


### Mode A

RF Mode	GFSK	Channel	CH 37 : 2440 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	3.7 Vdc	Environmental Conditions	25°C, 75% RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.78	27.2 QP	40.0	-12.8	1.89 H	210	37.0	-9.8
2	66.47	25.8 QP	40.0	-14.2	1.42 H	134	36.0	-10.2
3	155.23	19.8 QP	43.5	-23.7	1.37 H	257	28.1	-8.3
4	255.91	19.4 QP	46.0	-26.6	1.05 H	360	27.8	-8.4
5	290.74	20.8 QP	46.0	-25.2	1.12 H	215	27.4	-6.6
6	328.03	22.9 QP	46.0	-23.1	1.73 H	291	28.3	-5.4

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

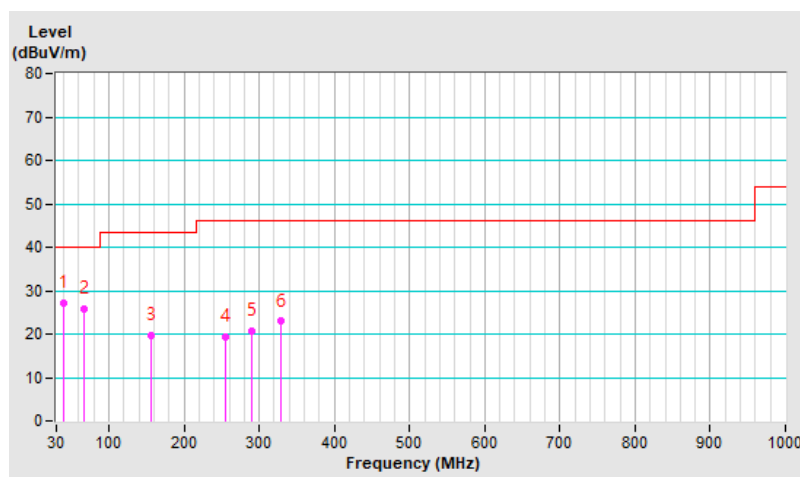


<b>RF Mode</b>	GFSK	<b>Channel</b>	CH 37 : 2440 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	3.7 Vdc	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.41	26.3 QP	40.0	-13.7	1.23 V	242	36.1	-9.8
2	66.52	26.0 QP	40.0	-14.0	1.43 V	176	36.2	-10.2
3	97.08	21.7 QP	43.5	-21.8	1.58 V	335	35.7	-14.0
4	143.15	19.5 QP	43.5	-24.0	1.27 V	3	28.3	-8.8
5	240.68	18.6 QP	46.0	-27.4	1.09 V	320	27.6	-9.0
6	297.04	20.7 QP	46.0	-25.3	1.56 V	149	27.2	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

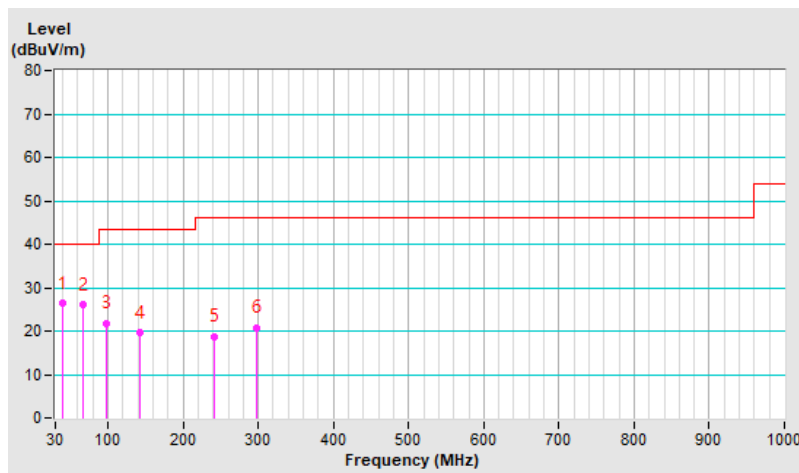


## Mode B

<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.26	30.6 QP	40.0	-9.4	1.93 H	45	40.8	-10.2
2	66.42	29.5 QP	40.0	-10.5	1.71 H	322	39.7	-10.2
3	125.88	30.8 QP	43.5	-12.7	1.46 H	266	41.0	-10.2
4	224.97	23.6 QP	46.0	-22.4	1.65 H	176	34.4	-10.8
5	275.02	28.0 QP	46.0	-18.0	1.24 H	151	35.1	-7.1
6	364.60	27.1 QP	46.0	-18.9	1.53 H	226	32.1	-5.0

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

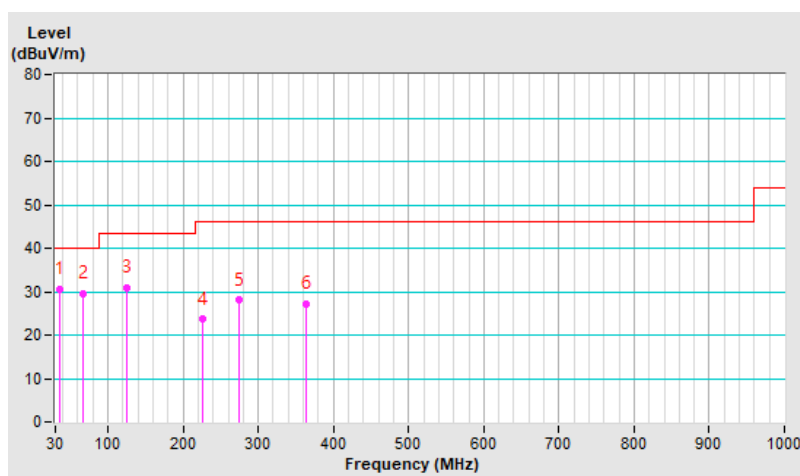




<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.30	29.5 QP	40.0	-10.5	1.24 V	258	39.7	-10.2
2	<b>56.77</b>	<b>34.5 QP</b>	<b>40.0</b>	<b>-5.5</b>	<b>1.11 V</b>	<b>226</b>	<b>43.8</b>	<b>-9.3</b>
3	125.84	33.9 QP	43.5	-9.6	1.36 V	192	44.1	-10.2
4	237.14	24.8 QP	46.0	-21.2	1.48 V	355	34.3	-9.5
5	314.16	25.0 QP	46.0	-21.0	1.76 V	204	30.8	-5.8
6	371.00	26.5 QP	46.0	-19.5	1.51 V	187	31.4	-4.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

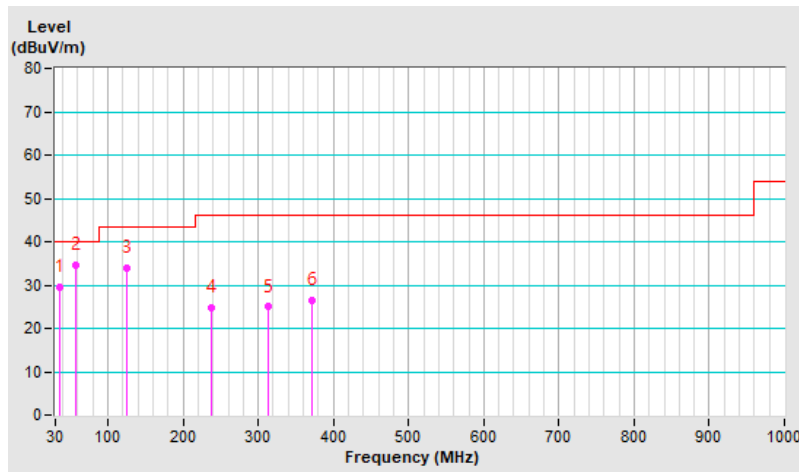

### 7.3 Radiated Emissions above 1 GHz

#### Mode A

<b>RF Mode</b>	GFSK	<b>Channel</b>	CH 0 : 2403 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	3.7 Vdc	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.3 PK	74.0	-20.7	1.52 H	39	54.5	-1.2
2	2390.00	40.8 AV	54.0	-13.2	1.52 H	39	42.0	-1.2
3	2400.00	45.5 PK	74.0	-28.5	1.52 H	39	46.8	-1.3
4	2400.00	31.5 AV	54.0	-22.5	1.52 H	39	32.8	-1.3
5	*2403.00	95.3 PK	114.0	-18.7	1.52 H	39	96.6	-1.3
6	*2403.00	81.3 AV	94.0	-12.7	1.52 H	39	82.6	-1.3
7	4806.00	48.4 PK	74.0	-25.6	1.63 H	258	40.3	8.1
8	4806.00	34.4 AV	54.0	-19.6	1.63 H	258	26.3	8.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.1 PK	74.0	-21.9	3.98 V	117	53.3	-1.2
2	2390.00	39.8 AV	54.0	-14.2	3.98 V	117	41.0	-1.2
3	2400.00	45.1 PK	74.0	-28.9	3.98 V	117	46.4	-1.3
4	2400.00	31.1 AV	54.0	-22.9	3.98 V	117	32.4	-1.3
5	*2403.00	94.9 PK	114.0	-19.1	3.98 V	117	96.2	-1.3
6	*2403.00	80.9 AV	94.0	-13.1	3.98 V	117	82.2	-1.3
7	4806.00	47.5 PK	74.0	-26.5	1.85 V	247	39.4	8.1
8	4806.00	33.5 AV	54.0	-20.5	1.85 V	247	25.4	8.1

#### Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " \* ": Fundamental frequency.
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  

$$20 \log(\text{Duty cycle}) = 20 \log(0.122 \text{ ms} / 0.61 \text{ ms}) = -14.0 \text{ dB}$$



<b>RF Mode</b>	GFSK	<b>Channel</b>	CH 37 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	3.7 Vdc	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	95.7 PK	114.0	-18.3	1.50 H	41	96.7	-1.0
2	*2440.00	81.7 AV	94.0	-12.3	1.50 H	41	82.7	-1.0
3	4880.00	48.5 PK	74.0	-25.5	1.58 H	124	40.5	8.0
4	4880.00	34.5 AV	54.0	-19.5	1.58 H	124	26.5	8.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	95.1 PK	114.0	-18.9	3.89 V	115	96.1	-1.0
2	*2440.00	81.1 AV	94.0	-12.9	3.89 V	115	82.1	-1.0
3	4880.00	47.6 PK	74.0	-26.4	2.31 V	125	39.6	8.0
4	4880.00	33.6 AV	54.0	-20.4	2.31 V	125	25.6	8.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(0.122 \text{ ms} / 0.61 \text{ ms}) = -14.0 \text{ dB}$

<b>RF Mode</b>	GFSK	<b>Channel</b>	CH 77 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
<b>Input Power</b>	3.7 Vdc	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	94.5 PK	114.0	-19.5	1.30 H	40	95.5	-1.0
2	*2480.00	80.5 AV	94.0	-13.5	1.30 H	40	81.5	-1.0
3	2483.50	41.3 PK	74.0	-32.7	1.30 H	40	42.2	-0.9
4	2483.50	27.3 AV	54.0	-26.7	1.30 H	40	28.2	-0.9
5	4960.00	48.2 PK	74.0	-25.8	1.39 H	63	40.2	8.0
6	4960.00	34.2 AV	54.0	-19.8	1.39 H	63	26.2	8.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	93.9 PK	114.0	-20.1	3.94 V	112	94.9	-1.0
2	*2480.00	79.9 AV	94.0	-14.1	3.94 V	112	80.9	-1.0
3	2483.50	40.7 PK	74.0	-33.3	3.94 V	112	41.6	-0.9
4	2483.50	26.7 AV	54.0	-27.3	3.94 V	112	27.6	-0.9
5	4960.00	47.6 PK	74.0	-26.4	1.85 V	228	39.6	8.0
6	4960.00	33.6 AV	54.0	-20.4	1.85 V	228	25.6	8.0



**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(0.122 \text{ ms} / 0.61 \text{ ms}) = -14.0 \text{ dB}$

Mode A

Plot of Band Edge

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	--------------------	-------------------------------	----------------------------------

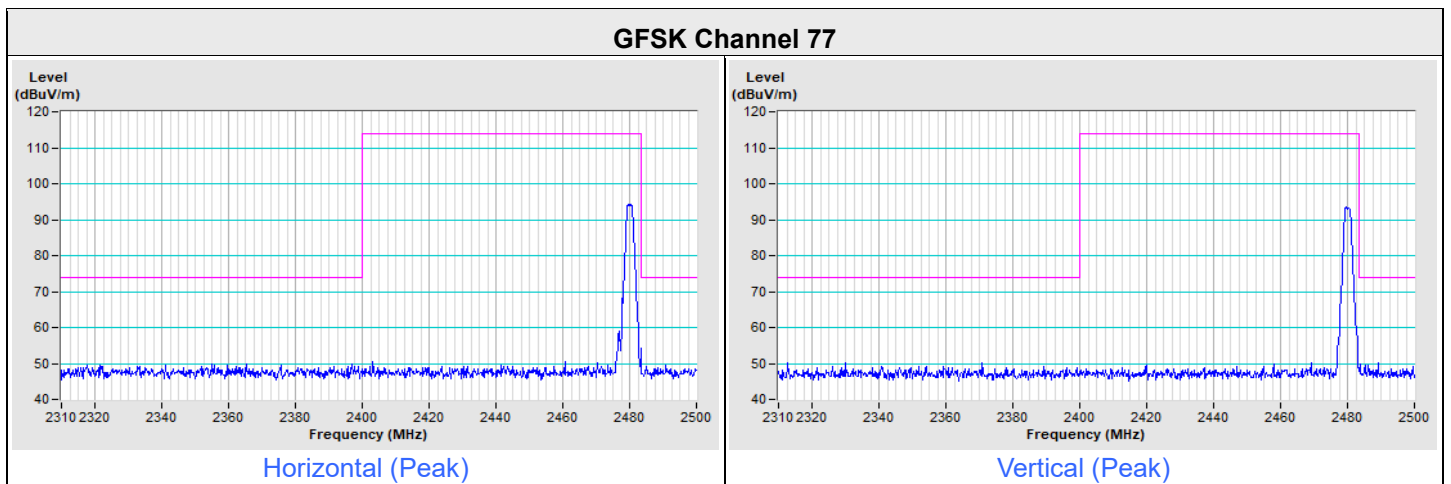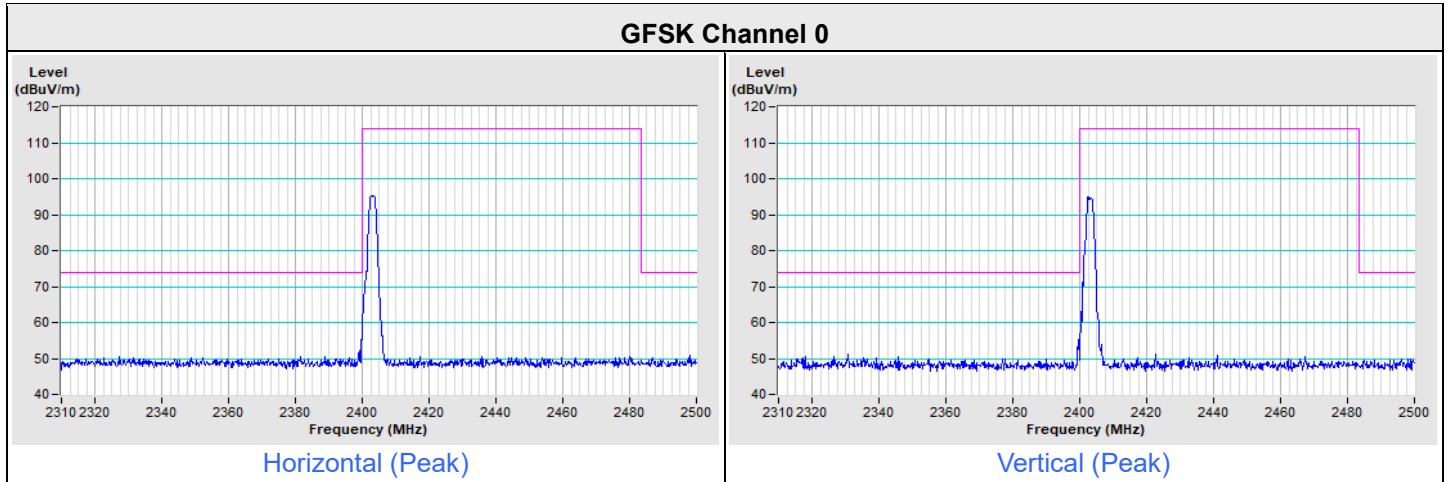

## 7.4 20 dB Bandwidth


### Mode A

Input Power:	3.7 Vdc	Environmental Conditions:	25°C, 76% RH	Tested By:	Dalen Dai
--------------	---------	---------------------------	--------------	------------	-----------

Channel	Channel Frequency (MHz)	20 dB Bandwidth (MHz)	Measured Frequencies		Operating Frequency Band (MHz)	Test Result
			FL (MHz)	FH (MHz)		
0	2403	2.27	2401.87	2404.14	2400 ~ 2483.5	Pass
37	2440	2.27	2438.87	2441.14		Pass
77	2480	2.27	2478.87	2481.14		Pass

#### Notes:

1. FL is the lowest frequency of the 20 dB bandwidth of power envelope.
2. FH is the highest frequency of the 20 dB bandwidth of power envelope.

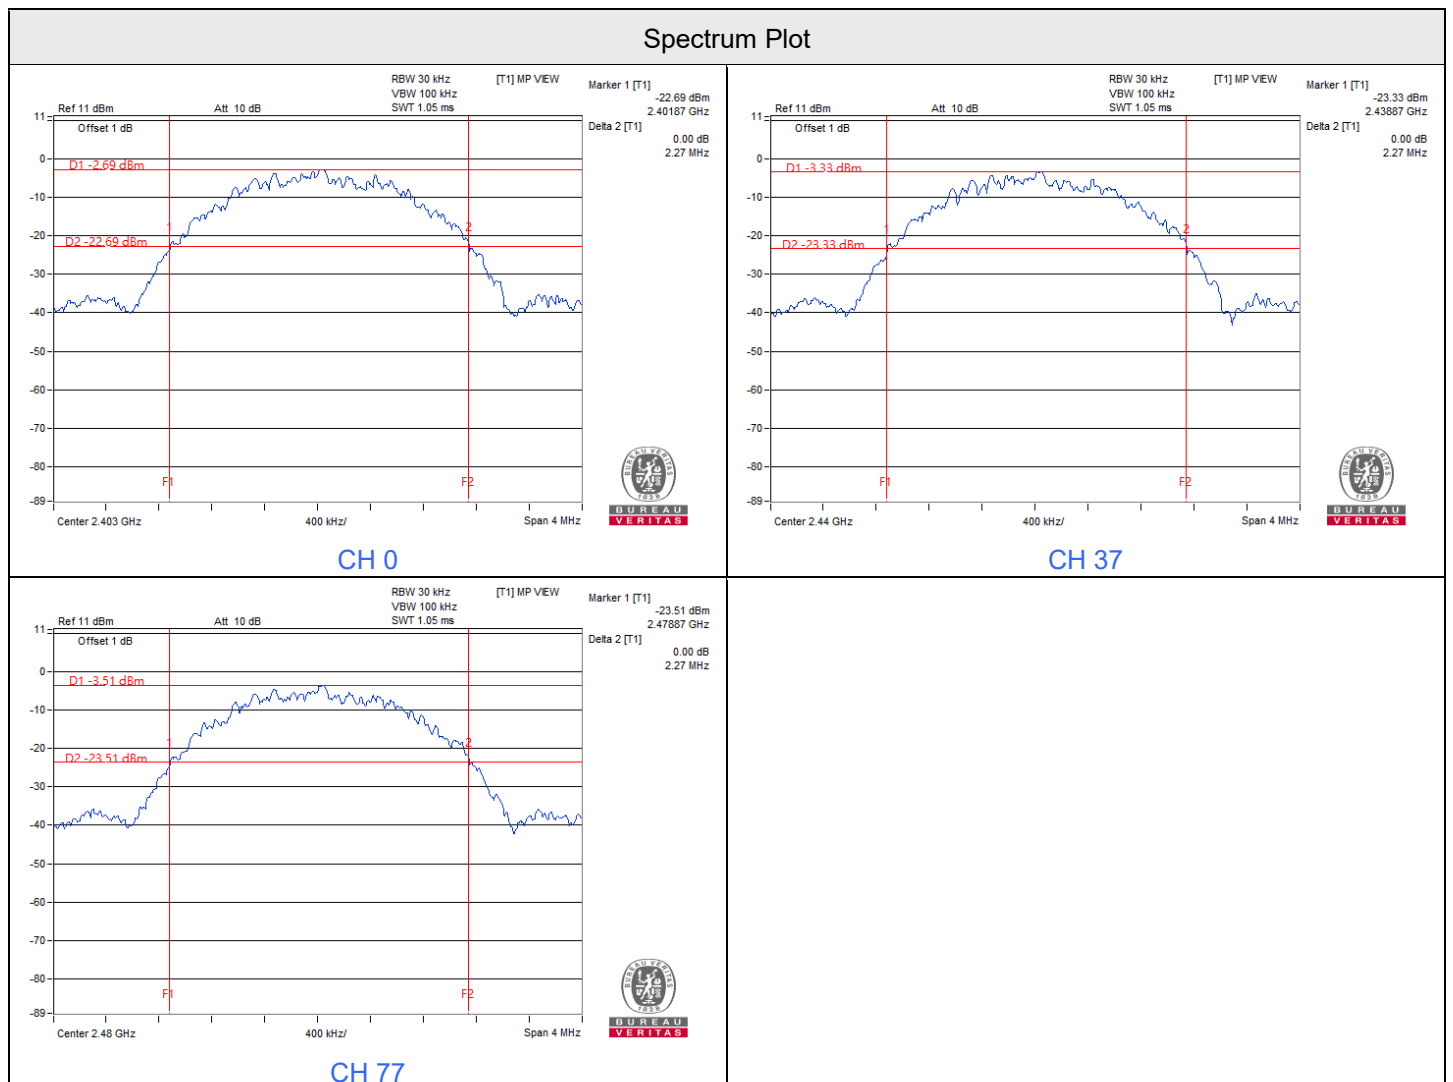

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---