

EMI TEST REPORT

FCC CERTIFICATION

Applicant:

Franklin Technology Inc

906 JEI Platz, 186, Gasan digital 1-ro, Geumcheon-gu,
Seoul, Korea (08502)

Date of Receipt: December 14, 2017

Date of Issue: January 10, 2018

Test Report No. HCT-EM-1801-FC030

FCC ID :

XHG-C801

Rule Part(s) / Standard(s): FCC CFR 47 PART 15 Subpart B Class B

FCC Classification: JBP (Part 15 B – Class B Computing Device Peripheral)

EUT Type: CPE

Model Name: C801

Date of Test: January 02, 2018 – January 05, 2018

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By



Wook Yi
Test Engineer
EMC Team
Certification Division

Reviewed By



Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



REVISION HISTORY

The revision history for this document is shown in table.

| Report No. | Issue Date | Information About Changes |
|-------------------|------------------|---------------------------|
| HCT-EM-1801-FC030 | January 10, 2018 | Initial Release |



TABLE OF CONTENTS

| | PAGE |
|---|------|
| 1. GENERAL INFORMATION | 4 |
| 1.1 Description of EUT | 4 |
| 1.2 Related Submittal(s) / Grant(s) | 5 |
| 1.3 Test Facility | 5 |
| 1.4 Calibration of Measuring Instrument | 5 |
| 1.5 Tested System Details | 6 |
| 1.6 Cable Description | 7 |
| 1.7 Noise Suppression Parts on Cable. (I/O Cable) | 8 |
| 2. MEASUREMENT UNCERTAINTY | 9 |
| 3. DESCRIPTION OF TEST | 10 |
| 3.1 Measurement of Conducted Emission..... | 10 |
| 3.2 Measurement of Radiated Measurements | 10 |
| 4. PRELIMINARY TEST | 13 |
| 4.1 Conducted Emission Test | 13 |
| 4.2 Radiated Emission Test | 13 |
| 5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY | 14 |
| 5.1 Conducted Emission Test | 14 |
| 5.2 Radiated Emission Test | 33 |
| 6. LIST OF TEST EQUIPMENT..... | 38 |
| 7. CONCLUSION..... | 39 |
| 8. APPENDIX A. TEST SETUP PHOTOGRAPHS | 40 |



1. GENERAL INFORMATION

1.1 Description of EUT

Its basic purpose is used for communications.

| | | |
|----------------|-------------------------------------|---------------------------|
| FCC ID | XHG-C801 | |
| Model | C801 | |
| EUT Type | CPE | |
| Frequency | LTE B25 | TX 1 850 MHz to 1 910 MHz |
| | LTE B26 | TX 814 MHz to 849 MHz |
| | LTE B41 | TX 2 496 MHz to 2 690 MHz |
| Normal Voltage | Adapter: 5 Vdc, POE adaptor: 48 Vdc | |



1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014.

| Measurement Facilities | Registration Number |
|--|---------------------|
| Radiated Field strength measurement facility 3 m Semi Anechoic chamber | 90661 |
| Radiated Field strength measurement facility 10 m Semi Anechoic chamber | |

1.4 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).



1.5 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

| Device Type | Model Name | Serial Number | Manufacturer | FCC ID / DoC |
|-----------------------|--------------------------------------|-------------------|--|--------------|
| EUT | C801 | - | LG | XHG-C801 |
| Switching adapter | DSA-10PFV-05 FUS 050200 | - | DVE | - |
| POE adapter | IpTIME INJECTOR1 (HS36-4800500KA) | - | ZHONGSHAN XIAOLAN HUI YANG ELECTRIC APPLIANCE FACTORY | |
| Notebook PC 1 | ProBook6560b | 5CB2053MXF | HP | |
| Notebook PC adapter 1 | PPP009D | WBGSV0BDD 1VLC | Delta Electronics (JIANGSU) | |
| Notebook PC 2 | LGP53 | 205CPVU000899 | LG | - |
| Notebook PC adapter 2 | ADP-90WH | - | Delta Electronics (JIANGSU) | DoC |
| Gateway | TL-WR747N | | TP Link | - |
| Gateway adapter | T120150-2H1 | | TP Link | - |
| Serial mouse | Serial 2 Button mouse | 02031069 | Radio Shack | FSUGMZE3 |



1.6 Cable Description

EUT & Switching adaptor

| Product Name | Port | Power Cord Shielded (Y/N) | I/O Cable Shielded (Y/N) | Length (m) |
|---------------|---------------|---------------------------|--------------------------|------------|
| EUT | DC IN | Y | N/A | (P) 1.5 |
| | WAN | N/A | N | (D) 3.0 |
| | LAN | N/A | N | (D) 3.0 |
| | SERIAL | N/A | Y | (D) 1.0 |
| Notebook PC 1 | RJ 45 | N/A | N | (D) 2.5 |
| | Serial(Mouse) | N/A | Y | (D)1.8 |
| | DC IN | N | N/A | (P) 1.8 |
| Gateway | DC IN | N | N/A | (P) 1.5 |
| Notebook PC 2 | DC IN | N | N/A | (P) 1.8 |

EUT & POE adaptor

| Product Name | Port | Power Cord Shielded (Y/N) | I/O Cable Shielded (Y/N) | Length (m) |
|---------------|----------------|---------------------------|--------------------------|------------|
| EUT | WAN | N | N | (P,D) 3.0 |
| | LAN | N | N | (P,D) 3.0 |
| | SERIAL | N/A | Y | (D) 1.0 |
| POE adaptor | LAN | N/A | N | (D) 3.0 |
| Notebook PC 1 | RJ 45 | N/A | N | (D) 2.5 |
| | Serial (Mouse) | N/A | Y | (D)1.8 |
| | DC IN | N | N/A | (P) 1.8 |
| Gateway | DC IN | N | N/A | (P) 1.5 |
| Notebook PC 2 | DC IN | N | N/A | (P) 1.8 |

* The marked “(D)” means the data cable and “(P)” means the power cable.



1.7 Noise Suppression Parts on Cable. (I/O Cable)

EUT & Switching adaptor

| Product Name | Port | Ferrite Bead (Y/N) | Location | Metal Hood (Y/N) | Location |
|---------------|----------------|--------------------|-----------------|------------------|-----------------|
| EUT | DC IN | N | N/A | Y | EUT End |
| | WAN | N | N/A | N | N/A |
| | LAN | N | N/A | N | N/A |
| | SERIAL | N | N/A | Y | Both End |
| Notebook PC | RJ 45 | Y | Both End | N | N/A |
| | Serial (Mouse) | N | N/A | Y | Notebook PC End |
| | DC IN | N | N/A | Y | Notebook End |
| Gateway | DC IN | N | N/A | Y | Gateway End |
| Notebook PC 2 | DC IN | Y | Notebook PC End | Y | Notebook PC End |

EUT & POE adaptor

| Product Name | Port | Ferrite Bead (Y/N) | Location | Metal Hood (Y/N) | Location |
|---------------|---------------|--------------------|-----------------|------------------|-----------------|
| EUT | WAN | N | N/A | N | N/A |
| | LAN | N | N/A | N | N/A |
| | SERIAL | N | N/A | Y | Both End |
| POE adaptor | LAN | N | N/A | N | N/A |
| Notebook PC 1 | RJ 45 | Y | Both End | N | N/A |
| | Serial(Mouse) | N | N/A | Y | Notebook PC End |
| | DC IN | N | N/A | Y | Notebook End |
| Gateway | DC IN | N | N/A | Y | Gateway End |
| Notebook PC 2 | DC IN | Y | Notebook PC End | Y | Notebook PC End |



2. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded Uncertainty (dB) |
|---|---------------------------|
| Conducted Emission (0.15 MHz to 30 MHz) | 1.82 dB ($k = 2$) |
| Radiated Emissions (30 MHz to 1 GHz) | 5.20 dB ($k = 2$) |
| Radiated Emissions (1 GHz to 18 GHz) | 5.24 dB ($k = 2$) |
| Radiated Emissions (18 GHz to 40 GHz) | 5.40 dB ($k = 2$) |



3. DESCRIPTION OF TEST

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

| Frequency (MHz) | Resolution Bandwidth (kHz) | Quasi-Peak (dB(μV)) | Average (dB(μV)) |
|-----------------|----------------------------|---------------------|------------------|
| 0.15 to 0.5 | 9 | 66 to 56* | 56 to 46* |
| 0.5 to 5 | 9 | 56 | 46 |
| 5 to 30 | 9 | 60 | 50 |

**Decreases with the logarithm of the frequency.*



3.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.(1 GHz to 40 GHz)

[Radiated Emission Limits]

| Frequency (MHz) | Antenna Distance (m) | Field Strength ($\mu\text{V}/\text{m}$) | Quasi-Peak ($\text{dB}(\mu\text{V})/\text{m}$) |
|-----------------|----------------------|--|--|
| 30 to 88 | 3 | 100 | 40.0 |
| 88 to 216 | 3 | 150 | 43.5 |
| 216 to 960 | 3 | 200 | 46.0 |
| Above 960 | 3 | 500 | 54.0 |
| Frequency (MHz) | Antenna Distance (m) | Peak ($\text{dB}(\mu\text{V})/\text{m}$) | Average ($\text{dB}(\mu\text{V})/\text{m}$) |
| Above 1 000 | 3 | 74 | 54 |




3.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table


| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range (MHz) |
|--|---|
| Below 1.705 | 30 |
| 1.705 to 108 | 1 000 |
| 108 to 500 | 2 000 |
| 500 to 1 000 | 5 000 |
| Above 1 000 | 5 th harmonic of the highest frequency or 40 GHz, whichever is lower |

3.3 Configuration of Tested System

EUT & Switching adaptor

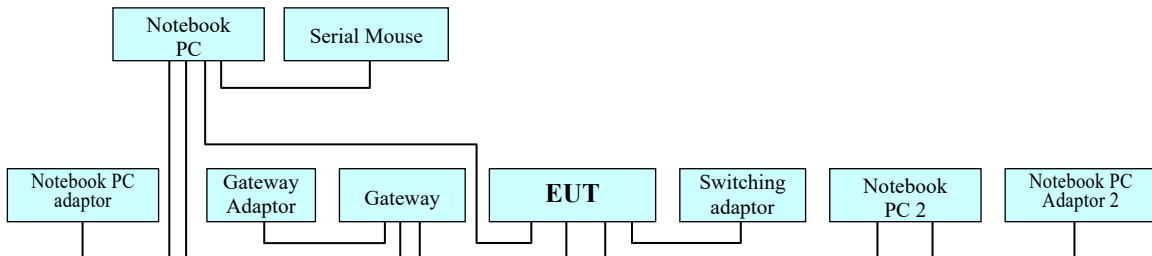

EUT & POE adaptor

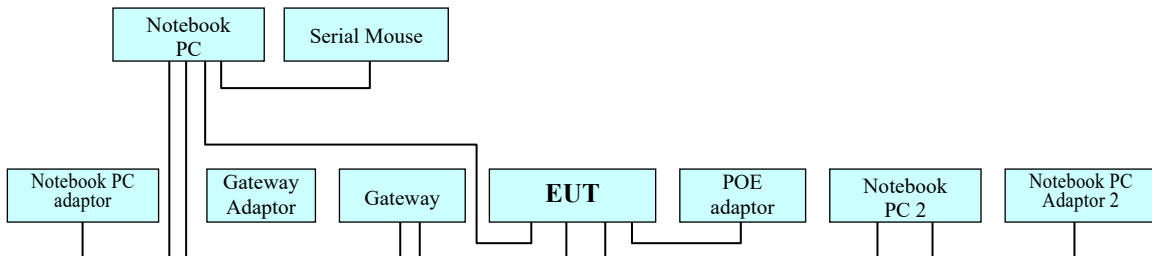



4. PRELIMINARY TEST

4.1 Conducted Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Idle mode (DC IN / WAN POE / LAN POE)

4.2 Radiated Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Idle mode (DC IN / WAN POE / LAN POE)



5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

5.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:


| | |
|----------------------|-------------------------------|
| Rule Part / Standard | FCC PART 15 Subpart B Class B |
| Detector | Quasi-Peak, CISPR-Average |
| Bandwidth | 9 kHz (6 dB) |
| Operation Mode | Data Communication mode |
| Kind of Test Site | Shielded Room |
| Temperature | 20.2 °C |
| Relative Humidity | 38.6 % |
| Test Date | January 03, 2018 |

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage



Figure 1: Conducted Emission, Idle Mode (DC IN), Line (L1)

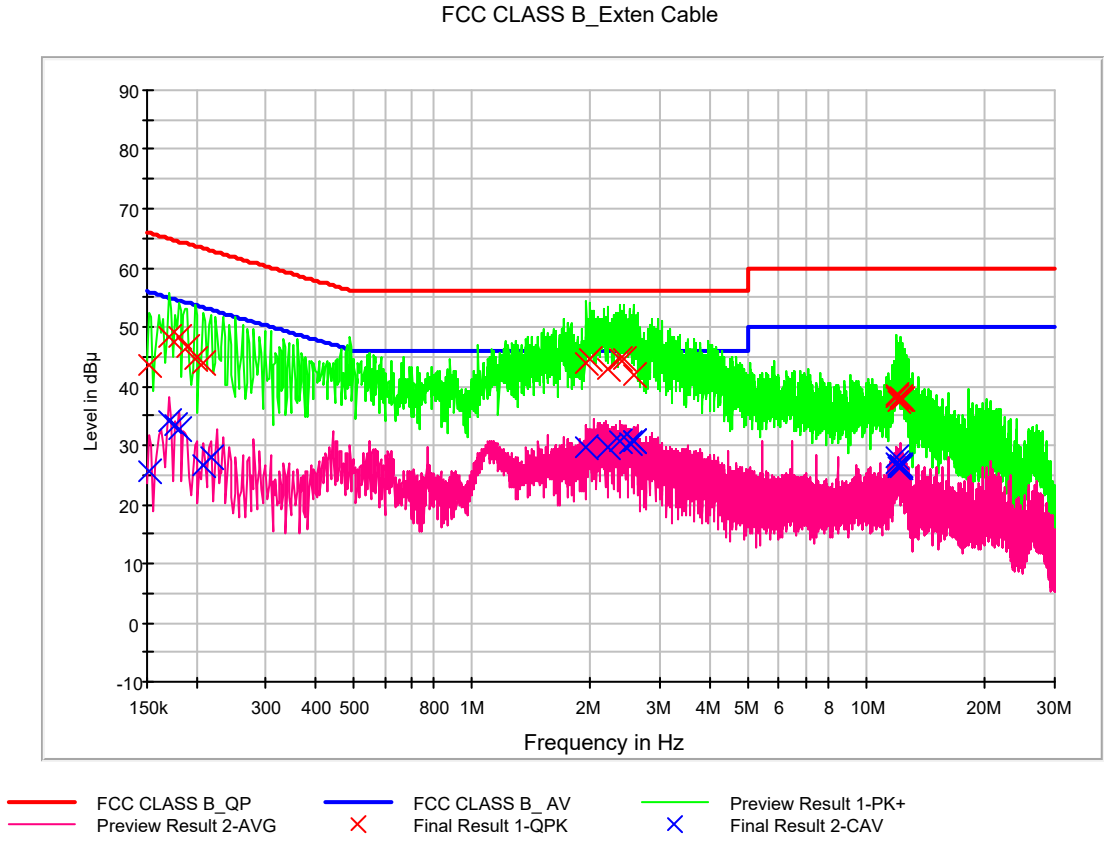



QuasiPeak Final Result, Line (L1)

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|
| 0.152000 | 43.5 | 9.000 | L1 | 9.7 | 22.4 | 65.9 |
| 0.170000 | 48.3 | 9.000 | L1 | 9.7 | 16.6 | 65.0 |
| 0.180000 | 48.3 | 9.000 | L1 | 9.7 | 16.2 | 64.5 |
| 0.190000 | 46.5 | 9.000 | L1 | 9.7 | 17.5 | 64.0 |
| 0.198000 | 44.6 | 9.000 | L1 | 9.7 | 19.1 | 63.7 |
| 0.208000 | 43.8 | 9.000 | L1 | 9.7 | 19.5 | 63.3 |
| 1.954000 | 43.7 | 9.000 | L1 | 9.8 | 12.3 | 56.0 |
| 1.992000 | 44.6 | 9.000 | L1 | 9.8 | 11.4 | 56.0 |
| 2.206000 | 43.0 | 9.000 | L1 | 9.8 | 13.0 | 56.0 |
| 2.360000 | 44.5 | 9.000 | L1 | 9.8 | 11.5 | 56.0 |
| 2.416000 | 44.4 | 9.000 | L1 | 9.8 | 11.6 | 56.0 |
| 2.560000 | 42.0 | 9.000 | L1 | 9.9 | 14.0 | 56.0 |
| 11.892000 | 38.4 | 9.000 | L1 | 10.2 | 21.6 | 60.0 |
| 11.956000 | 38.0 | 9.000 | L1 | 10.2 | 22.0 | 60.0 |
| 12.110000 | 37.6 | 9.000 | L1 | 10.2 | 22.4 | 60.0 |
| 12.166000 | 38.0 | 9.000 | L1 | 10.2 | 22.0 | 60.0 |
| 12.240000 | 38.0 | 9.000 | L1 | 10.2 | 22.0 | 60.0 |
| 12.290000 | 37.7 | 9.000 | L1 | 10.2 | 22.3 | 60.0 |




CAverage Final Result, Line (L1)

| Frequency (MHz) | CAverage (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-----------------|-----------------|------|------------|-------------|--------------|
| 0.152000 | 25.6 | 9.000 | L1 | 9.7 | 30.3 | 55.9 |
| 0.170000 | 33.9 | 9.000 | L1 | 9.7 | 21.0 | 55.0 |
| 0.176000 | 33.4 | 9.000 | L1 | 9.7 | 21.3 | 54.7 |
| 0.180000 | 32.8 | 9.000 | L1 | 9.7 | 21.7 | 54.5 |
| 0.208000 | 26.6 | 9.000 | L1 | 9.7 | 26.7 | 53.3 |
| 0.218000 | 27.8 | 9.000 | L1 | 9.7 | 25.1 | 52.9 |
| 1.954000 | 29.7 | 9.000 | L1 | 9.8 | 16.3 | 46.0 |
| 2.206000 | 29.8 | 9.000 | L1 | 9.8 | 16.2 | 46.0 |
| 2.360000 | 30.7 | 9.000 | L1 | 9.8 | 15.3 | 46.0 |
| 2.516000 | 30.4 | 9.000 | L1 | 9.9 | 15.6 | 46.0 |
| 2.560000 | 30.7 | 9.000 | L1 | 9.9 | 15.3 | 46.0 |
| 2.570000 | 30.6 | 9.000 | L1 | 9.9 | 15.4 | 46.0 |
| 11.892000 | 28.1 | 9.000 | L1 | 10.2 | 21.9 | 50.0 |
| 11.956000 | 26.8 | 9.000 | L1 | 10.2 | 23.2 | 50.0 |
| 12.102000 | 26.5 | 9.000 | L1 | 10.2 | 23.5 | 50.0 |
| 12.112000 | 26.4 | 9.000 | L1 | 10.2 | 23.6 | 50.0 |
| 12.214000 | 26.3 | 9.000 | L1 | 10.2 | 23.7 | 50.0 |
| 12.240000 | 26.4 | 9.000 | L1 | 10.2 | 23.6 | 50.0 |



Figure 2: Conducted Emission, Idle Mode (DC IN), Line (N)

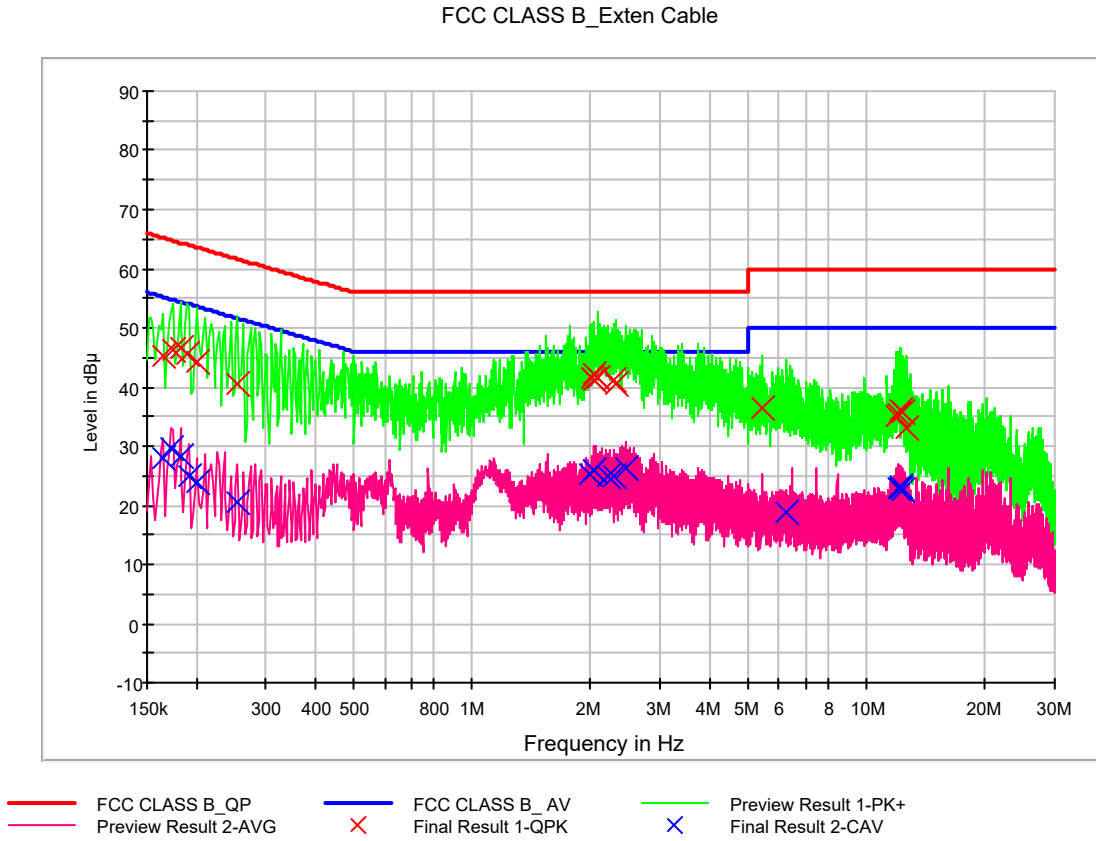



QuasiPeak Final Result, Line (N)

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|
| 0.164000 | 45.3 | 9.000 | N | 9.7 | 20.0 | 65.3 |
| 0.174000 | 46.4 | 9.000 | N | 9.7 | 18.4 | 64.8 |
| 0.182000 | 46.7 | 9.000 | N | 9.7 | 17.7 | 64.4 |
| 0.190000 | 45.5 | 9.000 | N | 9.7 | 18.5 | 64.0 |
| 0.200000 | 44.3 | 9.000 | N | 9.7 | 19.3 | 63.6 |
| 0.254000 | 40.4 | 9.000 | N | 9.7 | 21.2 | 61.6 |
| 2.022000 | 41.5 | 9.000 | N | 9.8 | 14.5 | 56.0 |
| 2.028000 | 41.3 | 9.000 | N | 9.8 | 14.7 | 56.0 |
| 2.036000 | 42.4 | 9.000 | N | 9.8 | 13.6 | 56.0 |
| 2.084000 | 41.6 | 9.000 | N | 9.8 | 14.4 | 56.0 |
| 2.282000 | 41.1 | 9.000 | N | 9.8 | 14.9 | 56.0 |
| 2.322000 | 40.5 | 9.000 | N | 9.8 | 15.5 | 56.0 |
| 5.460000 | 36.5 | 9.000 | N | 10.0 | 23.5 | 60.0 |
| 11.968000 | 35.0 | 9.000 | N | 10.3 | 25.0 | 60.0 |
| 12.002000 | 35.3 | 9.000 | N | 10.3 | 24.7 | 60.0 |
| 12.194000 | 36.1 | 9.000 | N | 10.3 | 23.9 | 60.0 |
| 12.290000 | 35.9 | 9.000 | N | 10.4 | 24.1 | 60.0 |
| 12.644000 | 33.1 | 9.000 | N | 10.4 | 26.9 | 60.0 |




CAverage Final Result, Line (N)

| Frequency (MHz) | CAverage (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-----------------|-----------------|------|------------|-------------|--------------|
| 0.164000 | 28.1 | 9.000 | N | 9.7 | 27.1 | 55.3 |
| 0.172000 | 29.7 | 9.000 | N | 9.7 | 25.1 | 54.9 |
| 0.182000 | 28.3 | 9.000 | N | 9.7 | 26.1 | 54.4 |
| 0.192000 | 25.1 | 9.000 | N | 9.7 | 28.9 | 53.9 |
| 0.200000 | 23.8 | 9.000 | N | 9.7 | 29.8 | 53.6 |
| 0.254000 | 20.6 | 9.000 | N | 9.7 | 31.0 | 51.6 |
| 1.994000 | 25.3 | 9.000 | N | 9.8 | 20.7 | 46.0 |
| 2.028000 | 25.8 | 9.000 | N | 9.8 | 20.2 | 46.0 |
| 2.036000 | 26.1 | 9.000 | N | 9.8 | 19.9 | 46.0 |
| 2.210000 | 24.7 | 9.000 | N | 9.8 | 21.3 | 46.0 |
| 2.282000 | 24.8 | 9.000 | N | 9.8 | 21.2 | 46.0 |
| 2.464000 | 26.2 | 9.000 | N | 9.8 | 19.8 | 46.0 |
| 6.256000 | 18.7 | 9.000 | N | 10.1 | 31.3 | 50.0 |
| 12.002000 | 22.7 | 9.000 | N | 10.3 | 27.3 | 50.0 |
| 12.194000 | 23.4 | 9.000 | N | 10.3 | 26.6 | 50.0 |
| 12.212000 | 22.7 | 9.000 | N | 10.3 | 27.3 | 50.0 |
| 12.240000 | 22.7 | 9.000 | N | 10.3 | 27.3 | 50.0 |
| 12.268000 | 22.6 | 9.000 | N | 10.3 | 27.4 | 50.0 |



Figure 3: Conducted Emission, Idle Mode (LAN POE), Line (L1)

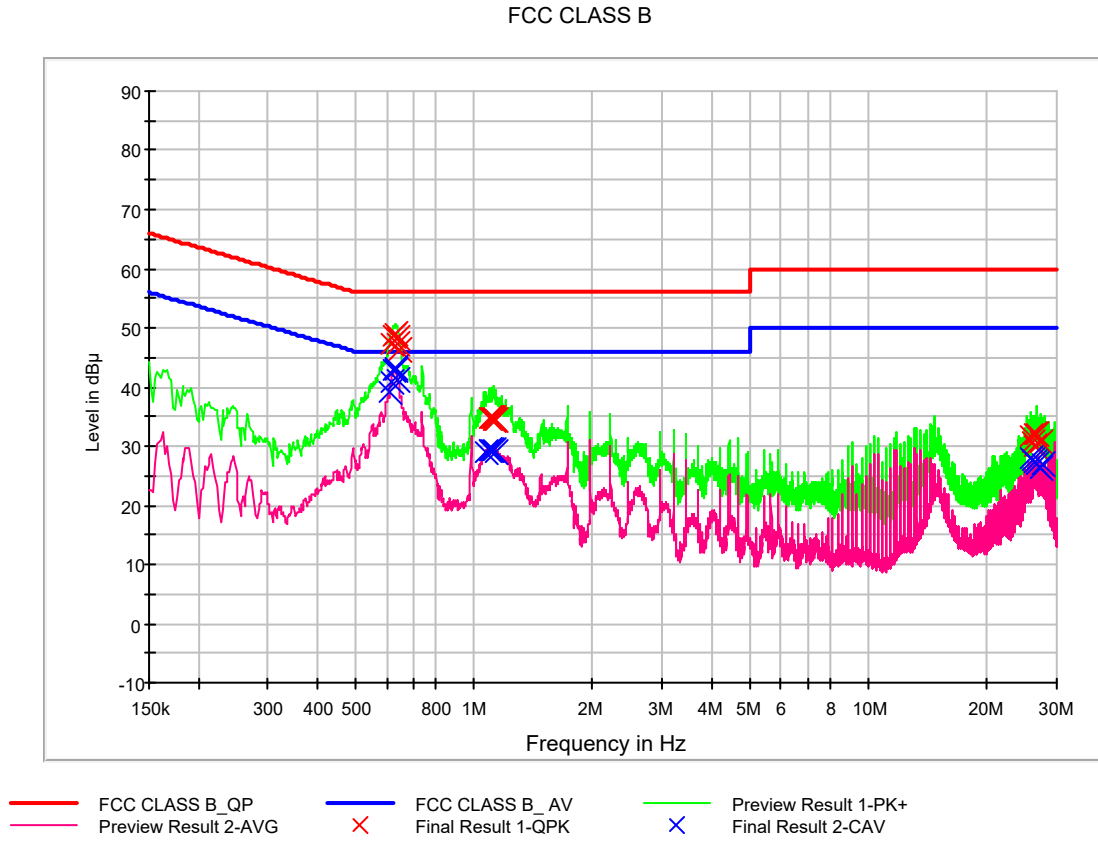



QuasiPeak Final Result, Line (L1)

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|
| 0.616000 | 47.3 | 9.000 | L1 | 9.7 | 8.7 | 56.0 |
| 0.624000 | 48.5 | 9.000 | L1 | 9.7 | 7.5 | 56.0 |
| 0.632000 | 48.8 | 9.000 | L1 | 9.7 | 7.2 | 56.0 |
| 0.636000 | 48.4 | 9.000 | L1 | 9.7 | 7.6 | 56.0 |
| 0.642000 | 47.4 | 9.000 | L1 | 9.7 | 8.6 | 56.0 |
| 0.646000 | 46.4 | 9.000 | L1 | 9.7 | 9.6 | 56.0 |
| 1.090000 | 34.9 | 9.000 | L1 | 9.7 | 21.1 | 56.0 |
| 1.104000 | 34.8 | 9.000 | L1 | 9.7 | 21.2 | 56.0 |
| 1.108000 | 34.8 | 9.000 | L1 | 9.7 | 21.2 | 56.0 |
| 1.122000 | 34.6 | 9.000 | L1 | 9.7 | 21.4 | 56.0 |
| 1.128000 | 34.3 | 9.000 | L1 | 9.7 | 21.7 | 56.0 |
| 1.138000 | 34.3 | 9.000 | L1 | 9.7 | 21.7 | 56.0 |
| 25.862000 | 31.8 | 9.000 | L1 | 10.1 | 28.2 | 60.0 |
| 26.104000 | 30.7 | 9.000 | L1 | 10.1 | 29.3 | 60.0 |
| 26.354000 | 32.0 | 9.000 | L1 | 10.1 | 28.0 | 60.0 |
| 26.488000 | 29.8 | 9.000 | L1 | 10.1 | 30.2 | 60.0 |
| 26.598000 | 32.1 | 9.000 | L1 | 10.1 | 27.9 | 60.0 |
| 27.336000 | 30.7 | 9.000 | L1 | 10.1 | 29.3 | 60.0 |




CAverage Final Result, Line (L1)

| Frequency (MHz) | CAverage (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-----------------|-----------------|------|------------|-------------|--------------|
| 0.608000 | 39.3 | 9.000 | L1 | 9.7 | 6.7 | 46.0 |
| 0.616000 | 40.8 | 9.000 | L1 | 9.7 | 5.2 | 46.0 |
| 0.626000 | 42.8 | 9.000 | L1 | 9.7 | 3.2 | 46.0 |
| 0.630000 | 43.2 | 9.000 | L1 | 9.7 | 2.8 | 46.0 |
| 0.634000 | 42.8 | 9.000 | L1 | 9.7 | 3.2 | 46.0 |
| 0.642000 | 41.0 | 9.000 | L1 | 9.7 | 5.0 | 46.0 |
| 1.074000 | 28.9 | 9.000 | L1 | 9.7 | 17.1 | 46.0 |
| 1.090000 | 29.3 | 9.000 | L1 | 9.7 | 16.7 | 46.0 |
| 1.094000 | 29.3 | 9.000 | L1 | 9.7 | 16.7 | 46.0 |
| 1.104000 | 29.3 | 9.000 | L1 | 9.7 | 16.7 | 46.0 |
| 1.122000 | 29.3 | 9.000 | L1 | 9.7 | 16.7 | 46.0 |
| 1.134000 | 29.1 | 9.000 | L1 | 9.7 | 16.9 | 46.0 |
| 25.860000 | 27.9 | 9.000 | L1 | 10.1 | 22.1 | 50.0 |
| 26.108000 | 27.6 | 9.000 | L1 | 10.1 | 22.4 | 50.0 |
| 26.354000 | 27.4 | 9.000 | L1 | 10.1 | 22.6 | 50.0 |
| 26.600000 | 27.1 | 9.000 | L1 | 10.1 | 22.9 | 50.0 |
| 27.336000 | 26.4 | 9.000 | L1 | 10.1 | 23.6 | 50.0 |
| 27.584000 | 26.8 | 9.000 | L1 | 10.1 | 23.2 | 50.0 |



Figure 4: Conducted Emission, Idle Mode (LAN POE), Line (N)

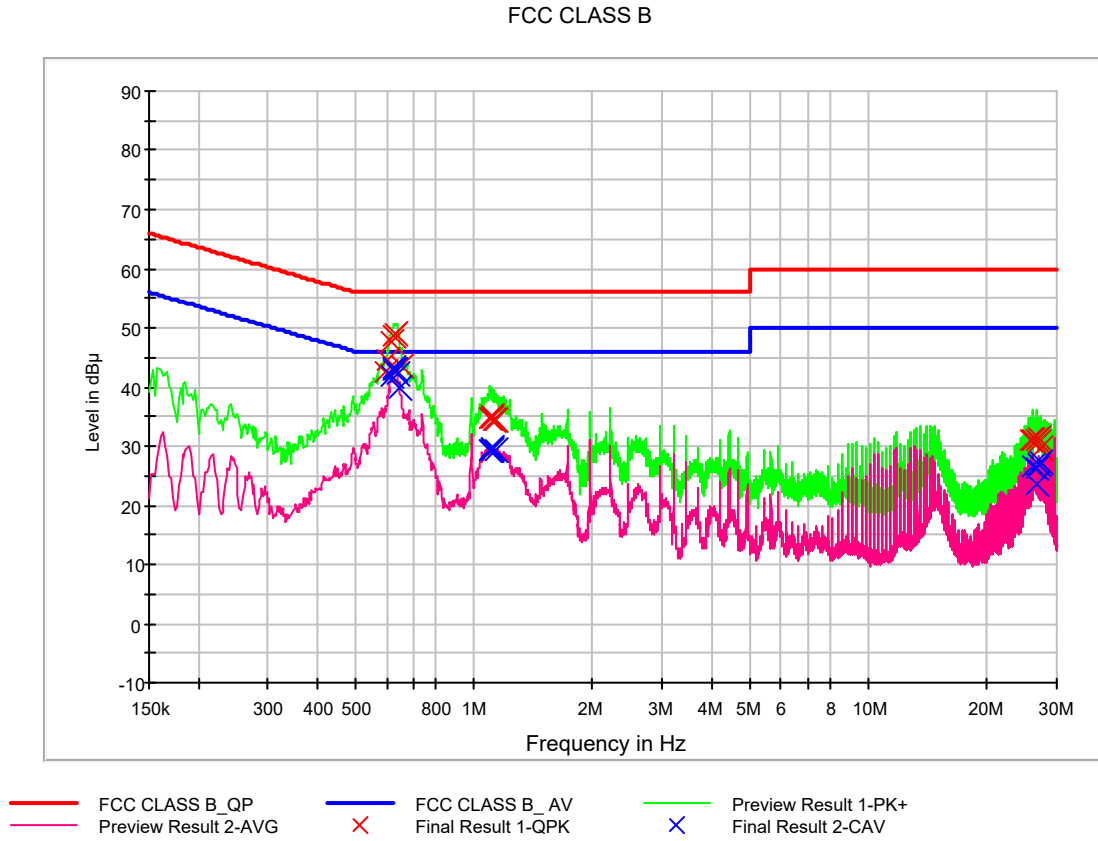



QuasiPeak Final Result, Line (N)

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|
| 0.594000 | 42.4 | 9.000 | N | 9.7 | 13.6 | 56.0 |
| 0.604000 | 44.5 | 9.000 | N | 9.7 | 11.5 | 56.0 |
| 0.618000 | 47.8 | 9.000 | N | 9.7 | 8.2 | 56.0 |
| 0.624000 | 48.7 | 9.000 | N | 9.7 | 7.3 | 56.0 |
| 0.634000 | 48.8 | 9.000 | N | 9.7 | 7.2 | 56.0 |
| 0.654000 | 43.4 | 9.000 | N | 9.7 | 12.6 | 56.0 |
| 1.096000 | 34.7 | 9.000 | N | 9.7 | 21.3 | 56.0 |
| 1.102000 | 35.0 | 9.000 | N | 9.7 | 21.0 | 56.0 |
| 1.106000 | 34.9 | 9.000 | N | 9.7 | 21.1 | 56.0 |
| 1.110000 | 35.0 | 9.000 | N | 9.7 | 21.0 | 56.0 |
| 1.126000 | 34.4 | 9.000 | N | 9.7 | 21.6 | 56.0 |
| 1.136000 | 34.5 | 9.000 | N | 9.7 | 21.5 | 56.0 |
| 25.864000 | 31.1 | 9.000 | N | 10.3 | 28.9 | 60.0 |
| 26.110000 | 31.0 | 9.000 | N | 10.3 | 29.0 | 60.0 |
| 26.602000 | 31.0 | 9.000 | N | 10.3 | 29.0 | 60.0 |
| 26.850000 | 30.6 | 9.000 | N | 10.3 | 29.4 | 60.0 |
| 27.094000 | 31.2 | 9.000 | N | 10.3 | 28.8 | 60.0 |
| 27.342000 | 29.8 | 9.000 | N | 10.3 | 30.2 | 60.0 |




CAverage Final Result, Line (N)

| Frequency (MHz) | CAverage (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-----------------|-----------------|------|------------|-------------|--------------|
| 0.620000 | 41.8 | 9.000 | N | 9.7 | 4.2 | 46.0 |
| 0.624000 | 42.7 | 9.000 | N | 9.7 | 3.3 | 46.0 |
| 0.628000 | 43.2 | 9.000 | N | 9.7 | 2.8 | 46.0 |
| 0.632000 | 43.0 | 9.000 | N | 9.7 | 3.0 | 46.0 |
| 0.638000 | 42.2 | 9.000 | N | 9.7 | 3.8 | 46.0 |
| 0.646000 | 40.0 | 9.000 | N | 9.7 | 6.0 | 46.0 |
| 1.092000 | 29.2 | 9.000 | N | 9.7 | 16.8 | 46.0 |
| 1.096000 | 29.5 | 9.000 | N | 9.7 | 16.5 | 46.0 |
| 1.102000 | 29.5 | 9.000 | N | 9.7 | 16.5 | 46.0 |
| 1.106000 | 29.5 | 9.000 | N | 9.7 | 16.5 | 46.0 |
| 1.110000 | 29.6 | 9.000 | N | 9.7 | 16.4 | 46.0 |
| 1.136000 | 29.2 | 9.000 | N | 9.7 | 16.8 | 46.0 |
| 26.110000 | 26.6 | 9.000 | N | 10.3 | 23.4 | 50.0 |
| 26.602000 | 26.4 | 9.000 | N | 10.3 | 23.6 | 50.0 |
| 26.780000 | 23.7 | 9.000 | N | 10.3 | 26.3 | 50.0 |
| 26.848000 | 26.8 | 9.000 | N | 10.3 | 23.2 | 50.0 |
| 27.094000 | 27.0 | 9.000 | N | 10.3 | 23.0 | 50.0 |
| 27.340000 | 27.2 | 9.000 | N | 10.3 | 22.8 | 50.0 |



Figure 5: Conducted Emission, Idle Mode (WAN POE), Line (L1)

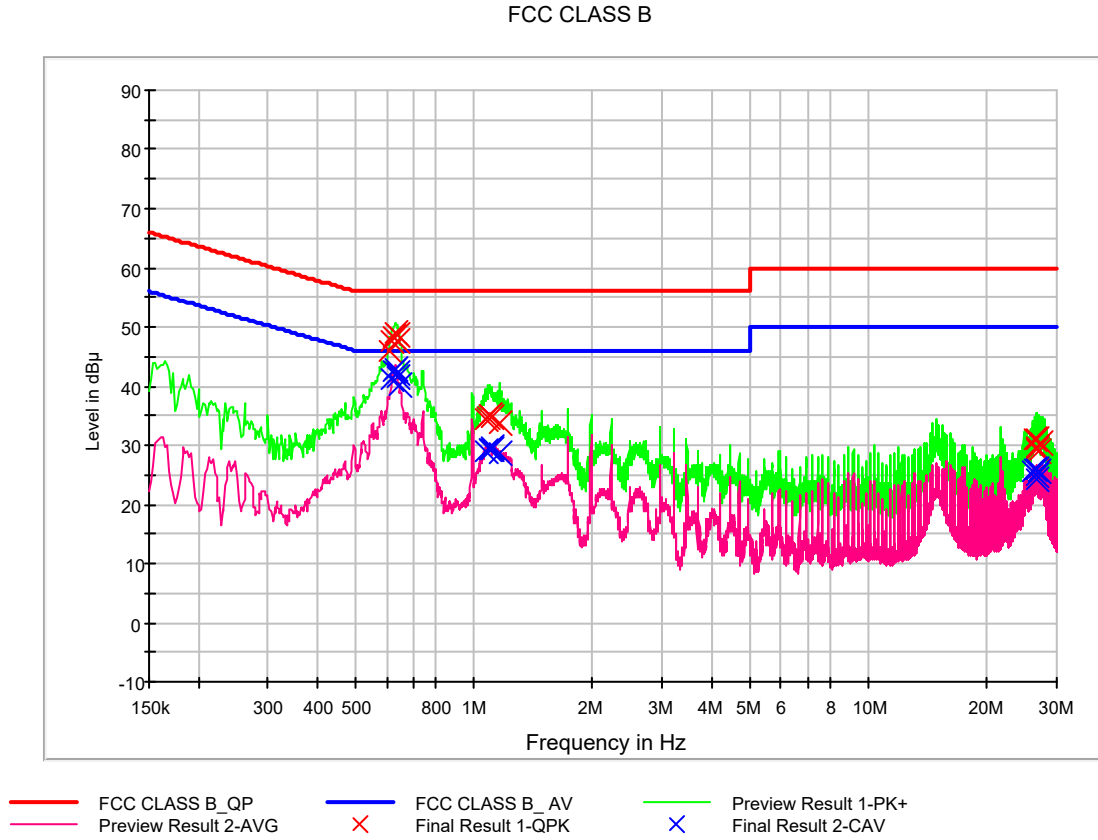



QuasiPeak Final Result, Line (L1)

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|
| 0.612000 | 46.0 | 9.000 | L1 | 9.7 | 10.0 | 56.0 |
| 0.620000 | 47.8 | 9.000 | L1 | 9.7 | 8.2 | 56.0 |
| 0.624000 | 48.4 | 9.000 | L1 | 9.7 | 7.6 | 56.0 |
| 0.632000 | 48.9 | 9.000 | L1 | 9.7 | 7.1 | 56.0 |
| 0.636000 | 48.5 | 9.000 | L1 | 9.7 | 7.5 | 56.0 |
| 0.642000 | 47.6 | 9.000 | L1 | 9.7 | 8.4 | 56.0 |
| 1.074000 | 34.4 | 9.000 | L1 | 9.7 | 21.6 | 56.0 |
| 1.088000 | 34.9 | 9.000 | L1 | 9.7 | 21.1 | 56.0 |
| 1.092000 | 35.0 | 9.000 | L1 | 9.7 | 21.0 | 56.0 |
| 1.100000 | 35.1 | 9.000 | L1 | 9.7 | 20.9 | 56.0 |
| 1.112000 | 34.7 | 9.000 | L1 | 9.7 | 21.3 | 56.0 |
| 1.162000 | 33.8 | 9.000 | L1 | 9.7 | 22.2 | 56.0 |
| 26.470000 | 31.0 | 9.000 | L1 | 10.1 | 29.0 | 60.0 |
| 26.550000 | 29.6 | 9.000 | L1 | 10.1 | 30.4 | 60.0 |
| 26.606000 | 29.4 | 9.000 | L1 | 10.1 | 30.6 | 60.0 |
| 26.718000 | 31.1 | 9.000 | L1 | 10.1 | 28.9 | 60.0 |
| 26.958000 | 28.9 | 9.000 | L1 | 10.1 | 31.1 | 60.0 |
| 27.460000 | 30.5 | 9.000 | L1 | 10.1 | 29.5 | 60.0 |




CAverage Final Result, Line (L1)

| Frequency (MHz) | CAverage (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-----------------|-----------------|------|------------|-------------|--------------|
| 0.620000 | 41.2 | 9.000 | L1 | 9.7 | 4.8 | 46.0 |
| 0.626000 | 42.7 | 9.000 | L1 | 9.7 | 3.3 | 46.0 |
| 0.632000 | 42.8 | 9.000 | L1 | 9.7 | 3.2 | 46.0 |
| 0.636000 | 42.4 | 9.000 | L1 | 9.7 | 3.6 | 46.0 |
| 0.640000 | 41.4 | 9.000 | L1 | 9.7 | 4.6 | 46.0 |
| 0.644000 | 40.2 | 9.000 | L1 | 9.7 | 5.8 | 46.0 |
| 1.074000 | 28.9 | 9.000 | L1 | 9.7 | 17.1 | 46.0 |
| 1.094000 | 29.3 | 9.000 | L1 | 9.7 | 16.7 | 46.0 |
| 1.100000 | 29.5 | 9.000 | L1 | 9.7 | 16.5 | 46.0 |
| 1.104000 | 29.5 | 9.000 | L1 | 9.7 | 16.5 | 46.0 |
| 1.112000 | 29.4 | 9.000 | L1 | 9.7 | 16.6 | 46.0 |
| 1.162000 | 28.6 | 9.000 | L1 | 9.7 | 17.4 | 46.0 |
| 25.974000 | 25.5 | 9.000 | L1 | 10.1 | 24.5 | 50.0 |
| 26.470000 | 26.1 | 9.000 | L1 | 10.1 | 23.9 | 50.0 |
| 26.550000 | 24.8 | 9.000 | L1 | 10.1 | 25.2 | 50.0 |
| 26.606000 | 24.3 | 9.000 | L1 | 10.1 | 25.7 | 50.0 |
| 26.718000 | 25.8 | 9.000 | L1 | 10.1 | 24.2 | 50.0 |
| 27.158000 | 25.5 | 9.000 | L1 | 10.1 | 24.6 | 50.0 |



Figure 6: Conducted Emission, Idle Mode (WAN POE), Line (N)

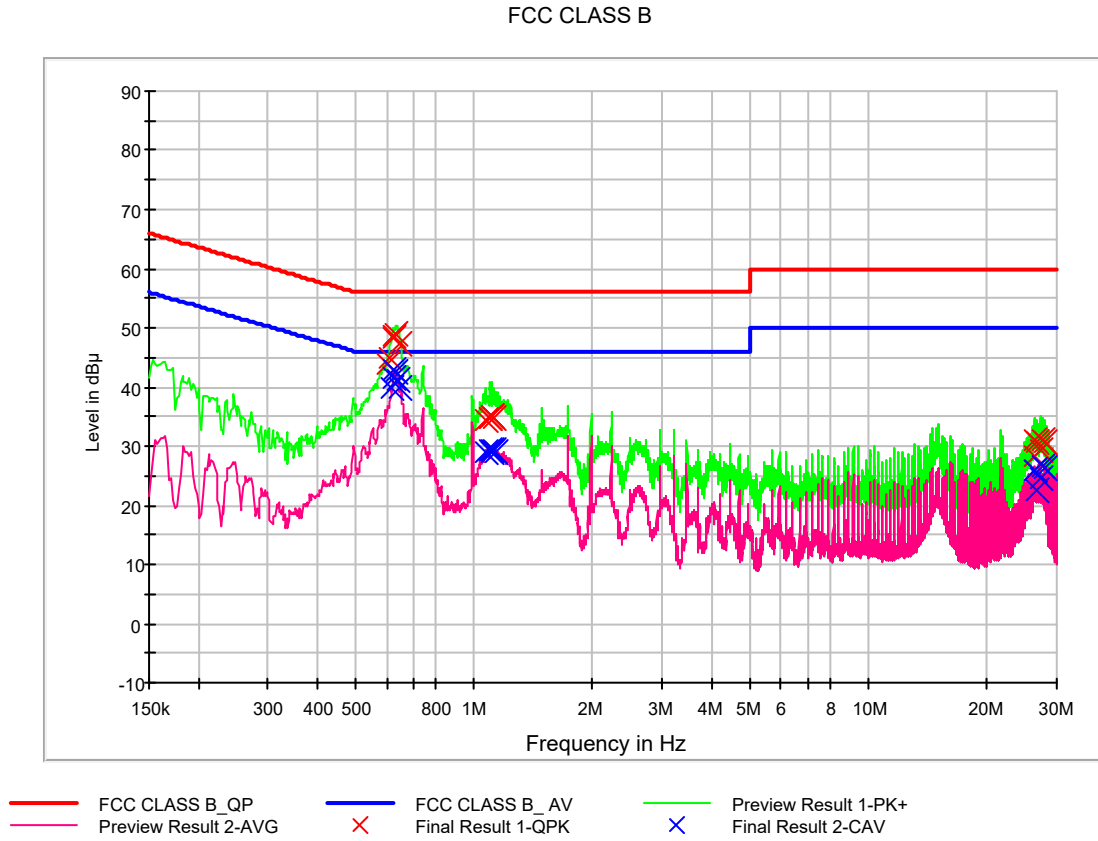



QuasiPeak Final Result, Line (N)

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|
| 0.606000 | 44.0 | 9.000 | N | 9.7 | 12.0 | 56.0 |
| 0.610000 | 45.0 | 9.000 | N | 9.7 | 11.0 | 56.0 |
| 0.624000 | 48.2 | 9.000 | N | 9.7 | 7.8 | 56.0 |
| 0.628000 | 48.7 | 9.000 | N | 9.7 | 7.3 | 56.0 |
| 0.634000 | 48.9 | 9.000 | N | 9.7 | 7.1 | 56.0 |
| 0.644000 | 47.4 | 9.000 | N | 9.7 | 8.6 | 56.0 |
| 1.072000 | 34.3 | 9.000 | N | 9.7 | 21.7 | 56.0 |
| 1.096000 | 34.6 | 9.000 | N | 9.7 | 21.4 | 56.0 |
| 1.100000 | 34.9 | 9.000 | N | 9.7 | 21.1 | 56.0 |
| 1.104000 | 35.1 | 9.000 | N | 9.7 | 20.9 | 56.0 |
| 1.112000 | 34.9 | 9.000 | N | 9.7 | 21.1 | 56.0 |
| 1.124000 | 34.7 | 9.000 | N | 9.7 | 21.4 | 56.0 |
| 26.472000 | 31.1 | 9.000 | N | 10.3 | 28.9 | 60.0 |
| 26.476000 | 28.4 | 9.000 | N | 10.3 | 31.6 | 60.0 |
| 26.610000 | 30.6 | 9.000 | N | 10.3 | 29.4 | 60.0 |
| 27.464000 | 29.3 | 9.000 | N | 10.3 | 30.7 | 60.0 |
| 27.710000 | 31.2 | 9.000 | N | 10.3 | 28.8 | 60.0 |
| 27.952000 | 30.5 | 9.000 | N | 10.3 | 29.5 | 60.0 |



CAverage Final Result, Line (N)

| Frequency (MHz) | CAverage (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-----------------|-----------------|------|------------|-------------|--------------|
| 0.618000 | 39.8 | 9.000 | N | 9.7 | 6.2 | 46.0 |
| 0.622000 | 41.5 | 9.000 | N | 9.7 | 4.5 | 46.0 |
| 0.626000 | 43.0 | 9.000 | N | 9.7 | 3.0 | 46.0 |
| 0.634000 | 42.7 | 9.000 | N | 9.7 | 3.3 | 46.0 |
| 0.640000 | 41.3 | 9.000 | N | 9.7 | 4.7 | 46.0 |
| 0.648000 | 39.9 | 9.000 | N | 9.7 | 6.1 | 46.0 |
| 1.072000 | 28.8 | 9.000 | N | 9.7 | 17.2 | 46.0 |
| 1.094000 | 29.2 | 9.000 | N | 9.7 | 16.8 | 46.0 |
| 1.102000 | 29.4 | 9.000 | N | 9.7 | 16.6 | 46.0 |
| 1.112000 | 29.1 | 9.000 | N | 9.7 | 16.9 | 46.0 |
| 1.122000 | 29.2 | 9.000 | N | 9.7 | 16.8 | 46.0 |
| 1.138000 | 29.1 | 9.000 | N | 9.7 | 16.9 | 46.0 |
| 26.226000 | 26.1 | 9.000 | N | 10.3 | 23.9 | 50.0 |
| 26.472000 | 25.9 | 9.000 | N | 10.3 | 24.1 | 50.0 |
| 26.670000 | 22.7 | 9.000 | N | 10.3 | 27.3 | 50.0 |
| 27.342000 | 24.6 | 9.000 | N | 10.3 | 25.4 | 50.0 |
| 27.710000 | 26.5 | 9.000 | N | 10.3 | 23.5 | 50.0 |
| 27.954000 | 26.4 | 9.000 | N | 10.3 | 23.6 | 50.0 |



5.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

| | |
|----------------------|-------------------------------|
| Rule Part / Standard | FCC PART 15 Subpart B Class B |
| Detector | Quasi-Peak |
| Bandwidth | 120 kHz (6 dB) |
| Kind of Test Site | 3 m semi anechoic chamber |
| Temperature | 20.4 °C |
| Relative Humidity | 38.6 % |
| Test Date | January 02, 2018 |

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



Radiated Emission, Idle Mode (DC IN)

| Frequency (MHz) | Quasi Peak (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|---------------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 30.792806 | 33.0 | 113.0 | V | 109.0 | 21.8 | 7.0 | 40.0 |
| 55.324000 | 37.2 | 100.0 | V | 342.0 | 23.1 | 2.8 | 40.0 |
| 62.236000 | 35.2 | 100.0 | V | 341.0 | 22.5 | 4.8 | 40.0 |
| 125.015200 | 37.5 | 100.0 | V | 300.0 | 21.5 | 6.0 | 43.5 |
| 500.006400 | 39.3 | 100.0 | H | 202.0 | 28.9 | 6.7 | 46.0 |
| 875.008800 | 42.7 | 100.0 | H | 179.0 | 34.9 | 3.3 | 46.0 |

Radiated Emission, Idle Mode (LAN POE)

| Frequency (MHz) | Quasi Peak (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|---------------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 30.782150 | 36.7 | 100.0 | V | 210.0 | 21.8 | 3.3 | 40.0 |
| 56.795200 | 35.1 | 114.0 | V | 12.0 | 23.0 | 4.9 | 40.0 |
| 63.997600 | 36.5 | 123.0 | V | 0.0 | 22.2 | 3.5 | 40.0 |
| 110.824800 | 34.5 | 100.0 | V | 321.0 | 19.9 | 9.0 | 43.5 |
| 500.001600 | 40.8 | 100.0 | H | 159.0 | 28.9 | 5.2 | 46.0 |
| 875.030400 | 40.7 | 100.0 | H | 159.0 | 34.9 | 5.3 | 46.0 |

Radiated Emission, Idle Mode (WAN POE)

| Frequency (MHz) | Quasi Peak (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|---------------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 30.689088 | 34.9 | 100.0 | V | 7.0 | 21.8 | 5.1 | 40.0 |
| 39.511200 | 37.5 | 100.0 | V | 250.0 | 22.6 | 2.5 | 40.0 |
| 51.180000 | 36.8 | 100.0 | V | 12.0 | 23.3 | 3.2 | 40.0 |
| 68.976800 | 36.6 | 150.0 | V | 154.0 | 21.3 | 3.4 | 40.0 |
| 125.008000 | 37.9 | 100.0 | V | 61.0 | 21.5 | 5.6 | 43.5 |
| 875.015200 | 39.9 | 100.0 | H | 1.0 | 34.9 | 6.1 | 46.0 |



-For Measurement Above 1 GHz

| | |
|-----------------------------|---|
| Rule Part / Standard | FCC PART 15 Subpart B Class B |
| Detector | Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz) |
| Highest Operating Frequency | 2 690 MHz |
| Upper Frequency | 1 GHz to 13.45 GHz |
| Kind of Test Site | 3 m semi anechoic chamber |
| Temperature | 20.2 / 19.8 °C |
| Relative Humidity | 37.6 / 37.3 % |
| Test Date | January 04 / January 05, 2018 |

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



Radiated Emission, Idle Mode (DC IN)

| Frequency (MHz) | Peak (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|---------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 1000.097500 | 42.9 | 348.9 | H | 173.0 | -14.0 | 31.1 | 74.0 |
| 1399.985000 | 50.6 | 345.5 | V | 217.0 | -12.9 | 23.4 | 74.0 |
| 2020.990000 | 48.9 | 99.7 | V | 66.0 | -11.7 | 25.1 | 74.0 |
| 2666.135000 | 43.0 | 361.6 | V | 0.0 | -9.4 | 31.0 | 74.0 |
| 5998.295000 | 46.7 | 111.5 | V | 107.0 | -2.2 | 27.3 | 74.0 |
| 10344.540000 | 49.6 | 249.7 | V | 275.0 | 9.2 | 24.4 | 74.0 |

| Frequency (MHz) | CAverage (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|-------------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 1000.097500 | 34.7 | 348.9 | H | 173.0 | -14.0 | 19.3 | 54.0 |
| 1399.985000 | 49.3 | 345.5 | V | 217.0 | -12.9 | 4.7 | 54.0 |
| 2020.990000 | 25.8 | 99.7 | V | 66.0 | -11.7 | 28.2 | 54.0 |
| 2666.135000 | 22.1 | 361.6 | V | 0.0 | -9.4 | 31.9 | 54.0 |
| 5998.295000 | 30.1 | 111.5 | V | 107.0 | -2.2 | 23.9 | 54.0 |
| 10344.540000 | 36.3 | 249.7 | V | 275.0 | 9.2 | 17.7 | 54.0 |

Radiated Emission, Idle Mode (LAN POE)

| Frequency (MHz) | Peak (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|---------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 1400.015000 | 50.9 | 337.3 | V | 215.0 | -12.9 | 23.1 | 74.0 |
| 1996.925000 | 52.8 | 99.8 | V | 59.0 | -11.8 | 21.2 | 74.0 |
| 2596.225000 | 47.8 | 299.2 | V | 64.0 | -9.5 | 26.2 | 74.0 |
| 2995.475000 | 40.2 | 99.8 | V | 63.0 | -8.7 | 33.8 | 74.0 |
| 5973.845000 | 46.7 | 99.8 | V | 109.0 | -2.2 | 27.3 | 74.0 |
| 8098.800000 | 44.7 | 149.9 | H | 0.0 | 4.2 | 29.3 | 74.0 |

| Frequency (MHz) | CAverage (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|-------------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 1400.015000 | 49.8 | 337.3 | V | 215.0 | -12.9 | 4.2 | 54.0 |
| 1996.925000 | 26.9 | 99.8 | V | 59.0 | -11.8 | 27.1 | 54.0 |
| 2596.225000 | 22.2 | 299.2 | V | 64.0 | -9.5 | 31.8 | 54.0 |
| 2995.475000 | 25.0 | 99.8 | V | 63.0 | -8.7 | 29.0 | 54.0 |
| 5973.845000 | 28.9 | 99.8 | V | 109.0 | -2.2 | 25.1 | 54.0 |
| 8098.800000 | 32.2 | 149.9 | H | 0.0 | 4.2 | 21.8 | 54.0 |



Radiated Emission, Idle Mode (WAN POE)

| Frequency (MHz) | Peak (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|---------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 1000.077500 | 42.6 | 249.7 | H | 180.0 | -14.0 | 31.4 | 74.0 |
| 1400.010000 | 50.8 | 319.3 | V | 222.0 | -12.9 | 23.2 | 74.0 |
| 1499.990000 | 51.5 | 399.9 | H | 19.0 | -12.6 | 22.5 | 74.0 |
| 1994.810000 | 52.4 | 99.8 | V | 56.0 | -11.8 | 21.6 | 74.0 |
| 2664.215000 | 45.8 | 100.0 | V | 63.0 | -9.4 | 28.2 | 74.0 |
| 5986.290000 | 46.5 | 111.5 | V | 109.0 | -2.2 | 27.5 | 74.0 |

| Frequency (MHz) | CAverage (dB μ V/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|-------------------------|---------------------|------------|---------------|------------|-------------|----------------------|
| 1000.077500 | 32.7 | 249.7 | H | 180.0 | -14.0 | 21.3 | 54.0 |
| 1400.010000 | 49.6 | 319.3 | V | 222.0 | -12.9 | 4.4 | 54.0 |
| 1499.990000 | 22.9 | 399.9 | H | 19.0 | -12.6 | 31.1 | 54.0 |
| 1994.810000 | 27.8 | 99.8 | V | 56.0 | -11.8 | 26.2 | 54.0 |
| 2664.215000 | 23.2 | 100.0 | V | 63.0 | -9.4 | 30.8 | 54.0 |
| 5986.290000 | 29.7 | 111.5 | V | 109.0 | -2.2 | 24.3 | 54.0 |



6. LIST OF TEST EQUIPMENT

| <u>Type</u> | <u>Manufacturer</u> | <u>Model Name</u> | <u>Serial Number</u> | <u>Calibration Cycle</u> | <u>CAL Date</u> |
|---|---------------------|-------------------|----------------------------|--------------------------|-----------------|
| <u>Conducted Emission</u> | | | | | |
| <input checked="" type="checkbox"/> EMI Test Receiver | Rohde & Schwarz | ESCI | 100584 | 1 year | 06.20.2017 |
| <input type="checkbox"/> EMI Test Receiver | Rohde & Schwarz | ESCI | 100033 | 1 year | 06.27.2017 |
| <input checked="" type="checkbox"/> LISN | Rohde & Schwarz | ESH3-Z5 | 100282 | 1 year | 05.22.2017 |
| <input checked="" type="checkbox"/> LISN | Rohde & Schwarz | ENV216 | 102245 | 1 year | 12.20.2017 |
| <input checked="" type="checkbox"/> Software | Rohde & Schwarz | EMC32 VER8.54.0 | - | - | - |
| <u>Radiated Emission</u> | | | | | |
| -For measurement below 1 GHz | | | | | |
| <input checked="" type="checkbox"/> EMI Test Receiver | Rohde & Schwarz | ESU40 | 100524 | 1 year | 08.16.2017 |
| <input checked="" type="checkbox"/> Trilog Antenna | Schwarzbeck | VULB 9168 | 760 | 2 year | 04.06.2017 |
| <input checked="" type="checkbox"/> Antenna master | HD GmbH | MA240 | 240/520 | N/A | - |
| <input checked="" type="checkbox"/> Antenna master controller | HD GmbH | HD 100 | 100/637 | N/A | - |
| <input checked="" type="checkbox"/> Turn Table | INNCO Systems | - | - | N/A | - |
| <input checked="" type="checkbox"/> Turn Table controller | INNCO Systems | CO2000 | - | N/A | - |
| <input type="checkbox"/> EMI Test Receiver | Rohde & Schwarz | ESU26 | 100241 | 1 year | 08.16.2017 |
| <input type="checkbox"/> Antenna master | INNCO Systems | MA4000-EP | MA4000/283 | N/A | - |
| <input type="checkbox"/> Turn Table | INNCO Systems | DT3000-3T | DT3000/69 | N/A | - |
| <input checked="" type="checkbox"/> Software | Rohde & Schwarz | EMC32 VER8.40.0 | - | - | - |
| -For measurement above 1 GHz | | | | | |
| <input checked="" type="checkbox"/> EMI Test Receiver | Rohde & Schwarz | ESU40 | 100524 | 1 year | 08.16.2017 |
| <input checked="" type="checkbox"/> Antenna master | INNCO Systems | MA4000-XP-ET | - | N/A | - |
| <input checked="" type="checkbox"/> Antenna master controller | INNCO Systems | CO 3000 | CO 3000/870/ 35990515/L | N/A | - |
| <input checked="" type="checkbox"/> Turn Table | INNCO Systems | - | - | N/A | - |
| <input checked="" type="checkbox"/> Turn Table controller | INNCO Systems | CO2000 | - | N/A | - |
| <input checked="" type="checkbox"/> Power Amplifier | CERNEX | CBLU5183530 | 24348 | 1 year | 06.01.2017 |
| <input type="checkbox"/> Power Amplifier | CERNEX | CBL18265035 | 21873 | 1 year | 01.19.2017 |
| <input type="checkbox"/> Power Amplifier | CERNEX | CBL26405040 | 19660 | 1 year | 07.11.2017 |
| <input checked="" type="checkbox"/> Horn Antenna | Schwarzbeck | BBHA 9120D | 296 | 2 year | 10.12.2016 |
| <input type="checkbox"/> Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170124 | 2 year | 04.25.2017 |
| <input type="checkbox"/> Antenna master controller | HD GmbH | HD 100 | 100/637 | N/A | - |
| <input type="checkbox"/> Power Amplifier | CERNEX | CBLU1183540 | 21691 | 1 year | 06.28.2017 |
| <input type="checkbox"/> Antenna master | HD GmbH | MA240 | 240/520 | N/A | - |
| <input type="checkbox"/> Horn Antenna | Schwarzbeck | BBHA 9120D | 1300 | 2 year | 06.30.2017 |
| <input type="checkbox"/> EMI Test Receiver | Rohde & Schwarz | ESU26 | 100241 | 1 year | 08.16.2017 |
| <input type="checkbox"/> Turn Table | INNCO Systems | DT3000-3T | DT3000/69 | N/A | - |
| <input checked="" type="checkbox"/> Software | Rohde & Schwarz | EMC32 VER8.40.0 | - | - | - |



7. CONCLUSION

The data collected shows that the **EUT Type: CPE, Model: C801, FCC ID: XHG-C801** complies with §15.107 and §15.109 of the FCC rules.



8. APPENDIX A. TEST SETUP PHOTOGRAPHS

Please refer to Appendix A