

Test Laboratory: UL CCS SAR Lab A

SystemPerformanceCheck-D2600V2 SN 1036

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.196$ mho/m; $\epsilon_r = 52.492$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.78, 6.78, 6.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI v4.0(A); Type: QDOVA001BB; Serial: 1119
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

Body/Pin=100 mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 7.826 mW/g


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.730 V/m; Power Drift = -0.0049 dB

Peak SAR (extrapolated) = 12.483 W/kg

SAR(1 g) = 5.67 mW/g; SAR(10 g) = 2.48 mW/g

Maximum value of SAR (measured) = 8.294 mW/g

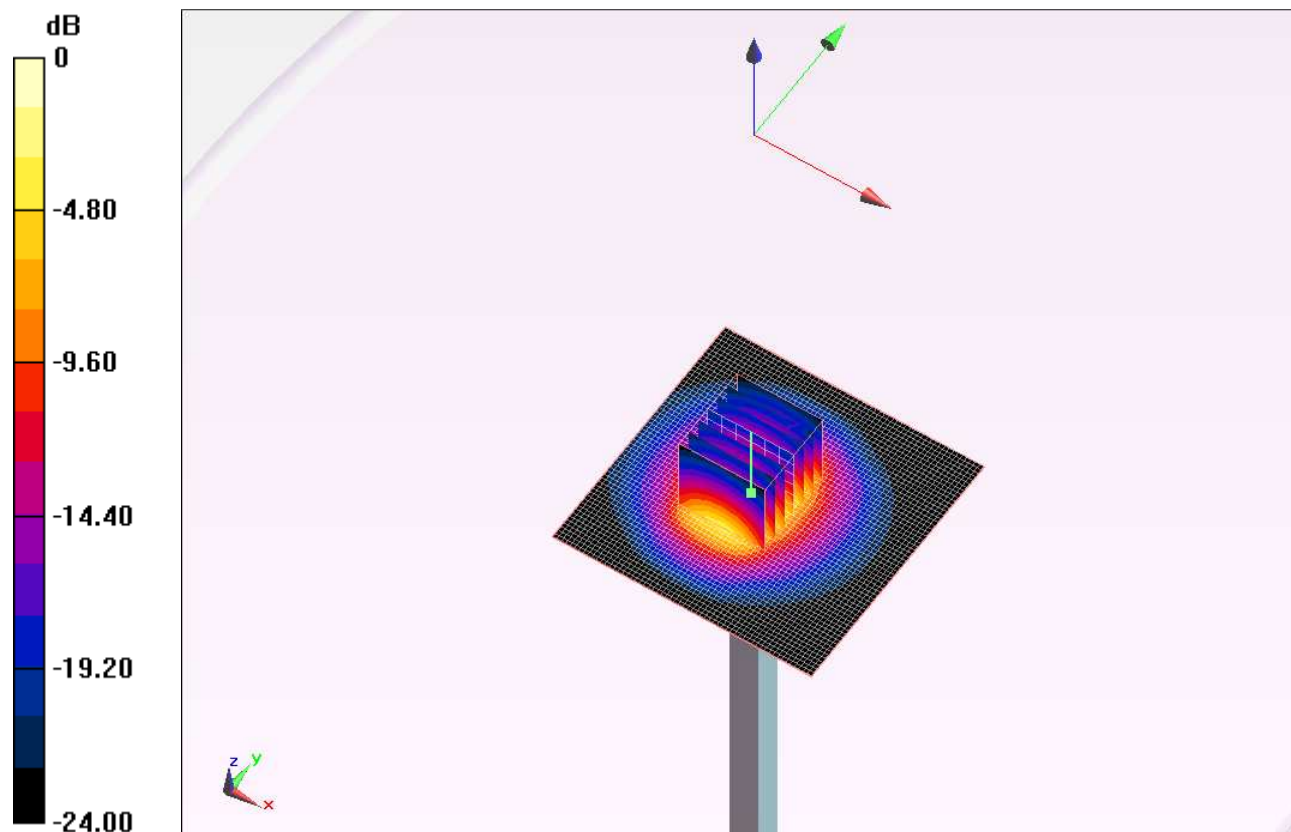

0 dB = 8.290mW/g

Test Laboratory: UL CCS SAR Lab A

SystemPerformanceCheck-D2600V2 SN 1036

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x6): Measurement grid: dx=20mm, dy=20mm, dz=20mm
Maximum value of SAR (measured) = 5.619 mW/g

